
TDA2822D

DUAL LOW-VOLTAGE POWER AMPLIFIER

- SUPPLY VOLTAGE DOWN TO 1.8V
- LOWCROSSOVER DISTORTION
- LOW QUIESCENT CURRENT
- BRIDGE OR STEREO CONFIGURATION

DESCRIPTION

The TDA2822D is a monolithic integrated circuit in 8 lead (SO-8) package. It is intended for use as dual audio power amplifier in portable cassette players, radios and CD players




SO8

ORDERING NUMBER: TDA2822D


ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V_S	Supply Voltage	15	V
I_O	Peak Output	1	A
P_{tot}	Total Power Dissipation T_{amb} = 50°C	0.5	W
T_{stg}, T_j	Storage and Junction Temperature	-40 to 150	°C

APPLICATION CIRCUIT

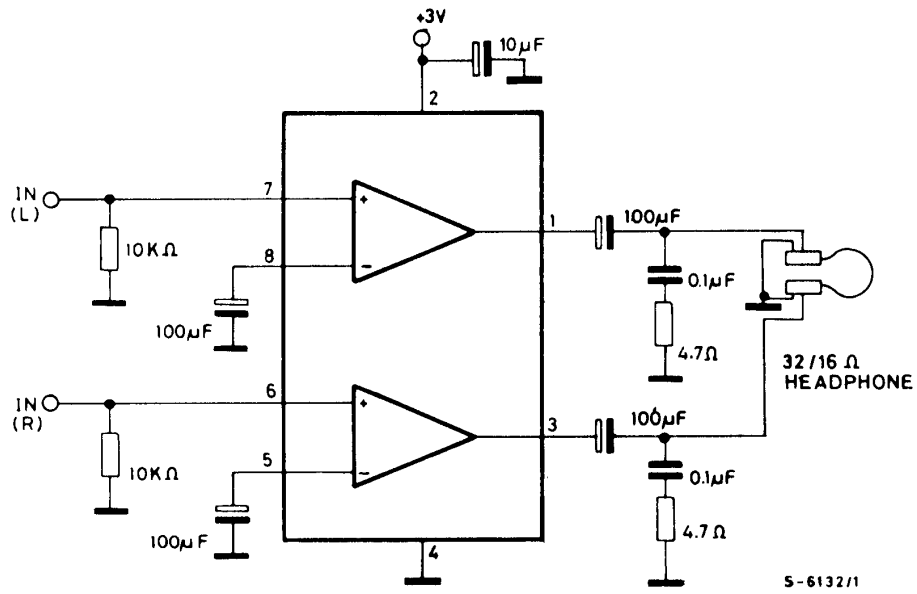

PIN CONNECTION (Top view)

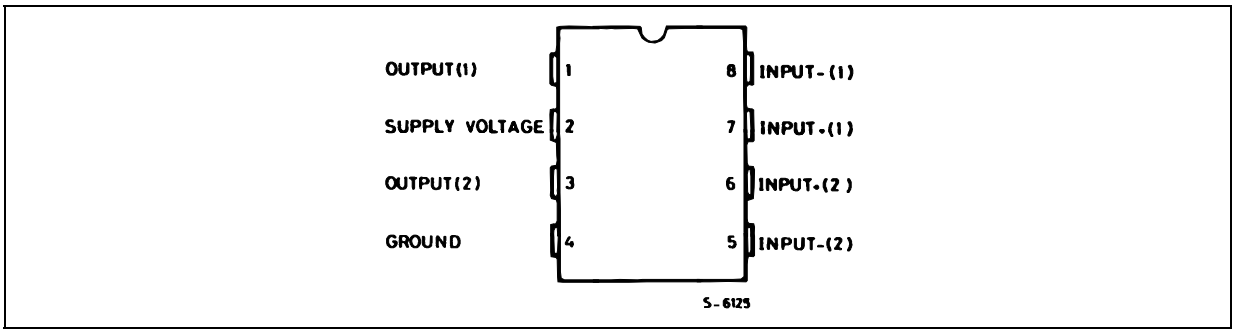

THERMAL DATA

Symbol	Description		Value	Unit
$R_{th\ j\text{-}amb}$	Thermal Resistance Junction-ambient	Max	200	°C/W

Figure 1: Stereo Application and Test Circuit


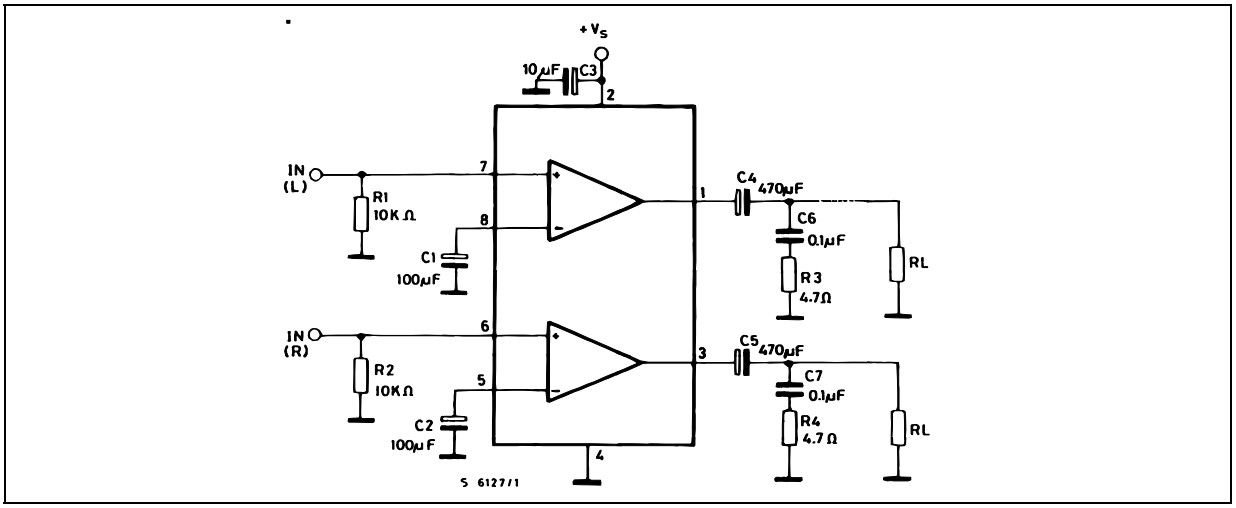


Figure 2: Bridge Application and Test Circuit

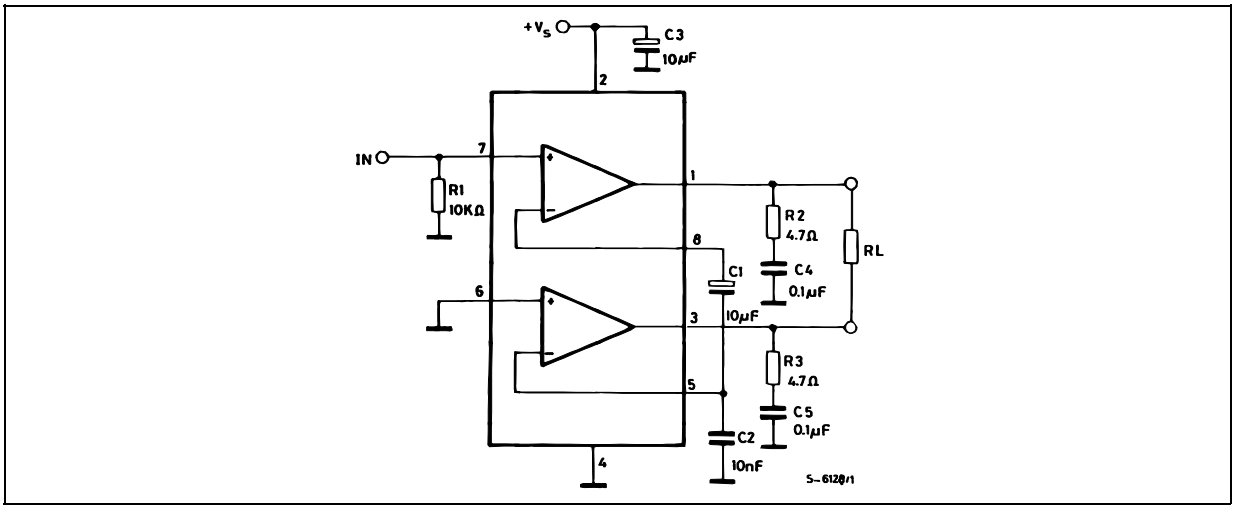

ELECTRICAL CHARACTERISTICS (V_S = 6V; T_{amb} = 25°C, unless otherwise specified.
STEREO (Test circuit of fig. 1).

Symbol	Parameter	Test Condition		Min.	Typ.	Max.	Unit
V_S	Supply Voltage			1.8		15	V
I_d	Total Quiescent Drain Current					15	mA
V_O	Quiescent Output Voltage				2.7		V
		V_S = 3V			1.2		V
I_b	Input Bias Current				100		nA
P_O	Output Power (each channel) (f = 1KHz, d = 10%)	R_L = 32Ω	V_S = 9V V_S = 6V V_S = 4.5V V_S = 3V V_S = 2V		300 120 60 20 5		mW
		R_L = 16Ω	V_S = 6V	170	220		mW
		R_L = 8Ω	V_S = 6V	300	380		mW
		R_L = 4Ω	V_S = 4.5V V_S = 3V		320 110		mW mW
d	Distortion	R_L = 32Ω	P_O = 40mW		0.2		%
		R_L = 16Ω	P_O = 75mW		0.2		%
		R_L = 8Ω	P_O = 150mW		0.2		%
G_V	Closed Loop Voltage Gain	f = 1KHz		36	39	41	dB
ΔG_V	Channel Balance					±1	dB
R_i	Input Resistance	f = 1KHz		100			KΩ
e_N	Total Input Noise	R_s = 10kΩ	B = Curve A		2		μV
		R_s = 10kΩ	B = 22Hz to 22KHz		2.5		μV
SVR	Supply Voltage Rejection	f = 100Hz	C1 = C2 = 100μF	24	30		dB
C_s	Channel Separation	f = 1KHz			50		dB

BRIDGE (Test circuit of fig.2)

V_S	Supply Voltage			1.8		15	V
I_d	Total Quiescent Drain Current	R_L = ∞				15	mA
V_{os}	Output Offset Voltage (between the outputs)	R_L = 8Ω				±80	mV
I_b	Input Bias Current				100		nA
P_O	Output Power (f = 1KHz, d = 10%)	R_L = 32Ω	V_S = 9V V_S = 6V V_S = 4.5V V_S = 3V V_S = 2V	320 50	1000 400 200 65 8		mW
		R_L = 16Ω	V_S = 6V V_S = 3V		800 120		mW mW
		R_L = 8Ω	V_S = 4.5V V_S = 3V		700 220		mW mW
		R_L = 4Ω	V_S = 3V V_S = 2V		350 80		mW mW
d	Distortion	R_L = 8Ω	P_O = 0.5W f = 1KHz		0.2		%
G_V	Closed Loop Voltage Gain	f = 1KHz			39		dB
R_i	Input Resistance	f = 1KHz		100			KΩ
e_N	Total Input Noise	R_s = 10kΩ	B = Curve A		2.5		μV
		R_s = 10kΩ	B = 22Hz to 22KHz		3		μV
SVR	Supply Voltage Rejection	f = 100Hz			40		dB
B	Power Bandwidth (-3dB)	R_L = 8Ω	P_O = 1W		120		KHz

Figure 3: Supply Voltage Rejection vs. Frequency

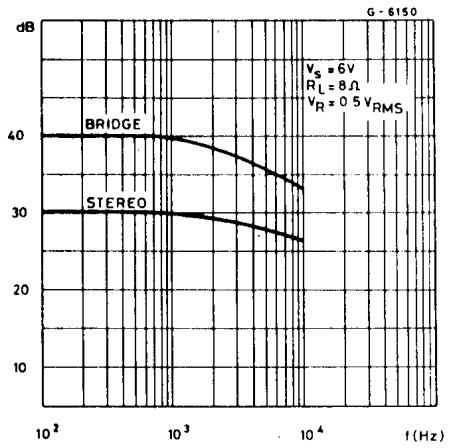


Figure 4: Output Power vs. Supply Voltage (THD = 10%, f = 1KHz Stereo)

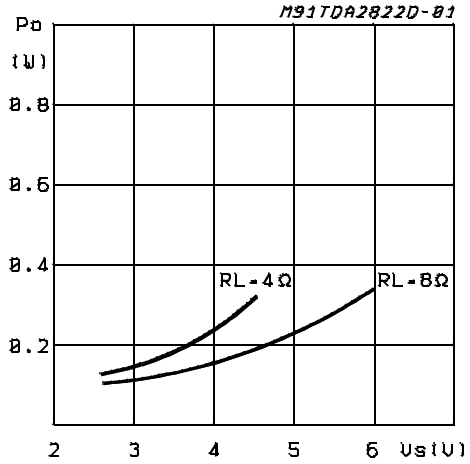


Figure 5: Total Power Dissipation vs. Output Power (Bridge)


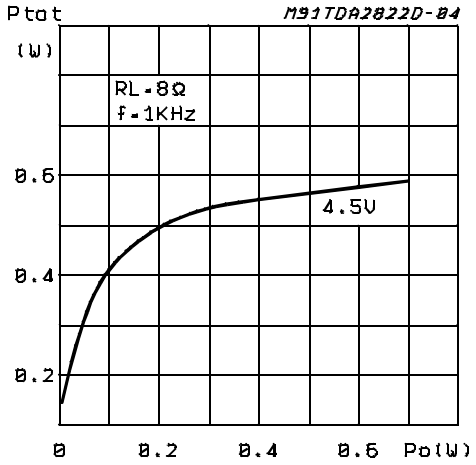



Figure 6: Total Power Dissipation vs. Output Power (Bridge)

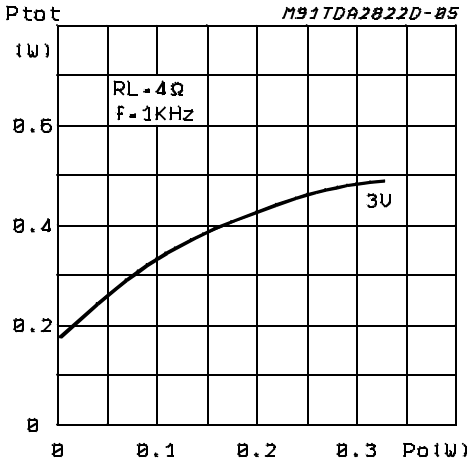


DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A			1.75			0.069
a1	0.1		0.25	0.004		0.010
a2			1.65			0.065
a3	0.65		0.85	0.026		0.033
b	0.35		0.48	0.014		0.019
b1	0.19		0.25	0.007		0.010
C	0.25		0.5	0.010		0.020
c1	45° (typ.)					
D (1)	4.8		5.0	0.189		0.197
E	5.8		6.2	0.228		0.244
e		1.27			0.050	
e3		3.81			0.150	
F (1)	3.8		4.0	0.15		0.157
L	0.4		1.27	0.016		0.050
M			0.6			0.024
S	8° (max.)					

(1) D and F do not include mold flash or protrusions. Mold flash or potrusions shall not exceed 0.15mm (.006inch).

OUTLINE AND MECHANICAL DATA



SO8

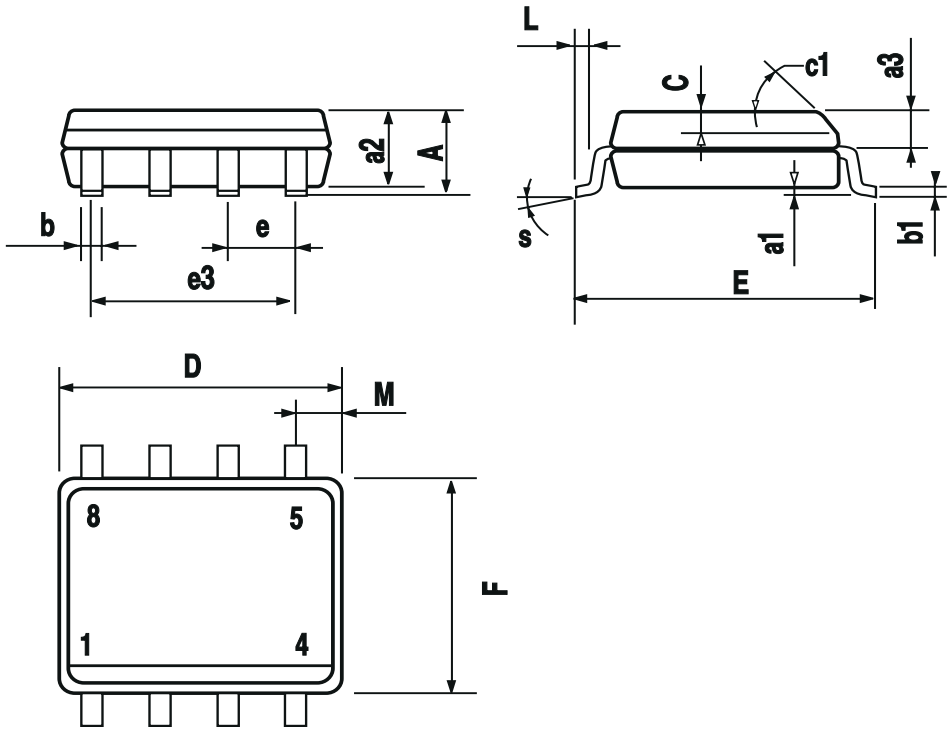

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics.

All other names are the property of their respective owners

© 2003 STMicroelectronics - All rights reserved

STMicroelectronics GROUP OF COMPANIES

Australia – Belgium - Brazil - Canada - China – Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States

www.st.com