

# TDA9881

Alignment-free vision and FM sound IF PLL demodulator for negative modulated TV standards

Rev. 01 — 16 November 2004

Product data sheet

## 1. General description

---

The TDA9881 is an alignment-free multistandard (PAL and NTSC) vision and sound IF signal PLL demodulator for negative modulation, including Quasi Split Sound (QSS) or intercarrier FM processing.

## 2. Features

---

- 5 V supply voltage
- Gain controlled wideband Vision Intermediate Frequency (VIF) amplifier; AC-coupled
- Multistandard true synchronous demodulation for negative modulated standards with active carrier regeneration: very linear demodulation, good intermodulation figures, reduced harmonics and excellent pulse response
- Fully integrated VIF Voltage Controlled Oscillator (VCO), alignment-free, frequencies switchable via logic pin VIF0 and pin QSSO with resistor
- Digital acquisition help circuit, VIF frequencies of 38.0 MHz, 38.9 MHz, 45.75 MHz and 58.75 MHz
- 4 MHz reference frequency input signal from Phase-Locked Loop (PLL) tuning system or operating as crystal oscillator
- VIF Automatic Gain Control (AGC) detector for gain control; operating as peak sync detector
- VIF AGC monitor output at pin VAGC
- Precise fully digital Automatic Frequency Control (AFC) detector with 4-bit digital-to-analog converter
- TakeOver Point (TOP) adjustable with potentiometer
- Fully integrated sound carrier trap for 4.5 MHz, 5.5 MHz, 6.0 MHz and 6.5 MHz; controlled by FM PLL oscillator
- Sound IF (SIF) input for single reference Quasi Split Sound (QSS) mode; PLL controlled
- SIF AGC for gain controlled SIF amplifier; single reference QSS mixer able to operate in high performance single reference QSS mode or in intercarrier mode; switchable via SIF input pins
- Alignment-free selective FM PLL demodulator with high linearity and low noise.

## 3. Applications

---

- TV, VTR, PC and Set-Top Box (STB) applications.

**PHILIPS**

## 4. Quick reference data

**Table 1: Quick reference data**

| Symbol                  | Parameter                                          | Conditions                                                                           | Min      | Typ   | Max  | Unit   |
|-------------------------|----------------------------------------------------|--------------------------------------------------------------------------------------|----------|-------|------|--------|
| $V_P$                   | supply voltage                                     | [1] [2]                                                                              | 4.5      | 5.0   | 5.5  | V      |
| $I_P$                   | supply current                                     |                                                                                      | 52       | 63    | 70   | mA     |
| <b>Video part</b>       |                                                    |                                                                                      |          |       |      |        |
| $V_{i(VIF)(rms)}$       | VIF input voltage sensitivity (RMS value)          | −1 dB video at output                                                                | -        | 60    | 100  | μV     |
| $G_{VIF(cr)}$           | VIF gain control range                             | see <a href="#">Figure 6</a>                                                         | 60       | 66    | -    | dB     |
| $f_{VIF}$               | vision carrier operating frequencies               | see <a href="#">Table 4</a>                                                          | -        | 38.0  | -    | MHz    |
|                         |                                                    |                                                                                      | -        | 38.9  | -    | MHz    |
|                         |                                                    |                                                                                      | -        | 45.75 | -    | MHz    |
|                         |                                                    |                                                                                      | -        | 58.75 | -    | MHz    |
| $\Delta f_{VIF}$        | VIF frequency window of digital acquisition help   | related to $f_{VIF}$ ; see <a href="#">Figure 9</a>                                  | -        | ±2.3  | -    | MHz    |
| $V_{o(video)(p-p)}$     | video signal output voltage (peak-to-peak value)   | see <a href="#">Figure 4</a>                                                         | 1.7      | 2.0   | 2.3  | V      |
| $G_{dif}$               | differential gain                                  | "CCIR 330"; B/G standard                                                             | [3] -    | -     | 5    | %      |
| $\phi_{dif}$            | differential phase                                 | "CCIR 330"                                                                           | -        | 2     | 4    | deg    |
| $B_{video(-3dB)(trap)}$ | −3 dB video bandwidth including sound carrier trap | $f_{trap} = 4.5$ MHz                                                                 | [4] 3.95 | 4.05  | -    | MHz    |
|                         |                                                    | $f_{trap} = 5.5$ MHz                                                                 | [4] 4.90 | 5.00  | -    | MHz    |
|                         |                                                    | $f_{trap} = 6.0$ MHz                                                                 | [4] 5.40 | 5.50  | -    | MHz    |
|                         |                                                    | $f_{trap} = 6.5$ MHz                                                                 | [4] 5.50 | 5.95  | -    | MHz    |
| $\alpha_{SC1}$          | trap attenuation at first sound carrier            | M/N standard                                                                         | 26       | 36    | -    | dB     |
|                         |                                                    | B/G standard                                                                         | 26       | 36    | -    | dB     |
| $S/N_{W(video)}$        | weighted signal-to-noise ratio of video signal     | weighted in accordance with "CCIR 567"; see <a href="#">Figure 10</a>                | [5] 55   | -     | -    | dB     |
| $PSRR_{CVBS}$           | power supply ripple rejection at pin CVBS          | $f_{ripple} = 70$ Hz; see <a href="#">Figure 5</a>                                   | [6] 20   | 25    | -    | dB     |
| $AFC_{stps}$            | AFC control steepness                              | definition: $\Delta I_{AFC}/\Delta f_{VIF}$                                          | 0.85     | 1.05  | 1.25 | μA/kHz |
| <b>Audio part</b>       |                                                    |                                                                                      |          |       |      |        |
| $V_{o(AF)(rms)}$        | AF output voltage (RMS value)                      | 27 kHz FM deviation; 50 μs de-emphasis                                               | 430      | 540   | 650  | mV     |
| THD                     | total harmonic distortion of audio signal          | FM: 27 kHz FM deviation; 50 μs de-emphasis                                           | -        | 0.15  | 0.50 | %      |
| $B_{AF(-3dB)}$          | −3 dB AF bandwidth                                 | without de-emphasis; dependent on FM PLL filter                                      | 80       | 100   | -    | kHz    |
| $S/N_{W(AF)}$           | weighted signal-to-noise ratio of audio signal     | FM: 27 kHz FM deviation; 50 μs de-emphasis; vision carrier unmodulated               | 52       | 56    | -    | dB     |
| $\alpha_{AM(sup)}$      | AM suppression of FM demodulator                   | 50 μs de-emphasis; AM: $f = 1$ kHz and $m = 54$ %; referenced to 27 kHz FM deviation | 40       | 46    | -    | dB     |

Table 1: Quick reference data ...continued

| Symbol                    | Parameter                                 | Conditions                                                                               | Min | Typ | Max | Unit |
|---------------------------|-------------------------------------------|------------------------------------------------------------------------------------------|-----|-----|-----|------|
| PSRR <sub>FMSO</sub>      | power supply ripple rejection on pin FMSO | FM: f <sub>ripple</sub> = 70 Hz; see <a href="#">Figure 5</a>                            | 14  | 20  | -   | dB   |
| V <sub>o(intc)(rms)</sub> | IF intercarrier output level (RMS value)  | QSS mode; SC <sub>1</sub> ; SC <sub>2</sub> off                                          | 90  | 140 | 210 | mV   |
|                           |                                           | intercarrier mode; <a href="#">[7]</a> - PC/SC <sub>1</sub> = 20 dB; SC <sub>2</sub> off | -   | 75  | -   | mV   |
| Reference frequency       |                                           |                                                                                          |     |     |     |      |
| f <sub>ref</sub>          | reference signal frequency                | <a href="#">[8]</a> -                                                                    | -   | 4   | -   | MHz  |
| V <sub>ref(rms)</sub>     | reference signal voltage (RMS value)      | operation as input terminal                                                              | 80  | -   | 400 | mV   |

- [1] Values of video and sound parameters can be decreased at  $V_P = 4.5 \text{ V}$ .
- [2] The time constant ( $R \times C$ ) at the supply must be  $> 1.2 \mu\text{s}$  (e.g.  $1 \Omega$  and  $2.2 \mu\text{F}$ ).
- [3] Condition: luminance range (5 steps) from 0 % to 100 %.
- [4] AC load:  $C_L < 20 \text{ pF}$  and  $R_L > 1 \text{ k}\Omega$ . The sound carrier frequencies (depending on the TV standard) are attenuated by the integrated sound carrier traps (see [Figure 12](#) to [Figure 17](#);  $|H(s)|$  is the absolute value of the transfer function).
- [5]  $S/N_{W(\text{video})}$  is the ratio of the black-to-white amplitude to the black level noise voltage (RMS value measured on pin CVBS).  $B = 5 \text{ MHz}$  (B/G, I and D/K standard). Noise analyzer setting: 200 kHz high-pass and SC-trap switched on.
- [6] Conditions: video signal, grey level and negative modulation.
- [7] The intercarrier output signal at pin QSSO can be calculated by the following formula taking into account the internal video signal with 1.1 V (p-p) as a reference:

$$V_{o(\text{intc})} = 1.1 \text{ V (p-p)} \times \frac{1}{2\sqrt{2}} \times 10^{\frac{\frac{V_{i(SC)}(dB) + 6 \text{ dB} \pm 3 \text{ dB}}{V_{i(PC)}}}{20}} \quad (\text{RMS})$$

where:  $\frac{1}{2\sqrt{2}}$  is the correction term for RMS value,  $\frac{V_{i(SC)}}{V_{i(PC)}}(dB)$  is the sound-to-picture carrier ratio at pins VIF1 and VIF2 in dB, 6 dB is the correction term of internal circuitry and  $\pm 3 \text{ dB}$  is the tolerance of video output and intercarrier output  $V_{o(\text{intc})}(\text{rms})$ .


- [8] Pin REF is able to operate as a 1-pin crystal oscillator input as well as an external reference signal input, e.g. from the tuning system.

## 5. Ordering information

Table 2: Ordering information

| Type number | Package |                                                                                                                        |          |
|-------------|---------|------------------------------------------------------------------------------------------------------------------------|----------|
|             | Name    | Description                                                                                                            | Version  |
| TDA9881TS   | SSOP24  | plastic shrink small outline package; 24 leads; body width 5.3 mm                                                      | SOT340-1 |
| TDA9881HN   | HVQFN32 | plastic thermal enhanced very thin quad flat package; no leads; 32 terminals; body $5 \times 5 \times 0.85 \text{ mm}$ | SOT617-3 |

## 6. Block diagram

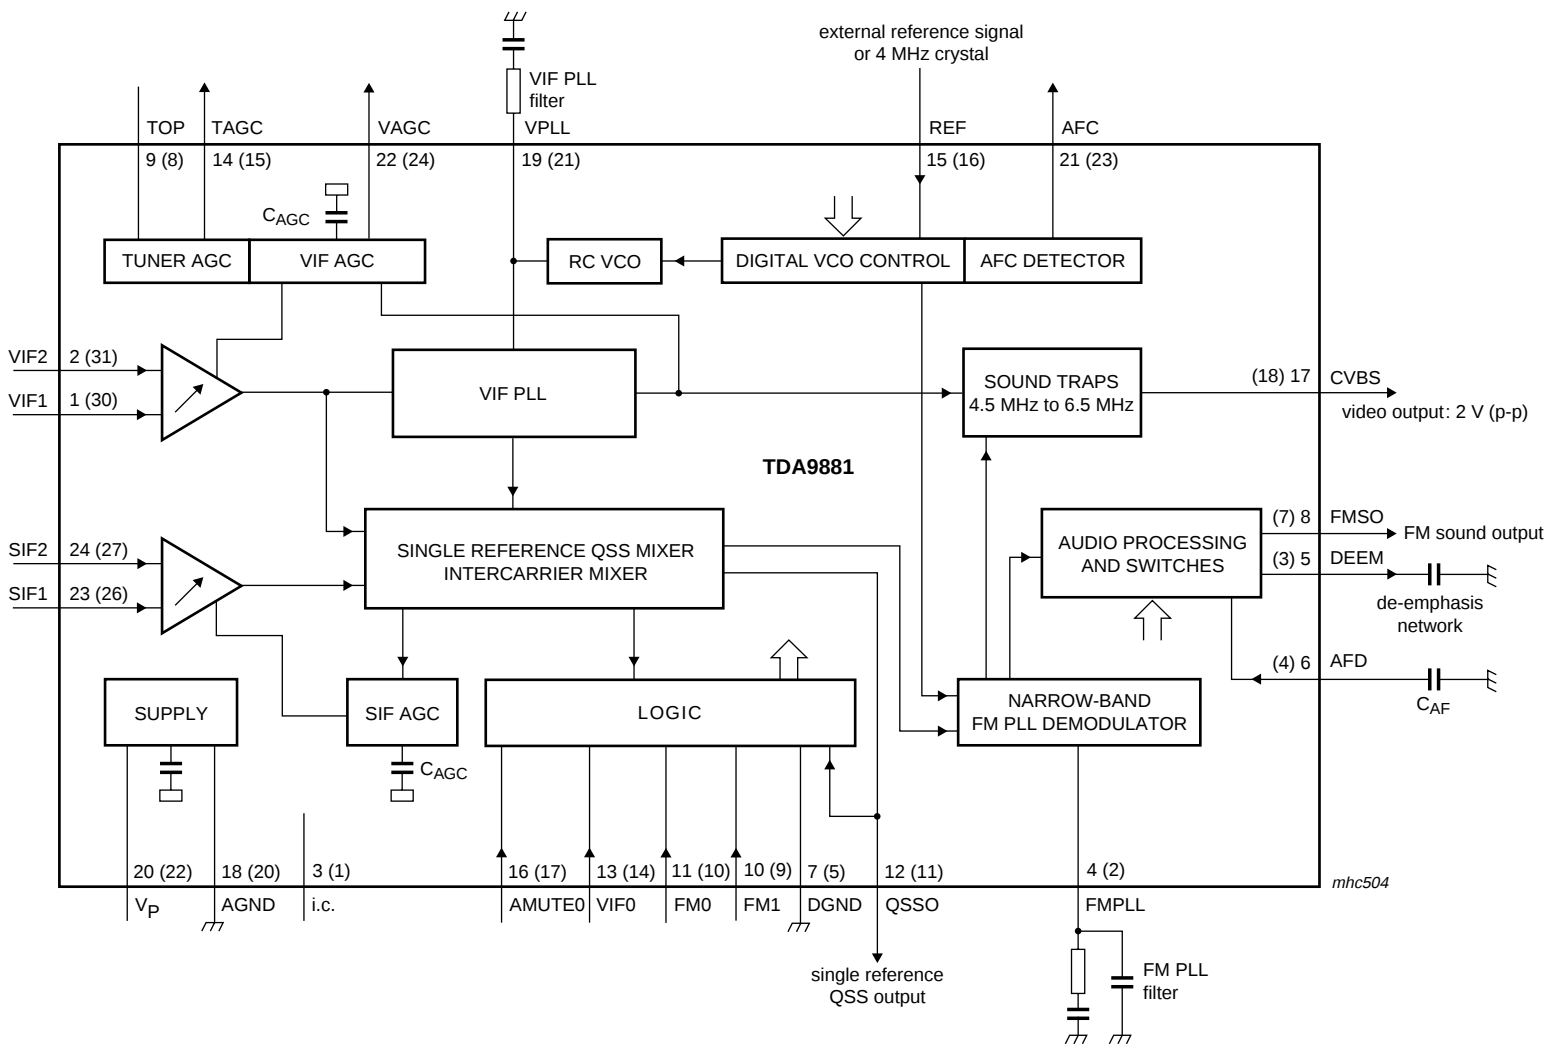


Pin numbers for TDA9881HN in parenthesis.

Fig 1. Block diagram.



7. Pinning information

7.1 Pinning

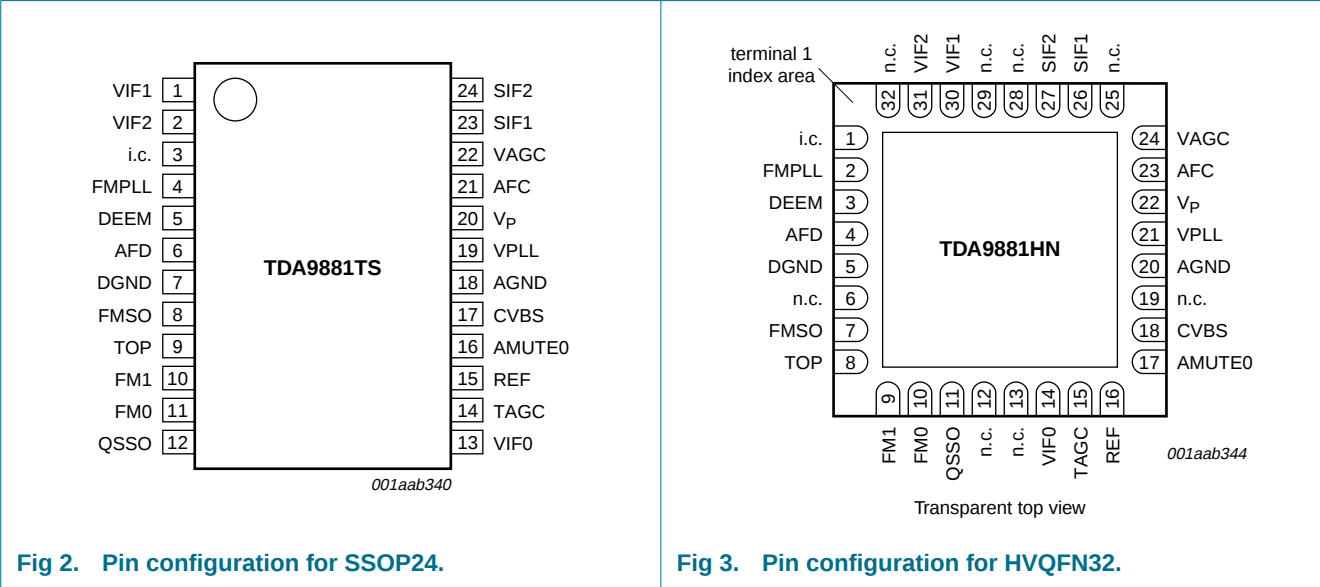

## 7.2 Pin description

Table 3: Pin description

| Symbol         | Pin       |           | Description                                                          |
|----------------|-----------|-----------|----------------------------------------------------------------------|
|                | TDA9881TS | TDA9881HN |                                                                      |
| VIF1           | 1         | 30        | VIF differential input 1                                             |
| VIF2           | 2         | 31        | VIF differential input 2                                             |
| n.c.           | -         | 32        | not connected                                                        |
| i.c.           | 3         | 1         | internally connected; leave open                                     |
| FMPLL          | 4         | 2         | FM PLL for loop filter                                               |
| DEEM           | 5         | 3         | de-emphasis output for capacitor                                     |
| AFD            | 6         | 4         | AF decoupling input for capacitor                                    |
| DGND           | 7         | 5         | digital ground                                                       |
| n.c.           | -         | 6         | not connected                                                        |
| FMSO           | 8         | 7         | FM sound output                                                      |
| TOP            | 9         | 8         | tuner AGC TakeOver Point (TOP) for resistor adjustment               |
| FM1            | 10        | 9         | FM IF select bit 1                                                   |
| FM0            | 11        | 10        | FM IF select bit 0                                                   |
| QSSO           | 12        | 11        | single reference QSS output and vision IF select bit 1 with resistor |
| n.c.           | -         | 12        | not connected                                                        |
| n.c.           | -         | 13        | not connected                                                        |
| VIF0           | 13        | 14        | vision IF select bit 0                                               |
| TAGC           | 14        | 15        | tuner AGC output                                                     |
| REF            | 15        | 16        | 4 MHz crystal or reference signal input                              |
| AMUTE0         | 16        | 17        | auto mute select bit 0                                               |
| CVBS           | 17        | 18        | composite video output                                               |
| n.c.           | -         | 19        | not connected                                                        |
| AGND           | 18        | 20        | analog ground                                                        |
| VPLL           | 19        | 21        | VIF PLL for loop filter                                              |
| V <sub>P</sub> | 20        | 22        | supply voltage                                                       |
| AFC            | 21        | 23        | AFC output                                                           |
| VAGC           | 22        | 24        | vision AGC output                                                    |
| n.c.           | -         | 25        | not connected                                                        |
| SIF1           | 23        | 26        | SIF differential input 1 and intercarrier mode select                |
| SIF2           | 24        | 27        | SIF differential input 2 and intercarrier mode select                |
| n.c.           | -         | 28        | not connected                                                        |
| n.c.           | -         | 29        | not connected                                                        |

## 8. Functional description

A simplified block diagram of the device is illustrated in [Figure 1](#). The device contains the following functional blocks:

1. VIF amplifier
2. Tuner AGC and VIF AGC
3. VIF AGC detector
4. Frequency Phase-Locked Loop (FPLL) detector
5. VCO and divider
6. AFC and digital acquisition help circuit
7. Video demodulator and amplifier
8. Sound carrier trap
9. SIF amplifier
10. SIF AGC detector
11. Single reference QSS mixer
12. FM demodulator and acquisition help circuit
13. Audio amplifier and mute time constant
14. Internal voltage stabilizer
15. Logic.

### 8.1 VIF amplifier

The VIF amplifier consists of three AC-coupled differential stages. Gain control is performed by emitter degeneration. The total gain control range is typical 66 dB. The differential input impedance is typical 2 k $\Omega$  in parallel with 3 pF.

### 8.2 Tuner AGC and VIF AGC

This block adapts the voltage, generated at the VIF AGC detector, to the internal signal processing at the VIF amplifier and performs the tuner AGC control current generation. The onset of the tuner AGC control current generation can be set by a potentiometer at pin TOP.

### 8.3 VIF AGC detector

Gain control is performed using sync level detection.

The sync level voltage is stored in an integrated capacitor by means of a fast peak detector. This voltage is compared with a reference voltage (nominal sync level) by a comparator which charges or discharges the integrated AGC capacitor to generate the VIF gain. The time constants for decreasing or increasing the gain are nearly equal and the total AGC reaction time is fast, to cope with 'aeroplane fluttering'.

## 8.4 FPLL detector

The VIF amplifier output signal is fed to a frequency detector and a phase detector via a limiting amplifier to remove the video AM.

During acquisition the frequency detector produces a current that is proportional to the frequency difference between the VIF and the VCO signal. After frequency lock-in the phase detector produces a current that is proportional to the phase difference between the VIF and the VCO signal. The currents from the frequency and phase detector are charged into the loop filter which controls the VIF VCO and locks it to the frequency and phase of the VIF carrier.

## 8.5 VCO and divider

The VCO of the VIF FPLL operates as an integrated low radiation relaxation oscillator at twice the picture carrier frequency. The control voltage, required to tune the VCO to actually double the picture carrier frequency, is generated at the loop filter by the frequency phase detector. The possible frequency range is 50 MHz to 140 MHz (typical value).

The oscillator frequency is divided-by-two to provide two differential square wave signals with exactly 90 degrees phase difference, independent of the frequency, for use in the FPLL detectors, the video demodulator and the single reference QSS or intercarrier mixer.

## 8.6 AFC and digital acquisition help circuit

Each relaxation oscillator of the VIF PLL and FM PLL demodulator has a wide frequency range. To prevent false locking of the PLLs, with respect to the catching range, the digital acquisition help circuit provides an individual control until the frequency of the VCO is within the preselected standard dependent lock-in window of the PLL.

The VIF carrier frequencies 38.0 MHz, 38.9 MHz (M/N, B/G, I and D/K standard) and 45.75 MHz, 58.75 MHz (NTSC standard) can be selected via pin VIF0 and pin QSS0 with resistor; see [Table 4](#).

The FM carrier frequencies can be selected via pin FM0 and pin FM1; see [Table 5](#).

The in-window and out-window control at the FM PLL can additionally be used to mute the audio stage (if auto mute is selected via pin AMUTE0); see [Table 6](#).

The principle working of the digital acquisition help circuit is as follows: The PLL VCO output is connected to a downcounter which has a predefined start value (standard dependent). The VCO frequency clocks the downcounter for a fixed gate time. Thereafter, the downcounter stop value is analyzed. In the event that the stop value is higher (lower) than the expected value range, the VCO frequency will be lower (higher) than the required lock-in window frequency range. A positive (negative) control current is injected into the PLL loop filter which causes the VCO frequency to be increased (decreased) and a new counting cycle starts.

The gate time as well as the control logic of the acquisition help circuit is dependent on the precision of the reference signal at pin REF. Operation as a crystal oscillator is possible as well as connecting this input via a serial capacitor to an external reference frequency e.g. the tuning system oscillator.

The AFC signal is derived from the corresponding downcounter stop value after a counting cycle. The last four bits are latched and the digital-to-analog converted value is given as current at pin AFC.

## 8.7 Video demodulator and amplifier

The video demodulator is realized by a multiplier which is designed for low distortion and large bandwidth. The VIF signal is multiplied with the 'in phase' signal of the VIF PLL VCO.

The demodulator output signal is fed into the video preamplifier via a level shift stage with integrated low-pass filter to achieve carrier harmonics attenuation.

The output signal of the preamplifier is fed to the VIF AGC detector (see [Section 8.3](#)) and in the sound trap mode is also fed internally to the integrated sound carrier trap; see [Section 8.8](#). The differential trap output signal is converted and amplified by the following postamplifier. The video output level at pin CVBS is 2 V (p-p).

Noise clipping is provided.

## 8.8 Sound carrier trap

The sound carrier trap consists of a reference filter, a phase detector and the sound trap itself.

A sound carrier reference signal is fed into the reference low-pass filter and is shifted by nominal 90 degrees. The phase detector compares the original reference signal with the signal shifted by the reference filter and produces a DC voltage by charging or discharging an integrated capacitor with a current proportional to the phase difference between both signals, respectively to the frequency error of the integrated filters. The DC voltage controls the frequency position of the reference filter and the sound trap. Thus the accurate frequency position for the different standards is set by the sound carrier reference signal.

The sound trap itself is constructed of three separate traps to realize sufficient suppression of the first and second sound carrier.

## 8.9 SIF amplifier

The SIF amplifier consists of three AC-coupled differential stages. Gain control is performed by emitter degeneration. The total gain control range is typical 66 dB. The differential input impedance is typical 2 k $\Omega$  in parallel with 3 pF.

## 8.10 SIF AGC detector

SIF gain control is performed by the detection of the SIF voltage at the output of the SIF amplifier so that a constant SIF signal is supplied to the single reference QSS mixer.

For an optimum adaption between the SIF AGC and the VIF AGC characteristics at 13 dB picture-to-sound FM carrier ratio, the internal SIF level is reduced.

The integrated AGC capacitor is charged or discharged for the generation of the required SIF gain via a comparator. An additional circuit (threshold approximately 7 dB) ensures a very fast gain reduction for a large increasing IF amplitude step.

### 8.11 Single reference QSS mixer

With the present system high performance Hi-Fi stereo sound processing can be achieved. For a simplified application without an SIF SAW filter, the single reference QSS mixer can be switched to the intercarrier mode via pins SIF1 and SIF2; see [Table 7](#).

The single reference QSS mixer generates the 2nd FM TV sound intercarrier signal. It is realized by a linear multiplier which multiplies the SIF amplifier output signal and the VIF PLL VCO signal which is locked to the picture carrier. In this way the QSS mixer operates as a quadrature mixer in the intercarrier mode and provides suppression of the low frequency video signals.

The QSS mixer output signal is fed internally via a high-pass and low-pass combination to the FM demodulator as well as via an operational amplifier to the QSS output pin QSSO.

### 8.12 FM demodulator and acquisition help circuit

The narrow-band FM PLL detector consists of:

- Gain controlled FM amplifier and AGC detector
- Narrow-band PLL.

The intercarrier signal from the single reference QSS mixer is fed to the input of an AC-coupled gain controlled amplifier with two stages. The gain controlled output signal is fed to the phase detector of the narrow-band FM PLL (FM demodulator). For good selectivity and robustness against disturbance caused by the video signal, a high linearity of the gain controlled FM amplifier and of the phase detector as well as a constant signal level are required. The gain control is done by means of an 'in phase' demodulator for the FM carrier (from the output of the FM amplifier). The demodulation output is fed into a comparator for charging or discharging the integrated AGC capacitor. This leads to a mean value AGC loop to control the gain of the FM amplifier.

The FM demodulator is realized as a narrow-band PLL with an external loop filter, which provides the necessary selectivity (bandwidth approximately 100 kHz). To achieve good selectivity, a linear phase detector and a constant input level are required. The gain controlled intercarrier signal from the FM amplifier is fed to the phase detector. The phase detector controls, via the loop filter, the integrated low radiation relaxation oscillator. The designed frequency range is from 4 MHz to 7 MHz.

The VCO within the FM PLL is phase-locked to the incoming 2nd SIF signal which is frequency modulated. The VCO control voltage is superimposed by the AF voltage. Therefore, the VCO tracks with the FM of the 2nd SIF signal. Thus, the AF voltage is present at the loop filter and is typically 5 mV (RMS) for 27 kHz FM deviation. This AF signal is fed via a buffer to the audio amplifier.

The correct locking of the PLL is supported by the digital acquisition help circuit; see [Section 8.6](#).

### 8.13 Audio amplifier and mute time constant

The audio amplifier consists of two parts:

- AF preamplifier
- AF output amplifier.

The AF preamplifier used for FM sound is an operational amplifier with internal feedback, high gain and high common mode rejection. The AF voltage from the PLL demodulator is 5 mV (RMS) for a frequency deviation of 27 kHz and is amplified by 30 dB. By using a DC operating point control circuit (with external capacitor  $C_{AF}$ ), the AF preamplifier is decoupled from the PLL DC voltage. The low-pass characteristic of the amplifier reduces the harmonics of the sound intercarrier signal at the AF output terminal.

For FM sound a switchable de-emphasis network (with external capacitor) is implemented between the preamplifier and the output amplifier. The de-emphasis time constant with 50  $\mu$ s or 75  $\mu$ s depends on the FM carrier selection via pins FM0 and FM1; see [Table 5](#).

The AF output amplifier provides the required AF output level by a rail-to-rail output stage. A preceding stage makes use of an input selector for switching between the FM sound and mute state.

Switching to the mute state is controlled automatically, depending on the digital acquisition help circuit should the VCO of the FM PLL not be in the required frequency window. This is done by a time constant: fast for switching to the mute state and slow (typically 40 ms) for switching to the non-mute state.

Auto mute can be disabled via pin AMUTE0; see [Table 6](#).

### 8.14 Internal voltage stabilizer

The band gap circuit internally generates a voltage of approximately 2.4 V, independent of the supply voltage and the temperature. A voltage regulator circuit, connected to this voltage, produces a constant voltage of 3.55 V which is used as an internal reference voltage.

### 8.15 Logic

The logic circuit detects the logic level at the logic ports VIF0, QSSO, FM0, FM1 and AMUTE0 and controls the internal functions; see [Table 4](#) to [Table 6](#). In the event that all logic ports are open-circuit (high-ohmic or CMOS HIGH level) TV standard NTSC with a vision carrier frequency of 45.75 MHz, an FM sound carrier frequency of 4.5 MHz, de-emphasis with 75  $\mu$ s time constant and auto mute on is selected.

**Table 4: VIF frequency selection**

| QSSO                                     | VIF0                    | VIF frequency (MHz) |
|------------------------------------------|-------------------------|---------------------|
| No resistor at pin                       | pin open-circuit        | 45.75               |
| No resistor at pin                       | pin connected to ground | 38.9                |
| 2.2 k $\Omega$ resistor to ground at pin | pin open-circuit        | 58.75               |
| 2.2 k $\Omega$ resistor to ground at pin | pin connected to ground | 38.0                |

Table 5: FM carrier frequency selection and de-emphasis settings

| FM0                     | FM1                     | FM carrier frequency (MHz) | De-emphasis ( $\mu$ s) |
|-------------------------|-------------------------|----------------------------|------------------------|
| Pin open-circuit        | pin open-circuit        | 4.5                        | 75                     |
| Pin connected to ground | pin open-circuit        | 5.5                        | 50                     |
| Pin open-circuit        | pin connected to ground | 6.0                        | 50                     |
| Pin connected to ground | pin connected to ground | 6.5                        | 50                     |

Table 6: Auto mute on/off selection

| AMUTE0                  | Auto mute |
|-------------------------|-----------|
| Pin open-circuit        | on        |
| Pin connected to ground | off       |

Table 7: Sound carrier mode

| SIF1 and SIF2                        | Sound mode        |
|--------------------------------------|-------------------|
| No DC path to ground                 | QSS mode          |
| One or both pins connected to ground | intercarrier mode |

## 9. Limiting values

Table 8: Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).

| Symbol    | Parameter                             | Conditions       | Min   | Max        | Unit         |
|-----------|---------------------------------------|------------------|-------|------------|--------------|
| $V_P$     | supply voltage                        |                  | -     | 5.5        | V            |
| $V_n$     | voltage on                            |                  |       |            |              |
|           | all pins except AGND, DGND and TAGC   |                  | 0     | $V_P$      | V            |
|           | pin TAGC                              |                  | 0     | 8.8        | V            |
| $t_{sc}$  | short-circuit time to ground or $V_P$ |                  | -     | 10         | s            |
| $T_{stg}$ | storage temperature                   |                  | -25   | +150       | $^{\circ}$ C |
| $T_{amb}$ | ambient temperature                   |                  |       |            |              |
|           | TDA9881TS (SSOP24)                    |                  | -20   | +70        | $^{\circ}$ C |
|           | TDA9881HN (HVQFN32)                   |                  | -20   | +85        | $^{\circ}$ C |
| $V_{esd}$ | electrostatic discharge voltage       | human body model | [1] - | $\pm 4000$ | V            |
|           |                                       | machine model    | [2] - | $\pm 400$  | V            |

[1] Class 3A according to JESD22-A114-B.

[2] Class C according to EIA/JESD22-A115-A.

## 10. Thermal characteristics

**Table 9: Thermal characteristics**

| Symbol        | Parameter                                   | Conditions  | Typ | Unit |
|---------------|---------------------------------------------|-------------|-----|------|
| $R_{th(j-a)}$ | thermal resistance from junction to ambient | in free air |     |      |
|               | TDA9881TS (SSOP24)                          |             | 105 | K/W  |
|               | TDA9881HN (HVQFN32)                         |             | 40  | K/W  |

## 11. Characteristics

**Table 10: Characteristics**

$V_P = 5\text{ V}$ ;  $T_{amb} = 25\text{ °C}$ ; see [Table 12](#) for input frequencies; B/G standard is used for the specification ( $f_{PC} = 38.9\text{ MHz}$ ;  $f_{SC} = 33.4\text{ MHz}$ ;  $PC/SC = 13\text{ dB}$ ;  $f_{mod} = 400\text{ Hz}$ ); input level  $V_{i(VIF)} = 10\text{ mV (RMS)}$  (sync level for B/G); IF input from  $50\text{ }\Omega$  via broadband transformer 1 : 1; video modulation DSB; residual carrier for B/G is 10 %; video signal in accordance with "CCIR line 17 and line 330"; measurements taken in test circuit of [Figure 21](#); unless otherwise specified.

| Symbol                                   | Parameter                                                          | Conditions                                    | Min | Typ  | Max | Unit             |
|------------------------------------------|--------------------------------------------------------------------|-----------------------------------------------|-----|------|-----|------------------|
| <b>Supply; pin <math>V_P</math></b>      |                                                                    |                                               |     |      |     |                  |
| $V_P$                                    | supply voltage                                                     | <a href="#">[1]</a>                           | 4.5 | 5.0  | 5.5 | V                |
| $I_P$                                    | supply current                                                     |                                               | 52  | 63   | 70  | mA               |
| $P_{tot}$                                | total power dissipation                                            |                                               | -   | 305  | 385 | mW               |
| <b>Power-on reset</b>                    |                                                                    |                                               |     |      |     |                  |
| $V_{P(start)}$                           | supply voltage for start of reset                                  | decreasing supply voltage                     | 2.5 | 3.0  | 3.5 | V                |
| $V_{P(stop)}$                            | supply voltage for end of reset                                    | increasing supply voltage                     | -   | -    | 4.4 | V                |
| $\tau_P$                                 | time constant ( $R \times C$ ) for network at pin $V_P$            |                                               | 1.2 | -    | -   | $\mu\text{s}$    |
| <b>VIF amplifier; pins VIF1 and VIF2</b> |                                                                    |                                               |     |      |     |                  |
| $V_{i(VIF)(rms)}$                        | VIF input voltage sensitivity (RMS value)                          | -1 dB video at output                         | -   | 60   | 100 | $\mu\text{V}$    |
| $V_{i(max)(rms)}$                        | maximum input voltage (RMS value)                                  | +1 dB video at output                         | 150 | 190  | -   | mV               |
| $V_{i(ovl)(rms)}$                        | overload input voltage (RMS value)                                 | <a href="#">[2]</a>                           | -   | -    | 440 | mV               |
| $\Delta V_{IF(int)}$                     | internal IF amplitude difference between picture and sound carrier | within AGC range; $\Delta f = 5.5\text{ MHz}$ | -   | 0.9  | -   | dB               |
| $G_{VIF(cr)}$                            | VIF gain control range                                             | see <a href="#">Figure 6</a>                  | 60  | 66   | -   | dB               |
| $B_{VIF(-3dB)(ll)}$                      | lower limit -3 dB VIF bandwidth                                    |                                               | -   | 15   | -   | MHz              |
| $B_{VIF(-3dB)(ul)}$                      | upper limit -3 dB VIF bandwidth                                    |                                               | -   | 80   | -   | MHz              |
| $R_{i(dif)}$                             | differential input resistance                                      | <a href="#">[3]</a>                           | -   | 2    | -   | $\text{k}\Omega$ |
| $C_{i(dif)}$                             | differential input capacitance                                     | <a href="#">[3]</a>                           | -   | 3    | -   | pF               |
| $V_I$                                    | DC input voltage                                                   |                                               | -   | 1.93 | -   | V                |

**Table 10: Characteristics ...continued**

$V_P = 5\text{ V}$ ;  $T_{amb} = 25\text{ }^\circ\text{C}$ ; see [Table 12](#) for input frequencies; B/G standard is used for the specification ( $f_{PC} = 38.9\text{ MHz}$ ;  $f_{SC} = 33.4\text{ MHz}$ ;  $PC/SC = 13\text{ dB}$ ;  $f_{mod} = 400\text{ Hz}$ ); input level  $V_{i(VIF)} = 10\text{ mV (RMS)}$  (sync level for B/G); IF input from  $50\text{ }\Omega$  via broadband transformer 1 : 1; video modulation DSB; residual carrier for B/G is 10 %; video signal in accordance with "CCIR line 17 and line 330"; measurements taken in test circuit of [Figure 21](#); unless otherwise specified.

| Symbol                                                 | Parameter                                                  | Conditions                                          | Min         | Typ       | Max  | Unit              |
|--------------------------------------------------------|------------------------------------------------------------|-----------------------------------------------------|-------------|-----------|------|-------------------|
| <b>FPLL and true synchronous video demodulator [4]</b> |                                                            |                                                     |             |           |      |                   |
| $f_{VCO(max)}$                                         | maximum oscillator frequency for carrier regeneration      | $f = 2f_{PC}$                                       | 120         | 140       | -    | MHz               |
| $f_{VIF}$                                              | vision carrier operating frequencies                       | see <a href="#">Table 4</a>                         | -           | 38.0      | -    | MHz               |
|                                                        |                                                            |                                                     | -           | 38.9      | -    | MHz               |
|                                                        |                                                            |                                                     | -           | 45.75     | -    | MHz               |
|                                                        |                                                            |                                                     | -           | 58.75     | -    | MHz               |
| $\Delta f_{VIF}$                                       | VIF frequency window of digital acquisition help           | related to $f_{VIF}$ ; see <a href="#">Figure 9</a> | -           | $\pm 2.3$ | -    | MHz               |
| $t_{acq}$                                              | acquisition time                                           | BL = 70 kHz                                         | [5] -       | -         | 30   | ms                |
| $V_{i(lock)(rms)}$                                     | input voltage sensitivity for PLL to be locked (RMS value) | measured on pins VIF1 and VIF2; maximum IF gain     | -           | 50        | 100  | $\mu\text{V}$     |
| $T_{cy(DAH)}$                                          | cycle time of digital acquisition help                     |                                                     | -           | 64        | -    | $\mu\text{s}$     |
| $K_{O(VIF)}$                                           | VIF VCO steepness                                          | definition: $\Delta f_{VIF}/\Delta V_{VPLL}$        | -           | 20        | -    | MHz/V             |
| $K_{D(VIF)}$                                           | VIF phase detector steepness                               | definition: $\Delta I_{VPLL}/\Delta \phi_{VIF}$     | -           | 23        | -    | $\mu\text{A/rad}$ |
| <b>Video output 2 V; pin CVBS; sound carrier on</b>    |                                                            |                                                     |             |           |      |                   |
| $V_{o(p-p)}$                                           | video output voltage (peak-to-peak value)                  | see <a href="#">Figure 4</a>                        | 1.7         | 2.0       | 2.3  | V                 |
| V/S                                                    | ratio between video (black-to-white) and sync level        |                                                     | 1.90        | 2.33      | 3.00 |                   |
| $V_{sync}$                                             | sync voltage level                                         |                                                     | 1.0         | 1.2       | 1.4  | V                 |
| $V_{clip(u)}$                                          | upper video clipping voltage level                         |                                                     | $V_P - 1.1$ | $V_P - 1$ | -    | V                 |
| $V_{clip(l)}$                                          | lower video clipping voltage level                         |                                                     | -           | 0.7       | 0.9  | V                 |
| $R_o$                                                  | output resistance                                          | [3]                                                 | -           | -         | 30   | $\Omega$          |
| $I_{bias(int)}$                                        | internal DC bias current for emitter-follower              |                                                     | 1.5         | 2.0       | -    | mA                |
| $I_{o(sink)(max)}$                                     | maximum AC and DC output sink current                      |                                                     | 1           | -         | -    | mA                |
| $I_{o(source)(max)}$                                   | maximum AC and DC output source current                    |                                                     | 3.9         | -         | -    | mA                |
| $\Delta V_{o(CVBS)}$                                   | deviation of CVBS output voltage                           | 50 dB gain control                                  | -           | -         | 0.5  | dB                |
|                                                        |                                                            | 30 dB gain control                                  | -           | -         | 0.1  | dB                |
| $\Delta V_{o(bl)}$                                     | black level tilt                                           |                                                     | -           | -         | 2    | %                 |
| $G_{dif}$                                              | differential gain                                          | "CCIR 330", B/G standard                            | [6] -       | -         | 5    | %                 |

**Table 10: Characteristics ...continued**

$V_P = 5\text{ V}$ ;  $T_{amb} = 25\text{ }^{\circ}\text{C}$ ; see [Table 12](#) for input frequencies; B/G standard is used for the specification ( $f_{PC} = 38.9\text{ MHz}$ ;  $f_{SC} = 33.4\text{ MHz}$ ;  $PC/SC = 13\text{ dB}$ ;  $f_{mod} = 400\text{ Hz}$ ); input level  $V_{i(VIF)} = 10\text{ mV (RMS)}$  (sync level for B/G); IF input from  $50\text{ }\Omega$  via broadband transformer 1 : 1; video modulation DSB; residual carrier for B/G is 10 %; video signal in accordance with "CCIR line 17 and line 330"; measurements taken in test circuit of [Figure 21](#); unless otherwise specified.

| Symbol                                                      | Parameter                                                       | Conditions                                                            | Min       | Typ  | Max | Unit |
|-------------------------------------------------------------|-----------------------------------------------------------------|-----------------------------------------------------------------------|-----------|------|-----|------|
| $\Phi_{dif}$                                                | differential phase                                              | "CCIR 330"                                                            | -         | 2    | 4   | deg  |
| $S/N_{W(video)}$                                            | weighted signal-to-noise ratio                                  | weighted in accordance with "CCIR 567"; see <a href="#">Figure 10</a> | [7] 55    | -    | -   | dB   |
| $S/N_{UW(video)}$                                           | unweighted signal-to-noise ratio                                |                                                                       | [7] 47    | -    | -   | dB   |
| $\alpha_{IM(blue)}$                                         | intermodulation attenuation at 'blue'                           | see <a href="#">Figure 11</a>                                         | [8]       |      |     |      |
|                                                             |                                                                 | $f = 1.1\text{ MHz}$                                                  | 58        | 64   | -   | dB   |
|                                                             |                                                                 | $f = 3.3\text{ MHz}$                                                  | 58        | 64   | -   | dB   |
| $\alpha_{IM(yellow)}$                                       | intermodulation attenuation at 'yellow'                         | see <a href="#">Figure 11</a>                                         | [8]       |      |     |      |
|                                                             |                                                                 | $f = 1.1\text{ MHz}$                                                  | 60        | 66   | -   | dB   |
|                                                             |                                                                 | $f = 3.3\text{ MHz}$                                                  | 59        | 65   | -   | dB   |
| $\Delta V_{r(PC)(rms)}$                                     | residual picture carrier (RMS value)                            | fundamental wave and harmonics                                        | -         | 2    | 5   | mV   |
| $\alpha_H$                                                  | suppression of video signal harmonics                           | $C_L < 20\text{ pF}$ ; $R_L > 1\text{ k}\Omega$ ; AC load             | [9] 35    | 40   | -   | dB   |
| $\alpha_{spur}$                                             | suppression of spurious elements                                |                                                                       | [10] 40   | -    | -   | dB   |
| $PSRR_{CVBS}$                                               | power supply ripple rejection at pin CVBS                       | $f_{ripple} = 70\text{ Hz}$ ; see <a href="#">Figure 5</a>            | [11] 20   | 25   | -   | dB   |
| M/N standard inclusive Korea; see <a href="#">Figure 12</a> |                                                                 |                                                                       |           |      |     |      |
| $B_{V(-3dB)(trap)}$                                         | -3 dB video bandwidth including sound carrier trap              | $f_{trap} = 4.5\text{ MHz}$                                           | [12] 3.95 | 4.05 | -   | MHz  |
| $\alpha_{SC1}$                                              | attenuation at first sound carrier                              | $f = 4.5\text{ MHz}$                                                  | 26        | 36   | -   | dB   |
| $\alpha_{SC1(60kHz)}$                                       | attenuation at first sound carrier $f_{SC1} \pm 60\text{ kHz}$  | $f = 4.5\text{ MHz}$                                                  | 20        | 27   | -   | dB   |
| $\alpha_{SC2}$                                              | attenuation at second sound carrier                             | $f = 4.724\text{ MHz}$                                                | 20        | 27   | -   | dB   |
| $\alpha_{SC2(60kHz)}$                                       | attenuation at second sound carrier $f_{SC2} \pm 60\text{ kHz}$ | $f = 4.724\text{ MHz}$                                                | 14        | 21   | -   | dB   |
| $t_{d(g)(cc)}$                                              | group delay at color carrier frequency                          | $f = 3.58\text{ MHz}$ ; see <a href="#">Figure 13</a>                 | 110       | 180  | 250 | ns   |
| B/G standard; see <a href="#">Figure 14</a>                 |                                                                 |                                                                       |           |      |     |      |
| $B_{V(-3dB)(trap)}$                                         | -3 dB video bandwidth including sound carrier trap              | $f_{trap} = 5.5\text{ MHz}$                                           | [12] 4.90 | 5.00 | -   | MHz  |
| $\alpha_{SC1}$                                              | attenuation at first sound carrier                              | $f = 5.5\text{ MHz}$                                                  | 26        | 36   | -   | dB   |
| $\alpha_{SC1(60kHz)}$                                       | attenuation at first sound carrier $f_{SC1} \pm 60\text{ kHz}$  | $f = 5.5\text{ MHz}$                                                  | 20        | 30   | -   | dB   |

**Table 10: Characteristics ...continued**

$V_P = 5\text{ V}$ ;  $T_{amb} = 25\text{ }^{\circ}\text{C}$ ; see [Table 12](#) for input frequencies; B/G standard is used for the specification ( $f_{PC} = 38.9\text{ MHz}$ ;  $f_{SC} = 33.4\text{ MHz}$ ;  $PC/SC = 13\text{ dB}$ ;  $f_{mod} = 400\text{ Hz}$ ); input level  $V_{i(VIF)} = 10\text{ mV (RMS)}$  (sync level for B/G); IF input from  $50\text{ }\Omega$  via broadband transformer 1 : 1; video modulation DSB; residual carrier for B/G is 10 %; video signal in accordance with "CCIR line 17 and line 330"; measurements taken in test circuit of [Figure 21](#); unless otherwise specified.

| Symbol                                      | Parameter                                                          | Conditions                                               | Min                       | Typ  | Max | Unit |
|---------------------------------------------|--------------------------------------------------------------------|----------------------------------------------------------|---------------------------|------|-----|------|
| $\alpha_{SC2}$                              | attenuation at second sound carrier                                | $f = 5.742\text{ MHz}$                                   | 20                        | 27   | -   | dB   |
| $\alpha_{SC2(60kHz)}$                       | attenuation at second sound carrier<br>$f_{SC2} \pm 60\text{ kHz}$ | $f = 5.742\text{ MHz}$                                   | 14                        | 21   | -   | dB   |
| $t_{d(g)(cc)}$                              | group delay at color carrier frequency                             | $f = 4.43\text{ MHz}$ ;<br>see <a href="#">Figure 15</a> | 110                       | 180  | 250 | ns   |
| I standard; see <a href="#">Figure 16</a>   |                                                                    |                                                          |                           |      |     |      |
| $B_{V(-3dB)(trap)}$                         | -3 dB video bandwidth including sound carrier trap                 | $f_{trap} = 6.0\text{ MHz}$                              | <a href="#">[12]</a> 5.40 | 5.50 | -   | MHz  |
| $\alpha_{SC1}$                              | attenuation at first sound carrier                                 | $f = 6.0\text{ MHz}$                                     | 26                        | 32   | -   | dB   |
| $\alpha_{SC1(60kHz)}$                       | attenuation at first sound carrier<br>$f_{SC1} \pm 60\text{ kHz}$  | $f = 6.0\text{ MHz}$                                     | 20                        | 26   | -   | dB   |
| $\alpha_{SC2}$                              | attenuation at second sound carrier                                | $f = 6.55\text{ MHz}$                                    | 12                        | 18   | -   | dB   |
| $\alpha_{SC2(60kHz)}$                       | attenuation at second sound carrier<br>$f_{SC2} \pm 60\text{ kHz}$ | $f = 6.55\text{ MHz}$                                    | 10                        | 15   | -   | dB   |
| $t_{d(g)(cc)}$                              | group delay at color carrier frequency                             | $f = 4.43\text{ MHz}$                                    | -                         | 90   | 160 | ns   |
| D/K standard; see <a href="#">Figure 17</a> |                                                                    |                                                          |                           |      |     |      |
| $B_{V(-3dB)(trap)}$                         | -3 dB video bandwidth including sound carrier trap                 | $f_{trap} = 6.5\text{ MHz}$                              | <a href="#">[12]</a> 5.50 | 5.95 | -   | MHz  |
| $\alpha_{SC1}$                              | attenuation at first sound carrier                                 | $f = 6.5\text{ MHz}$                                     | 26                        | 32   | -   | dB   |
| $\alpha_{SC1(60kHz)}$                       | attenuation at first sound carrier<br>$f_{SC1} \pm 60\text{ kHz}$  | $f = 6.5\text{ MHz}$                                     | 20                        | 26   | -   | dB   |
| $\alpha_{SC2}$                              | attenuation at second sound carrier                                | $f = 6.742\text{ MHz}$                                   | 18                        | 24   | -   | dB   |
| $\alpha_{SC2(60kHz)}$                       | attenuation at second sound carrier<br>$f_{SC2} \pm 60\text{ kHz}$ | $f = 6.742\text{ MHz}$                                   | 13                        | 18   | -   | dB   |
| $t_{d(g)(cc)}$                              | group delay at color carrier frequency                             | $f = 4.28\text{ MHz}$                                    | -                         | 60   | 130 | ns   |
| VIF AGC                                     |                                                                    |                                                          |                           |      |     |      |
| $t_{resp(inc)}$                             | AGC response time to an increasing VIF step                        | 20 dB                                                    | <a href="#">[13]</a> -    | 4    | -   | ms   |
| $t_{resp(dec)}$                             | AGC response time to a decreasing VIF step                         | 20 dB                                                    | <a href="#">[13]</a> -    | 3    | -   | ms   |

**Table 10: Characteristics ...continued**

$V_P = 5\text{ V}$ ;  $T_{amb} = 25\text{ }^{\circ}\text{C}$ ; see [Table 12](#) for input frequencies; B/G standard is used for the specification ( $f_{PC} = 38.9\text{ MHz}$ ;  $f_{SC} = 33.4\text{ MHz}$ ;  $PC/SC = 13\text{ dB}$ ;  $f_{mod} = 400\text{ Hz}$ ); input level  $V_{i(VIF)} = 10\text{ mV (RMS)}$  (sync level for B/G); IF input from  $50\text{ }\Omega$  via broadband transformer 1 : 1; video modulation DSB; residual carrier for B/G is 10 %; video signal in accordance with "CCIR line 17 and line 330"; measurements taken in test circuit of [Figure 21](#); unless otherwise specified.

| Symbol                                                                               | Parameter                                                                                               | Conditions                                                                                 | Min         | Typ         | Max  | Unit              |
|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|-------------|-------------|------|-------------------|
| $CR_{stps}$                                                                          | control steepness                                                                                       | definition:<br>$\Delta G_{VIF}/\Delta V_{VAGC}$ ;<br>$V_{VAGC} = 2\text{ V to }3\text{ V}$ | -           | -80         | -    | dB/V              |
| <b>Pin VAGC</b>                                                                      |                                                                                                         |                                                                                            |             |             |      |                   |
| $V_{VAGC}$                                                                           | gain control voltage range                                                                              | see <a href="#">Figure 6</a>                                                               | 0.8         | -           | 3.5  | V                 |
| $I_{O(sink)(max)}$                                                                   | maximum output sink current                                                                             |                                                                                            | -           | -           | 10   | $\mu\text{A}$     |
| $I_{O(source)(max)}$                                                                 | maximum output source current                                                                           |                                                                                            | -           | -           | 10   | $\mu\text{A}$     |
| <b>Tuner AGC; pin TAGC; see <a href="#">Figure 6</a> to <a href="#">Figure 8</a></b> |                                                                                                         |                                                                                            |             |             |      |                   |
| $V_{i(VIF)(start1)(rms)}$                                                            | VIF input signal voltage for minimum starting point of tuner takeover at pins VIF1 and VIF2 (RMS value) | $I_{TAGC} = 120\text{ }\mu\text{A}$ ;<br>$R_{TOP} = 22\text{ k}\Omega$                     | -           | 2           | 5    | mV                |
| $V_{i(VIF)(start2)(rms)}$                                                            | VIF input signal voltage for maximum starting point of tuner takeover at pins VIF1 and VIF2 (RMS value) | $I_{TAGC} = 120\text{ }\mu\text{A}$ ;<br>$R_{TOP} = 0\text{ }\Omega$                       | 45          | 90          | -    | mV                |
| $QV_{TOP}$                                                                           | tuner takeover point accuracy                                                                           | $I_{TAGC} = 120\text{ }\mu\text{A}$ ;<br>$R_{TOP} = 10\text{ k}\Omega$                     | 7           | 17          | 43   | mV                |
| $\Delta QV_{TOP}/\Delta T$                                                           | takeover point variation with temperature                                                               | $I_{TAGC} = 120\text{ }\mu\text{A}$                                                        | -           | 0.03        | 0.07 | dB/K              |
| $V_O$                                                                                | permissible output voltage                                                                              | from external source                                                                       | -           | -           | 8.8  | V                 |
| $V_{sat}$                                                                            | saturation voltage                                                                                      | $I_{TAGC} = 450\text{ }\mu\text{A}$                                                        | -           | -           | 0.5  | V                 |
| $I_{sink}$                                                                           | sink current                                                                                            | no tuner gain reduction;<br>$V_{TAGC} = 8.8\text{ V}$                                      | -           | -           | 0.75 | $\mu\text{A}$     |
|                                                                                      |                                                                                                         | maximum tuner gain reduction; $V_{TAGC} = 1\text{ V}$                                      | 450         | 600         | 750  | $\mu\text{A}$     |
| $\Delta G_{IF}$                                                                      | IF slip by automatic gain control                                                                       | tuner gain current from 20 % to 80 %                                                       | 3           | 5           | 8    | dB                |
| <b>AFC circuit; pin AFC; see <a href="#">Figure 9</a> [14] [15]</b>                  |                                                                                                         |                                                                                            |             |             |      |                   |
| $AFC_{stps}$                                                                         | AFC control steepness                                                                                   | definition: $\Delta I_{AFC}/\Delta f_{VIF}$                                                | 0.85        | 1.05        | 1.25 | $\mu\text{A/kHz}$ |
| $Qf_{VIF(a)}$                                                                        | analog accuracy of AFC circuit                                                                          | $I_{AFC} = 0\text{ A}$ ;<br>$f_{REF} = 4\text{ MHz}$                                       | -20         | -           | +20  | kHz               |
| $V_{sat(ul)}$                                                                        | upper limit saturation voltage                                                                          |                                                                                            | $V_P - 0.6$ | $V_P - 0.3$ | -    | V                 |
| $V_{sat(ll)}$                                                                        | lower limit saturation voltage                                                                          |                                                                                            | -           | 0.3         | 0.6  | V                 |
| $I_{O(source)}$                                                                      | output source current                                                                                   |                                                                                            | 160         | 200         | 240  | $\mu\text{A}$     |
| $I_{O(sink)}$                                                                        | output sink current                                                                                     |                                                                                            | 160         | 200         | 240  | $\mu\text{A}$     |

**Table 10: Characteristics ...continued**

$V_P = 5\text{ V}$ ;  $T_{amb} = 25\text{ °C}$ ; see [Table 12](#) for input frequencies; B/G standard is used for the specification ( $f_{PC} = 38.9\text{ MHz}$ ;  $f_{SC} = 33.4\text{ MHz}$ ;  $PC/SC = 13\text{ dB}$ ;  $f_{mod} = 400\text{ Hz}$ ); input level  $V_{i(VIF)} = 10\text{ mV (RMS)}$  (sync level for B/G); IF input from  $50\text{ }\Omega$  via broadband transformer 1 : 1; video modulation DSB; residual carrier for B/G is 10 %; video signal in accordance with "CCIR line 17 and line 330"; measurements taken in test circuit of [Figure 21](#); unless otherwise specified.

| Symbol                                            | Parameter                                                          | Conditions                                                         | Min  | Typ  | Max  | Unit |    |
|---------------------------------------------------|--------------------------------------------------------------------|--------------------------------------------------------------------|------|------|------|------|----|
| SIF amplifier; pins SIF1 and SIF2                 |                                                                    |                                                                    |      |      |      |      |    |
| V <sub>i(SIF)(rms)</sub>                          | SIF input voltage sensitivity (RMS value)                          | −3 dB at intercarrier output pin QSSO                              | -    | 30   | 70   | μV   |    |
| V <sub>i(max)(rms)</sub>                          | maximum input voltage (RMS value)                                  | 1 dB at intercarrier output pin QSSO                               | 50   | 70   | -    | mV   |    |
| V <sub>i(ovl)(rms)</sub>                          | overload input voltage (RMS value)                                 | [2]                                                                | -    | -    | 320  | mV   |    |
| G <sub>SIF(cr)</sub>                              | SIF gain control range                                             | see <a href="#">Figure 8</a>                                       | 60   | 66   | -    | dB   |    |
| B <sub>SIF(−3dB)(ll)</sub>                        | lower limit −3 dB SIF bandwidth                                    |                                                                    | -    | 15   | -    | MHz  |    |
| B <sub>SIF(−3dB)(ul)</sub>                        | upper limit −3 dB SIF bandwidth                                    |                                                                    | -    | 80   | -    | MHz  |    |
| R <sub>i(dif)</sub>                               | differential input resistance                                      | [3]                                                                | -    | 2    | -    | kΩ   |    |
| C <sub>i(dif)</sub>                               | differential input capacitance                                     | [3]                                                                | -    | 3    | -    | pF   |    |
| V <sub>I</sub>                                    | DC input voltage                                                   |                                                                    | -    | 1.93 | -    | V    |    |
| SIF AGC detector                                  |                                                                    |                                                                    |      |      |      |      |    |
| t <sub>resp</sub>                                 | AGC response time to an increasing or decreasing SIF step of 20 dB | increasing                                                         | -    | 8    | -    | ms   |    |
|                                                   |                                                                    | decreasing                                                         | -    | 25   | -    | ms   |    |
| Single reference QSS intercarrier mixer; pin QSSO |                                                                    |                                                                    |      |      |      |      |    |
| V <sub>o(intc)(rms)</sub>                         | IF intercarrier output level (RMS value)                           | QSS mode; SC <sub>1</sub> ; SC <sub>2</sub> off                    | 90   | 140  | 210  | mV   |    |
|                                                   |                                                                    | intercarrier mode; PC/SC <sub>1</sub> = 20 dB; SC <sub>2</sub> off | [16] | 75   | -    | mV   |    |
| B <sub>intc(−3dB)(ul)</sub>                       | upper limit −3 dB intercarrier bandwidth                           |                                                                    | 12   | 15   | -    | MHz  |    |
| ΔV <sub>r(SC)(rms)</sub>                          | residual sound carrier (RMS value)                                 | fundamental wave and harmonics                                     | -    | 2    | 5    | mV   |    |
| ΔV <sub>r(PC)(rms)</sub>                          | residual picture carrier (RMS value)                               | fundamental wave and harmonics                                     | -    | 2    | 5    | mV   |    |
| R <sub>o</sub>                                    | output resistance                                                  | [3]                                                                | -    | -    | 30   | Ω    |    |
| V <sub>O</sub>                                    | DC output voltage                                                  |                                                                    | -    | 2    | -    | V    |    |
| I <sub>bias(int)</sub>                            | internal DC bias current for emitter follower                      |                                                                    | 0.9  | 1.3  | -    | mA   |    |
| I <sub>o(sink)(max)</sub>                         | maximum AC output sink current                                     |                                                                    | 0.6  | 0.8  | -    | mA   |    |
| I <sub>o(source)(max)</sub>                       | maximum AC output source current                                   |                                                                    | 0.6  | 0.8  | -    | mA   |    |
| I <sub>o(source)</sub>                            | DC output source current                                           | QSSO = 0; see <a href="#">Table 4</a>                              | [17] | 0.75 | 0.93 | 1.20 | mA |

**Table 10: Characteristics** ...continued

$V_P = 5\text{ V}$ ;  $T_{amb} = 25\text{ }^{\circ}\text{C}$ ; see [Table 12](#) for input frequencies; B/G standard is used for the specification ( $f_{PC} = 38.9\text{ MHz}$ ;  $f_{SC} = 33.4\text{ MHz}$ ;  $PC/SC = 13\text{ dB}$ ;  $f_{mod} = 400\text{ Hz}$ ); input level  $V_{i(VIF)} = 10\text{ mV (RMS)}$  (sync level for B/G); IF input from  $50\text{ }\Omega$  via broadband transformer 1 : 1; video modulation DSB; residual carrier for B/G is 10 %; video signal in accordance with "CCIR line 17 and line 330"; measurements taken in test circuit of [Figure 21](#); unless otherwise specified.

| Symbol                                   | Parameter                                                                 | Conditions                                                                    | Min    | Typ                  | Max                  | Unit |
|------------------------------------------|---------------------------------------------------------------------------|-------------------------------------------------------------------------------|--------|----------------------|----------------------|------|
| FM PLL demodulator [15] and [18] to [22] |                                                                           |                                                                               |        |                      |                      |      |
| Sound intercarrier output; pin QSSO      |                                                                           |                                                                               |        |                      |                      |      |
| V <sub>FM(rms)</sub>                     | IF intercarrier level for gain controlled operation of FM PLL (RMS value) | corresponding PC/SC ratio at input pins VIF1 and VIF2 is 7 dB to 47 dB        | 3.2    | -                    | 320                  | mV   |
| V <sub>FM(lock)(rms)</sub>               | IF intercarrier level for lock-in of PLL (RMS value)                      |                                                                               | -      | -                    | 2                    | mV   |
| V <sub>FM(det)(rms)</sub>                | IF intercarrier level for FM carrier detect (RMS value)                   |                                                                               | -      | -                    | 2.3                  | mV   |
| f <sub>FM</sub>                          | sound intercarrier operating FM frequencies                               | see Table 5                                                                   | -      | 4.5                  | -                    | MHz  |
|                                          |                                                                           |                                                                               | -      | 5.5                  | -                    | MHz  |
|                                          |                                                                           |                                                                               | -      | 6.0                  | -                    | MHz  |
|                                          |                                                                           |                                                                               | -      | 6.5                  | -                    | MHz  |
| FM sound output; pin FMSO                |                                                                           |                                                                               |        |                      |                      |      |
| V <sub>o(AF)(rms)</sub>                  | AF output voltage (RMS value)                                             | 25 kHz FM deviation; 75 μs de-emphasis                                        | 400    | 500                  | 600                  | mV   |
|                                          |                                                                           | 27 kHz FM deviation; 50 μs de-emphasis                                        | 430    | 540                  | 650                  | mV   |
| V <sub>o(AF)(cl)(rms)</sub>              | AF output clipping level (RMS value)                                      | THD < 1.5 %                                                                   | 1.3    | 1.4                  | -                    | V    |
| ΔV <sub>o(AF)</sub> /ΔT                  | AF output voltage variation with temperature                              |                                                                               | -      | 3 × 10 <sup>-3</sup> | 7 × 10 <sup>-3</sup> | dB/K |
| THD                                      | total harmonic distortion                                                 |                                                                               | -      | 0.15                 | 0.50                 | %    |
| Δf <sub>AF</sub>                         | frequency deviation                                                       | THD < 1.5 %                                                                   | [19] - | -                    | ±55                  | kHz  |
| B <sub>AF(-3dB)</sub>                    | -3 dB AF bandwidth                                                        | without de-emphasis; measured with FM PLL filter of Figure 21                 | 80     | 100                  | -                    | kHz  |
| S/N <sub>W(AF)</sub>                     | weighted signal-to-noise ratio of audio signal                            | FM PLL only; 27 kHz FM deviation; 50 μs de-emphasis                           | 52     | 56                   | -                    | dB   |
|                                          |                                                                           | black picture; see Figure 18                                                  | 50     | 56                   | -                    | dB   |
| ΔV <sub>r(SC)(rms)</sub>                 | residual sound carrier (RMS value)                                        | fundamental wave and harmonics; without de-emphasis                           | -      | -                    | 2                    | mV   |
| α <sub>AM(sup)</sub>                     | AM suppression of FM demodulator                                          | referenced to 27 kHz FM deviation; 50 μs de-emphasis; AM: f = 1 kHz; m = 54 % | 40     | 46                   | -                    | dB   |

**Table 10: Characteristics ...continued**

$V_P = 5\text{ V}$ ;  $T_{amb} = 25\text{ °C}$ ; see [Table 12](#) for input frequencies; B/G standard is used for the specification ( $f_{PC} = 38.9\text{ MHz}$ ;  $f_{SC} = 33.4\text{ MHz}$ ;  $PC/SC = 13\text{ dB}$ ;  $f_{mod} = 400\text{ Hz}$ ); input level  $V_{i(VIF)} = 10\text{ mV (RMS)}$  (sync level for B/G); IF input from  $50\text{ }\Omega$  via broadband transformer 1 : 1; video modulation DSB; residual carrier for B/G is 10 %; video signal in accordance with "CCIR line 17 and line 330"; measurements taken in test circuit of [Figure 21](#); unless otherwise specified.

| Symbol                               | Parameter                                         | Conditions                                                    | Min  | Typ  | Max      | Unit              |
|--------------------------------------|---------------------------------------------------|---------------------------------------------------------------|------|------|----------|-------------------|
| $PSRR_{FM}$                          | power supply ripple rejection                     | $f_{ripple} = 70\text{ Hz}$ ;<br>see <a href="#">Figure 5</a> | 14   | 20   | -        | dB                |
| <b>FM PLL filter; pin FMPLL</b>      |                                                   |                                                               |      |      |          |                   |
| $V_{loop}$                           | DC loop voltage                                   |                                                               | 1.5  | -    | 3.3      | V                 |
| $I_{o(source)(PD)(max)}$             | maximum phase detector output source current      |                                                               | -    | 60   | -        | $\mu\text{A}$     |
| $I_{o(sink)(PD)(max)}$               | maximum phase detector output sink current        |                                                               | -    | 60   | -        | $\mu\text{A}$     |
| $I_{o(source)(DAH)}$                 | output source current of digital acquisition help |                                                               | -    | 55   | -        | $\mu\text{A}$     |
| $I_{o(sink)(DAH)}$                   | output sink current of digital acquisition help   |                                                               | -    | 55   | -        | $\mu\text{A}$     |
| $t_{W(DAH)}$                         | pulse width of digital acquisition help current   |                                                               | -    | 16   | -        | $\mu\text{s}$     |
| $T_{cy(DAH)}$                        | cycle time of digital acquisition help            |                                                               | -    | 64   | -        | $\mu\text{s}$     |
| $K_{O(FM)}$                          | VCO steepness                                     | definition: $\Delta f_{FM}/\Delta V_{FMPLL}$                  | -    | 3.3  | -        | MHz/V             |
| $K_{D(FM)}$                          | phase detector steepness                          | definition: $\Delta I_{FMPLL}/\Delta \phi_{FM}$               | -    | 4    | -        | $\mu\text{A/rad}$ |
| <b>Audio amplifier</b>               |                                                   |                                                               |      |      |          |                   |
| <b>De-emphasis network; pin DEEM</b> |                                                   |                                                               |      |      |          |                   |
| $R_o$                                | output resistance                                 | 50 $\mu\text{s}$ de-emphasis;<br>see <a href="#">Table 5</a>  | 4.4  | 5.0  | 5.6      | $\text{k}\Omega$  |
|                                      |                                                   | 75 $\mu\text{s}$ de-emphasis;<br>see <a href="#">Table 5</a>  | 6.6  | 7.5  | 8.4      | $\text{k}\Omega$  |
| $V_{AF(rms)}$                        | audio signal (RMS value)                          | $f_{AF} = 400\text{ Hz}$ ;<br>$V_{FMSO} = 500\text{ mV}$      | -    | 170  | -        | mV                |
| $V_O$                                | DC output voltage                                 |                                                               | -    | 2.37 | -        | V                 |
| <b>AF decoupling; pin AFD</b>        |                                                   |                                                               |      |      |          |                   |
| $V_{dec}$                            | DC decoupling voltage                             | dependent on $f_{FM}$<br>intercarrier frequency               | 1.5  | -    | 3.3      | V                 |
| $I_L$                                | leakage current                                   | $\Delta V_{O(FMSO)} < \pm 50\text{ mV}$                       | -    | -    | $\pm 25$ | nA                |
| $I_{ch(max)}$                        | maximum charge current                            |                                                               | 1.15 | 1.50 | 1.85     | $\mu\text{A}$     |
| $I_{dch(max)}$                       | maximum discharge current                         |                                                               | 1.15 | 1.50 | 1.85     | $\mu\text{A}$     |
| <b>FM sound output; pin FMSO</b>     |                                                   |                                                               |      |      |          |                   |
| $R_o$                                | output resistance                                 | <a href="#">[3]</a>                                           | -    | -    | 300      | $\Omega$          |
| $V_{O(FMSO)}$                        | DC output voltage                                 |                                                               | -    | 2.37 | -        | V                 |
| $R_L$                                | load resistance                                   | AC-coupled                                                    | 10   | -    | -        | $\text{k}\Omega$  |
| $R_{L(DC)}$                          | DC load resistance                                |                                                               | 100  | -    | -        | $\text{k}\Omega$  |
| $C_L$                                | load capacitance                                  |                                                               | -    | -    | 1.5      | nF                |

**Table 10: Characteristics ...continued**

$V_P = 5\text{ V}$ ;  $T_{amb} = 25\text{ }^{\circ}\text{C}$ ; see [Table 12](#) for input frequencies; B/G standard is used for the specification ( $f_{PC} = 38.9\text{ MHz}$ ;  $f_{SC} = 33.4\text{ MHz}$ ;  $PC/SC = 13\text{ dB}$ ;  $f_{mod} = 400\text{ Hz}$ ); input level  $V_{i(VIF)} = 10\text{ mV (RMS)}$  (sync level for B/G); IF input from  $50\text{ }\Omega$  via broadband transformer 1 : 1; video modulation DSB; residual carrier for B/G is 10 %; video signal in accordance with "CCIR line 17 and line 330"; measurements taken in test circuit of [Figure 21](#); unless otherwise specified.

| Symbol             | Parameter                                                                 | Conditions                                                                             | Min                    | Typ      | Max       | Unit |
|--------------------|---------------------------------------------------------------------------|----------------------------------------------------------------------------------------|------------------------|----------|-----------|------|
| $B_{AF(-3dB)(ul)}$ | upper limit -3 dB<br>AF bandwidth of audio amplifier                      |                                                                                        | 150                    | -        | -         | kHz  |
| $B_{AF(-3dB)(ll)}$ | lower limit -3 dB<br>AF bandwidth of audio amplifier                      |                                                                                        | <a href="#">[20]</a> - | -        | 20        | Hz   |
| $\alpha_{mute}$    | mute attenuation of<br>AF signal                                          | via pin AMUTE0;<br>see <a href="#">Table 6</a>                                         | 70                     | 75       | -         | dB   |
| $\Delta V_{jump}$  | DC jump voltage for<br>switching AF output to<br>mute state or vice versa | activated by digital<br>acquisition help; auto<br>mute on; see <a href="#">Table 6</a> | -                      | $\pm 50$ | $\pm 150$ | mV   |

**FM operation** [\[21\]](#) [\[23\]](#)**Intercarrier AF performance** [\[24\]](#)

|         |                                   |                                                                          |    |   |   |    |
|---------|-----------------------------------|--------------------------------------------------------------------------|----|---|---|----|
| $S/N_W$ | weighted signal-to-noise<br>ratio | PC/SC ratio is 21 dB to<br>27 dB at pins VIF1 and<br>VIF2                |    |   |   |    |
|         |                                   | black picture                                                            | 49 | - | - | dB |
|         |                                   | white picture                                                            | 45 | - | - | dB |
|         |                                   | 6 kHz sine wave<br>(black-to-white<br>modulation)                        | 40 | - | - | dB |
|         |                                   | sound carrier<br>subharmonics;<br>$f = 2.75\text{ MHz} \pm 3\text{ kHz}$ | 35 | - | - | dB |

**Single reference QSS AF performance** [\[25\]](#) [\[26\]](#)

|                |                                              |                                                                                                      |    |   |   |    |
|----------------|----------------------------------------------|------------------------------------------------------------------------------------------------------|----|---|---|----|
| $S/N_{W(SC1)}$ | weighted signal-to-noise<br>ratio for $SC_1$ | VIF input sound carrier<br>suppression: PC/SC <sub>1</sub><br>ratio at pins VIF1 and<br>VIF2 > 40 dB |    |   |   |    |
|                |                                              | black picture                                                                                        | 51 | - | - | dB |
|                |                                              | white picture                                                                                        | 48 | - | - | dB |
|                |                                              | 6 kHz sine wave<br>(black-to-white<br>modulation)                                                    | 42 | - | - | dB |
|                |                                              | 250 kHz square wave<br>(black-to-white<br>modulation)                                                | 40 | - | - | dB |
|                |                                              | sound carrier<br>subharmonics;<br>$f = 2.75\text{ MHz} \pm 3\text{ kHz}$                             | 43 | - | - | dB |
|                |                                              | sound carrier<br>subharmonics;<br>$f = 2.87\text{ MHz} \pm 3\text{ kHz}$                             | 44 | - | - | dB |

**Table 10: Characteristics ...continued**

$V_P = 5\text{ V}$ ;  $T_{amb} = 25\text{ }^{\circ}\text{C}$ ; see [Table 12](#) for input frequencies; B/G standard is used for the specification ( $f_{PC} = 38.9\text{ MHz}$ ;  $f_{SC} = 33.4\text{ MHz}$ ;  $PC/SC = 13\text{ dB}$ ;  $f_{mod} = 400\text{ Hz}$ ); input level  $V_{i(VIF)} = 10\text{ mV (RMS)}$  (sync level for B/G); IF input from  $50\text{ }\Omega$  via broadband transformer 1 : 1; video modulation DSB; residual carrier for B/G is 10 %; video signal in accordance with "CCIR line 17 and line 330"; measurements taken in test circuit of [Figure 21](#); unless otherwise specified.

| Symbol         | Parameter                                 | Conditions                                                                         | Min | Typ | Max | Unit |
|----------------|-------------------------------------------|------------------------------------------------------------------------------------|-----|-----|-----|------|
| $S/N_{W(SC2)}$ | weighted signal-to-noise ratio for $SC_2$ | VIF input sound carrier suppression: $PC/SC_2$ ratio at pins VIF1 and VIF2 > 40 dB |     |     |     |      |
|                |                                           | black picture                                                                      | 46  | -   | -   | dB   |
|                |                                           | white picture                                                                      | 45  | -   | -   | dB   |
|                |                                           | 6 kHz sine wave (black-to-white modulation)                                        | 41  | -   | -   | dB   |
|                |                                           | 250 kHz square wave (black-to-white modulation)                                    | 29  | -   | -   | dB   |
|                |                                           | sound carrier subharmonics; $f = 2.75\text{ MHz} \pm 3\text{ kHz}$                 | 42  | -   | -   | dB   |
|                |                                           | sound carrier subharmonics; $f = 2.87\text{ MHz} \pm 3\text{ kHz}$                 | 43  | -   | -   | dB   |

**Reference frequency input; pin REF**

|                  |                                                            |                                 |      |     |           |           |
|------------------|------------------------------------------------------------|---------------------------------|------|-----|-----------|-----------|
| $V_i$            | DC input voltage                                           |                                 | 2.3  | 2.6 | 2.9       | V         |
| $R_i$            | input resistance                                           |                                 | [3]  | 5   | -         | $k\Omega$ |
| $R_{xtal}$       | resonance resistance of crystal                            | operation as crystal oscillator | -    | -   | 200       | $\Omega$  |
| $C_x$            | pull-up or pull-down capacitance                           |                                 | [27] | -   | -         | pF        |
| $f_{ref}$        | reference signal frequency                                 |                                 | [28] | 4   | -         | MHz       |
| $\Delta f_{ref}$ | tolerance of reference signal frequency                    |                                 | [15] | -   | $\pm 0.1$ | %         |
| $V_{ref(rms)}$   | reference signal voltage (RMS value)                       | operation as input terminal     | 80   | -   | 400       | mV        |
| $R_{o(ref)}$     | output resistance of reference signal source               |                                 | -    | -   | 4.7       | $k\Omega$ |
| $C_K$            | decoupling capacitance to external reference signal source | operation as input terminal     | 22   | 100 | -         | pF        |

**Logic; pins FM1, FM0, VIF0 and AMUTE0; see [Table 4](#) to [Table 6](#)**

|               |                             |                                                  |      |       |       |           |
|---------------|-----------------------------|--------------------------------------------------|------|-------|-------|-----------|
| $V_i$         | input voltage               | for LOW level                                    | 0    | -     | 0.8   | V         |
|               |                             | for HIGH level                                   | 2.5  | -     | $V_P$ | V         |
| $V_{i(open)}$ | free-running voltage        | pin open-circuit; $I_i < 0.1\text{ }\mu\text{A}$ | -    | $V_P$ | -     | V         |
| $R_i$         | internal pull-up resistance |                                                  | 37.5 | -     | 62.5  | $k\Omega$ |

[1] Values of video and sound parameters can be decreased at  $V_P = 4.5\text{ V}$ .

- [2] Level headroom for input level jumps during gain control setting.
- [3] This parameter is not tested during the production and is only given as application information for designing the receiver circuit.
- [4] Loop bandwidth BL = 70 kHz (damping factor d = 1.9; calculated with sync level within gain control range). Calculation of the VIF PLL filter can be done by use of the following formula:

$$BL_{-3dB} = \frac{1}{2\pi} K_O K_D R, \text{ valid for } d \geq 1.2$$

$$d = \frac{1}{2} R \sqrt{K_O K_D C},$$

where:

$K_O$  is the VCO steepness  $\left(\frac{\text{rad}}{\text{V}}\right)$  or  $\left(2\pi \frac{\text{Hz}}{\text{V}}\right)$ ;  $K_D$  is the phase detector steepness  $\left(\frac{\mu\text{A}}{\text{rad}}\right)$ ;

R is the loop resistor; C is the loop capacitor;  $BL_{-3dB}$  is the loop bandwidth for -3 dB; d is the damping factor.

- [5]  $V_{i(VIF)} = 10$  mV (RMS);  $\Delta f = 1$  MHz (VCO frequency offset related to picture carrier frequency); white picture video modulation.
- [6] Condition: luminance range (5 steps) from 0 % to 100 %.
- [7]  $S/N_{W(\text{video})}$  is the ratio of black-to-white amplitude to the black level noise voltage (RMS value measured on pin CVBS). B = 5 MHz (B/G, I and D/K standard). Noise analyzer setting: 200 kHz high-pass and SC-trap switched on.
- [8] The intermodulation figures are defined for:

a)  $f = 1.1$  MHz (referenced to black and white signal) as  $\alpha_{IM} = 20 \log\left(\frac{V_o \text{ at } 4.4 \text{ MHz}}{V_o \text{ at } 1.1 \text{ MHz}}\right) + 3.6 \text{ dB}$

b)  $f = 3.3$  MHz (referenced to color carrier) as  $\alpha_{IM} = 20 \log\left(\frac{V_o \text{ at } 4.4 \text{ MHz}}{V_o \text{ at } 3.3 \text{ MHz}}\right)$

- [9] Modulation Vestigial Side-Band (VSB); sound carrier off;  $f_{\text{video}} > 0.5$  MHz. Measurements taken with SAW filter M1963M (sound shelf: 20 dB); loop bandwidth BL = 70 kHz.
- [10] Sound carrier on;  $f_{\text{video}} = 10$  kHz to 10 MHz. Measurements taken with SAW filter M1963M (sound shelf: 20 dB); loop bandwidth BL = 70 kHz.
- [11] Conditions: video signal, grey level and negative modulation.
- [12] AC load;  $C_L < 20$  pF and  $R_L > 1$  k $\Omega$ . The sound carrier frequencies (depending on TV standard) are attenuated by the integrated sound carrier traps (see [Figure 12](#) to [Figure 17](#);  $|H(s)|$  is the absolute value of transfer function).
- [13] The response time is valid for a VIF input level range from 200  $\mu\text{V}$  to 70 mV.
- [14] To match the AFC output signal to different tuning systems a current source output is provided. The test circuit is given in [Figure 9](#). The AFC slope (voltage per frequency) can be changed by resistors R1 and R2.
- [15] The tolerance of the reference frequency determines the accuracy of the VIF AFC, FM demodulator center frequency and maximum FM deviation.
- [16] The intercarrier output signal at pin QSSO can be calculated by the following formula taking into account the internal video signal with 1.1 V (p-p) as a reference:

$$V_{o(\text{intc})} = 1.1 \text{ V (p-p)} \times \frac{1}{2\sqrt{2}} \times 10^{\frac{\frac{V_{i(SC)}}{V_{i(PC)}}(\text{dB}) + 6 \text{ dB} \pm 3 \text{ dB}}{20}} \quad (\text{RMS})$$

where:  $\frac{1}{2\sqrt{2}}$  is the correction term for RMS value,  $\frac{V_{i(SC)}}{V_{i(PC)}}(\text{dB})$  is the sound-to-picture carrier ratio at pins VIF1 and VIF2 in dB, 6 dB is the correction term of internal circuitry and  $\pm 3$  dB is the tolerance of video output and intercarrier output  $V_{o(\text{intc})}(\text{rms})$ .

- [17] To detect a logical 1 at pin QSSO, no DC load at pin QSSO is allowed. QSSO = 0 will be done by the application of a 2.2 k $\Omega$  resistor between pin QSSO and ground.
- [18] SIF input level is 10 mV (RMS); VIF input level is 10 mV (RMS) unmodulated.
- [19] Measured with an FM deviation of 25 kHz and the typical AF output voltage of 500 mV (RMS). For handling a frequency deviation of more than 55 kHz, the AF output signal has to be reduced in order to avoid clipping (THD < 1.5 %) by means of a resistor  $R_x$  with external application at pin AFD (see [Figure 20](#) and [Figure 21](#)).
- [20] The lower limit of the audio bandwidth depends on the value of the capacitor at pin AFD. A value of  $C_{AF} = 470$  nF leads to  $f_{AF(-3dB)} \approx 20$  Hz and  $C_{AF} = 220$  nF leads to  $f_{AF(-3dB)} \approx 40$  Hz.

- [21] For all S/N measurements the used VIF modulator has to meet the following specifications:
- a) Incidental phase modulation for black-to-white jump less than 0.5 degrees.
  - b) QSS AF performance, measured with the television demodulator AMF2 (audio output, weighted S/N ratio) better than 60 dB (at deviation 27 kHz) for 6 kHz sine wave black-to-white video modulation.
  - c) Picture-to-sound carrier ratio PC/SC<sub>1</sub> = 13 dB (transmitter).
- [22] Calculation of the loop filter can be done approximately by use of the following formulae:

$$f_o = \frac{1}{2\pi\sqrt{\frac{K_O K_D}{C_P}}}$$

$$\vartheta = \frac{1}{2R\sqrt{K_O K_D C_P}}$$

$$BL_{-3dB} = f_o(1.55 - \vartheta^2)$$

The formulae are only valid under the following conditions:

$$\vartheta \leq 1 \text{ and } C_S > 5C_P$$

where:  $K_O$  is the VCO steepness  $\left(\frac{\text{rad}}{\text{V}}\right)$  or  $\left(2\pi\frac{\text{Hz}}{\text{V}}\right)$ ;  $K_D$  is the phase detector steepness  $\left(\frac{\mu\text{A}}{\text{rad}}\right)$ ;  $R$  is the loop resistor;  $C_S$  is the series capacitor;  $C_P$  is the parallel capacitor;  $f_o$  is the natural frequency of PLL;  $BL_{-3dB}$  is the loop bandwidth for -3 dB;  $\vartheta$  is the damping factor. For examples, see [Table 11](#).



- [23] The PC/SC ratio is calculated as the addition of TV transmitter PC/SC<sub>1</sub> ratio and SAW filter PC/SC<sub>1</sub> ratio. This PC/SC ratio is necessary to achieve the S/N<sub>W</sub> values as noted. A different PC/SC ratio will change these values.
- [24] Measurements taken with SAW filter G1984 (Siemens) for vision and sound IF (sound shelf: 14 dB). Picture-to-sound carrier ratio of transmitter PC/SC = 13 dB. Input level on pins VIF1 and VIF2 of  $V_{i(\text{SIF})} = 10$  mV (RMS) sync level, 27 kHz FM deviation for sound carrier,  $f_{AF} = 400$  Hz. Measurements in accordance with "CCIR 468". De-emphasis is 50  $\mu\text{s}$ .
- [25] The QSS signal output on pin QSSO is analyzed by a test demodulator TDA9820. The S/N ratio of this device is more than 60 dB, related to a deviation of  $\pm 27$  kHz, in accordance with "CCIR 468".
- [26] Measurements taken with SAW filter G3962 for vision IF (suppressed sound carrier) and K9350 for sound IF (suppressed picture carrier). Input level  $V_{i(\text{SIF})} = 10$  mV (RMS), 27 kHz (54 % FM deviation).
- [27] The value of  $C_x$  determines the accuracy of the resonance frequency of the crystal. It depends on the used type of crystal.
- [28] Pin REF is able to operate as a 1-pin crystal oscillator input as well as an external reference signal input, e.g. from the tuning system.


**Table 11: Examples to the FM PLL filter**

| $BL_{-3dB}$ (kHz) | $C_S$ (nF) | $C_P$ (pF) | $R$ (k $\Omega$ ) | $\vartheta$ |
|-------------------|------------|------------|-------------------|-------------|
| 100               | 10         | 390        | 5.6               | 0.5         |
| 160               | 10         | 150        | 9.1               | 0.5         |

**Table 12: Input frequencies and carrier ratios**

| Description                    | Symbol          | B/G standard | M/N standard   | Unit |
|--------------------------------|-----------------|--------------|----------------|------|
| VIF carrier                    | $f_{PC}$        | 38.9         | 45.75 or 58.75 | MHz  |
| SIF carrier                    | $f_{SC1}$       | 33.4         | 41.25 or 54.25 | MHz  |
|                                | $f_{SC2}$       | 33.158       | -              | MHz  |
| Picture-to-sound carrier ratio | SC <sub>1</sub> | 13           | 7              | dB   |
|                                | SC <sub>2</sub> | 20           | -              | dB   |

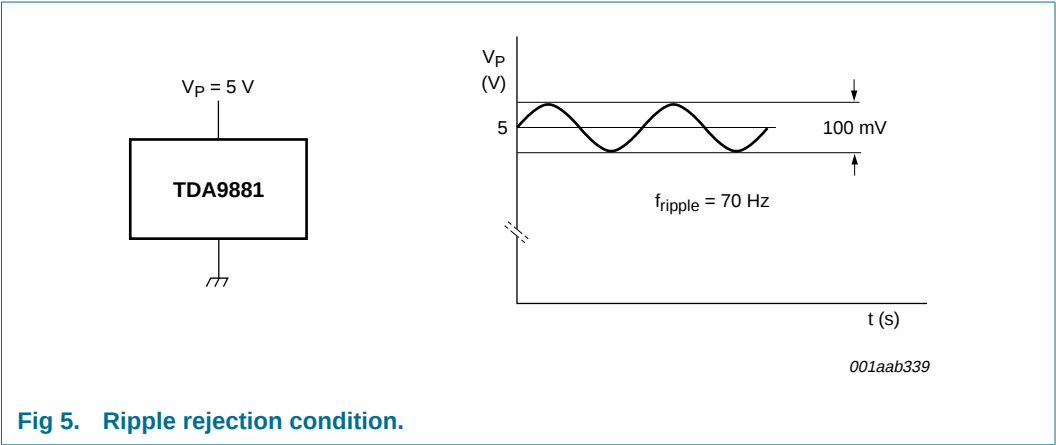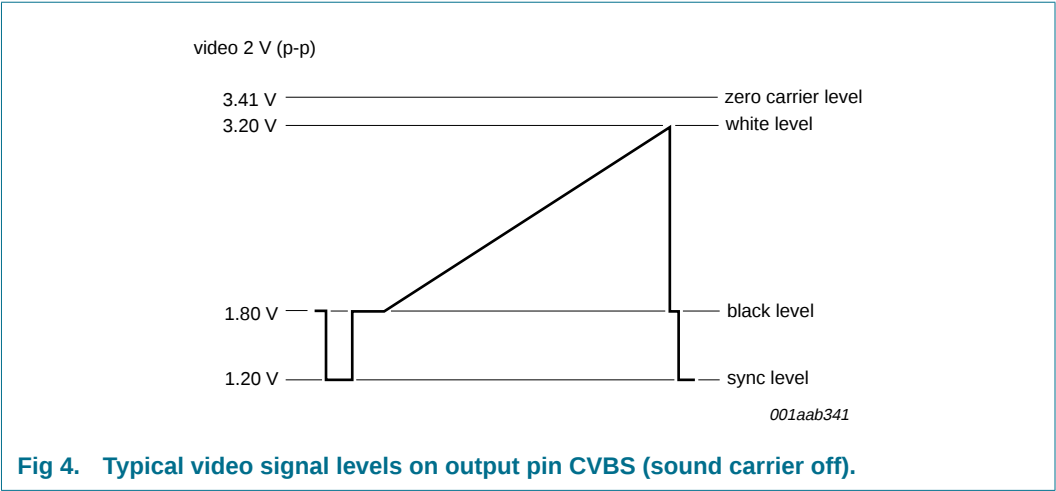

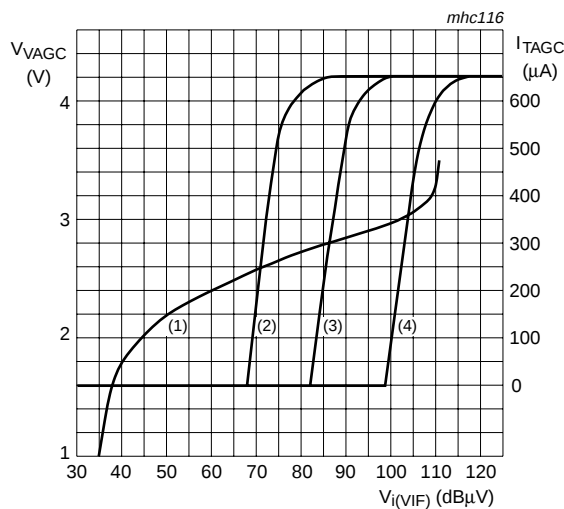

- (1)  $V_{VAGC}$  is VIF AGC voltage and can be measured at pin VAGC.
- (2)  $I_{TAGC}$  is tuner current in TV mode with  $R_{TOP} = 22$  k $\Omega$ .
- (3)  $I_{TAGC}$  is tuner current in TV mode with  $R_{TOP} = 10$  k $\Omega$ .
- (4)  $I_{TAGC}$  is tuner current in TV mode with  $R_{TOP} = 0$  k $\Omega$ .

Fig 6. Typical VIF and tuner AGC characteristics.

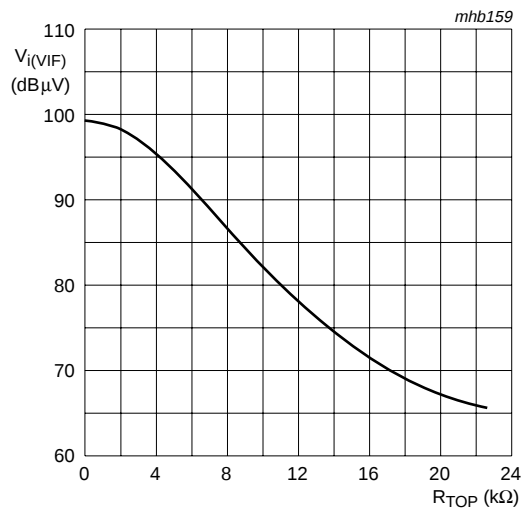


Fig 7. Typical tuner takeover point as a function of resistor  $R_{TOP}$ .

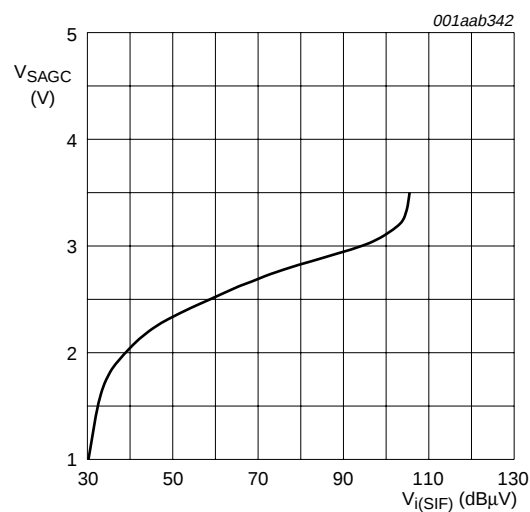


Fig 8. Typical SIF AGC characteristic.

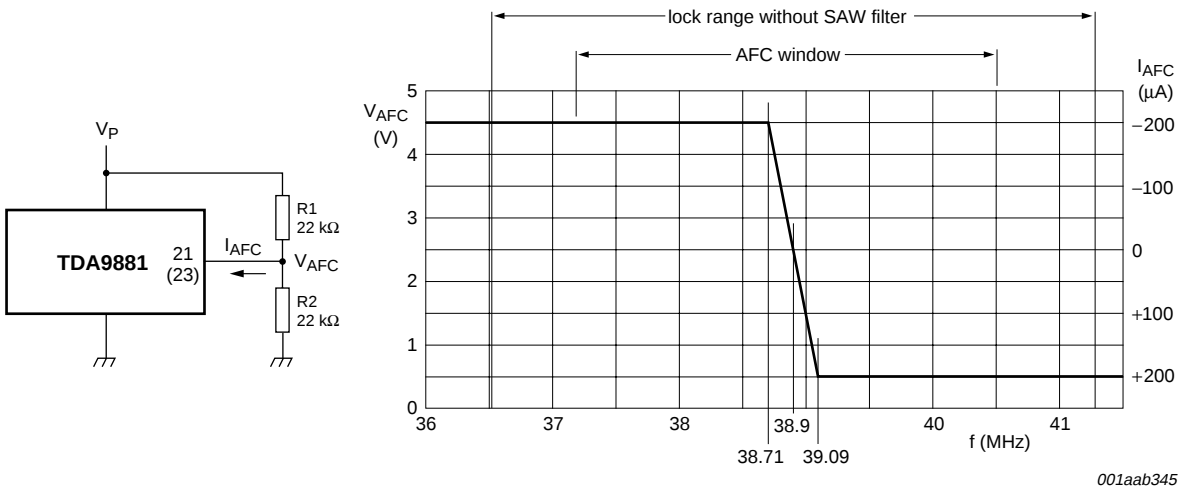


Fig 9. Typical analog AFC characteristic.

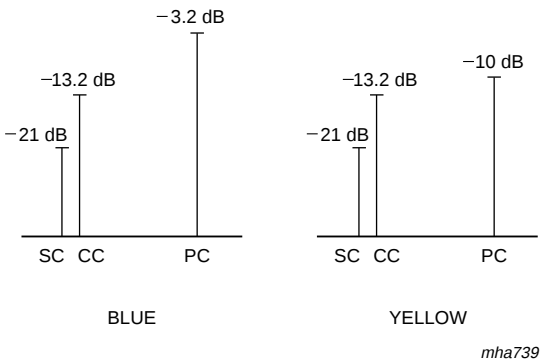
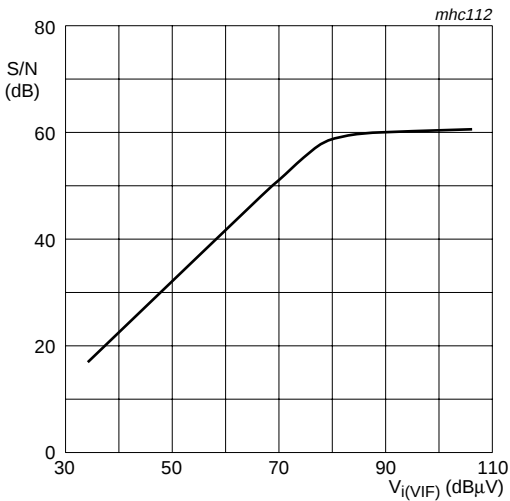


Fig 11. Input signal conditions.


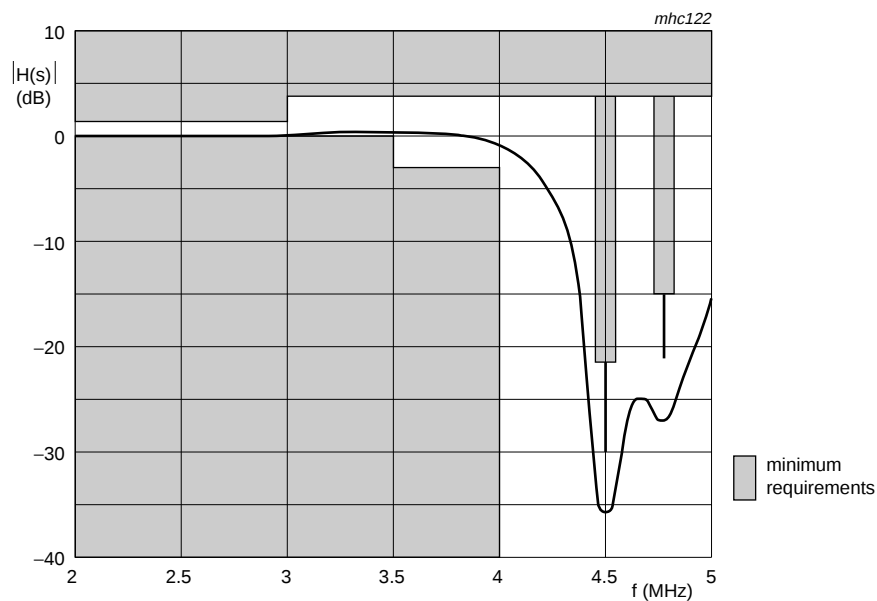


Fig 12. Typical amplitude response for sound trap at M/N standard (inclusive Korea).

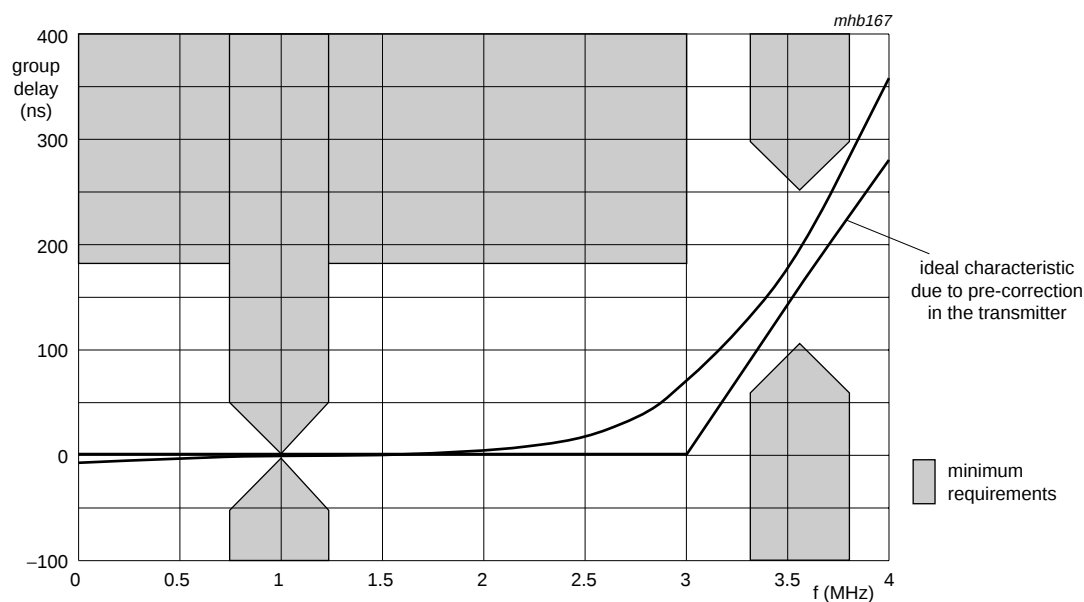

Overall delay is not shown, here the maximum ripple is specified.

Fig 13. Typical group delay for sound trap at M/N standard.




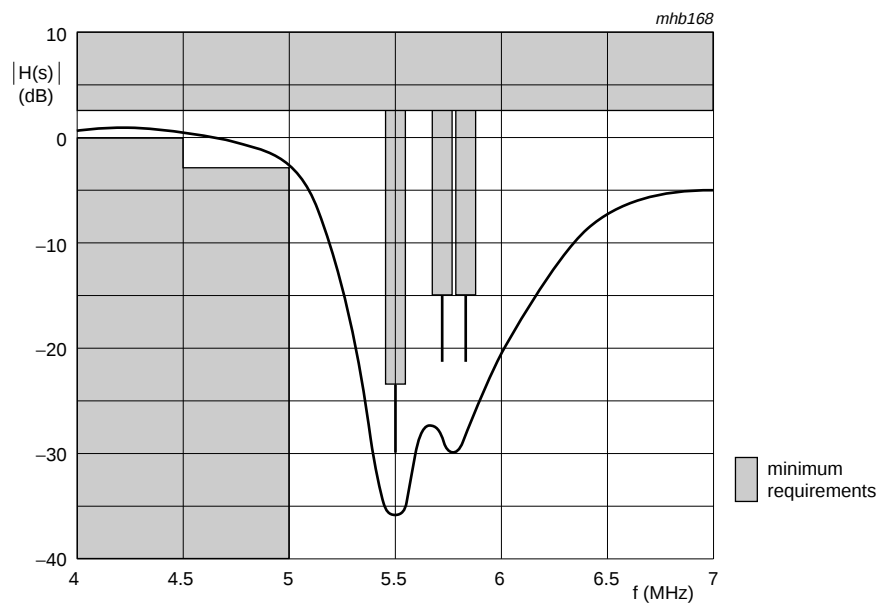



Fig 14. Typical amplitude response for sound trap at B/G standard.

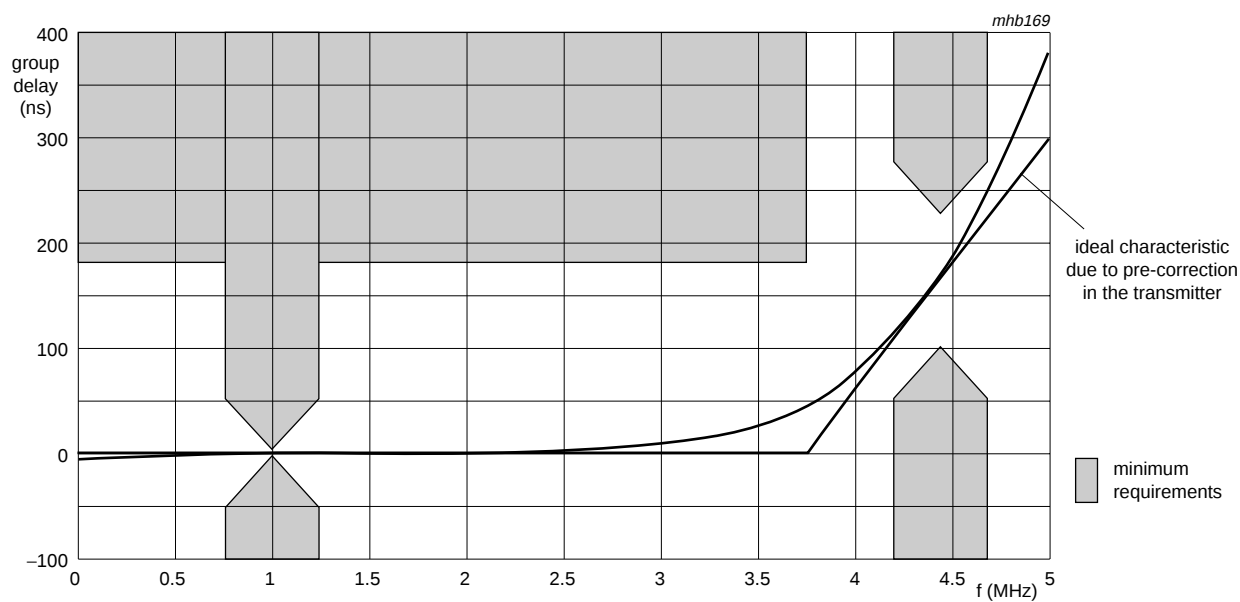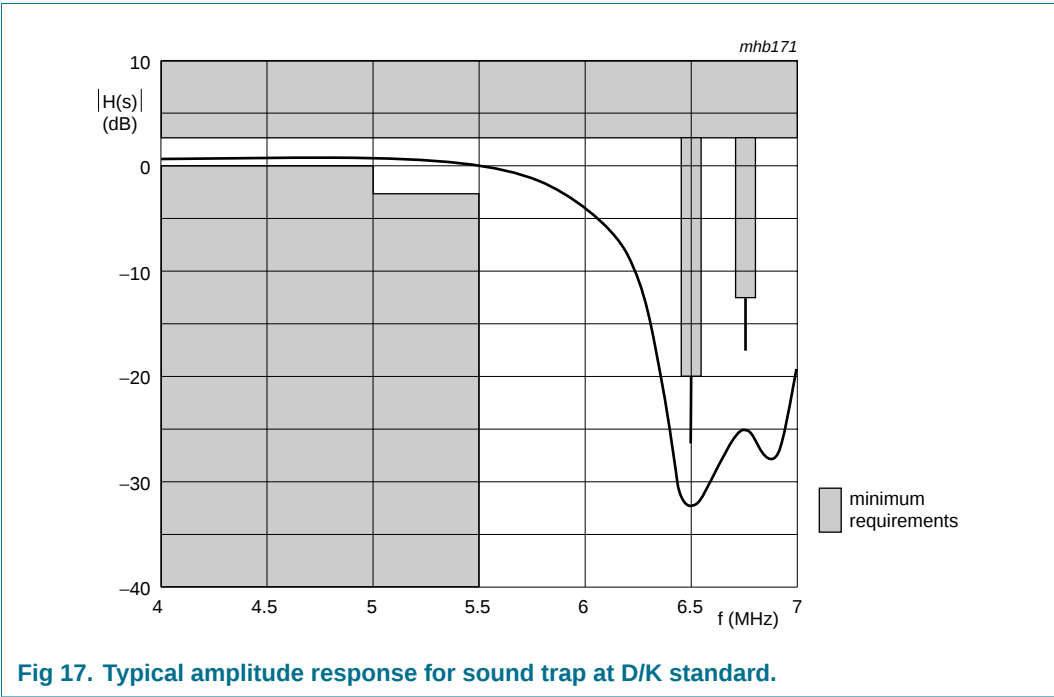

Overall delay is not shown, here the maximum ripple is specified.

Fig 15. Typical group delay for sound trap at B/G standard.

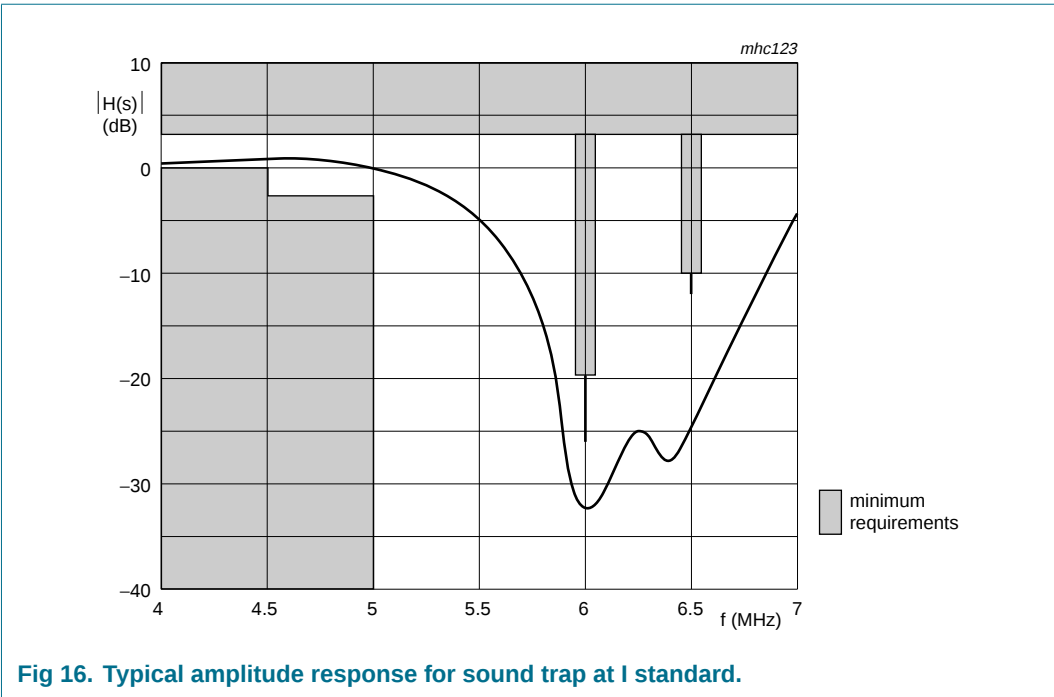


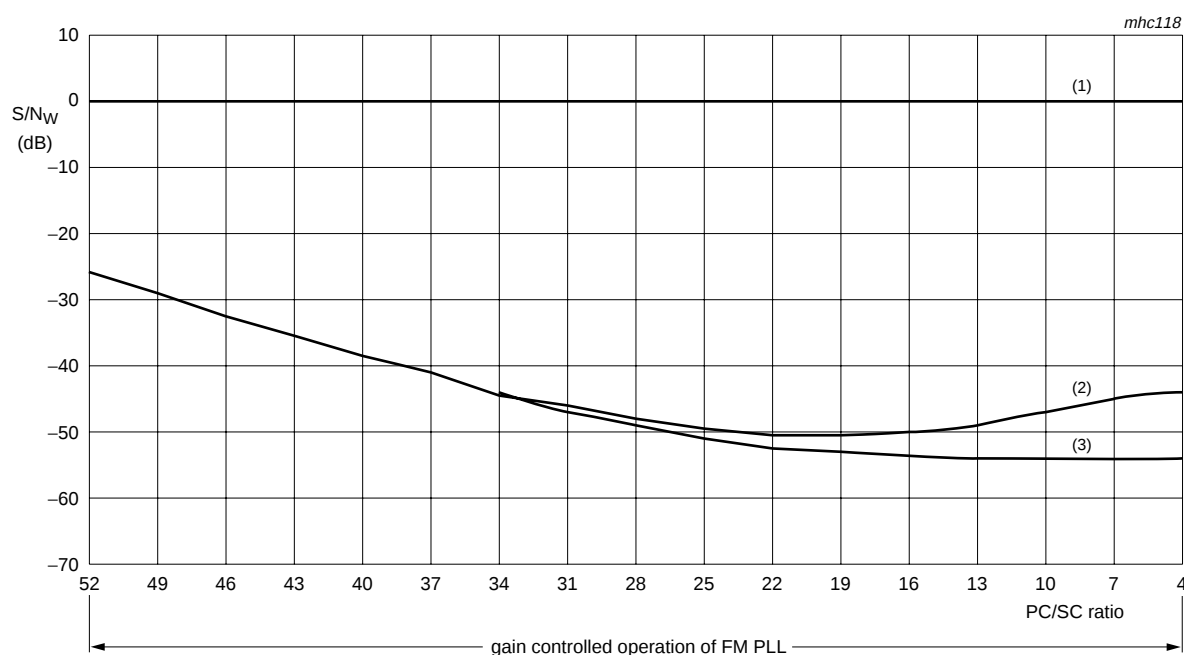

Conditions: PC/SC ratio is measured at pins VIF1 and VIF2; via transformer; 27 kHz FM deviation; 50  $\mu$ s de-emphasis.


- (1) Signal.
- (2) Noise at H-picture (CCIR weighted quasi peak).
- (3) Noise at black picture (CCIR weighted quasi peak).

**Fig 18. Audio signal-to-noise ratio as a function of picture-to-sound carrier ratio in intercarrier mode.**

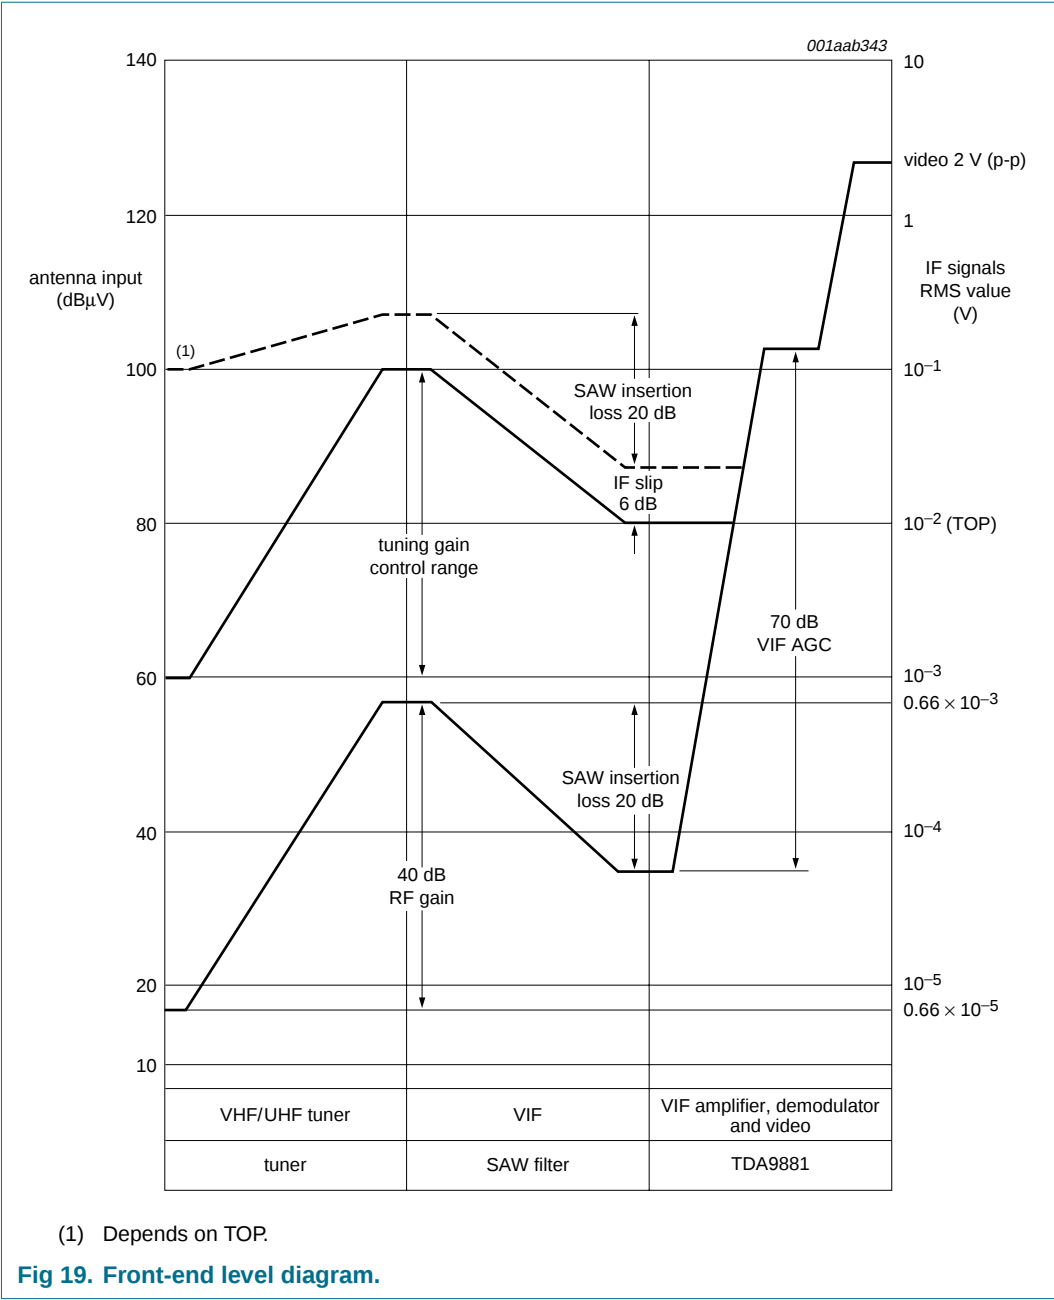



### 13. Test information

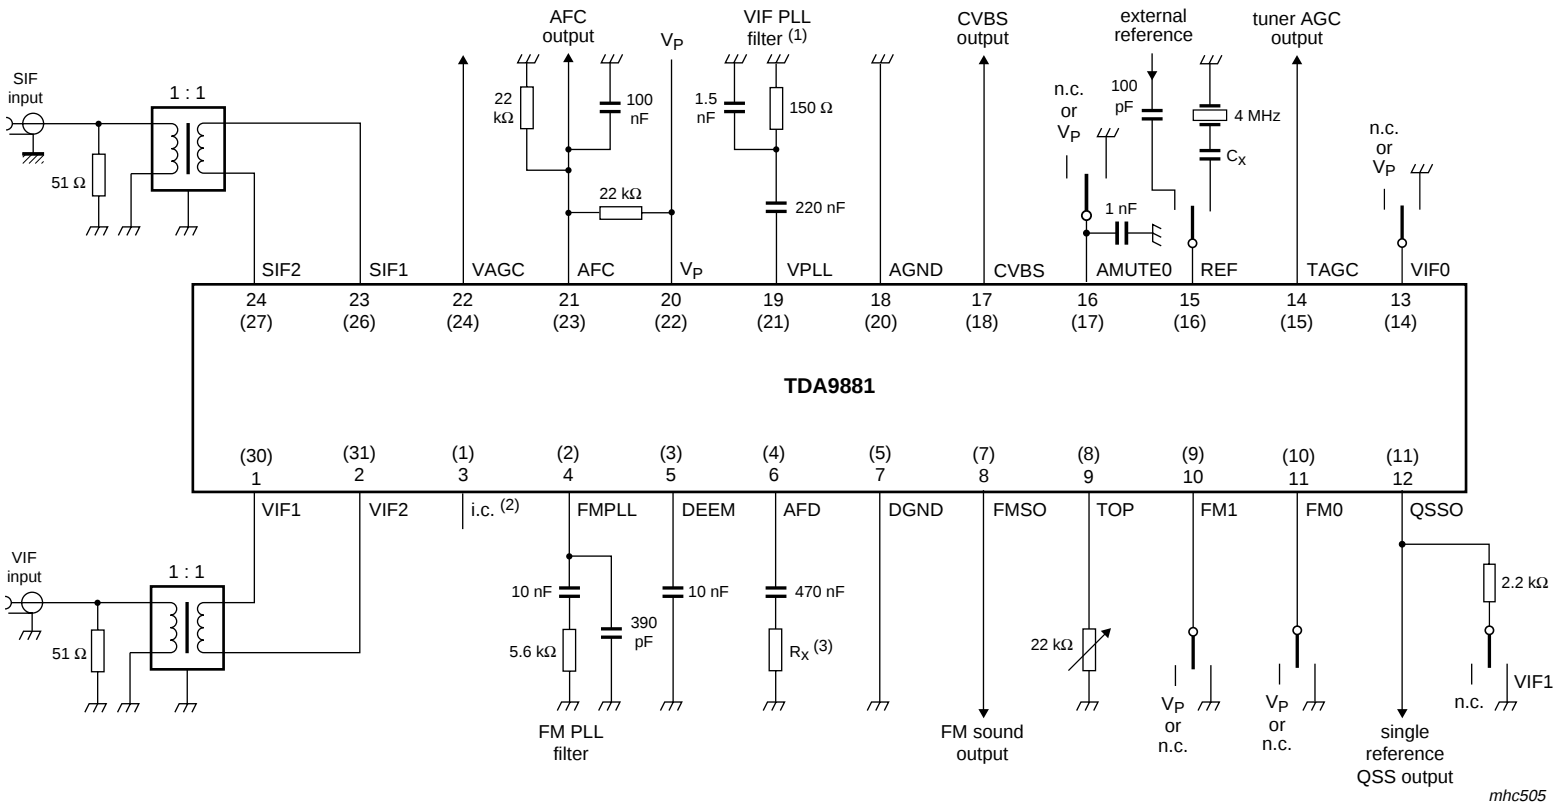

Pin numbers for TDA9881HN in parenthesis.

- (1) Different VIF loop filter in comparison with the application circuit due to different input characteristics (SAW filter or transformer).
- (2) Internal connected; the pin must be left open-circuit.
- (3) AF output signal reduction; see [Table note 19](#) of [Section 11](#).

**Fig 21. Test circuit.**

14. Package outline

SSOP24: plastic shrink small outline package; 24 leads; body width 5.3 mm

SOT340-1

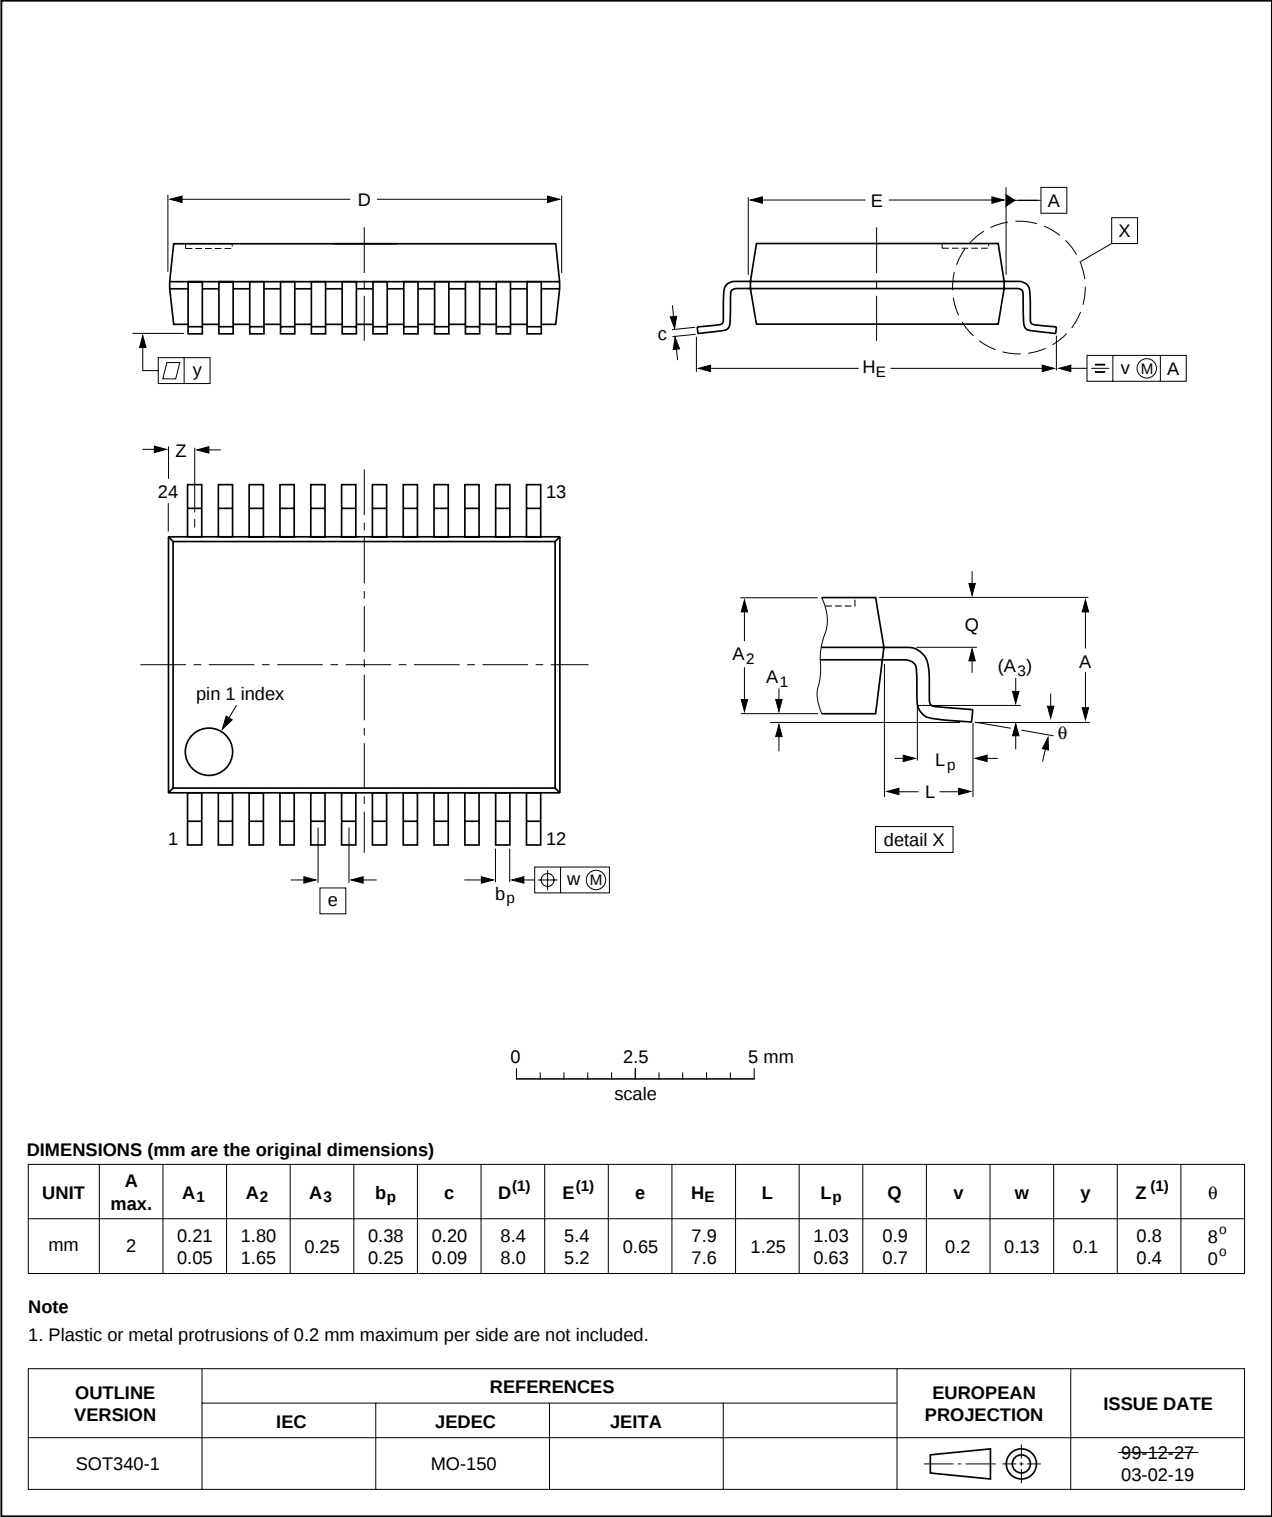


Fig 22. Package outline SOT340-1 (SSOP24).

HVQFN32: plastic thermal enhanced very thin quad flat package; no leads;  
32 terminals; body 5 x 5 x 0.85 mm

SOT617-3

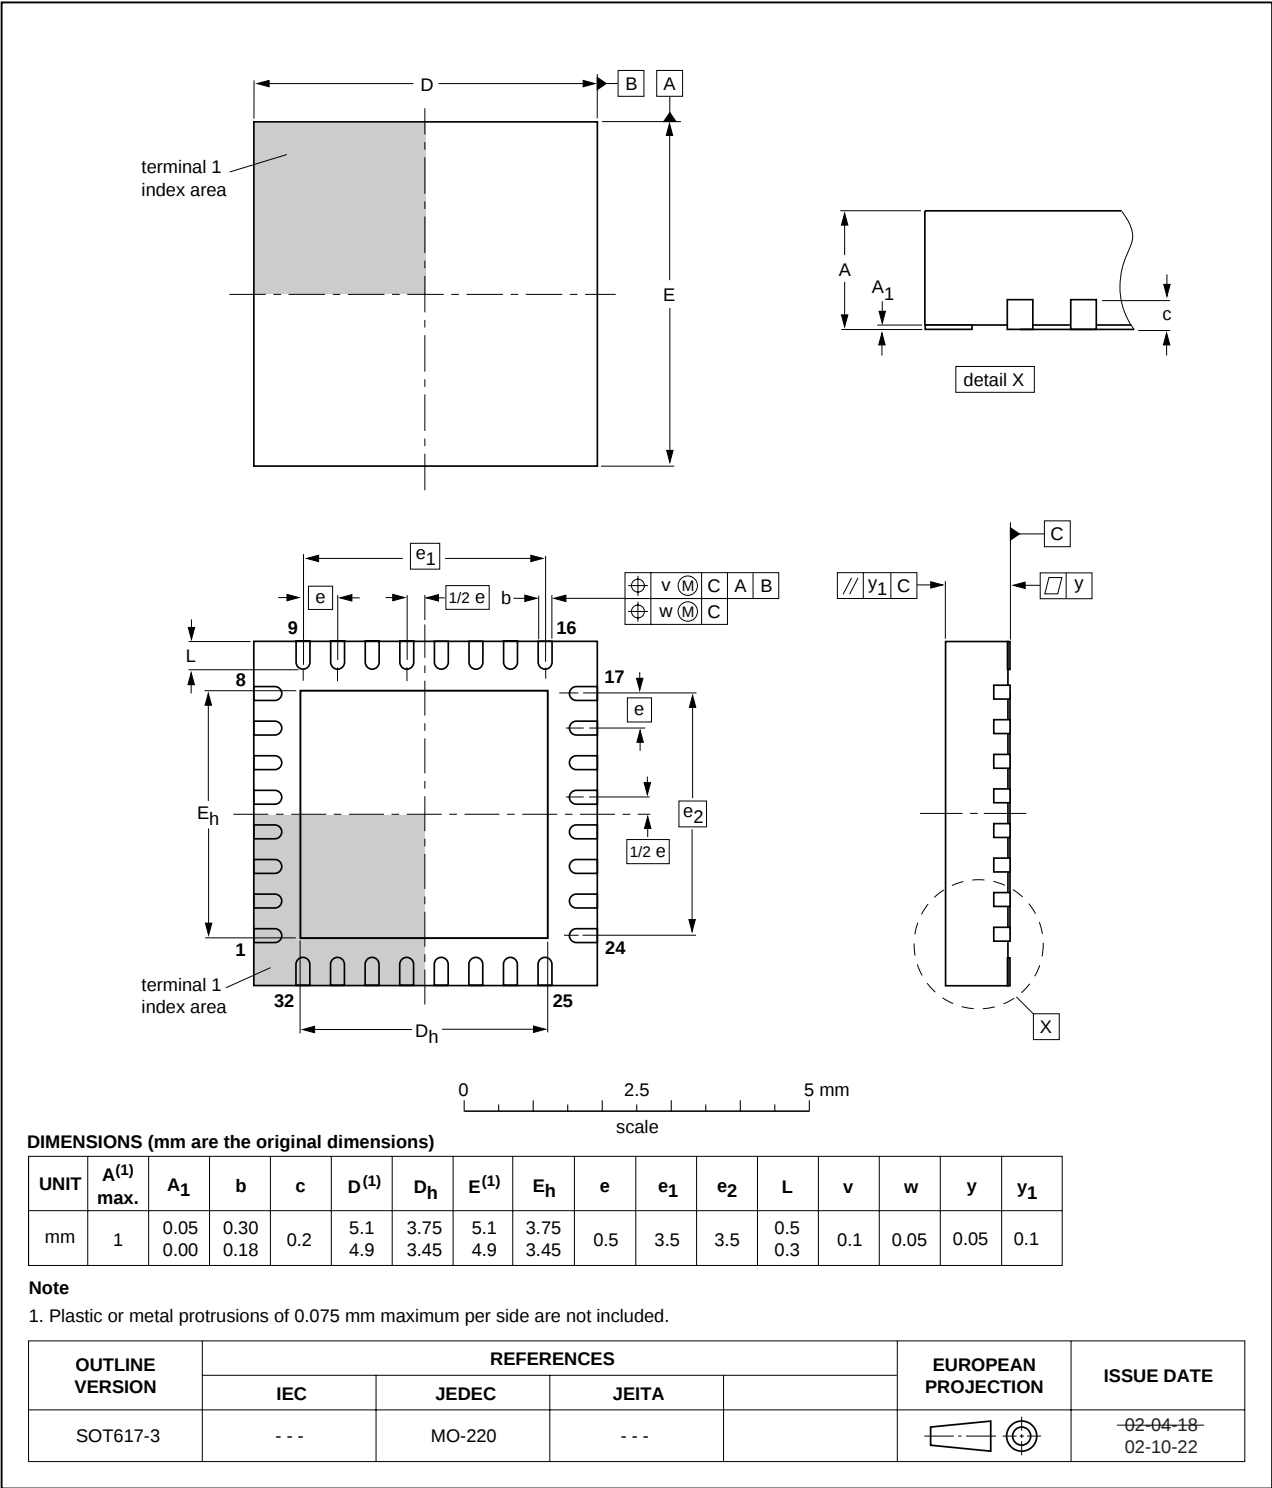


Fig 23. Package outline SOT617-3 (HVQFN32).

## 15. Soldering

### 15.1 Introduction to soldering surface mount packages

This text gives a very brief insight to a complex technology. A more in-depth account of soldering ICs can be found in our *Data Handbook IC26; Integrated Circuit Packages* (document order number 9398 652 90011).

There is no soldering method that is ideal for all surface mount IC packages. Wave soldering can still be used for certain surface mount ICs, but it is not suitable for fine pitch SMDs. In these situations reflow soldering is recommended.

### 15.2 Reflow soldering

Reflow soldering requires solder paste (a suspension of fine solder particles, flux and binding agent) to be applied to the printed-circuit board by screen printing, stencilling or pressure-syringe dispensing before package placement. Driven by legislation and environmental forces the worldwide use of lead-free solder pastes is increasing.

Several methods exist for reflowing; for example, convection or convection/infrared heating in a conveyor type oven. Throughput times (preheating, soldering and cooling) vary between 100 seconds and 200 seconds depending on heating method.

Typical reflow peak temperatures range from 215 °C to 270 °C depending on solder paste material. The top-surface temperature of the packages should preferably be kept:

- below 225 °C (SnPb process) or below 245 °C (Pb-free process)
  - for all BGA, HTSSON..T and SSOP..T packages
  - for packages with a thickness  $\geq 2.5$  mm
  - for packages with a thickness  $< 2.5$  mm and a volume  $\geq 350$  mm<sup>3</sup> so called thick/large packages.
- below 240 °C (SnPb process) or below 260 °C (Pb-free process) for packages with a thickness  $< 2.5$  mm and a volume  $< 350$  mm<sup>3</sup> so called small/thin packages.

Moisture sensitivity precautions, as indicated on packing, must be respected at all times.

### 15.3 Wave soldering

Conventional single wave soldering is not recommended for surface mount devices (SMDs) or printed-circuit boards with a high component density, as solder bridging and non-wetting can present major problems.

To overcome these problems the double-wave soldering method was specifically developed.

If wave soldering is used the following conditions must be observed for optimal results:

- Use a double-wave soldering method comprising a turbulent wave with high upward pressure followed by a smooth laminar wave.
- For packages with leads on two sides and a pitch (e):
  - larger than or equal to 1.27 mm, the footprint longitudinal axis is **preferred** to be parallel to the transport direction of the printed-circuit board;

- smaller than 1.27 mm, the footprint longitudinal axis **must** be parallel to the transport direction of the printed-circuit board.

The footprint must incorporate solder thieves at the downstream end.

- For packages with leads on four sides, the footprint must be placed at a 45° angle to the transport direction of the printed-circuit board. The footprint must incorporate solder thieves downstream and at the side corners.

During placement and before soldering, the package must be fixed with a droplet of adhesive. The adhesive can be applied by screen printing, pin transfer or syringe dispensing. The package can be soldered after the adhesive is cured.

Typical dwell time of the leads in the wave ranges from 3 seconds to 4 seconds at 250 °C or 265 °C, depending on solder material applied, SnPb or Pb-free respectively.

A mildly-activated flux will eliminate the need for removal of corrosive residues in most applications.

## 15.4 Manual soldering

Fix the component by first soldering two diagonally-opposite end leads. Use a low voltage (24 V or less) soldering iron applied to the flat part of the lead. Contact time must be limited to 10 seconds at up to 300 °C.

When using a dedicated tool, all other leads can be soldered in one operation within 2 seconds to 5 seconds between 270 °C and 320 °C.

## 15.5 Package related soldering information

**Table 13: Suitability of surface mount IC packages for wave and reflow soldering methods**

| Package <sup>[1]</sup>                                                                         | Soldering method                   |                       |
|------------------------------------------------------------------------------------------------|------------------------------------|-----------------------|
|                                                                                                | Wave                               | Reflow <sup>[2]</sup> |
| BGA, HTSSON..T <sup>[3]</sup> , LBGA, LFBGA, SQFP, SSOP..T <sup>[3]</sup> , TFBGA, VFBGA, XSON | not suitable                       | suitable              |
| DHVQFN, HBCC, HBGA, HLQFP, HSO, HSOP, HSQFP, HSSON, HTQFP, HTSSOP, HVQFN, HVSON, SMS           | not suitable <sup>[4]</sup>        | suitable              |
| PLCC <sup>[5]</sup> , SO, SOJ                                                                  | suitable                           | suitable              |
| LQFP, QFP, TQFP                                                                                | not recommended <sup>[5] [6]</sup> | suitable              |
| SSOP, TSSOP, VSO, VSSOP                                                                        | not recommended <sup>[7]</sup>     | suitable              |
| CWQCCN..L <sup>[8]</sup> , PMFP <sup>[9]</sup> , WQCCN..L <sup>[8]</sup>                       | not suitable                       | not suitable          |

[1] For more detailed information on the BGA packages refer to the *(LF)BGA Application Note* (AN01026); order a copy from your Philips Semiconductors sales office.

[2] All surface mount (SMD) packages are moisture sensitive. Depending upon the moisture content, the maximum temperature (with respect to time) and body size of the package, there is a risk that internal or external package cracks may occur due to vaporization of the moisture in them (the so called popcorn effect). For details, refer to the Drypack information in the *Data Handbook IC26; Integrated Circuit Packages; Section: Packing Methods*.

[3] These transparent plastic packages are extremely sensitive to reflow soldering conditions and must on no account be processed through more than one soldering cycle or subjected to infrared reflow soldering with peak temperature exceeding 217 °C ± 10 °C measured in the atmosphere of the reflow oven. The package body peak temperature must be kept as low as possible.

- [4] These packages are not suitable for wave soldering. On versions with the heatsink on the bottom side, the solder cannot penetrate between the printed-circuit board and the heatsink. On versions with the heatsink on the top side, the solder might be deposited on the heatsink surface.
- [5] If wave soldering is considered, then the package must be placed at a 45° angle to the solder wave direction. The package footprint must incorporate solder thieves downstream and at the side corners.
- [6] Wave soldering is suitable for LQFP, QFP and TQFP packages with a pitch (e) larger than 0.8 mm; it is definitely not suitable for packages with a pitch (e) equal to or smaller than 0.65 mm.
- [7] Wave soldering is suitable for SSOP, TSSOP, VSO and VSSOP packages with a pitch (e) equal to or larger than 0.65 mm; it is definitely not suitable for packages with a pitch (e) equal to or smaller than 0.5 mm.
- [8] Image sensor packages in principle should not be soldered. They are mounted in sockets or delivered pre-mounted on flex foil. However, the image sensor package can be mounted by the client on a flex foil by using a hot bar soldering process. The appropriate soldering profile can be provided on request.
- [9] Hot bar soldering or manual soldering is suitable for PMFP packages.

16. Revision history

Table 14: Revision history

| Document ID | Release date | Data sheet status  | Change notice | Doc. number    | Supersedes |
|-------------|--------------|--------------------|---------------|----------------|------------|
| TDA9881_1   | 20041116     | Product data sheet | -             | 9397 750 13417 | -          |

## 17. Data sheet status

| Level | Data sheet status <sup>[1]</sup> | Product status <sup>[2] [3]</sup> | Definition                                                                                                                                                                                                                                                                                     |
|-------|----------------------------------|-----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| I     | Objective data                   | Development                       | This data sheet contains data from the objective specification for product development. Philips Semiconductors reserves the right to change the specification in any manner without notice.                                                                                                    |
| II    | Preliminary data                 | Qualification                     | This data sheet contains data from the preliminary specification. Supplementary data will be published at a later date. Philips Semiconductors reserves the right to change the specification without notice, in order to improve the design and supply the best possible product.             |
| III   | Product data                     | Production                        | This data sheet contains data from the product specification. Philips Semiconductors reserves the right to make changes at any time in order to improve the design, manufacturing and supply. Relevant changes will be communicated via a Customer Product/Process Change Notification (CPCN). |

[1] Please consult the most recently issued data sheet before initiating or completing a design.

[2] The product status of the device(s) described in this data sheet may have changed since this data sheet was published. The latest information is available on the Internet at URL <http://www.semiconductors.philips.com>.

[3] For data sheets describing multiple type numbers, the highest-level product status determines the data sheet status.

## 18. Definitions

**Short-form specification** — The data in a short-form specification is extracted from a full data sheet with the same type number and title. For detailed information see the relevant data sheet or data handbook.

**Limiting values definition** — Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 60134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.

**Application information** — Applications that are described herein for any of these products are for illustrative purposes only. Philips Semiconductors make no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

## 19. Disclaimers

**Life support** — These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips Semiconductors customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips Semiconductors for any damages resulting from such application.

**Right to make changes** — Philips Semiconductors reserves the right to make changes in the products - including circuits, standard cells, and/or software - described or contained herein in order to improve design and/or performance. When the product is in full production (status 'Production'), relevant changes will be communicated via a Customer Product/Process Change Notification (CPCN). Philips Semiconductors assumes no responsibility or liability for the use of any of these products, conveys no license or title under any patent, copyright, or mask work right to these products, and makes no representations or warranties that these products are free from patent, copyright, or mask work right infringement, unless otherwise specified.

## 20. Contact information

For additional information, please visit: <http://www.semiconductors.philips.com>

For sales office addresses, send an email to: [sales.addresses@www.semiconductors.philips.com](mailto:sales.addresses@www.semiconductors.philips.com)

## 21. Contents

|           |                                                            |           |
|-----------|------------------------------------------------------------|-----------|
| <b>1</b>  | <b>General description</b> . . . . .                       | <b>1</b>  |
| <b>2</b>  | <b>Features</b> . . . . .                                  | <b>1</b>  |
| <b>3</b>  | <b>Applications</b> . . . . .                              | <b>1</b>  |
| <b>4</b>  | <b>Quick reference data</b> . . . . .                      | <b>2</b>  |
| <b>5</b>  | <b>Ordering information</b> . . . . .                      | <b>3</b>  |
| <b>6</b>  | <b>Block diagram</b> . . . . .                             | <b>4</b>  |
| <b>7</b>  | <b>Pinning information</b> . . . . .                       | <b>5</b>  |
| 7.1       | Pinning . . . . .                                          | 5         |
| 7.2       | Pin description . . . . .                                  | 6         |
| <b>8</b>  | <b>Functional description</b> . . . . .                    | <b>7</b>  |
| 8.1       | VIF amplifier . . . . .                                    | 7         |
| 8.2       | Tuner AGC and VIF AGC . . . . .                            | 7         |
| 8.3       | VIF AGC detector . . . . .                                 | 7         |
| 8.4       | FPLL detector . . . . .                                    | 8         |
| 8.5       | VCO and divider . . . . .                                  | 8         |
| 8.6       | AFC and digital acquisition help circuit . . . . .         | 8         |
| 8.7       | Video demodulator and amplifier . . . . .                  | 9         |
| 8.8       | Sound carrier trap . . . . .                               | 9         |
| 8.9       | SIF amplifier . . . . .                                    | 9         |
| 8.10      | SIF AGC detector . . . . .                                 | 9         |
| 8.11      | Single reference QSS mixer . . . . .                       | 10        |
| 8.12      | FM demodulator and acquisition help circuit . . . . .      | 10        |
| 8.13      | Audio amplifier and mute time constant . . . . .           | 11        |
| 8.14      | Internal voltage stabilizer . . . . .                      | 11        |
| 8.15      | Logic . . . . .                                            | 11        |
| <b>9</b>  | <b>Limiting values</b> . . . . .                           | <b>12</b> |
| <b>10</b> | <b>Thermal characteristics</b> . . . . .                   | <b>13</b> |
| <b>11</b> | <b>Characteristics</b> . . . . .                           | <b>13</b> |
| <b>12</b> | <b>Application information</b> . . . . .                   | <b>33</b> |
| <b>13</b> | <b>Test information</b> . . . . .                          | <b>34</b> |
| <b>14</b> | <b>Package outline</b> . . . . .                           | <b>35</b> |
| <b>15</b> | <b>Soldering</b> . . . . .                                 | <b>37</b> |
| 15.1      | Introduction to soldering surface mount packages . . . . . | 37        |
| 15.2      | Reflow soldering . . . . .                                 | 37        |
| 15.3      | Wave soldering . . . . .                                   | 37        |
| 15.4      | Manual soldering . . . . .                                 | 38        |
| 15.5      | Package related soldering information . . . . .            | 38        |
| <b>16</b> | <b>Revision history</b> . . . . .                          | <b>40</b> |
| <b>17</b> | <b>Data sheet status</b> . . . . .                         | <b>41</b> |
| <b>18</b> | <b>Definitions</b> . . . . .                               | <b>41</b> |
| <b>19</b> | <b>Disclaimers</b> . . . . .                               | <b>41</b> |
| <b>20</b> | <b>Contact information</b> . . . . .                       | <b>41</b> |

© Koninklijke Philips Electronics N.V. 2004

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Date of release: 16 November 2004  
Document number: 9397 750 13417

Published in The Netherlands

