BFP843

Robust Low Noise Broadband Pre-Matched Bipolar RF Transistor

Data Sheet

Revision 1.0, 2013-06-19

RF & Protection Devices

Edition 2013-06-19

Published by
Infineon Technologies AG
81726 Munich, Germany

© 2013 Infineon Technologies AG
All Rights Reserved.

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (**www.infineon.com**).

Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

BFP843, Robust Low Noise Broadband Pre-Matched Bipolar RF Transistor

Revision History: 2013-06-19, Revision 1.0

Page	Subjects (major changes since last revision)

Trademarks of Infineon Technologies AG

AURIX™, C166™, CanPAK™, CIPOS™, CIPURSE™, EconoPACK™, CoolMOS™, CoolSET™, CORECONTROL™, CROSSAVE™, DAVE™, DI-POL™, EasyPIM™, EconoBRIDGE™, EconoDUAL™, EconoPIM™, EconoPACK™, EiceDRIVER™, eupec™, FCOS™, HITFET™, HybridPACK™, I²RF™, ISOFACE™, IsoPACK™, MIPAQ™, ModSTACK™, my-d™, NovalithIC™, OptiMOS™, ORIGA™, POWERCODE™; PRIMARION™, PrimePACK™, PrimeSTACK™, PRO-SIL™, PROFET™, RASIC™, ReverSave™, SatRIC™, SIEGET™, SINDRION™, SIPMOS™, SmartLEWIS™, SOLID FLASH™, TEMPFET™, thinQ!™, TRENCHSTOP™, TriCore™.

Other Trademarks

Advance Design System™ (ADS) of Agilent Technologies, AMBA™, ARM™, MULTI-ICE™, KEIL™, PRIMECELL™, REALVIEW™, THUMB™, µVision™ of ARM Limited, UK. AUTOSAR™ is licensed by AUTOSAR development partnership. Bluetooth™ of Bluetooth SIG Inc. CAT-iq™ of DECT Forum. COLOSSUS™, FirstGPS™ of Trimble Navigation Ltd. EMV™ of EMVCo, LLC (Visa Holdings Inc.). EPCOS™ of Epcos AG. FLEXGO™ of Microsoft Corporation. FlexRay™ is licensed by FlexRay Consortium. HYPERTERMINAL™ of Hilgraeve Incorporated. IEC™ of Commission Electrotechnique Internationale. IrDA™ of Infrared Data Association Corporation. ISO™ of INTERNATIONAL ORGANIZATION FOR STANDARDIZATION. MATLAB™ of MathWorks, Inc. MAXIM™ of Maxim Integrated Products, Inc. MICROTEC™, NUCLEUS™ of Mentor Graphics Corporation. MIPI™ of MIPI Alliance, Inc. MIPS™ of MIPS Technologies, Inc., USA. muRata™ of MURATA MANUFACTURING CO., MICROWAVE OFFICE™ (MWO) of Applied Wave Research Inc., OmniVision™ of OmniVision Technologies, Inc. Openwave™ Openwave Systems Inc. RED HAT™ Red Hat, Inc. RFMD™ RF Micro Devices, Inc. SIRIUS™ of Sirius Satellite Radio Inc. SOLARIS™ of Sun Microsystems, Inc. SPANSION™ of Spansion LLC Ltd. Symbian™ of Symbian Software Limited. TAIYO YUDEN™ of Taiyo Yuden Co. TEAKLITE™ of CEVA, Inc. TEKTRONIX™ of Tektronix Inc. TOKO™ of TOKO KABUSHIKI KAISHA TA. UNIX™ of X/Open Company Limited. VERILOG™, PALLADIUM™ of Cadence Design Systems, Inc. VLYNQ™ of Texas Instruments Incorporated. VXWORKS™, WIND RIVER™ of WIND RIVER SYSTEMS, INC. ZETEX™ of Diodes Zetex Limited.

Last Trademarks Update 2011-11-11

Table of Contents

Table of Contents 4
List of Figures 5
List of Tables 6
1 Product Brief 7
2 Features 8
3 Maximum Ratings 9
4 Thermal Characteristics 10
5 Electrical Characteristics 11
5.1 DC Characteristics 11
5.2 General AC Characteristics 11
5.3 Frequency Dependent AC Characteristics 12
6 Characteristic DC Diagrams 15
7 Characteristic AC Diagrams 18
8 Simulation Data 24
9 Package Information SOT343 25

List of Figures

Figure 4-1 Total Power Dissipation $P_{tot} = f(T_s)$ . . . 10
Figure 5-1 BFP843 Testing Circuit . . . 12
Figure 6-1 Collector Current vs. Collector Emitter Voltage $I_C = f(V_{CE})$, I_B = Parameter . . . 15
Figure 6-2 DC Current Gain $h_{FE} = f(I_C)$, V_{CE} = 1.8 V . . . 15
Figure 6-3 Collector Current vs. Base Emitter Forward Voltage $I_C = f(V_{BE})$, V_{CE} = 1.8 V . . . 16
Figure 6-4 Base Current vs. Base Emitter Forward Voltage $I_B = f(V_{BE})$, V_{CE} = 1.8 V . . . 16
Figure 6-5 Base Current vs. Base Emitter Reverse Voltage $I_B = f(V_{EB})$, V_{CE} = 1.8 V . . . 17
Figure 7-1 3rd Order Intercept Point at Output $OIP3 = f(I_C)$, $Z_S = Z_L$ = 50 Ω, V_{CE}, f = Parameters . . . 18
Figure 7-2 3rd Order Intercept Point at Output $OIP3$ [dBm] $= f(I_C, V_{CE})$, $Z_S = Z_L$ = 50 Ω, f = 5.5 GHz . . . 18
Figure 7-3 Compression Point at Output OP_{1dB} [dBm] = $f(I_C, V_{CE})$, $Z_S = Z_L$ = 50 Ω, f = 5.5 GHz . . . 19
Figure 7-4 Gain G_{ma}, G_{ms}, $|S_{21}|^2 = f(f)$, V_{CE} = 1.8 V, I_C = 15 mA . . . 19
Figure 7-5 Maximum Power Gain $G_{max} = f(I_C)$, V_{CE} = 1.8 V, f = Parameter in GHz . . . 20
Figure 7-6 Maximum Power Gain $G_{max} = f(V_{CE})$, I_C = 15 mA, f = Parameter in GHz . . . 20
Figure 7-7 Input Reflection Coefficient $S_{11} = f(f)$, V_{CE} = 1.8 V, I_C = 8 / 15 mA . . . 21
Figure 7-8 Source Impedance for Minimum Noise Figure $Z_{opt} = f(f)$, V_{CE} = 1.8 V, I_C = 8 / 15 mA . . . 21
Figure 7-9 Output Reflection Coefficient $S_{22} = f(f)$, V_{CE} = 1.8 V, I_C = 8 / 15 mA . . . 22
Figure 7-10 Noise Figure $NF_{min} = f(f)$, V_{CE} = 1.8 V, I_C = 8 / 15 mA, $Z_S = Z_{opt}$ . . . 22
Figure 7-11 Noise Figure $NF_{min} = f(I_C)$, V_{CE} = 1.8 V, $Z_S = Z_{opt}$, f = Parameter in GHz . . . 23
Figure 7-12 Noise Figure $NF_{50} = f(I_C)$, V_{CE} = 1.8 V, Z_S = 50 Ω, f = Parameter in GHz . . . 23
Figure 9-1 Package Outline . . . 25
Figure 9-2 Package Footprint . . . 25
Figure 9-3 Marking Description (Marking BFP843: T2s) . . . 25
Figure 9-4 Tape Dimensions . . . 25

List of Tables


Table 3-1 Maximum Ratings at T_A = 25 °C (unless otherwise specified) 9
Table 4-1 Thermal Resistance 10
Table 5-1 DC Characteristics at T_A = 25 °C 11
Table 5-2 General AC Characteristics at T_A = 25 °C 11
Table 5-3 AC Characteristics, V_{CE} = 1.8 V, f = 450 MHz 12
Table 5-4 AC Characteristics, V_{CE} = 1.8 V, f = 900 MHz 12
Table 5-5 AC Characteristics, V_{CE} = 1.8 V, f = 1.5 GHz 13
Table 5-6 AC Characteristics, V_{CE} = 1.8 V, f = 1.9 GHz 13
Table 5-7 AC Characteristics, V_{CE} = 1.8 V, f = 2.4 GHz 13
Table 5-8 AC Characteristics, V_{CE} = 1.8 V, f = 3.5 GHz 14
Table 5-9 AC Characteristics, V_{CE} = 1.8 V, f = 5.5 GHz 14
Table 5-10 AC Characteristics, V_{CE} = 1.8 V, f = 10 GHz 14

1 Product Brief

The BFP843 is a low noise broadband NPN bipolar RF transistor. Its integrated feedback provides a broadband pre-match to 50 Ω at input and output and improves the stability against parasitic oscillations. These measures simplify the design of arbitrary LNA application circuits. The device is based on Infineon's reliable high volume silicon germanium carbon (SiGe:C) heterojunction bipolar technology. The collector design supports voltages up to V_{CEO} = 2.25 V and currents up to I_C = 55 mA. The device is especially suited for mobile applications in which low power consumption is a key requirement. The transistor is fitted with internal protection circuits, which enhance the robustness against electrostatic discharge (ESD) and against high levels of RF input power. The device is housed in an easy to use plastic package with visible leads.

2 Features

- Low noise broadband NPN RF transistor based on Infineon´s reliable, high volume SiGe:C bipolar technology
- High maximum RF input power and ESD robustness
  20 dBm maximum RF input power, 1.5 KV HBM ESD hardness
- Unique combination of high RF performance, robustness and ease of application circuit design
- Low noise figure: NF_{min} = 1.0 dB at 2.4 GHz
  and 1.2 dB at 5.5 GHz, 1.8 V, 8 mA
- High gain: $|S_{21}|^2$ = 21 dB at 2.4 GHz
  and 15.5 dB at 5.5 GHz, 1.8 V, 15 mA
- $OIP3$ = 23 dBm at 2.4 GHz and 20 dBm at 5.5 GHz, 1.8 V, 20 mA
- Ideal for low voltage applications e.g. V_{CC} = 1.2 V and 1.8 V
  (2.85 V, 3.3 V, 3.6 V requires corresponding collector resistor)
- Low power consumption, ideal for mobile applications
- Easy to use Pb free (RoHS compliant) and halogen free industry standard package with visible leads
- Qualification report according to AEC-Q101 available

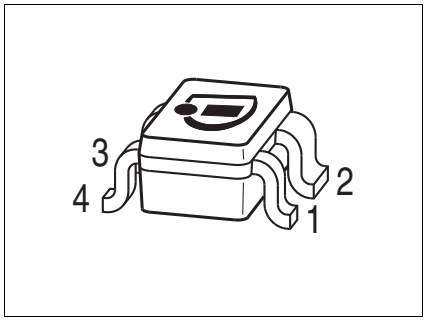

RoHS

HAL

Applications

As Low Noise Amplifier (LNA) in

- Wireless Communications: WLAN IEEE802.11b,g,n,a,ac single- and dual band applications, broadband LTE or WiMAX LNA
- Satellite navigation systems (e.g. GPS, GLONASS, COMPASS...) and satellite C-band LNB (1st and 2nd stage LNA)
- Broadband amplifiers: Dualband WLAN, multiband mobile phone, UWB up to 10 GHz
- ISM bands up to 10 GHz
- Dedicated short range communication (DSRC) system: WLAN IEEE802.11p

Attention: ESD (Electrostatic discharge) sensitive device, observe handling precautions

Product Name	Package	Pin Configuration				Marking
BFP843	SOT343	1 = B	2 = E	3 = C	4 = E	T2s

3 Maximum Ratings

Table 3-1 Maximum Ratings at T_A = 25 °C (unless otherwise specified)

Parameter	Symbol	Values		Unit	Note / Test Condition
		Min.	Max.		
Collector emitter voltage	V_{CEO}	–	2.25 2.0	V	T_A = 25 °C T_A = -55 °C Open base
Collector emitter voltage[1)]	V_{CES}	–	2.25 2.0	V	T_A = 25 °C T_A = -55 °C E-B short circuited
Collector base voltage[2)]	V_{CBO}	–	2.9 2.6	V	T_A =25 °C T_A = -55 °C Open emitter
Base current	I_B	-5	5	mA	
Collector current	I_C	–	55	mA	
RF input power	P_{RFin}	–	20	dBm	
ESD stress pulse	V_{ESD}	-1.5	1.5	kV	HBM, all pins, acc. to JESD22-A114
Total power dissipation[3)]	P_{tot}	–	125	mW	$T_S \leq$ 99 °C
Junction temperature	T_J	–	150	°C	
Storage temperature	T_{Stg}	-55	150	°C	

1) V_{CES} is identical to V_{CEO} due to design

2) V_{CBO} is similar to V_{CEO} due to design

3) T_S is the soldering point temperature. T_S is measured on the emitter lead at the soldering point of the pcb.

Attention: Stresses above the max. values listed here may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect device reliability. Maximum ratings are absolute ratings; exceeding only one of these values may cause irreversible damage to the integrated circuit.

4 Thermal Characteristics

Table 4-1 Thermal Resistance

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Junction - soldering point[1)]	R_{thJS}	–	405	–	K/W	–

1) For the definition of R_{thJS} please refer to Application Note AN077 (Thermal Resistance Calculation).

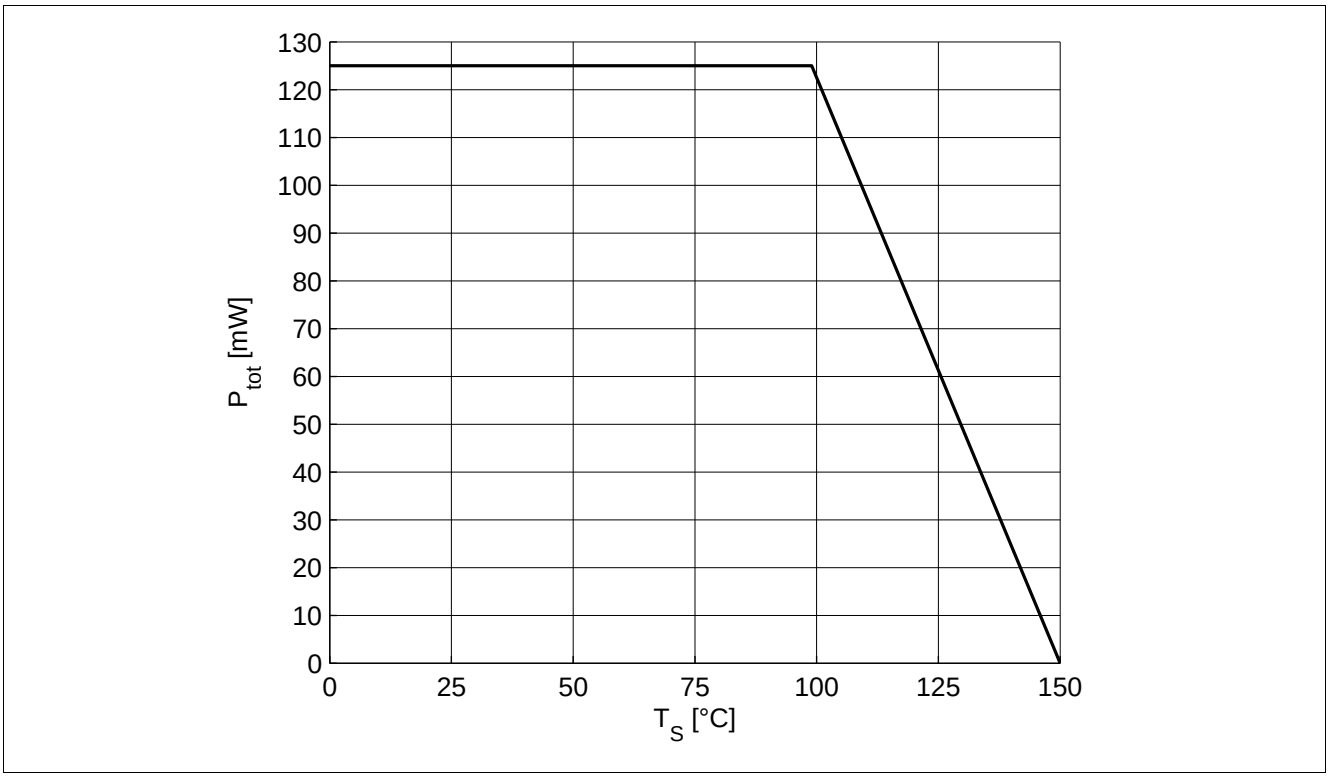


Figure 4-1 Total Power Dissipation $P_{tot} = f(T_s)$

5 Electrical Characteristics

5.1 DC Characteristics

Table 5-1 DC Characteristics at T_A = 25 °C

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Collector emitter breakdown voltage	$V_{(BR)CEO}$	2.25	2.6		V	I_C = 1 mA, I_B = 0 Open base
Collector emitter leakage current	I_{CES}	–	–	400	nA	V_{CE} = 1.5 V, V_{BE} = 0 E-B short circuited
Collector base leakage current	I_{CBO}	–	–	400	nA	V_{CB} = 1.5 V, I_E = 0 Open emitter
Emitter base leakage current	I_{EBO}	–	–	10	µA	V_{EB} = 0.5 V, I_C = 0 Open collector
DC current gain	h_{FE}	150	260	450		V_{CE} = 1.8 V, I_C = 15 mA Pulse measured

5.2 General AC Characteristics

Table 5-2 General AC Characteristics at T_A = 25 °C

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Collector base capacitance[1)]	C_{CB}	–	5.23 0.06	–	pF	f = 1 MHz f = 1 GHz V_{CB} = 1.8 V, V_{BE} = 0 Emitter grounded
Collector emitter capacitance	C_{CE}	–	0.50	–	pF	f = 1 MHz V_{CE} = 1.8 V, V_{BE}= 0 Base grounded
Emitter base capacitance	C_{EB}	–	0.73	–	pF	f = 1 MHz V_{EB} = 0.4 V,V_{CB} = 0 Collector grounded

1) Including integrated feedback capacitance

5.3 Frequency Dependent AC Characteristics

Measurement setup is a test fixture with Bias T's in a 50 Ω system, T_A = 25 °C

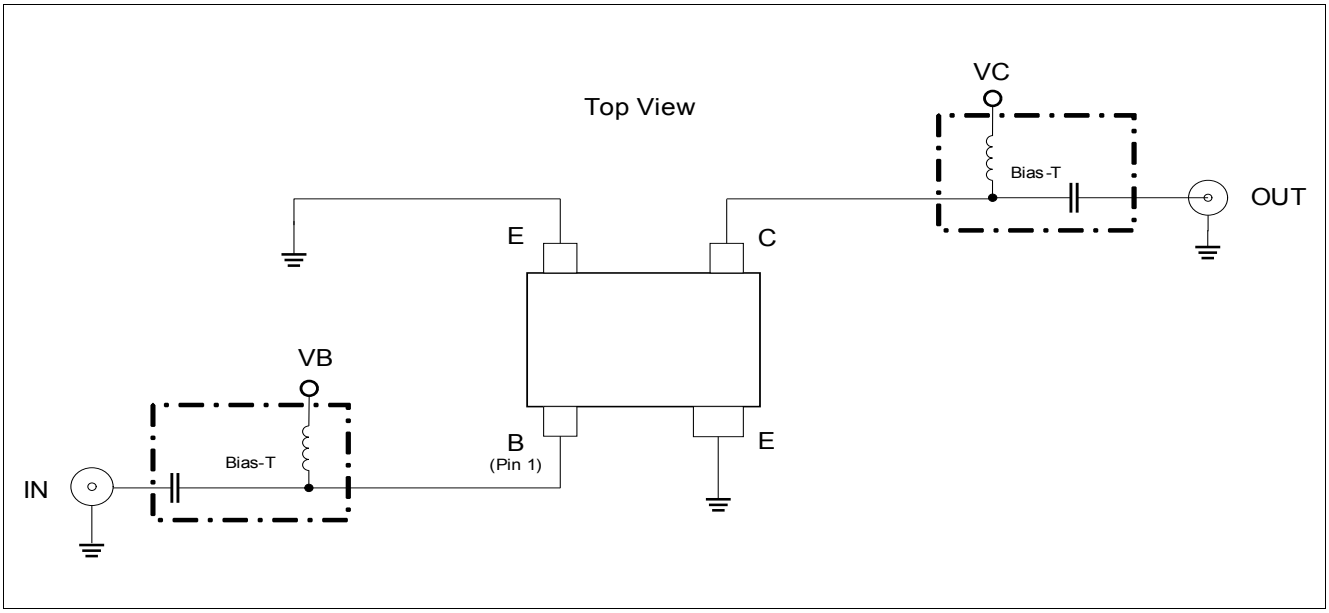


Figure 5-1 BFP843 Testing Circuit

Table 5-3 AC Characteristics, V_{CE} = 1.8 V, f = 450 MHz

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Power Gain					dB	
Maximum power gain	G_{ma}	–	24.5	–		I_C = 15 mA
Transducer gain	$\|S_{21}\|^2$	–	24.5	–		I_C = 15 mA
Minimum Noise Figure					dB	
Minimum noise figure	NF_{min}	–	0.9	–		I_C = 8 mA
Associated gain	G_{ass}	–	22	–		I_C = 8 mA
Linearity					dBm	$Z_S = Z_L$ = 50 Ω
1 dB compression point at output	OP_{1dB}	–	7	–		I_C = 15 mA
3rd order intercept point at output	$OIP3$	–	24	–		I_C = 15 mA

Table 5-4 AC Characteristics, V_{CE} = 1.8 V, f = 900 MHz

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Power Gain					dB	
Maximum power gain	G_{ma}	–	24	–		I_C = 15 mA
Transducer gain	$\|S_{21}\|^2$	–	24	–		I_C = 15 mA
Minimum Noise Figure					dB	
Minimum noise figure	NF_{min}	–	0.9	–		I_C = 8 mA
Associated gain	G_{ass}	–	22	–		I_C = 8 mA
Linearity					dBm	$Z_S = Z_L$ = 50 Ω
1 dB compression point at output	OP_{1dB}	–	8	–		I_C = 15 mA
3rd order intercept point at output	$OIP3$	–	23.5	–		I_C = 15 mA

Table 5-5 AC Characteristics, V_{CE} = 1.8 V, f = 1.5 GHz

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Power Gain					dB	
Maximum power gain	G_{ma}	–	23.5	–		I_C = 15 mA
Transducer gain	$\|S_{21}\|^2$	–	23	–		I_C = 15 mA
Minimum Noise Figure					dB	
Minimum noise figure	NF_{min}	–	0.95	–		I_C = 8 mA
Associated gain	G_{ass}	–	21	–		I_C = 8 mA
Linearity					dBm	$Z_S = Z_L$ = 50 Ω
1 dB compression point at output	OP_{1dB}	–	6	–		I_C = 15 mA
3rd order intercept point at output	$OIP3$	–	22.5	–		I_C = 15 mA

Table 5-6 AC Characteristics, V_{CE} = 1.8 V, f = 1.9 GHz

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Power Gain					dB	
Maximum power gain	G_{ma}	–	22.5	–		I_C = 15 mA
Transducer gain	$\|S_{21}\|^2$	–	22	–		I_C = 15 mA
Minimum Noise Figure					dB	
Minimum noise figure	NF_{min}	–	0.95	–		I_C = 8 mA
Associated gain	G_{ass}	–	20	–		I_C = 8 mA
Linearity					dBm	$Z_S = Z_L$ = 50 Ω
1 dB compression point at output	OP_{1dB}	–	8.5	–		I_C = 15 mA
3rd order intercept point at output	$OIP3$	–	24	–		I_C = 15 mA

Table 5-7 AC Characteristics, V_{CE} = 1.8 V, f = 2.4 GHz

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Power Gain					dB	
Maximum power gain	G_{ma}	–	21.5	–		I_C = 15 mA
Transducer gain	$\|S_{21}\|^2$	–	21	–		I_C = 15 mA
Minimum Noise Figure					dB	
Minimum noise figure	NF_{min}	–	1.0	–		I_C = 8 mA
Associated gain	G_{ass}	–	19.5	–		I_C = 8 mA
Linearity					dBm	$Z_S = Z_L$ = 50 Ω
1 dB compression point at output	OP_{1dB}	–	6.5	–		I_C = 15 mA
3rd order intercept point at output	$OIP3$	–	22	–		I_C = 15 mA

Table 5-8 AC Characteristics, V_{CE} = 1.8 V, f = 3.5 GHz

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Power Gain					dB	
Maximum power gain	G_{ma}	–	19.5	–		I_C = 15 mA
Transducer gain	$\|S_{21}\|^2$	–	19	–		I_C = 15 mA
Minimum Noise Figure					dB	
Minimum noise figure	NF_{min}	–	1.1	–		I_C = 8 mA
Associated gain	G_{ass}	–	17.5	–		I_C = 8 mA
Linearity					dBm	$Z_S = Z_L$ = 50 Ω
1 dB compression point at output	OP_{1dB}	–	7	–		I_C = 15 mA
3rd order intercept point at output	$OIP3$	–	22.5	–		I_C = 15 mA

Table 5-9 AC Characteristics, V_{CE} = 1.8 V, f = 5.5 GHz

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Power Gain					dB	
Maximum power gain	G_{ma}	–	17	–		I_C = 15 mA
Transducer gain	$\|S_{21}\|^2$	–	15.5	–		I_C = 15 mA
Minimum Noise Figure					dB	
Minimum noise figure	NF_{min}	–	1.2	–		I_C = 8 mA
Associated gain	G_{ass}	–	15	–		I_C = 8 mA
Linearity					dBm	$Z_S = Z_L$ = 50 Ω
1 dB compression point at output	OP_{1dB}	–	4	–		I_C = 15 mA
3rd order intercept point at output	$OIP3$	–	19.5	–		I_C = 15 mA

Table 5-10 AC Characteristics, V_{CE} = 1.8 V, f = 10 GHz

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Power Gain					dB	
Maximum power gain	G_{ma}	–	13.5	–		I_C = 15 mA
Transducer gain	$\|S_{21}\|^2$	–	8.5	–		I_C = 15 mA
Minimum Noise Figure					dB	
Minimum noise figure	NF_{min}	–	1.85	–		I_C = 8 mA
Associated gain	G_{ass}	–	9	–		I_C = 8 mA
Linearity					dBm	$Z_S = Z_L$ = 50 Ω
1 dB compression point at output	OP_{1dB}	–	0	–		I_C = 15 mA
3rd order intercept point at output	$OIP3$	–	16	–		I_C = 15 mA

Note: OIP3 value depends on termination of all intermodulation frequency components. Termination used for this measurement is 50 Ω from 0.2 MHz to 12 GHz.

6 Characteristic DC Diagrams

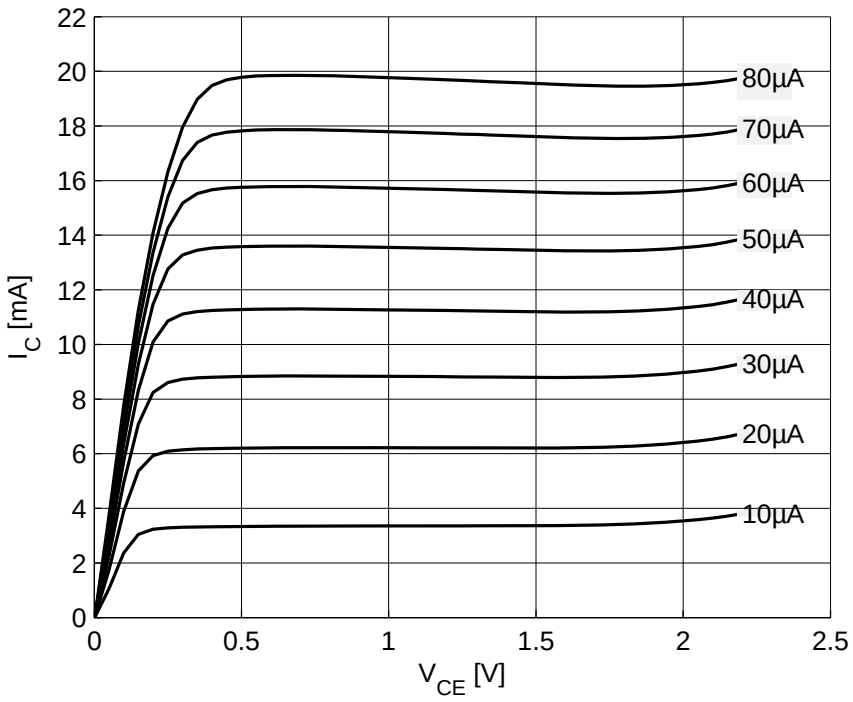


Figure 6-1 Collector Current vs. Collector Emitter Voltage $I_C = f(V_{CE})$, I_B = Parameter

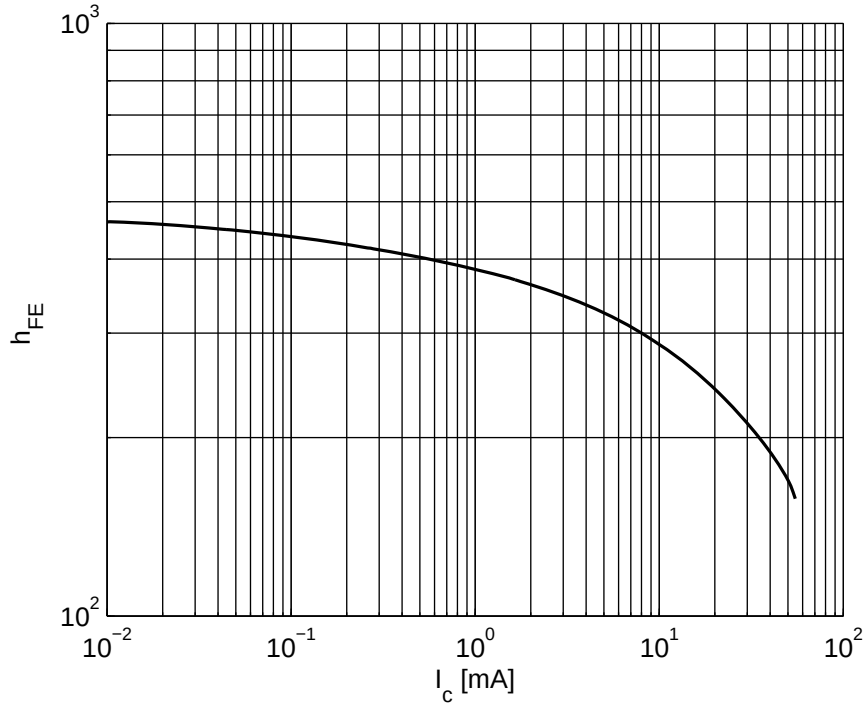


Figure 6-2 DC Current Gain $h_{FE} = f(I_C)$, V_{CE} = 1.8 V

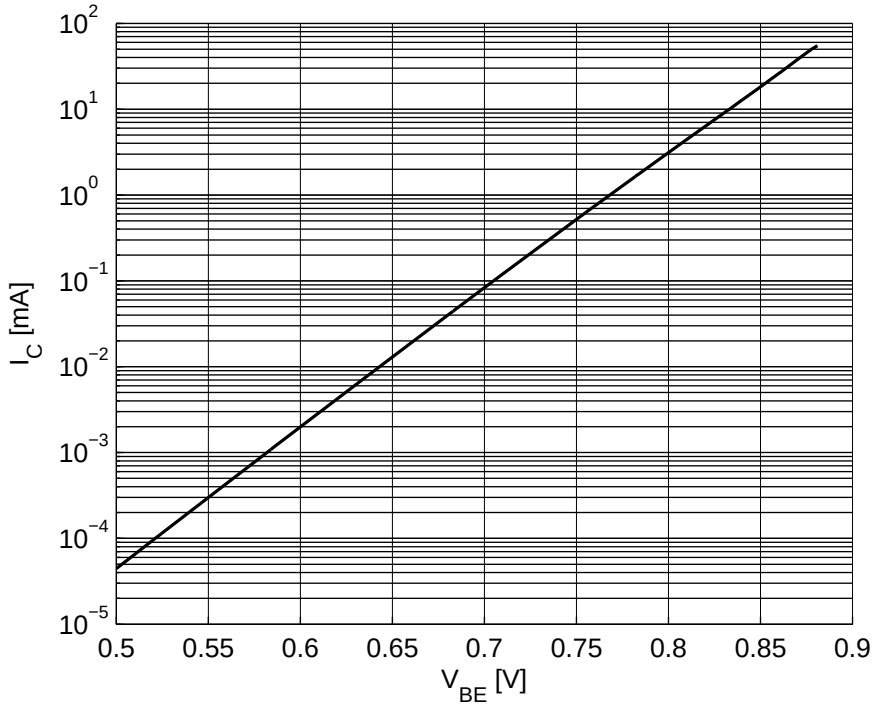


Figure 6-3 Collector Current vs. Base Emitter Forward Voltage $I_C = f(V_{BE})$, V_{CE} = 1.8 V

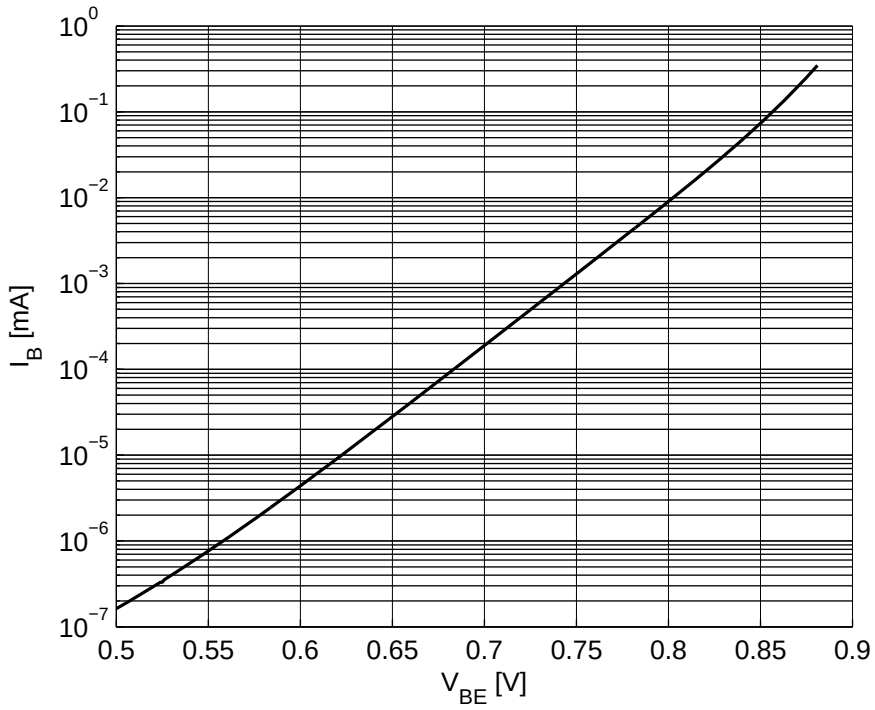


Figure 6-4 Base Current vs. Base Emitter Forward Voltage $I_B = f(V_{BE})$, V_{CE} = 1.8 V

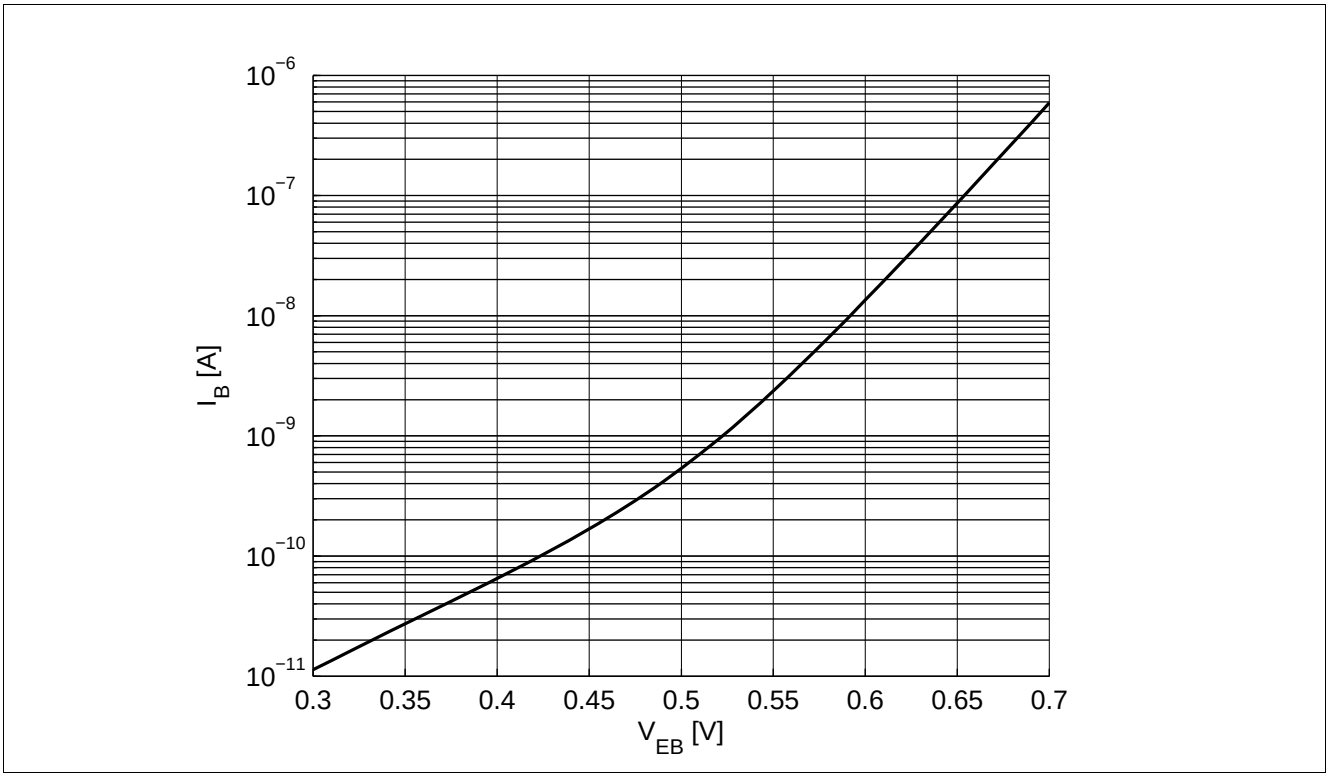


Figure 6-5 Base Current vs. Base Emitter Reverse Voltage $I_B = f(V_{EB})$, V_{CE} = 1.8 V

7 Characteristic AC Diagrams

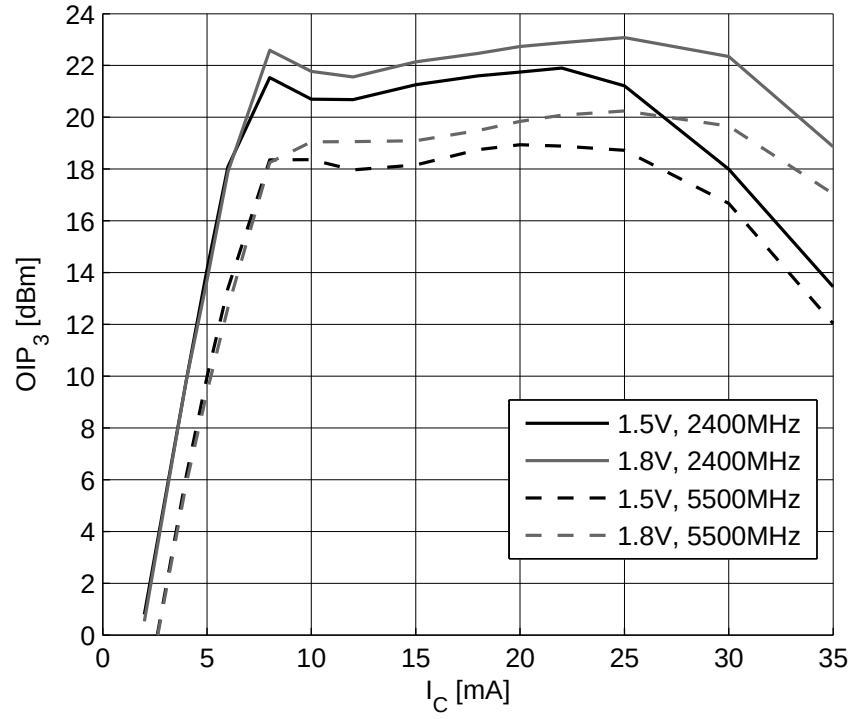


Figure 7-1 3rd Order Intercept Point at Output $OIP3 = f(I_C)$, $Z_S = Z_L = 50\ \Omega$, V_{CE}, f = Parameters

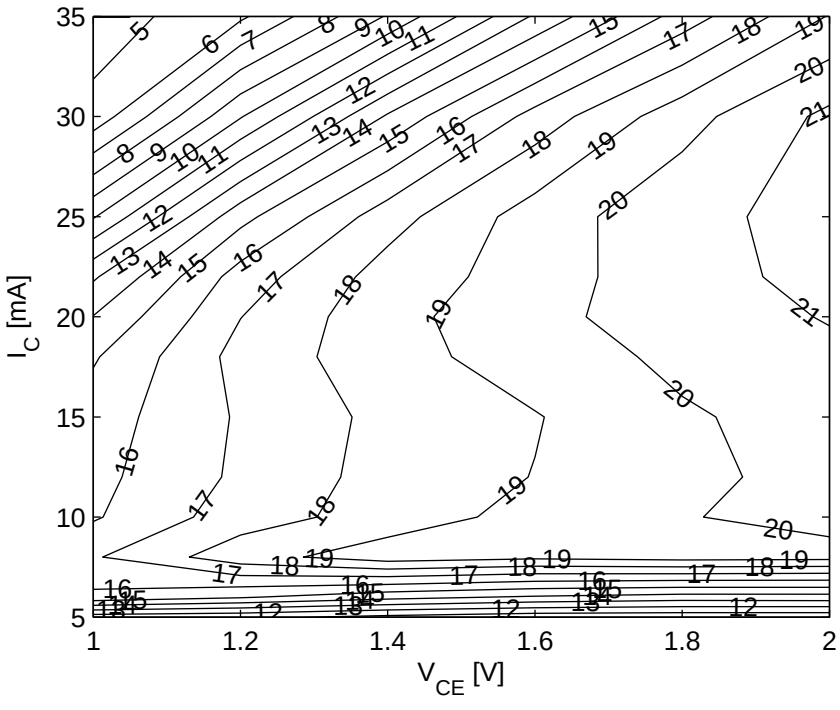


Figure 7-2 3rd Order Intercept Point at Output $OIP3$ [dBm] $= f(I_C, V_{CE})$, $Z_S = Z_L = 50\ \Omega$, $f = 5.5$ GHz

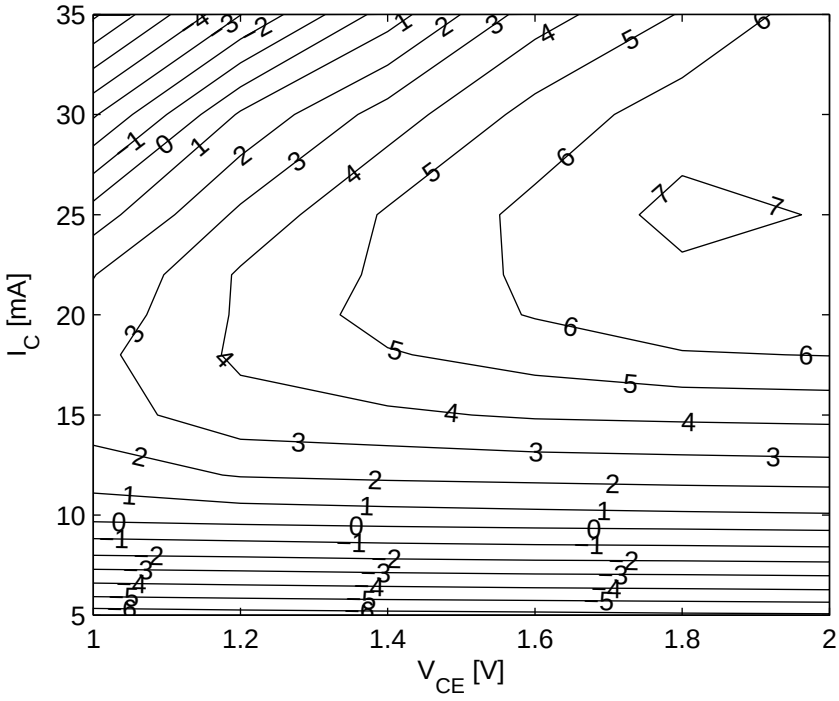


Figure 7-3 Compression Point at Output OP_{1dB} [dBm] = f (I_C, V_{CE}), Z_S = Z_L = 50 Ω, f = 5.5 GHz

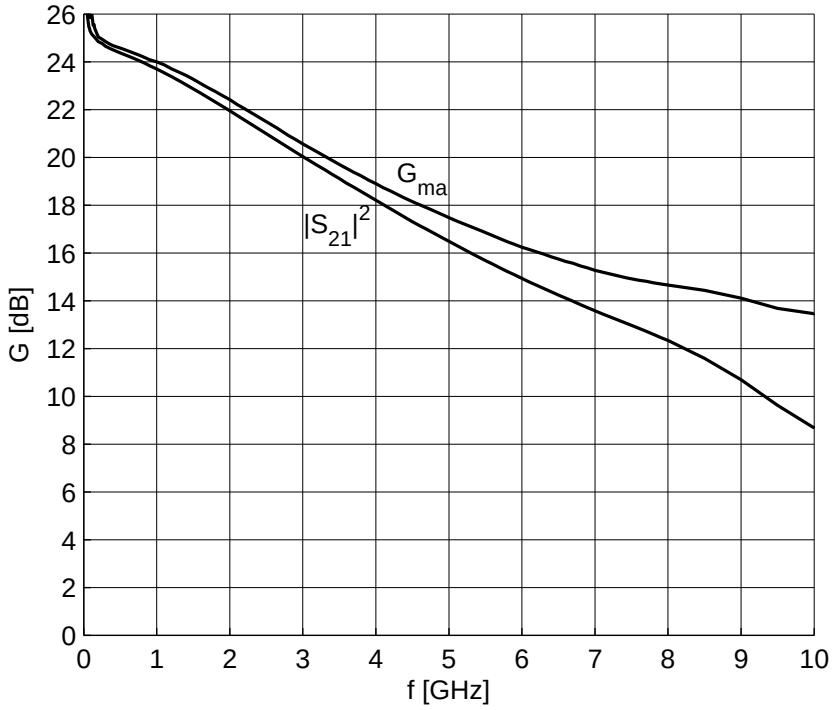


Figure 7-4 Gain G_{ma}, G_{ms}, $|S_{21}|^2$ = f (f), V_{CE} = 1.8 V, I_C = 15 mA

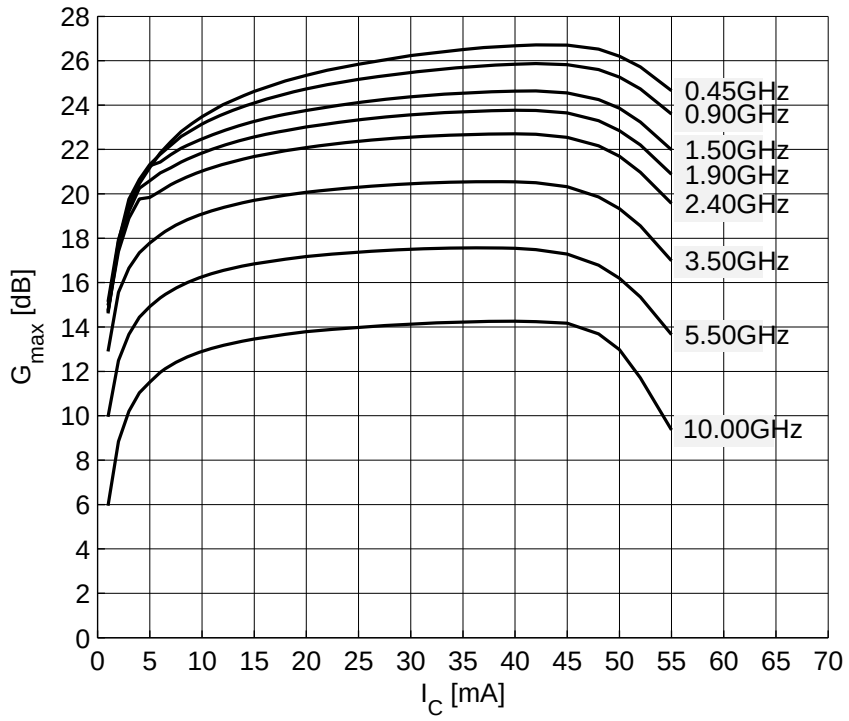


Figure 7-5 Maximum Power Gain $G_{max} = f(I_C)$, V_{CE} = 1.8 V, f = Parameter in GHz

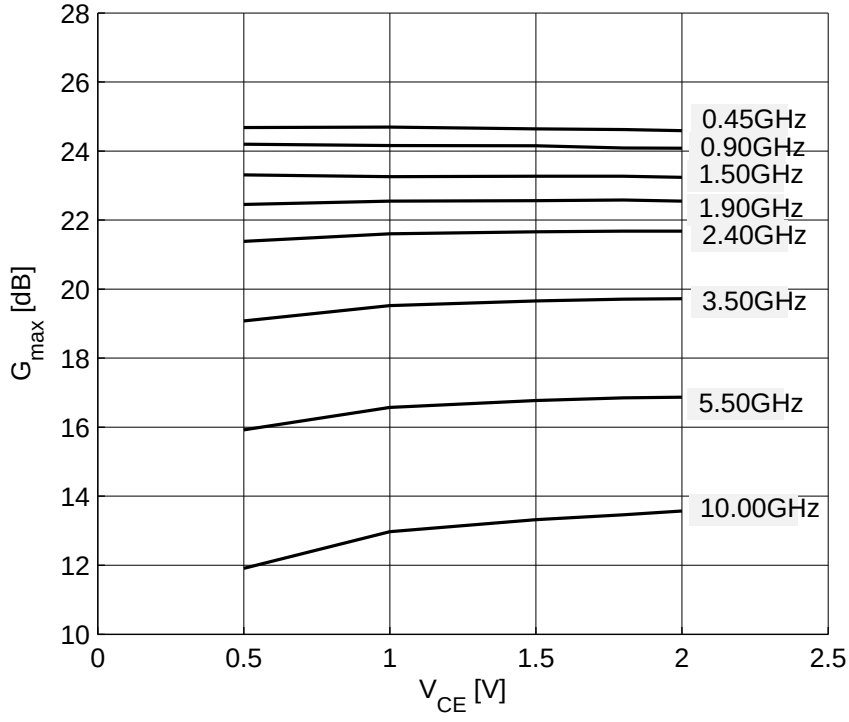


Figure 7-6 Maximum Power Gain $G_{max} = f(V_{CE})$, I_C = 15 mA, f = Parameter in GHz

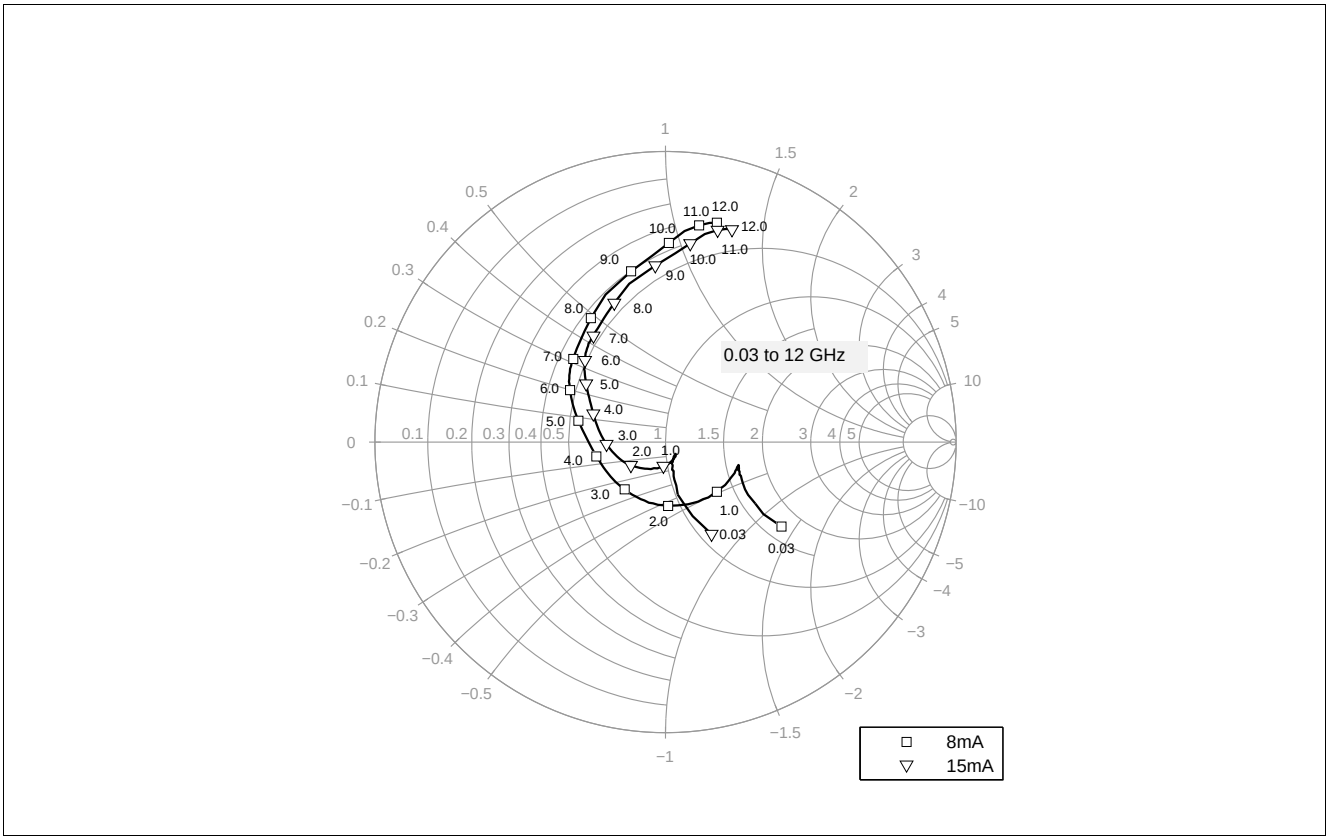


Figure 7-7 Input Reflection Coefficient $S_{11} = f(f)$, V_{CE} = 1.8 V, I_C = 8 / 15 mA

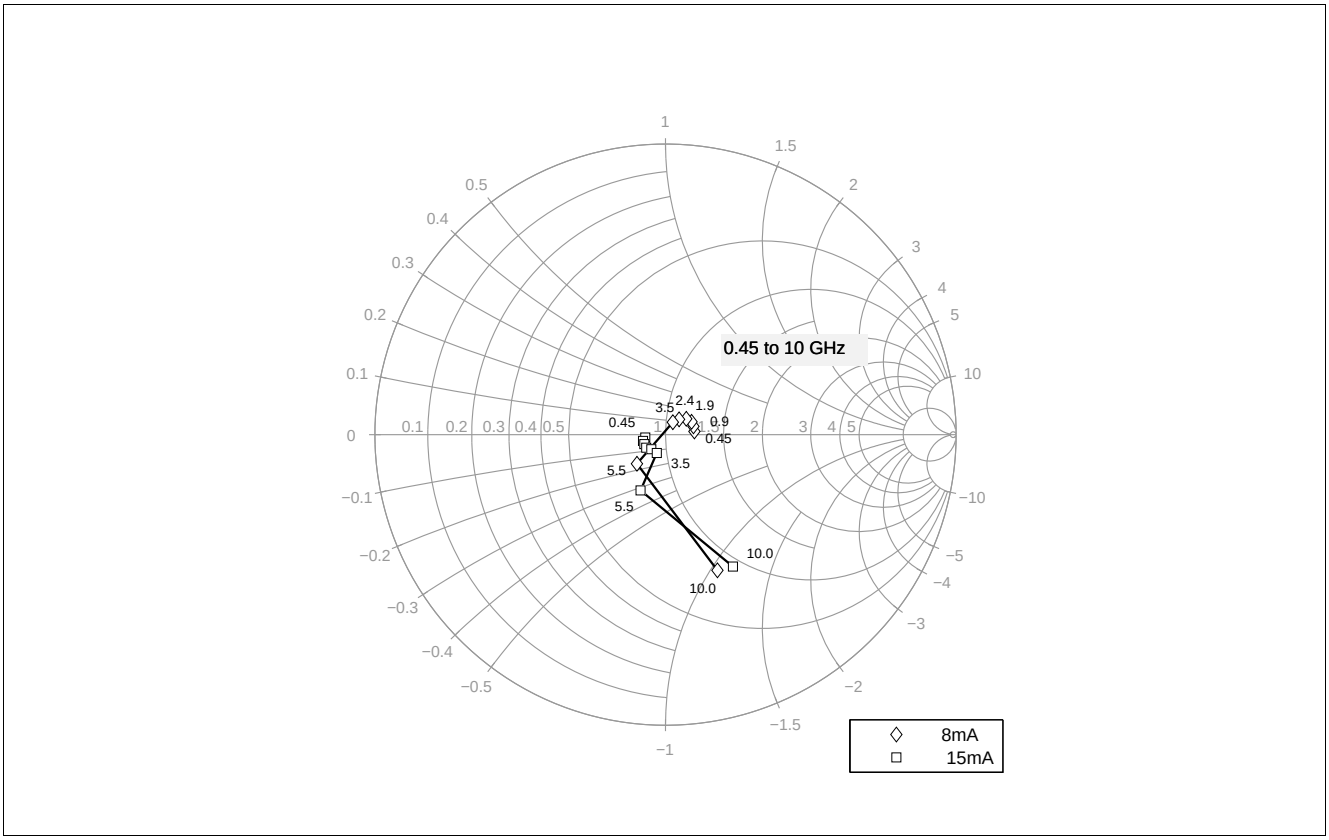


Figure 7-8 Source Impedance for Minimum Noise Figure $Z_{opt} = f(f)$, V_{CE} = 1.8 V, I_C = 8 / 15 mA

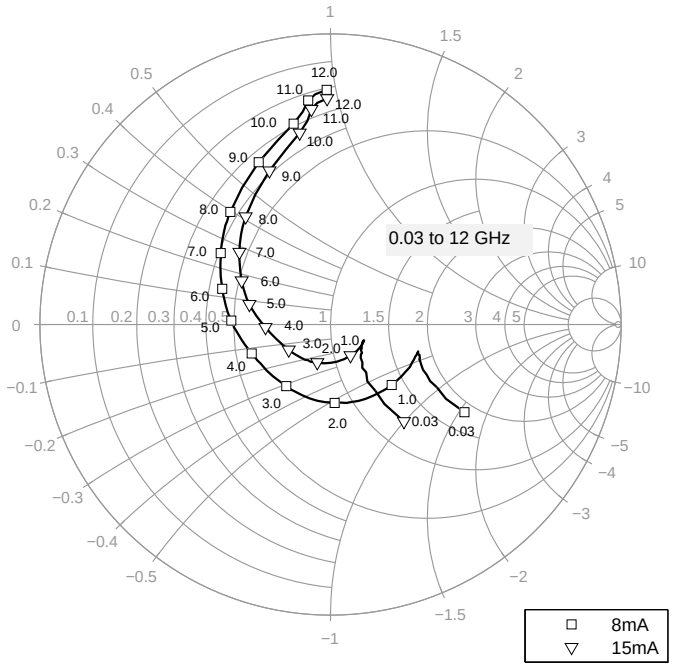


Figure 7-9 Output Reflection Coefficient $S_{22} = f(f)$, V_{CE} = 1.8 V, I_C = 8 / 15 mA

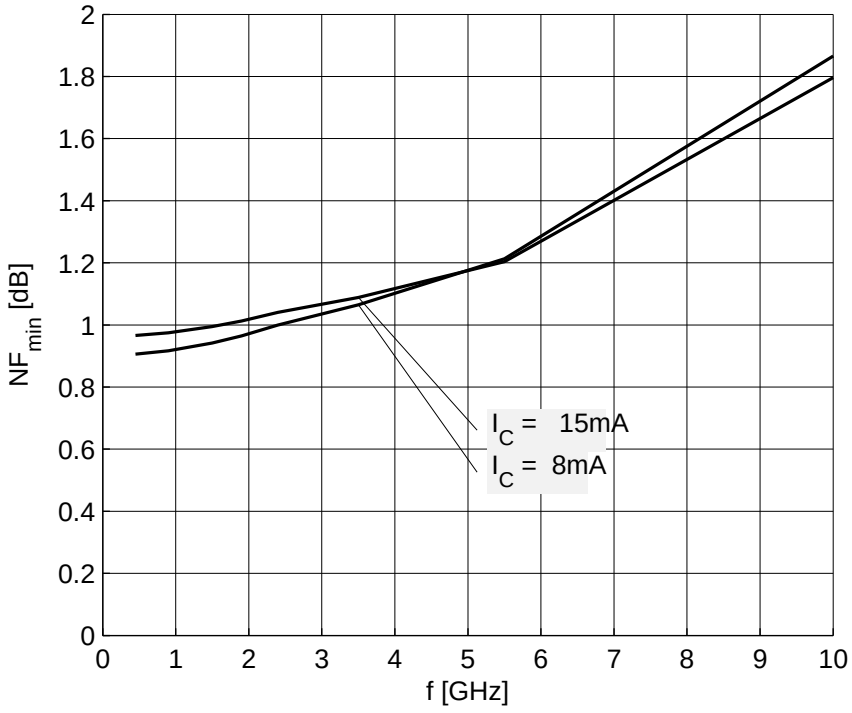


Figure 7-10 Noise Figure $NF_{min} = f(f)$, V_{CE} = 1.8 V, I_C = 8 / 15 mA, $Z_S = Z_{opt}$

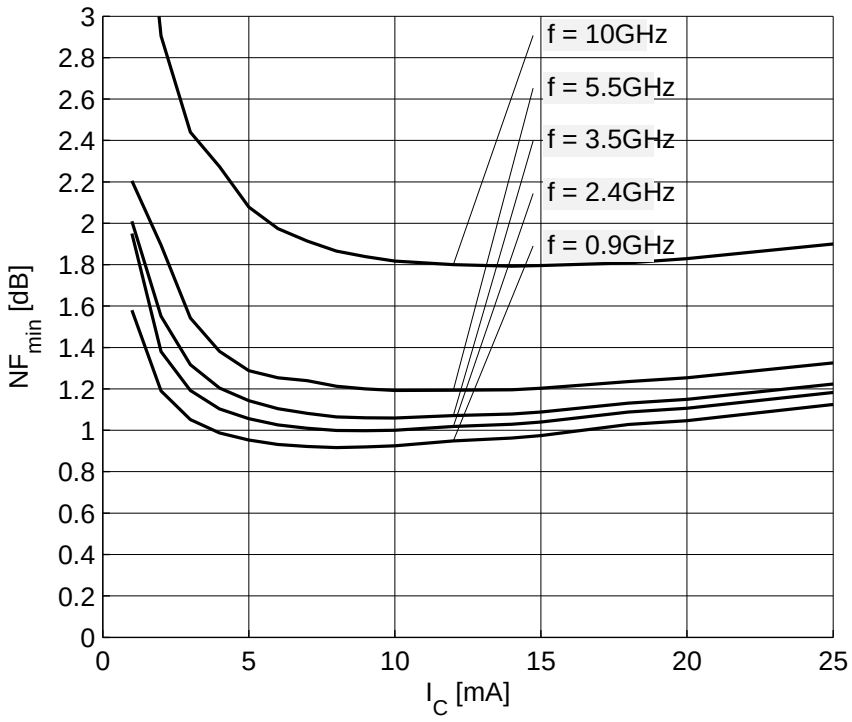


Figure 7-11 Noise Figure $NF_{min} = f(I_C)$, V_{CE} = 1.8 V, $Z_S = Z_{opt}$, f = Parameter in GHz

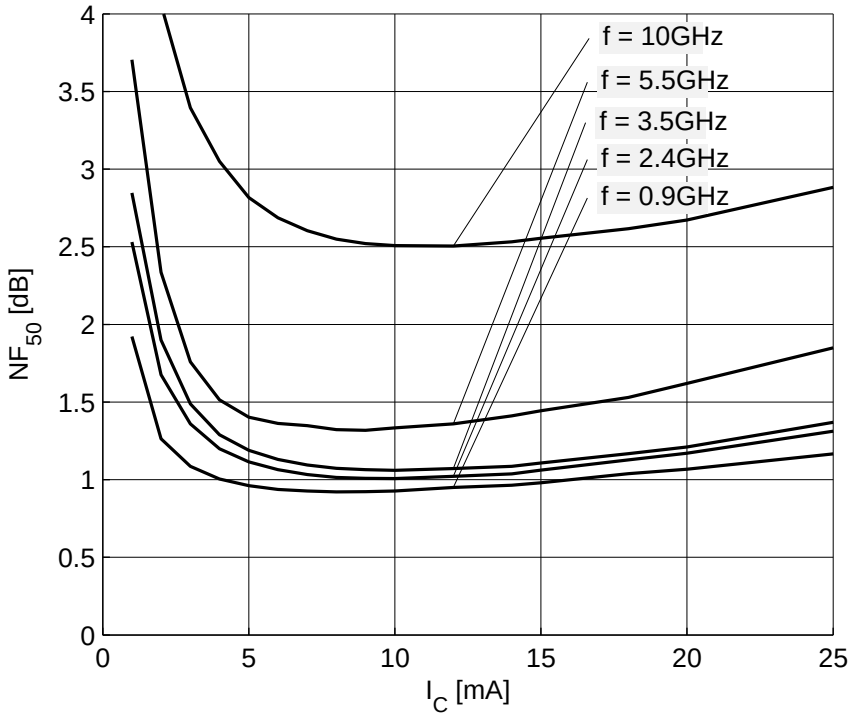


Figure 7-12 Noise Figure $NF_{50} = f(I_C)$, V_{CE} = 1.8 V, Z_S = 50 Ω, f = Parameter in GHz

Note: The curves shown in this chapter have been generated using typical devices but shall not be considered as a guarantee that all devices have identical characteristic curves. T_A = 25 °C.

8 Simulation Data

For the SPICE Gummel Poon (GP) model as well as for the S-parameters (including noise parameters) please refer to our internet website. Please consult our website and download the latest versions before actually starting your design.
You find the BFP843 SPICE GP model in the internet in MWO- and ADS-format, which you can import into these circuit simulation tools very quickly and conveniently. The model already contains the package parasitics and is ready to use for DC and high frequency simulations. The terminals of the model circuit correspond to the pin configuration of the device.
The model parameters have been extracted and verified up to 12 GHz using typical devices. The BFP843 SPICE GP model reflects the typical DC- and RF-performance within the limitations which are given by the SPICE GP model itself. Besides the DC characteristics all S-parameters in magnitude and phase, as well as noise figure (including optimum source impedance, equivalent noise resistance and flicker noise) and intermodulation have been extracted.

9 Package Information SOT343

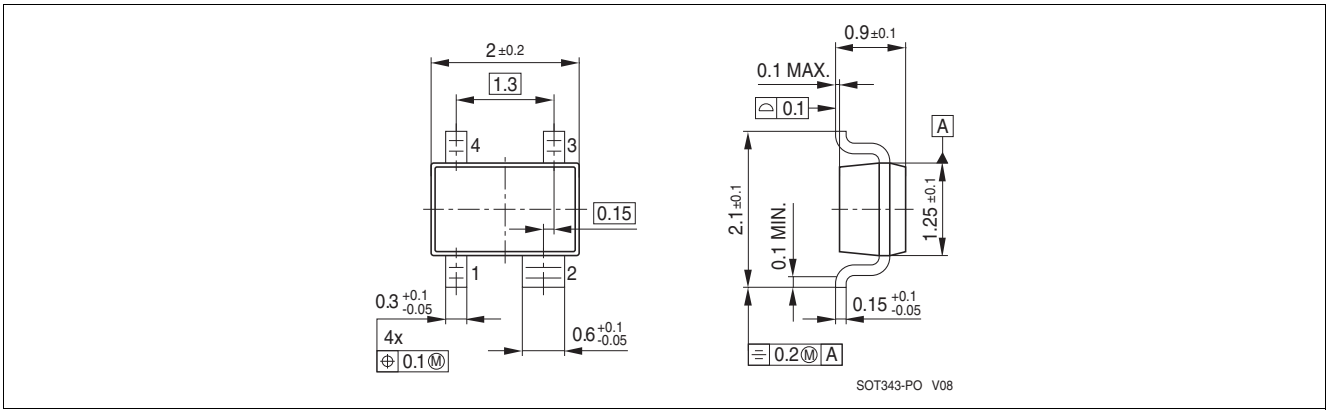


Figure 9-1 Package Outline

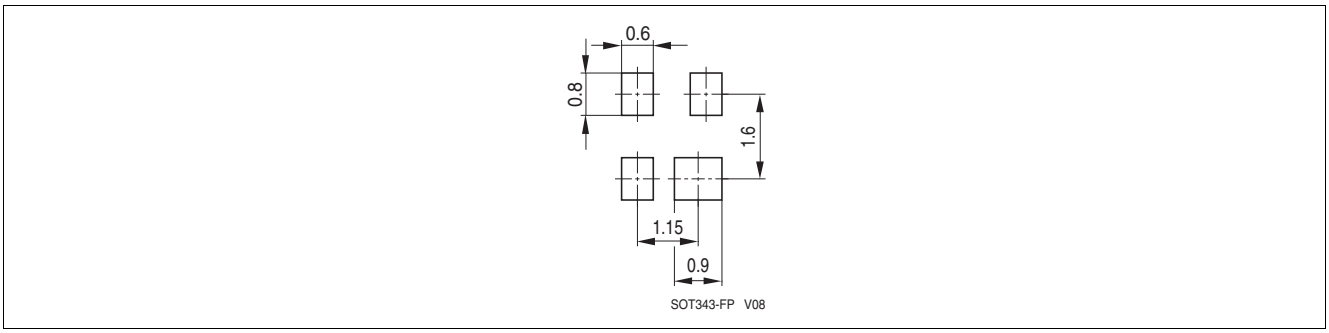


Figure 9-2 Package Footprint

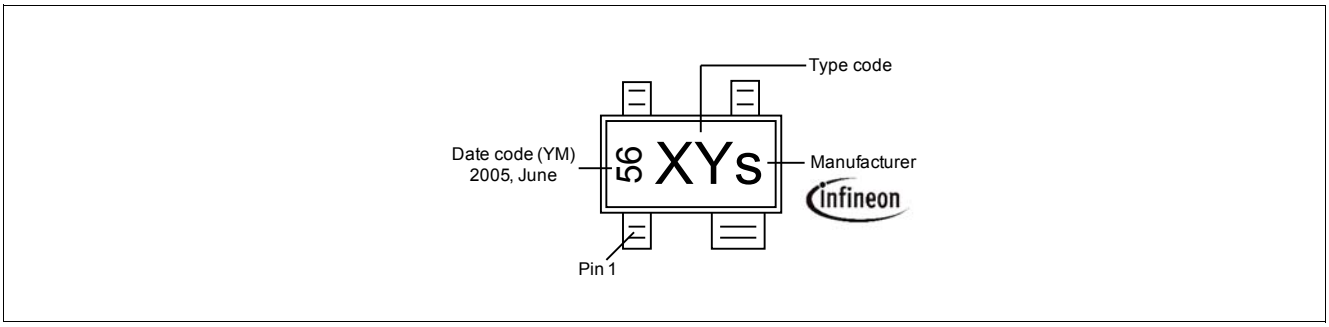


Figure 9-3 Marking Description (Marking BFP843: T2s)

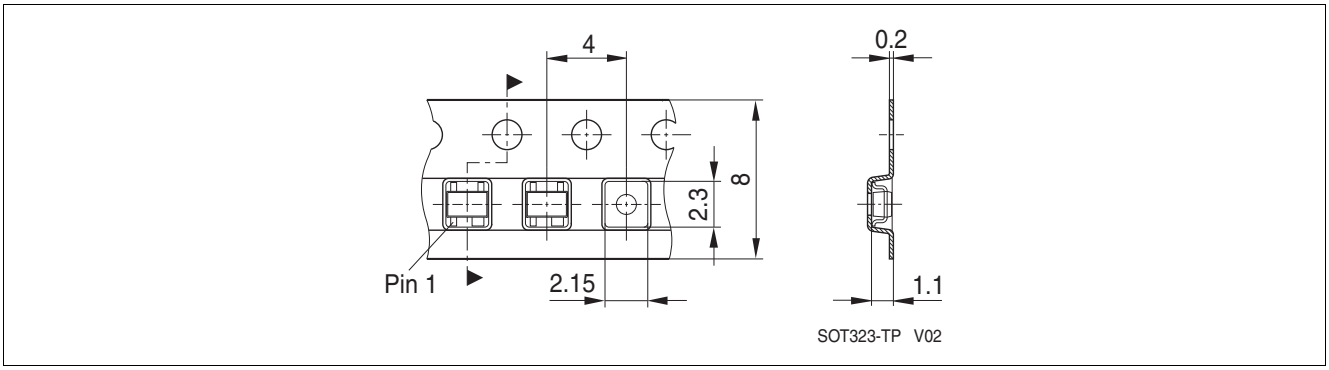


Figure 9-4 Tape Dimensions

w w w . i n f i n e o n . c o m

Published by Infineon Technologies AG