


0815 SERIES

Operating Voltage = 250/480 Vac 3 PH Delta
Operating Current Max= 12 & 18 amps
Operating Frequency = 50 - 60Hz
Operating Temperature = -20 to +50oC
Diel Withstand (L to Case)= 2500V ~for 1 Min.
Diel Withstand (L to L)= 2500V dc for 1 Min.
Leakage current @ 250V ~60Hz= 0.35 mA at 250Vac, 50Hz
Max Residual Voltage after 5 secs = 6 Volts Max
Agency Approvals = 12Amps UL,C SA,TUV.18 Amp Pending

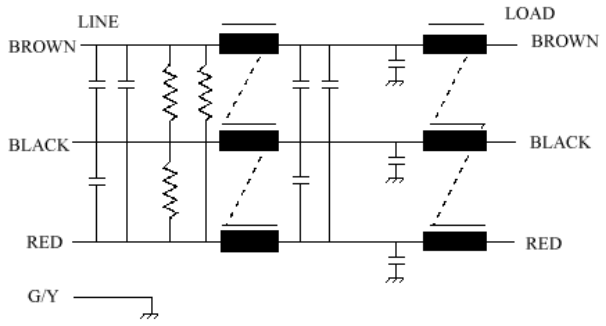

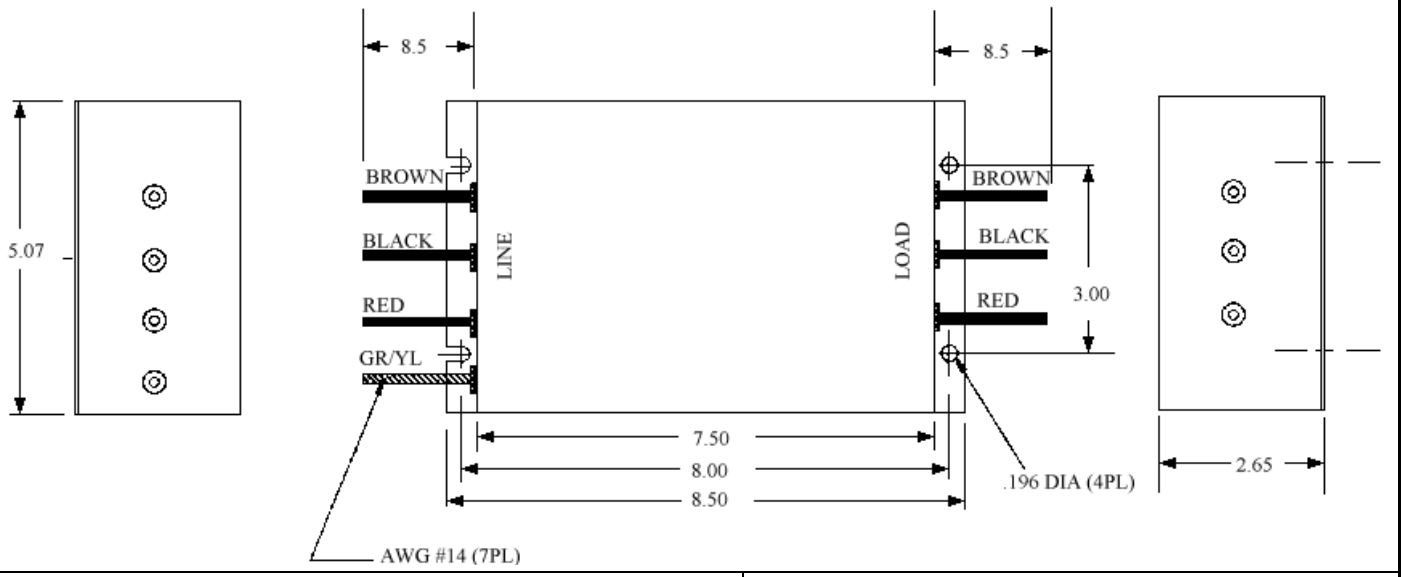

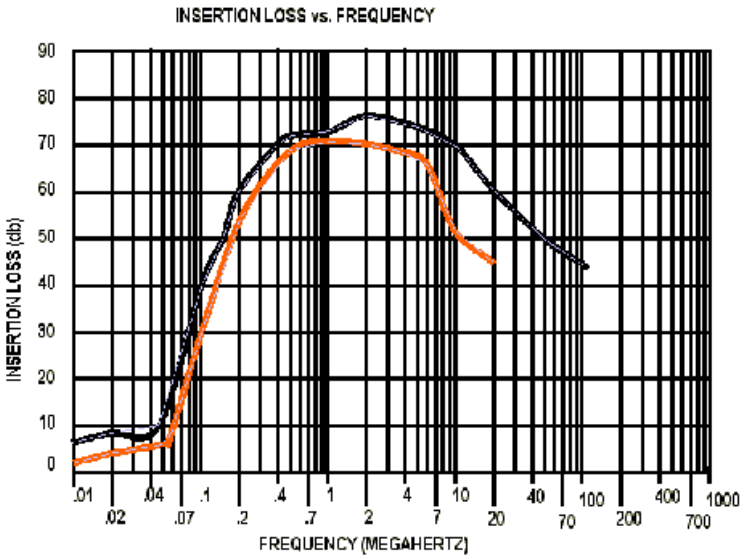

The 815 series is a 3 phase delta filter. This series is designed to be used with switching power supplies which are required to meet the emission specifications of VDE level "B".

USA JMK Inc 15 Caldwell Dr. Amherst, NH 03031 PH: 603 886-4100 FX: 603 886-4115
email: info@jmkfilters.com
EUR JMK Inc Glasgow G13 1DN Scotland UK PH: 44-(0) 7785310729 Fax: 44-(0) 141 589 1884