

INTEGRATED CONNECTOR MODULES 0874-1X8T-66 Gigabit Power over Ethernet MagJack® 1 x 8



ELECTRICAL CHARACTERISTICS @ 25°C

URNS RATIO

TP1	1CT : 1CT ±2%
TP2	1CT : 1CT ±2%
TP3	1CT : 1CT ±2%
TP4	1CT : 1CT ±2%

CL @ 100kHz/100mVRMS

8mA DC BIAS	350µH MIN.
-------------	------------

INS. LOSS

0.1MHz TO 1MHz	-1.1 dB MAX
1MHz TO 65MHz	-0.5 dB MAX
65MHz TO 100MHz	-0.8 dB MAX
100MHz TO 125MHz	-1.2 dB MAX

RET. LOSS (MIN)

0.5MHz-40MHz	-18 dB
40MHz-100MHz	-12+20LOG(f/80MHz) dB

CM TO CM REJ

100kHz - 100MHz	-30 dB MIN
-----------------	------------

CM TO DM REJ


100kHz - 100MHz	-35 dB MIN
-----------------	------------

HIPOT (Isolation Voltage):


100% OF PRODUCT TESTED IN PRODUCTION	2250 VDC
--------------------------------------	----------

BALANCED DC LINE CURRENT

350 mA MAX. @ 57 VDC CONTINUOUS
500 mA MAX. @ 57 VDC FOR 200 MILLISECONDS

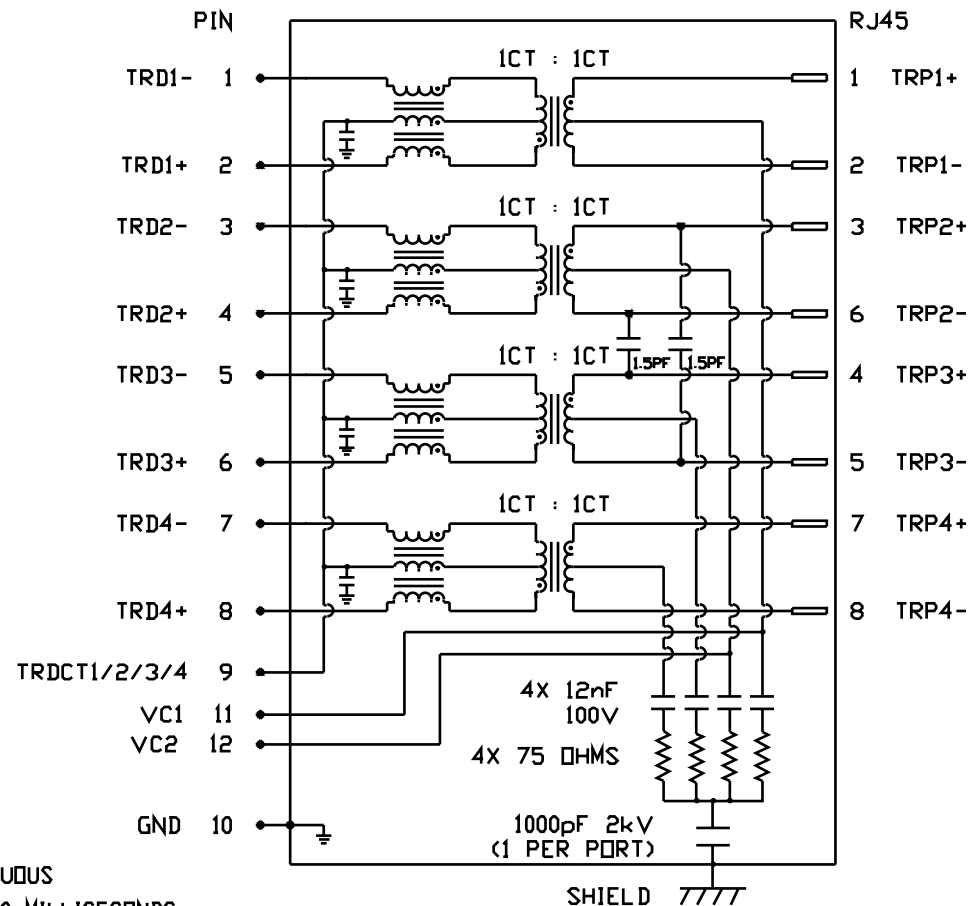

INTEGRATED CONNECTOR MODULES 0874-1X8T-66 Gigabit Power over Ethernet MagJack® 1 x 8

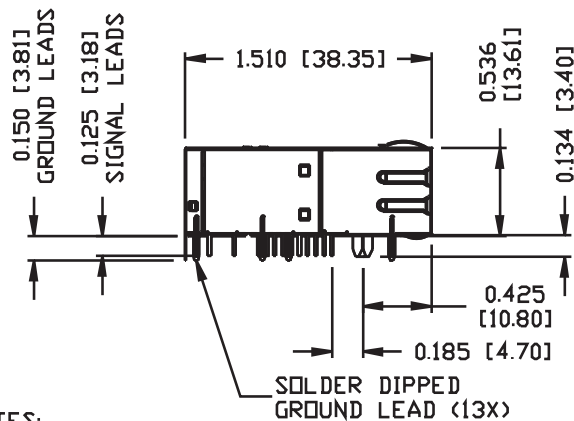


NOTES:

PLASTIC HOUSING: THERMOPLASTIC PBT
FLAMMABILITY RATING UL 94V-0
CONTACT PLATING: 50 MICRO-INCH HARD GOLD PLATING
OUTPUT PINS: TIN-COATED COPPER WIRE, DIA 0.018 INCH.
SOLDERABILITY: PER MIL STD. 202, METHOD 208.
METAL SHIELD: NICKEL PLATED COPPER ALLOY.
(ALL GROUND LEADS ARE SOLDER DIPPED)


- 1 JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS, PART 68 SUBPART F.
- 2 MARK PART WITH MFG LOGO, PART NUMBER, DATE CODE AND MFG NAME.

UL US UL RECOGNIZED - FILE #E196366 AND E169987.


- 3 RoHS COMPLIANCE, PER EU DIRECTIVE 2002/95/EC.

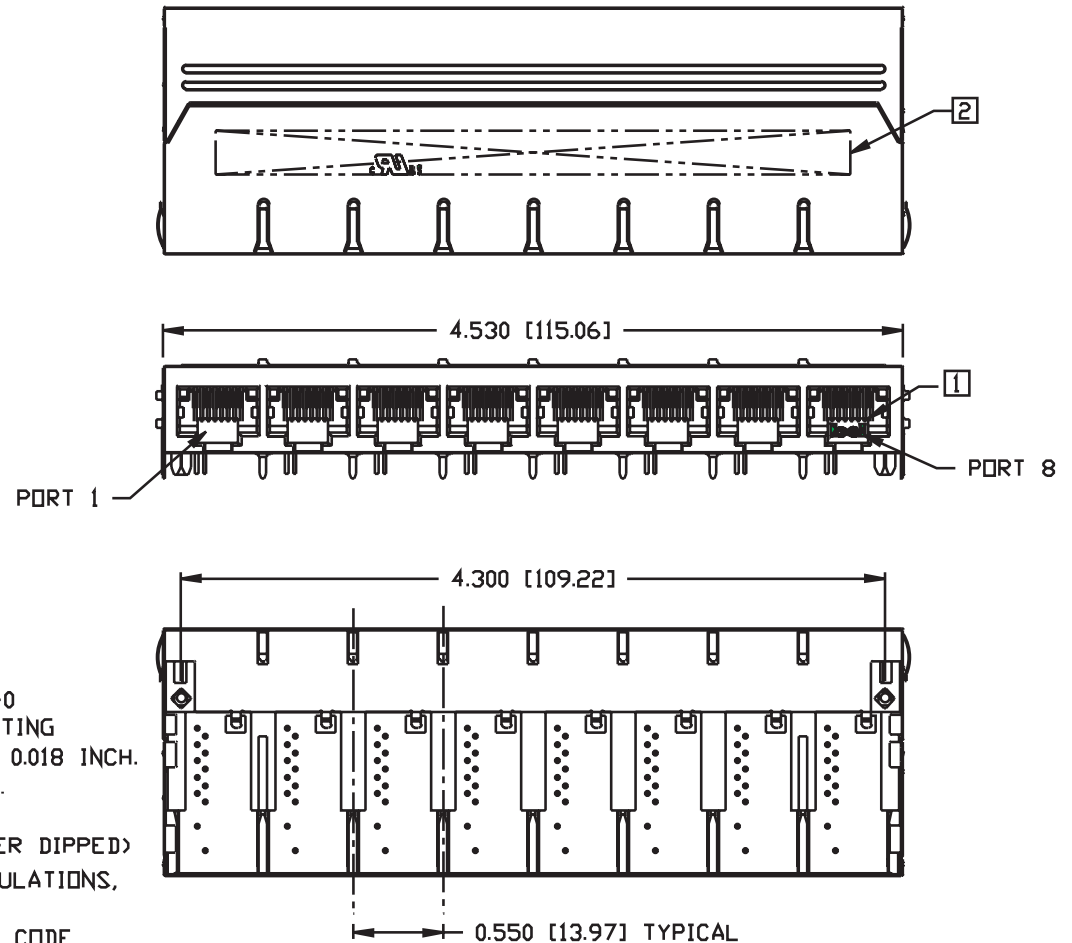

INTEGRATED CONNECTOR MODULES 0874-1X8T-66 Gigabit Power over Ethernet MagJack® 1 x 8

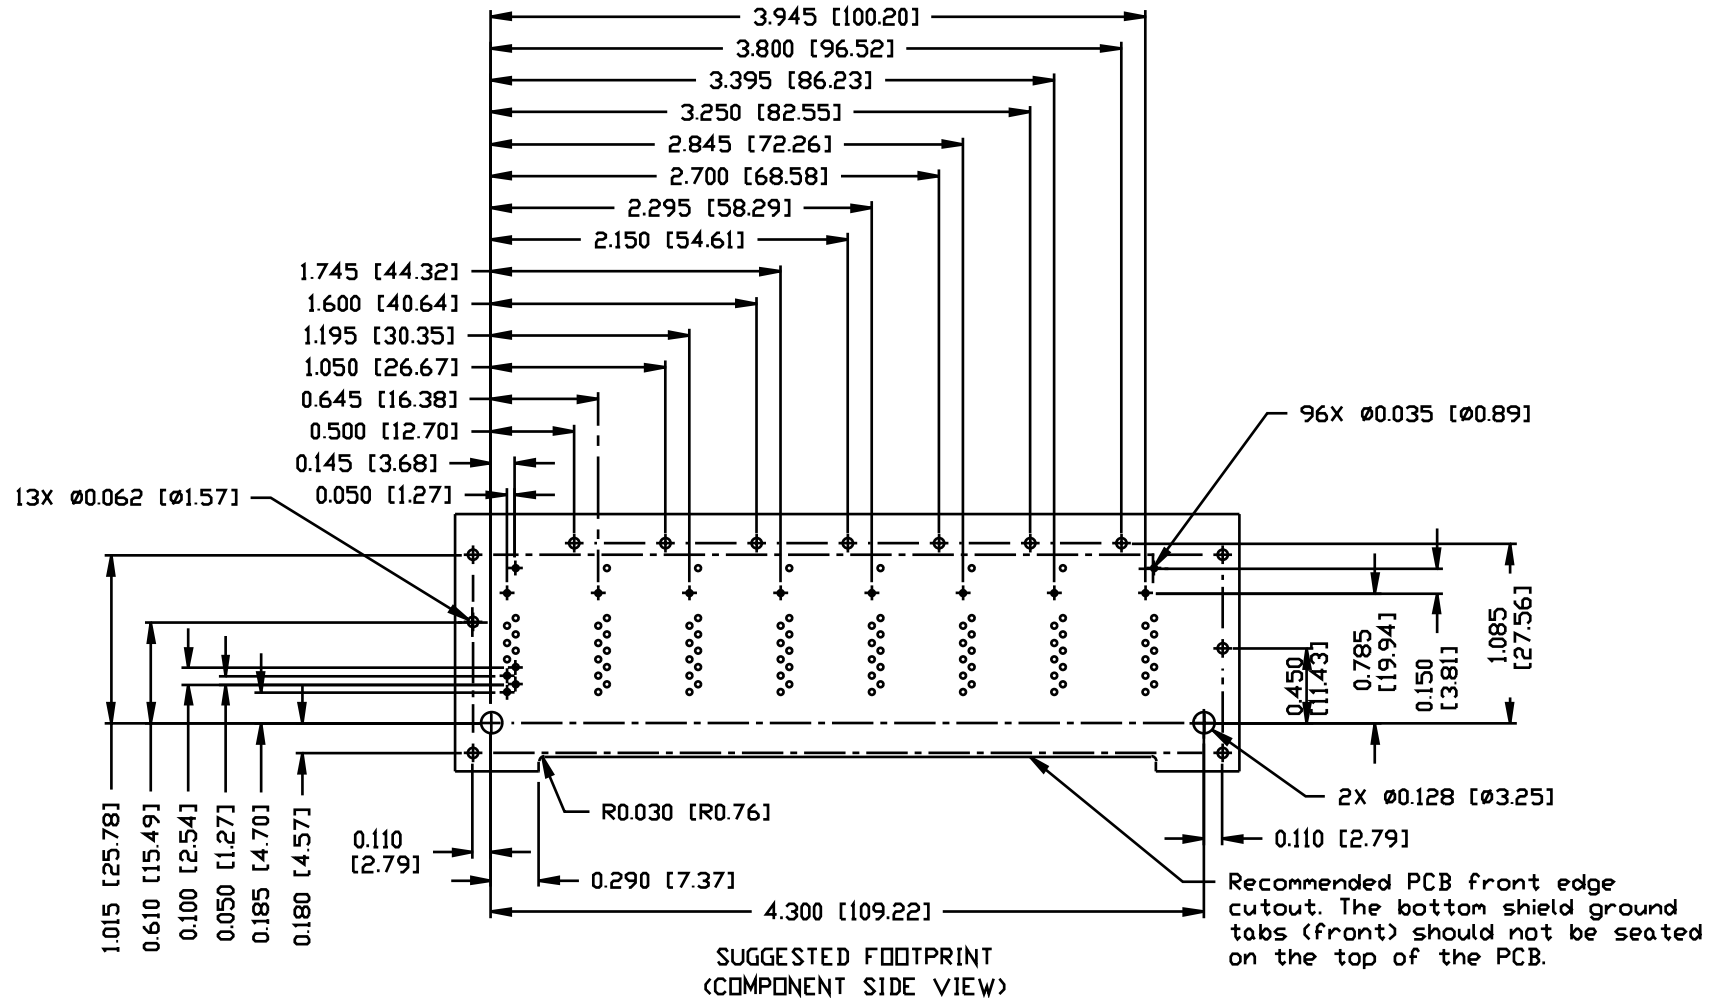


INTEGRATED CONNECTOR MODULES 0874-1X8T-66 Gigabit Power over Ethernet MagJack® 1 x 8

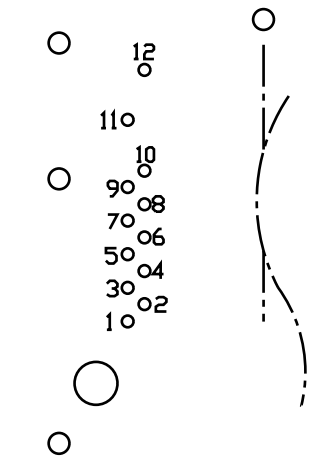

PIN-OUT INFORMATION
(COMPONENT SIDE VIEW)

12	VC2
11	VC1
10	GND
9	TRCT1/2/3/4
8	TRD 4+
7	TRD 4-
6	TRD 3+
5	TRD 3-
4	TRD 2+
3	TRD 2-
2	TRD 1+
1	TRD 1-

PORT ASSIGNMENT
(COMPONENT SIDE VIEW)

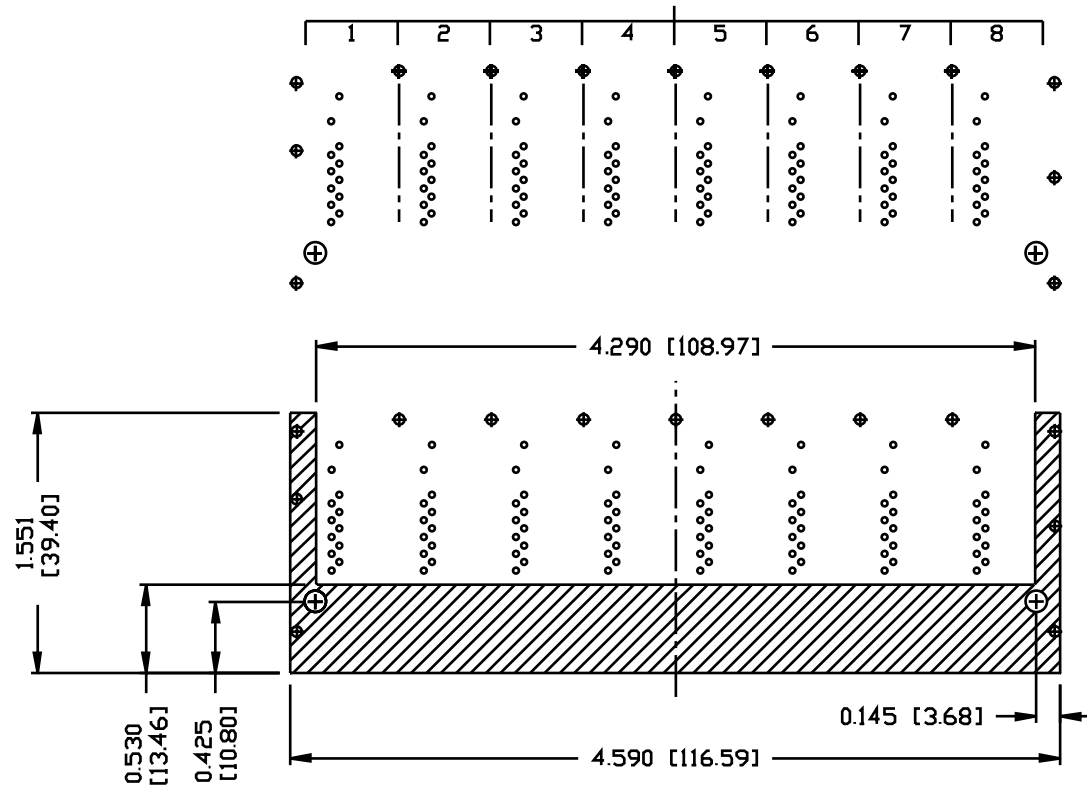


THE SHADED AREA ON THE CUSTOMER BOARD ARE
RECOMMENDED TO BE CLEAR OFF ANY VIA HOLE OR
COMPONENT PAD.

INTEGRATED CONNECTOR MODULES **0874-1X8T-66 Gigabit Power over Ethernet MagJack® 1 x 8**



SUGGESTED PANEL OPENING

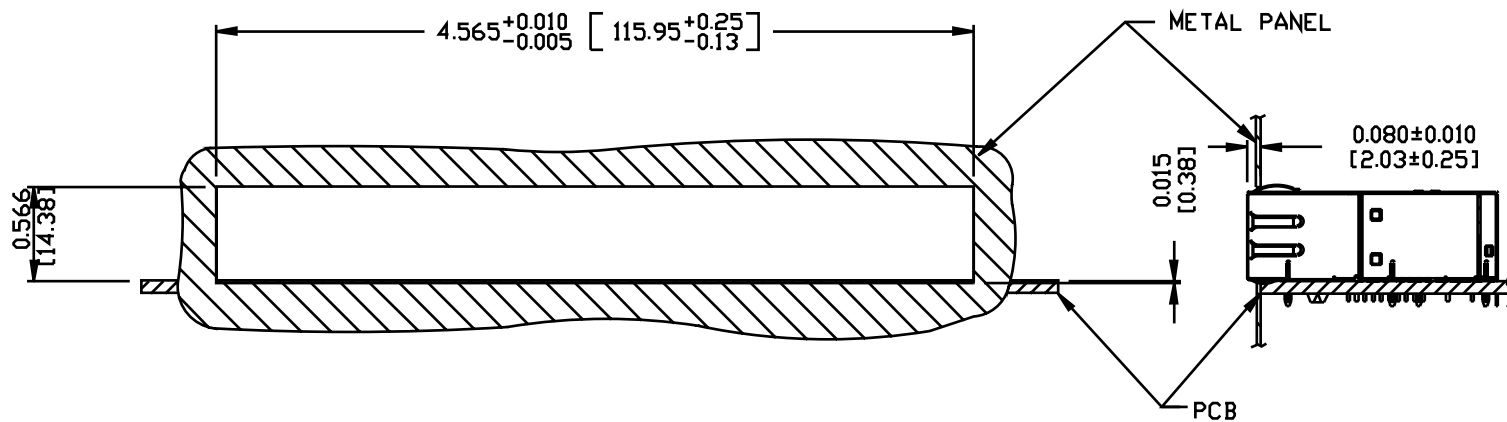

NOTE:
 THE DISTANCE OF PANEL INSIDE SURFACE RELATIVE TO FRONT SURFACE OF PART IS ONLY A SUGGESTION.
 IN CASE THIS DISTANCE IS DIFFERENT, THE REQUIRED PANEL OPENING DIMENSIONS CHANGE ACCORDINGLY.

PACKING INFORMATION

PACKING TRAY : 0200-9999-F8 (TOP)

0200-9999-F9 (BOTTOM)

PACKING QUANTITY : 12 PCS FINISHED GOODS PER TRAY.

5 TRAYS (60 PCS FINISHED GOODS) PER CARTON BOX.

NOTE : CARDBOARDS ARE PLACED BETWEEN LAYERS OF PACKING TRAY INSIDE CARTON BOX.

(INCLUDE THE UPPERMOST AND LOWERMOST TRAY)