

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0876972002

Status:


Active

Overview:

extreme_powerplus_ssi

Description:

6.35mm (.250") Pitch, Power, 2.54mm (.100") Pitch, Signal, EXTreme PowerPlus™ Pa-S Receptacle, Press-fit, Vertical, 0.76µm (30µ") Gold (Au) Plating, 28 Circuits, Leadfree

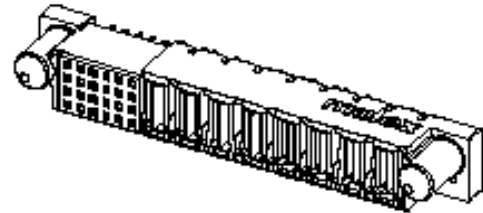

Series

image - Reference only

Documents:

- [3D Model](#)
- [Drawing \(PDF\)](#)
- [Product Specification PS-87633-006 \(PDF\)](#)
- [RoHS Certificate of Compliance \(PDF\)](#)

General

Product Family	PCB Receptacles
Series	87697
Application	Board-to-Board
Comments	Recessed Power Circuit Position: NIL
Overview	extreme_powerplus_ssi
Product Literature Order No	987650-3002
Product Name	EXTreme PowerPlus™

Physical

Circuits (Loaded)	28
Circuits Detail	Power Alpha 4, Signal 24
Color - Resin	Black
Durability (mating cycles max)	100
Glow-Wire Compliant	No
Guide to Mating Part	Yes
Keying to Mating Part	Yes
Material - Metal	Copper Alloy
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Number of Rows	4
Orientation	Vertical
PC Tail Length (in)	0.135 In
PC Tail Length (mm)	3.43 mm
PCB Locator	No
PCB Retention	Yes
PCB Thickness Recommended (in)	0.093 In
PCB Thickness Recommended (mm)	2.40 mm
Packaging Type	Tray
Pitch - Mating Interface (in)	0.100 In, 0.250 In
Pitch - Mating Interface (mm)	2.54 mm, 6.35 mm
Plating min: Mating (µin)	30
Plating min: Mating (µm)	0.76
Plating min: Termination (µin)	100
Plating min: Termination (µm)	2.54
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Temperature Range - Operating	-20°C to +105°C
Termination Interface: Style	Through Hole - Compliant Pin

Electrical

Current - Maximum per Contact	2.5A, 30A
Voltage - Maximum	50V DC

Solder Process Data

EU RoHS

ELV and RoHS Compliant

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Not Reviewed

China RoHS

Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

87697Series

Mates With

87696 EXTreme PowerPlus™ Pa-S Header

Lead-free Process Capability

Wave Capable (TH only)

Material Info

Reference - Drawing Numbers

Application Specification

AS-87631-018, AS-87633-007

Product Specification





PS-87633-006

Sales Drawing

SD-87697-011

This document was generated on 05/22/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

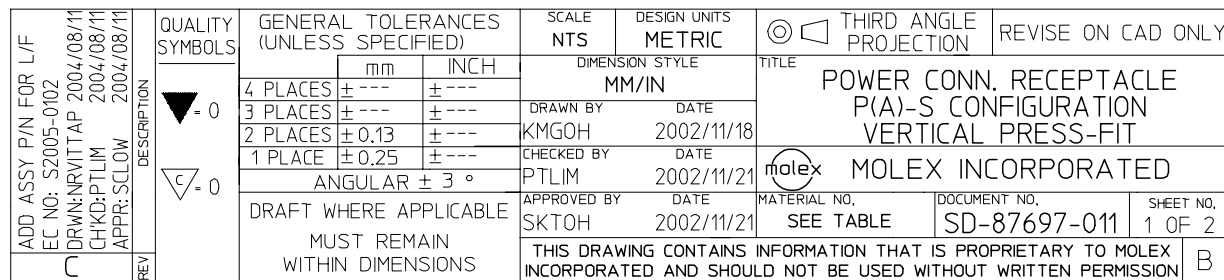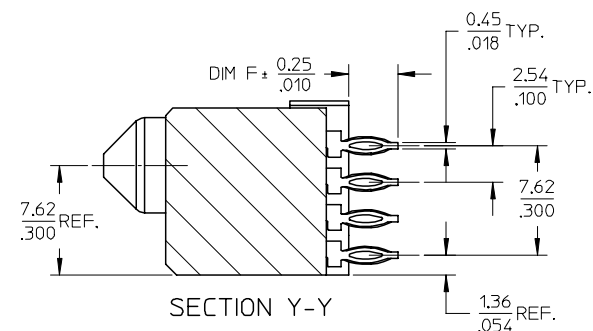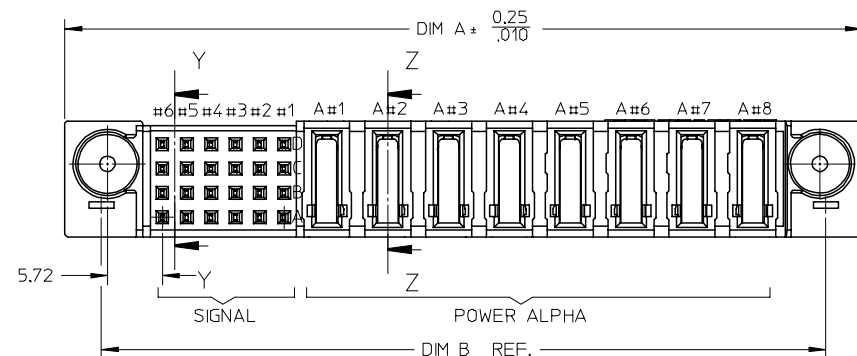

	10		9		8		7			6			5		4		3		2		87697		
F	PART NUMBER	P-S CONFIGURATION		RECESS POWER CIRCUIT #	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F ±0.25	DIM G	DIM H	PACKAGING	PLATING OPTION									F
		POWER ALPHA	SIGNAL																				
	87697-8001	8	24	A#5,A#6,A#7,A#8	83.18 3.275	75.57 2.975	74.29 2.925	46.99 1.850	12.70 .500	3.43 .135	1.07 .042	2.34 .092	TRAY	TIN/LEAD									
	87697-8002	4	24	NIL	57.78 2.275	50.17 1.975	48.89 1.925	21.59 .850	12.70 .500	3.43 .135	1.07 .042	2.34 .092	TRAY										
	87697-2001	8	24	A#5,A#6,A#7,A#8	83.18 3.275	75.57 2.975	74.29 2.925	46.99 1.850	12.70 .500	3.43 .135	1.07 .042	2.34 .092	TRAY	TIN									
	87697-2002	4	24	NIL	57.78 2.275	50.17 1.975	48.89 1.925	21.59 .850	12.70 .500	3.43 .135	1.07 .042	2.34 .092	TRAY										

E

D

C


B

A

tb_frame_B
rev. B1 2000/08/01

CONNECTOR - NOTES

- MATERIALS :
 - HOUSING - HIGH TEMPERATURE THERMO-PLASTIC, GLASS FILLED, UL94-0,COLOR:BLACK.
 - SIGNAL PIN - COPPER ALLOY
 - POWER PIN - COPPER ALLOY
- FINISH :
 - SIGNAL & POWER CONTACTS
 - 0.76 MICROMETER MINIMUM GOLD (Au) AT CONTACT AREA AND 2.54 MICROMETER MINIMUM TIN/LEAD OR TIN AT SOLDER TAIL AREA OVER 1.27um MIN. NICKEL (Ni) UNDERPLATE.
- PRODUCT SPECIFICATION: PS-87633-006.
- COMPONENT STAY AWAY ZONE FROM CONNECTOR.
- PCB NOTE FOR DIAMETER 1.02/.040 PLATED HOLE.
 - DRILLED HOLE SIZE IS 1.151/.0453
 - PLATE WITH 0.007/.0003 MINIMUM TIN/LEAD OR TIN OVER 0.03/.001 TO 0.08/.003 COPPER PLATING TO ACHIEVE 1.02±0.08/.040±.003 HOLE. SEE SHEET 2 FOR RECOMMENDED PCB LAYOUT.
- MANUFACTURER LOGO,PART NUMBER AND YEAR-WEEK CODE.
- 8 POWER ALHPA-24 SIGNAL CONFIGURATION IS SHOWN FOR ILLUSTRATION.
- IMAGINARY LINE & DIMENSION TO POSITION AND PROVIDE CONNECTOR ORIENTATION WITH RESPECT TO PCB LAYOUT.

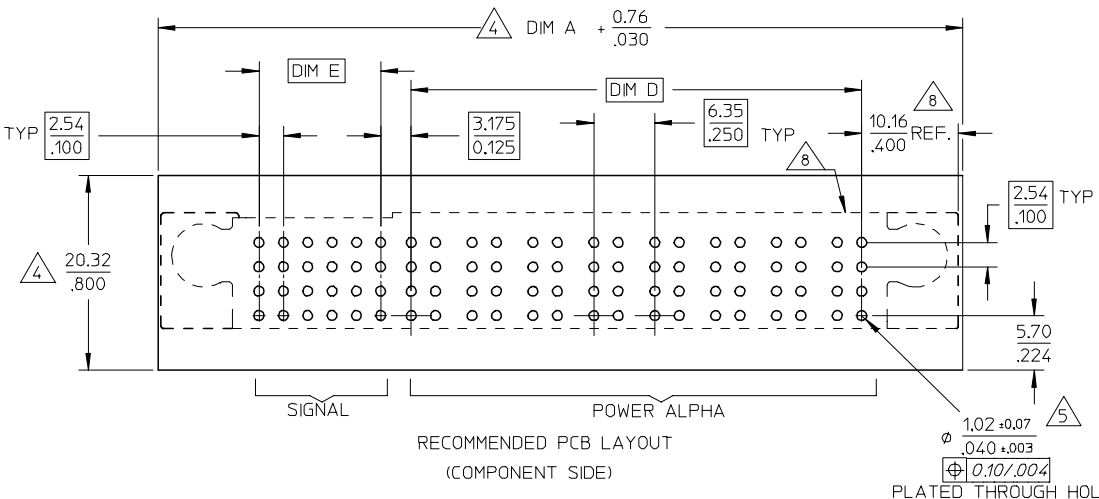

ADD ASSY P/N FOR L/F EC NO: S2005-0102 DRWN:NRVITAP 2004/08/11 CHKD:PTLIM 2004/08/11 APPR:SCLOW 2004/08/11	DESCRIPTION	QUALITY SYMBOLS ▽ = 0 ▽ = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE NTS	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		REVISE ON CAD ONLY			
			mm	INCH	DIMENSION STYLE MM/IN		TITLE POWER CONN. RECEPTACLE P(A)-S CONFIGURATION VERTICAL PRESS-FIT					
			4 PLACES	± ---	± ---	DRAWN BY KMG0H					DATE 2002/11/18	
			3 PLACES	± ---	± ---	CHECKED BY PTLIM	DATE 2002/11/21	MOLEX INCORPORATED				
			2 PLACES	± 0.13	± ---	APPROVED BY SKTOH	DATE 2002/11/21					MATERIAL NO. SEE TABLE
			1 PLACE	± 0.25	± ---	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						
			ANGULAR ± 3 °									
			DRAFT WHERE APPLICABLE									
			MUST REMAIN WITHIN DIMENSIONS			B						