




# BAT60B

Schottky Barrier Diode



## SOD-323



### Features

- ✧ Low voltage, Low inductance.
- ✧ High current rectifier schottky diode.
- ✧ For power supply.
- ✧ For detection and step-up-conversion.

### Applications

- ✧ Schottky barrier detector.

Dimensions in inches and (millimeters)

### Ordering Information

Type No.	Marking	Package Code
BAT60B	W5•	SOD-323

MAXIMUM RATING @ Ta=25°C unless otherwise specified

Parameter	Symbol	Limits	Unit
Peak reverse voltage	$V_{RM}$	10	V
DC Reverse Voltage	$V_R$	10	V
Average Rectified Output Current	$I_O$	3	A
Forward Surge Current	$I_{FSM}$	5	A
Total Power Dissipation	$P_{tot}$	350	mW
Junction temperature	$T_j$	150	°C
Storage temperature range	$T_{stg}$	-55-150	°C


ELECTRICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Forward voltage	$V_F$	$I_F=10mA$	0.2	0.24	0.3	V
		$I_F=100mA$	0.26	0.32	0.38	V
		$I_F=500mA$	0.32	0.4	0.5	V
		$I_F=1000mA$	0.36	0.48	0.6	V
Reverse current	$I_R$	$V_R=5v$		5	15	$\mu A$
		$V_R=8v$		10	25	
Capacitance between terminals	$C_T$	$V_R=5v, f=1MHz$	12	25	30	pF


## TYPICAL CHARACTERISTICS @ $T_a=25^\circ\text{C}$ unless otherwise specified

Reverse current  $I_R = f(V_R)$

$T_A = \text{Parameter}$

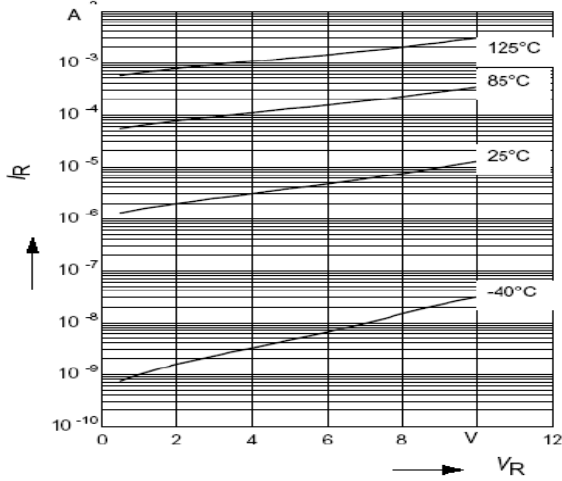


Forward current  $I_F = f(T_S)$

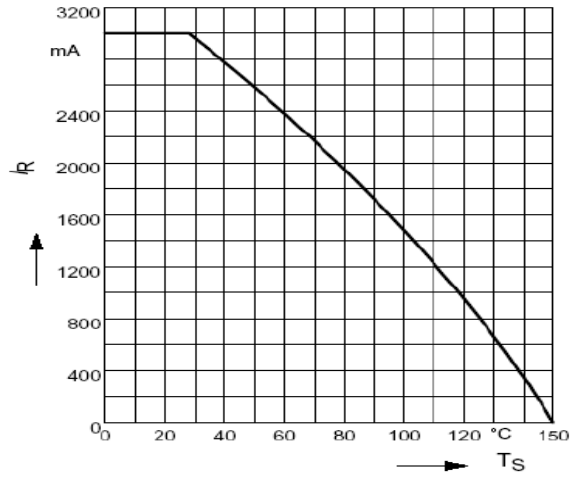


Forward current  $I_F = f(V_F)$

$T_A = \text{Parameter}$

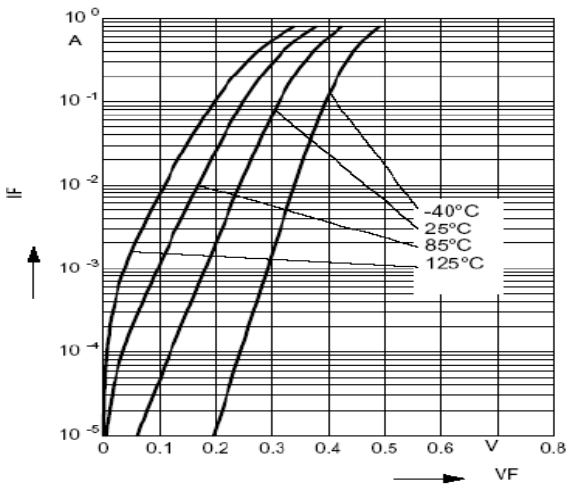

Permissible Pulse Load

$I_{Fmax}/I_{FDC} = f(t_p)$

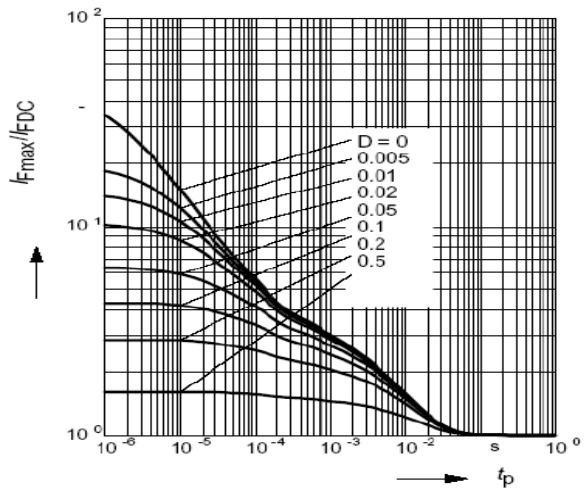

Permissible Puls Load  $R_{thJS} = f(t_p)$

