

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0878315021

Status:

Active

Overview:


milligrid

Description:

2.00mm (.079") Pitch Milli-Grid™ Header, Vertical, Through Hole, Shrouded, Lead-free, 50 Circuits, 0.76µm (30µ") Gold (Au) Plating, Center Polarization Slot, with Locking Windows, without PCB Locator, Tube

Documents:	
3D Model	Product Specification PS-87831-027 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification	
CSA	LR19980
UL	E29179
General	
Product Family	PCB Headers
Series	87831
Application	Wire-to-Board
Comments	Contact Molex for application in automotive industry
Overview	milligrid
Product Name	Milli-Grid™
Physical	
Breakaway	No
Circuits (Loaded)	50
Circuits (maximum)	50
Color - Resin	Black
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Compliant	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Brass
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	Nylon
Number of Rows	2
Orientation	Vertical
PC Tail Length (in)	0.098 In
PC Tail Length (mm)	2.50 mm
PCB Locator	No
PCB Retention	None
PCB Thickness Recommended (in)	0.062 In
PCB Thickness Recommended (mm)	1.60 mm
Packaging Type	Tube
Pitch - Mating Interface (in)	0.079 In
Pitch - Mating Interface (mm)	2.00 mm
Pitch - Term. Interface (in)	0.079 In
Pitch - Term. Interface (mm)	2.00 mm
Plating min: Mating (µin)	30
Plating min: Mating (µm)	0.76
Plating min: Termination (µin)	76
Plating min: Termination (µm)	1.88
Polarized to Mating Part	Side Slots (2)

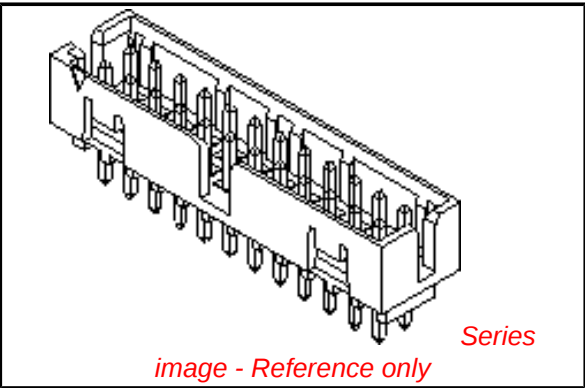

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Not Halogen-Free

Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

China RoHS



Search Parts in this Series

87831Series


Mates With

50394 Wire-to-Board Terminals. 51110 Wire-to-Board Crimp Housing. 87568 Wire-to-Board IDT Housings. 79107 Board-to-Board Top Entry Through Hole Receptacle. 79108 Board-to-Board FFC/FPC Top Entry Through Hole Receptacle. L

Polarized to PCB	No
Shrouded	Fully
Stackable	No
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-55°C to +105°C
Termination Interface: Style	Through Hole
Electrical	
Current - Maximum per Contact	2A
Voltage - Maximum	125V
Solder Process Data	
Duration at Max. Process Temperature (seconds)	10
Lead-free Process Capability	Wave Capable (TH only)
Max. Cycles at Max. Process Temperature	1
Process Temperature max. C	260
Material Info	
Reference - Drawing Numbers	
Product Specification	PS-87831-027
Sales Drawing	SD-87831-011




This document was generated on 05/25/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

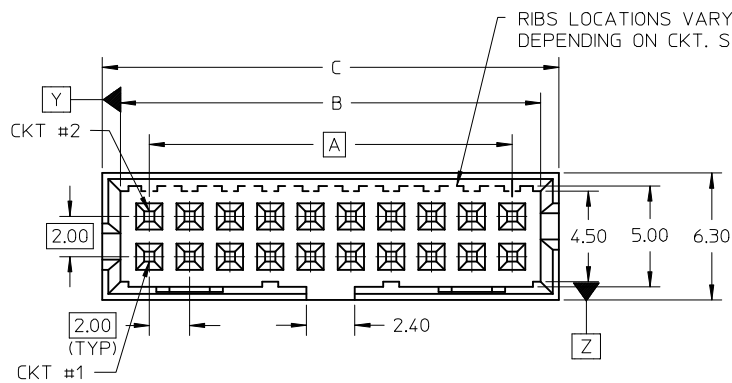

RED ARROW
INDICATION

MOLEX LOGO & TUBE
PART NO. 89990-0007.
(ON THE LEFT HAND
SIDE OF TUBE).

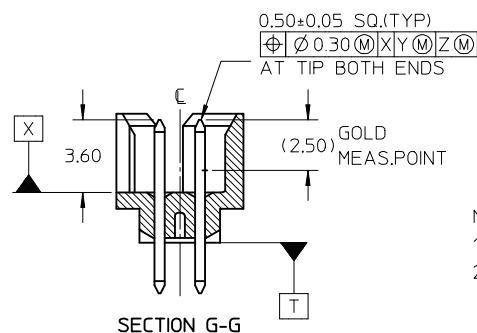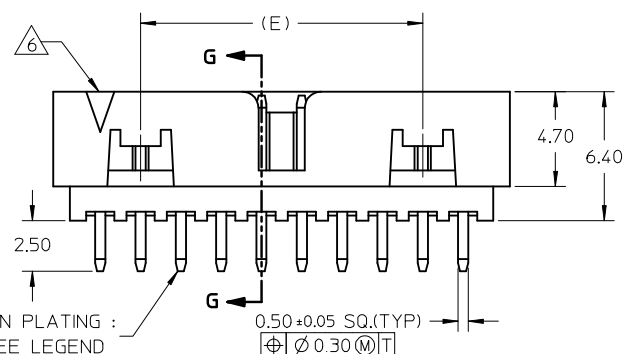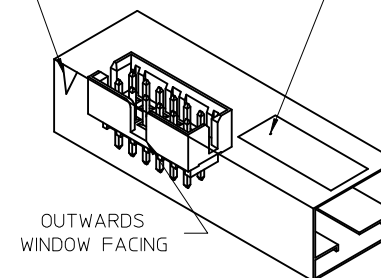

PART NUMBER LEGEND :



87831 - * * * *

PLATING OPTION

- 19 - 0.05-0.13um/2-5uin GOLD IN CONTACT AREA AND 1.88um/75uin MIN. TIN IN SOLDER TAIL AREA OVER 1.27um/50uin MIN. NICKEL OVERALL.
- 20 - 0.38um/15uin GOLD IN CONTACT AREA AND 1.88um/75uin MIN. TIN IN SOLDER TAIL AREA OVER 1.27um/50uin MIN. NICKEL OVERALL.
- 21 - 0.76um/30uin GOLD IN CONTACT AREA AND 1.88um/75uin MIN. TIN IN SOLDER TAIL AREA OVER 1.27um/50uin MIN. NICKEL OVERALL.

NOTES:

1. FOR ILLUSTRATION PURPOSES, 20 CIRCUIT SIZE WAFER IS SHOWN.
2. MATERIAL :
HOUSING : 30% G.F., NYLON 46, UL94V-0, COLOR BLACK.
PIN : 0.50MM SQ.PHOSPHOR BRONZE.
3. PRODUCT SPECIFICATION PS-87831-027 APPLIES.
4. NO CENTRE POLARIZATION SLOT FOR CKT SIZE 4 & 6 (EXCEPT FOR 87831-5119).
5. NO SIDE LOCKING SLOT FROM 4 TO 12 CKT SIZE.
6. CKT 4 AND 6 HAS NO IDENTIFICATION TAG.
7. REFER TO PART 87831-**4* FOR CENTRE LOCKING SLOT OPTION FOR 4 TO 12 CKT.
8. THIS HEADER MATES WITH MOLEX :
a) CRIMP RECEPTACLE HOUSING, 51110 SERIES WITH CRIMP TERMINAL, 50394 SERIES.
b) 2MM MILLIGRID DUAL ROW IDT, 87568 SERIES.
9. PARTS TO BE PACKED IN TUBE WITH MOISTURE BARRIER BAG.

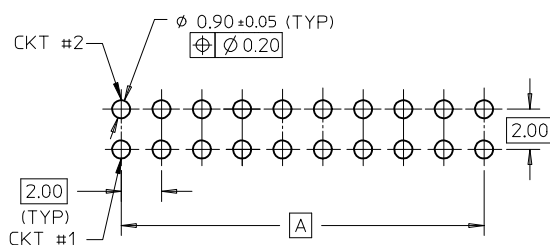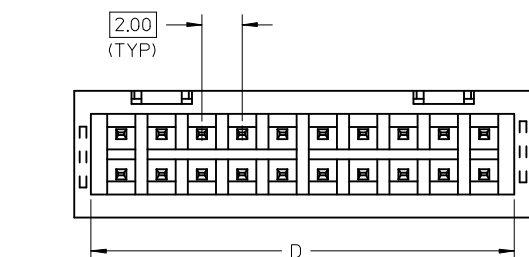

RECOMMENDED PCB PATTERN

REVISED EC NO: S2009-0559 DRWN:SKANG CHKD:ATSEE APPR:MLONG 2009/02/23 2009/02/23 2009/02/23	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE NTS	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION		
			4 PLACES 3 PLACES 2 PLACES 1 PLACE	mm	INCH	DRAWN BY ATSEE	DATE 2003/10/03	TITLE MGRID, SHROUDED HEADER VERTICAL W/SLOT & STANDOFF				
				± ---	± ---	CHECKED BY KCLING	DATE 2003/11/07					
				± 0.2	± ---	APPROVED BY SKTOH	DATE 2003/11/07	 MOLEX INCORPORATED				
				± ---	± ---	MATERIAL NO. SEE TABLE	DOCUMENT NO. SD-87831-011		SHEET NO. 1 OF 2			
			ANGULAR ± 3 °									
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						
A14	REV											

	10		9	8	7	6	5	4	3	2	1																																																																										
F	P/N IN TUBE	CKT SIZE	VOID POSITION	DIMENSION				} NO CENTRE POLARIZATION SLOT																																																																													
	A	B	C	D	E																																																																																
	87831-04**	4	-----	2.00	4.85	6.65	5.00			-----																																																																											
	87831-06**	6	-----	4.00	6.85	8.65	7.00			-----																																																																											
	87831-08**	8	-----	6.00	8.85	10.65	9.00			-----																																																																											
	87831-10**	10	-----	8.00	10.85	12.65	11.00	-----																																																																													
	87831-12**	12	-----	10.00	12.85	14.65	13.00	-----																																																																													
	87831-14**	14	-----	12.00	14.85	16.65	15.00	8.00																																																																													
	87831-16**	16	-----	14.00	16.85	18.65	17.00	10.00																																																																													
	87831-18**	18	-----	16.00	18.85	20.65	19.00	12.00																																																																													
E	87831-20**	20	-----	18.00	20.85	22.65	21.00	14.00																																																																													
	87831-22**	22	-----	20.00	22.85	24.65	23.00	16.00																																																																													
	87831-24**	24	-----	22.00	24.85	26.65	25.00	18.00																																																																													
	87831-26**	26	-----	24.00	26.85	28.65	27.00	20.00																																																																													
	87831-28**	28	-----	26.00	28.85	30.65	29.00	22.00																																																																													
	87831-30**	30	-----	28.00	30.85	32.65	31.00	24.00																																																																													
	87831-32**	32	-----	30.00	32.85	34.65	33.00	26.00																																																																													
	87831-34**	34	-----	32.00	34.85	36.65	35.00	28.00																																																																													
	87831-36**	36	-----	34.00	36.85	38.65	37.00	30.00																																																																													
	87831-38**	38	-----	36.00	38.85	40.65	39.00	32.00																																																																													
D	87831-40**	40	-----	38.00	40.85	42.65	41.00	34.00																																																																													
	87831-42**	42	-----	40.00	42.85	44.65	43.00	36.00																																																																													
	87831-44**	44	-----	42.00	44.85	46.65	45.00	38.00																																																																													
	87831-46**	46	-----	44.00	46.85	48.65	47.00	40.00																																																																													
	87831-48**	48	-----	46.00	48.85	50.65	49.00	42.00																																																																													
	87831-50**	50	-----	48.00	50.85	52.65	51.00	44.00																																																																													
	87831-5120	12	1	10.00	12.85	14.65	13.00	-----																																																																													
	87831-5220	44	20	42.00	44.85	46.65	45.00	38.00																																																																													
	87831-5320	24	13	22.00	24.85	26.65	25.00	18.00																																																																													
	87831-5420	34	3	32.00	34.85	36.65	35.00	28.00																																																																													
C	87831-5520	20	20	18.00	20.85	22.65	21.00	14.00																																																																													
	87831-5620	28	13	26.00	28.85	30.65	29.00	22.00																																																																													
	87831-5119	6	-----	4.00	6.85	8.65	7.00	-----																																																																													
	87831-5720	34	15	32.00	34.85	36.65	35.00	28.00																																																																													
	87831-5820	40	25	38.00	40.85	42.65	41.00	34.00																																																																													
	87831-5920	20	13	18.00	20.85	22.65	21.00	14.00																																																																													
	87831-6020	24	20	22.00	24.85	26.65	25.00	18.00																																																																													
B																																																																																					
A																																																																																					
<table><tr><td rowspan="5">REVISED EC NO: S2009-0559 DRWN:SKANG CHKD:ATSEE APPR:MLONG</td><td rowspan="5">DESCRIPTION REV</td><td rowspan="5">QUALITY SYMBOLS ▽=0 ▽=0</td><td rowspan="5">GENERAL TOLERANCES (UNLESS SPECIFIED) <table><tr><td></td><td>mm</td><td>INCH</td></tr><tr><td>4 PLACES</td><td>± ---</td><td>± ---</td></tr><tr><td>3 PLACES</td><td>± ---</td><td>± ---</td></tr><tr><td>2 PLACES</td><td>± 0.2</td><td>± ---</td></tr><tr><td>1 PLACE</td><td>± ---</td><td>± ---</td></tr><tr><td colspan="3">ANGULAR ± 3 °</td></tr></table></td><td rowspan="5">DIMENSION STYLE MM ONLY <table><tr><td>DRAWN BY</td><td>DATE</td></tr><tr><td>ATSEE</td><td>2003/10/03</td></tr><tr><td>CHECKED BY</td><td>DATE</td></tr><tr><td>KCLING</td><td>2003/11/07</td></tr><tr><td>APPROVED BY</td><td>DATE</td></tr><tr><td>SKTOH</td><td>2003/11/07</td></tr></table></td><td rowspan="5">SCALE NTS</td><td rowspan="5">DESIGN UNITS METRIC</td><td rowspan="5"> THIRD ANGLE PROJECTION</td><td rowspan="5">TITLE MGRID, SHROUDED HEADER VERTICAL W/SLOT & STANDOFF MOLEX INCORPORATED</td><td rowspan="5">MATERIAL NO. SEE TABLE</td><td rowspan="5">DOCUMENT NO. SD-87831-011</td><td rowspan="5">SHEET NO. 2 OF 2</td></tr><tr><td colspan="8">DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS</td></tr><tr><td colspan="8">SIZE A3</td></tr><tr><td colspan="8">THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION</td></tr><tr><td colspan="8"></td></tr></table>												REVISED EC NO: S2009-0559 DRWN:SKANG CHKD:ATSEE APPR:MLONG	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) <table><tr><td></td><td>mm</td><td>INCH</td></tr><tr><td>4 PLACES</td><td>± ---</td><td>± ---</td></tr><tr><td>3 PLACES</td><td>± ---</td><td>± ---</td></tr><tr><td>2 PLACES</td><td>± 0.2</td><td>± ---</td></tr><tr><td>1 PLACE</td><td>± ---</td><td>± ---</td></tr><tr><td colspan="3">ANGULAR ± 3 °</td></tr></table>		mm	INCH	4 PLACES	± ---	± ---	3 PLACES	± ---	± ---	2 PLACES	± 0.2	± ---	1 PLACE	± ---	± ---	ANGULAR ± 3 °			DIMENSION STYLE MM ONLY <table><tr><td>DRAWN BY</td><td>DATE</td></tr><tr><td>ATSEE</td><td>2003/10/03</td></tr><tr><td>CHECKED BY</td><td>DATE</td></tr><tr><td>KCLING</td><td>2003/11/07</td></tr><tr><td>APPROVED BY</td><td>DATE</td></tr><tr><td>SKTOH</td><td>2003/11/07</td></tr></table>	DRAWN BY	DATE	ATSEE	2003/10/03	CHECKED BY	DATE	KCLING	2003/11/07	APPROVED BY	DATE	SKTOH	2003/11/07	SCALE NTS	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	TITLE MGRID, SHROUDED HEADER VERTICAL W/SLOT & STANDOFF MOLEX INCORPORATED	MATERIAL NO. SEE TABLE	DOCUMENT NO. SD-87831-011	SHEET NO. 2 OF 2	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS								SIZE A3								THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
REVISED EC NO: S2009-0559 DRWN:SKANG CHKD:ATSEE APPR:MLONG	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) <table><tr><td></td><td>mm</td><td>INCH</td></tr><tr><td>4 PLACES</td><td>± ---</td><td>± ---</td></tr><tr><td>3 PLACES</td><td>± ---</td><td>± ---</td></tr><tr><td>2 PLACES</td><td>± 0.2</td><td>± ---</td></tr><tr><td>1 PLACE</td><td>± ---</td><td>± ---</td></tr><tr><td colspan="3">ANGULAR ± 3 °</td></tr></table>		mm	INCH	4 PLACES	± ---	± ---	3 PLACES	± ---					± ---	2 PLACES	± 0.2	± ---	1 PLACE	± ---	± ---	ANGULAR ± 3 °			DIMENSION STYLE MM ONLY <table><tr><td>DRAWN BY</td><td>DATE</td></tr><tr><td>ATSEE</td><td>2003/10/03</td></tr><tr><td>CHECKED BY</td><td>DATE</td></tr><tr><td>KCLING</td><td>2003/11/07</td></tr><tr><td>APPROVED BY</td><td>DATE</td></tr><tr><td>SKTOH</td><td>2003/11/07</td></tr></table>	DRAWN BY	DATE	ATSEE	2003/10/03	CHECKED BY	DATE	KCLING		2003/11/07	APPROVED BY	DATE	SKTOH	2003/11/07	SCALE NTS	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	TITLE MGRID, SHROUDED HEADER VERTICAL W/SLOT & STANDOFF MOLEX INCORPORATED	MATERIAL NO. SEE TABLE	DOCUMENT NO. SD-87831-011	SHEET NO. 2 OF 2																																							
					mm	INCH																																																																															
				4 PLACES	± ---	± ---																																																																															
				3 PLACES	± ---	± ---																																																																															
				2 PLACES	± 0.2	± ---																																																																															
1 PLACE	± ---	± ---																																																																																			
ANGULAR ± 3 °																																																																																					
DRAWN BY	DATE																																																																																				
ATSEE	2003/10/03																																																																																				
CHECKED BY	DATE																																																																																				
KCLING	2003/11/07																																																																																				
APPROVED BY	DATE																																																																																				
SKTOH	2003/11/07																																																																																				
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS																																																																																					
SIZE A3																																																																																					
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																																																																																					
fb_frame_A3_P_AM_T Rev. E 2006/04/15																																																																																					
	9	8	7	6	5	4	3	2	1																																																																												