

September 2011

## Features

- 512 channel x 512 channel non-blocking switch at 2.048 Mbps, 4.096 Mbps or 8.192 Mbps operation
- Rate conversion between the ST-BUS inputs and ST-BUS outputs
- Integrated Digital Phase-Locked Loop (DPLL) meets Telcordia GR-1244-CORE Stratum 4 specifications
- DPLL provides reference monitor, jitter attenuation and free run functions
- Per-stream ST-BUS input with data rate selection of 2.048 Mbps, 4.096 Mbps or 8.192 Mbps
- Per-stream ST-BUS output with data rate selection of 2.048 Mbps, 4.096 Mbps or 8.192 Mbps; the output data rate can be different than the input data rate
- Per-stream high impedance control output for every ST-BUS output with fractional bit advancement
- Per-stream input channel and input bit delay programming with fractional bit delay


### Ordering Information

|              |                 |                       |
|--------------|-----------------|-----------------------|
| ZL50011/GDC  | 144 Ball LBGA   | Trays                 |
| ZL50011/QCG1 | 160 Pin LQFP*   | Trays, Bake & Drypack |
| ZL50011/GDG2 | 144 Ball LBGA** | Trays, Bake & Drypack |

\*Pb Free Matte Tin  
 \*\* Pb Free Tin/Silver/Copper

**-40°C to +85°C**

- Per-stream output channel and output bit delay programming with fractional bit advancement
- Multiple frame pulse outputs and reference clock outputs
- Per-channel constant throughput delay
- Per-channel high impedance output control
- Per-channel message mode
- Per-channel Pseudo Random Bit Sequence (PRBS) pattern generation and bit error detection
- Control interface compatible to Motorola non-multiplexed CPUs
- Connection memory block programming capability
- IEEE-1149.1 (JTAG) test port
- 3.3 V I/O with 5 V tolerant input

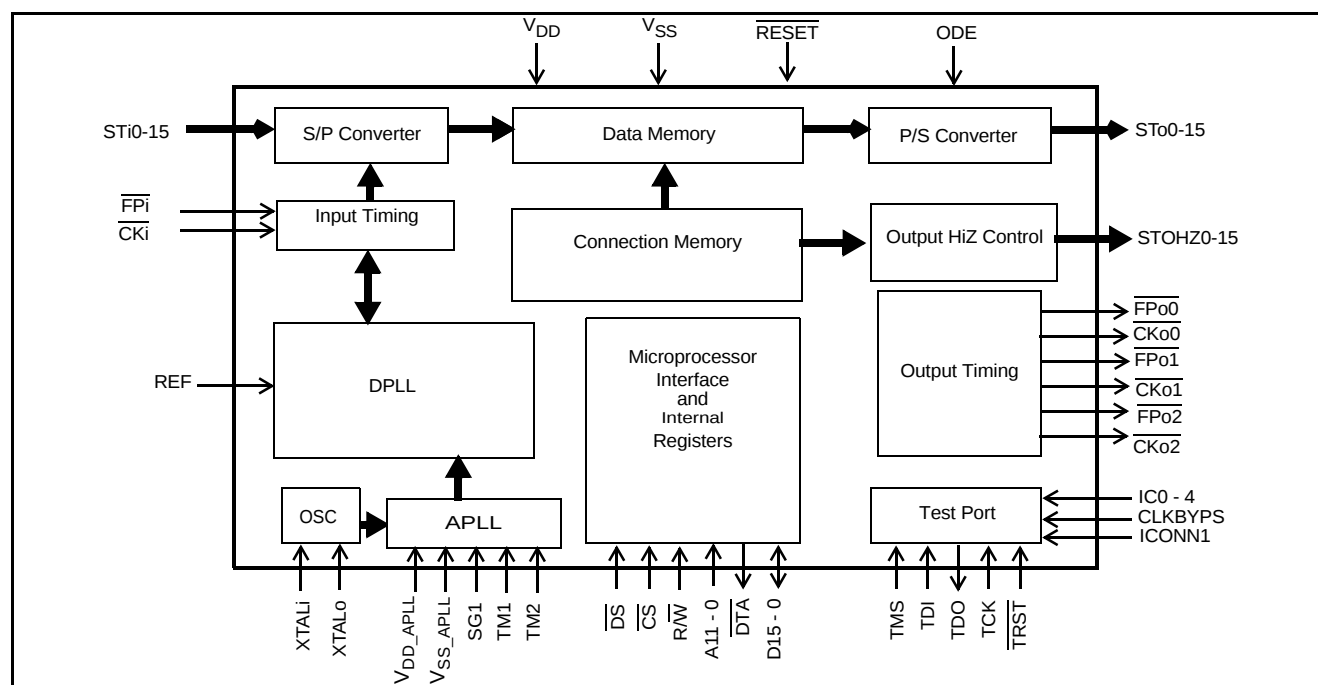

**Figure 1 - ZL50011 Functional Block Diagram**

**Zarlink Semiconductor US Patent No. 5,602,884, UK Patent No. 0772912,  
 France Brevete S.G.D.G. 0772912; Germany DBP No. 69502724.7-08**

## Applications

- Small and medium digital switching platforms
- Access Servers
- Time Division Multiplexers
- Computer Telephony Integration
- Digital Loop Carriers

## Description

The device has 16 ST-BUS inputs (STi0-15) and 16 ST-BUS outputs (STo0-15). It is a non-blocking digital switch with 512 64 kbps channels and performs rate conversion between the ST-BUS inputs and ST-BUS outputs. The ST-BUS inputs accept serial input data streams with the data rate of 2.048 Mbps, 4.096 Mbps or 8.192 Mbps on a per-stream basis. The ST-BUS outputs deliver serial output data streams with the data rate of 2.048 Mbps, 4.096 Mbps or 8.192 Mbps on a per-stream basis. The device also provides 16 high impedance control outputs (STOHZ 0-15) to support the use of external high impedance control buffers.

The ZL50011 has features that are programmable on a per-stream or per-channel basis including message mode, input bit delay, output bit advancement, constant throughput delay and high impedance output control.

The on-chip DPLL meets Telcordia GR-1244-CORE stratum 4 specifications (Stratum 4). It accepts a dedicated timing reference input at either 8 kHz, 1.544 MHz or 2.048 MHz. Alternatively, the reference can be replaced by an internal 8 kHz signal derived from the ST-BUS input frame boundary. The DPLL provides reference monitor, jitter attenuation and free run functions. It can be used as a system's ST-BUS timing source which is synchronized to the network. The DPLL can also be bypassed so that the device operates under system timing.

## Table of Contents

|                                                                        |           |
|------------------------------------------------------------------------|-----------|
| <b>Features</b>                                                        | <b>1</b>  |
| <b>Applications</b>                                                    | <b>2</b>  |
| <b>Description</b>                                                     | <b>2</b>  |
| <b>Changes Summary</b>                                                 | <b>8</b>  |
| <b>1.0 Device Overview</b>                                             | <b>16</b> |
| <b>2.0 Functional Description</b>                                      | <b>16</b> |
| 2.1 ST-BUS Input Data Rate and Input Timing                            | 16        |
| 2.1.1 ST-BUS Input Operation Mode                                      | 16        |
| 2.1.2 Frame Pulse Input and Clock Input timing                         | 16        |
| 2.1.3 ST-BUS Input Timing                                              | 18        |
| 2.1.4 Improved Input Jitter Tolerance with Frame Boundary Determinator | 18        |
| 2.2 ST-BUS Output Data Rate and Output Timing                          | 19        |
| 2.2.1 ST-BUS Output Operation Mode                                     | 19        |
| 2.2.2 Frame Pulse Output and Clock Output Timing                       | 19        |
| 2.2.3 ST-BUS Output Timing                                             | 22        |
| 2.3 Serial Data Input Delay and Serial Data Output Offset              | 23        |
| 2.3.1 Input Channel Delay Programming                                  | 23        |
| 2.3.2 Input Bit Delay Programming                                      | 23        |
| 2.3.3 Fractional Input Bit Delay Programming                           | 24        |
| 2.3.4 Output Channel Delay Programming                                 | 24        |
| 2.3.5 Output Bit Delay Programming                                     | 25        |
| 2.3.6 Fractional Output Bit Advancement Programming                    | 25        |
| 2.3.7 External High Impedance Control, STOHZ 0 to 15                   | 26        |
| 2.4 Data Delay Through The Switching Paths                             | 27        |
| 2.5 Connection Memory Description                                      | 29        |
| 2.5.1 Connection Memory Block Programming                              | 29        |
| 2.6 Bit Error Rate (BER) Test                                          | 30        |
| 2.7 Quadrant frame programming                                         | 31        |
| 2.8 Microprocessor Port                                                | 32        |
| 2.9 Digital Phase-Locked Loop (DPLL) Operation                         | 32        |
| 2.9.1 DPLL Master Mode                                                 | 33        |
| 2.9.2 DPLL Freerun Mode                                                | 33        |
| 2.9.3 DPLL Bypass Mode                                                 | 34        |
| 2.10 DPLL Functional Description                                       | 34        |
| 2.10.1 CKi/FPi Synchronizer and REF Select Mux                         | 34        |
| 2.10.2 Skew Control Circuit                                            | 35        |
| 2.10.3 Reference Monitor Circuit                                       | 35        |
| 2.10.4 Phase-Locked Loop (PLL) Circuit                                 | 36        |
| 2.11 DPLL Performance                                                  | 37        |
| 2.11.1 Intrinsic Jitter                                                | 37        |
| 2.11.2 DPLL Jitter Tolerance                                           | 37        |
| 2.11.3 Jitter Transfer                                                 | 37        |
| 2.11.4 Frequency Accuracy                                              | 38        |
| 2.11.5 Locking Range                                                   | 39        |
| 2.11.6 Phase Slope                                                     | 39        |
| 2.11.7 Phase Lock Time                                                 | 39        |
| 2.12 Alignment Between Input and Output Frame Pulses                   | 40        |
| <b>3.0 Oscillator Requirements</b>                                     | <b>40</b> |
| 3.1 External Crystal Oscillator                                        | 40        |
| 3.2 External Clock Oscillator                                          | 41        |
| <b>4.0 Device Reset and Initialization</b>                             | <b>42</b> |

## Table of Contents

|                                             |           |
|---------------------------------------------|-----------|
| <b>5.0 JTAG Support</b>                     | <b>42</b> |
| 5.1 Test Access Port (TAP)                  | 42        |
| 5.2 Instruction Register                    | 43        |
| 5.3 Test Data Register                      | 43        |
| 5.4 BSDL                                    | 43        |
| <b>6.0 Register Address Mapping</b>         | <b>44</b> |
| <b>7.0 Detail Register Description</b>      | <b>47</b> |
| <b>9.0 Connection Memory Bit Assignment</b> | <b>65</b> |

## List of Figures

|                                                                                                                                                           |    |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------|----|
| Figure 1 - ZL50011 Functional Block Diagram . . . . .                                                                                                     | 1  |
| Figure 2 - 24 mm x 24 mm LQFP (JEDEC MS-026) Pinout Diagram . . . . .                                                                                     | 9  |
| Figure 3 - 13 mm x 13 mm 144 Ball LBGA Pinout Diagram . . . . .                                                                                           | 10 |
| Figure 4 - Input Timing when (CKIN2 to CKIN0 bits = 010) in the Control Register . . . . .                                                                | 17 |
| Figure 5 - Input Timing when (CKIN2 to CKIN0 bits = 001) in the Control Register . . . . .                                                                | 17 |
| Figure 6 - Input Timing when (CKIN2 to CKIN0 bits = 000) in the Control Register . . . . .                                                                | 17 |
| Figure 7 - ST-BUS Input Timing for Various Input Data Rates . . . . .                                                                                     | 18 |
| Figure 8 - FPo0 and CKo0 Output Timing when the CKFP0 Bit = 0 . . . . .                                                                                   | 20 |
| Figure 9 - FPo0 and CKo0 Output Timing when the CKFP0 Bit = 1 . . . . .                                                                                   | 20 |
| Figure 10 - FPo1 and CKo1 Output Timing when the CKFP1 Bit = 0 . . . . .                                                                                  | 20 |
| Figure 11 - FPo1 and CKo1 Output Timing when the CKFP1 Bit = 1 . . . . .                                                                                  | 20 |
| Figure 12 - FPo2 and CKo2 Output Timing when the CKFP2 Bit = 0 . . . . .                                                                                  | 21 |
| Figure 13 - FPo2 and CKo2 Output Timing when the CKFP2 Bit = 1 . . . . .                                                                                  | 21 |
| Figure 14 - ST-BUS Output Timing for Various Output Data Rates . . . . .                                                                                  | 22 |
| Figure 15 - Input Channel Delay Timing Diagram . . . . .                                                                                                  | 23 |
| Figure 16 - Input Bit Delay Timing Diagram . . . . .                                                                                                      | 24 |
| Figure 17 - Output Channel Delay Timing Diagram . . . . .                                                                                                 | 24 |
| Figure 18 - Output Bit Delay Timing Diagram . . . . .                                                                                                     | 25 |
| Figure 19 - Fractional Output Bit Advancement Timing Diagram . . . . .                                                                                    | 25 |
| Figure 20 - Example: External High Impedance Control Timing . . . . .                                                                                     | 26 |
| Figure 21 - Data Throughput Delay when Input and Output Channel Delay are Disabled for Input Ch0 Switched to Output Ch0 . . . . .                         | 28 |
| Figure 22 - Data Throughput Delay when Input Channel Delay is Enabled and Output Channel Delay is Disabled for Input Ch0 Switched to Output Ch0 . . . . . | 28 |
| Figure 23 - Data Throughput Delay when Input Channel Delay is Disabled and Output Channel Delay is Enabled for Input Ch0 Switch to Output Ch0 . . . . .   | 28 |
| Figure 24 - Data Throughput Delay when Input and Output Channel Delay are Enabled for Input Ch0 Switched to Output Ch0 . . . . .                          | 29 |
| Figure 25 - DPLL Functional Block Diagram . . . . .                                                                                                       | 34 |
| Figure 26 - Skew Control Circuit Diagram . . . . .                                                                                                        | 35 |
| Figure 27 - Block Diagram of the PLL Module . . . . .                                                                                                     | 36 |
| Figure 28 - DPLL Jitter Transfer Function Diagram - Wide Range of Frequencies . . . . .                                                                   | 38 |
| Figure 29 - Detailed DPLL Jitter Transfer Function Diagram (Wander Transfer Diagram) . . . . .                                                            | 39 |
| Figure 30 - Crystal Oscillator Circuit . . . . .                                                                                                          | 40 |
| Figure 31 - External Clock Oscillator Circuit . . . . .                                                                                                   | 41 |
| Figure 32 - Frame Pulse Input and Clock Input Timing Diagram . . . . .                                                                                    | 68 |
| Figure 33 - Frame Boundary Timing with Input Clock (Cycle-to-Cycle) Variation . . . . .                                                                   | 68 |
| Figure 34 - Frame Boundary Timing with Input Frame Pulse (Cycle-to-Cycle) Variation . . . . .                                                             | 69 |
| Figure 35 - XTALi Input Timing Diagram when Clock Oscillator is Connected . . . . .                                                                       | 70 |
| Figure 36 - Reference Input Timing Diagram when the Input Frequency = 8 kHz . . . . .                                                                     | 71 |
| Figure 37 - Reference Input Timing Diagram when the Input Frequency = 2.048 MHz . . . . .                                                                 | 71 |
| Figure 38 - Reference Input Timing Diagram when the Input Frequency = 1.544 Hz . . . . .                                                                  | 71 |
| Figure 39 - Input and Output Frame Boundary Offset . . . . .                                                                                              | 72 |
| Figure 40 - FPo0 and CKo0 Timing Diagram . . . . .                                                                                                        | 73 |
| Figure 41 - FPo1 and CKo1 Timing Diagram . . . . .                                                                                                        | 74 |
| Figure 42 - FPo2 and CKo2 Timing Diagram . . . . .                                                                                                        | 75 |
| Figure 43 - ST-BUS Inputs (STi0 - 15) Timing Diagram . . . . .                                                                                            | 76 |
| Figure 44 - ST-BUS Outputs (STo0 - 15) Timing Diagram . . . . .                                                                                           | 77 |
| Figure 45 - Serial Output and External Control . . . . .                                                                                                  | 78 |

List of Figures

Figure 46 - Output Driver Enable (ODE) ..... 78

Figure 47 - Motorola Non-Multiplexed Bus Timing..... 79

Figure 48 - JTAG Test Port Timing Diagram ..... 80

Figure 49 - Reset Pin Timing Diagram..... 80

## List of Tables

|                                                                                    |    |
|------------------------------------------------------------------------------------|----|
| Table 1 - FPi and CKi Input Programming .....                                      | 17 |
| Table 2 - FPo0 and CKo0 Output Programming .....                                   | 19 |
| Table 3 - FPo1 and CKo1 Output Programming .....                                   | 19 |
| Table 4 - FPo2 and CKo2 Output Programming .....                                   | 19 |
| Table 5 - Variable Range for Input Streams .....                                   | 27 |
| Table 6 - Variable Range for Output Streams .....                                  | 27 |
| Table 7 - Data Throughput Delay .....                                              | 27 |
| Table 8 - Connection Memory in Block Programming Mode .....                        | 30 |
| Table 9 - Definition of the Four Quadrant Frames .....                             | 31 |
| Table 10 - Quadrant Frame 0 LSB Replacement .....                                  | 31 |
| Table 11 - Quadrant Frame 1 LSB Replacement .....                                  | 31 |
| Table 13 - Quadrant Frame 3 LSB Replacement .....                                  | 32 |
| Table 12 - Quadrant Frame 2 LSB Replacement .....                                  | 32 |
| Table 14 - DPLL Operating Mode Settings .....                                      | 33 |
| Table 15 - Address Map for Device Specific Registers .....                         | 44 |
| Table 16 - Control Register (CR) Bits .....                                        | 47 |
| Table 17 - Internal Mode Selection (IMS) Register Bits .....                       | 49 |
| Table 18 - BER Start Receiving Register (BSRR) Bits .....                          | 50 |
| Table 19 - BER Length Register (BLR) Bits .....                                    | 51 |
| Table 20 - BER Count Register (BCR) Bits .....                                     | 51 |
| Table 21 - DPLL Operation Mode (DOM) Register Bits .....                           | 52 |
| Table 22 - DPLL Output Adjustment (DPOA) Register Bits .....                       | 53 |
| Table 23 - DPLL House Keeping (DHKR) Register Bits .....                           | 53 |
| Table 24 - Stream Input Control Register 0 to 7 (SICR0 to SICR7) .....             | 54 |
| Table 25 - Stream Input Control Register 8 to 15 (SICR8 to SICR15) .....           | 56 |
| Table 26 - Stream Input Delay Register 0 to 7 (SIDR0 to SIDR7) .....               | 58 |
| Table 27 - Stream Input Delay Register 8 to 15 (SIDR8 to SIDR15) .....             | 59 |
| Table 28 - Stream Output Control Register 0 to 7 (SOCR0 to SOCR7) .....            | 60 |
| Table 29 - Stream Output Control Register 8 to 15 (SOCR8 to SOCR15) .....          | 61 |
| Table 30 - Stream Output Offset Register 0 to 7 (SOOR0 to SOOR7) .....             | 62 |
| Table 31 - Stream Output Offset Register 8 to 15 (SOOR8 to SOOR15) .....           | 63 |
| Table 32 - Address Map for Memory Locations (512x512 DX, MSB of address = 1) ..... | 64 |
| Table 33 - Connection Memory Bit Assignment when the CMM bit = 0 .....             | 65 |
| Table 34 - Connection Memory Bits Assignment when the CMM bit = 1 .....            | 65 |


## Changes Summary

The following table captures the changes from the March 2006 issue.

| Page | Item                 | Change                                     |
|------|----------------------|--------------------------------------------|
| 1    | Ordering Information | Removed leaded packages as per PCN notice. |


The following table captures the changes from the July 2004 issue.

| Page       | Item                                                                                                    | Change                                                                                                                                                                                                     |
|------------|---------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 12, 34, 40 | (1) Pin Description - Signal XTALi<br>(2) 2.9.3 "DPLL Bypass Mode"<br>(3) 3.0 "Oscillator Requirements" | <ul style="list-style-type: none"><li>• Clarified initialization input clock requirement in DPLL Bypass mode.</li></ul>                                                                                    |
| 18         | 2.1.4 "Improved Input Jitter Tolerance with Frame Boundary Determinator"                                | <ul style="list-style-type: none"><li>• Added a new section to describe the improved input jitter tolerance with the frame boundary determinator.</li></ul>                                                |
| 47         | Table 16 - "Control Register (CR) Bits" - bits "FBDMODE" and "FBDEN"                                    | <ul style="list-style-type: none"><li>• Renamed bit 15 from Unused to FBDMODE and added description to clarify the frame boundary determinator operation.</li><li>• Clarified FBDEN description.</li></ul> |



**PINOUT DIAGRAM:** (as viewed through top of package)

A1 corner identified by metallized marking, mould indent, ink dot or right-angled corner

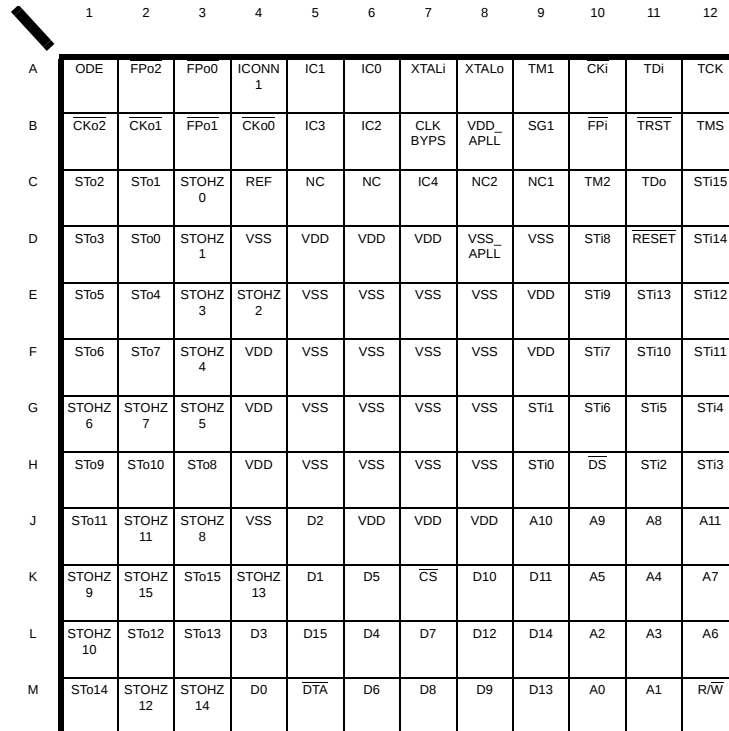

|   | 1           | 2           | 3           | 4           | 5   | 6   | 7          | 8            | 9    | 10   | 11    | 12    |
|---|-------------|-------------|-------------|-------------|-----|-----|------------|--------------|------|------|-------|-------|
| A | ODE         | FPo2        | FPo0        | ICONN<br>1  | IC1 | IC0 | XTALI      | XTALo        | TM1  | CKi  | TDi   | TCK   |
| B | CKo2        | CKo1        | FPo1        | CKo0        | IC3 | IC2 | CLK<br>BYP | VDD_<br>APLL | SG1  | FPI  | TRST  | TMS   |
| C | STo2        | STo1        | STOHZ<br>0  | REF         | NC  | NC  | IC4        | NC2          | NC1  | TM2  | TDo   | STi15 |
| D | STo3        | STo0        | STOHZ<br>1  | VSS         | VDD | VDD | VDD        | VSS_<br>APLL | VSS  | STi8 | RESET | STi14 |
| E | STo5        | STo4        | STOHZ<br>3  | STOHZ<br>2  | VSS | VSS | VSS        | VSS          | VDD  | STi9 | STi13 | STi12 |
| F | STo6        | STo7        | STOHZ<br>4  | VDD         | VSS | VSS | VSS        | VSS          | VDD  | STi7 | STi10 | STi11 |
| G | STOHZ<br>6  | STOHZ<br>7  | STOHZ<br>5  | VDD         | VSS | VSS | VSS        | VSS          | STi1 | STi6 | STi5  | STi4  |
| H | STo9        | STo10       | STo8        | VDD         | VSS | VSS | VSS        | VSS          | STi0 | DS   | STi2  | STi3  |
| J | STo11       | STOHZ<br>11 | STOHZ<br>8  | VSS         | D2  | VDD | VDD        | VDD          | A10  | A9   | A8    | A11   |
| K | STOHZ<br>9  | STOHZ<br>15 | STo15       | STOHZ<br>13 | D1  | D5  | CS         | D10          | D11  | A5   | A4    | A7    |
| L | STOHZ<br>10 | STo12       | STo13       | D3          | D15 | D4  | D7         | D12          | D14  | A2   | A3    | A6    |
| M | STo14       | STOHZ<br>12 | STOHZ<br>14 | D0          | DTA | D6  | D8         | D9           | D13  | A0   | A1    | RW    |

**Figure 3 - 13 mm x 13 mm 144 Ball LPGA Pinout Diagram**

## Pin Description

| LQFP Pin Number                                                                       | LBGA Ball Number                                                                        | Name              | Description                                                                                                                                                                                                                                                                                                                                                                                                              |
|---------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 10, 23, 33,<br>43, 48, 58,<br>68, 78, 92,<br>102, 113,<br>127, 136,<br>146, 156       | D5, D6, D7<br>E9<br>F4, F9<br>G4<br>H4<br>J6, J7, J8                                    | $V_{DD}$          | <b>Power Supply for the device:</b> +3.3 V                                                                                                                                                                                                                                                                                                                                                                               |
| 9, 18, 21,<br>32, 38, 47,<br>57, 67, 77,<br>91, 101,<br>112, 126,<br>135, 145,<br>155 | D4, D9<br>E5, E6, E7, E8<br>F5, F6, F7, F8<br>G5, G6, G7,<br>G8<br>H5, H6, H7, H8<br>J4 | $V_{SS}$ (GND)    | <b>Ground.</b>                                                                                                                                                                                                                                                                                                                                                                                                           |
| 3                                                                                     | B12                                                                                     | TMS               | <b>Test Mode Select (3.3 V Tolerant Input with internal pull-up):</b> JTAG signal that controls the state transitions of the TAP controller. This pin is pulled high by an internal pull-up resistor when it is not driven.                                                                                                                                                                                              |
| 4                                                                                     | A12                                                                                     | TCK               | <b>Test Clock (5 V Tolerant Input):</b> Provides the clock to the JTAG test logic.                                                                                                                                                                                                                                                                                                                                       |
| 5                                                                                     | B11                                                                                     | $\overline{TRST}$ | <b>Test Reset (3.3 V Tolerant Input with internal pull-up):</b> Asynchronously initializes the JTAG TAP controller by putting it in the Test-Logic-Reset state. This pin should be pulsed low during power-up to ensure that the device is in the normal functional mode. When JTAG is not being used, this pin should be pulled low during normal operation.                                                            |
| 6                                                                                     | A11                                                                                     | TDi               | <b>Test Serial Data In (3.3 V Tolerant Input with internal pull-up):</b> JTAG serial test instructions and data are shifted in on this pin. This pin is pulled high by an internal pull-up resistor when it is not driven.                                                                                                                                                                                               |
| 7                                                                                     | B10                                                                                     | $\overline{FPi}$  | <b>ST-BUS Frame Pulse Input (5 V Tolerant Input):</b> This pin accepts the frame pulse which stays low for 61 ns, 122 ns or 244 ns at the frame boundary. The frame pulse associating with the highest input data rate has to be applied to this pin. The frame pulse frequency is 8 kHz. The device also accepts positive frame pulse if the FPINP bit is high in the Internal Mode Selection register.                 |
| 8                                                                                     | A10                                                                                     | $\overline{CKi}$  | <b>ST-BUS Clock Input (5 V Tolerant Input):</b> This pin accepts a 4.096 MHz, 8.192 MHz or 16.384 MHz clock. The input clock frequency has to be equal to or greater than twice of the highest input data rate. The clock falling edge defines the input frame boundary. The device also allows the clock rising edge to define the frame boundary by programming the CKINP bit in the Internal Mode Selection register. |

**Pin Description (continued)**

| LQFP Pin Number | LBGA Ball Number   | Name             | Description                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-----------------|--------------------|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 11              | B9                 | SG1              | <b>APLL Test Control (3.3 V Input with internal pull-down):</b> For normal operation, this input MUST be low.                                                                                                                                                                                                                                                                                                                                |
| 12              | A9                 | TM1              | <b>APLL Test Pin 1:</b> For normal operation, this input MUST be low.                                                                                                                                                                                                                                                                                                                                                                        |
| 13              | C10                | TM2              | <b>APLL Test Pin 2:</b> For normal operation, this input MUST be low.                                                                                                                                                                                                                                                                                                                                                                        |
| 14, 15          | C9, C8             | NC1, NC2         | <b>No Connection:</b> These pins MUST be left unconnected.                                                                                                                                                                                                                                                                                                                                                                                   |
| 16              | D8                 | $V_{SS\_APLL}$   | <b>Ground for the APLL Circuit.</b>                                                                                                                                                                                                                                                                                                                                                                                                          |
| 17              | B8                 | $V_{DD\_APLL}$   | <b>Power Supply for the on-chip Analog Phase Lock Loop (APLL) Circuit:</b> +3.3 V                                                                                                                                                                                                                                                                                                                                                            |
| 19              | A8                 | XTALo            | <b>Oscillator Clock Output (3.3 V Output).</b> This pin is connected to a 20 MHz crystal (see Figure 30 on page 40), or it is left unconnected if a clock oscillator is connected to the XTALi pin (see Figure 31 on page 41). If the device is to be used in DPLL Bypass mode only, the crystal or clock oscillator can be omitted, in which case this pin must be left unconnected.                                                        |
| 20              | A7                 | XTALi            | <b>Oscillator Clock Input (3.3 V Input).</b> This pin is connected to a 20 MHz crystal (see Figure 30 on page 40), or it is connected to a clock oscillator (see Figure 31 on page 41). If the device is to be used in DPLL Bypass mode only, the crystal or clock oscillator can be omitted, but this pin should still get a valid clock signal so that the device can be initialized. The easiest way is to tie the CKi clock to this pin. |
| 22              | B7                 | CLKBYP           | <b>Test Clock Input:</b> For device testing only, in normal operation, this input MUST be low.                                                                                                                                                                                                                                                                                                                                               |
| 24 - 28         | A6, A5, B6, B5, C7 | IC0 - 4          | <b>Internal connection (3.3 V Tolerant Inputs with internal pull-down):</b> In normal mode, these pins must be low.                                                                                                                                                                                                                                                                                                                          |
| 30              | C4                 | REF              | <b>Reference Input (5 V Tolerant Input):</b> This pin accepts an 8 kHz, 1.544 MHz or 2.048 MHz timing reference. It is used as one of the references for the DPLL in the Master mode. This pin is ignored in the DPLL Bypass Mode. When this pin is not in use, it is required to be driven high or low by connecting it to Vdd or ground through an external pull-up resistor or external pull-down resistor.                               |
| 31              | A4                 | ICONN1           | <b>Internal Connection:</b> In normal mode, this pin must be low.                                                                                                                                                                                                                                                                                                                                                                            |
| 34              | A3                 | $\overline{FP0}$ | <b>ST-BUS Frame Pulse Output 0 (5 V Tolerance Three-state Output):</b> ST-BUS frame pulse output which stays low for 244 ns or 122 ns at the output frame boundary. Its frequency is 8 KHz. The polarity of this signal can be changed using the Internal Mode Selection register.                                                                                                                                                           |

## Pin Description (continued)

| LQFP Pin Number                          | LBGA Ball Number                                                     | Name                                            | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|------------------------------------------|----------------------------------------------------------------------|-------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 35                                       | B4                                                                   | $\overline{\text{CKo0}}$                        | <b>ST-BUS Clock Output 0 (5 V Tolerant Three-state Output):</b> A 4.094 MHz or 8.192 MHz clock output. The clock falling edge defines the output frame boundary. The polarity of this signal can be changed using the Internal Mode Selection register.                                                                                                                                                                                                                                                                   |
| 36                                       | B3                                                                   | $\overline{\text{FPo1}}$                        | <b>ST-BUS Frame Pulse Output 1 (5 V Tolerant Three-state Output):</b> ST-BUS frame pulse output which stays low for 61 ns or 122 ns at the output frame boundary. Its frequency is 8 KHz. The polarity of this signal can be changed using the Internal Mode Selection register.                                                                                                                                                                                                                                          |
| 37                                       | B2                                                                   | $\overline{\text{CKo1}}$                        | <b>ST-BUS Clock Output 1 (5 V Tolerant Three-state Output):</b> A 16.384 MHz or 8.192 MHz clock output. The clock falling edge defines the output frame boundary. The polarity of this signal can be changed using the Internal Mode Selection register.                                                                                                                                                                                                                                                                  |
| 44                                       | A2                                                                   | $\overline{\text{FPo2}}$                        | <b>ST-BUS Frame Pulse Output 2 (5 V Tolerant High Speed Three-state Output):</b> ST-BUS frame pulse output which stays low for 30 ns or 61 ns at the frame boundary. Its frequency is 8 KHz. The polarity of this signal can be changed using the Internal Mode Selection register.                                                                                                                                                                                                                                       |
| 45                                       | B1                                                                   | $\overline{\text{CKo2}}$                        | <b>ST-BUS Clock Output 2 (5 V Tolerant High Speed Three-state Output):</b> A 32.768 MHz or 16.384 MHz clock output. The clock falling edge defines the output frame boundary. The polarity of this signal can be changed using the Internal Mode Selection register.                                                                                                                                                                                                                                                      |
| 46                                       | A1                                                                   | ODE                                             | <b>Output Drive Enable (5 V Tolerant Input):</b> This is the asynchronously output enable control for the STo0 - 15 and the output driven high control for the STOHZ 0 - 15 serial outputs. When it is high, the STo0 - 15 and STOHZ 0 - 15 are enabled. When it is low, the STo0 - 15 are in the high impedance state and the STOHZ 0 - 15 are driven high.                                                                                                                                                              |
| 49 - 52<br>59 - 62<br>69 - 72<br>83 - 86 | D2, C2, C1, D1<br>E2, E1, F1, F2<br>H3, H1, H2, J1<br>L2, L3, M1, K3 | STo0 - 3<br>STo4 - 7<br>STo8 - 11<br>STo12 - 15 | <b>Serial Output Streams 0 to 15 (5 V Tolerant Three-state Outputs):</b> The data rate of these output streams can be selected independently using the stream control output registers. In the 2.048 Mbps mode, these pins have serial TDM data streams at 2.048 Mbps with 32 channels per stream. In the 4.096 Mbps mode, these pins have serial TDM data streams at 4.096 Mbps with 64 channels per stream. In the 8.192 Mbps mode, these pins have serial TDM data streams at 8.192 Mbps with 128 channels per stream. |

**Pin Description (continued)**

| LQFP Pin Number                                                          | LBGA Ball Number                                                                       | Name                                                                      | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|--------------------------------------------------------------------------|----------------------------------------------------------------------------------------|---------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 53 - 56<br>63 - 66<br>73 - 76<br>87 - 90                                 | C3, D3, E4, E3<br>F3, G3, G1,<br>G2<br>J3, K1, L1, J2<br>M2, K4, M3,<br>K2             | STOHZ 0 - 3<br>STOHZ 4 - 7<br>STOHZ 8 - 11<br>STOHZ 12 - 15               | <b>Serial Output Streams High Impedance Control 0 to 15 (5 V Tolerant Three-state Outputs):</b> These pins are used to enable (or disable) external three-state buffers. When an output channel is in the high impedance state, the STOHZ drives high for the duration of the corresponding output channel. When the STo channel is active, the STOHZ drives low for the duration of the corresponding output channel.                                                                                                                                                                                                                                         |
| 93 - 96<br>97 - 100<br>103 - 106<br>107 - 110                            | M4, K5, J5, L4<br>L6, K6, M6, L7<br>M7, M8, K8,<br>K9<br>L8, M9, L9, L5                | D0 - D3<br>D4 - D7<br>D8 - D11<br>D12 - D15                               | <b>Data Bus 0 - 15 (5 V Tolerant I/Os):</b> These pins form the 16-bit data bus of the microprocessor port.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 111                                                                      | M5                                                                                     | $\overline{DTA}$                                                          | <b>Data Transfer Acknowledgment (5 V Tolerant Three-state Output):</b> This active low output indicates that a data bus transfer is complete. A pull-up resistor is required to hold this pin at HIGH level.                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 114                                                                      | K7                                                                                     | $\overline{CS}$                                                           | <b>Chip Select (5 V Tolerant Input):</b> Active low input used by the microprocessor to enable the microprocessor port access.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 115                                                                      | M12                                                                                    | $\overline{RW}$                                                           | <b>Read/Write (5 V Tolerant Input):</b> This input controls the direction of the data bus lines (D0-D15) during a microprocessor access.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 116                                                                      | H10                                                                                    | $\overline{DS}$                                                           | <b>Data Strobe (5 V Tolerant Input):</b> This active low input works in conjunction with $\overline{CS}$ to enable the microprocessor port read and write operations.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 117, 118<br>123 - 125<br>128 - 130<br>131 - 134                          | M10, M11<br>L10, L11, K11<br>K10, L12, K12<br>J11, J10, J9,<br>J12                     | A0 - A1<br>A2 - A4<br>A5 - A7<br>A8 - A11                                 | <b>Address 0 - 11 (5 V Tolerant Inputs):</b> These pins form the 12-bit address bus to the internal memories and registers.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 137 - 139<br>140 - 142<br>143, 144<br>147 - 149<br>150 - 152<br>153, 154 | H9, G9, H11<br>H12, G12, G11<br>G10, F10<br>D10, E10, F11<br>F12, E12, E11<br>D12, C12 | STi0 - 2<br>STi3 - 5<br>STi6 - 7<br>STi8 - 10<br>STi11 - 13<br>STi14 - 15 | <b>Serial Input Streams 0 to 15 (5 V Tolerant Inputs):</b> The data rate of these input streams can be selected independently using the stream input control registers. In the 2.048 Mbps mode, these pins accept serial TDM data streams at 2.048 Mbps with 32 channels per stream. In the 4.096 Mbps mode, these pins accept serial TDM data streams at 4.096 Mbps with 64 channels per stream. In the 8.192 Mbps mode, these pins accept serial TDM data streams at 8.192 Mbps with 128 channels per stream. Unused serial input pins are required to connect to either Vdd or ground, through an external pull-up resistor or external pull-down resistor. |

**Pin Description (continued)**

| LQFP Pin Number                                             | LBGA Ball Number | Name                      | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-------------------------------------------------------------|------------------|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 157                                                         | D11              | $\overline{\text{RESET}}$ | <b>Device Reset (5 V Tolerant Input):</b> This input (active LOW) puts the device in its reset state that disables the ST00 - 15 drivers and drives the STOHZ 0 - 15 outputs to high. It also clears the device registers and internal counters. To ensure proper reset action, the reset pin must be low for longer than 1 ms. Upon releasing the reset signal to the device, the first microprocessor access can take place after 600 $\mu\text{s}$ due to the time required to stabilize the APLL and crystal oscillator blocks from the power down state. |
| 158                                                         | C11              | TDo                       | <b>Test Serial Data Out (3 V Tolerant Three-state Output):</b> JTAG serial data is output on this pin on the falling edge of TCK. This pin is held in high impedance state when JTAG is not enabled.                                                                                                                                                                                                                                                                                                                                                          |
| 1, 2, 29,<br>39 - 42,<br>79 - 82,<br>119 - 122,<br>159, 160 | C5, C6           | NC                        | <b>No Connection Pins.</b> These pins are not connected to the device internally.                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

## 1.0 Device Overview

The device uses the ST-BUS input frame pulse and the ST-BUS input clock to define the input frame boundary and timing for the ST-BUS input streams with various data rates (2.048 Mbps, 4.096 Mbps and/or 8.192 Mbps). The output frame boundary is defined by the output frame pulses and the output clock timing for the ST-BUS output streams with various data rates (2.048 Mbps, 4.096 Mbps and/or 8.192 Mbps).

By using Zarlink's message mode capability, microprocessor data can be broadcast to the data output streams on a per channel basis. This feature is useful for transferring control and status information for external circuits or other ST-BUS devices.

The on-chip DPLL can be operated in one of three modes: Master, Freerun or Bypass. In Master mode, the DPLL can be used as a system's timing source to provide ST-BUS clocks and frame pulses which are synchronized to the network. In Freerun mode, the DPLL can be used to provide system ST-BUS timing which is independent of the network. In Bypass mode, the DPLL is completely bypassed and the device operates entirely from system timing provided by the input ST-BUS clock and frame pulse. An external 20.000 MHz crystal or clock oscillator is required in Master and Freerun modes. The DPLL intrinsic jitter is 6.25 ns peak to peak.

In Master mode, the DPLL is synchronized to either the REF input or to an internal 8 kHz signal derived from the input ST-BUS clock and frame pulse. The REF input accepts an 8 kHz, 1.544 MHz or 2.048 MHz network timing reference signal. The DPLL also provides reference monitor and jitter attenuation functions. The DPLL output is an internal high-speed clock from which output ST-BUS clock and frame pulses are generated.

A non-multiplexed microprocessor port allows users to program the device with various operating modes and switching configurations. Users can use the microprocessor port to perform register read/write, connection memory read/write and data memory read operations. The microprocessor port has a 12-bit address bus, a 16-bit data bus and four control signals.

The device also supports the mandatory requirements of the IEEE-1149.1 (JTAG) standard via the test port.

## 2.0 Functional Description

A functional block diagram of the ZL50011 is shown in Figure 1 on page 1.

### 2.1 ST-BUS Input Data Rate and Input Timing

The device has 16 ST-BUS serial data inputs. Any of the 16 inputs can be programmed to accept different data rates, namely, 2.048 Mbps, 4.096 Mbps or 8.192 Mbps.

#### 2.1.1 ST-BUS Input Operation Mode

Any ST-BUS input can be programmed to accept the 2.048 Mbps, 4.096 Mbps or 8.192 Mbps data using Bit 0 to 2 in the stream input control registers, SICR0 to SICR15 as shown in Table 24 on page 54 and Table 25 on page 56.

The maximum number of input channels is 512 channels. External pull-up or pull-down resistors are required for any unused ST-BUS inputs.

#### 2.1.2 Frame Pulse Input and Clock Input timing

The frame pulse input  $\overline{\text{FPI}}$  accepts the frame pulse used for the **highest** input data rate. The frame pulse is an 8 kHz input signal which stays low for 244 ns, 122 ns or 61 ns for the input data rate of 2.048 Mbps, 4.096 Mbps or 8.192 Mbps respectively. The frequency of CKi must be twice the highest data rate. For example, if users present the ZL50011 with 2.048 Mbps and 8.192 Mbps input data, the device should be programmed to accept the input clock of 16.384 MHz and the frame pulse which stays low for 61 ns.


Users have to program the CKIN2 - 0 bits in the Control Register (CR), for the width of the frame pulse low cycle and the frequency of the input clock. See Table 1 for the programming of the CKIN0, CKIN1 and CKIN2 bits in the Control Register.

| CKIN2 - 0 bits | FPI Low Cycle | CKi        | Highest Input Data Rate |
|----------------|---------------|------------|-------------------------|
| 000            | 61 ns         | 16.384 MHz | 8.192 Mbps              |
| 001            | 122 ns        | 8.192 MHz  | 4.096 Mbps              |
| 010            | 244 ns        | 4.096 MHz  | 2.048 Mbps              |
| 011 - 111      | Reserved      |            |                         |


**Table 1 -  $\overline{\text{FPI}}$  and  $\overline{\text{CKi}}$  Input Programming**

The device also accepts positive or negative input frame pulse and ST-BUS input clock formats via the programming of the FPINP and CKINP bits in the Internal Mode Selection (IMS) register. By default, the device accepts the negative input clock format.


Figure 4, Figure 5 and Figure 6 describe the usage of CKIN2 - 0, FPINP and CKINP in the Internal Mode Selection (IMS) register:

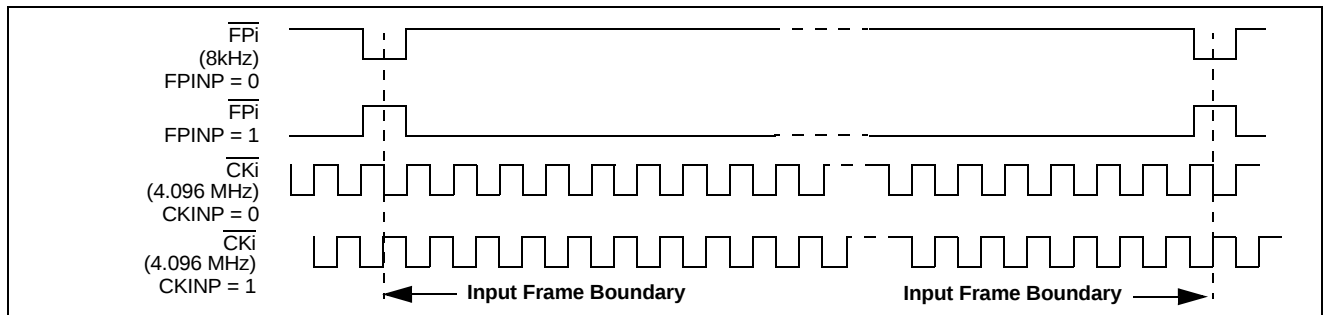

**Figure 4 - Input Timing when (CKIN2 to CKIN0 bits = 010) in the Control Register**

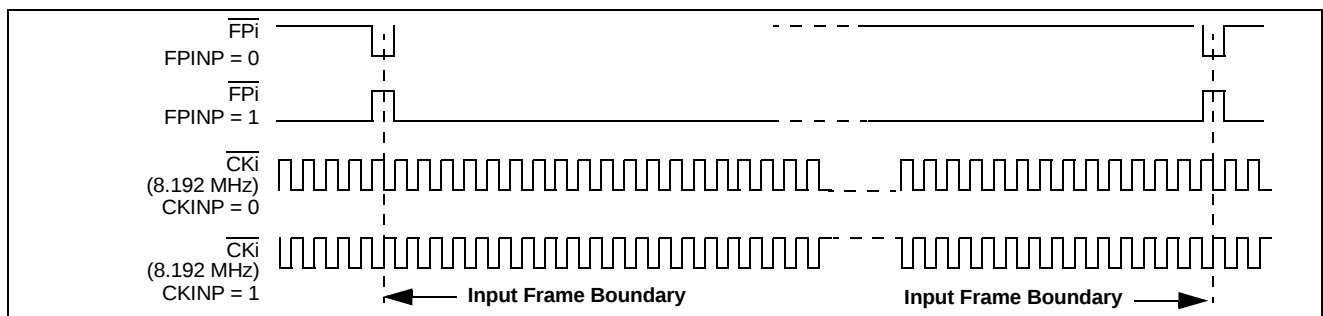

**Figure 5 - Input Timing when (CKIN2 to CKIN0 bits = 001) in the Control Register**

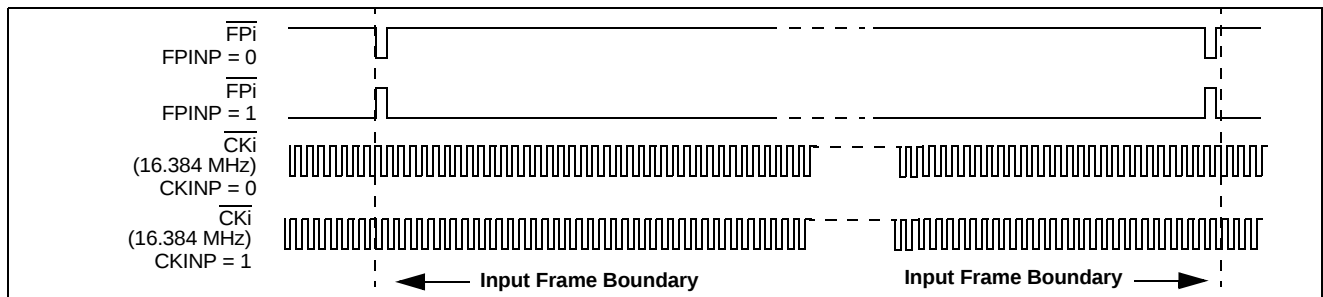

**Figure 6 - Input Timing when (CKIN2 to CKIN0 bits = 000) in the Control Register**

### 2.1.3 ST-BUS Input Timing

When the negative input frame pulse and negative input clock formats are used, the input frame boundary is defined by the falling edge of the CKi input clock while the FPi is low. When the input data rate is 2.048 Mbps, 4.096 Mbps or 8.192 Mbps, there are 32, 64 or 128 channels per every ST-BUS frame respectively. Figure 7 shows the details:

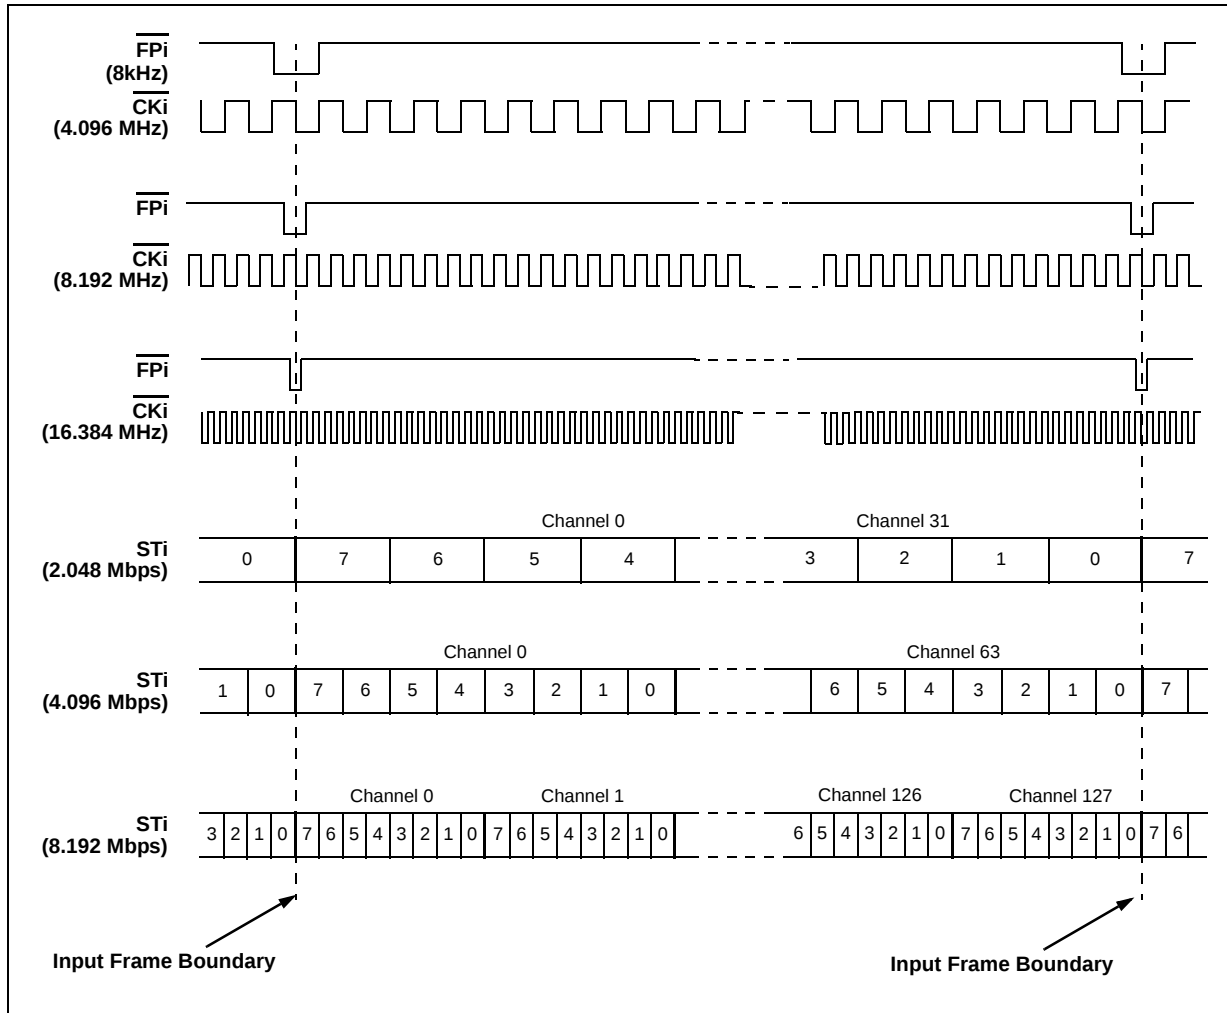


Figure 7 - ST-BUS Input Timing for Various Input Data Rates

### 2.1.4 Improved Input Jitter Tolerance with Frame Boundary Determinator

The ZL50011 has a Frame Boundary Determinator (FBD) allowing substantial increase of the CKi input clock jitter tolerance. The FBD circuit is enabled by setting the Control Register bits FBDEN and FBDMODE to HIGH. By default the FBD is disabled. Both the FBDEN and FBDMODE bits should be set HIGH during normal operation. The device can have 20 ns of input clock jitter tolerance (on CKi and FPi) when the FBD is fully enabled.

This jitter tolerance is related to the proper operation of the switch, and describes the amount of jitter that can be accepted on the CKi and FPi inputs. Do not confuse this with the DPLL jitter tolerance (Section 2.11.2) which describes the ability of the integrated DPLL to lock to an input reference (REF).

## 2.2 ST-BUS Output Data Rate and Output Timing

The device has 16 ST-BUS serial data outputs. Any of the 16 outputs can be programmed to deliver different data rates at 2.048 Mbps, 4.096 Mbps or 8.192 Mbps.

### 2.2.1 ST-BUS Output Operation Mode

Any ST-BUS output can be programmed to deliver the data at 2.048 Mbps, 4.096 Mbps or 8.192 Mbps mode using Bit 0 to 2 in the Stream Output Control Register, SOCR0 to SOCR15 as shown in Table 28 on page 60 and Table 29 on page 61.

### 2.2.2 Frame Pulse Output and Clock Output Timing

The device offers 3 frame pulse outputs,  $\overline{\text{FPo0}}$ ,  $\overline{\text{FPo1}}$  and  $\overline{\text{FPo2}}$ . All output frame pulses are 8 kHz output signals. By default, the output frame boundary is defined by the falling edge of the  $\overline{\text{CKo0}}$ ,  $\overline{\text{CKo1}}$  or  $\overline{\text{CKo2}}$  output clocks while the  $\overline{\text{FPo0}}$ ,  $\overline{\text{FPo1}}$  or  $\overline{\text{FPo2}}$  output frame pulse goes low respectively.

In addition to the default settings, users can also select different output frame pulse low cycles and output clock frequencies by programming the CKFP0, CKFP1 and CKFP2 bits in the Control Register. See Table 2, Table 3 and Table 4 for the bit usage in the Control Register:

| CKFP0 | $\overline{\text{FPo0}}$<br>Low Cycle | $\overline{\text{CKo0}}$ |
|-------|---------------------------------------|--------------------------|
| 0     | 244 ns                                | 4.096 MHz                |
| 1     | 122 ns                                | 8.192 MHz                |

Table 2 -  $\overline{\text{FPo0}}$  and  $\overline{\text{CKo0}}$  Output Programming

| CKFP1 | $\overline{\text{FPo1}}$ | $\overline{\text{CKo1}}$ |
|-------|--------------------------|--------------------------|
| 0     | 61 ns                    | 16.384 MHz               |
| 1     | 122 ns                   | 8.192 MHz                |

Table 3 -  $\overline{\text{FPo1}}$  and  $\overline{\text{CKo1}}$  Output Programming

| CKFP2 | $\overline{\text{FPo2}}$ | $\overline{\text{CKo2}}$ |
|-------|--------------------------|--------------------------|
| 0     | 30 ns                    | 32.768 MHz               |
| 1     | 61 ns                    | 16.384 MHz               |

Table 4 -  $\overline{\text{FPo2}}$  and  $\overline{\text{CKo2}}$  Output Programming

The device also delivers positive or negative output frame pulse and ST-BUS output clock formats via the programming of the FP0P, FP1P, FP2P, CK0P, CK1P and CK2P bits in the Internal Mode Selection (IMS) register. By default, the device delivers the negative output frame pulse and negative output clock formats.

Figure 8 to Figure 13 describe the usage of the CKFP0, CKFP1, CKFP2, FP0P, FP1P, FP2P, CK0P, CK1P and CK2P in the Control Register and Internal Mode Selection Register:

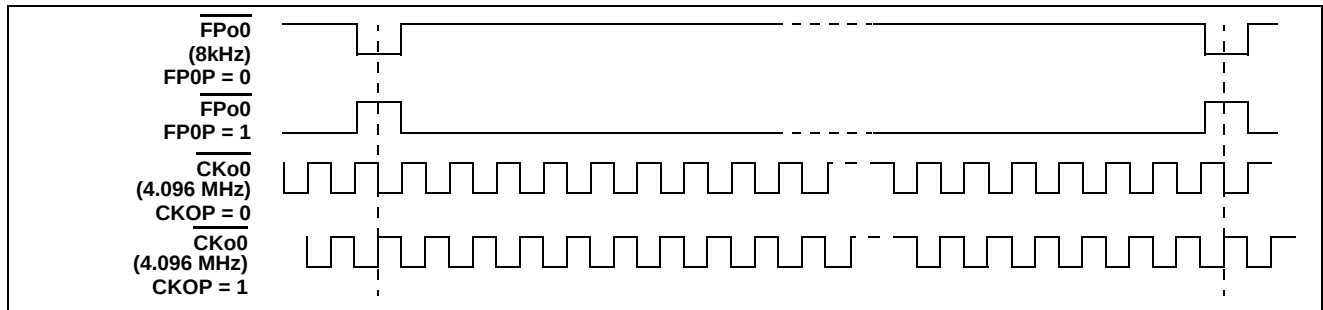


Figure 8 - FP00 and CK00 Output Timing when the CKFP0 Bit = 0

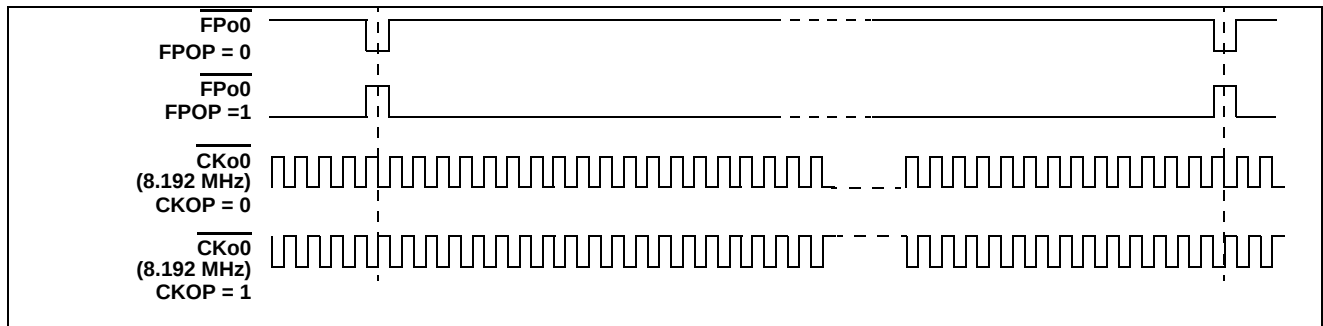


Figure 9 - FP00 and CK00 Output Timing when the CKFP0 Bit = 1

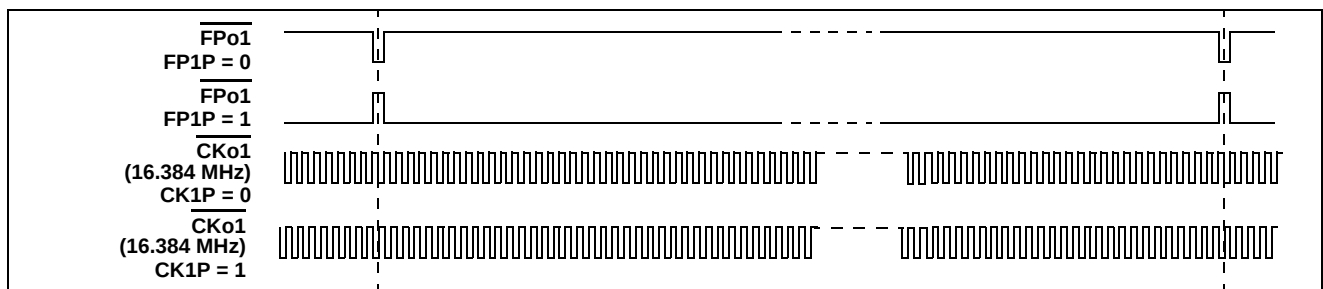


Figure 10 - FP01 and CK01 Output Timing when the CKFP1 Bit = 0

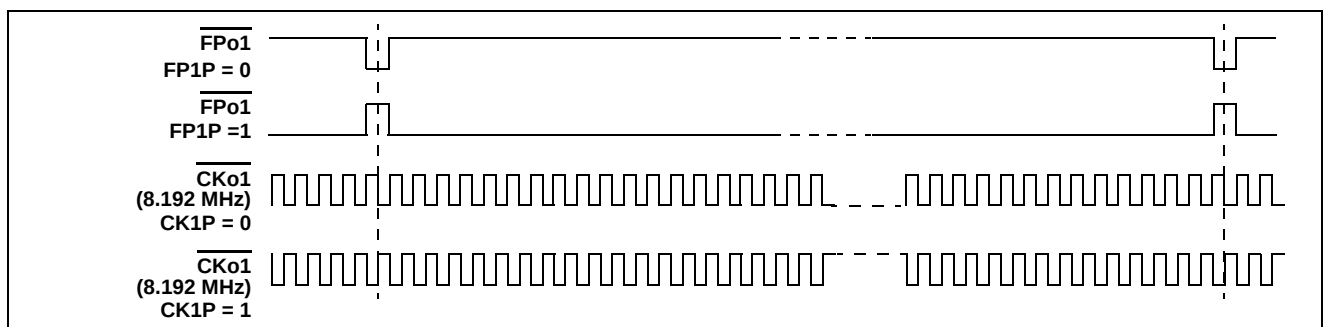


Figure 11 - FP01 and CK01 Output Timing when the CKFP1 Bit = 1

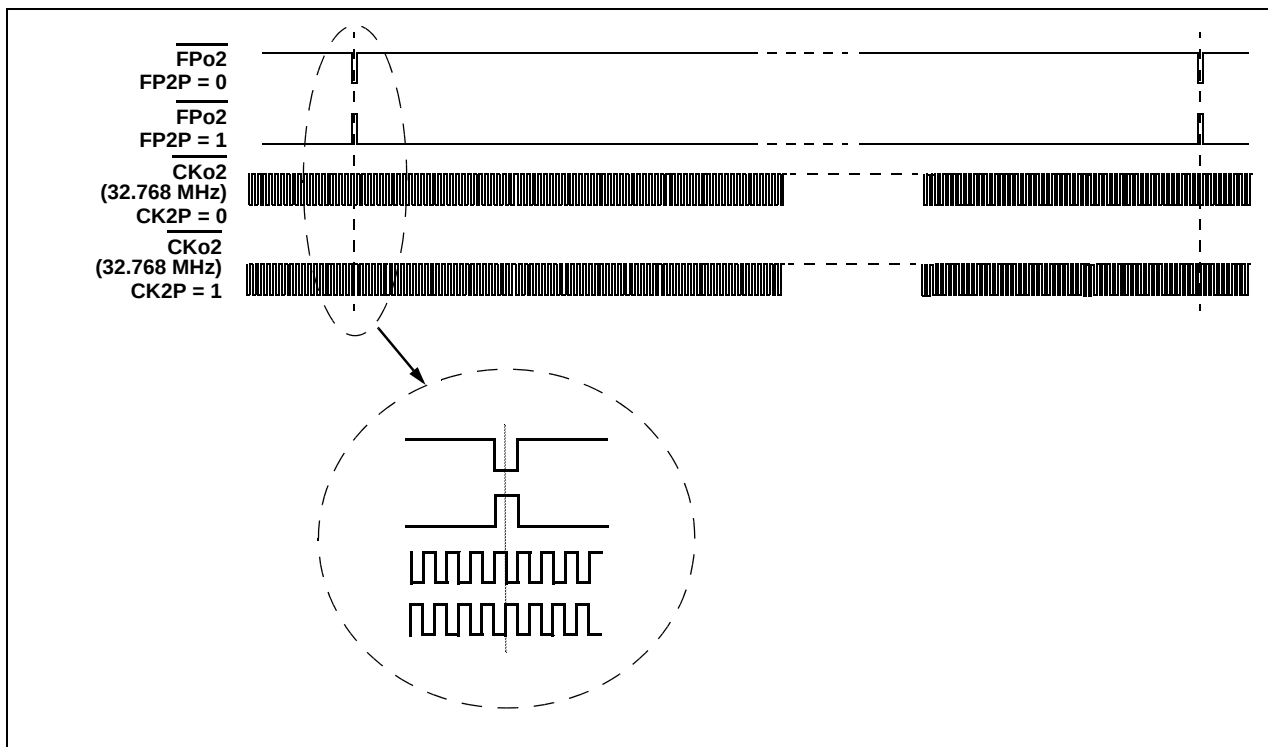


Figure 12 -  $\overline{\text{FPo2}}$  and  $\overline{\text{CKo2}}$  Output Timing when the CKFP2 Bit = 0

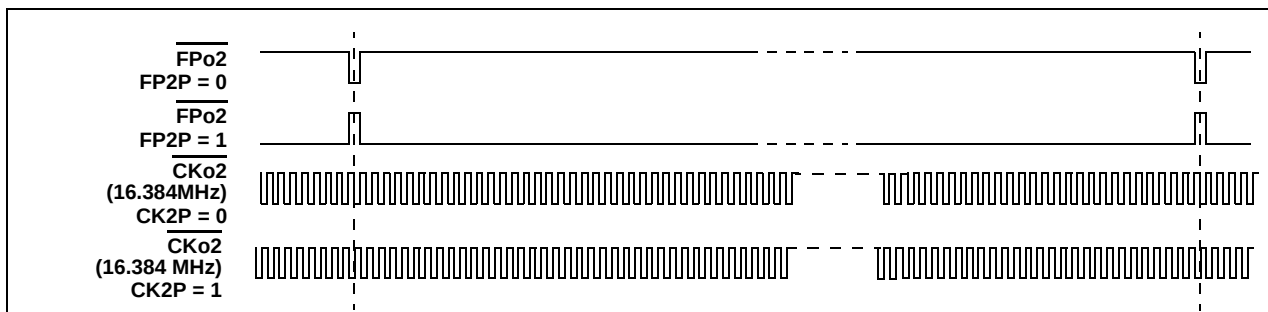


Figure 13 -  $\overline{\text{FPo2}}$  and  $\overline{\text{CKo2}}$  Output Timing when the CKFP2 Bit = 1

### 2.2.3 ST-BUS Output Timing

By default, the output frame boundary is defined by the falling edge of the  $\overline{\text{CKo0}}$ ,  $\overline{\text{CKo1}}$  or  $\overline{\text{CKo2}}$  output clock while the  $\overline{\text{FPo0}}$ ,  $\overline{\text{FPo1}}$  or  $\overline{\text{FPo2}}$  output frame pulse goes low respectively. When the output data rates are 2.048 Mbps, 4.096 Mbps and 8.192 Mbps, there are 32, 64 or 128 output channels per every ST-BUS frame respectively. Figure 14 describes the details.

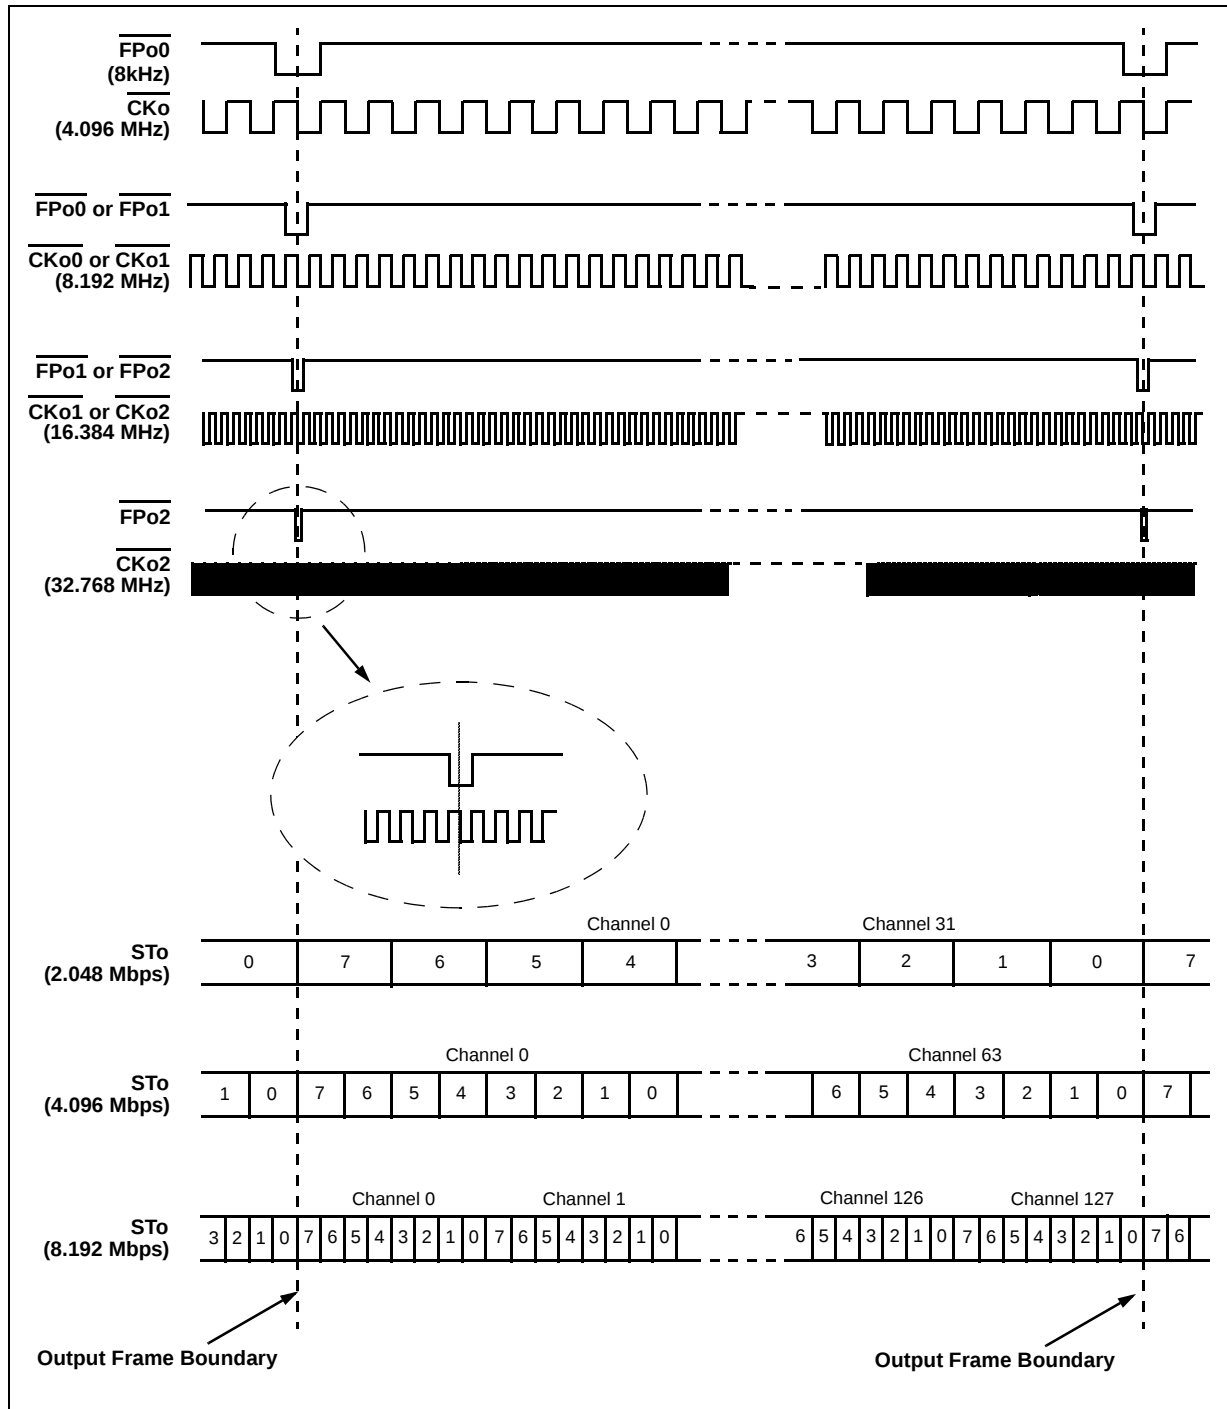


Figure 14 - ST-BUS Output Timing for Various Output Data Rates

## 2.3 Serial Data Input Delay and Serial Data Output Offset

Various registers are provided to adjust the input and output delays for every input and every output data stream. The input and output channel delay can vary from 0 to 31, 0 to 63 and 0 to 127 channel(s) for the 2.048 Mbps, 4.096 Mbps and 8.192 Mbps modes respectively.

The input and output bit delay can vary from 0 to 7 bits. The fractional input bit delay can vary from 1/4, 1/2, 3/4 to 4/4 bit. The fractional output bit advancement can vary from 0, 1/4, 1/2 to 3/4 bit.

### 2.3.1 Input Channel Delay Programming

This feature allows each input stream to have a different input frame boundary with respect to the input frame boundary defined by the FPI and CKI. By default, all input streams have channel delay of zero such that Ch0 is the first channel that appears after the input frame boundary (see Figure 15).

The input channel delay programming is enabled by setting Bit 3 to 9 in the Stream Input Delay Register (SIDR). The input channel delay can vary from 0 to 31, 0 to 63 and 0 to 127 for the 2.048 Mbps, 4.096 Mbps and 8.192 Mbps modes respectively.

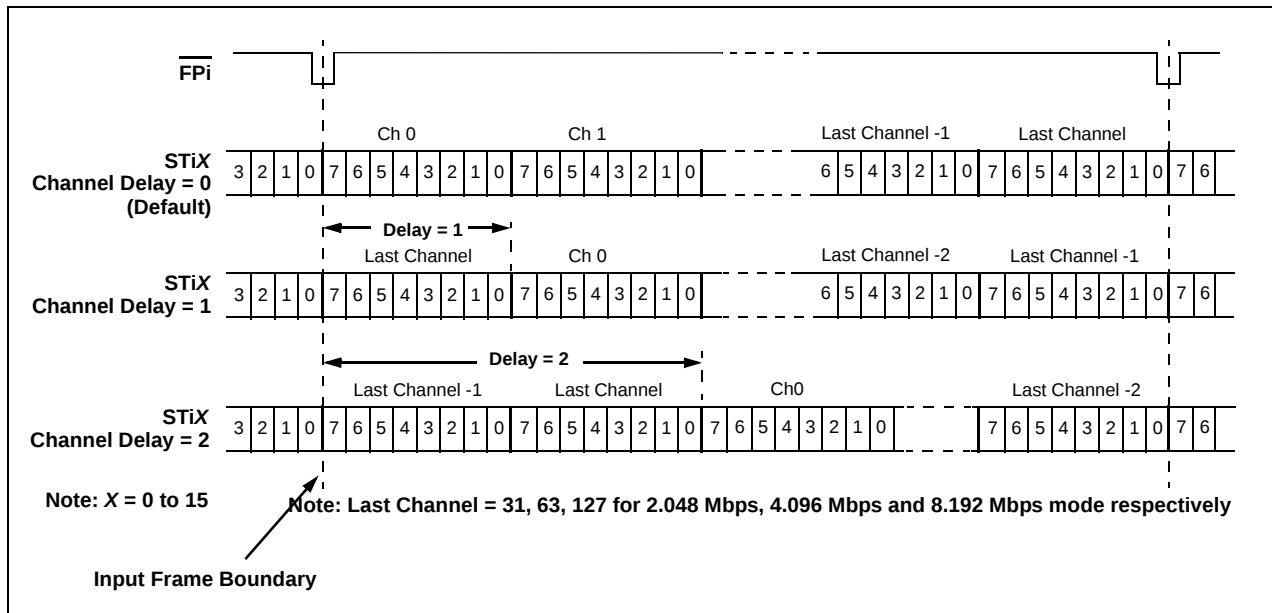


Figure 15 - Input Channel Delay Timing Diagram

### 2.3.2 Input Bit Delay Programming

In addition to the input channel delay programming, the input bit delay programming feature provides users with more flexibility when designing the switch matrices at high-speed, in which the delay lines are easily created on PCM highways which are connected to the switch matrix cards.

By default, all input streams have zero bit delay such that Bit 7 is the first bit that appears after the input frame boundary, see Figure 16. The input delay is enabled by Bit 0 to 2 in the Stream Input Delay Registers (SIDR). The input bit delay can vary from 0 to 7 bits.

### 2.3.3 Fractional Input Bit Delay Programming

In addition to the input bit delay feature, the device allows users to change the sampling point of the input bit. By default, the sampling point is at 3/4 bit. Users can change the sampling point to 1/4, 1/2, 3/4 or 4/4 bit position by programming Bit 3 and 4 of the Stream Input Control Registers (SICR).

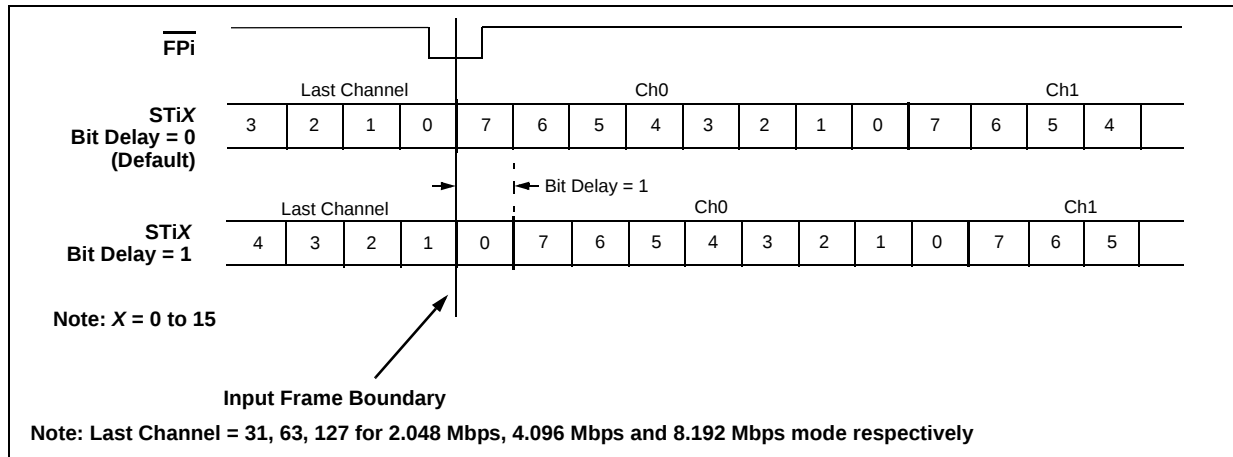


Figure 16 - Input Bit Delay Timing Diagram

### 2.3.4 Output Channel Delay Programming

This feature allows each output stream to have a different output frame boundary with respect to the output frame boundary defined by the output frame pulse (FPo0, FPo1 and FPo2) and the output clock (CKo0, CKo1 or CKo2). By default, all output streams have zero channel delay such that Ch 0 is the first channel that appears after the output frame boundary as shown in Figure 17. Different output channel delay can be set by programming Bit 5 to 11 in the Stream Output Offset Registers (SOOR). The output channel delay can vary from 0 to 31, 0 to 63 and 0 to 127 for the 2.048 Mbps, 4.096 Mbps and 8.192 Mbps modes respectively.

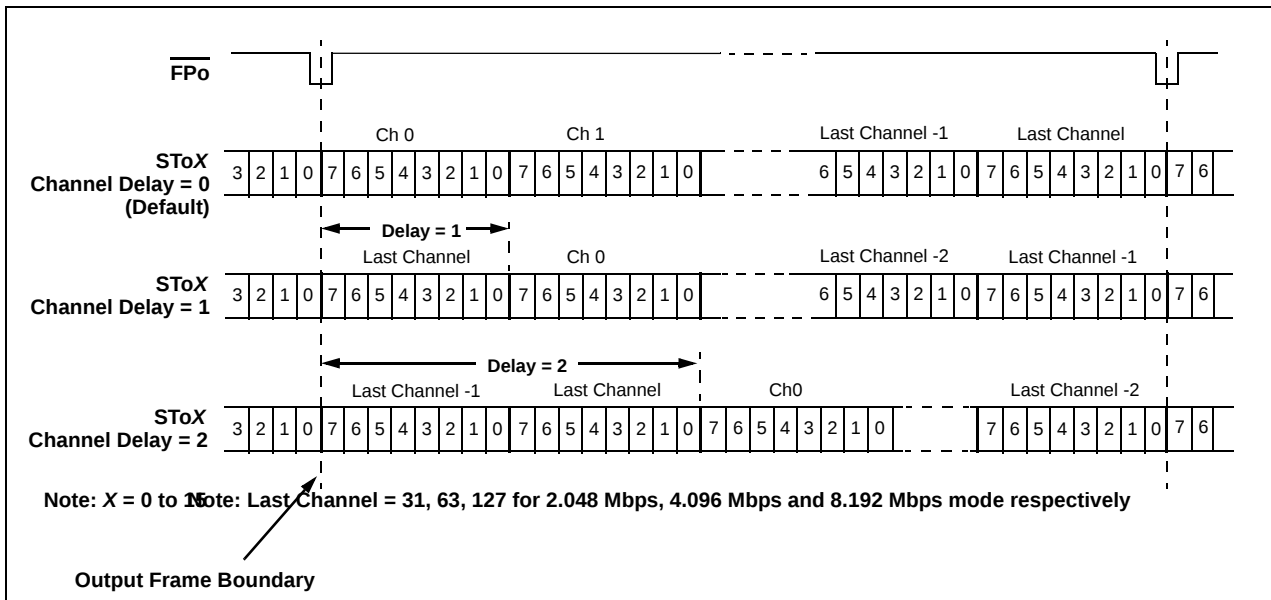


Figure 17 - Output Channel Delay Timing Diagram

### 2.3.5 Output Bit Delay Programming

This feature is used to delay the output data bit of individual output streams with respect to the output frame boundary. Each output stream can have its own bit delay value.

By default, all output streams have zero bit delay such that Bit 7 is the first bit that appears after the output frame boundary (see Figure 18 on page 25). Different output bit delay can be set by programming Bit 2 to 4 in the Stream Output Offset Registers. The output bit delay can vary from 0 to 7 bits.

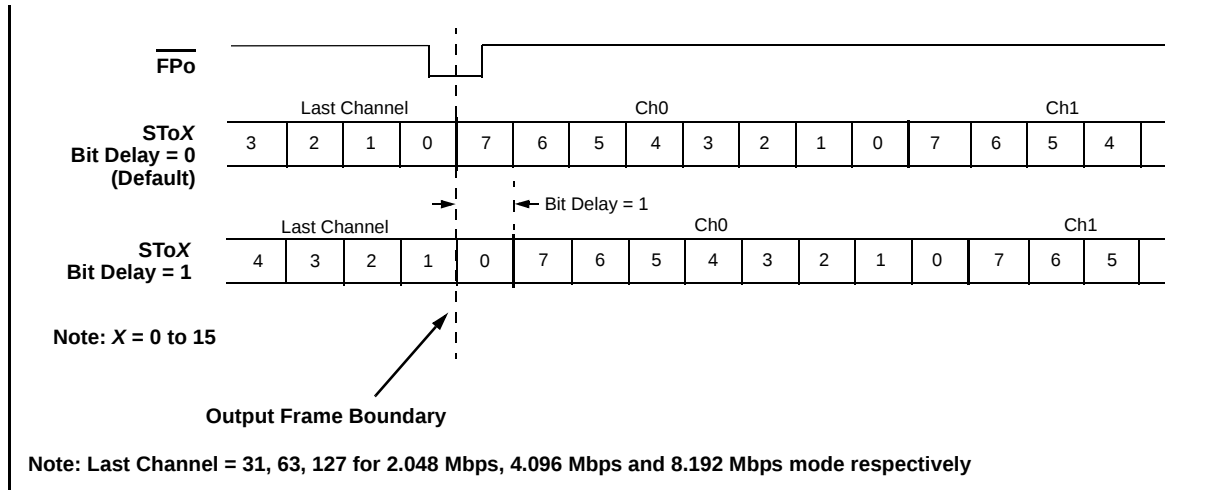


Figure 18 - Output Bit Delay Timing Diagram

### 2.3.6 Fractional Output Bit Advancement Programming

In addition to the output bit delay, the device is also capable of performing fractional output bit advancement. This feature offers a better resolution for the output bit delay adjustment. The fractional output bit advancement is useful in compensating for various parasitic loadings on the serial data output pins.

By default, all output streams have zero fractional bit advancement such that Bit 7 is the first bit that appears after the output frame boundary as shown in Figure 19. The fractional output bit advancement is enabled by Bit 0 to 1 in the Stream Output Offset Registers. The fractional bit advancement can vary from 0, 1/4, 1/2 or 3/4 bit.

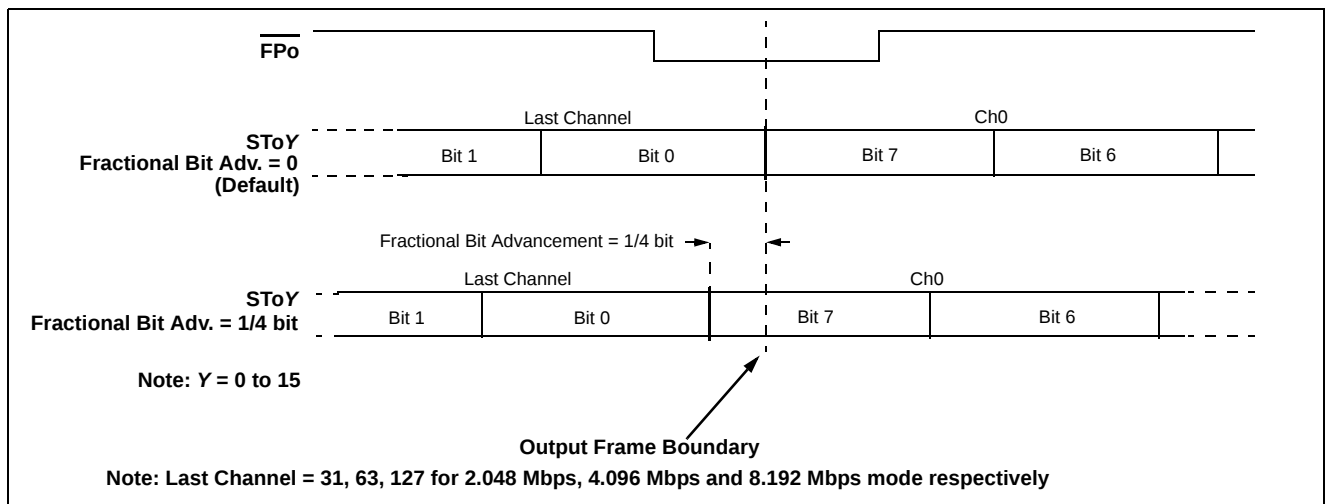


Figure 19 - Fractional Output Bit Advancement Timing Diagram

### 2.3.7 External High Impedance Control, STOHZ 0 to 15

The STOHZ 0 to 15 outputs are provided to control the external tristate ST-BUS drivers for per-channel high impedance operations. The STOHZ outputs are sent out in 32, 64 or 128 timeslots corresponding to the output channels for 2.048 Mbps, 4.096 Mbps and 8.192 Mbps output streams respectively. Each control timeslot lasts for one channel time.

When the ODE pin is high, the STOHZ 0 - 15 are enabled. When the ODE pin or the  $\overline{\text{RESET}}$  pin is low, the STOHZ 0 - 15 are driven high. STOHZ outputs are also driven high if their corresponding ST-BUS outputs are not in use.

Figure 20 gives an example when channel 2 of a given ST-BUS output is programmed in the high impedance state, the corresponding STOHZ pin drives high for one channel time at the channel 2 timeslot.

By default, the output timing of the STOHZ signals follow the same timing as their corresponding STo signals including any user-programmed output channel and bit delay and fractional bit advancement. In addition, the device allows users to advance the STOHZ signals from their default positions to a maximum of four 15.2 ns steps (or four 1/4 bit steps) using Bit 3 to 5 of the Stream Output Control Register (SOCR). Bit 6 in the Stream Output Control Register selects the step resolution as 15.2 ns or 1/4 data bit. The additional advancement feature allows the STOHZ signals to better match the high impedance timing required by the external ST-BUS drivers.

When the device is in DPLL Master mode (or Freerun mode) and the additional STOHZ advancement is set to zero, there is no phase difference between the STo0 - 15 and the STOHZ 0 to 15. When the device is in DPLL Master mode (or Freerun mode) and the additional STOHZ advance is **not** zero, the phase correction of 6.25 ns could happen between the STo0 - 15 and STOHZ 0 to 15 because these outputs are clocked by various internal clock edges and the DPLL output has the intrinsic jitter of 6.25 ns.

When the device is in the DPLL Bypass Mode, there is no phase correction between the STo0 -15 of the STOHZ 0 - 15 regardless whether the additional STOHZ advancement is enabled or disabled.

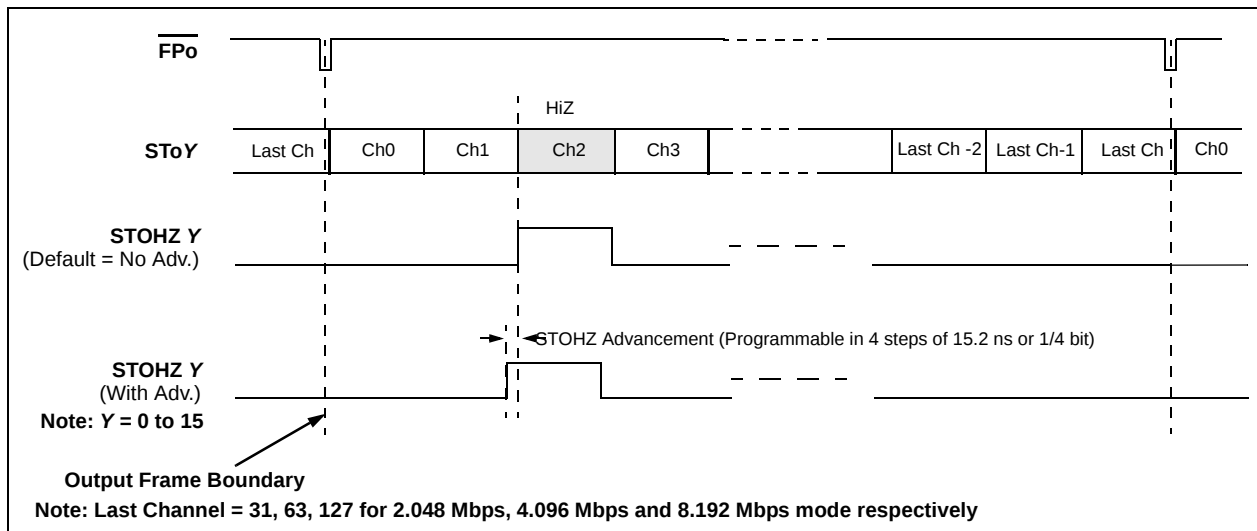


Figure 20 - Example: External High Impedance Control Timing

## 2.4 Data Delay Through The Switching Paths

To maintain the channel integrity in the constant delay mode, the usage of the input channel delay and output channel delay modes affect the data delay through various switching paths due to additional data buffers. The usage of these data buffers is enabled by the input and output channel delay bits (STIN#CD6-0 and STO#CD6-0) in the Stream Input Delay and Stream Output Offset Registers. However, the input and output bit delay or the input and output fractional bit offset have no impact on the overall data throughput delay.

In the following paragraphs, the data throughput delay (T) is expressed as a function of ST-BUS frames, input channel number (m), output channel number (n), input channel delay ( $\alpha$ ) and output channel delay ( $\beta$ ). Table 5 describes the variable range for input streams and Table 6 describes the variable range for output streams. Table 7 summarizes the data throughput delay under various input channel and output channel delay conditions.

| Input Stream Data Rate | Input Channel Number (m) | Possible Input channel delay ( $\alpha$ ) |
|------------------------|--------------------------|-------------------------------------------|
| 2 Mbps                 | 0 to 31                  | 1 to 31                                   |
| 4 Mbps                 | 0 to 63                  | 1 to 63                                   |
| 8 Mbps                 | 0 to 127                 | 1 to 127                                  |

**Table 5 - Variable Range for Input Streams**


| Output Stream Data Rate | Output Channel Number (m) | Possible Output channel delay ( $\beta$ ) |
|-------------------------|---------------------------|-------------------------------------------|
| 2 Mbps                  | 0 to 31                   | 1 to 31                                   |
| 4 Mbps                  | 0 to 63                   | 1 to 63                                   |
| 8 Mbps                  | 0 to 127                  | 1 to 127                                  |

**Table 6 - Variable Range for Output Streams**

| Input Channel Delay OFF<br>Output Channel Delay OFF | Input Channel Delay ON<br>Output Channel Delay OFF | Input Channel Delay OFF<br>Output Channel Delay ON | Input Channel Delay ON<br>Output Channel Delay ON |
|-----------------------------------------------------|----------------------------------------------------|----------------------------------------------------|---------------------------------------------------|
| $T = 2 \text{ frames} + (n-m)$                      | $T = 3 \text{ frames} - \alpha + (n-m)$            | $T = 2 \text{ frames} + \beta + (n-m)$             | $T = 3 \text{ frames} - \alpha + \beta + (n-m)$   |


**Table 7 - Data Throughput Delay**

By default, when the input channel delay and output channel delay are set to zero, the data throughput delay ( $T$ ) is:  $T = 2 \text{ frames} + (m-n)$ . Figure 21 shows the throughput delay when the input Ch0 is switched to the output Ch0.

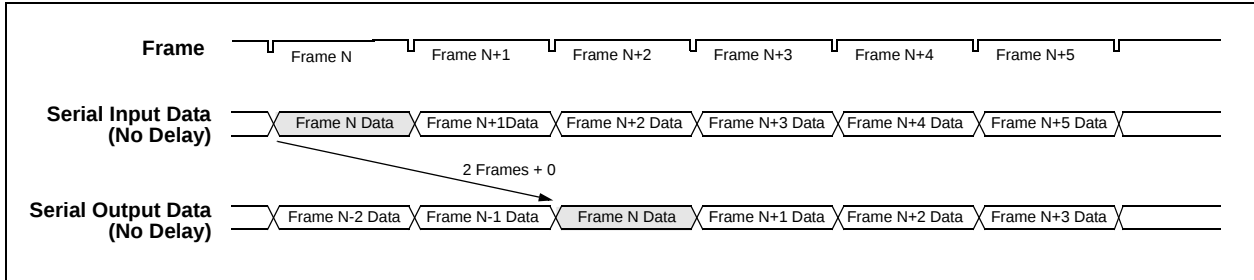


**Figure 21 - Data Throughput Delay when Input and Output Channel Delay are Disabled for Input Ch0 Switched to Output Ch0**

When the input channel delay is enabled and the output channel delay is disabled, the data throughput delay is:  $T = 3 \text{ frames} - \alpha + (m-n)$ . Figure 22 shows the data throughput delay when the input Ch0 is switched to the output Ch0.

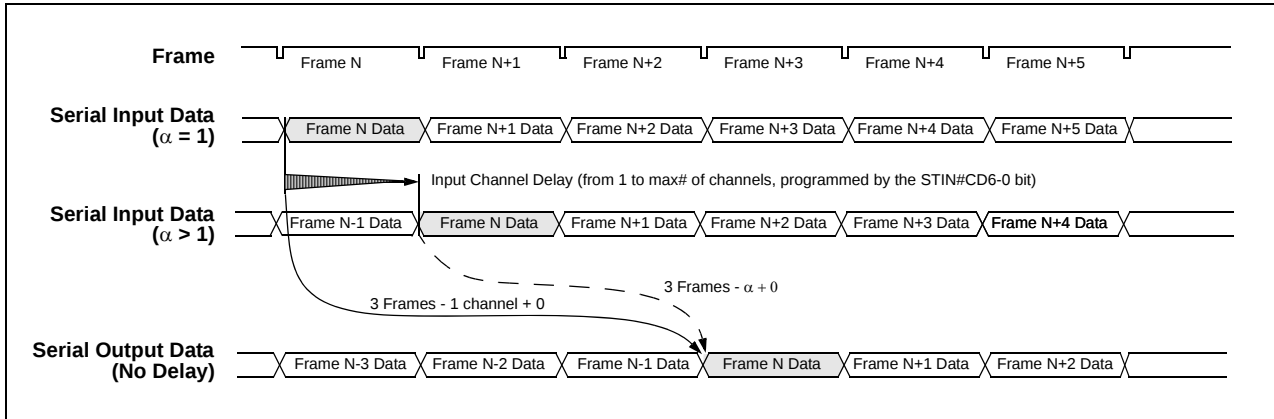

**Figure 22 - Data Throughput Delay when Input Channel Delay is Enabled and Output Channel Delay is Disabled for Input Ch0 Switched to Output Ch0**

When the input channel delay is disabled and the output channel delay is enabled, the throughput delay is:  $T = 2 \text{ frames} + \beta + (m-n)$ . Figure 23 shows the data throughput delay when the input Ch0 is switched to the output Ch0.

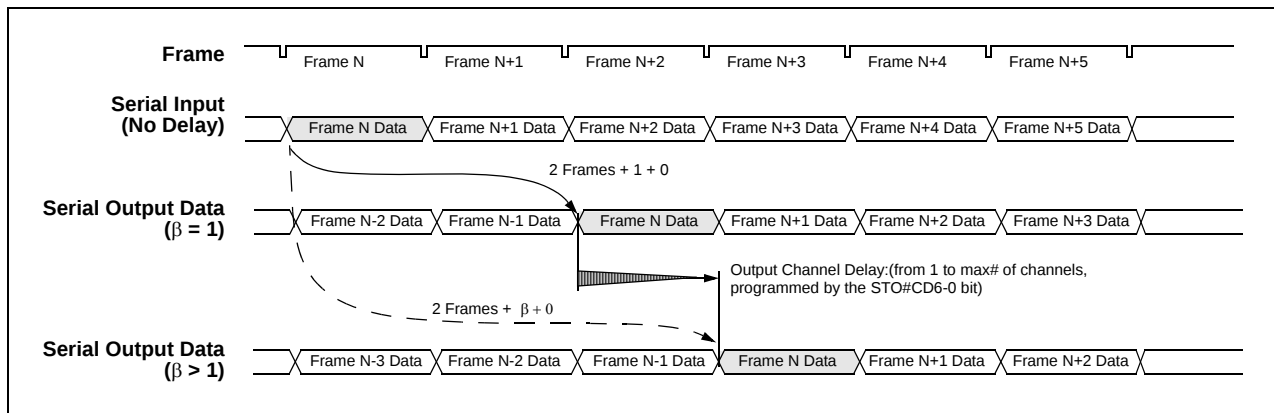

**Figure 23 - Data Throughput Delay when Input Channel Delay is Disabled and Output Channel Delay is Enabled for Input Ch0 Switch to Output Ch0**

When the input channel delay and the output channel delay are enabled, the data throughput delay is:  $T = 3 \text{ frames} - \alpha + \beta + (m-n)$ . Figure 24 shows the data throughput delay when the input Ch0 is switched to the output Ch0.

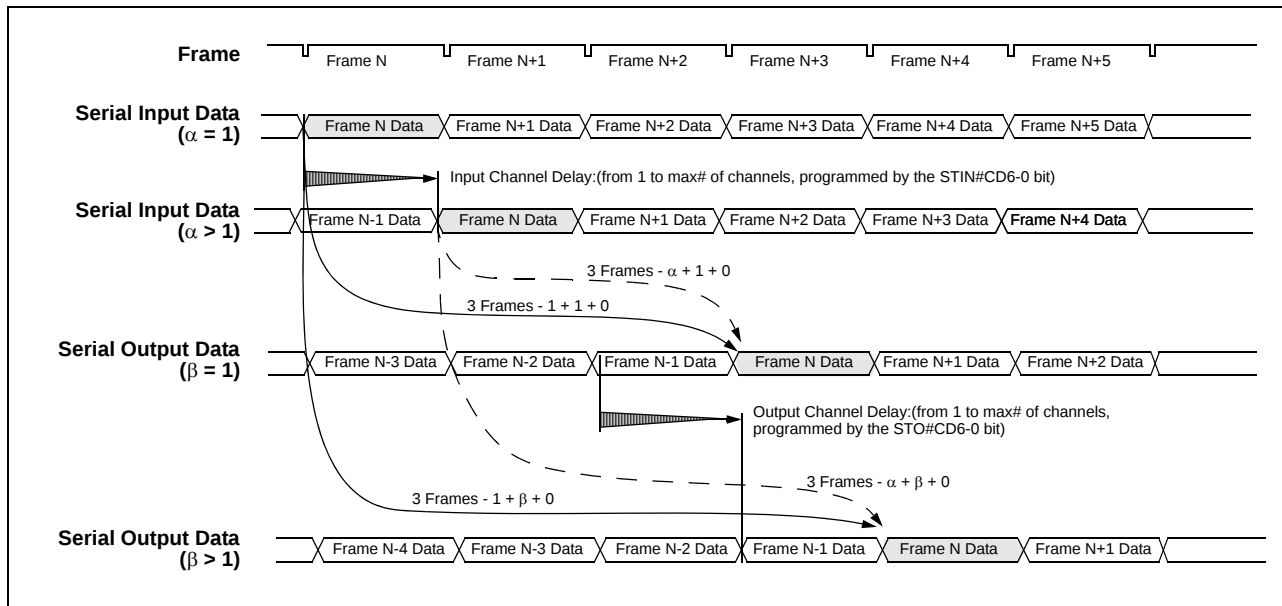


Figure 24 - Data Throughput Delay when Input and Output Channel Delay are Enabled for Input Ch0 Switched to Output Ch0

## 2.5 Connection Memory Description

The connection memory is 12-bit wide. There are 512 memory locations to support the ST-BUS serial outputs ST0-15. The address of each connection memory location corresponds to an output destination stream number and an output channel number. See Table 32 on page 64 for the connection memory address map.

When Bit 0 of the connection memory is **low**, Bit 1 to 7 define the source (input) channel address and Bit 8 to 11 define the source (input) stream address. Once the source stream and channel addresses are programmed by the microprocessor, the contents of the data memory at the selected address are switched to the mapped output stream and channel. See Table 33 on page 65 for details on the memory bit assignment when Bit 0 of the connection memory is low.

When Bit 0 of the connection memory is **high**, Bit 1 and 2 define the per-channel control modes of the output streams, the per-channel high impedance output control, the per-channel message and the per-channel BER test modes. In the message mode, the 8-bit message data located in Bit 3 to 10 of the connection memory will be transferred directly to the mapped output stream. See Table 34 on page 65 for details on the memory bit assignment when Bit 0 of the connection memory is high.

### 2.5.1 Connection Memory Block Programming

This feature allows fast initialization of the entire connection memory after power up. When block programming mode is enabled, the content of Bit 1 to 3 in the Internal Mode Selection (IMS) Register will be loaded into Bit 0 to 2 of all the 512 connection memory locations. The other bit positions of the connection memory will be loaded with zeros.

**Memory block programming procedure:**

(Assumption: The MBPE and MBPS bits are both low at the start of the procedure)

- Program Bit 1 to 3 (BPD0 to BPD2) in the IMS (Internal Mode Selection) register.
- Set the Memory Block Programming Enable (MBPE) bit in the Control Register to high to enable the block programming mode.
- Set the Memory Block Programming Start (MBPS) bit to high in the IMS Register to start the block programming. The BPD0 to BPD2 bits will be loaded into Bit 0 to 2 of the connection memory. The other bit positions of the connection memory will be loaded with zeros. The memory content after block programming is shown in Table 8.
- It takes 50μs for the connection memory to be loaded with the bit pattern defined by the BPD0 to BPD2 bits.
- After loading the bit pattern to the entire connection memory, the device will reset the MBPS bit to low, indicating that the process has finished.
- Upon completion of the block programming, set the MBPE bit from high to low to disable the block programming mode.

**Note:** Once the block programming is started, it can be terminated at any time prior to completion by setting the MBPS bit or the MBPE bit to low. If the MBPE bit is used to terminate the block programming before completion, users have to set the MBPS bit from high to low before enabling other device operation.

|    |    |   |   |   |   |   |   |   |      |      |      |
|----|----|---|---|---|---|---|---|---|------|------|------|
| 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2    | 1    | 0    |
| 0  | 0  | 0 | 0 | 0 | 0 | 0 | 0 | 0 | BPD2 | BPD1 | BPD0 |

**Table 8 - Connection Memory in Block Programming Mode**

**2.6 Bit Error Rate (BER) Test**

The ZL50011 has one on-chip BER transmitter and one BER receiver. The transmitter can transmit onto a single STo output stream only. The transmitter provides a BER sequence ( $2^{15}-1$  Pseudo Random Code) which can start from any channel in the frame and lasts from one channel up to one frame time (125 μs). The transmitter output channel(s) are specified by programming the connection memory location(s) corresponding to the channel(s) of the selected output stream: Bit 0 to 2 of the connection memory location(s) should be programmed to the BER test mode (see Table 34 on page 65).

Multiple connection memory locations can be programmed for BER test such that the BER patterns can be transmitted for several output channels which are consecutive. If the transmitting output channels are not consecutive, the BER receiver will not compare the bit patterns correctly.

The number of output channels which the BER transmitter occupies also has to be the same as the number of channels defined in the BER Length Register. The BER Length Register defines how many BER channels to be monitored by the BER receiver.

Registers used for setting up the BER test are as follows:

- Control Register (**CR**) - The CBER bit is used to clear the bit error counter and the BER Count Register (BCR). The SBER bit is used to start or stop the BER transmitter and BER receiver.
- BER Start Receiving Register (**BSRR**) - Defines the input stream and channel from where the BER sequence will start to be compared.
- BER Length Register (**BLR**) - Defines how many channels the sequence will last.

- **BER Count Register (BCR)** - Contains the number of counted errors. When the error count reaches Hex FFFF, the bit error counter will stop so that it will not overflow. Consequently the BER Count Register will also stop at FFFF. The CBER bit in the Control Register is used to reset the bit error counter and the BER Count Register.

As described above, the SBER bit in the control register controls the BER transmitter and receiver. To carry out the BER test, users should set the SBER bit to zero to disable the BER transmitter during the programming of the connection memory for the BER test. When the BER transmitter is disabled, the transmitter output is all ones. Hence any output channel whose connection memory has been programmed to BER test mode will also output all ones. Upon the completion of programming the connection memory for the BER test, set the SBER bit to one to start the BER transmitter and receiver for the BER testing. They must be allowed to run for several frames (2 frames plus the network delay between STo and STi) before the BER receiver can correctly identify errors in the pattern. Thus after this time the bit error counter should be reset by using the CBER bit in the Control Register - set CBER to one then back to zero. From now on, the count will be the actual number of errors which occurred during the test. The count will stop at FFFF and the counter will not increment even if more errors occurred.

## 2.7 Quadrant frame programming

By programming the input stream control registers (SICR0 to 15), users can divide 1 frame of input data into 4 quadrant frames and can force the Least Significant Bit (LSB, bit 0 in Figure 7 on page 18) of every input channel in these quadrants into "1" for the bit robbed signaling purpose. The 4 quadrant frames are defined as shown in Table 9.

| Data Rate  | Quadrant 0 | Quadrant 1  | Quadrant 2  | Quadrant 3   |
|------------|------------|-------------|-------------|--------------|
| 2.048 Mbps | Ch 0 to 7  | Ch 8 to 15  | Ch 16 to 23 | Ch 24 to 31  |
| 4.096 Mbps | Ch 0 to 15 | Ch 16 to 31 | Ch 32 to 47 | Ch 48 to 63  |
| 8.192 Mbps | Ch 0 to 31 | Ch 32 to 63 | Ch 64 to 95 | Ch 96 to 127 |

**Table 9 - Definition of the Four Quadrant Frames**

When a quadrant frame enable bit (STIN#QEN0, STIN#QEN1, STIN#QEN2 or STIN#QEN3) is set to high, the LSB of every input channels in the quadrant is forced to "1". See Table 10 to Table 13 for details:

| STIN#QEN0 | Action                                              |
|-----------|-----------------------------------------------------|
| 1         | Replace LSB of every channel in Quadrant 0 with "1" |
| 0         | No bit replacement occurs in Quadrant 0             |

**Table 10 - Quadrant Frame 0 LSB Replacement**

| STIN#QEN1 | Action                                              |
|-----------|-----------------------------------------------------|
| 1         | Replace LSB of every channel in Quadrant 1 with "1" |
| 0         | No bit replacement occurs in Quadrant 1             |

**Table 11 - Quadrant Frame 1 LSB Replacement**

| STIN#QEN2 | Action                                              |
|-----------|-----------------------------------------------------|
| 1         | Replace LSB of every channel in Quadrant 2 with "1" |
| 0         | No bit replacement occurs in Quadrant 2             |

**Table 12 - Quadrant Frame 2 LSB Replacement**

| STIN#QEN3 | Action                                              |
|-----------|-----------------------------------------------------|
| 1         | Replace LSB of every channel in Quadrant 3 with "1" |
| 0         | No bit replacement occurs in Quadrant 3             |

**Table 13 - Quadrant Frame 3 LSB Replacement**

## 2.8 Microprocessor Port

The device supports the non-multiplexed microprocessor. The microprocessor port consists of a 16-bit parallel data bus (D0 to 15), a 12-bit address bus (A0 to 11) and four control signals ( $\overline{CS}$ ,  $\overline{DS}$ , R/W and DTA). The parallel microprocessor port provides fast access to the internal registers, the connection and the data memories.

The 512 connection memory locations can be read or written via the 16-bit microprocessor port. On the other hand, the 512 data memory locations can only be read (but not written) from the microprocessor port.

For the connection memory write operation, D0 to 11 of the data bus will be used and D12 to 15 are ignored (D12 to 15 should be driven low). For the connection memory read operation, D0 to D11 will be used and D12 to D15 will output zeros. For the data memory read operation, D0 to D7 will be used and D8 to D15 will output zeros.

See Table 32 on page 64 for the address mapping of the data memory. Refer to Figure 47 on page 79 for the microprocessor port timing.

## 2.9 Digital Phase-Locked Loop (DPLL) Operation

The DPLL meets the requirements of Telcordia GR-1244-CORE Stratum 4 specifications (Stratum 4). It can be set into one of three operating modes: Master, Freerun or Bypass.

The input streams STi0-15 are always sampled with the ST-BUS input clock  $\overline{CKi}$ . The ST-BUS input frame pulse  $\overline{FPi}$  denotes the input frame boundary. The objective of the DPLL is to generate the high-speed internal clock MCKTDM (see Figure 25 on page 34). MCKTDM provides timing for the TDM switching function and timing for the ST-BUS outputs. (In this context CKo0-2, FPo0-2, STo0-15 and STOHZ0-15 are collectively known as the ST-BUS outputs.)

- In Master mode, the DPLL synchronizes to the input timing reference to generate the internal clock MCKTDM. Typically the timing reference is from the network. The DPLL provides jitter attenuation function. The Master mode ST-BUS output clocks and frame pulses are synchronized to the network reference and can be used as a system's ST-BUS timing source.
- In Freerun mode, the DPLL is not synchronized to the timing reference. It synthesizes the internal clock MCKTDM based on the oscillator clock. Typically Freerun mode is used when a system's timing is independent of the network. In that case, the Freerun mode ST-BUS output clocks and frame pulses must be used as the system's ST-BUS timing source.
- In Bypass mode, the DPLL is completely bypassed. The Analog Phase-Locked Loop (APLL) synchronizes to the ST-BUS input clock CKi to generate the internal clock MCKTDM. Bypass mode is used when the system's ST-BUS timing is supplied by another device, e.g. another ZL50011 in Master mode.

Table 14 shows the three operating modes of the DPLL. The DPLL is controlled by the DOM (DPLL Operation Mode) register and bit 14 of the Control Register (CR). The DPLL's status is reported in the DPLL House Keeping Register (DHKR). The DPOA (DPLL Output Adjustment) register advances or delays the ST-BUS outputs with respect to the reference. These registers are described in Table 16 on page 47 for CR, Table 21 on page 52 for DOM, Table 22 on page 53 for DOA, and Table 23 on page 53 for DHKR.

| Bit 14 of CR | Bit 0 of DOM | Mode         |
|--------------|--------------|--------------|
| 0            | 0            | Master mode  |
| 0            | 1            | Freerun mode |
| 1            | 1 or 0       | Bypass mode  |

**Table 14 - DPLL Operating Mode Settings**

The DPLL intrinsic jitter is 6.25 ns peak to peak. In Master and Freerun modes, the DPLL intrinsic jitter will be added onto the ST-BUS outputs. In Bypass mode, the DPLL is completely bypassed and the DPLL intrinsic jitter will not be added to the ST-BUS outputs.

### 2.9.1 DPLL Master Mode

DPLL Master mode is selected by the setting shown in Table 14. Asserting the  $\overline{\text{RESET}}$  pin low will also put the DPLL into Master mode since RESET clears all the registers. In Master mode, the DPLL generates the MCKTDM clock synchronized to the timing reference and provides jitter attenuation. MCKTDM provides timing for the TDM switching function and for the ST-BUS outputs. Hence the Master mode ST-BUS output clocks and frame pulses are synchronized to the reference and can be used to provide a system's ST-BUS timing.

The DPLL has access to an independent external reference at the REF input pin. Typically REF is from the network. Alternatively, REF can be replaced by an internal 8 kHz signal (CKi/FPi) derived from the CKi and FPi inputs.

The nominal frequency of the REF input can be programmed to be either 8 kHz, 1.544 MHz or 2.408 MHz via the FP1-0 bits of the DOM register. When the internal 8 kHz signal CKi/FPi is selected as the reference instead of REF, the FP1-0 bits must be set to 00.

The DPLL operates on the rising edge of the selected reference. The polarity of the REF input can be inverted via the PINV bit of the DOM register.

The selected reference (either REF or CKi/FPi) is continuously monitored. Its validity is reported in the PFD bit of the DHKR register.

The ST-BUS outputs ( $\overline{\text{CKo0-2}}$ ,  $\overline{\text{FPo0-2}}$ ,  $\text{STo0-15}$  and  $\text{STOHZ0-15}$ ) can be shifted to lead (advancement) or lag (delay) the reference. The DPOA register provides this adjustment. Coarse lead or lag adjustment is programmed via the POS6-0 bits, while fine delay (lag) control is via the SKC2-0 bits.

### 2.9.2 DPLL Freerun Mode

DPLL Freerun mode is selected by the setting in Table 14. In Freerun mode, the DPLL is not synchronized to the reference. The DPLL synthesizes the internal clock MCKTDM very accurately. MCKTDM provides timing for the TDM switching function and for the ST-BUS outputs. Since the DPLL is not synchronized to the reference, the ST-BUS outputs are also not synchronized to the reference.

The DPLL can switch to the Freerun mode at any time. Freerun mode is typically used when a master clock source is required, or immediately following system power-up before network synchronization is achieved. If a ZL50011 is to be operated exclusively in Freerun mode, then its ST-BUS output clock and frame pulse must be used as the ST-BUS input clock and frame pulse to all TDM devices in the system, including the device itself.

### 2.9.3 DPLL Bypass Mode

DPLL Bypass mode is selected by setting high bit 14 of the Control Register (CR), as shown in Table 14. The DPLL is completely bypassed and the APLL takes its input from CKi instead of the oscillator. The APLL multiplies the ST-BUS input clock CKi with an appropriate frequency multiplication factor to generate the internal clock MCKTDM.

MCKTDM is synchronized to CKi. MCKTDM provides timing for the TDM switching function and for the ST-BUS outputs. Hence the ST-BUS outputs are synchronized to CKi. The DPLL intrinsic jitter will not be added onto the ST-BUS outputs because the DPLL is completely bypassed.

In this mode, the APLL takes its input from CKi instead of the oscillator. If the device is to be used in this mode only, external 20 MHz oscillator is not required, but the XTALi pin should still get a valid clock signal so that the device can be initialized. The easiest way is to tie the CKi clock to the XTALi pin. The XTALo pin must be left unconnected.

Bypass mode is used when another device, such as another ZL50011 in Master mode, is providing system timing.

### 2.10 DPLL Functional Description

Figure 25 shows the functional block diagram of the DPLL. Major functional blocks are described in the following sections. When the DPLL is in Master or Freerun mode, the APLL input is C20i from the oscillator and the APLL multiplies C20i to generate the DPLL master clock MCKDPLL.


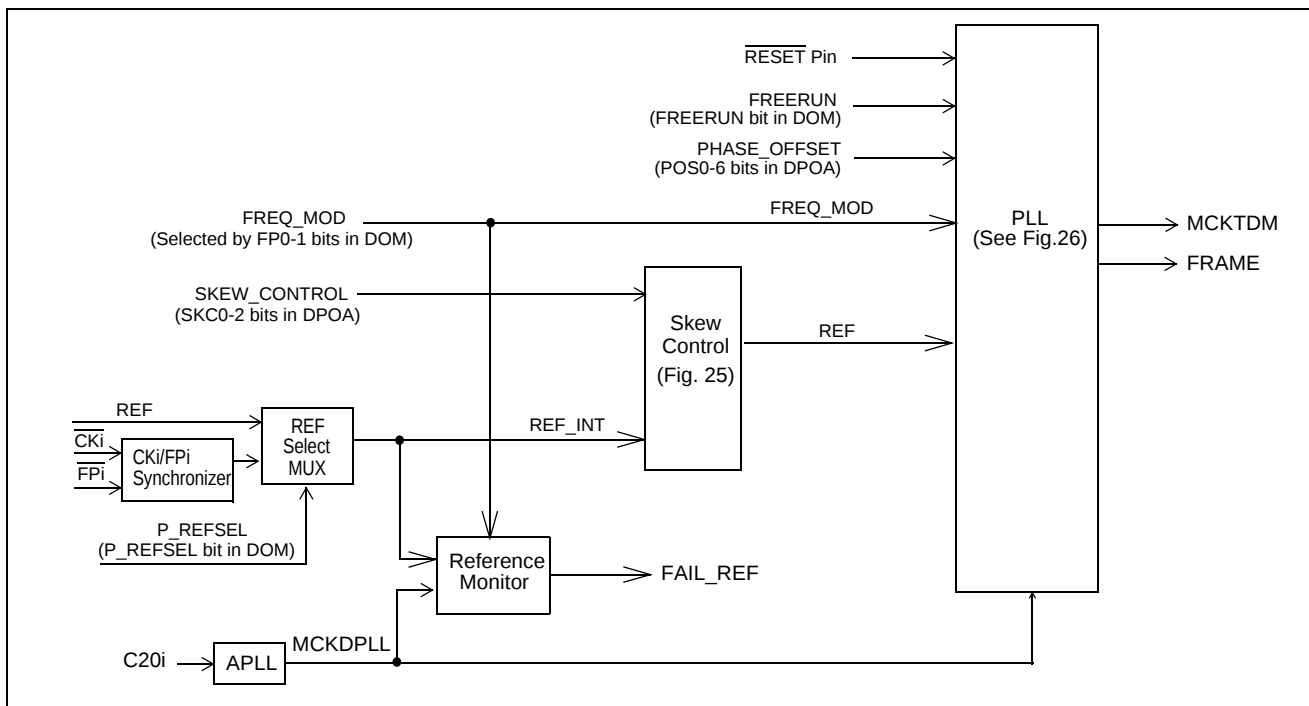


Figure 25 - DPLL Functional Block Diagram

#### 2.10.1 CKi/FPi Synchronizer and REF Select Mux

The ST-BUS input frame pulse ( $\overline{\text{FPi}}$ ) is sampled with the ST-BUS input clock ( $\overline{\text{CKi}}$ ) inside the CKi/FPi synchronizer to create the 8 kHz reference CKi/FPi. Either CKi/FPi or REF is selected by the reference select bit (P\_REFSEL in the DOM register) as the REF\_INT input to the Skew Control Circuit.

### 2.10.2 Skew Control Circuit

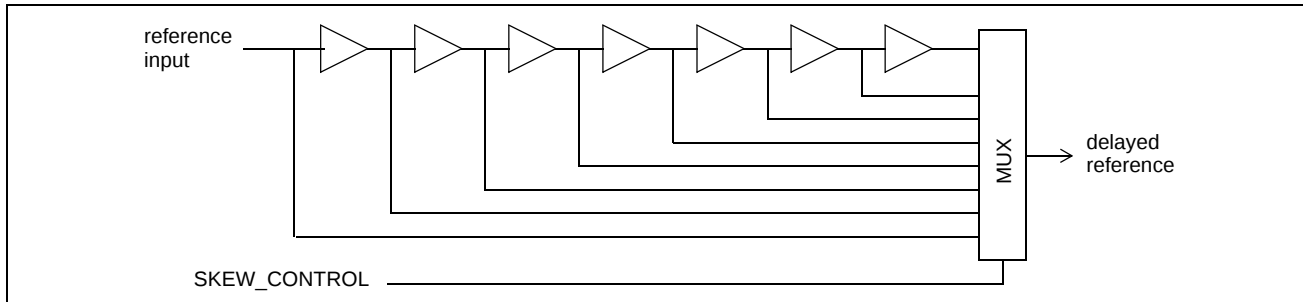

**Figure 26 - Skew Control Circuit Diagram**

The Skew Control circuit delays the selected reference input with an 8 tap tapped delay line (see Figure 26). The nominal delay between taps is 1.9 ns. Thus the selected reference can be delayed by 0 to 13.3 ns in steps of 1.9 ns (0 to 7 steps). The output tap is selected by SKEW\_CONTROL which corresponds to the SKC2-0 bits of the DPLL Output Adjustment (DPOA) register. Skewing the reference will cause the feedback signal in the PLL block (FEEDBACK in Figure 27 on page 36) to be delayed by the skew amount with respect to the original reference. This will cause the DPLL output to be delayed by the skew amount. Hence the ST-BUS outputs will be delayed by the skew amount.


### 2.10.3 Reference Monitor Circuit

The Reference Monitor circuit continuously monitors the selected reference and reports the reference's validity. The output signal is FAIL\_REF which is available at the DHKR register PFD bit. A logic high indicates that the reference has become invalid. The validity criteria depends on the frequency programmed for the reference. The reference must meet all criteria applicable to its frequency, which are:

- The "minimum 90 ns" check is performed regardless of the programmed frequency. Both the logic high and low duration of the reference must be at least 90 ns.
- The "period in specified range" check is performed regardless of the programmed frequency. Each period must be within a range. For 1.544 MHz and 2.048 MHz, the range is  $1-1/4$  to  $1+1/4$  nominal period. For 8 kHz, the range is  $1-1/32$  to  $1+1/32$  nominal period.
- If the programmed frequency is 1.544 MHz or 2.048 MHz, the "64 periods in specified range" check will be performed. The time taken for 64 consecutive cycles must be between 62 and 66 periods of the programmed frequency.

### 2.10.4 Phase-Locked Loop (PLL) Circuit

As shown in Figure 27, the PLL circuit consists of a Phase Detector, Phase Offset Adder, Phase Slope Limiter, Loop Filter, Digitally Controlled Oscillator, Divider and Frequency Select Mux.

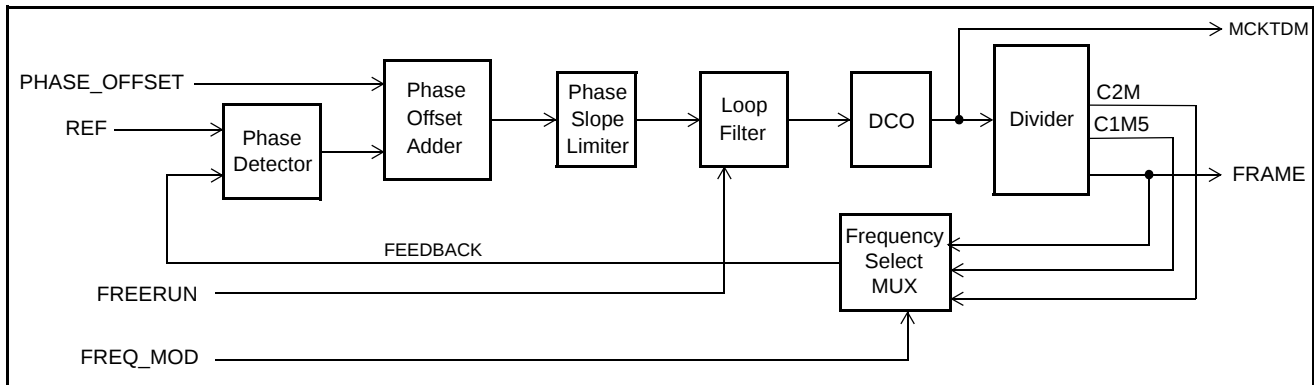

**Figure 27 - Block Diagram of the PLL Module**

**Phase Detector** - The Phase Detector compares the reference signal from the Skew Control circuit (REF) with the FEEDBACK signal from the Frequency Select Mux. It provides an error signal corresponding to the phase difference between the signals' rising edges. This error signal is passed to the Phase Offset Adder.

**Phase Offset Adder** - The Phase Offset Adder adds the PHASE\_OFFSET word (POS6-0 bits of the DPOA register) to the error signal from the Phase Detector to create the final phase error. This value is passed to the Phase Slope Limiter. The phase offset word (POS6-0) can be positive or negative. Since the PLL will stabilize to a situation where the average Phase Offset Adder output is zero, a non-zero phase offset word will result in a static phase offset between the input and output of the DPLL.

The phase offset word is a 7 bit 2's complement value. If the selected input reference is 8 kHz or 2.048 MHz, the step size of the static phase offset is 15.2 ns. The static phase offset can be set between -0.96  $\mu$ s and +0.97  $\mu$ s. If the selected input reference is 1.544 MHz, the step size is 20.2 ns and the static phase offset can be set between -1.27  $\mu$ s and +1.29  $\mu$ s.

The resolution of the Skew Control circuit is 1.9 ns. Its effect is additional to that of the phase offset word. Thus using the Skew Control bits (SKC2-0 of the DPOA register) together with the phase offset word, users can set a total static phase offset between -0.96  $\mu$ s and +0.99  $\mu$ s if the selected input reference is either 8 kHz or 2.048 MHz. If the selected reference is 1.544 MHz, the total static phase offset can be between -1.27  $\mu$ s and +1.30  $\mu$ s.

**Phase Slope Limiter** - The Phase Slope Limiter receives the error signal from the Phase Offset Adder and ensures that the DPLL output responds to all input transient conditions with an output phase slope below a preset limit. The limit is based upon telecom standards requirements.

**Loop Filter** - The Loop Filter is similar to a first order low pass filter with a 1.52 Hz cutoff frequency for all 3 reference frequency selections (8 kHz, 1.544 MHz or 2.048 MHz). This filter defines the jitter transfer characteristic of the DPLL.

**Digitally Controlled Oscillator (DCO)** - In Master mode, the DCO generates a high-speed digital clock output whose frequency is modulated by the frequency offset value from the Loop Filter. The offset value represents the limited and filtered phase error between the input reference and the DCO feedback signal. Based on the offset value the DCO generates an output clock which is synchronized to the selected input reference. The DCO output is the MCKTDM clock in Figure 25 on page 34 and Figure 27 on page 36. MCKTDM provides timing for the TDM switching function, and timing for the ST-BUS outputs.

When the DPLL is in Freerun mode, the frequency offset is ignored and the DCO is free running at its preset center frequency.

Divider - The Divider divides down the DCO output frequency. The following signals are generated:

- C2M (a 2.048 MHz clock)
- C1M5 (a 1.544 MHz clock)
- FRAME (an 8 kHz frame pulse)

One of these signals is selected as the PLL feedback reference signal by the Frequency Select Mux circuit. The clocks have 50% nominal duty cycle. FRAME is a 122 ns wide negative frame pulse. The duty cycle of the clocks are not affected by the crystal oscillator duty cycle. Since these signals are generated from a common signal inside the DPLL, the frame pulse and clock outputs are always locked to one another. They are also locked to the selected input reference when the DPLL is in lock.

Frequency Select Mux - According to the selected input reference of the DPLL, this multiplexer will select the appropriate divider output C2M, C1M5 or FRAME as the feedback signal in the PLL circuit.

## 2.11 DPLL Performance

The following are some synchronizer performance indicators and their definitions. The performance of the DPLL is also indicated.

### 2.11.1 Intrinsic Jitter

Intrinsic jitter is the jitter produced by a synchronizer and is measured at its output. It is measured by applying a jitter free reference signal to the input of the device, and measuring its output jitter. Intrinsic jitter may also be measured when the device is in a non-synchronizing mode, such as free running or holdover, by measuring the output jitter of the device. Intrinsic jitter is usually measured with various band-limiting filters depending on the applicable standards.

Intrinsic jitter is applicable only in Master and Freerun modes since in Bypass mode the DPLL is completely bypassed.

The DPLL's intrinsic jitter is 6.25 ns peak to peak. The intrinsic jitter will be added to the ST-BUS outputs  $\overline{\text{CKo0-2}}$ ,  $\overline{\text{FPo0-2}}$ ,  $\text{STo0-15}$  and  $\text{STOHZ0-15}$ . Since the DPLL master clock (MCKDPLL) comes from the on chip APLL which is driven by the oscillator, any jitter on the oscillator will be added unattenuated onto the intrinsic jitter.

### 2.11.2 DPLL Jitter Tolerance

Jitter tolerance is a measure of the ability of a PLL to operate properly without cycle slips (i.e., remain in lock and/or regain lock in the presence of large jitter magnitudes at various jitter frequencies) when jitter is applied to its reference. The applied jitter magnitude and the jitter frequency depends on the applicable standards.

The DPLL's jitter tolerance meets Telcordia GR-1244-CORE DS1 reference input jitter tolerance requirements.

### 2.11.3 Jitter Transfer

Jitter transfer or jitter attenuation refers to the magnitude of jitter at the output of a device for a given amount of jitter at the input of the device. Input jitter is applied at various amplitudes and frequencies, and output jitter is measured with various filters depending on the applicable standards.


Since intrinsic jitter is always present, jitter attenuation will appear to be lower for small input jitter signals than for large ones. Consequently, accurate jitter transfer function measurements are usually made with large input jitter signals (e.g., 75% of the specified maximum jitter tolerance).

The DPLL's jitter transfer characteristic is determined by the internal 1.52 Hz low pass Loop Filter and the Phase Slope Limiter. The DPLL is a second order, Type 2 PLL. Figure 28 on page 38 shows the DPLL jitter transfer characteristic over a wide range of frequencies, while Figure 29 on page 39 expands the portion of Figure 28 around the 0 dB jitter transfer region. The jitter transfer function can be described as a low pass filter to 1.52 Hz, -20 dB/decade, with peaking less than 0.5 dB.


#### 2.11.4 Frequency Accuracy

Frequency accuracy is defined as the absolute tolerance of an output clock when the synchronizer is not locked to an external reference, but is in a free running mode.

In Freerun mode, the DPLL is not synchronized to any reference. The DPLL provides output clocks and frame pulses based on the DPLL master clock. The PLL block's DCO circuit ignores its frequency offset input and free runs at its center frequency. Because of the granularity of the center frequency control value, the DCO free run frequency is -0.03 ppm off the ideal frequency. The DCO is clocked by the DPLL master clock MCKDPLL. The APLL generates the DPLL master clock from the oscillator. Thus the DPLL free run accuracy is affected by the oscillator accuracy. The DPLL free run accuracy is -0.03 ppm plus the accuracy of the oscillator.

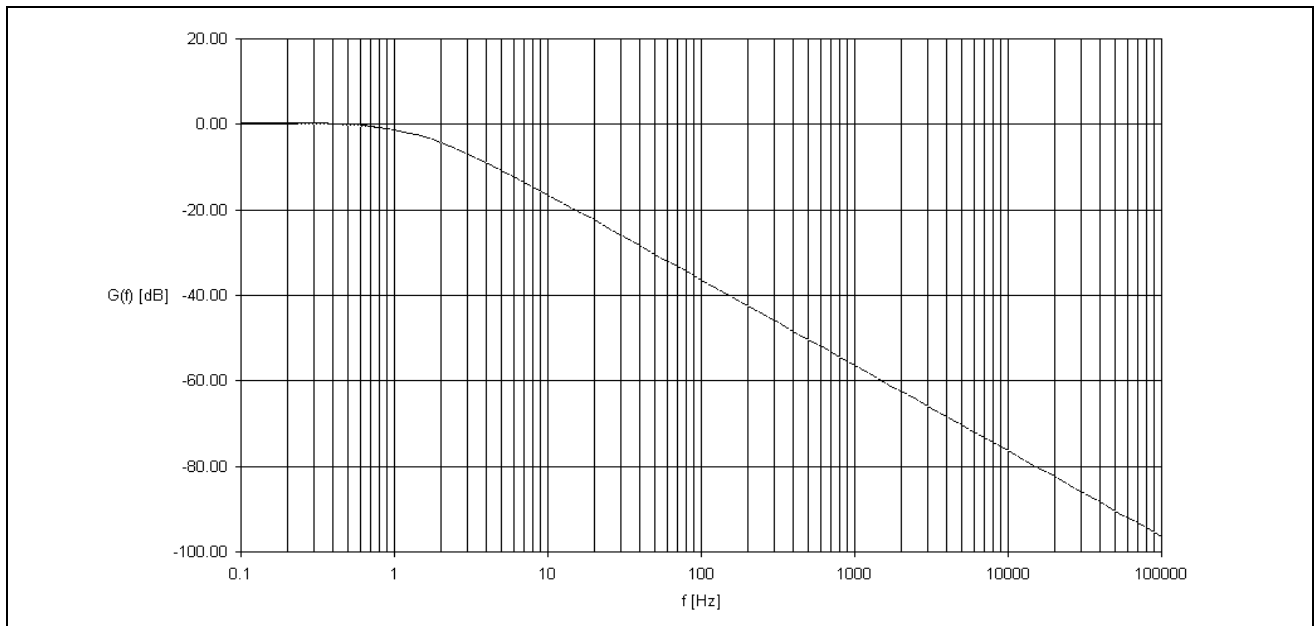

**Figure 28 - DPLL Jitter Transfer Function Diagram - Wide Range of Frequencies**

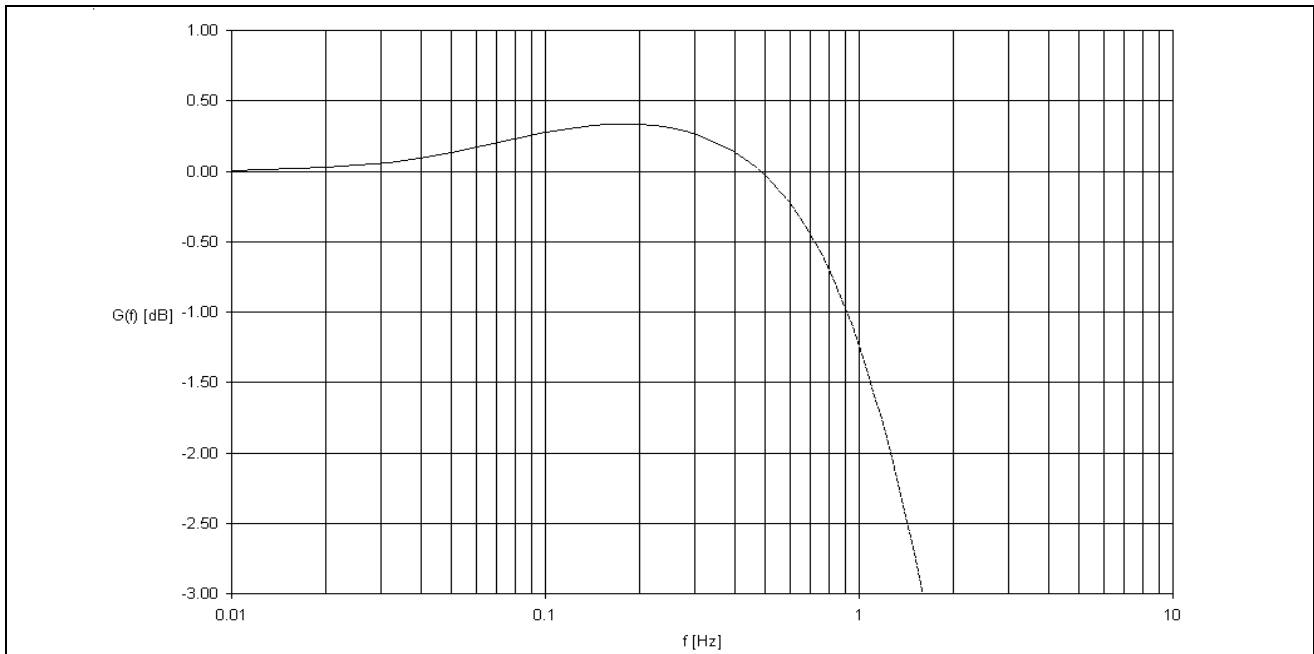

**Figure 29 - Detailed DPLL Jitter Transfer Function Diagram (Wander Transfer Diagram)**

### 2.11.5 Locking Range

The locking range is the input frequency range over which the DPLL must be able to pull into synchronization and to maintain the synchronization. The locking range is defined by the Loop Filter circuit and is equal to  $\pm 298$  ppm.

Note that the locking range is related to the oscillator frequency. If the oscillator frequency is  $-100$  ppm, the whole locking range also shifts by  $-100$  ppm downwards to become  $-398$  ppm to  $+198$  ppm.

### 2.11.6 Phase Slope

The phase slope, or phase alignment speed, is the rate at which a given signal changes phase with respect to an ideal signal. The given signal is typically the output signal. The ideal signal is of constant frequency and is nominally equal to the value of the final output signal or final input signal. Many telecom standards state that the phase slope may not exceed a certain value, usually  $81 \text{ ns}/1.327 \text{ ms}$  ( $61 \text{ ppm}$ ). This can be achieved by limiting the phase detector output to  $61 \text{ ppm}$  or less.

For the DPLL, the Phase Slope Limiter circuit limits the maximum phase slope to  $56 \text{ ppm}$  or  $7 \text{ ns}/125 \text{ }\mu\text{s}$ . The phase slope limit meets Telcordia GR-1244-CORE requirements.

### 2.11.7 Phase Lock Time

The Phase Lock Time is the time it takes a synchronizer to phase lock to the input signal. Phase lock occurs when the input and the output signals are not changing in phase with respect to each other (not including jitter).

Lock time is very difficult to determine because it is affected by many factors which include:

- i) initial input to output phase difference
- ii) initial input to output frequency difference
- iii) PLL loop filter
- iv) PLL limiter

Although a short phase lock time is desirable, it is not always achievable due to other synchronizer requirements. For instance, better jitter transfer performance is obtained with a lower frequency loop filter which increases lock time; and better (smaller) phase slope performance (limiter) will increase lock time.

The DPLL loop filter and limiter have been optimized to meet the Telcordia GR-1244-CORE jitter transfer and phase alignment speed requirements. If the frequency of the DPLL internal feedback signal is -50 ppm and the frequency of the input reference is +50 ppm, then the phase lock time is typically 15 seconds. However, in a device power up situation, phase lock time can be up to 50 seconds. The phase lock time meets Telcordia GR-1244-CORE Stratum 4 requirements.

## 2.12 Alignment Between Input and Output Frame Pulses

When the device is in DPLL Master mode, and CKi/FPi is the selected input reference and has no jitter, then the ST-BUS output frame pulses align very closely to the ST-BUS input frame pulse. See Figure 39 on page 72 for details. (The alignment shown is for when all bits in the DPOA register are 0.) If the CKi/FPi reference has jitter, the output frame pulses will still align to the input frame pulse but the offset value is a function of the input jitter.

When the device is in DPLL Master mode, and the selected input reference is **not** CKi/FPi, then the output frame pulses have no relationship with respect to the input frame pulse. In this case, the device's output frame pulse(s) must be used as the frame pulse(s) for the system, which means that the output frame pulse(s) will be supplied as the input frame pulse to all devices, including the device itself.

When the device is in DPLL Bypass Mode, the output frame pulses align closely to the input frame pulse. See Figure 39 for details.

## 3.0 Oscillator Requirements

In DPLL Master and Freerun modes, the APLL module requires a 20 MHz clock source at the XTALi pin. The 20 MHz clock can be generated by connecting an external crystal oscillator to the XTALi and XTALo pins, or by connecting an external clock oscillator to the XTALi pin.

If the device is to be used in DPLL Bypass mode only, external 20 MHz oscillator is not required, but the XTALi pin should still get a valid clock signal so that the device can be initialized. The easiest way is to tie the CKi clock to the XTALi pin. The XTALo pin must be left unconnected.

### 3.1 External Crystal Oscillator

A complete external crystal oscillator circuit made up of a crystal, resistor and capacitors is shown in Figure 30.

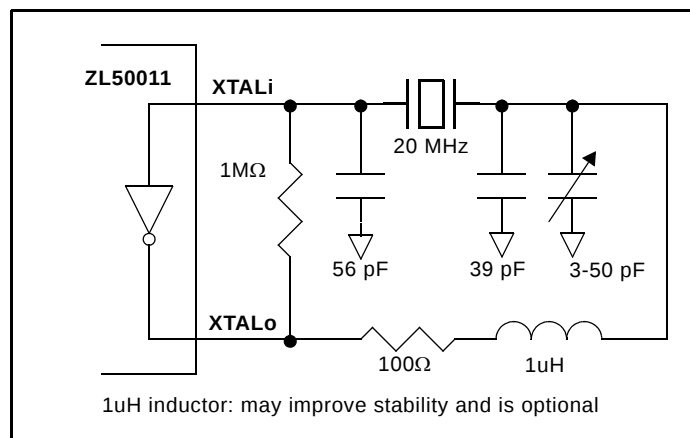


Figure 30 - Crystal Oscillator Circuit

The accuracy of a crystal oscillator circuit depends on the crystal tolerance as well as the load capacitance tolerance. Typically, for a 20 MHz crystal specified with a 32 pF load capacitance, each 1 pF change in load capacitance contributes approximately 9 ppm to the frequency deviation. Consequently, capacitor tolerances, and stray capacitances have a major effect on the accuracy of the oscillator frequency.

The trimmer capacitor may be used to compensate for capacitive effects. If accuracy is not a concern, then the trimmer may be removed, the 39 pF capacitor may be increased to 56 pF, and a wider tolerance crystal may be substituted.

The crystal should be a fundamental mode type - not an overtone. The fundamental mode crystal permits a simpler oscillator circuit with no additional filter components and is less likely to generate spurious responses. The crystal accuracy only affects the output clock accuracy in the freerun mode. The crystal specification is as follows.

Frequency: 20 MHz  
 Tolerance: As required  
 Oscillation Mode: Fundamental  
 Resonance Mode: Parallel  
 Load Capacitance: 32 pF  
 Maximum Series Resistance: 35  $\Omega$   
 Approximate Drive Level: 1mW  
 e.g., R1B23B32-20.0 MHz

(20 ppm absolute,  $\pm 6$  ppm 0C to 50C, 32 pF, 25  $\Omega$ )

### 3.2 External Clock Oscillator

When an external clock oscillator is used, numerous parameters must be considered. This includes absolute frequency, frequency change over temperature, output rise and fall times, output levels and duty cycle.

For applications requiring  $\pm 32$  ppm clock accuracy, the following clock oscillator module may be used:

FOX F7C-2E3-20.0 MHz

Frequency: 20 MHz  
 Tolerance: 25 ppm 0C to 70C  
 Rise & Fall Time: 10 ns (0.33 V 2.97 V 15 pF)  
 Duty Cycle: 40% to 60%

The output clock should be connected directly (not AC coupled) to the XTALi input of the device, and the XTALo output should be left open as shown in Figure 31.

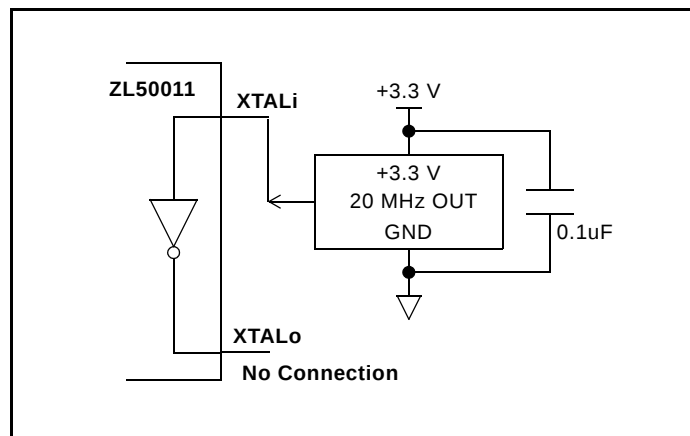


Figure 31 - External Clock Oscillator Circuit

## 4.0 Device Reset and Initialization

The  $\overline{\text{RESET}}$  pin is used to reset the device. When the pin is low, it synchronously puts the device in its reset state. It disables the ST0 - 15 outputs, drives the STOHZ 0 - 15 outputs to high, clears the device registers and the internal counters.

Upon power up, the device should be initialized as follows:

- Set ODE pin to low to disable the ST0-15 output and to drive the STOHZ 0-15 to high.
- Set the  $\overline{\text{TRST}}$  pin to low to disable the JTAG TAP controller.
- Reset the device by pulsing the  $\overline{\text{RESET}}$  pin to low for longer than 1 ms.
- After releasing the  $\overline{\text{RESET}}$  pin from low to high, wait for 600 $\mu\text{s}$  for the APLL module and the crystal oscillator to be stabilized before starting the first microprocessor port access cycle.
- Program the register to define the frequency of the  $\overline{\text{CKi}}$  input.
- Wait for 600 $\mu\text{s}$  for the APLL module to be stabilized before starting the next microprocessor port access cycle.
- Configure the DPLL. After a device reset, the DPLL defaults are: Master mode, reference is REF pin input at 8 kHz, REF polarity is not inverted.
- If DPLL Master mode is selected, wait 50 seconds for the DPLL to synchronize to the reference.
- Use the memory block programming mode to initialize the connection memory.
- Release the ODE pin to high after the connection memory is programmed such that bus contention will not occur at the serial stream outputs ST0-15.

## 5.0 JTAG Support

The ZL50011 JTAG interface conforms to the Boundary-Scan IEEE1149.1 standard. The operation of the boundary-scan circuitry is controlled by an external Test Access Port (TAP) Controller.

### 5.1 Test Access Port (TAP)

The Test Access Port (TAP) accesses the ZL50011 test functions. It consists of 3 input pins and 1 output pin as follows:

- **Test Clock Input (TCK)** - TCK provides the clock for the test logic. The TCK does not interfere with any on-chip clock and thus remains independent in the functional mode. The TCK permits shifting of test data into or out of the Boundary-Scan register cells concurrently with the operation of the device and without interfering with the on-chip logic.
- **Test Mode Select Input (TMS)** - The TAP Controller uses the logic signals received at the TMS input to control test operations. The TMS signals are sampled at the rising edge of the TCK pulse. This pin is internally pulled to Vdd when it is not driven from an external source.
- **Test Data Input (TDi)** - Serial input data applied to this port is fed either into the instruction register or into a test data register, depending on the sequence previously applied to the TMS input. Both registers are described in a subsequent section. The received input data is sampled at the rising edge of TCK pulses. This pin is internally pulled to Vdd when it is not driven from an external source.
- **Test Data Output (TDO)** - Depending on the sequence previously applied to the TMS input, the contents of either the instruction register or data register are serially shifted out towards the TDO. The data out of the TDO is clocked on the falling edge of the TCK pulses. When no data is shifted through the boundary scan cells, the TDO driver is set to a high impedance state.
- **Test Reset ( $\overline{\text{TRST}}$ )** - Resets the JTAG scan structure. This pin is internally pulled to Vdd when it is not driven from an external source.

## 5.2 Instruction Register

The ZL50011 uses the public instructions defined in the IEEE 1149.1 standard. The JTAG Interface contains a four-bit instruction register. Instructions are serially loaded into the instruction register from the TDI when the TAP Controller is in its shifted-IR state. These instructions are subsequently decoded to achieve two basic functions: to select the test data register that may operate while the instruction is current and to define the serial test data register path that is used to shift data between TDI and TDO during data register scanning.

## 5.3 Test Data Register

As specified in IEEE 1149.1, the ZL50011 JTAG Interface contains three test data registers:

- **The Boundary-Scan Register** - The Boundary-Scan register consists of a series of Boundary-Scan cells arranged to form a scan path around the boundary of the ZL50011 core logic.
- **The Bypass Register** - The Bypass register is a single stage shift register that provides a one-bit path from TDI to its TDO.
- **The Device Identification Register** - The JTAG device ID for the ZL50011 is 0C35B14B<sub>H</sub>.

|                        |                     |
|------------------------|---------------------|
| Version<31:28>:        | 0000                |
| Part No. <27:12>:      | 1100 0011 0101 1011 |
| Manufacturer ID<11:1>: | 0001 0100 101       |
| LSB<0>:                | 1                   |

## 5.4 BSDL

A BSDL (Boundary Scan Description Language) file is available from Zarlink Semiconductor to aid in the use of the IEEE 1149 test interface.

## 6.0 Register Address Mapping

| External Address<br>A11 - A0 | CPU Access | Register                                |
|------------------------------|------------|-----------------------------------------|
| 000 <sub>H</sub>             | R/W        | Control Register, CR                    |
| 001 <sub>H</sub>             | R/W        | Internal Mode Selection, IMS            |
| 010 <sub>H</sub>             | R/W        | BER Start Receive Register, BSRR        |
| 011 <sub>H</sub>             | R/W        | BER Length Register, BLR                |
| 012 <sub>H</sub>             | Read Only  | BER Count Register, BCR                 |
| 030 <sub>H</sub>             | R/W        | DPLL Operation Mode, DOM                |
| 031 <sub>H</sub>             | R/W        | DPLL Output Adjustment, DPOA            |
| 032 <sub>H</sub>             | Read Only  | DPLL House Keeping Register, DHKR       |
| 100 <sub>H</sub>             | R/W        | Stream0 Input Control Register, SICR0   |
| 101 <sub>H</sub>             | R/W        | Stream0 Input Delay Register, SIDR0     |
| 102 <sub>H</sub>             | R/W        | Stream1 Input Control Register, SICR1   |
| 103 <sub>H</sub>             | R/W        | Stream1 Input Delay Register, SIDR1     |
| 104 <sub>H</sub>             | R/W        | Stream2 Input Control Register, SICR2   |
| 105 <sub>H</sub>             | R/W        | Stream2 Input Delay Register, SIDR2     |
| 106 <sub>H</sub>             | R/W        | Stream3 Input Control Register, SICR3   |
| 107 <sub>H</sub>             | R/W        | Stream3 Input Delay Register, SIDR3     |
| 108 <sub>H</sub>             | R/W        | Stream4 Input Control Register, SICR4   |
| 109 <sub>H</sub>             | R/W        | Stream4 Input Delay Register, SIDR4     |
| 10A <sub>H</sub>             | R/W        | Stream5 Input Control Register, SICR5   |
| 10B <sub>H</sub>             | R/W        | Stream5 Input Delay Register, SIDR5     |
| 10C <sub>H</sub>             | R/W        | Stream6 Input Control Register, SICR6   |
| 10D <sub>H</sub>             | R/W        | Stream6 Input Delay Register, SIDR6     |
| 10E <sub>H</sub>             | R/W        | Stream7 Input Control Register, SICR7   |
| 10F <sub>H</sub>             | R/W        | Stream7 Input Delay Register, SIDR7     |
| 110 <sub>H</sub>             | R/W        | Stream8 Input Control Register, SICR8   |
| 111 <sub>H</sub>             | R/W        | Stream8 Input Delay Register, SIDR8     |
| 112 <sub>H</sub>             | R/W        | Stream9 Input Control Register, SICR9   |
| 113 <sub>H</sub>             | R/W        | Stream9 Input Delay Register, SIDR9     |
| 114 <sub>H</sub>             | R/W        | Stream10 Input Control Register, SICR10 |
| 115 <sub>H</sub>             | R/W        | Stream10 Input Delay Register, SIDR10   |
| 116 <sub>H</sub>             | R/W        | Stream11 Input Control Register, SICR11 |

**Table 15 - Address Map for Device Specific Registers**

| External Address<br>A11 - A0 | CPU Access | Register                                 |
|------------------------------|------------|------------------------------------------|
| 117 <sub>H</sub>             | R/W        | Stream11 Input Delay Register, SIDR11    |
| 118 <sub>H</sub>             | R/W        | Stream12 Input Control Register, SICR12  |
| 119 <sub>H</sub>             | R/W        | Stream12 Input Delay Register, SIDR12    |
| 11A <sub>H</sub>             | R/W        | Stream13 Input Control Register, SICR13  |
| 11B <sub>H</sub>             | R/W        | Stream13 Input Delay Register, SIDR13    |
| 11C <sub>H</sub>             | R/W        | Stream14 Input Control Register, SICR14  |
| 11D <sub>H</sub>             | R/W        | Stream14 Input Delay Register, SIDR14    |
| 11E <sub>H</sub>             | R/W        | Stream15 Input Control Register, SICR15  |
| 11F <sub>H</sub>             | R/W        | Stream15 Input Delay Register, SIDR15    |
| 200 <sub>H</sub>             | R/W        | Stream0 Output Control Register, SOCR0   |
| 201 <sub>H</sub>             | R/W        | Stream0 Output Delay Register, SOOR0     |
| 202 <sub>H</sub>             | R/W        | Stream1 Output Control Register, SOCR1   |
| 203 <sub>H</sub>             | R/W        | Stream1 Output Delay Register, SOOR1     |
| 204 <sub>H</sub>             | R/W        | Stream2 Output Control Register, SOCR2   |
| 205 <sub>H</sub>             | R/W        | Stream2 Output Delay Register, SOOR2     |
| 206 <sub>H</sub>             | R/W        | Stream3 Output Control Register, SOCR3   |
| 207 <sub>H</sub>             | R/W        | Stream3 Output Delay Register, SOOR3     |
| 208 <sub>H</sub>             | R/W        | Stream4 Output Control Register, SOCR4   |
| 209 <sub>H</sub>             | R/W        | Stream4 Output Delay Register, SOOR4     |
| 20A <sub>H</sub>             | R/W        | Stream5 Output Control Register, SOCR5   |
| 20B <sub>H</sub>             | R/W        | Stream5 Output Delay Register, SOOR5     |
| 20C <sub>H</sub>             | R/W        | Stream6 Output Control Register, SOCR6   |
| 20D <sub>H</sub>             | R/W        | Stream6 Output Delay Register, SOOR6     |
| 20E <sub>H</sub>             | R/W        | Stream7 Output Control Register, SOCR7   |
| 20F <sub>H</sub>             | R/W        | Stream7 Output Delay Register, SOOR7     |
| 210 <sub>H</sub>             | R/W        | Stream8 Output Control Register, SOCR8   |
| 211 <sub>H</sub>             | R/W        | Stream8 Output Delay Register, SOOR8     |
| 212 <sub>H</sub>             | R/W        | Stream9 Output Control Register, SOCR9   |
| 213 <sub>H</sub>             | R/W        | Stream9 Output Delay Register, SOOR9     |
| 214 <sub>H</sub>             | R/W        | Stream10 Output Control Register, SOCR10 |
| 215 <sub>H</sub>             | R/W        | Stream10 Output Delay Register, SOOR10   |
| 216 <sub>H</sub>             | R/W        | Stream11 Output Control Register, SOCR11 |

Table 15 - Address Map for Device Specific Registers

| <b>External<br/>Address<br/>A11 - A0</b> | <b>CPU<br/>Access</b> | <b>Register</b>                          |
|------------------------------------------|-----------------------|------------------------------------------|
| 217 <sub>H</sub>                         | R/W                   | Stream11 Output Delay Register, SOOR11   |
| 218 <sub>H</sub>                         | R/W                   | Stream12 Output Control Register, SOCR12 |
| 219 <sub>H</sub>                         | R/W                   | Stream12 Output Delay Register, SOOR12   |
| 21A <sub>H</sub>                         | R/W                   | Stream13 Output Control Register, SOCR13 |
| 21B <sub>H</sub>                         | R/W                   | Stream13 Output Delay Register, SOOR13   |
| 21C <sub>H</sub>                         | R/W                   | Stream14 Output Control Register, SOCR14 |
| 21D <sub>H</sub>                         | R/W                   | Stream14 Output Delay Register, SOOR14   |
| 21E <sub>H</sub>                         | R/W                   | Stream15 Output Control Register, SOCR15 |
| 21F <sub>H</sub>                         | R/W                   | Stream15 Output Delay Register, SOOR15   |

**Table 15 - Address Map for Device Specific Registers**

## 7.0 Detail Register Description

External Read/Write Address: 000<sub>H</sub>

Reset Value: 0000<sub>H</sub>

15

14

13

12

11

10

9

8

7

6

5

4

3

2

1

0

FBD MODE

SLV

FBD EN

CKIN 2

CKIN 1

CKIN 0

CKFP 2

CKFP 1

CKFP 0

CBER

SBER

MBPE

OSB

MS2

MS1

MS0

| Bit       | Name                              | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |           |                                   |                         |     |       |            |     |        |           |     |        |           |           |          |  |
|-----------|-----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|-----------------------------------|-------------------------|-----|-------|------------|-----|--------|-----------|-----|--------|-----------|-----------|----------|--|
| 15        | FBD-MODE                          | <b>Frame Boundary Determination Mode Select.</b><br>When either the FBDEN or FBDMODE bit is set low, the frame boundary discriminator (FBD) is disabled.<br>When both the FBDEN and FBDMODE bits are set HIGH, the frame discriminator (FBD) is enabled. The device will have 20 ns of input clcok jitter tolerance (on CKi and FPi) when the FBD is enabled.<br>By default, the FBDEN and FBDMODE bits are Low. Both the FBDEN and FBDMODE bits should be set HIGH during normal operation.                                 |           |                                   |                         |     |       |            |     |        |           |     |        |           |           |          |  |
| 14        | SLV                               | <b>DPLL Bypass Mode Enable.</b><br>When this bit is zero, the DPLL is in Master or Freerun mode. When this bit is high, the DPLL is in Bypass mode.                                                                                                                                                                                                                                                                                                                                                                          |           |                                   |                         |     |       |            |     |        |           |     |        |           |           |          |  |
| 13        | FBDEN                             | <b>Frame Boundary Determinator Enable.</b><br>When either the FBDEN or FBDMODE bit is set low, the frame boundary discriminator (FBD) is disabled.<br>When both the FBDEN and FBDMODE bits are set HIGH, the frame discriminator (FBD) is enabled. The device will have 20ns of input clcok jitter tolerance (on CKi and FPi) when the FBD is enabled.<br>By default, the FBDEN and FBDMODE bits are Low. Both the FBDEN and FBDMODE bits should be set HIGH during normal operation.                                        |           |                                   |                         |     |       |            |     |        |           |     |        |           |           |          |  |
| 12 - 10   | CKIN2-0                           | <b>Input ST Bus Clock (<math>\overline{\text{CKi}}</math>) and Frame Pulse (<math>\overline{\text{FPi}}</math>) Selection.</b> <table> <tr> <th>CKIN2 - 0</th> <th><math>\overline{\text{FPi}}</math> Low Cycle</th> <th><math>\overline{\text{CKi}}</math></th> </tr> <tr> <td>000</td> <td>61 ns</td> <td>16.384 MHz</td> </tr> <tr> <td>001</td> <td>122 ns</td> <td>8.192 MHz</td> </tr> <tr> <td>010</td> <td>244 ns</td> <td>4.096 MHz</td> </tr> <tr> <td>011 - 111</td> <td colspan="2">Reserved</td> </tr> </table> | CKIN2 - 0 | $\overline{\text{FPi}}$ Low Cycle | $\overline{\text{CKi}}$ | 000 | 61 ns | 16.384 MHz | 001 | 122 ns | 8.192 MHz | 010 | 244 ns | 4.096 MHz | 011 - 111 | Reserved |  |
| CKIN2 - 0 | $\overline{\text{FPi}}$ Low Cycle | $\overline{\text{CKi}}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |           |                                   |                         |     |       |            |     |        |           |     |        |           |           |          |  |
| 000       | 61 ns                             | 16.384 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |           |                                   |                         |     |       |            |     |        |           |     |        |           |           |          |  |
| 001       | 122 ns                            | 8.192 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |           |                                   |                         |     |       |            |     |        |           |     |        |           |           |          |  |
| 010       | 244 ns                            | 4.096 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |           |                                   |                         |     |       |            |     |        |           |     |        |           |           |          |  |
| 011 - 111 | Reserved                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |           |                                   |                         |     |       |            |     |        |           |     |        |           |           |          |  |
| 9         | CKFP2                             | <b>Output ST Bus clock <math>\overline{\text{CKo2}}</math> and frame pulse <math>\overline{\text{FPo2}}</math> Selection.</b><br>When this bit is low, CKo2 is 32.768 MHz clock and FPo2 is 30 ns wide frame pulse<br>When this bit is high, CKo2 is 16.384 MHz clock and FPo2 is 61 ns wide frame pulse                                                                                                                                                                                                                     |           |                                   |                         |     |       |            |     |        |           |     |        |           |           |          |  |
| 8         | CKFP1                             | <b>Output ST Bus clock <math>\overline{\text{CKo1}}</math> and frame pulse <math>\overline{\text{FPo1}}</math> Selection.</b><br>When this bit is low, CKo1 is 16.384 MHz clock and FPo1 is 61 ns wide frame pulse<br>When this bit is high, CKo1 is 8.192 MHz clock and FPo1 is 122 ns wide frame pulse                                                                                                                                                                                                                     |           |                                   |                         |     |       |            |     |        |           |     |        |           |           |          |  |
| 7         | CKFP0                             | <b>Output ST Bus clock <math>\overline{\text{CKo0}}</math> and frame pulse <math>\overline{\text{FPo0}}</math> Selection.</b><br>When this bit is low, CKo0 is 4.096 MHz clock and FPo0 is 244 ns wide frame pulse<br>When this bit is high, CKo0 is 8.192 MHz clock and FPo0 is 122 ns wide frame pulse                                                                                                                                                                                                                     |           |                                   |                         |     |       |            |     |        |           |     |        |           |           |          |  |

**Table 16 - Control Register (CR) Bits**

|                                               |     |           |           |           |           |           |           |           |      |      |      |     |     |     |     |
|-----------------------------------------------|-----|-----------|-----------|-----------|-----------|-----------|-----------|-----------|------|------|------|-----|-----|-----|-----|
| External Read/Write Address: 000 <sub>H</sub> |     |           |           |           |           |           |           |           |      |      |      |     |     |     |     |
| Reset Value: 0000 <sub>H</sub>                |     |           |           |           |           |           |           |           |      |      |      |     |     |     |     |
| 15                                            | 14  | 13        | 12        | 11        | 10        | 9         | 8         | 7         | 6    | 5    | 4    | 3   | 2   | 1   | 0   |
| FBD<br>MODE                                   | SLV | FBD<br>EN | CKIN<br>2 | CKIN<br>1 | CKIN<br>0 | CKFP<br>2 | CKFP<br>1 | CKFP<br>0 | CBER | SBER | MBPE | OSB | MS2 | MS1 | MS0 |

| Bit       | Name                         | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |           |                  |         |                              |            |                  |           |          |     |             |   |   |   |     |             |   |   |   |     |             |   |   |   |        |        |
|-----------|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|------------------|---------|------------------------------|------------|------------------|-----------|----------|-----|-------------|---|---|---|-----|-------------|---|---|---|-----|-------------|---|---|---|--------|--------|
| 6         | CBER                         | <b>Bit Error Rate Counter Clear:</b> When this bit is high, it resets the internal bit error counter and the content of the bit error count register (BCR) to zero. Upon completion of the reset, set this bit to zero.                                                                                                                                                                                                                                                                                                                                                          |           |                  |         |                              |            |                  |           |          |     |             |   |   |   |     |             |   |   |   |     |             |   |   |   |        |        |
| 5         | SBER                         | <b>Bit Error Rate Test Start:</b> When this bit is high, it enables the BER transmitter and receiver; starts the bit error rate test. The bit error test result is kept in the bit error count (BCR) register. Upon the completion of the BER test, set this bit to zero.                                                                                                                                                                                                                                                                                                        |           |                  |         |                              |            |                  |           |          |     |             |   |   |   |     |             |   |   |   |     |             |   |   |   |        |        |
| 4         | MBPE                         | <b>Memory Block Programming Enable:</b> When this bit is high, the connection memory block programming mode is enabled to program Bit 0 to 2 of the connection memory. When it is low, the memory block programming mode is disabled.                                                                                                                                                                                                                                                                                                                                            |           |                  |         |                              |            |                  |           |          |     |             |   |   |   |     |             |   |   |   |     |             |   |   |   |        |        |
| 3         | OSB                          | <b>Output Stand By Bit:</b> This bit enables the STo0 - 15 and the STOHZ 0 -15 serial outputs. The following table describes the HiZ control of the serial data outputs: <table><tr><th>RESET Pin</th><th>ODE Pin</th><th>OSB Bit</th><th>STo0-15</th><th>STOHZ 0-15</th></tr><tr><td>0</td><td>X</td><td>X</td><td>HiZ</td><td>Driven High</td></tr><tr><td>1</td><td>0</td><td>X</td><td>HiZ</td><td>Driven High</td></tr><tr><td>1</td><td>1</td><td>0</td><td>HiZ</td><td>Driven High</td></tr><tr><td>1</td><td>1</td><td>1</td><td>Active</td><td>Active</td></tr></table> | RESET Pin | ODE Pin          | OSB Bit | STo0-15                      | STOHZ 0-15 | 0                | X         | X        | HiZ | Driven High | 1 | 0 | X | HiZ | Driven High | 1 | 1 | 0 | HiZ | Driven High | 1 | 1 | 1 | Active | Active |
| RESET Pin | ODE Pin                      | OSB Bit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | STo0-15   | STOHZ 0-15       |         |                              |            |                  |           |          |     |             |   |   |   |     |             |   |   |   |     |             |   |   |   |        |        |
| 0         | X                            | X                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | HiZ       | Driven High      |         |                              |            |                  |           |          |     |             |   |   |   |     |             |   |   |   |     |             |   |   |   |        |        |
| 1         | 0                            | X                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | HiZ       | Driven High      |         |                              |            |                  |           |          |     |             |   |   |   |     |             |   |   |   |     |             |   |   |   |        |        |
| 1         | 1                            | 0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | HiZ       | Driven High      |         |                              |            |                  |           |          |     |             |   |   |   |     |             |   |   |   |     |             |   |   |   |        |        |
| 1         | 1                            | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Active    | Active           |         |                              |            |                  |           |          |     |             |   |   |   |     |             |   |   |   |     |             |   |   |   |        |        |
| 2 - 0     | MS2-0                        | <b>Memory Select Bit.</b> These bits are used to select connection memory or data memory: <table><tr><th>MS2 - 0</th><th>Memory Selection</th></tr><tr><td>000</td><td>Connection Memory Read/Write</td></tr><tr><td>001</td><td>Data memory Read</td></tr><tr><td>010 - 111</td><td>Reserved</td></tr></table>                                                                                                                                                                                                                                                                  | MS2 - 0   | Memory Selection | 000     | Connection Memory Read/Write | 001        | Data memory Read | 010 - 111 | Reserved |     |             |   |   |   |     |             |   |   |   |     |             |   |   |   |        |        |
| MS2 - 0   | Memory Selection             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |           |                  |         |                              |            |                  |           |          |     |             |   |   |   |     |             |   |   |   |     |             |   |   |   |        |        |
| 000       | Connection Memory Read/Write |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |           |                  |         |                              |            |                  |           |          |     |             |   |   |   |     |             |   |   |   |     |             |   |   |   |        |        |
| 001       | Data memory Read             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |           |                  |         |                              |            |                  |           |          |     |             |   |   |   |     |             |   |   |   |     |             |   |   |   |        |        |
| 010 - 111 | Reserved                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |           |                  |         |                              |            |                  |           |          |     |             |   |   |   |     |             |   |   |   |     |             |   |   |   |        |        |

Table 16 - Control Register (CR) Bits (continued)

| External Read/Write Address: 001 <sub>H</sub><br>Reset Value: 0000 <sub>H</sub> |          |                                                                                                                                                                                                                                                                                                                                                                                                                  |    |       |       |      |      |      |      |      |      |          |          |          |      |
|---------------------------------------------------------------------------------|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|-------|-------|------|------|------|------|------|------|----------|----------|----------|------|
| 15                                                                              | 14       | 13                                                                                                                                                                                                                                                                                                                                                                                                               | 12 | 11    | 10    | 9    | 8    | 7    | 6    | 5    | 4    | 3        | 2        | 1        | 0    |
| 0                                                                               | 0        | 0                                                                                                                                                                                                                                                                                                                                                                                                                | 0  | CKINP | FPINP | CK2P | FP2P | CK1P | FP1P | CK0P | FP0P | BPD<br>2 | BPD<br>1 | BPD<br>0 | MBPS |
| Bit                                                                             | Name     | Description                                                                                                                                                                                                                                                                                                                                                                                                      |    |       |       |      |      |      |      |      |      |          |          |          |      |
| 15 - 12                                                                         | Unused   | <b>Reserved.</b> In normal functional mode, these bits MUST be set to zero.                                                                                                                                                                                                                                                                                                                                      |    |       |       |      |      |      |      |      |      |          |          |          |      |
| 11                                                                              | CKINP    | <b>ST Bus Clock Input (<math>\overline{\text{CKi}}</math>) Polarity.</b><br>When this bit is low, the $\overline{\text{CKi}}$ falling edge aligns with the frame boundary.<br>When this bit is high, the $\overline{\text{CKi}}$ rising edge aligns with the frame boundary.                                                                                                                                     |    |       |       |      |      |      |      |      |      |          |          |          |      |
| 10                                                                              | FPINP    | <b>Frame Pulse Input (<math>\overline{\text{FPi}}</math>) Polarity.</b><br>When this bit is low, the input frame pulse $\overline{\text{FPi}}$ should have the negative frame pulse format. When this bit is high, the input frame pulse $\text{FPi}$ should have the positive frame pulse format.                                                                                                               |    |       |       |      |      |      |      |      |      |          |          |          |      |
| 9                                                                               | CK2P     | <b>ST Bus Clock Output (<math>\overline{\text{CKo2}}</math>) Polarity.</b><br>When this bit is low, the output clock $\overline{\text{CKo2}}$ falling edge aligns with the frame boundary. When this bit is high, the output clock $\overline{\text{CKo2}}$ rising edge aligns with the frame boundary.                                                                                                          |    |       |       |      |      |      |      |      |      |          |          |          |      |
| 8                                                                               | FP2P     | <b>Frame Pulse Output (<math>\overline{\text{FPo2}}</math>) Polarity.</b><br>When this bit is low, the output frame pulse $\overline{\text{FPo2}}$ has the negative frame pulse format. When this bit is high, the output frame pulse $\text{FPo2}$ has the positive frame pulse format.                                                                                                                         |    |       |       |      |      |      |      |      |      |          |          |          |      |
| 7                                                                               | CK1P     | <b>ST Bus Clock Output (<math>\overline{\text{CKo1}}</math>) Polarity.</b><br>When this bit is low, the output clock $\overline{\text{CKo1}}$ falling edge aligns with the frame boundary. When this bit is high, the output clock $\overline{\text{CKo1}}$ rising edge aligns with the frame boundary.                                                                                                          |    |       |       |      |      |      |      |      |      |          |          |          |      |
| 6                                                                               | FP1P     | <b>Frame Pulse Output (<math>\overline{\text{FPo1}}</math>) Polarity.</b><br>When this bit is low, the output frame pulse $\overline{\text{FPo1}}$ has the negative frame pulse format. When this bit is high, the output frame pulse $\text{FPo1}$ has the positive frame pulse format.                                                                                                                         |    |       |       |      |      |      |      |      |      |          |          |          |      |
| 5                                                                               | CK0P     | <b>ST Bus Clock Output (<math>\overline{\text{CKo0}}</math>) Polarity.</b><br>When this bit is low, the output clock $\overline{\text{CKo0}}$ falling edge aligns with the frame boundary. When this bit is high, the output clock $\overline{\text{CKo0}}$ rising edge aligns with the frame boundary.                                                                                                          |    |       |       |      |      |      |      |      |      |          |          |          |      |
| 4                                                                               | FP0P     | <b>Frame Pulse Output (<math>\overline{\text{FPo0}}</math>) Polarity.</b><br>When this bit is low, the output frame pulse $\overline{\text{FPo0}}$ has the negative frame pulse format. When this bit is high, the output frame pulse $\text{FPo0}$ has the positive frame pulse format.                                                                                                                         |    |       |       |      |      |      |      |      |      |          |          |          |      |
| 3 - 1                                                                           | BPD2 - 0 | <b>Block Programming Data:</b> These bits refer to the value to be loaded into the connection memory. Whenever the memory block programming feature is activated. After the MBPE bit in the control register is set to high and the MBPS bit is set to high, the contents of the bits BPD0 to BPD2 are loaded into Bit 0 to Bit 2 of the connection memory. Bit 3 to Bit 11 of the connection memory are zeroed. |    |       |       |      |      |      |      |      |      |          |          |          |      |

Table 17 - Internal Mode Selection (IMS) Register Bits

| External Read/Write Address: 001 <sub>H</sub> |      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |    |       |       |      |      |      |      |      |      |          |          |          |      |
|-----------------------------------------------|------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|-------|-------|------|------|------|------|------|------|----------|----------|----------|------|
| Reset Value: 0000 <sub>H</sub>                |      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |    |       |       |      |      |      |      |      |      |          |          |          |      |
| 15                                            | 14   | 13                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 12 | 11    | 10    | 9    | 8    | 7    | 6    | 5    | 4    | 3        | 2        | 1        | 0    |
| 0                                             | 0    | 0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 0  | CKINP | FPINP | CK2P | FP2P | CK1P | FP1P | CK0P | FP0P | BPD<br>2 | BPD<br>1 | BPD<br>0 | MBPS |
| Bit                                           | Name | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |    |       |       |      |      |      |      |      |      |          |          |          |      |
| 0                                             | MBPS | <p><b>Memory Block Programming Start:</b> A zero to one transition of this bit starts the memory block programming function. The MBPS, BPD0 to BPD2 bits in this register must be defined in the same write operation. Once the MBPE bit in the control register is set to high, the device requires 50μs to complete the block programming. After the programming function has finished, the MBPS bit returns to low indicating the operation is completed. When the MBPS is high, the MBPS or MBPE can be set to low to abort the programming operation.</p> <p>To ensure proper block programming operation, when MBPS is high the BPD0 to BPD2 bits in this register must not be changed.</p> <p>Whenever the microprocessor writes a one to the MBPS bit, the block programming function is started, the user must maintain the same logical value to the other bits in this register to avoid any change in the device setting.</p> |    |       |       |      |      |      |      |      |      |          |          |          |      |

Table 17 - Internal Mode Selection (IMS) Register Bits (continued)

| External Read/Write Address: 010 <sub>H</sub> |           |                                                                                                                                                  |           |           |           |           |   |   |           |           |           |           |           |           |           |
|-----------------------------------------------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------|-----------|-----------|-----------|-----------|---|---|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| Reset Value: 0000 <sub>H</sub>                |           |                                                                                                                                                  |           |           |           |           |   |   |           |           |           |           |           |           |           |
| 15                                            | 14        | 13                                                                                                                                               | 12        | 11        | 10        | 9         | 8 | 7 | 6         | 5         | 4         | 3         | 2         | 1         | 0         |
| 0                                             | 0         | 0                                                                                                                                                | BR<br>SA3 | BR<br>SA2 | BR<br>SA1 | BR<br>SA0 | 0 | 0 | BR<br>CA6 | BR<br>CA5 | BR<br>CA4 | BR<br>CA3 | BR<br>CA2 | BR<br>CA1 | BR<br>CA0 |
| Bit                                           | Name      | Description                                                                                                                                      |           |           |           |           |   |   |           |           |           |           |           |           |           |
| 15 - 13<br>8 - 7                              | Unused    | <b>Reserved.</b> In normal functional mode, these bits MUST be set to zero.                                                                      |           |           |           |           |   |   |           |           |           |           |           |           |           |
| 12 - 9                                        | BRSA5 - 0 | <b>BER Receive Stream Address Bits:</b> The binary value of these bits refers to the input stream which receives the BER data.                   |           |           |           |           |   |   |           |           |           |           |           |           |           |
| 6 - 0                                         | BRCA6 - 0 | <b>BER Receive Channel Address Bits:</b> The binary value of these bits refers to the input channel in which the BER data starts to be compared. |           |           |           |           |   |   |           |           |           |           |           |           |           |

Table 18 - BER Start Receiving Register (BSRR) Bits

| External Read/Write Address: 011 <sub>H</sub> |         |                                                                                                                                                                                                                                                                                                                                      |    |    |    |   |   |     |     |     |     |     |     |     |     |
|-----------------------------------------------|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|----|----|---|---|-----|-----|-----|-----|-----|-----|-----|-----|
| Reset Value: 0000 <sub>H</sub>                |         |                                                                                                                                                                                                                                                                                                                                      |    |    |    |   |   |     |     |     |     |     |     |     |     |
| 15                                            | 14      | 13                                                                                                                                                                                                                                                                                                                                   | 12 | 11 | 10 | 9 | 8 | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0                                             | 0       | 0                                                                                                                                                                                                                                                                                                                                    | 0  | 0  | 0  | 0 | 0 | BL7 | BL6 | BL5 | BL4 | BL3 | BL2 | BL1 | BL0 |
| Bit                                           | Name    | Description                                                                                                                                                                                                                                                                                                                          |    |    |    |   |   |     |     |     |     |     |     |     |     |
| 15 - 8                                        | Unused  | <b>Reserved.</b> In normal functional mode, these bits MUST be set to zero.                                                                                                                                                                                                                                                          |    |    |    |   |   |     |     |     |     |     |     |     |     |
| 7 - 0                                         | BL7 - 0 | <b>BER Length Bits:</b> The binary value of these bits refers to the number of channels. The maximum numbers of BER channels are 32, 64 and 128 for the data rate of 2.048 Mbps, 4.096 Mbps and 8.192 Mbps modes respectively. The minimum number of BER channel is 1. If these bits are set to zero, no BER test will be performed. |    |    |    |   |   |     |     |     |     |     |     |     |     |

Table 19 - BER Length Register (BLR) Bits

| External Read Address: 012 <sub>H</sub> |          |                                                                                                                                                                              |       |       |       |      |      |      |      |      |      |      |      |      |      |
|-----------------------------------------|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|-------|-------|------|------|------|------|------|------|------|------|------|------|
| Reset Value: 0000 <sub>H</sub>          |          |                                                                                                                                                                              |       |       |       |      |      |      |      |      |      |      |      |      |      |
| 15                                      | 14       | 13                                                                                                                                                                           | 12    | 11    | 10    | 9    | 8    | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
| BC 15                                   | BC 14    | BC 13                                                                                                                                                                        | BC 12 | BC 11 | BC 10 | BC 9 | BC 8 | BC 7 | BC 6 | BC 5 | BC 4 | BC 3 | BC 2 | BC 1 | BC 0 |
| Bit                                     | Name     | Description                                                                                                                                                                  |       |       |       |      |      |      |      |      |      |      |      |      |      |
| 15 - 0                                  | BC15 - 0 | <b>BER Count Bits:</b> The binary value of these bits refers to the bit error counts. When it reaches its maximum value of Hex FFFF, the value will not be changed any more. |       |       |       |      |      |      |      |      |      |      |      |      |      |

Table 20 - BER Count Register (BCR) Bits

| External Read/Write Address: 030 <sub>H</sub>   |           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |    |    |    |   |   |      |   |   |     |     |   |       |      |     |     |           |   |   |                       |   |   |           |   |   |           |   |   |          |
|-------------------------------------------------|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|----|----|---|---|------|---|---|-----|-----|---|-------|------|-----|-----|-----------|---|---|-----------------------|---|---|-----------|---|---|-----------|---|---|----------|
| Internal Read/Write Address: 00030 <sub>H</sub> |           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |    |    |    |   |   |      |   |   |     |     |   |       |      |     |     |           |   |   |                       |   |   |           |   |   |           |   |   |          |
| Reset Value: 0000 <sub>H</sub>                  |           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |    |    |    |   |   |      |   |   |     |     |   |       |      |     |     |           |   |   |                       |   |   |           |   |   |           |   |   |          |
| 15                                              | 14        | 13                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 12 | 11 | 10 | 9 | 8 | 7    | 6 | 5 | 4   | 3   | 2 | 1     | 0    |     |     |           |   |   |                       |   |   |           |   |   |           |   |   |          |
| 0                                               | 0         | 0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 0  | 0  | 0  | 0 | 0 | PINV | 0 | 0 | FP1 | FP0 | 0 | P REF | FREE |     |     |           |   |   |                       |   |   |           |   |   |           |   |   |          |
| Bit                                             | Name      | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |    |    |    |   |   |      |   |   |     |     |   |       |      |     |     |           |   |   |                       |   |   |           |   |   |           |   |   |          |
| 15 - 8, 6 - 5, 2.                               | Unused    | <b>Reserved.</b> In normal functional mode, these bits MUST be set to zero.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |    |    |    |   |   |      |   |   |     |     |   |       |      |     |     |           |   |   |                       |   |   |           |   |   |           |   |   |          |
| 7                                               | PINV      | <b>REF Input Inversion:</b> When this bit is low, the REF input will not be inverted. When this bit is high, the REF input will be inverted.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |    |    |    |   |   |      |   |   |     |     |   |       |      |     |     |           |   |   |                       |   |   |           |   |   |           |   |   |          |
| 4 - 3                                           | FP1 - FP0 | <b>REF Frequency Selection Bits:</b> These bits are used to specify the nominal clock frequency of the REF input. <table><tr><td>FP1</td><td>FP0</td><td>Reference</td></tr><tr><td>0</td><td>0</td><td>8kHz (REF or CKi/FPi)</td></tr><tr><td>0</td><td>1</td><td>1.544 MHz</td></tr><tr><td>1</td><td>0</td><td>2.048 MHz</td></tr><tr><td>1</td><td>1</td><td>Reserved</td></tr></table> <p>When the <u>P_REFSEL</u> bit is high to select the internal 8 kHz signal (derived from the <u>FPi</u> and <u>CKi</u> inputs) as reference, these bits must be set to 00.</p>                                                                                                                 |    |    |    |   |   |      |   |   |     |     |   |       |      | FP1 | FP0 | Reference | 0 | 0 | 8kHz (REF or CKi/FPi) | 0 | 1 | 1.544 MHz | 1 | 0 | 2.048 MHz | 1 | 1 | Reserved |
| FP1                                             | FP0       | Reference                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |    |    |    |   |   |      |   |   |     |     |   |       |      |     |     |           |   |   |                       |   |   |           |   |   |           |   |   |          |
| 0                                               | 0         | 8kHz (REF or CKi/FPi)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |    |    |    |   |   |      |   |   |     |     |   |       |      |     |     |           |   |   |                       |   |   |           |   |   |           |   |   |          |
| 0                                               | 1         | 1.544 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |    |    |    |   |   |      |   |   |     |     |   |       |      |     |     |           |   |   |                       |   |   |           |   |   |           |   |   |          |
| 1                                               | 0         | 2.048 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |    |    |    |   |   |      |   |   |     |     |   |       |      |     |     |           |   |   |                       |   |   |           |   |   |           |   |   |          |
| 1                                               | 1         | Reserved                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |    |    |    |   |   |      |   |   |     |     |   |       |      |     |     |           |   |   |                       |   |   |           |   |   |           |   |   |          |
| 1                                               | P_REFSEL  | <b>Reference Source Selection Bit:</b> This bit is used to select the reference input to the DPLL from between two sources. When this bit is low, the reference is from the REF pin. When this bit is high, the reference is from the internal 8 kHz generated from the <u>FPi</u> and <u>CKi</u> inputs. <u>When this bit is high, the FP1-0 bits must be set to 00.</u> If the internal 8 kHz signal is selected as the reference, the user must ensure that the <u>FPi</u> and <u>CKi</u> input signals will be re-applied after the internal 8 kHz signal is lost (or failed). If <u>FPi</u> or <u>CKi</u> is not presented to the device, the device cannot accept STi0-15 input data. |    |    |    |   |   |      |   |   |     |     |   |       |      |     |     |           |   |   |                       |   |   |           |   |   |           |   |   |          |
| 0                                               | FREERUN   | <b>Freerun Control Bit:</b> When this bit is low and bit 14 of the Control Register is low, the DPLL is in Master mode. When this bit is high and bit 14 of the Control Register is low, the DPLL is in Freerun mode. This bit has no effect when bit 14 of the Control Register is high.                                                                                                                                                                                                                                                                                                                                                                                                   |    |    |    |   |   |      |   |   |     |     |   |       |      |     |     |           |   |   |                       |   |   |           |   |   |           |   |   |          |

Table 21 - DPLL Operation Mode (DOM) Register Bits

|                                               |    |    |    |    |    |      |      |      |      |      |      |      |      |      |      |
|-----------------------------------------------|----|----|----|----|----|------|------|------|------|------|------|------|------|------|------|
| External Read/Write Address: 031 <sub>H</sub> |    |    |    |    |    |      |      |      |      |      |      |      |      |      |      |
| Reset Value: 0000 <sub>H</sub>                |    |    |    |    |    |      |      |      |      |      |      |      |      |      |      |
| 15                                            | 14 | 13 | 12 | 11 | 10 | 9    | 8    | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
| 0                                             | 0  | 0  | 0  | 0  | 0  | POS6 | POS5 | POS4 | POS3 | POS2 | POS1 | POS0 | SKC2 | SKC1 | SKC0 |

| Bit     | Name     | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15 - 10 | Unused   | <b>Reserved.</b> In normal functional mode, these bits MUST be set to zero.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 9 - 3   | POS6 - 0 | <b>Phase Offset Bits:</b> These 7 bits form the 2's complement phase offset word which controls the DPLL output phase offset. The DPLL output is advanced (leads the reference) if the word is positive. The DPLL output is delayed (lags the reference) if the word is negative. The net effect is that the ST-BUS outputs will be advanced or delayed by the programmed amount.<br>The offset is in step of 15.2 ns if the input reference is 8 kHz or 2.048 MHz. The offset is in step of 20.2 ns if the input reference is 1.544 MHz. These bits have no effect in Freerun or Bypass mode. |
| 2 - 0   | SKC2 - 0 | <b>Skew Control Bits:</b> These 3 bits control the <u>delay</u> of the DPLL outputs from 0 to 13.3 ns in steps of 1.9 ns. The net effect is that the ST-BUS outputs will be delayed by the programmed amount. These bits have no effect in Freerun or Bypass mode.                                                                                                                                                                                                                                                                                                                             |

Table 22 - DPLL Output Adjustment (DPOA) Register Bits

|                                                                           |    |    |    |    |    |   |   |   |   |   |     |     |   |   |   |
|---------------------------------------------------------------------------|----|----|----|----|----|---|---|---|---|---|-----|-----|---|---|---|
| External Read Address: 032 <sub>H</sub><br>Reset Value: 0000 <sub>H</sub> |    |    |    |    |    |   |   |   |   |   |     |     |   |   |   |
| 15                                                                        | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4   | 3   | 2 | 1 | 0 |
| 0                                                                         | 0  | 0  | 0  | 0  | 0  | 0 | 0 | 0 | 0 | 0 | PFD | LMT | X | X | X |

| Bit           | Name   | Description                                                                                                                                                                                                              |
|---------------|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15 - 5<br>2-0 | Unused | <b>Reserved.</b> In normal functional mode, these bits MUST be set to zero.                                                                                                                                              |
| 4             | PFD    | <b>Reference Fail Detection Bit (Read only bit):</b> This bit reports the validity of the reference signal selected by the P_REFSEL bit in the DOM register. When the selected reference fails, this bit is set to high. |
| 3             | LMT    | <b>DPLL LIMIT Bit (Read only bit):</b> This bit indicates that the Phase Slope Limiter is limiting the phase difference between the input reference and the feedback reference.                                          |
| 2 - 0         | Unused | <b>Reserved Bits (Read only bits):</b> The content from reading these bits is undefined.                                                                                                                                 |

Table 23 - DPLL House Keeping (DHKR) Register Bits

External Read/Write Address: 100<sub>H</sub>, 102<sub>H</sub>, 104<sub>H</sub>, 106<sub>H</sub>, 108<sub>H</sub>, 10A<sub>H</sub>, 10C<sub>H</sub>, 10E<sub>H</sub>,  
Reset Value: 0000<sub>H</sub>

|       | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8             | 7             | 6             | 5             | 4             | 3             | 2            | 1            | 0            |
|-------|----|----|----|----|----|----|---|---------------|---------------|---------------|---------------|---------------|---------------|--------------|--------------|--------------|
| SICR0 | 0  | 0  | 0  | 0  | 0  | 0  | 0 | STIN0<br>QEN3 | STIN0<br>QEN2 | STIN0<br>QEN1 | STIN0<br>QEN0 | STIN0<br>SMP1 | STIN0<br>SMP0 | STIN0<br>DR2 | STIN0<br>DR1 | STIN0<br>DR0 |
| SICR1 | 0  | 0  | 0  | 0  | 0  | 0  | 0 | STIN1<br>QEN3 | STIN1<br>QEN2 | STIN1<br>QEN1 | STIN1<br>QEN0 | STIN1<br>SMP1 | STIN1<br>SMP0 | STIN1<br>DR2 | STIN1<br>DR1 | STIN1<br>DR0 |
| SICR2 | 0  | 0  | 0  | 0  | 0  | 0  | 0 | STIN2<br>QEN3 | STIN2<br>QEN2 | STIN2<br>QEN1 | STIN2<br>QEN0 | STIN2<br>SMP1 | STIN2<br>SMP0 | STIN2<br>DR2 | STIN2<br>DR1 | STIN2<br>DR0 |
| SICR3 | 0  | 0  | 0  | 0  | 0  | 0  | 0 | STIN3<br>QEN3 | STIN3<br>QEN2 | STIN3<br>QEN1 | STIN3<br>QEN0 | STIN3<br>SMP1 | STIN3<br>SMP0 | STIN3<br>DR2 | STIN3<br>DR1 | STIN3<br>DR0 |
| SICR4 | 0  | 0  | 0  | 0  | 0  | 0  | 0 | STIN4<br>QEN3 | STIN4<br>QEN2 | STIN4<br>QEN1 | STIN4<br>QEN0 | STIN4<br>SMP1 | STIN4<br>SMP0 | STIN4<br>DR2 | STIN4<br>DR1 | STIN4<br>DR0 |
| SICR5 | 0  | 0  | 0  | 0  | 0  | 0  | 0 | STIN5<br>QEN3 | STIN5<br>QEN2 | STIN5<br>QEN1 | STIN5<br>QEN0 | STIN5<br>SMP1 | STIN5<br>SMP0 | STIN5<br>DR2 | STIN5<br>DR1 | STIN5<br>DR0 |
| SICR6 | 0  | 0  | 0  | 0  | 0  | 0  | 0 | STIN6<br>QEN3 | STIN6<br>QEN2 | STIN6<br>QEN1 | STIN6<br>QEN0 | STIN6<br>SMP1 | STIN6<br>SMP0 | STIN6<br>DR2 | STIN6<br>DR1 | STIN6<br>DR0 |
| SICR7 | 0  | 0  | 0  | 0  | 0  | 0  | 0 | STIN7<br>QEN3 | STIN7<br>QEN2 | STIN7<br>QEN1 | STIN7<br>QEN0 | STIN7<br>SMP1 | STIN7<br>SMP0 | STIN7<br>DR2 | STIN7<br>DR1 | STIN7<br>DR0 |

| Bit    | Name      | Description                                                                                                                                                                                                                                                                                                                        |
|--------|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15 - 9 | Unused    | <b>Reserved.</b> In normal functional mode, these bits MUST be set to zero.                                                                                                                                                                                                                                                        |
| 8      | STIN#QEN3 | <b>Quadrant Frame 3 Enable.</b> When this bit is low, the device is in normal operation mode. When this bit is high, the LSB of every channel in this quadrant frame is replaced by "1". This quadrant frame is defined as Ch24 to 31, Ch48 to 63 and Ch96 to 127 for the 2.048 Mbps, 4.096 Mbps and 8.192 Mbps mode respectively. |
| 7      | STIN#QEN2 | <b>Quadrant Frame 2 Enable.</b> When this bit is low, the device is in normal operation mode. When this bit is high, the LSB of every channel in this quadrant frame is replaced by "1". This quadrant frame is defined as Ch16 to 23, Ch32 to 47 and Ch64 to 95 for the 2.048 Mbps, 4.096 Mbps and 8.192 Mbps mode respectively.  |
| 6      | STIN#QEN1 | <b>Quadrant Frame 1 Enable.</b> When this bit is low, the device is in normal operation mode. When this bit is high, the LSB of every channel in this quadrant frame is replaced by "1". This quadrant frame is defined as Ch8 to 15, Ch16 to 31 and Ch32 to 63 for the 2.048 Mbps, 4.096 Mbps and 8.192 Mbps mode respectively.   |
| 5      | STIN#QEN0 | <b>Quadrant Frame 0 Enable.</b> When this bit is low, the device is in normal operation mode. When this bit is high, the LSB of every channel in this quadrant frame is replaced by "1". This quadrant frame is defined as Ch0 to 7, Ch8 to 15 and Ch16 to 31 for 2.048 Mbps, the 4.096 Mbps and 8.192 Mbps mode respectively.     |

**Table 24 - Stream Input Control Register 0 to 7 (SICR0 to SICR7)**

External Read/Write Address: 100<sub>H</sub>, 102<sub>H</sub>, 104<sub>H</sub>, 106<sub>H</sub>, 108<sub>H</sub>, 10A<sub>H</sub>, 10C<sub>H</sub>, 10E<sub>H</sub>,  
Reset Value: 0000<sub>H</sub>

|       | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8             | 7             | 6             | 5             | 4             | 3             | 2            | 1            | 0            |
|-------|----|----|----|----|----|----|---|---------------|---------------|---------------|---------------|---------------|---------------|--------------|--------------|--------------|
| SICR0 | 0  | 0  | 0  | 0  | 0  | 0  | 0 | STIN0<br>QEN3 | STIN0<br>QEN2 | STIN0<br>QEN1 | STIN0<br>QEN0 | STIN0<br>SMP1 | STIN0<br>SMP0 | STIN0<br>DR2 | STIN0<br>DR1 | STIN0<br>DR0 |
| SICR1 | 0  | 0  | 0  | 0  | 0  | 0  | 0 | STIN1<br>QEN3 | STIN1<br>QEN2 | STIN1<br>QEN1 | STIN1<br>QEN0 | STIN1<br>SMP1 | STIN1<br>SMP0 | STIN1<br>DR2 | STIN1<br>DR1 | STIN1<br>DR0 |
| SICR2 | 0  | 0  | 0  | 0  | 0  | 0  | 0 | STIN2<br>QEN3 | STIN2<br>QEN2 | STIN2<br>QEN1 | STIN2<br>QEN0 | STIN2<br>SMP1 | STIN2<br>SMP0 | STIN2<br>DR2 | STIN2<br>DR1 | STIN2<br>DR0 |
| SICR3 | 0  | 0  | 0  | 0  | 0  | 0  | 0 | STIN3<br>QEN3 | STIN3<br>QEN2 | STIN3<br>QEN1 | STIN3<br>QEN0 | STIN3<br>SMP1 | STIN3<br>SMP0 | STIN3<br>DR2 | STIN3<br>DR1 | STIN3<br>DR0 |
| SICR4 | 0  | 0  | 0  | 0  | 0  | 0  | 0 | STIN4<br>QEN3 | STIN4<br>QEN2 | STIN4<br>QEN1 | STIN4<br>QEN0 | STIN4<br>SMP1 | STIN4<br>SMP0 | STIN4<br>DR2 | STIN4<br>DR1 | STIN4<br>DR0 |
| SICR5 | 0  | 0  | 0  | 0  | 0  | 0  | 0 | STIN5<br>QEN3 | STIN5<br>QEN2 | STIN5<br>QEN1 | STIN5<br>QEN0 | STIN5<br>SMP1 | STIN5<br>SMP0 | STIN5<br>DR2 | STIN5<br>DR1 | STIN5<br>DR0 |
| SICR6 | 0  | 0  | 0  | 0  | 0  | 0  | 0 | STIN6<br>QEN3 | STIN6<br>QEN2 | STIN6<br>QEN1 | STIN6<br>QEN0 | STIN6<br>SMP1 | STIN6<br>SMP0 | STIN6<br>DR2 | STIN6<br>DR1 | STIN6<br>DR0 |
| SICR7 | 0  | 0  | 0  | 0  | 0  | 0  | 0 | STIN7<br>QEN3 | STIN7<br>QEN2 | STIN7<br>QEN1 | STIN7<br>QEN0 | STIN7<br>SMP1 | STIN7<br>SMP0 | STIN7<br>DR2 | STIN7<br>DR1 | STIN7<br>DR0 |

| Bit         | Name                                                                  | Description                                                                                                                                                                                                                                                                                                                                                                     |             |                |     |                                                                       |     |            |     |            |     |            |           |          |
|-------------|-----------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|----------------|-----|-----------------------------------------------------------------------|-----|------------|-----|------------|-----|------------|-----------|----------|
| 4 - 3       | STIN#SMP1 - 0                                                         | <div>Input Data Sampling Point Selection Bits:</div> <table><tr><th>STIN#SMP1-0</th><th>Sampling Point</th></tr><tr><td>00</td><td>3/4 point</td></tr><tr><td>01</td><td>4/4 point</td></tr><tr><td>10</td><td>1/4 point</td></tr><tr><td>11</td><td>2/4 point</td></tr></table>                                                                                                | STIN#SMP1-0 | Sampling Point | 00  | 3/4 point                                                             | 01  | 4/4 point  | 10  | 1/4 point  | 11  | 2/4 point  |           |          |
| STIN#SMP1-0 | Sampling Point                                                        |                                                                                                                                                                                                                                                                                                                                                                                 |             |                |     |                                                                       |     |            |     |            |     |            |           |          |
| 00          | 3/4 point                                                             |                                                                                                                                                                                                                                                                                                                                                                                 |             |                |     |                                                                       |     |            |     |            |     |            |           |          |
| 01          | 4/4 point                                                             |                                                                                                                                                                                                                                                                                                                                                                                 |             |                |     |                                                                       |     |            |     |            |     |            |           |          |
| 10          | 1/4 point                                                             |                                                                                                                                                                                                                                                                                                                                                                                 |             |                |     |                                                                       |     |            |     |            |     |            |           |          |
| 11          | 2/4 point                                                             |                                                                                                                                                                                                                                                                                                                                                                                 |             |                |     |                                                                       |     |            |     |            |     |            |           |          |
| 2 - 0       | STIN#DR2 - 0                                                          | <div>Input Data Rate Selection Bits:</div> <table><tr><th>STIN#DR2-0</th><th>Data Rate</th></tr><tr><td>000</td><td>Disabled - External pull-up or pull-down is required for ST-BUS input</td></tr><tr><td>001</td><td>2.048 Mbps</td></tr><tr><td>010</td><td>4.096 Mbps</td></tr><tr><td>011</td><td>8.192 Mbps</td></tr><tr><td>100 - 111</td><td>Reserved</td></tr></table> | STIN#DR2-0  | Data Rate      | 000 | Disabled - External pull-up or pull-down is required for ST-BUS input | 001 | 2.048 Mbps | 010 | 4.096 Mbps | 011 | 8.192 Mbps | 100 - 111 | Reserved |
| STIN#DR2-0  | Data Rate                                                             |                                                                                                                                                                                                                                                                                                                                                                                 |             |                |     |                                                                       |     |            |     |            |     |            |           |          |
| 000         | Disabled - External pull-up or pull-down is required for ST-BUS input |                                                                                                                                                                                                                                                                                                                                                                                 |             |                |     |                                                                       |     |            |     |            |     |            |           |          |
| 001         | 2.048 Mbps                                                            |                                                                                                                                                                                                                                                                                                                                                                                 |             |                |     |                                                                       |     |            |     |            |     |            |           |          |
| 010         | 4.096 Mbps                                                            |                                                                                                                                                                                                                                                                                                                                                                                 |             |                |     |                                                                       |     |            |     |            |     |            |           |          |
| 011         | 8.192 Mbps                                                            |                                                                                                                                                                                                                                                                                                                                                                                 |             |                |     |                                                                       |     |            |     |            |     |            |           |          |
| 100 - 111   | Reserved                                                              |                                                                                                                                                                                                                                                                                                                                                                                 |             |                |     |                                                                       |     |            |     |            |     |            |           |          |

Note: # denotes input stream from 0 to 7

**Table 24 - Stream Input Control Register 0 to 7 (SICR0 to SICR7) (continued)**

External Read/Write Address: 110<sub>H</sub>, 112<sub>H</sub>, 114<sub>H</sub>, 116<sub>H</sub>, 118<sub>H</sub>, 11A<sub>H</sub>, 11C<sub>H</sub>, 11E<sub>H</sub>,  
Reset Value: 0000<sub>H</sub>

|        | 15        | 14 | 13                                                                                                                                                                                                                                                                                                                                 | 12 | 11 | 10 | 9 | 8           | 7           | 6           | 5           | 4           | 3           | 2          | 1          | 0          |
|--------|-----------|----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|----|----|---|-------------|-------------|-------------|-------------|-------------|-------------|------------|------------|------------|
| SICR8  | 0         | 0  | 0                                                                                                                                                                                                                                                                                                                                  | 0  | 0  | 0  | 0 | STIN8 QEN3  | STIN8 QEN2  | STIN8 QEN1  | STIN8 QEN0  | STIN8 SMP1  | STIN8 SMP0  | STIN8 DR2  | STIN8 DR1  | STIN8 DR0  |
| SICR9  | 0         | 0  | 0                                                                                                                                                                                                                                                                                                                                  | 0  | 0  | 0  | 0 | STIN9 QEN3  | STIN9 QEN2  | STIN9 QEN1  | STIN9 QEN0  | STIN9 SMP1  | STIN9 SMP0  | STIN9 DR2  | STIN9 DR1  | STIN9 DR0  |
| SICR10 | 0         | 0  | 0                                                                                                                                                                                                                                                                                                                                  | 0  | 0  | 0  | 0 | STIN10 QEN3 | STIN10 QEN2 | STIN10 QEN1 | STIN10 QEN0 | STIN10 SMP1 | STIN10 SMP0 | STIN10 DR2 | STIN10 DR1 | STIN10 DR0 |
| SICR11 | 0         | 0  | 0                                                                                                                                                                                                                                                                                                                                  | 0  | 0  | 0  | 0 | STIN11 QEN3 | STIN11 QEN2 | STIN11 QEN1 | STIN11 QEN0 | STIN11 SMP1 | STIN11 SMP0 | STIN11 DR2 | STIN11 DR1 | STIN11 DR0 |
| SICR12 | 0         | 0  | 0                                                                                                                                                                                                                                                                                                                                  | 0  | 0  | 0  | 0 | STIN12 QEN3 | STIN12 QEN2 | STIN12 QEN1 | STIN12 QEN0 | STIN12 SMP1 | STIN12 SMP0 | STIN12 DR2 | STIN12 DR1 | STIN12 DR0 |
| SICR13 | 0         | 0  | 0                                                                                                                                                                                                                                                                                                                                  | 0  | 0  | 0  | 0 | STIN13 QEN3 | STIN13 QEN2 | STIN13 QEN1 | STIN13 QEN0 | STIN13 SMP1 | STIN13 SMP0 | STIN13 DR2 | STIN13 DR1 | STIN13 DR0 |
| SICR14 | 0         | 0  | 0                                                                                                                                                                                                                                                                                                                                  | 0  | 0  | 0  | 0 | STIN14 QEN3 | STIN14 QEN2 | STIN14 QEN1 | STIN14 QEN0 | STIN14 SMP1 | STIN14 SMP0 | STIN14 DR2 | STIN14 DR1 | STIN14 DR0 |
| SICR15 | 0         | 0  | 0                                                                                                                                                                                                                                                                                                                                  | 0  | 0  | 0  | 0 | STIN15      | STIN15      | STIN15      | STIN15      | STIN15      | STIN15      | STIN15     | STIN15     | STIN15     |
| Bit    | Name      |    | Description                                                                                                                                                                                                                                                                                                                        |    |    |    |   |             |             |             |             |             |             |            |            |            |
| 15 - 9 | Unused    |    | <b>Reserved.</b> In normal functional mode, these bits MUST be set to zero.                                                                                                                                                                                                                                                        |    |    |    |   |             |             |             |             |             |             |            |            |            |
| 8      | STIN#QEN3 |    | <b>Quadrant Frame 3 Enable.</b> When this bit is low, the device is in normal operation mode. When this bit is high, the LSB of every channel in this quadrant frame is replaced by "1". This quadrant frame is defined as Ch24 to 31, Ch48 to 63 and Ch96 to 127 for the 2.048 Mbps, 4.096 Mbps and 8.192 Mbps mode respectively. |    |    |    |   |             |             |             |             |             |             |            |            |            |
| 7      | STIN#QEN2 |    | <b>Quadrant Frame 2 Enable.</b> When this bit is low, the device is in normal operation mode. When this bit is high, the LSB of every channel in this quadrant frame is replaced by "1". This quadrant frame is defined as Ch16 to 23, Ch32 to 47 and Ch64 to 95 for the 2.048 Mbps, 4.096 Mbps and 8.192 Mbps mode respectively.  |    |    |    |   |             |             |             |             |             |             |            |            |            |
| 6      | STIN#QEN1 |    | <b>Quadrant Frame 1 Enable.</b> When this bit is low, the device is in normal operation mode. When this bit is high, the LSB of every channel in this quadrant frame is replaced by "1". This quadrant frame is defined as Ch8 to 15, Ch16 to 31 and Ch32 to 63 for the 2.048 Mbps, 4.096 Mbps and 8.192 Mbps mode respectively.   |    |    |    |   |             |             |             |             |             |             |            |            |            |
| 5      | STIN#QEN0 |    | <b>Quadrant Frame 0 Enable.</b> When this bit is low, the device is in normal operation mode. When this bit is high, the LSB of every channel in this quadrant frame is replaced by "1". This quadrant frame is defined as Ch0 to 7, Ch8 to 15 and Ch16 to 31 for 2.048 Mbps, the 4.096 Mbps and 8.192 Mbps mode respectively.     |    |    |    |   |             |             |             |             |             |             |            |            |            |

**Table 25 - Stream Input Control Register 8 to 15 (SICR8 to SICR15)**

External Read/Write Address: 110<sub>H</sub>, 112<sub>H</sub>, 114<sub>H</sub>, 116<sub>H</sub>, 118<sub>H</sub>, 11A<sub>H</sub>, 11C<sub>H</sub>, 11E<sub>H</sub>,  
Reset Value: 0000<sub>H</sub>

|             | 15                                                                    | 14 | 13 | 12 | 11                                                                                                                                                                                                                                                                                                                                                                   | 10 | 9 | 8           | 7           | 6           | 5           | 4           | 3           | 2          | 1          | 0          |             |                |     |                                                                       |     |            |     |            |     |            |           |          |
|-------------|-----------------------------------------------------------------------|----|----|----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|---|-------------|-------------|-------------|-------------|-------------|-------------|------------|------------|------------|-------------|----------------|-----|-----------------------------------------------------------------------|-----|------------|-----|------------|-----|------------|-----------|----------|
| SICR8       | 0                                                                     | 0  | 0  | 0  | 0                                                                                                                                                                                                                                                                                                                                                                    | 0  | 0 | STIN8 QEN3  | STIN8 QEN2  | STIN8 QEN1  | STIN8 QEN0  | STIN8 SMP1  | STIN8 SMP0  | STIN8 DR2  | STIN8 DR1  | STIN8 DR0  |             |                |     |                                                                       |     |            |     |            |     |            |           |          |
| SICR9       | 0                                                                     | 0  | 0  | 0  | 0                                                                                                                                                                                                                                                                                                                                                                    | 0  | 0 | STIN9 QEN3  | STIN9 QEN2  | STIN9 QEN1  | STIN9 QEN0  | STIN9 SMP1  | STIN9 SMP0  | STIN9 DR2  | STIN9 DR1  | STIN9 DR0  |             |                |     |                                                                       |     |            |     |            |     |            |           |          |
| SICR10      | 0                                                                     | 0  | 0  | 0  | 0                                                                                                                                                                                                                                                                                                                                                                    | 0  | 0 | STIN10 QEN3 | STIN10 QEN2 | STIN10 QEN1 | STIN10 QEN0 | STIN10 SMP1 | STIN10 SMP0 | STIN10 DR2 | STIN10 DR1 | STIN10 DR0 |             |                |     |                                                                       |     |            |     |            |     |            |           |          |
| SICR11      | 0                                                                     | 0  | 0  | 0  | 0                                                                                                                                                                                                                                                                                                                                                                    | 0  | 0 | STIN11 QEN3 | STIN11 QEN2 | STIN11 QEN1 | STIN11 QEN0 | STIN11 SMP1 | STIN11 SMP0 | STIN11 DR2 | STIN11 DR1 | STIN11 DR0 |             |                |     |                                                                       |     |            |     |            |     |            |           |          |
| SICR12      | 0                                                                     | 0  | 0  | 0  | 0                                                                                                                                                                                                                                                                                                                                                                    | 0  | 0 | STIN12 QEN3 | STIN12 QEN2 | STIN12 QEN1 | STIN12 QEN0 | STIN12 SMP1 | STIN12 SMP0 | STIN12 DR2 | STIN12 DR1 | STIN12 DR0 |             |                |     |                                                                       |     |            |     |            |     |            |           |          |
| SICR13      | 0                                                                     | 0  | 0  | 0  | 0                                                                                                                                                                                                                                                                                                                                                                    | 0  | 0 | STIN13 QEN3 | STIN13 QEN2 | STIN13 QEN1 | STIN13 QEN0 | STIN13 SMP1 | STIN13 SMP0 | STIN13 DR2 | STIN13 DR1 | STIN13 DR0 |             |                |     |                                                                       |     |            |     |            |     |            |           |          |
| SICR14      | 0                                                                     | 0  | 0  | 0  | 0                                                                                                                                                                                                                                                                                                                                                                    | 0  | 0 | STIN14 QEN3 | STIN14 QEN2 | STIN14 QEN1 | STIN14 QEN0 | STIN14 SMP1 | STIN14 SMP0 | STIN14 DR2 | STIN14 DR1 | STIN14 DR0 |             |                |     |                                                                       |     |            |     |            |     |            |           |          |
| SICR15      | 0                                                                     | 0  | 0  | 0  | 0                                                                                                                                                                                                                                                                                                                                                                    | 0  | 0 | STIN15 QEN3 | STIN15 QEN2 | STIN15 QEN1 | STIN15 QEN0 | STIN15 SMP1 | STIN15 SMP0 | STIN15 DR2 | STIN15 DR1 | STIN15 DR0 |             |                |     |                                                                       |     |            |     |            |     |            |           |          |
| Bit         | Name                                                                  |    |    |    | Description                                                                                                                                                                                                                                                                                                                                                          |    |   |             |             |             |             |             |             |            |            |            |             |                |     |                                                                       |     |            |     |            |     |            |           |          |
| 4 - 3       | STIN#SMP1 - 0                                                         |    |    |    | Input Data Sampling Point Selection Bits: <table><tr><td>STIN#SMP1-0</td><td>Sampling Point</td></tr><tr><td>00</td><td>3/4 point</td></tr><tr><td>01</td><td>4/4 point</td></tr><tr><td>10</td><td>1/4 point</td></tr><tr><td>11</td><td>2/4 point</td></tr></table>                                                                                                |    |   |             |             |             |             |             |             |            |            |            | STIN#SMP1-0 | Sampling Point | 00  | 3/4 point                                                             | 01  | 4/4 point  | 10  | 1/4 point  | 11  | 2/4 point  |           |          |
| STIN#SMP1-0 | Sampling Point                                                        |    |    |    |                                                                                                                                                                                                                                                                                                                                                                      |    |   |             |             |             |             |             |             |            |            |            |             |                |     |                                                                       |     |            |     |            |     |            |           |          |
| 00          | 3/4 point                                                             |    |    |    |                                                                                                                                                                                                                                                                                                                                                                      |    |   |             |             |             |             |             |             |            |            |            |             |                |     |                                                                       |     |            |     |            |     |            |           |          |
| 01          | 4/4 point                                                             |    |    |    |                                                                                                                                                                                                                                                                                                                                                                      |    |   |             |             |             |             |             |             |            |            |            |             |                |     |                                                                       |     |            |     |            |     |            |           |          |
| 10          | 1/4 point                                                             |    |    |    |                                                                                                                                                                                                                                                                                                                                                                      |    |   |             |             |             |             |             |             |            |            |            |             |                |     |                                                                       |     |            |     |            |     |            |           |          |
| 11          | 2/4 point                                                             |    |    |    |                                                                                                                                                                                                                                                                                                                                                                      |    |   |             |             |             |             |             |             |            |            |            |             |                |     |                                                                       |     |            |     |            |     |            |           |          |
| 2 - 0       | STIN#DR2 - 0                                                          |    |    |    | Input Data Rate Selection Bits: <table><tr><td>STIN#DR2-0</td><td>Data Rate</td></tr><tr><td>000</td><td>Disabled - External pull-up or pull-down is required for ST-BUS input</td></tr><tr><td>001</td><td>2.048 Mbps</td></tr><tr><td>010</td><td>4.096 Mbps</td></tr><tr><td>011</td><td>8.192 Mbps</td></tr><tr><td>100 - 111</td><td>Reserved</td></tr></table> |    |   |             |             |             |             |             |             |            |            |            | STIN#DR2-0  | Data Rate      | 000 | Disabled - External pull-up or pull-down is required for ST-BUS input | 001 | 2.048 Mbps | 010 | 4.096 Mbps | 011 | 8.192 Mbps | 100 - 111 | Reserved |
| STIN#DR2-0  | Data Rate                                                             |    |    |    |                                                                                                                                                                                                                                                                                                                                                                      |    |   |             |             |             |             |             |             |            |            |            |             |                |     |                                                                       |     |            |     |            |     |            |           |          |
| 000         | Disabled - External pull-up or pull-down is required for ST-BUS input |    |    |    |                                                                                                                                                                                                                                                                                                                                                                      |    |   |             |             |             |             |             |             |            |            |            |             |                |     |                                                                       |     |            |     |            |     |            |           |          |
| 001         | 2.048 Mbps                                                            |    |    |    |                                                                                                                                                                                                                                                                                                                                                                      |    |   |             |             |             |             |             |             |            |            |            |             |                |     |                                                                       |     |            |     |            |     |            |           |          |
| 010         | 4.096 Mbps                                                            |    |    |    |                                                                                                                                                                                                                                                                                                                                                                      |    |   |             |             |             |             |             |             |            |            |            |             |                |     |                                                                       |     |            |     |            |     |            |           |          |
| 011         | 8.192 Mbps                                                            |    |    |    |                                                                                                                                                                                                                                                                                                                                                                      |    |   |             |             |             |             |             |             |            |            |            |             |                |     |                                                                       |     |            |     |            |     |            |           |          |
| 100 - 111   | Reserved                                                              |    |    |    |                                                                                                                                                                                                                                                                                                                                                                      |    |   |             |             |             |             |             |             |            |            |            |             |                |     |                                                                       |     |            |     |            |     |            |           |          |

Note: # denotes input stream from 8 to 15

**Table 25 - Stream Input Control Register 8 to 15 (SICR8 to SICR15) (continued)**

External Read/Write Address: 101<sub>H</sub>, 103<sub>H</sub>, 105<sub>H</sub>, 107<sub>H</sub>, 109<sub>H</sub>, 10B<sub>H</sub>, 10D<sub>H</sub>, 10F<sub>H</sub>,  
Reset Value: 0000<sub>H</sub>

|       | 15 | 14 | 13 | 12 | 11 | 10 | 9            | 8            | 7            | 6            | 5            | 4            | 3            | 2            | 1            | 0            |
|-------|----|----|----|----|----|----|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| SIDR0 | 0  | 0  | 0  | 0  | 0  | 0  | STIN0<br>CD6 | STIN0<br>CD5 | STIN0<br>CD4 | STIN0<br>CD3 | STIN0<br>CD2 | STIN0<br>CD1 | STIN0<br>CD0 | STIN0<br>BD2 | STIN0<br>BD1 | STIN0<br>BD0 |
| SIDR1 | 0  | 0  | 0  | 0  | 0  | 0  | STIN1<br>CD6 | STIN1<br>CD5 | STIN1<br>CD4 | STIN1<br>CD3 | STIN1<br>CD2 | STIN1<br>CD1 | STIN1<br>CD0 | STIN1<br>BD2 | STIN1<br>BD1 | STIN1<br>BD0 |
| SIDR2 | 0  | 0  | 0  | 0  | 0  | 0  | STIN2<br>CD6 | STIN2<br>CD5 | STIN2<br>CD4 | STIN2<br>CD3 | STIN2<br>CD2 | STIN2<br>CD1 | STIN2<br>CD0 | STIN2<br>BD2 | STIN2<br>BD1 | STIN2<br>BD0 |
| SIDR3 | 0  | 0  | 0  | 0  | 0  | 0  | STIN3<br>CD6 | STIN3<br>CD5 | STIN3<br>CD4 | STIN3<br>CD3 | STIN3<br>CD2 | STIN3<br>CD1 | STIN3<br>CD0 | STIN3<br>BD2 | STIN3<br>BD1 | STIN3<br>BD0 |
| SIDR4 | 0  | 0  | 0  | 0  | 0  | 0  | STIN4<br>CD6 | STIN4<br>CD5 | STIN4<br>CD4 | STIN4<br>CD3 | STIN4<br>CD2 | STIN4<br>CD1 | STIN4<br>CD0 | STIN4<br>BD2 | STIN4<br>BD1 | STIN4<br>BD0 |
| SIDR5 | 0  | 0  | 0  | 0  | 0  | 0  | STIN5<br>CD6 | STIN5<br>CD5 | STIN5<br>CD4 | STIN5<br>CD3 | STIN5<br>CD2 | STIN5<br>CD1 | STIN5<br>CD0 | STIN5<br>BD2 | STIN5<br>BD1 | STIN5<br>BD0 |
| SIDR6 | 0  | 0  | 0  | 0  | 0  | 0  | STIN6<br>CD6 | STIN6<br>CD5 | STIN6<br>CD4 | STIN6<br>CD3 | STIN6<br>CD2 | STIN6<br>CD1 | STIN6<br>CD0 | STIN6<br>BD2 | STIN6<br>BD1 | STIN6<br>BD0 |
| SIDR7 | 0  | 0  | 0  | 0  | 0  | 0  | STIN7<br>CD6 | STIN7<br>CD5 | STIN7<br>CD4 | STIN7<br>CD3 | STIN7<br>CD2 | STIN7<br>CD1 | STIN7<br>CD0 | STIN7<br>BD2 | STIN7<br>BD1 | STIN7<br>BD0 |

| Bit     | Name         | Description                                                                                                                                                                                                                                    |
|---------|--------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15 - 10 | Unused       | <b>Reserved.</b> In normal functional mode, these bits MUST be set to zero.                                                                                                                                                                    |
| 9 - 3   | STIN#CD6 - 0 | <b>Input Stream# Channel Delay Bits:</b><br>The binary value of these bits refers to the number of channels that the input stream will be delayed. This value should not exceed the maximum channel number of the stream. Zero means no delay. |
| 2 - 0   | STIN#BD2 - 0 | <b>Input Stream# Bit Delay Bits:</b><br>The binary value of these bits refers to the number of bits that the input stream will be delayed. This maximum value is 7. Zero means no delay.                                                       |

Note: # denotes input stream from 0 to 7

**Table 26 - Stream Input Delay Register 0 to 7 (SIDR0 to SIDR7)**

External Read/Write Address: 111<sub>H</sub>, 113<sub>H</sub>, 115<sub>H</sub>, 117<sub>H</sub>, 119<sub>H</sub>, 11B<sub>H</sub>, 11D<sub>H</sub>, 11F<sub>H</sub>,  
Reset Value: 0000<sub>H</sub>

|        | 15 | 14 | 13 | 12 | 11 | 10 | 9             | 8             | 7             | 6             | 5             | 4             | 3             | 2             | 1             | 0             |
|--------|----|----|----|----|----|----|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| SIDR8  | 0  | 0  | 0  | 0  | 0  | 0  | STIN8<br>CD6  | STIN8<br>CD5  | STIN8<br>CD4  | STIN8<br>CD3  | STIN8<br>CD2  | STIN8<br>CD1  | STIN8<br>CD0  | STIN8B<br>BD2 | STIN8B<br>BD1 | STIN8B<br>BD0 |
| SIDR9  | 0  | 0  | 0  | 0  | 0  | 0  | STIN9<br>CD6  | STIN9<br>CD5  | STIN9<br>CD4  | STIN9<br>CD3  | STIN9<br>CD2  | STIN9<br>CD1  | STIN9<br>CD0  | STIN9B<br>BD2 | STIN9B<br>BD1 | STIN9B<br>BD0 |
| SIDR10 | 0  | 0  | 0  | 0  | 0  | 0  | STIN10<br>CD6 | STIN10<br>CD5 | STIN10<br>CD4 | STIN10<br>CD3 | STIN10<br>CD2 | STIN10<br>CD1 | STIN10<br>CD0 | STIN10<br>BD2 | STIN10<br>BD1 | STIN10<br>BD0 |
| SIDR11 | 0  | 0  | 0  | 0  | 0  | 0  | STIN11<br>CD6 | STIN11<br>CD5 | STIN11<br>CD4 | STIN11<br>CD3 | STIN11<br>CD2 | STIN11<br>CD1 | STIN11<br>CD0 | STIN11<br>BD2 | STIN11<br>BD1 | STIN11<br>BD0 |
| SIDR12 | 0  | 0  | 0  | 0  | 0  | 0  | STIN12<br>CD6 | STIN12<br>CD5 | STIN12<br>CD4 | STIN12<br>CD3 | STIN12<br>CD2 | STIN12<br>CD1 | STIN12<br>CD0 | STIN12<br>BD2 | STIN12<br>BD1 | STIN12<br>BD0 |
| SIDR13 | 0  | 0  | 0  | 0  | 0  | 0  | STIN13<br>CD6 | STIN13<br>CD5 | STIN13<br>CD4 | STIN13<br>CD3 | STIN13<br>CD2 | STIN13<br>CD1 | STIN13<br>CD0 | STIN13<br>BD2 | STIN13<br>BD1 | STIN13<br>BD0 |
| SIDR14 | 0  | 0  | 0  | 0  | 0  | 0  | STIN14<br>CD6 | STIN14<br>CD5 | STIN14<br>CD4 | STIN14<br>CD3 | STIN14<br>CD2 | STIN14<br>CD1 | STIN14<br>CD0 | STIN14<br>BD2 | STIN14<br>BD1 | STIN14<br>BD0 |
| SIDR15 | 0  | 0  | 0  | 0  | 0  | 0  | STIN15<br>CD6 | STIN15<br>CD5 | STIN15<br>CD4 | STIN15<br>CD3 | STIN15<br>CD2 | STIN15<br>CD1 | STIN15<br>CD0 | STIN15<br>BD2 | STIN15<br>BD1 | STIN15<br>BD0 |

| Bit     | Name         | Description                                                                                                                                                                                                                                    |
|---------|--------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15 - 10 | Unused       | <b>Reserved.</b> In normal functional mode, these bits MUST be set to zero.                                                                                                                                                                    |
| 9 - 3   | STIN#CD6 - 0 | <b>Input Stream# Channel Delay Bits:</b><br>The binary value of these bits refers to the number of channels that the input stream will be delayed. This value should not exceed the maximum channel number of the stream. Zero means no delay. |
| 2 - 0   | STIN#BD2 - 0 | <b>Input Stream# Bit Delay Bits:</b><br>The binary value of these bits refers to the number of bits that the input stream will be delayed. This maximum value is 7. Zero means no delay.                                                       |

Note: # denotes input stream from 8 to 15

**Table 27 - Stream Input Delay Register 8 to 15 (SIDR8 to SIDR15)**

External Read/Write Address: 200<sub>H</sub>, 202<sub>H</sub>, 204<sub>H</sub>, 206<sub>H</sub>, 208<sub>H</sub>, 20A<sub>H</sub>, 20C<sub>H</sub>, 20E<sub>H</sub>,  
Reset Value: 0000<sub>H</sub>

|       | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6            | 5            | 4            | 3            | 2           | 1           | 0           |
|-------|----|----|----|----|----|----|---|---|---|--------------|--------------|--------------|--------------|-------------|-------------|-------------|
| SOCR0 | 0  | 0  | 0  | 0  | 0  | 0  | 0 | 0 | 0 | STOHZ0<br>AC | STOHZ0<br>A2 | STOHZ0<br>A1 | STOHZ0<br>A0 | STO0<br>DR2 | STO0<br>DR1 | STO0<br>DR0 |
| SOCR1 | 0  | 0  | 0  | 0  | 0  | 0  | 0 | 0 | 0 | STOHZ1<br>AC | STOHZ1<br>A2 | STOHZ1<br>A1 | STOHZ1<br>A0 | STO1<br>DR2 | STO1<br>DR1 | STO1<br>DR0 |
| SOCR2 | 0  | 0  | 0  | 0  | 0  | 0  | 0 | 0 | 0 | STOHZ2<br>AC | STOHZ2<br>A2 | STOHZ2<br>A1 | STOHZ2<br>A0 | STO2<br>DR2 | STO2<br>DR1 | STO2<br>DR0 |
| SOCR3 | 0  | 0  | 0  | 0  | 0  | 0  | 0 | 0 | 0 | STOHZ3<br>AC | STOHZ3<br>A2 | STOHZ3<br>A1 | STOHZ3<br>A0 | STO3<br>DR2 | STO3<br>DR1 | STO3<br>DR0 |
| SOCR4 | 0  | 0  | 0  | 0  | 0  | 0  | 0 | 0 | 0 | STOHZ4<br>AC | STOHZ4<br>A2 | STOHZ4<br>A1 | STOHZ4<br>A0 | STO4<br>DR2 | STO4<br>DR1 | STO4<br>DR0 |
| SOCR5 | 0  | 0  | 0  | 0  | 0  | 0  | 0 | 0 | 0 | STOHZ5<br>AC | STOHZ5<br>A2 | STOHZ5<br>A1 | STOHZ5<br>A0 | STO5<br>DR2 | STO5<br>DR1 | STO5<br>DR0 |
| SOCR6 | 0  | 0  | 0  | 0  | 0  | 0  | 0 | 0 | 0 | STOHZ6<br>AC | STOHZ6<br>A2 | STOHZ6<br>A1 | STOHZ6<br>A0 | STO6<br>DR2 | STO6<br>DR1 | STO6<br>DR0 |
| SOCR7 | 0  | 0  | 0  | 0  | 0  | 0  | 0 | 0 | 0 | STOHZ7       | STOHZ7       | STOHZ7       | STOHZ7       | STO7        | STO7        | STO7        |

| Bit        | Name                                     | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |            |                                          |                                          |                              |        |            |     |            |         |            |           |          |     |         |         |     |         |         |         |          |          |
|------------|------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|------------------------------------------|------------------------------------------|------------------------------|--------|------------|-----|------------|---------|------------|-----------|----------|-----|---------|---------|-----|---------|---------|---------|----------|----------|
| 15 - 7     | Unused                                   | <b>Reserved.</b> In normal functional mode, these bits MUST be set to zero.                                                                                                                                                                                                                                                                                                                                                                                                                                                |            |                                          |                                          |                              |        |            |     |            |         |            |           |          |     |         |         |     |         |         |         |          |          |
| 6          | STOHZ#AC                                 | <b>STOHZ Advancement Control.</b> When this bit is low, the advancement unit is 15.2 ns. When this bit is high, the advancement unit is 1/4 bit.                                                                                                                                                                                                                                                                                                                                                                           |            |                                          |                                          |                              |        |            |     |            |         |            |           |          |     |         |         |     |         |         |         |          |          |
| 5 - 3      | STOHZ#A2 - 0                             | <b>STOHZ Additional Advancement Bits:</b> <table><tr><th>STOHZ#A2-0</th><th>Additional Advancement<br/>(STOHZ#AC = 0)</th><th>Additional Advancement<br/>(STOHZ#AC = 1)</th></tr><tr><td>000</td><td>0.0 ns</td><td>0 bit</td></tr><tr><td>001</td><td>15.2 ns</td><td>1/4 bit</td></tr><tr><td>010</td><td>30.5 ns</td><td>1/2 bit</td></tr><tr><td>011</td><td>45.7 ns</td><td>3/4 bit</td></tr><tr><td>100</td><td>61.0 ns</td><td>4/4 bit</td></tr><tr><td>101-111</td><td>Reserved</td><td>Reserved</td></tr></table> | STOHZ#A2-0 | Additional Advancement<br>(STOHZ#AC = 0) | Additional Advancement<br>(STOHZ#AC = 1) | 000                          | 0.0 ns | 0 bit      | 001 | 15.2 ns    | 1/4 bit | 010        | 30.5 ns   | 1/2 bit  | 011 | 45.7 ns | 3/4 bit | 100 | 61.0 ns | 4/4 bit | 101-111 | Reserved | Reserved |
| STOHZ#A2-0 | Additional Advancement<br>(STOHZ#AC = 0) | Additional Advancement<br>(STOHZ#AC = 1)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |            |                                          |                                          |                              |        |            |     |            |         |            |           |          |     |         |         |     |         |         |         |          |          |
| 000        | 0.0 ns                                   | 0 bit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |            |                                          |                                          |                              |        |            |     |            |         |            |           |          |     |         |         |     |         |         |         |          |          |
| 001        | 15.2 ns                                  | 1/4 bit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |            |                                          |                                          |                              |        |            |     |            |         |            |           |          |     |         |         |     |         |         |         |          |          |
| 010        | 30.5 ns                                  | 1/2 bit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |            |                                          |                                          |                              |        |            |     |            |         |            |           |          |     |         |         |     |         |         |         |          |          |
| 011        | 45.7 ns                                  | 3/4 bit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |            |                                          |                                          |                              |        |            |     |            |         |            |           |          |     |         |         |     |         |         |         |          |          |
| 100        | 61.0 ns                                  | 4/4 bit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |            |                                          |                                          |                              |        |            |     |            |         |            |           |          |     |         |         |     |         |         |         |          |          |
| 101-111    | Reserved                                 | Reserved                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |            |                                          |                                          |                              |        |            |     |            |         |            |           |          |     |         |         |     |         |         |         |          |          |
| 2 - 0      | STO#DR2 - 0                              | <b>Output Data Rate Selection Bits:</b> <table><tr><th>STO#DR2-0</th><th>Output Data Rate</th></tr><tr><td>000</td><td>STo HiZ<br/>STOHZ driven high</td></tr><tr><td>001</td><td>2.048 Mbps</td></tr><tr><td>010</td><td>4.096 Mbps</td></tr><tr><td>011</td><td>8.192 Mbps</td></tr><tr><td>100 - 111</td><td>Reserved</td></tr></table>                                                                                                                                                                                 | STO#DR2-0  | Output Data Rate                         | 000                                      | STo HiZ<br>STOHZ driven high | 001    | 2.048 Mbps | 010 | 4.096 Mbps | 011     | 8.192 Mbps | 100 - 111 | Reserved |     |         |         |     |         |         |         |          |          |
| STO#DR2-0  | Output Data Rate                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |            |                                          |                                          |                              |        |            |     |            |         |            |           |          |     |         |         |     |         |         |         |          |          |
| 000        | STo HiZ<br>STOHZ driven high             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |            |                                          |                                          |                              |        |            |     |            |         |            |           |          |     |         |         |     |         |         |         |          |          |
| 001        | 2.048 Mbps                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |            |                                          |                                          |                              |        |            |     |            |         |            |           |          |     |         |         |     |         |         |         |          |          |
| 010        | 4.096 Mbps                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |            |                                          |                                          |                              |        |            |     |            |         |            |           |          |     |         |         |     |         |         |         |          |          |
| 011        | 8.192 Mbps                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |            |                                          |                                          |                              |        |            |     |            |         |            |           |          |     |         |         |     |         |         |         |          |          |
| 100 - 111  | Reserved                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |            |                                          |                                          |                              |        |            |     |            |         |            |           |          |     |         |         |     |         |         |         |          |          |

Note: # denotes input stream from 0 to 7

**Table 28 - Stream Output Control Register 0 to 7 (SOCRO to SOCR7)**

External Read/Write Address: 210<sub>H</sub>, 212<sub>H</sub>, 214<sub>H</sub>, 216<sub>H</sub>, 218<sub>H</sub>, 21A<sub>H</sub>, 21C<sub>H</sub>, 21E<sub>H</sub>,  
Reset Value: 0000<sub>H</sub>

|        | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6             | 5             | 4             | 3             | 2            | 1            | 0            |
|--------|----|----|----|----|----|----|---|---|---|---------------|---------------|---------------|---------------|--------------|--------------|--------------|
| SOCR8  | 0  | 0  | 0  | 0  | 0  | 0  | 0 | 0 | 0 | STOHZ8<br>AC  | STOHZ8<br>A2  | STOHZ8<br>A1  | STOHZ8<br>A0  | STO8<br>DR2  | STO8<br>DR1  | STO8<br>DR0  |
| SOCR9  | 0  | 0  | 0  | 0  | 0  | 0  | 0 | 0 | 0 | STOHZ9<br>AC  | STOHZ9<br>A2  | STOHZ9<br>A1  | STOHZ9<br>A0  | STO9<br>DR2  | STO9<br>DR1  | STO9<br>DR0  |
| SOCR10 | 0  | 0  | 0  | 0  | 0  | 0  | 0 | 0 | 0 | STOHZ10<br>AC | STOHZ10<br>A2 | STOHZ10<br>A1 | STOHZ10<br>A0 | STO10<br>DR2 | STO10<br>DR1 | STO10<br>DR0 |
| SOCR11 | 0  | 0  | 0  | 0  | 0  | 0  | 0 | 0 | 0 | STOHZ11<br>AC | STOHZ11<br>A2 | STOHZ11<br>A1 | STOHZ11<br>A0 | STO11<br>DR2 | STO11<br>DR1 | STO11<br>DR0 |
| SOCR12 | 0  | 0  | 0  | 0  | 0  | 0  | 0 | 0 | 0 | STOHZ12<br>AC | STOHZ12<br>A2 | STOHZ12<br>A1 | STOHZ12<br>A0 | STO12<br>DR2 | STO12<br>DR1 | STO12<br>DR0 |
| SOCR13 | 0  | 0  | 0  | 0  | 0  | 0  | 0 | 0 | 0 | STOHZ13<br>AC | STOHZ13<br>A2 | STOHZ13<br>A1 | STOHZ13<br>A0 | STO13<br>DR2 | STO13<br>DR1 | STO13<br>DR0 |
| SOCR14 | 0  | 0  | 0  | 0  | 0  | 0  | 0 | 0 | 0 | STOHZ14<br>AC | STOHZ14<br>A2 | STOHZ14<br>A1 | STOHZ14<br>A0 | STO14<br>DR2 | STO14<br>DR1 | STO14<br>DR0 |
| SOCR15 | 0  | 0  | 0  | 0  | 0  | 0  | 0 | 0 | 0 | STOHZ15       | STOHZ15       | STOHZ15       | STOHZ15       | STO15        | STO15        | STO15        |

| Bit        | Name                                     | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |            |                                          |                                          |                              |        |            |     |            |         |            |           |          |     |         |         |     |         |         |         |          |          |
|------------|------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|------------------------------------------|------------------------------------------|------------------------------|--------|------------|-----|------------|---------|------------|-----------|----------|-----|---------|---------|-----|---------|---------|---------|----------|----------|
| 15 - 7     | Unused                                   | <b>Reserved.</b> In normal functional mode, these bits MUST be set to zero.                                                                                                                                                                                                                                                                                                                                                                                                                                                |            |                                          |                                          |                              |        |            |     |            |         |            |           |          |     |         |         |     |         |         |         |          |          |
| 6          | STOHZ#AC                                 | <b>STOHZ Advancement Control.</b> When this bit is low, the advancement unit is 15.2 ns. When this bit is high, the advancement unit is 1/4 bit.                                                                                                                                                                                                                                                                                                                                                                           |            |                                          |                                          |                              |        |            |     |            |         |            |           |          |     |         |         |     |         |         |         |          |          |
| 5 - 3      | STOHZ#A2 - 0                             | <b>STOHZ Additional Advancement Bits:</b> <table><tr><th>STOHZ#A2-0</th><th>Additional Advancement<br/>(STOHZ#AC = 0)</th><th>Additional Advancement<br/>(STOHZ#AC = 1)</th></tr><tr><td>000</td><td>0.0 ns</td><td>0 bit</td></tr><tr><td>001</td><td>15.2 ns</td><td>1/4 bit</td></tr><tr><td>010</td><td>30.5 ns</td><td>1/2 bit</td></tr><tr><td>011</td><td>45.7 ns</td><td>3/4 bit</td></tr><tr><td>100</td><td>61.0 ns</td><td>4/4 bit</td></tr><tr><td>101-111</td><td>Reserved</td><td>Reserved</td></tr></table> | STOHZ#A2-0 | Additional Advancement<br>(STOHZ#AC = 0) | Additional Advancement<br>(STOHZ#AC = 1) | 000                          | 0.0 ns | 0 bit      | 001 | 15.2 ns    | 1/4 bit | 010        | 30.5 ns   | 1/2 bit  | 011 | 45.7 ns | 3/4 bit | 100 | 61.0 ns | 4/4 bit | 101-111 | Reserved | Reserved |
| STOHZ#A2-0 | Additional Advancement<br>(STOHZ#AC = 0) | Additional Advancement<br>(STOHZ#AC = 1)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |            |                                          |                                          |                              |        |            |     |            |         |            |           |          |     |         |         |     |         |         |         |          |          |
| 000        | 0.0 ns                                   | 0 bit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |            |                                          |                                          |                              |        |            |     |            |         |            |           |          |     |         |         |     |         |         |         |          |          |
| 001        | 15.2 ns                                  | 1/4 bit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |            |                                          |                                          |                              |        |            |     |            |         |            |           |          |     |         |         |     |         |         |         |          |          |
| 010        | 30.5 ns                                  | 1/2 bit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |            |                                          |                                          |                              |        |            |     |            |         |            |           |          |     |         |         |     |         |         |         |          |          |
| 011        | 45.7 ns                                  | 3/4 bit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |            |                                          |                                          |                              |        |            |     |            |         |            |           |          |     |         |         |     |         |         |         |          |          |
| 100        | 61.0 ns                                  | 4/4 bit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |            |                                          |                                          |                              |        |            |     |            |         |            |           |          |     |         |         |     |         |         |         |          |          |
| 101-111    | Reserved                                 | Reserved                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |            |                                          |                                          |                              |        |            |     |            |         |            |           |          |     |         |         |     |         |         |         |          |          |
| 2 - 0      | STO#DR2 - 0                              | <b>Output Data Rate Selection Bits:</b> <table><tr><th>STO#DR2-0</th><th>Output Data Rate</th></tr><tr><td>000</td><td>STo HiZ<br/>STOHZ driven high</td></tr><tr><td>001</td><td>2.048 Mbps</td></tr><tr><td>010</td><td>4.096 Mbps</td></tr><tr><td>011</td><td>8.192 Mbps</td></tr><tr><td>100 - 111</td><td>Reserved</td></tr></table>                                                                                                                                                                                 | STO#DR2-0  | Output Data Rate                         | 000                                      | STo HiZ<br>STOHZ driven high | 001    | 2.048 Mbps | 010 | 4.096 Mbps | 011     | 8.192 Mbps | 100 - 111 | Reserved |     |         |         |     |         |         |         |          |          |
| STO#DR2-0  | Output Data Rate                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |            |                                          |                                          |                              |        |            |     |            |         |            |           |          |     |         |         |     |         |         |         |          |          |
| 000        | STo HiZ<br>STOHZ driven high             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |            |                                          |                                          |                              |        |            |     |            |         |            |           |          |     |         |         |     |         |         |         |          |          |
| 001        | 2.048 Mbps                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |            |                                          |                                          |                              |        |            |     |            |         |            |           |          |     |         |         |     |         |         |         |          |          |
| 010        | 4.096 Mbps                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |            |                                          |                                          |                              |        |            |     |            |         |            |           |          |     |         |         |     |         |         |         |          |          |
| 011        | 8.192 Mbps                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |            |                                          |                                          |                              |        |            |     |            |         |            |           |          |     |         |         |     |         |         |         |          |          |
| 100 - 111  | Reserved                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |            |                                          |                                          |                              |        |            |     |            |         |            |           |          |     |         |         |     |         |         |         |          |          |

Note: # denotes input stream from 8 to 15

**Table 29 - Stream Output Control Register 8 to 15 (SOCR8 to SOCR15)**

External Read/Write Address: 201<sub>H</sub>, 203<sub>H</sub>, 205<sub>H</sub>, 207<sub>H</sub>, 209<sub>H</sub>, 20B<sub>H</sub>, 20D<sub>H</sub>, 20F<sub>H</sub>,  
Reset Value: 0000<sub>H</sub>

|       | 15 | 14 | 13 | 12 | 11          | 10          | 9           | 8           | 7           | 6           | 5           | 4           | 3           | 2           | 1           | 0           |
|-------|----|----|----|----|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| SOOR0 | 0  | 0  | 0  | 0  | STO0<br>CD6 | STO0<br>CD5 | STO0<br>CD4 | STO0<br>CD3 | STO0<br>CD2 | STO0<br>CD1 | STO0<br>CD0 | STO0<br>BD2 | STO0<br>BD1 | STO0<br>BD0 | STO0<br>FA1 | STO0<br>FA0 |
| SOOR1 | 0  | 0  | 0  | 0  | STO1<br>CD6 | STO1<br>CD5 | STO1<br>CD4 | STO1<br>CD3 | STO1<br>CD2 | STO1<br>CD1 | STO1<br>CD0 | STO1<br>BD2 | STO1<br>BD1 | STO1<br>BD0 | STO1<br>FA1 | STO1<br>FA0 |
| SOOR2 | 0  | 0  | 0  | 0  | STO2<br>CD6 | STO2<br>CD5 | STO2<br>CD4 | STO2<br>CD3 | STO2<br>CD2 | STO2<br>CD1 | STO2<br>CD0 | STO2<br>BD2 | STO2<br>BD1 | STO2<br>BD0 | STO2<br>FA1 | STO2<br>FA0 |
| SOOR3 | 0  | 0  | 0  | 0  | STO3<br>CD6 | STO3<br>CD5 | STO3<br>CD4 | STO3<br>CD3 | STO3<br>CD2 | STO3<br>CD1 | STO3<br>CD0 | STO3<br>BD2 | STO3<br>BD1 | STO3<br>BD0 | STO3<br>FA1 | STO3<br>FA0 |
| SOOR4 | 0  | 0  | 0  | 0  | STO4<br>CD6 | STO4<br>CD5 | STO4<br>CD4 | STO4<br>CD3 | STO4<br>CD2 | STO4<br>CD1 | STO4<br>CD0 | STO4<br>BD2 | STO4<br>BD1 | STO4<br>BD0 | STO4<br>FA1 | STO4<br>FA0 |
| SOOR5 | 0  | 0  | 0  | 0  | STO5<br>CD6 | STO5<br>CD5 | STO5<br>CD4 | STO5<br>CD3 | STO5<br>CD2 | STO5<br>CD1 | STO5<br>CD0 | STO5<br>BD2 | STO5<br>BD1 | STO5<br>BD0 | STO5<br>FA1 | STO5<br>FA0 |
| SOOR6 | 0  | 0  | 0  | 0  | STO6<br>CD6 | STO6<br>CD5 | STO6<br>CD4 | STO6<br>CD3 | STO6<br>CD2 | STO6<br>CD1 | STO6<br>CD0 | STO6<br>BD2 | STO6<br>BD1 | STO6<br>BD0 | STO6<br>FA1 | STO6<br>FA0 |
| SOOR7 | 0  | 0  | 0  | 0  | STO7<br>CD6 | STO7<br>CD5 | STO7<br>CD4 | STO7<br>CD3 | STO7<br>CD2 | STO7<br>CD1 | STO7<br>CD0 | STO7<br>BD2 | STO7<br>BD1 | STO7<br>BD0 | STO7<br>FA1 | STO7<br>FA0 |

| Bit       | Name        | Description                                                                                                                                                                                                                                                |           |             |    |   |    |         |    |         |    |         |
|-----------|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|-------------|----|---|----|---------|----|---------|----|---------|
| 15 - 12   | Unused      | <b>Reserved.</b>                                                                                                                                                                                                                                           |           |             |    |   |    |         |    |         |    |         |
| 11 - 5    | STO#CD6-0   | <b>Output Stream# Channel Delay Bits:</b><br>The binary value of these bits refers to the number of channels that the output stream is to be delayed. This value should not exceed the maximum channel number of the stream. Zero means no delay.          |           |             |    |   |    |         |    |         |    |         |
| 4 - 2     | STO#BD2-0   | <b>Output Stream# Bit Delay Selection Bits:</b><br>The binary value of these bits refers to the number of bits that the output stream is to be delayed. The maximum value is 7. Zero means no delay.                                                       |           |             |    |   |    |         |    |         |    |         |
| 1 - 0     | STO#FA1-0   | <b>Output Stream# Fractional Advancement Bits</b> <table><tr><th>STO#FA1-0</th><th>Advanced By</th></tr><tr><td>00</td><td>0</td></tr><tr><td>01</td><td>1/4 bit</td></tr><tr><td>10</td><td>2/4 bit</td></tr><tr><td>11</td><td>3/4 bit</td></tr></table> | STO#FA1-0 | Advanced By | 00 | 0 | 01 | 1/4 bit | 10 | 2/4 bit | 11 | 3/4 bit |
| STO#FA1-0 | Advanced By |                                                                                                                                                                                                                                                            |           |             |    |   |    |         |    |         |    |         |
| 00        | 0           |                                                                                                                                                                                                                                                            |           |             |    |   |    |         |    |         |    |         |
| 01        | 1/4 bit     |                                                                                                                                                                                                                                                            |           |             |    |   |    |         |    |         |    |         |
| 10        | 2/4 bit     |                                                                                                                                                                                                                                                            |           |             |    |   |    |         |    |         |    |         |
| 11        | 3/4 bit     |                                                                                                                                                                                                                                                            |           |             |    |   |    |         |    |         |    |         |

Note: # denotes input stream from 0 to 7

**Table 30 - Stream Output Offset Register 0 to 7 (SOOR0 to SOOR7)**

External Read/Write Address: 211<sub>H</sub>, 213<sub>H</sub>, 215<sub>H</sub>, 217<sub>H</sub>, 219<sub>H</sub>, 21B<sub>H</sub>, 21D<sub>H</sub>, 21F<sub>H</sub>,  
Reset Value: 0000<sub>H</sub>

|        | 15 | 14 | 13 | 12 | 11           | 10           | 9            | 8            | 7            | 6            | 5            | 4             | 3            | 2            | 1            | 0            |
|--------|----|----|----|----|--------------|--------------|--------------|--------------|--------------|--------------|--------------|---------------|--------------|--------------|--------------|--------------|
| SOOR8  | 0  | 0  | 0  | 0  | STO8C<br>D6  | STO8<br>CD5  | STO8<br>CD4  | STO8<br>CD3  | STO8<br>CD2  | STO8<br>CD1  | STO8<br>CD0  | STO8B<br>BD2  | STO8<br>BD1  | STO8<br>BD0  | STO8<br>FA1  | STO8<br>FA0  |
| SOOR9  | 0  | 0  | 0  | 0  | STO9C<br>D6  | STO9<br>CD5  | STO9<br>CD4  | STO9<br>CD3  | STO9<br>CD2  | STO9<br>CD1  | STO9<br>CD0  | STO9B<br>BD2  | STO9<br>BD1  | STO9<br>BD0  | STO9<br>FA1  | STO9<br>FA0  |
| SOOR10 | 0  | 0  | 0  | 0  | STO10C<br>D6 | STO10<br>CD5 | STO10<br>CD4 | STO10<br>CD3 | STO10<br>CD2 | STO10<br>CD1 | STO10<br>CD0 | STO10B<br>BD2 | STO10<br>BD1 | STO10<br>BD0 | STO10<br>FA1 | STO10<br>FA0 |
| SOOR11 | 0  | 0  | 0  | 0  | STO11C<br>D6 | STO11<br>CD5 | STO11<br>CD4 | STO11<br>CD3 | STO11<br>CD2 | STO11<br>CD1 | STO11<br>CD0 | STO11B<br>BD2 | STO11<br>BD1 | STO11<br>BD0 | STO11<br>FA1 | STO11<br>FA0 |
| SOOR12 | 0  | 0  | 0  | 0  | STO12C<br>D6 | STO12<br>CD5 | STO12<br>CD4 | STO12<br>CD3 | STO12<br>CD2 | STO12<br>CD1 | STO12<br>CD0 | STO12B<br>BD2 | STO12<br>BD1 | STO12<br>BD0 | STO12<br>FA1 | STO12<br>FA0 |
| SOOR13 | 0  | 0  | 0  | 0  | STO13C<br>D6 | STO13<br>CD5 | STO13<br>CD4 | STO13<br>CD3 | STO13<br>CD2 | STO13<br>CD1 | STO13<br>CD0 | STO13B<br>BD2 | STO13<br>BD1 | STO13<br>BD0 | STO13<br>FA1 | STO13<br>FA0 |
| SOOR14 | 0  | 0  | 0  | 0  | STO14C<br>D6 | STO14<br>CD5 | STO14<br>CD4 | STO14<br>CD3 | STO14<br>CD2 | STO14<br>CD1 | STO14<br>CD0 | STO14B<br>BD2 | STO14<br>BD1 | STO14<br>BD0 | STO14<br>FA1 | STO14<br>FA0 |
| SOOR15 | 0  | 0  | 0  | 0  | STO15C<br>D6 | STO15<br>CD5 | STO15<br>CD4 | STO15<br>CD3 | STO15<br>CD2 | STO15<br>CD1 | STO15<br>CD0 | STO15B<br>BD2 | STO15<br>BD1 | STO15<br>BD0 | STO15<br>FA1 | STO15<br>FA0 |

| Bit       | Name        | Description                                                                                                                                                                                                                                                |           |             |    |   |    |         |    |         |    |         |
|-----------|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|-------------|----|---|----|---------|----|---------|----|---------|
| 15 - 12   | Unused      | <b>Reserved.</b>                                                                                                                                                                                                                                           |           |             |    |   |    |         |    |         |    |         |
| 11 - 5    | STO#CD6-0   | <b>Output Stream# Channel Delay Bits:</b><br>The binary value of these bits refers to the number of channels that the output stream is to be delayed. This value should not exceed the maximum channel number of the stream. Zero means no delay.          |           |             |    |   |    |         |    |         |    |         |
| 4 - 2     | STO#BD2-0   | <b>Output Stream# Bit Delay Selection Bits:</b><br>The binary value of these bits refers to the number of bits that the output stream is to be delayed. The maximum value is 7. Zero means no delay.                                                       |           |             |    |   |    |         |    |         |    |         |
| 1 - 0     | STO#FA1-0   | <b>Output Stream# Fractional Advancement Bits</b> <table><tr><th>STO#FA1-0</th><th>Advanced By</th></tr><tr><td>00</td><td>0</td></tr><tr><td>01</td><td>1/4 bit</td></tr><tr><td>10</td><td>2/4 bit</td></tr><tr><td>11</td><td>3/4 bit</td></tr></table> | STO#FA1-0 | Advanced By | 00 | 0 | 01 | 1/4 bit | 10 | 2/4 bit | 11 | 3/4 bit |
| STO#FA1-0 | Advanced By |                                                                                                                                                                                                                                                            |           |             |    |   |    |         |    |         |    |         |
| 00        | 0           |                                                                                                                                                                                                                                                            |           |             |    |   |    |         |    |         |    |         |
| 01        | 1/4 bit     |                                                                                                                                                                                                                                                            |           |             |    |   |    |         |    |         |    |         |
| 10        | 2/4 bit     |                                                                                                                                                                                                                                                            |           |             |    |   |    |         |    |         |    |         |
| 11        | 3/4 bit     |                                                                                                                                                                                                                                                            |           |             |    |   |    |         |    |         |    |         |

Note: # denotes input stream from 8 to 15

**Table 31 - Stream Output Offset Register 8 to 15 (SOOR8 to SOOR15)**

## 8.0 Memory Address Mappings

When A11 is high, the data or the connection memory can be accessed by the microprocessor port. The Bit 0 to Bit 2 in the control register determine the access to the data or connection memory

| MSB<br>(Note 1)              | Stream Address<br>(ST. 0-15) |    |    |    |           | Channel Address<br>(Ch 0-127) |    |    |    |    |    |    |                 |
|------------------------------|------------------------------|----|----|----|-----------|-------------------------------|----|----|----|----|----|----|-----------------|
| External<br>Address<br>(A11) | A10                          | A9 | A8 | A7 | Stream #  | A6                            | A5 | A4 | A3 | A2 | A1 | A0 | Channel #       |
| 1                            | 0                            | 0  | 0  | 0  | Stream 0  | 0                             | 0  | 0  | 0  | 0  | 0  | 0  | Ch 0            |
| 1                            | 0                            | 0  | 0  | 1  | Stream 1  | 0                             | 0  | 0  | 0  | 0  | 0  | 1  | Ch 1            |
| 1                            | 0                            | 0  | 1  | 0  | Stream 2  | .                             | .  | .  | .  | .  | .  | .  | .               |
| 1                            | 0                            | 0  | 1  | 1  | Stream 3  | .                             | .  | .  | .  | .  | .  | .  | .               |
| 1                            | 0                            | 1  | 0  | 0  | Stream 4  | 0                             | 0  | 1  | 1  | 1  | 1  | 0  | .               |
| 1                            | 0                            | 1  | 0  | 1  | Stream 5  | 0                             | 0  | 1  | 1  | 1  | 1  | 1  | .               |
| 1                            | 0                            | 1  | 1  | 0  | Stream 6  | 0                             | 1  | 0  | 0  | 0  | 0  | 0  | .               |
| 1                            | 0                            | 1  | 1  | 1  | Stream 7  | 0                             | 1  | 0  | 0  | 0  | 0  | 1  | Ch 30           |
| 1                            | 0                            | 1  | 0  | 0  | Stream 8  | .                             | .  | .  | .  | .  | .  | .  | Ch 31 (Note 2)  |
| .                            | .                            | .  | .  | .  | Stream 9  | .                             | .  | .  | .  | .  | .  | .  | Ch 32           |
| .                            | .                            | .  | .  | .  | Stream 10 | 0                             | 1  | 1  | 1  | 1  | 1  | 0  | Ch 33           |
| .                            | .                            | .  | .  | .  | Stream 11 | 0                             | 1  | 1  | 1  | 1  | 1  | 1  | .               |
| .                            | .                            | .  | .  | .  | Stream 12 | .                             | .  | .  | .  | .  | .  | .  | .               |
| 1                            | 1                            | 1  | 1  | 0  | Stream 13 | 1                             | 1  | 1  | 1  | 1  | 1  | 0  | Ch 62           |
| 1                            | 1                            | 1  | 1  | 1  | Stream 14 | 1                             | 1  | 1  | 1  | 1  | 1  | 1  | Ch 63 (Note 3)  |
|                              |                              |    |    |    | Stream 15 |                               |    |    |    |    |    |    | .               |
|                              |                              |    |    |    | .         |                               |    |    |    |    |    |    | .               |
|                              |                              |    |    |    | .         |                               |    |    |    |    |    |    | Ch 126          |
|                              |                              |    |    |    | .         |                               |    |    |    |    |    |    | Ch 127 (Note 4) |
|                              |                              |    |    |    | .         |                               |    |    |    |    |    |    | .               |
|                              |                              |    |    |    | .         |                               |    |    |    |    |    |    | .               |
|                              |                              |    |    |    | Stream    |                               |    |    |    |    |    |    | Ch 126          |
|                              |                              |    |    |    | 14        |                               |    |    |    |    |    |    | Ch 127 (Note    |
|                              |                              |    |    |    | Stream    |                               |    |    |    |    |    |    | 4)              |
|                              |                              |    |    |    | 15        |                               |    |    |    |    |    |    | .               |

Notes:  
1. MSB of address must be high for access to data and connection memory positions. MSB must be low for access to registers.  
2. Channels 0 to 31 are used when serial stream is at 2.048 Mbps.  
3. Channels 0 to 63 are used when serial stream is at 4.096 Mbps.  
4. Channels 0 to 127 are used when serial stream is at 8.192 Mbps.

**Table 32 - Address Map for Memory Locations (512x512 DX, MSB of address = 1)**

## 9.0 Connection Memory Bit Assignment

When the CMM bit (Bit0) is zero, the connection is in normal switching mode. When the CMM bit is one, the connection memory is in special transmission mode.

| <div><div>11109876543210</div><div><div>SSA3</div><div>SSA2</div><div>SSA1</div><div>SSA0</div><div>SCA6</div><div>SCA5</div><div>SCA4</div><div>SCA3</div><div>SCA2</div><div>SCA1</div><div>SCA0</div><div>CMM=0</div></div></div> |        |                                                                                                                                                                                     |  |  |  |  |  |  |  |  |  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|--|--|--|--|--|
| Bit                                                                                                                                                                                                                                  | Name   | Description                                                                                                                                                                         |  |  |  |  |  |  |  |  |  |
| 11 - 8                                                                                                                                                                                                                               | SSA3-0 | <b>Source Stream Address.</b><br>The binary value of these 4 bits represents the input stream number.                                                                               |  |  |  |  |  |  |  |  |  |
| 7 - 1                                                                                                                                                                                                                                | SCA6-0 | <b>Source Channel Address.</b><br>The binary value of these 7 bits represents the input channel number.                                                                             |  |  |  |  |  |  |  |  |  |
| 0                                                                                                                                                                                                                                    | CMM=0  | <b>Connection Memory Mode = 0.</b><br>If this bit is set low, the connection memory is in normal switching mode. Bit 1 to 11 represent the source stream number and channel number. |  |  |  |  |  |  |  |  |  |

**Table 33 - Connection Memory Bit Assignment when the CMM bit = 0**

|    |      |      |      |      |      |      |      |      |      |      |       |
|----|------|------|------|------|------|------|------|------|------|------|-------|
| 11 | 10   | 9    | 8    | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0     |
| 0  | MSG7 | MSG6 | MSG5 | MSG4 | MSG3 | MSG2 | MSG1 | MSG0 | PCC1 | PCC0 | CMM=1 |

| Bit    | Name   | Description                                                                                                                                                                                                                                                                                                                             |     |      |        |   |   |                      |   |   |              |   |   |               |   |   |          |
|--------|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|------|--------|---|---|----------------------|---|---|--------------|---|---|---------------|---|---|----------|
| 11     | Unused | Reserved.                                                                                                                                                                                                                                                                                                                               |     |      |        |   |   |                      |   |   |              |   |   |               |   |   |          |
| 10 - 3 | MSG7-0 | Message Data Bits: 8 bit data for the message mode.                                                                                                                                                                                                                                                                                     |     |      |        |   |   |                      |   |   |              |   |   |               |   |   |          |
| 2 - 1  | PCC1-0 | Per-Channel Control Bits: These two bits control outputs. <table><tr><th>PCC</th><th>PCC0</th><th>Output</th></tr><tr><td>0</td><td>0</td><td>Per Channel Tristate</td></tr><tr><td>0</td><td>1</td><td>Message Mode</td></tr><tr><td>1</td><td>0</td><td>BER Test Mode</td></tr><tr><td>1</td><td>1</td><td>Reserved</td></tr></table> | PCC | PCC0 | Output | 0 | 0 | Per Channel Tristate | 0 | 1 | Message Mode | 1 | 0 | BER Test Mode | 1 | 1 | Reserved |
| PCC    | PCC0   | Output                                                                                                                                                                                                                                                                                                                                  |     |      |        |   |   |                      |   |   |              |   |   |               |   |   |          |
| 0      | 0      | Per Channel Tristate                                                                                                                                                                                                                                                                                                                    |     |      |        |   |   |                      |   |   |              |   |   |               |   |   |          |
| 0      | 1      | Message Mode                                                                                                                                                                                                                                                                                                                            |     |      |        |   |   |                      |   |   |              |   |   |               |   |   |          |
| 1      | 0      | BER Test Mode                                                                                                                                                                                                                                                                                                                           |     |      |        |   |   |                      |   |   |              |   |   |               |   |   |          |
| 1      | 1      | Reserved                                                                                                                                                                                                                                                                                                                                |     |      |        |   |   |                      |   |   |              |   |   |               |   |   |          |
| 0      | CMM=1  | Connection Memory Mode = 1. If this bit is set high, the connection memory is in the per-channel control mode which is per-channel tristate, per-channel message mode or per-channel BER mode.                                                                                                                                          |     |      |        |   |   |                      |   |   |              |   |   |               |   |   |          |

**Table 34 - Connection Memory Bits Assignment when the CMM bit = 1**

**Absolute Maximum Ratings\***

|   | Parameter                             | Sym.        | Min. | Max.           | Units |
|---|---------------------------------------|-------------|------|----------------|-------|
| 1 | I/O Supply Voltage                    | $V_{DD}$    | -0.5 | 5.0            | V     |
| 2 | Input Voltage                         | $V_{I\_3V}$ | -0.5 | $V_{DD} + 0.5$ | V     |
| 3 | Input Voltage (5 V tolerant inputs)   | $V_{I\_5V}$ | -0.5 | 7.0            | V     |
| 4 | Continuous Current at digital outputs | $I_O$       |      | 15             | mA    |
| 5 | Package power dissipation             | $P_D$       |      | 0.75           | W     |
| 6 | Storage temperature                   | $T_S$       | - 55 | +125           | °C    |

\* Exceeding these values may cause permanent damage. Functional operation under these conditions is not implied.

**Recommended Operating Conditions -** Voltages are with respect to ground ( $V_{SS}$ ) unless otherwise stated.

|   | Characteristics                      | Sym.        | Min. | Typ. <sup>‡</sup> | Max.     | Units |
|---|--------------------------------------|-------------|------|-------------------|----------|-------|
| 1 | Operating Temperature                | $T_{OP}$    | -40  | 25                | +85      | °C    |
| 2 | Positive Supply                      | $V_{DD}$    | 3.0  | 3.3               | 3.6      | V     |
| 3 | Input Voltage                        | $V_I$       | 0    |                   | $V_{DD}$ | V     |
| 4 | Input Voltage on 5 V Tolerant Inputs | $V_{I\_5V}$ | 0    |                   | 5.5      | V     |

‡ Typical figures are at 25°C and are for design aid only: not guaranteed and not subject to production testing.

**DC Electrical Characteristics<sup>†</sup> -** Voltages are with respect to ground ( $V_{SS}$ ) unless otherwise stated.

|    | Characteristics                                                   | Sym.                 | Min. | Typ. <sup>‡</sup> | Max.   | Units              | Test Conditions                               |
|----|-------------------------------------------------------------------|----------------------|------|-------------------|--------|--------------------|-----------------------------------------------|
| 1  | Supply Current                                                    | $I_{DD}$             |      |                   | 250    | mA                 | Output unloaded                               |
| 2  | Input High Voltage                                                | $V_{IH}$             | 2.0  |                   |        | V                  |                                               |
| 3  | Input Low Voltage                                                 | $V_{IL}$             |      |                   | 0.8    | V                  |                                               |
| 4  | Input Leakage (input pins)<br>Input Leakage (bi-directional pins) | $I_{IL}$<br>$I_{BL}$ |      |                   | 5<br>5 | $\mu A$<br>$\mu A$ | $0 \leq V_{IN} \leq V_{DD\_IO}$<br>See Note 1 |
| 5  | Weak Pullup Current                                               | $I_{PU}$             |      | -33               |        | $\mu A$            | Input at 0 V                                  |
| 6  | Weak Pulldown Current                                             | $I_{PD}$             |      | 33                |        | $\mu A$            | Input at $V_{DD\_IO}$                         |
| 7  | Input Pin Capacitance                                             | $C_I$                |      | 3                 |        | pF                 |                                               |
| 8  | Output High Voltage                                               | $V_{OH}$             | 2.4  |                   |        | V                  | $I_{OH} = 10 \text{ mA}$                      |
| 9  | Output Low Voltage                                                | $V_{OL}$             |      |                   | 0.4    | V                  | $I_{OL} = 10 \text{ mA}$                      |
| 10 | Output High Impedance Leakage                                     | $I_{OZ}$             |      |                   | 5      | $\mu A$            | $0 < V < V_{DD}$                              |
| 11 | Output Pin Capacitance                                            | $C_O$                |      | 5                 | 10     | pF                 |                                               |

† Characteristics are over recommended operating conditions unless otherwise stated.

‡ Typical figures are at 25°C,  $V_{DD}$  at 3.3 V and are for design aid only: not guaranteed and not subject to production testing.

Note 1: Maximum leakage on pins (output or I/O pins in high impedance state) is over an applied voltage ( $V_{IN}$ ).

**AC Electrical Characteristics<sup>†</sup> - Timing Parameter Measurement Voltage Levels**

|   | Characteristics                  | Sym.            | Level                 | Units | Conditions |
|---|----------------------------------|-----------------|-----------------------|-------|------------|
| 1 | CMOS Threshold                   | V <sub>CT</sub> | 0.5V <sub>DD_IO</sub> | V     |            |
| 2 | Rise/Fall Threshold Voltage High | V <sub>HM</sub> | 0.7V <sub>DD_IO</sub> | V     |            |
| 3 | Rise/Fall Threshold Voltage Low  | V <sub>LM</sub> | 0.3V <sub>DD_IO</sub> | V     |            |

<sup>†</sup> Characteristics are over recommended operating conditions unless otherwise stated.

**AC Electrical Characteristics<sup>†</sup> -  $\overline{\text{FPI}}$  and  $\overline{\text{CKi}}$  Timing when CKIN2 to 0 bits = 000**

|   | Characteristic                                       | Sym.                                  | Min. | Typ. <sup>‡</sup> | Max. | Units | Notes |
|---|------------------------------------------------------|---------------------------------------|------|-------------------|------|-------|-------|
| 1 | $\overline{\text{FPI}}$ Input Frame Pulse Width      | t <sub>FPIW</sub>                     | 40   | 61                | 115  | ns    |       |
| 2 | $\overline{\text{FPI}}$ Input Frame Pulse Setup Time | t <sub>FPIs</sub>                     | 20   |                   | 40   | ns    |       |
| 3 | $\overline{\text{FPI}}$ Input Frame Pulse Hold Time  | t <sub>FPIH</sub>                     | 20   |                   | 40   | ns    |       |
| 4 | $\overline{\text{CKi}}$ Input Clock Period           | t <sub>CKIP</sub>                     | 55   | 61                | 67   | ns    |       |
| 5 | $\overline{\text{CKi}}$ Input Clock High Time        | t <sub>CKIH</sub>                     | 27   |                   | 33   | ns    |       |
| 6 | $\overline{\text{CKi}}$ Input Clock Low Time         | t <sub>CKIL</sub>                     | 27   |                   | 33   | ns    |       |
| 7 | $\overline{\text{CKi}}$ Input Clock Rise/Fall Time   | t <sub>rCKi</sub> , t <sub>fCKi</sub> | 0    |                   | 3    | ns    |       |

<sup>†</sup> Characteristics are over recommended operating conditions unless otherwise stated.

<sup>‡</sup> Typical figures are at 25°C, V<sub>DD</sub> at 3.3 V and are for design aid only: not guaranteed and not subject to production testing.

**AC Electrical Characteristics<sup>†</sup> -  $\overline{\text{FPI}}$  and  $\overline{\text{CKi}}$  Timing when CKIN2 to 0 bits = 001**

|   | Characteristic                                       | Sym.                                  | Min. | Typ. <sup>‡</sup> | Max. | Units | Notes |
|---|------------------------------------------------------|---------------------------------------|------|-------------------|------|-------|-------|
| 1 | $\overline{\text{FPI}}$ Input Frame Pulse Width      | t <sub>FPIW</sub>                     | 90   | 122               | 220  | ns    |       |
| 2 | $\overline{\text{FPI}}$ Input Frame Pulse Setup Time | t <sub>FPIs</sub>                     | 45   |                   | 90   | ns    |       |
| 3 | $\overline{\text{FPI}}$ Input Frame Pulse Hold Time  | t <sub>FPIH</sub>                     | 45   |                   | 90   | ns    |       |
| 4 | $\overline{\text{CKi}}$ Input Clock Period           | t <sub>CKIP</sub>                     | 110  | 122               | 135  | ns    |       |
| 5 | $\overline{\text{CKi}}$ Input Clock High Time        | t <sub>CKIH</sub>                     | 63   |                   | 69   | ns    |       |
| 6 | $\overline{\text{CKi}}$ Input Clock Low Time         | t <sub>CKIL</sub>                     | 63   |                   | 69   | ns    |       |
| 7 | $\overline{\text{CKi}}$ Input Clock Rise/Fall Time   | t <sub>rCKi</sub> , t <sub>fCKi</sub> | 0    |                   | 3    | ns    |       |

<sup>†</sup> Characteristics are over recommended operating conditions unless otherwise stated.

<sup>‡</sup> Typical figures are at 25°C, V<sub>DD</sub> at 3.3 V and 3 are for design aid only: not guaranteed and not subject to production testing.

**AC Electrical Characteristics -  $\overline{\text{FPI}}$  and  $\overline{\text{CKi}}$  Timing when CKIN2 to 0 bits = 010**

|   | Characteristic                                       | Sym.                                  | Min. | Typ. <sup>‡</sup> | Max. | Units | Notes |
|---|------------------------------------------------------|---------------------------------------|------|-------------------|------|-------|-------|
| 1 | $\overline{\text{FPI}}$ Input Frame Pulse Width      | t <sub>FPIW</sub>                     | 90   | 244               | 420  | ns    |       |
| 2 | $\overline{\text{FPI}}$ Input Frame Pulse Setup Time | t <sub>FPIs</sub>                     | 110  |                   | 135  | ns    |       |
| 3 | $\overline{\text{FPI}}$ Input Frame Pulse Hold Time  | t <sub>FPIH</sub>                     | 120  |                   | 145  | ns    |       |
| 4 | $\overline{\text{CKi}}$ Input Clock Period           | t <sub>CKIP</sub>                     | 220  | 244               | 270  | ns    |       |
| 5 | $\overline{\text{CKi}}$ Input Clock High Time        | t <sub>CKIH</sub>                     | 110  |                   | 135  | ns    |       |
| 6 | $\overline{\text{CKi}}$ Input Clock Low Time         | t <sub>CKIL</sub>                     | 110  |                   | 135  | ns    |       |
| 7 | $\overline{\text{CKi}}$ Input Clock Rise/Fall Time   | t <sub>rCKi</sub> , t <sub>fCKi</sub> | 0    |                   | 3    | ns    |       |

<sup>†</sup> Characteristics are over recommended operating conditions unless otherwise stated.

<sup>‡</sup> Typical figures are at 25°C, V<sub>DD</sub> at 3.3 V and are for design aid only: not guaranteed and not subject to production testing.

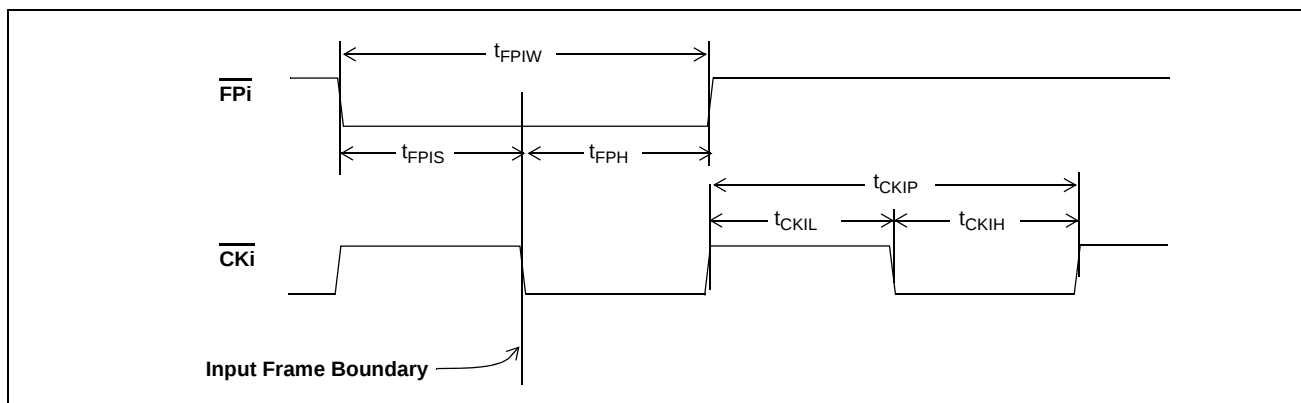


Figure 32 - Frame Pulse Input and Clock Input Timing Diagram

### AC Electrical Characteristics<sup>†</sup> - Frame Boundary Timing with Input Clock Cycle-to-cycle Variation

|   | Characteristic                           | Sym.      | Min. | Typ. <sup>‡</sup> | Max. | Units | Notes |
|---|------------------------------------------|-----------|------|-------------------|------|-------|-------|
| 1 | CKi Input Clock cycle-to-cycle variation | $t_{CKV}$ | 0    |                   | 50   | ns    |       |

<sup>†</sup> Characteristics are over recommended operating conditions unless otherwise stated.

<sup>‡</sup> Typical figures are at 25°C,  $V_{DD}$  at 3.3 V and are for design aid only: not guaranteed and not subject to production testing.

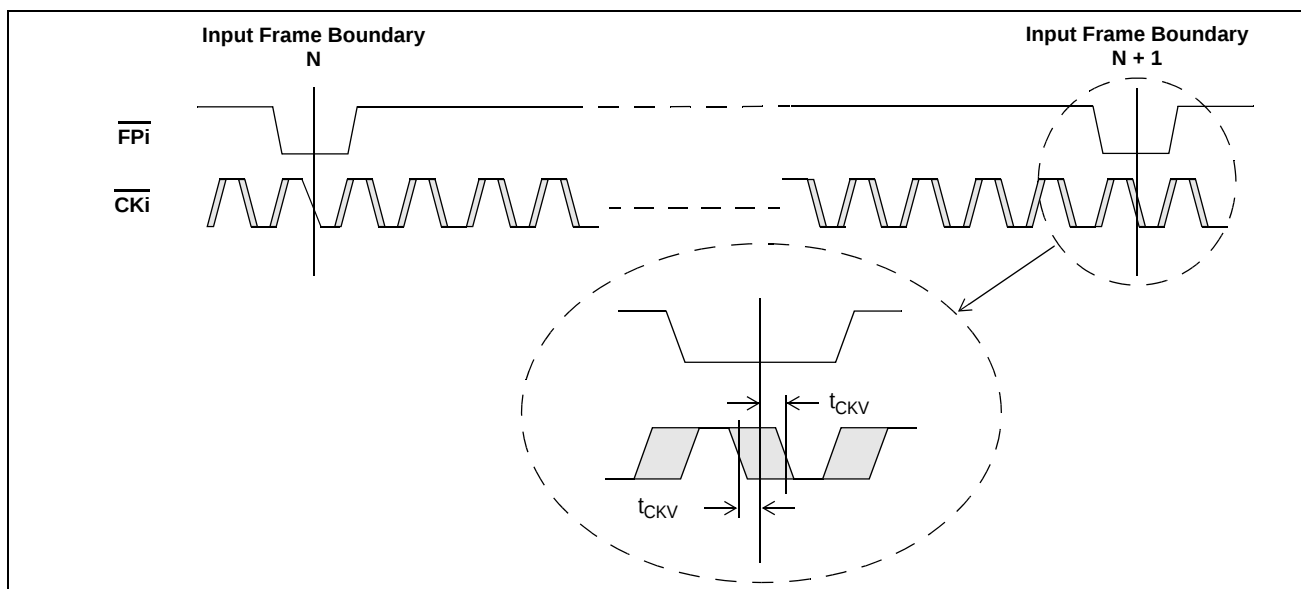



Figure 33 - Frame Boundary Timing with Input Clock (Cycle-to-Cycle) Variation

### AC Electrical Characteristics<sup>†</sup> - Frame Boundary Timing with Input Frame Pulse Cycle-to-cycle Variation

|   | Characteristic                                 | Sym.      | Min. | Typ. <sup>‡</sup> | Max. | Units | Notes |
|---|------------------------------------------------|-----------|------|-------------------|------|-------|-------|
| 1 | FPI Input Frame Pulse cycle-to-cycle variation | $t_{FPV}$ | 0    |                   | 50   | ns    |       |

<sup>†</sup> Characteristics are over recommended operating conditions unless otherwise stated.

<sup>‡</sup> Typical figures are at 25°C,  $V_{DD}$  at 3.3 V and are for design aid only: not guaranteed and not subject to production testing.

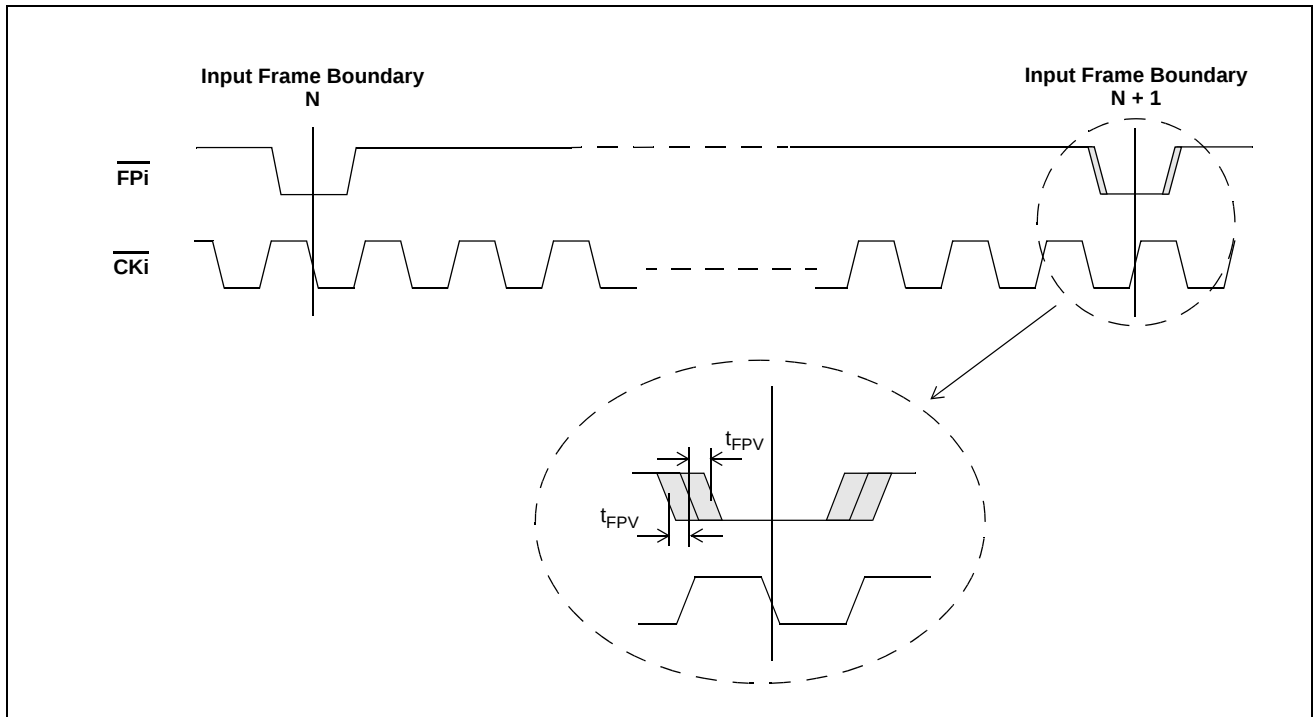


**Figure 34 - Frame Boundary Timing with Input Frame Pulse (Cycle-to-Cycle) Variation**

**AC Electrical Characteristics<sup>†</sup> - XTALi Input Timing when Clock Oscillator is connected**

|   | Characteristic             | Sym.                         | Min.   | Typ. <sup>‡</sup> | Max.   | Units | Notes |
|---|----------------------------|------------------------------|--------|-------------------|--------|-------|-------|
| 1 | C20i Input Clock Period    | $t_{C20MP}$                  | 49.995 | 50                | 50.005 | ns    |       |
| 2 | C20i Input Clock High Time | $t_{C20MH}$                  | 20     |                   | 30     | ns    |       |
| 3 | C20i Input Clock Low Time  | $t_{C20ML}$                  | 20     |                   | 30     | ns    |       |
| 4 | C20i Input Rise/Fall Time  | $t_{rC20M}$ ,<br>$t_{fC20M}$ |        | 2                 |        | ns    |       |

<sup>†</sup> Characteristics are over recommended operating conditions unless otherwise stated.




<sup>‡</sup> Typical figures are at 25°C,  $V_{DD}$  at 3.3 V and are for design aid only: not guaranteed and not subject to production testing.

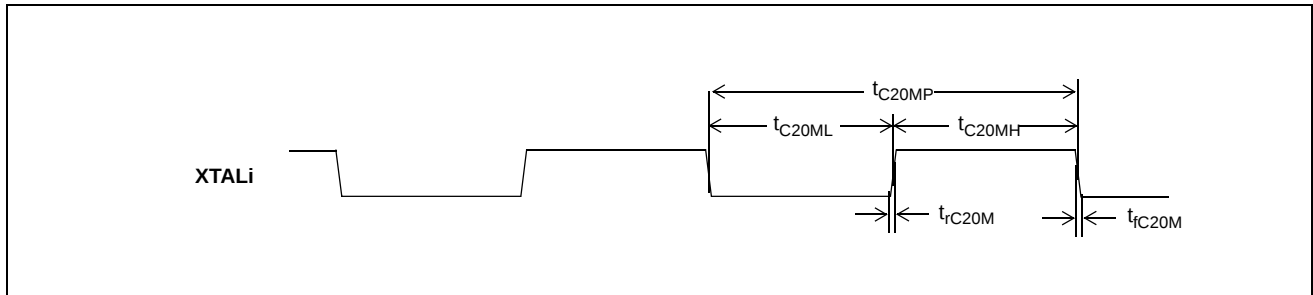

**Figure 35 - XTALi Input Timing Diagram when Clock Oscillator is Connected**

**AC Electrical Characteristics - Reference Input Timing**

|    | Characteristic     | Sym.                   | Min. | Typ. | Max.   | Units         | Notes          |
|----|--------------------|------------------------|------|------|--------|---------------|----------------|
| 1  | REF Period         | $t_{R8KP}$             | 122  | 125  | 128    | $\mu\text{s}$ | 8 kHz Mode     |
| 2  | REF High Time      | $t_{R8KH}$             | 0.09 |      | 127.91 | $\mu\text{s}$ |                |
| 3  | REF Low Time       | $t_{R8KL}$             | 0.09 |      | 127.91 | $\mu\text{s}$ |                |
| 4  | REF Rise/Fall Time | $t_{rR8K}, t_{fR8K}$   | 0    |      | 20     | ns            |                |
| 5  | REF Period         | $t_{R2MP}$             | 370  | 488  | 605    | ns            | 2.048 MHz Mode |
| 6  | REF High Time      | $t_{R2MH}$             | 90   | 244  | 515    | ns            |                |
| 7  | REF Low Time       | $t_{R2ML}$             | 90   | 244  | 515    | ns            |                |
| 8  | REF Rise/Fall Time | $t_{rR2M}, t_{fR2M}$   | 0    |      | 20     | ns            |                |
| 9  | REF Period         | $t_{R1M5P}$            | 490  | 648  | 805    | ns            | 1.544 MHz Mode |
| 10 | REF High Time      | $t_{R1M5h}$            | 90   | 324  | 715    | ns            |                |
| 11 | REF Low Time       | $t_{R1M5L}$            | 90   | 324  | 715    | ns            |                |
| 12 | REF Rise/Fall Time | $t_{rR1M5}, t_{fR1M5}$ | 0    |      | 20     | ns            |                |

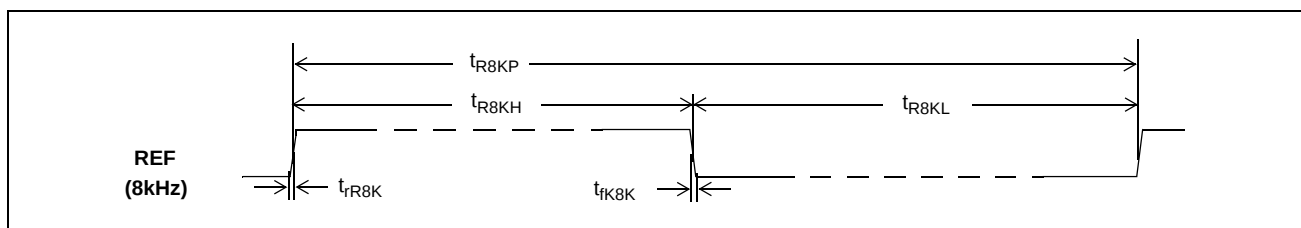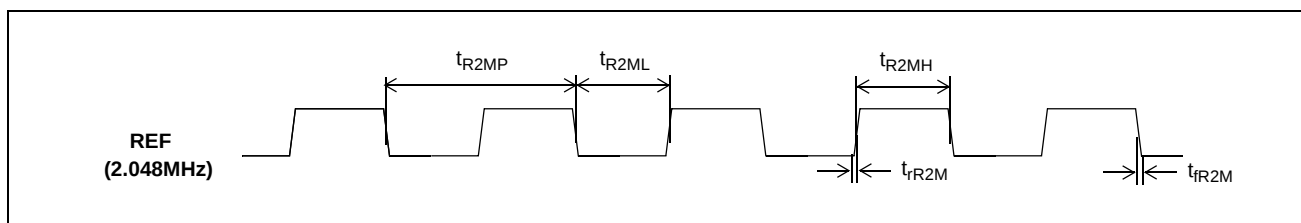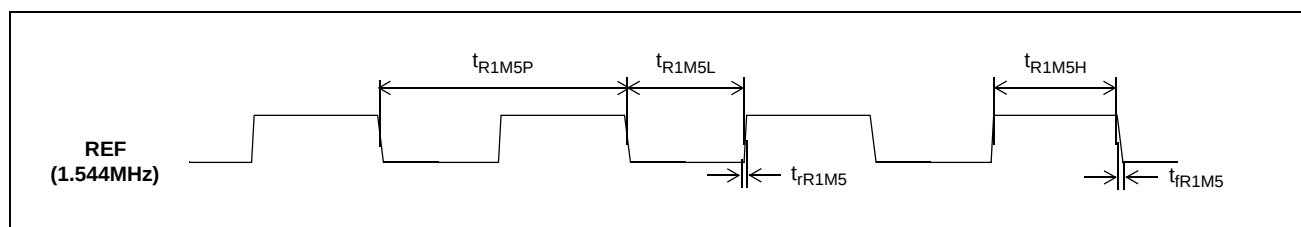**Figure 36 - Reference Input Timing Diagram when the Input Frequency = 8 kHz****Figure 37 - Reference Input Timing Diagram when the Input Frequency = 2.048 MHz****Figure 38 - Reference Input Timing Diagram when the Input Frequency = 1.544 Hz**

### AC Electrical Characteristics - Input and Output Frame Boundary Alignment

|   | Characteristic                                    | Sym.       | Min. | Typ. | Max. | Units | Notes                                                                                                                                                                        |
|---|---------------------------------------------------|------------|------|------|------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | Input and Output Frame Offset in DPLL Master Mode | $t_{FBOS}$ | -20  |      | 0    | ns    | Input reference is internal 8 kHz derived from $\overline{FPI}$ and $\overline{CKi}$ . Measured when there is no jitter on the $\overline{CKi}$ and $\overline{FPI}$ inputs. |
| 2 | Input and Output Frame Offset in DPLL Bypass Mode | $t_{FBOS}$ | 1    |      | 18   | ns    | Measured when there is no jitter on the $\overline{CKi}$ and $\overline{FPI}$ inputs.                                                                                        |

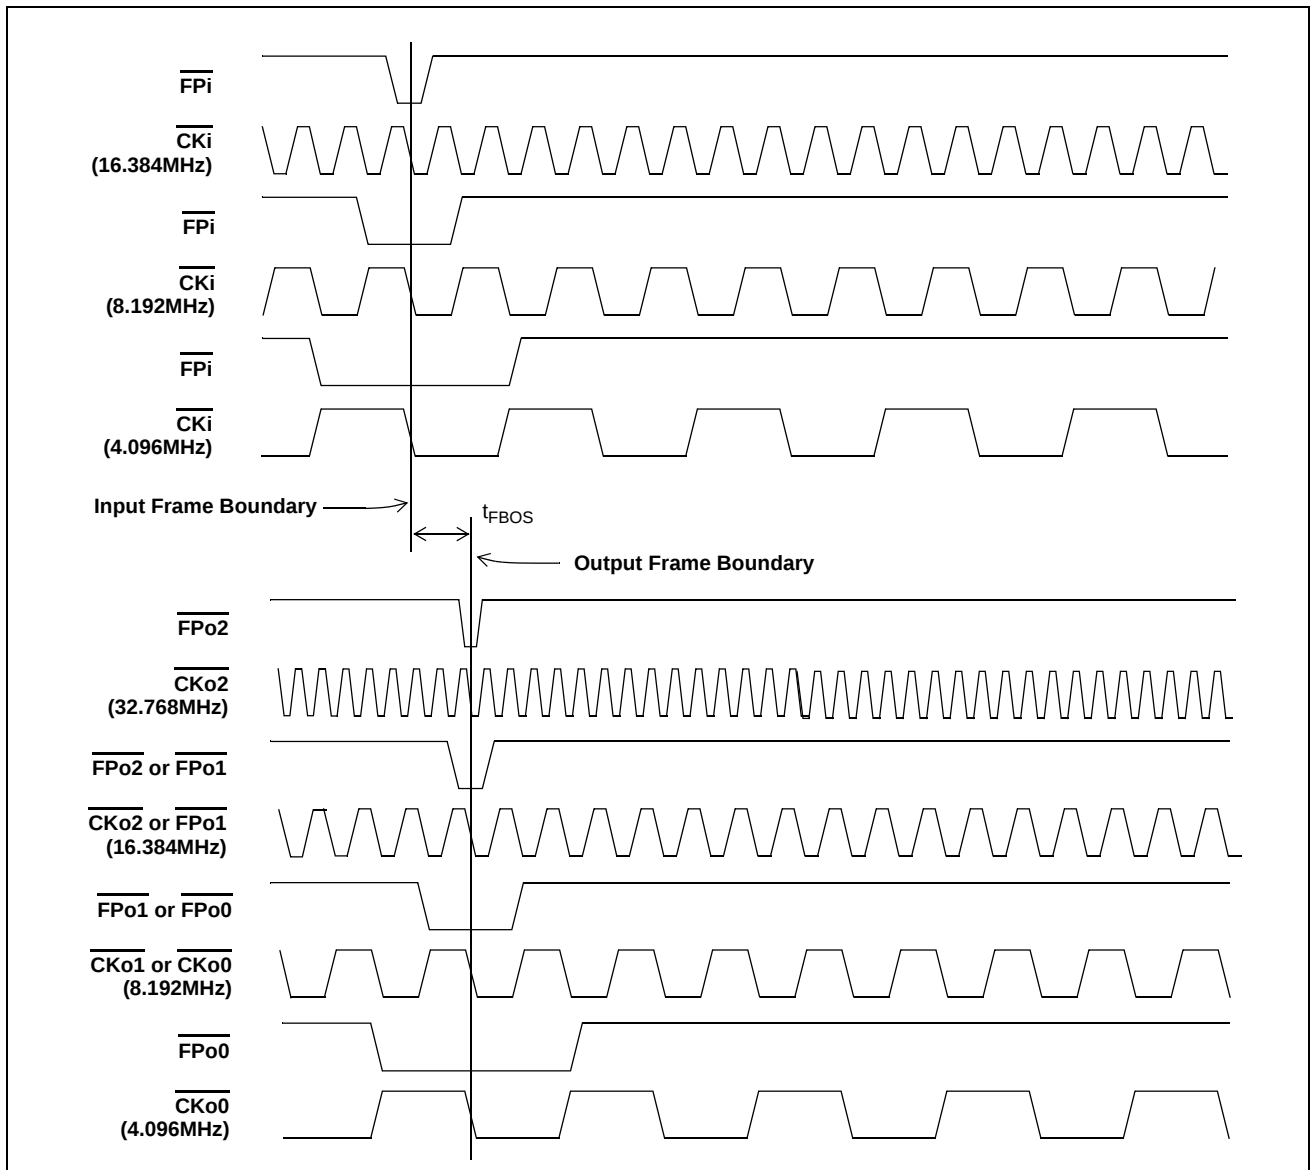


Figure 39 - Input and Output Frame Boundary Offset

**AC Electrical Characteristics<sup>†</sup> -  $\overline{\text{FPo0}}$  and  $\overline{\text{CKo0}}$  Timing when CKFP0 = 0**

|   | Characteristic                                                                                                    | Sym.                               | Min. | Typ. <sup>‡</sup> | Max. | Units | Notes              |
|---|-------------------------------------------------------------------------------------------------------------------|------------------------------------|------|-------------------|------|-------|--------------------|
| 1 | $\overline{\text{FPo0}}$ Output Pulse Width                                                                       | $t_{\text{FPW0}}$                  | 220  | 244               | 270  | ns    | $C_L=30\text{ pF}$ |
| 2 | $\overline{\text{FPo0}}$ Output Delay from the $\overline{\text{CKo0}}$ falling edge to the output frame boundary | $t_{\text{FODF0}}$                 | 115  |                   | 130  | ns    |                    |
| 3 | $\overline{\text{FPo0}}$ Output Delay from the output frame boundary to the $\overline{\text{CKo0}}$ Rising edge  | $t_{\text{FODR0}}$                 | 115  |                   | 130  | ns    |                    |
| 4 | $\overline{\text{CKo0}}$ Output Clock Period                                                                      | $t_{\text{CKP0}}$                  | 220  | 244               | 270  | ns    | $C_L=30\text{ pF}$ |
| 5 | $\overline{\text{CKo0}}$ Output High Time                                                                         | $t_{\text{CKH0}}$                  | 115  |                   | 130  | ns    |                    |
| 6 | $\overline{\text{CKo0}}$ Output Low Time                                                                          | $t_{\text{CKL0}}$                  | 115  |                   | 130  | ns    |                    |
| 7 | $\overline{\text{CKo0}}$ Output Rise/Fall Time                                                                    | $t_{\text{rCK0}}, t_{\text{fCK0}}$ |      |                   | 10   | ns    |                    |

<sup>†</sup> Characteristics are over recommended operating conditions unless otherwise stated.


<sup>‡</sup> Typical figures are at 25°C,  $V_{\text{DD}}$  at 3.3 V and are for design aid only: not guaranteed and not subject to production testing.

**AC Electrical Characteristics<sup>†</sup> -  $\overline{\text{FPo0}}$  and  $\overline{\text{CKo0}}$  Timing when CKFP0 = 1**

|   | Characteristic                                                                                                    | Sym.                               | Min. | Typ. <sup>‡</sup> | Max. | Units | Notes              |
|---|-------------------------------------------------------------------------------------------------------------------|------------------------------------|------|-------------------|------|-------|--------------------|
| 1 | $\overline{\text{FPo0}}$ Output Pulse Width                                                                       | $t_{\text{FPW0}}$                  | 108  | 122               | 140  | ns    | $C_L=30\text{ pF}$ |
| 2 | $\overline{\text{FPo0}}$ Output Delay from the $\overline{\text{CKo0}}$ falling edge to the output frame boundary | $t_{\text{FODF0}}$                 | 54   |                   | 68   | ns    |                    |
| 3 | $\overline{\text{FPo0}}$ Output Delay from the output frame boundary to the $\overline{\text{CKo0}}$ Rising edge  | $t_{\text{FODR0}}$                 | 54   |                   | 68   | ns    |                    |
| 4 | $\overline{\text{CKo0}}$ Output Clock Period                                                                      | $t_{\text{CKP0}}$                  | 108  | 122               | 140  | ns    | $C_L=30\text{ pF}$ |
| 5 | $\overline{\text{CKo0}}$ Output High Time                                                                         | $t_{\text{CKH0}}$                  | 54   |                   | 69   | ns    |                    |
| 6 | $\overline{\text{CKo0}}$ Output Low Time                                                                          | $t_{\text{CKL0}}$                  | 54   |                   | 69   | ns    |                    |
| 7 | $\overline{\text{CKo0}}$ Output Rise/Fall Time                                                                    | $t_{\text{rCK0}}, t_{\text{fCK0}}$ |      |                   | 10   | ns    |                    |

<sup>†</sup> Characteristics are over recommended operating conditions unless otherwise stated.

<sup>‡</sup> Typical figures are at 25°C,  $V_{\text{DD}}$  at 3.3 V and are for design aid only: not guaranteed and not subject to production testing.

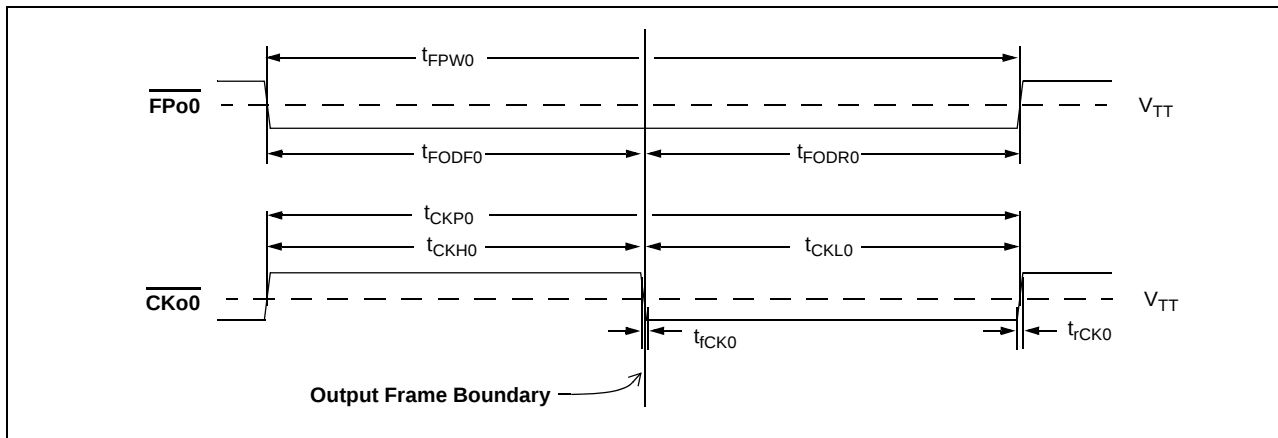

**Figure 40 -  $\overline{\text{FPo0}}$  and  $\overline{\text{CKo0}}$  Timing Diagram**

**AC Electrical Characteristics<sup>†</sup> -  $\overline{\text{FPo1}}$  and  $\overline{\text{CKo1}}$  Timing when CKFP1 = 0**

|   | Characteristic                                                                                                    | Sym.                               | Min. | Typ. <sup>‡</sup> | Max. | Units | Notes              |
|---|-------------------------------------------------------------------------------------------------------------------|------------------------------------|------|-------------------|------|-------|--------------------|
| 1 | $\overline{\text{FPo1}}$ Output Pulse Width                                                                       | $t_{\text{FPW1}}$                  | 47   | 61                | 75   | ns    | $C_L=30\text{ pF}$ |
| 2 | $\overline{\text{FPo1}}$ Output Delay from the $\overline{\text{CKo1}}$ falling edge to the output frame boundary | $t_{\text{FODF1}}$                 | 20   |                   | 40   | ns    |                    |
| 3 | $\overline{\text{FPo1}}$ Output Delay from the output frame boundary to the $\overline{\text{CKo1}}$ Rising edge  | $t_{\text{FODR1}}$                 | 20   |                   | 40   | ns    |                    |
| 4 | $\overline{\text{CKo1}}$ Output Clock Period                                                                      | $t_{\text{CKP1}}$                  | 47   | 61                | 75   | ns    | $C_L=30\text{ pF}$ |
| 5 | $\overline{\text{CKo1}}$ Output High Time                                                                         | $t_{\text{CKH1}}$                  | 20   |                   | 40   | ns    |                    |
| 6 | $\overline{\text{CKo1}}$ Output Low Time                                                                          | $t_{\text{CKL1}}$                  | 20   |                   | 40   | ns    |                    |
| 7 | $\overline{\text{CKo1}}$ Output Rise/Fall Time                                                                    | $t_{\text{rCK1}}, t_{\text{fCK1}}$ |      |                   | 10   | ns    |                    |

<sup>†</sup> Characteristics are over recommended operating conditions unless otherwise stated.


<sup>‡</sup> Typical figures are at 25°C,  $V_{\text{DD}}$  at 3.3 V and are for design aid only: not guaranteed and not subject to production testing.

**AC Electrical Characteristics<sup>†</sup> -  $\overline{\text{FPo1}}$  and  $\overline{\text{CKo1}}$  Timing when CKFP1 = 1**

|   | Characteristic                                                                                                    | Sym.                               | Min. | Typ. <sup>‡</sup> | Max. | Units | Notes              |
|---|-------------------------------------------------------------------------------------------------------------------|------------------------------------|------|-------------------|------|-------|--------------------|
| 1 | $\overline{\text{FPo1}}$ Output Pulse Width                                                                       | $t_{\text{FPW1}}$                  | 108  | 122               | 140  | ns    | $C_L=30\text{ pF}$ |
| 2 | $\overline{\text{FPo1}}$ Output Delay from the $\overline{\text{CKo1}}$ falling edge to the output frame boundary | $t_{\text{FODF1}}$                 | 54   |                   | 68   | ns    |                    |
| 3 | $\overline{\text{FPo1}}$ Output Delay from the output frame boundary to the $\overline{\text{CKo1}}$ Rising edge  | $t_{\text{FODR1}}$                 | 54   |                   | 68   | ns    |                    |
| 4 | $\overline{\text{CKo1}}$ Output Clock Period                                                                      | $t_{\text{CKP1}}$                  | 108  | 122               | 140  | ns    | $C_L=30\text{ pF}$ |
| 5 | $\overline{\text{CKo1}}$ Output High Time                                                                         | $t_{\text{CKH1}}$                  | 54   |                   | 69   | ns    |                    |
| 6 | $\overline{\text{CKo1}}$ Output Low Time                                                                          | $t_{\text{CKL1}}$                  | 54   |                   | 69   | ns    |                    |
| 7 | $\overline{\text{CKo1}}$ Output Rise/Fall Time                                                                    | $t_{\text{rCK1}}, t_{\text{fCK1}}$ |      |                   | 10   | ns    |                    |

<sup>†</sup> Characteristics are over recommended operating conditions unless otherwise stated.

<sup>‡</sup> Typical figures are at 25°C,  $V_{\text{DD}}$  at 3.3 V and are for design aid only: not guaranteed and not subject to production testing.

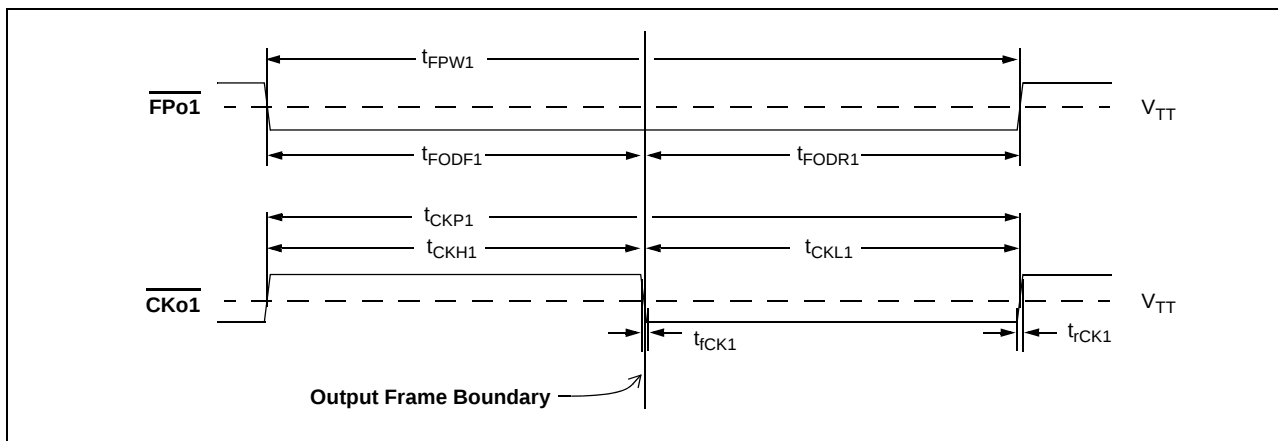

**Figure 41 -  $\overline{\text{FPo1}}$  and  $\overline{\text{CKo1}}$  Timing Diagram**

**AC Electrical Characteristics<sup>†</sup> -  $\overline{\text{FPo2}}$  and  $\overline{\text{CKo2}}$  Timing when CKFP2 = 0**

|   | Characteristic                                                                                                    | Sym.                               | Min. | Typ. <sup>‡</sup> | Max. | Units | Notes              |
|---|-------------------------------------------------------------------------------------------------------------------|------------------------------------|------|-------------------|------|-------|--------------------|
| 1 | $\overline{\text{FPo2}}$ Output Pulse Width                                                                       | $t_{\text{FPW2}}$                  | 15   | 30                | 45   | ns    | $C_L=30\text{ pF}$ |
| 2 | $\overline{\text{FPo2}}$ Output Delay from the $\overline{\text{CKo2}}$ falling edge to the output frame boundary | $t_{\text{FODF2}}$                 | 8    |                   | 22   | ns    |                    |
| 3 | $\overline{\text{FPo2}}$ Output Delay from the output frame boundary to the $\overline{\text{CKo2}}$ Rising edge  | $t_{\text{FODR2}}$                 | 8    |                   | 22   | ns    |                    |
| 4 | $\overline{\text{CKo2}}$ Output Clock Period                                                                      | $t_{\text{CKP2}}$                  | 15   | 30                | 45   | ns    | $C_L=30\text{ pF}$ |
| 5 | $\overline{\text{CKo2}}$ Output High Time                                                                         | $t_{\text{CKH2}}$                  | 8    |                   | 22   | ns    |                    |
| 6 | $\overline{\text{CKo2}}$ Output Low Time                                                                          | $t_{\text{CKL2}}$                  | 8    |                   | 22   | ns    |                    |
| 7 | $\overline{\text{CKo2}}$ Output Rise/Fall Time                                                                    | $t_{\text{rCK2}}, t_{\text{fCK2}}$ |      |                   | 7    | ns    |                    |

<sup>†</sup> Characteristics are over recommended operating conditions unless otherwise stated.


<sup>‡</sup> Typical figures are at 25°C,  $V_{\text{DD}}$  at 3.3 V and are for design aid only: not guaranteed and not subject to production testing.

**AC Electrical Characteristics<sup>†</sup> -  $\overline{\text{FPo2}}$  and  $\overline{\text{CKo2}}$  Timing when CKFP2 = 1**

|   | Characteristic                                                                                                    | Sym.                               | Min. | Typ. <sup>‡</sup> | Max. | Units | Notes              |
|---|-------------------------------------------------------------------------------------------------------------------|------------------------------------|------|-------------------|------|-------|--------------------|
| 1 | $\overline{\text{FPo2}}$ Output Pulse Width                                                                       | $t_{\text{FPW2}}$                  | 47   | 61                | 75   | ns    | $C_L=30\text{ pF}$ |
| 2 | $\overline{\text{FPo2}}$ Output Delay from the $\overline{\text{CKo2}}$ falling edge to the output frame boundary | $t_{\text{FODF2}}$                 | 20   |                   | 40   | ns    |                    |
| 3 | $\overline{\text{FPo2}}$ Output Delay from the output frame boundary to the $\overline{\text{CKo2}}$ Rising edge  | $t_{\text{FODR2}}$                 | 20   |                   | 40   | ns    |                    |
| 4 | $\overline{\text{CKo2}}$ Output Clock Period                                                                      | $t_{\text{CKP2}}$                  | 47   | 61                | 75   | ns    | $C_L=30\text{ pF}$ |
| 5 | $\overline{\text{CKo2}}$ Output High Time                                                                         | $t_{\text{CKH2}}$                  | 20   |                   | 40   | ns    |                    |
| 6 | $\overline{\text{CKo2}}$ Output Low Time                                                                          | $t_{\text{CKL2}}$                  | 20   |                   | 40   | ns    |                    |
| 7 | $\overline{\text{CKo2}}$ Output Rise/Fall Time                                                                    | $t_{\text{rCK2}}, t_{\text{fCK2}}$ |      |                   | 10   | ns    |                    |

<sup>†</sup> Characteristics are over recommended operating conditions unless otherwise stated.

<sup>‡</sup> Typical figures are at 25°C,  $V_{\text{DD}}$  at 3.3 V and are for design aid only: not guaranteed and not subject to production testing.

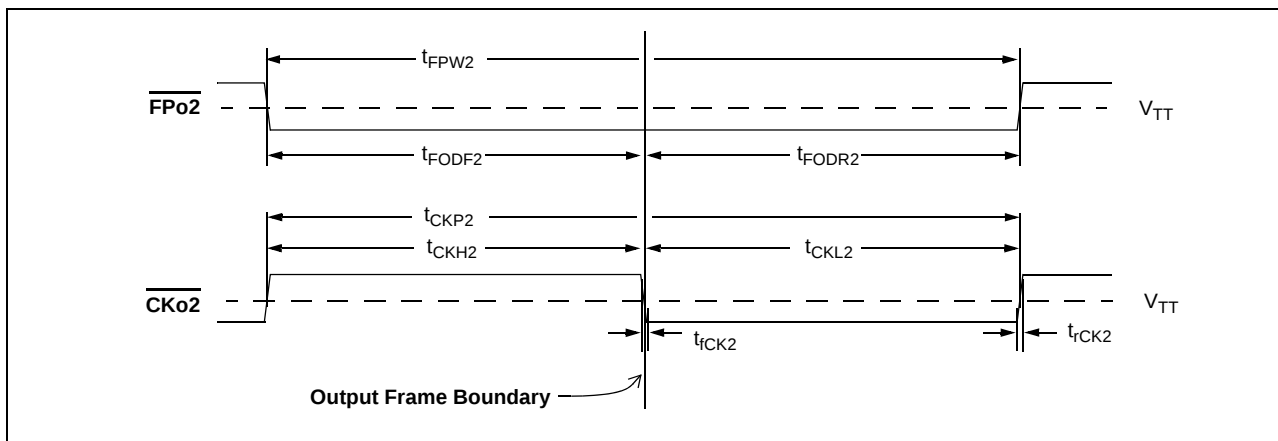

**Figure 42 -  $\overline{\text{FPo2}}$  and  $\overline{\text{CKo2}}$  Timing Diagram**

# AC Electrical Characteristics<sup>†</sup> - ST-BUS Input Timing

|   | Characteristic | Sym.       | Min. | Typ. <sup>‡</sup> | Max. | Units | Test Conditions |
|---|----------------|------------|------|-------------------|------|-------|-----------------|
| 1 | STi Setup Time |            |      |                   |      |       |                 |
|   | 2.048 Mbps     | $t_{SIS2}$ | 3    |                   |      | ns    |                 |
|   | 4.096 Mbps     | $t_{SIS4}$ | 3    |                   |      | ns    |                 |
|   | 8.192 Mbps     | $t_{SIS8}$ | 3    |                   |      | ns    |                 |
| 2 | STi Hold Time  |            |      |                   |      |       |                 |
|   | 2.048 Mbps     | $t_{SIH2}$ | 3    |                   |      | ns    |                 |
|   | 4.096 Mbps     | $t_{SIH4}$ | 3    |                   |      | ns    |                 |
|   | 8.192 Mbps     | $t_{SIH8}$ | 3    |                   |      | ns    |                 |

<sup>†</sup> Characteristics are over recommended operating conditions unless otherwise stated.

<sup>‡</sup> Typical figures are at 25°C,  $V_{DD}$  at 3.3 V and are for design aid only: not guaranteed and not subject to production testing.

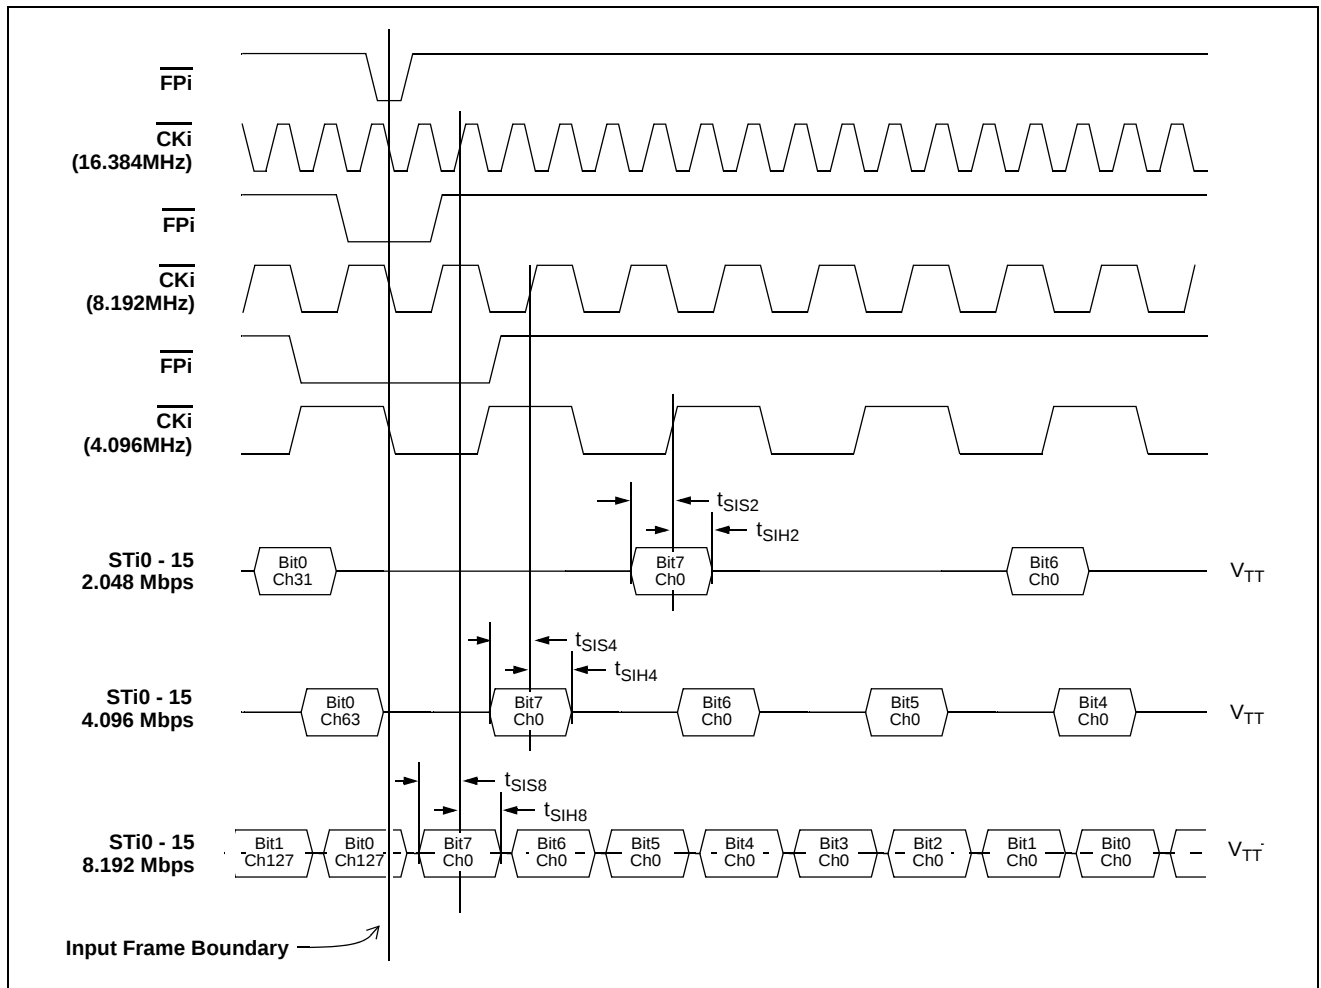


Figure 43 - ST-BUS Inputs (STi0 - 15) Timing Diagram

# AC Electrical Characteristics<sup>†</sup> - ST-BUS Output Timing

|   | Characteristic                                                            | Sym.                                   | Min. | Typ. <sup>‡</sup> | Max.           | Units          | Test Conditions       |
|---|---------------------------------------------------------------------------|----------------------------------------|------|-------------------|----------------|----------------|-----------------------|
| 1 | STo Delay - Active to Active<br>@2.048 Mbps<br>@4.096 Mbps<br>@8.192 Mbps | $t_{SOD2}$<br>$t_{SOD4}$<br>$t_{SOD8}$ |      |                   | 10<br>10<br>10 | ns<br>ns<br>ns | $C_L = 30 \text{ pF}$ |

<sup>†</sup> Characteristics are over recommended operating conditions unless otherwise stated.

<sup>‡</sup> Typical figures are at 25°C,  $V_{DD}$  at 3.3 V and are for design aid only: not guaranteed and not subject to production testing.

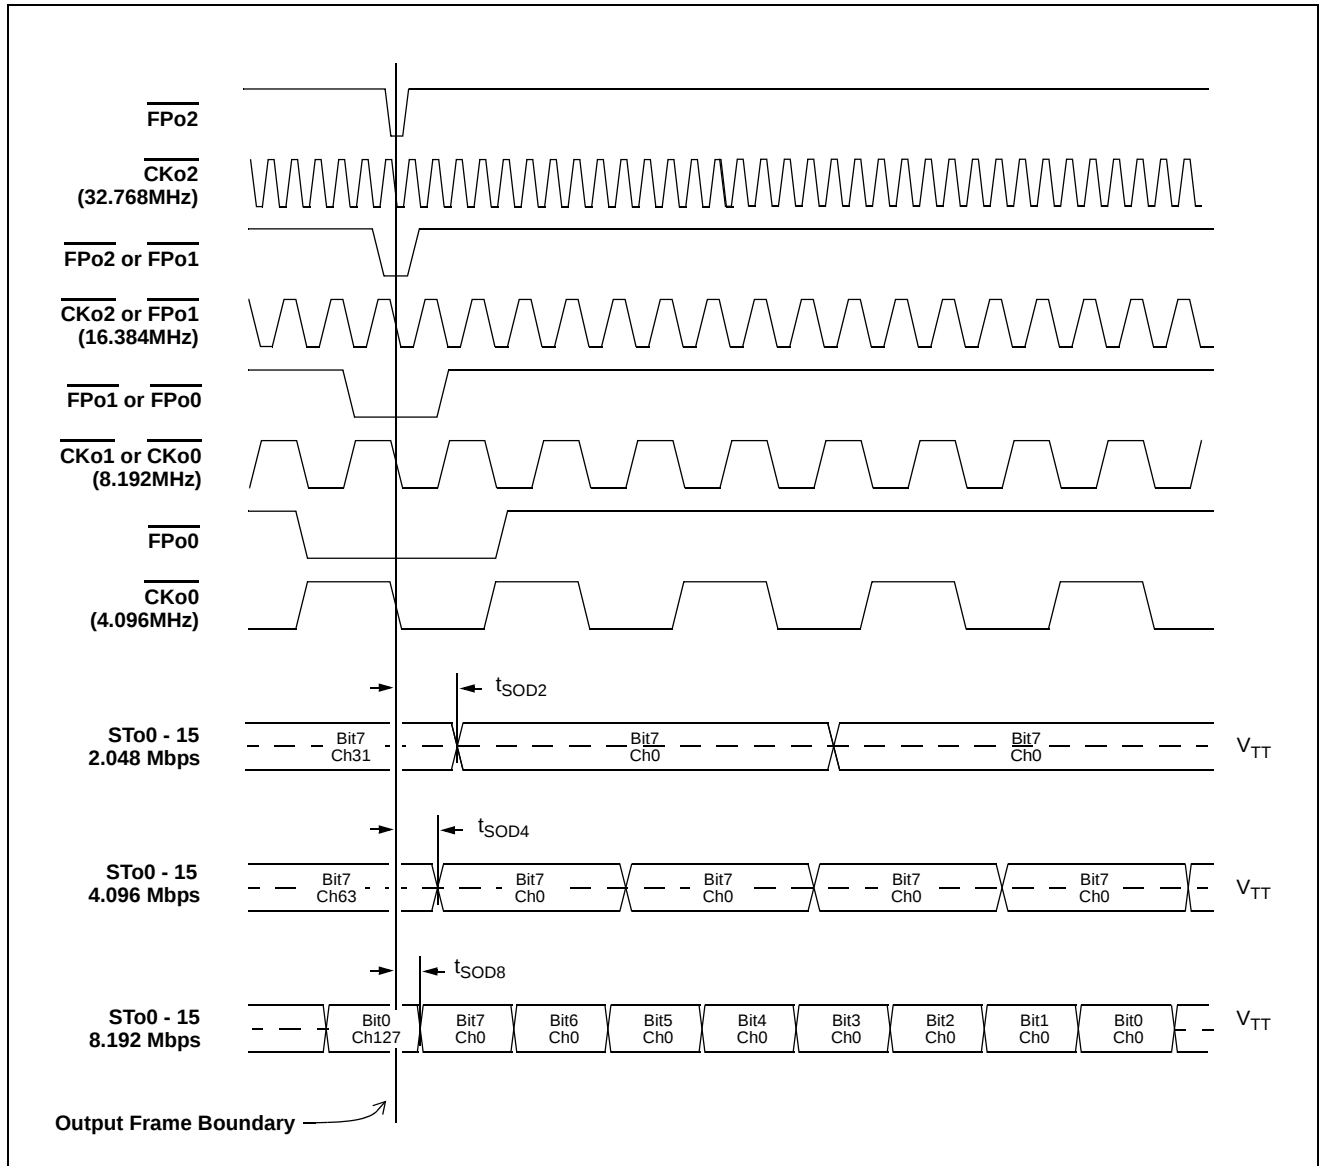


Figure 44 - ST-BUS Outputs (STo0 - 15) Timing Diagram


**AC Electrical Characteristics<sup>†</sup> - ST-BUS Output Tristate Timing**

|   | Characteristic                                                                                         | Sym.             | Min. | Typ. <sup>‡</sup> | Max.           | Units          | Test Conditions                                           |
|---|--------------------------------------------------------------------------------------------------------|------------------|------|-------------------|----------------|----------------|-----------------------------------------------------------|
| 1 | STo Delay - Active to High-Z<br>STo Delay - High-Z to Active<br>2.048 Mbps<br>4.096 Mbps<br>8.192 Mbps | $t_{DZ}, t_{ZD}$ |      |                   | 15<br>15<br>15 | ns<br>ns<br>ns | $R_L=1\text{ K}$ ,<br>$C_L=30\text{ pF}$ ,<br>See Note 1. |
| 2 | Output Driver Enable (ODE) Delay<br>- High-Z to Active<br>2.048 Mbps<br>4.096 Mbps<br>8.192 Mbps       | $t_{ZD\_ODE}$    |      |                   | 45<br>45<br>45 | ns<br>ns<br>ns |                                                           |
| 2 | Output Driver Disable (ODE) Delay<br>- Active to High-Z<br>2.048 Mbps<br>4.096 Mbps<br>8.192 Mbps      | $t_{DZ\_ODE}$    |      |                   | 30<br>30<br>30 | ns<br>ns<br>ns |                                                           |


<sup>†</sup> Characteristics are over recommended operating conditions unless otherwise stated.

<sup>‡</sup> Typical figures are at 25°C and are for design aid only: not guaranteed and not subject to production testing.

\* Note 1: High Impedance is measured by pulling to the appropriate rail with  $R_L$ , with timing corrected to cancel the time taken to discharge  $C_L$ .

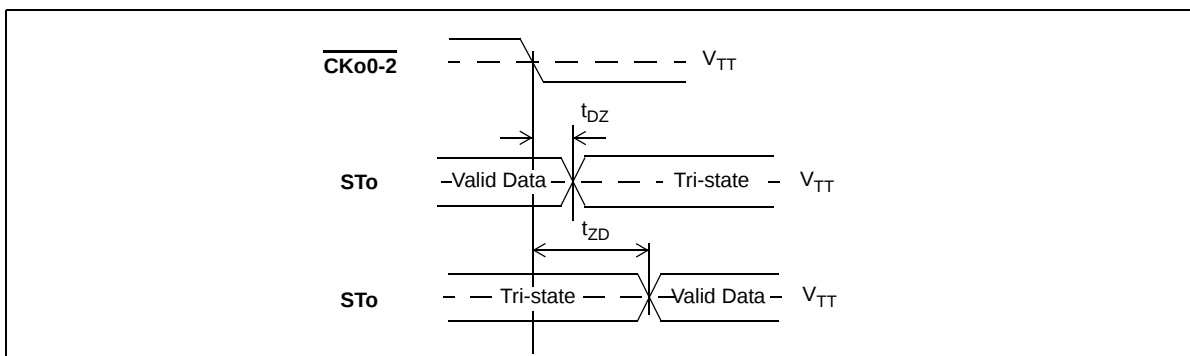

**Figure 45 - Serial Output and External Control**

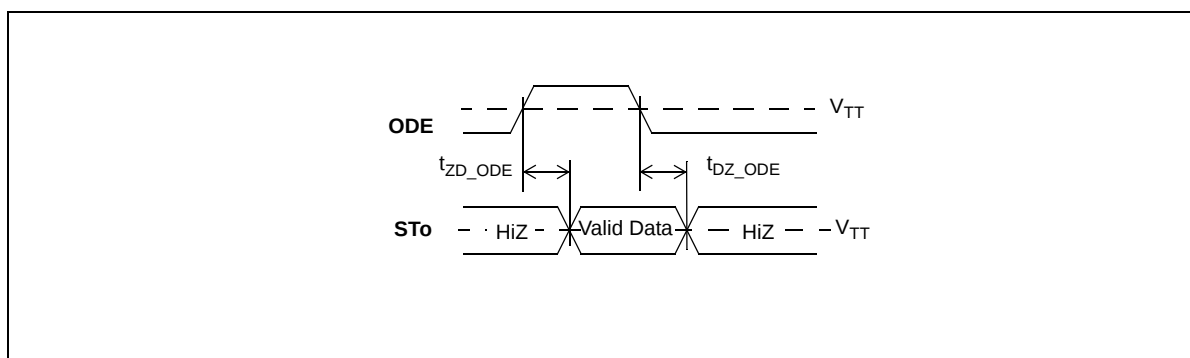


**Figure 46 - Output Driver Enable (ODE)**

**AC Electrical Characteristics - Motorola Non-Multiplexed Bus Mode**

|    | Characteristics                                                                                           | Sym.      | Min. | Typ. | Max.               | Units    | Test Conditions <sup>2</sup>       |
|----|-----------------------------------------------------------------------------------------------------------|-----------|------|------|--------------------|----------|------------------------------------|
| 1  | $\overline{CS}$ setup from $\overline{DS}$ falling                                                        | $t_{CSS}$ | 0    |      |                    | ns       |                                    |
| 2  | R/W setup from $\overline{DS}$ falling                                                                    | $t_{RWS}$ | 10   |      |                    | ns       |                                    |
| 3  | Address setup from $\overline{DS}$ falling                                                                | $t_{ADS}$ | 5    |      |                    | ns       |                                    |
| 4  | $\overline{DS}$ delay from the rising edge of $\overline{DTA}$ to the falling edge of the $\overline{DS}$ | $t_{DSD}$ | 50   |      |                    | ns       |                                    |
| 5  | $\overline{CS}$ delay from the rising edge of $\overline{DTA}$ to the falling edge of the $\overline{CS}$ | $t_{CSD}$ | 50   |      |                    | ns       |                                    |
| 6  | $\overline{CS}$ hold after $\overline{DS}$ rising                                                         | $t_{CSH}$ | 0    |      |                    | ns       |                                    |
| 7  | R/W hold after $\overline{DS}$ rising                                                                     | $t_{RWH}$ | 0    |      |                    | ns       |                                    |
| 8  | Address hold after $\overline{DS}$ rising                                                                 | $t_{ADH}$ | 0    |      |                    | ns       |                                    |
| 9  | Data setup from $\overline{DTA}$ Low on Read                                                              | $t_{DDR}$ | 20   |      |                    | ns       | $C_L=30$ pF                        |
| 10 | Data hold on read                                                                                         | $t_{DHR}$ | 3    |      | 9                  | ns       | $C_L=30$ pF, $R_L=1$ K<br>(Note 1) |
| 11 | Data setup from $\overline{DS}$ falling on write                                                          | $t_{WDS}$ | 10   |      |                    | ns       |                                    |
| 12 | Data hold on write                                                                                        | $t_{DHW}$ | 0    |      |                    | ns       |                                    |
| 13 | Acknowledgment Delay:<br>Reading/Writing Registers<br>Reading/Writing Memory                              | $t_{AKD}$ |      |      | 120/105<br>200/150 | ns<br>ns | $C_L=30$ pF<br>$C_L=30$ pF         |
| 14 | Acknowledgment Hold Time                                                                                  | $t_{AKH}$ |      |      | 20                 | ns       | $C_L=30$ pF, $R_L=1$ K<br>(Note 1) |


Note 1: High Impedance is measured by pulling to the appropriate rail with  $R_L$ , with timing corrected to cancel time taken to discharge  $C_L$ .  
Note 2: A delay of 600 microseconds must be applied before the first microprocessor access is performed after the RESET pin is set high.

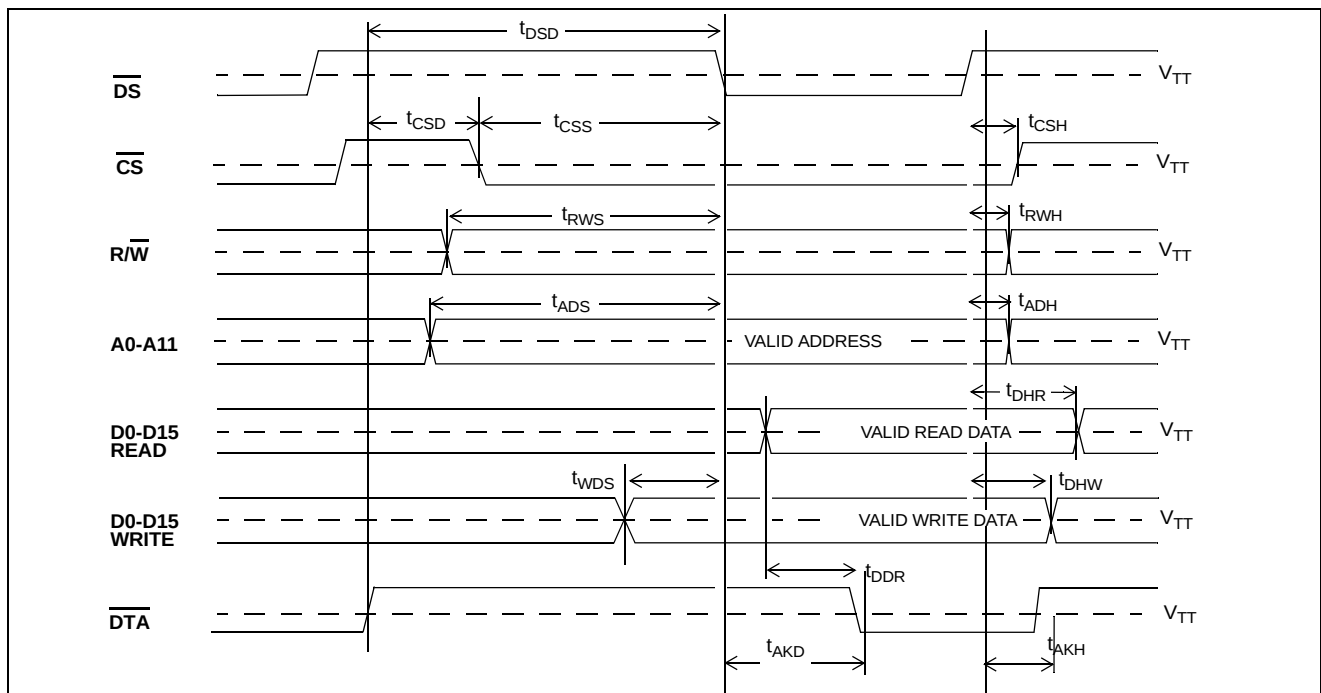**Figure 47 - Motorola Non-Multiplexed Bus Timing**


**AC Electrical Characteristics<sup>†</sup> - JTAG Test Port and Reset Pin Timing**

|    | Characteristic             | Sym.        | Min. | Typ. | Max. | Units | Notes         |
|----|----------------------------|-------------|------|------|------|-------|---------------|
| 1  | TCK Clock Period           | $t_{TCKP}$  | 100  |      |      | ns    |               |
| 2  | TCK Clock Pulse Width High | $t_{TCKH}$  | 80   |      |      | ns    |               |
| 3  | TCK Clock Pulse Width Low  | $t_{TCKL}$  | 80   |      |      | ns    |               |
| 4  | TMS Set-up Time            | $t_{TMSS}$  | 10   |      |      | ns    |               |
| 5  | TMS Hold Time              | $t_{TMSh}$  | 10   |      |      | ns    |               |
| 6  | TDi Input Set-up Time      | $t_{TDis}$  | 20   |      |      | ns    |               |
| 7  | TDi Input Hold Time        | $t_{TDIH}$  | 60   |      |      | ns    |               |
| 8  | TDo Output Delay           | $t_{TDOD}$  |      | 25   |      | ns    | $C_L = 30$ pF |
| 9  | TRST pulse width           | $t_{TRSTW}$ | 200  |      |      | ns    |               |
| 10 | Reset pulse width          | $t_{RSTW}$  | 1.0  |      |      | ms    |               |


<sup>†</sup> Characteristics are over recommended operating conditions unless otherwise stated.

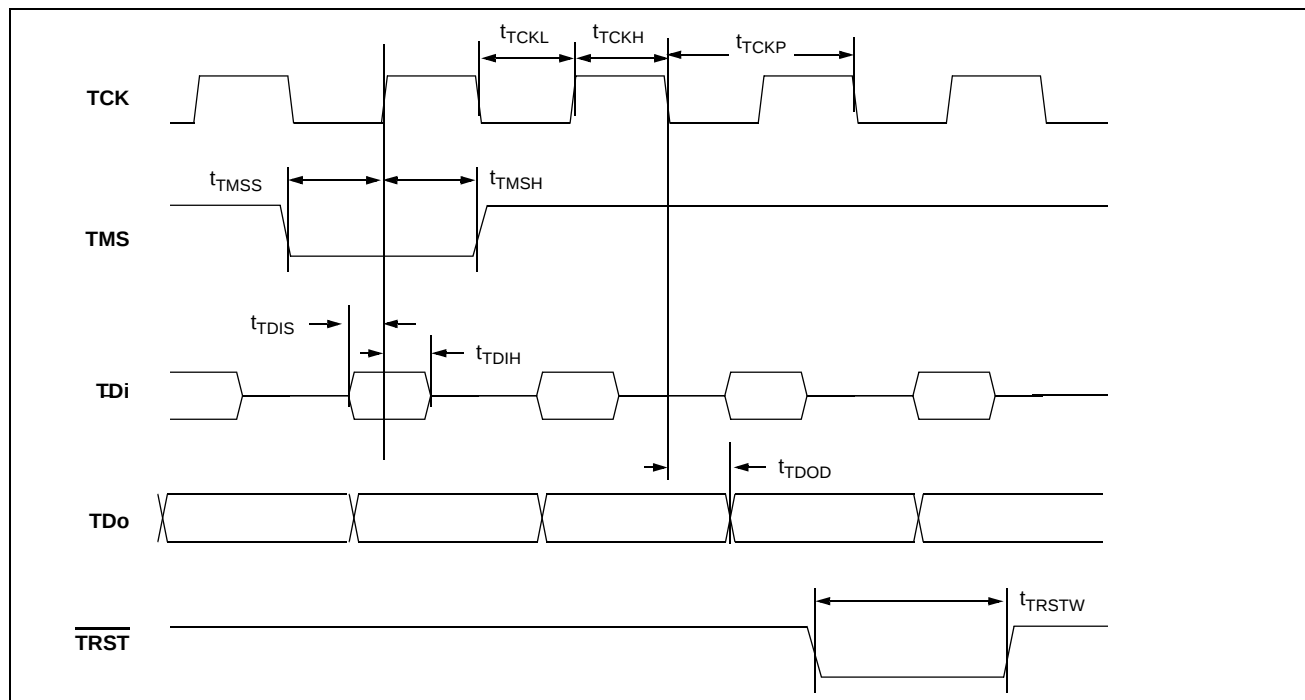

**Figure 48 - JTAG Test Port Timing Diagram**

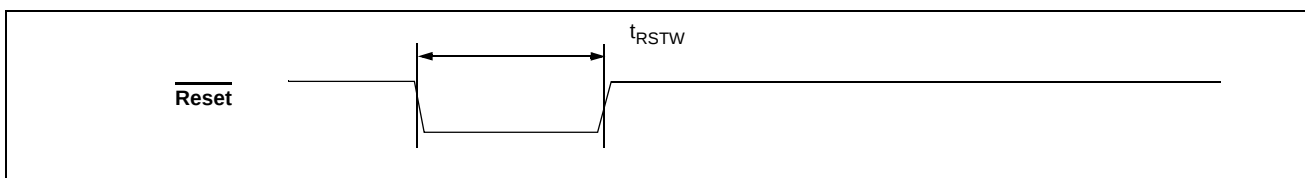

**Figure 49 - Reset Pin Timing Diagram**

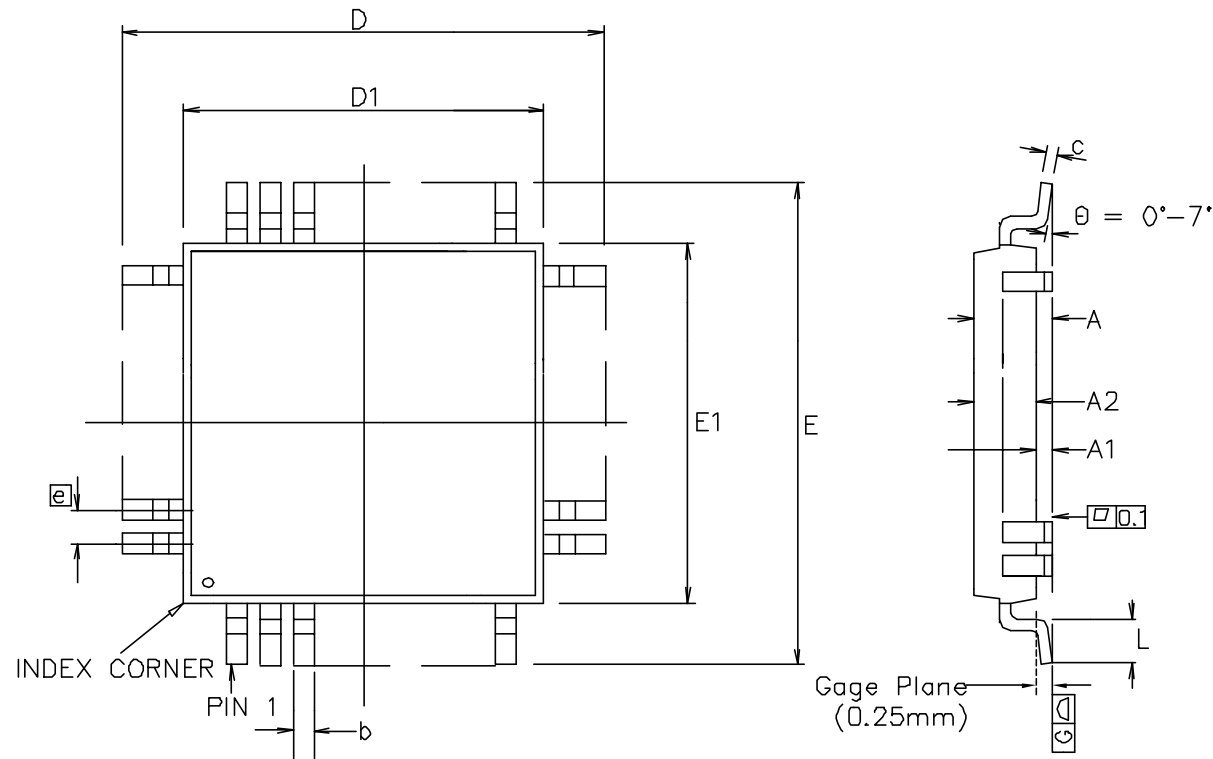

| Symbol       | Control Dimensions<br>in millimetres |      | Altern. Dimensions<br>in inches |       |
|--------------|--------------------------------------|------|---------------------------------|-------|
|              | MIN                                  | MAX  | MIN                             | MAX   |
| A            | ---                                  | 1.60 | ---                             | 0.047 |
| A1           | 0.05                                 | 0.15 | 0.002                           | 0.006 |
| A2           | 1.35                                 | 1.45 | 0.053                           | 0.057 |
| D            | 26.00 BSC                            |      | 1.024 BSC                       |       |
| D1           | 24.00 BSC                            |      | 0.945 BSC                       |       |
| E            | 26.00 BSC                            |      | 1.024 BSC                       |       |
| E1           | 24.00 BSC                            |      | 0.945 BSC                       |       |
| L            | 0.45                                 | 0.75 | 0.018                           | 0.030 |
| e            | 0.50 BSC                             |      | 0.020 BSC                       |       |
| b            | 0.17                                 | 0.27 | 0.007                           | 0.011 |
| c            | 0.09                                 | 0.20 | 0.004                           | 0.008 |
| Pin features |                                      |      |                                 |       |
| N            | 160                                  |      |                                 |       |
| ND           | 40                                   |      |                                 |       |
| NE           | 40                                   |      |                                 |       |
| NOTE         | SQUARE                               |      |                                 |       |

Conforms to JEDEC MS-026 BGA Iss. C  
Except for number of pins.

#### Notes:

1. Pin 1 indicator may be a corner chamfer, dot or both.
2. Controlling dimensions are in millimeters.
3. The top package body size may be smaller than the bottom package body size by a max. of 0.15 mm.
4. Dimension D1 and E1 do not include mould protrusion.
5. Dimension b does not include dambar protusion.
6. Coplanarity, measured at seating plane G, to be 0.08 mm max.

© Zarlink Semiconductor 2002 All rights reserved.

| ISSUE  | 1       | 2       | 3       |  |
|--------|---------|---------|---------|--|
| ACN    | 201652  | 207156  | 213835  |  |
| DATE   | 12Dec96 | 16Jul99 | 11Dec02 |  |
| APPRD. |         |         |         |  |




Previous package codes

Package Code


Package Outline for 160 Lead  
LQFP (QC) (24x24x1.4)mm  
+ 2.0mm (footprint)

GPD00269


TOP VIEW

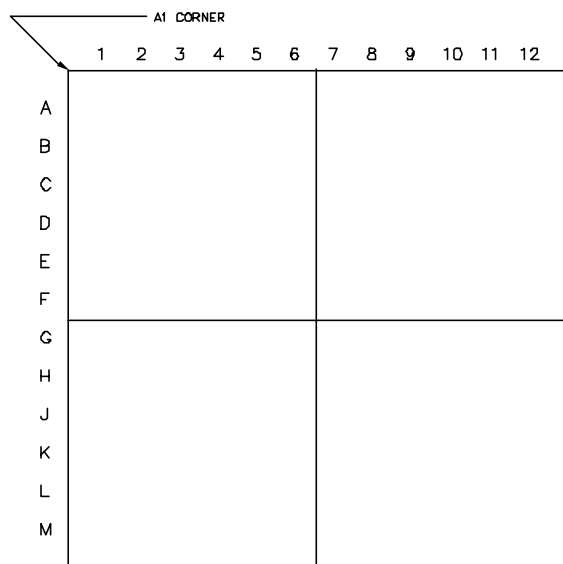

BOTTOM VIEW

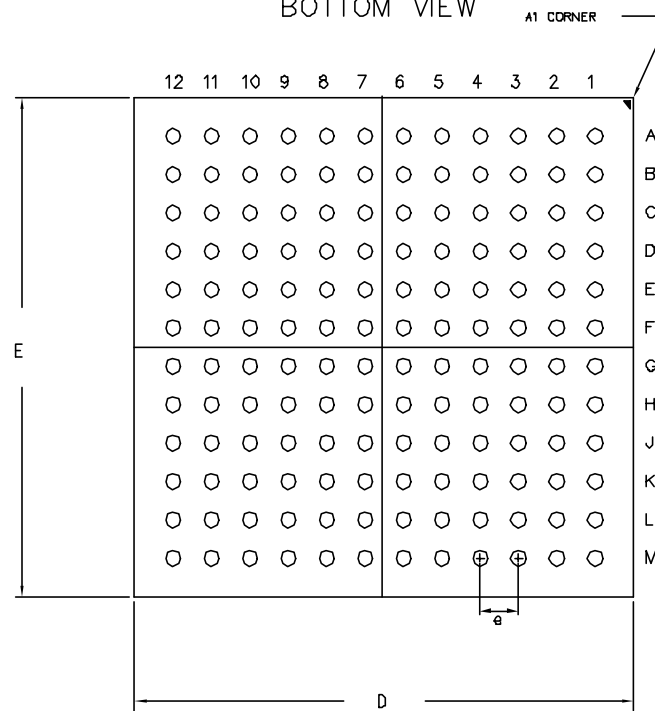

| DIMENSION                | MIN      | MAX   |
|--------------------------|----------|-------|
| A                        | —        | 1.25  |
| A1                       | 0.25     | 0.35  |
| A2                       | 0.53 REF |       |
| D                        | 12.95    | 13.05 |
| E                        | 12.95    | 13.05 |
| b                        | 0.35     | 0.45  |
| e                        | 1.00     |       |
| N                        | 144      |       |
| Conforms to JEDEC MO-192 |          |       |

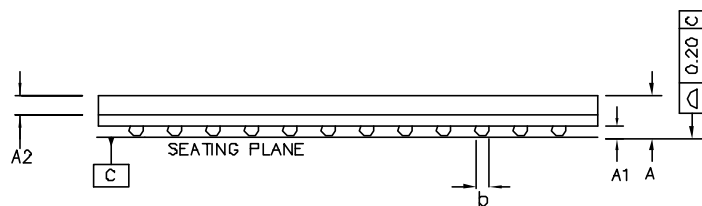

SIDE VIEW

## NOTES: —

1. Controlling dimensions are in MM.
2. Seating plane is defined by the spherical crown of the solder balls.
3. Not to scale.
4. N is the number of solder balls
5. Substrate thickness is 0.36 MM.

© Zarlink Semiconductor 2002 All rights reserved.

|        |         |         |  |  |
|--------|---------|---------|--|--|
| ISSUE  | 1       | 2       |  |  |
| ACN    | 213740  | 213834  |  |  |
| DATE   | 15Nov02 | 11Dec02 |  |  |
| APPRD. |         |         |  |  |



Package Code GD

Previous package codes

Package Outline for  
144Ball LPGA  
13x13x1.25mm

GPD00805



**For more information about all Zarlink products  
visit our Web Site at  
[www.zarlink.com](http://www.zarlink.com)**

Information relating to products and services furnished herein by Zarlink Semiconductor Inc. or its subsidiaries (collectively "Zarlink") is believed to be reliable. However, Zarlink assumes no liability for errors that may appear in this publication, or for liability otherwise arising from the application or use of any such information, product or service or for any infringement of patents or other intellectual property rights owned by third parties which may result from such application or use. Neither the supply of such information or purchase of product or service conveys any license, either express or implied, under patents or other intellectual property rights owned by Zarlink or licensed from third parties by Zarlink, whatsoever. Purchasers of products are also hereby notified that the use of product in certain ways or in combination with Zarlink, or non-Zarlink furnished goods or services may infringe patents or other intellectual property rights owned by Zarlink.

This publication is issued to provide information only and (unless agreed by Zarlink in writing) may not be used, applied or reproduced for any purpose nor form part of any order or contract nor to be regarded as a representation relating to the products or services concerned. The products, their specifications, services and other information appearing in this publication are subject to change by Zarlink without notice. No warranty or guarantee express or implied is made regarding the capability, performance or suitability of any product or service. Information concerning possible methods of use is provided as a guide only and does not constitute any guarantee that such methods of use will be satisfactory in a specific piece of equipment. It is the user's responsibility to fully determine the performance and suitability of any equipment using such information and to ensure that any publication or data used is up to date and has not been superseded. Manufacturing does not necessarily include testing of all functions or parameters. These products are not suitable for use in any medical products whose failure to perform may result in significant injury or death to the user. All products and materials are sold and services provided subject to Zarlink's conditions of sale which are available on request.

Purchase of Zarlink's I<sup>2</sup>C components conveys a license under the Philips I<sup>2</sup>C Patent rights to use these components in an I<sup>2</sup>C System, provided that the system conforms to the I<sup>2</sup>C Standard Specification as defined by Philips.

Zarlink, ZL, the Zarlink Semiconductor logo and the Legerity logo and combinations thereof, VoiceEdge, VoicePort, SLAC, ISLIC, ISLAC and VoicePath are trademarks of Zarlink Semiconductor Inc.

**TECHNICAL DOCUMENTATION - NOT FOR RESALE**

---