
PT6120 Series

1 AMP ADJUSTABLE LOW VOLTAGE INPUT INTEGRATED SWITCHING REGULATOR


SLTS081
(Revised 6/4/98)

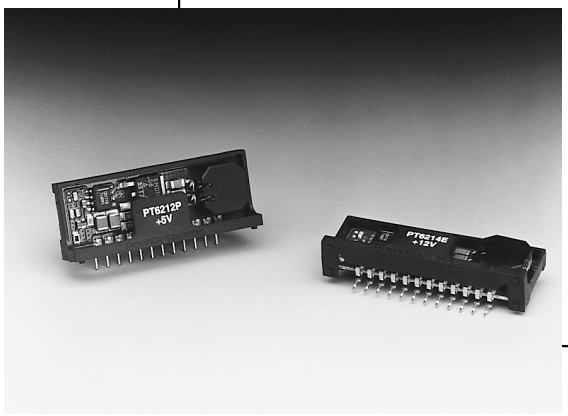

- Low Voltage Input (7V)
- 89% Efficiency
- Adjustable Output Voltage
- Internal Short Circuit Protection
- Over-Temperature Protection
- On/Off Control (Ground Off)

The PT6120 series is a low voltage input (typically 7V) version of Power Trends' high-performance 1A, 12 pin SIP Integrated Switching Regulators (ISRs). These ISRs are designed with premium low threshold FETs for those applications requiring very low input/output voltage differentials such as battery powered equipment. This high-performance ISR family offers a unique combination of features combining 89% typical efficiency with open-collector on/off control and adjustable output voltage. Quiescent current in the shutdown mode is less than 100µA.

Standard Application

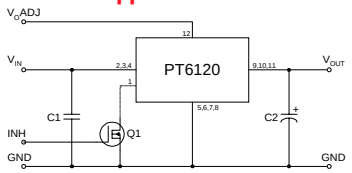


C_1 = Optional 1µF ceramic
Q_1 = NFET
C_2 = Required 100µF electrolytic

Pin-Out Information

Pin	Function
1	Inhibit (30V max)
2	V_{in}
3	V_{in}
4	V_{in}
5	GND
6	GND
7	GND
8	GND
9	V_{out}
10	V_{out}
11	V_{out}
12	V_{out} Adj

Ordering Information

PT6121☐ = +5 Volts
PT6122☐ = +3.3 Volts



PT Series Suffix (PT1234X)

Case/Pin Configuration	
Vertical Through-Hole	N
Horizontal Through-Hole	A
Horizontal Surface Mount	C

Specifications

Characteristics (T_a =25°C unless noted)	Symbols	Conditions	PT6120 SERIES Min	Typ	Max	Units
Output Current	I_o	Over V_{in} range	0.1*	—	1.0	A
Short Circuit Current	I_{sc}	V_{in} = V_{in} min	—	3.5	—	Apk
Input Voltage Range *(Note: inhibit function cannot be used with Vin above 30V)*	V_{in}	0.1 ≤ I_o ≤ 1.0 A V_o = 3.3V V_o = 5V	7 7	— —	26 30/38**	V V
Output Voltage Tolerance	ΔV_o	Over V_{in} Range, I_o = 1.0 A T_a = 0°C to +60°C	—	±1.0	±2.0	%V_o
Line Regulation	Reg_{line}	Over V_{in} range	—	±0.25	±0.5	%V_o
Load Regulation	Reg_{load}	0.1 ≤ I_o ≤ 1.0 A	—	±0.25	±0.5	%V_o
V_o Ripple/Noise	V_n	V_{in}=V_{in} min, I_o=1.0 A	—	±2	—	%V_o
Transient Response with C_o = 100µF	t_{tr} V_{os}	50% load change V_o over/undershoot	— —	100 5.0	200 —	µSec %V_o
Efficiency	η	V_{in}=9V, I_o=0.5A, V_o=3.3V V_{in}=9V, I_o=0.5A, V_o=5V	— —	84 89	— —	% %
Switching Frequency	f_o	Over V_{in} and I_o ranges	400	500	600	kHz
Shutdown Current	I_{sc}	V_{in} = 15V	—	100	—	µA
Quiescent Current	I_{nl}	I_o = 0A, V_{in} =10V	—	10	—	mA
Output Voltage Adjustment Range	V_o	Below V_o Above V_o	See Application Notes.			
Absolute Maximum Operating Temperature Range	T_a		-40	—	+85	°C
Recommended Operating Temperature Range	T_a	Free Air Convection, V_o= 3.3V (40-60LFM) V_o= 5V	-40 -40	— —	+85*** +85***	°C
Thermal Resistance	θ_{ja}	Free Air Convection V_o = 3.3V (40-60LFM) V_o = 5V	— —	50 40	— —	°C/W
Storage Temperature	T_s		-40	—	+125	°C
Mechanical Shock		Per Mil-STD-883D, Method 2002.3 1 msec, Half Sine, mounted to a fixture	—	500	—	G's
Mechanical Vibration		Per Mil-STD-883D, Method 2007.2 20-2000 Hz, Soldered in a PC board	—	10	—	G's
Weight			—	5.0	—	grams


* ISR will operate down to no load with reduced specifications.
** Input voltage cannot exceed 30V when the inhibit function is used. ***See Thermal Derating chart.
Note: *The PT6120 Series requires a 100µF electrolytic or tantalum output capacitor for proper operation in all applications.*

Power Trends, Inc. 27715 Diehl Road, Warrenville, IL 60555 **(800) 531-5782** Fax: (630) 393-6902 **http://www.ti.com/powertrends**


PT6122, 3.3 VDC

(See Note 1)


Efficiency vs Output Current

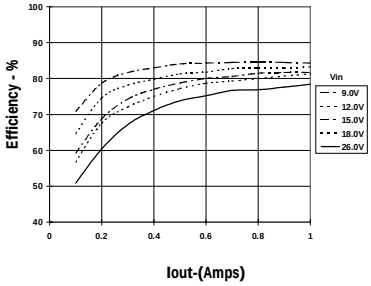


Ripple vs Output Current

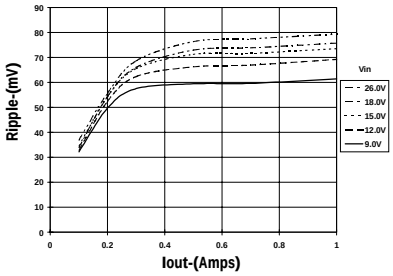

Thermal Derating (T_a) (See Note 2)




Power Dissipation vs Output Current

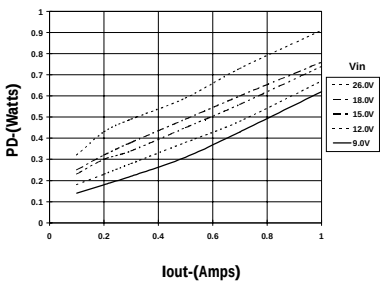


PT6121, 5.0 VDC

(See Note 1)


Efficiency vs Output Current

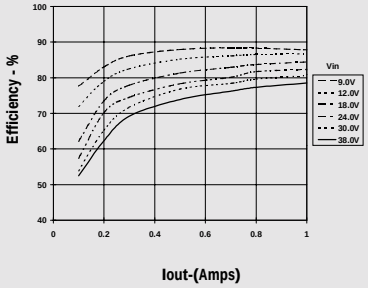


Ripple vs Output Current

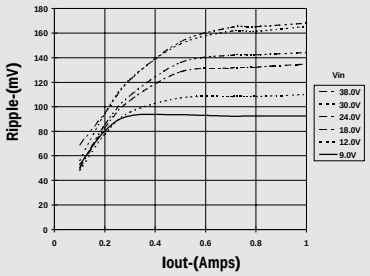

Thermal Derating (T_a) (See Note 2)

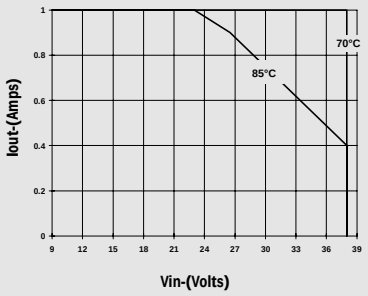

Power Dissipation vs Output Current

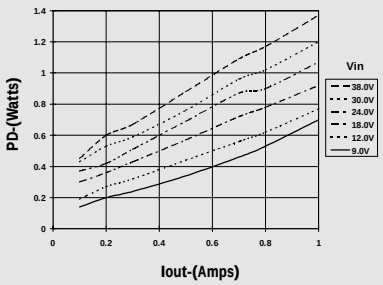

Note 1: *All data listed in the above graphs, except for derating data, has been developed from actual products tested at 25°C. This data is considered typical data for the ISR.*
Note 2: *Thermal derating graphs are developed in free air convection cooling of 40-60 LFM. (See Thermal Application Notes.)*

Adjusting the Output Voltage of Power Trends' Wide Input Range Bus ISRs

The output voltage of the Power Trends' Wide Input Range Series ISRs may be adjusted higher or lower than the factory trimmed pre-set voltage with the addition of a single external resistor. Table 1 accordingly gives the allowable adjustment range for each model for either series as V_a (min) and V_a (max).

Adjust Up: An increase in the output voltage is obtained by adding a resistor R2, between pin 12 (V_o adjust) and pins 5-8 (GND).

Adjust Down: Add a resistor (R1), between pin 12 (V_o adjust) and pins 9-11(V_{out}).

Refer to Figure 1 and Table 2 for both the placement and value of the required resistor; either (R1) or R2 as appropriate.

Notes:

1. Use only a single 1% resistor in either the (R1) or R2 location. Place the resistor as close to the ISR as possible.

2. Never connect capacitors from V_o adjust to either GND or V_{out}. Any capacitance added to the V_o adjust pin will affect the stability of the ISR.

4. Adjustments to the output voltage may place additional limits on the maximum and minimum input voltage for the part. The revised maximum and minimum input voltage limits must comply with the following requirements. Note that the minimum input voltage limits are also model dependant.

$$V_{in}\,(max) = (8 \times V_a)V \text{ or } *30/38V, \text{ whichever is less.}$$

**Limit is 30V when inhibit function is active.*

PT6x0x/PT6x1x series:


$$V_{in}\,(min) = (V_a + 4)V \text{ or } 9V, \text{ whichever is greater.}$$

PT6x2x series:

V_o <10V; $V_{in}\,(min) = (V_a + 2.0)V$ or 7.0V, whichever is greater.

V_o ≥10V; $V_{in}\,(min) = (V_a + 2.5)V$

Figure 1

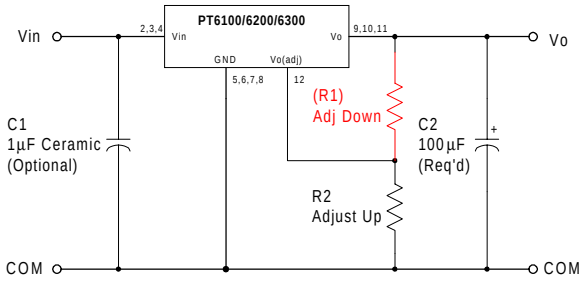

The values of (R1) [adjust down], and R2 [adjust up], can also be calculated using the following formulae.

$$(R1) = \frac{R_o\,(V_a - 1.25)}{V_o - V_a} \quad k\Omega$$

$$R2 = \frac{1.25\,R_o}{V_a - V_o} \quad k\Omega$$

Where: V_o = Original output voltage
V_a = Adjusted output voltage
R_o = The resistance value fromTable 1

Table 1

ISR ADJUSTMENT RANGE AND FORMULA PARAMETERS

1Adc Rated	**PT6102**	**PT6101**		**PT6103**
	PT6122	**PT6121**		
2Adc Rated	**PT6213**		**PT6212**	**PT6214**
	PT6223		**PT6222**	
3Adc Rated	**PT6303**		**PT6302**	**PT6304**
	PT6323		**PT6322**	
V_o (nom)	3.3	5.0	5.0	12.0
V_a (min)	1.89	1.88	2.18	2.43
V_a (max)	6.07	11.25	8.5	22.12
R_o (kΩ)	66.5	150.0	90.9	243.0

Table 2

ISR ADJUSTMENT RESISTOR VALUES

1Adc Rated	PT6102 / PT6122	PT6101 / PT6121		PT6103
2Adc Rated	PT6213 / PT6223		PT6212 / PT6222	PT6214
3Adc Rated	PT6303 / PT6323		PT6302 / PT6322	PT6304
V_o (nom)	3.3	5.0	5.0	12.0
V_a (req.d)				
1.9	(30.9)kΩ	(31.5)kΩ		
2.0	(38.4)kΩ	(37.5)kΩ		
2.1	(47.1)kΩ	(44.0)kΩ		
2.2	(57.4)kΩ	(50.9)kΩ	(30.8)kΩ	
2.3	(69.8)kΩ	(58.3)kΩ	(35.4)kΩ	
2.4	(85.0)kΩ	(66.3)kΩ	(40.2)kΩ	
2.5	(104.0)kΩ	(75.0)kΩ	(45.5)kΩ	(32.0)kΩ
2.6	(128.0)kΩ	(84.4)kΩ	(51.1)kΩ	(34.9)kΩ
2.7	(161.0)kΩ	(94.6)kΩ	(57.3)kΩ	(37.9)kΩ
2.8	(206.0)kΩ	(106.0)kΩ	(64.0)kΩ	(40.9)kΩ
2.9	(274.0kΩ	(118.0)kΩ	(71.4)kΩ	(44.1)kΩ
3.0	(388.0)kΩ	(131.0)kΩ	(79.5)kΩ	(47.3)kΩ
3.1	(615.0)kΩ	(146.0)kΩ	(88.5)kΩ	(50.5)kΩ
3.2	(1300.0)kΩ	(163.0)kΩ	(98.5)kΩ	(53.8)kΩ
3.3		(181.0)kΩ	(110.0)kΩ	(57.3)kΩ
3.4	831.0kΩ	(202.0)kΩ	(122.0)kΩ	(60.8)kΩ
3.5	416.0kΩ	(225.0)kΩ	(136.0)kΩ	(64.3)kΩ
3.6	227.0kΩ	(252.0)kΩ	(153.0)kΩ	(68.0)kΩ
3.7	208.0kΩ	(283.0)kΩ	(171.0)kΩ	(71.7)kΩ
3.8	166.0kΩ	(319.0)kΩ	(193.0)kΩ	(75.6)kΩ
3.9	139.0kΩ	(361.0)kΩ	(219.0)kΩ	(79.5)kΩ
4.0	119.0kΩ	(413.0)kΩ	(250.0)kΩ	(83.5)kΩ
4.1	104.0kΩ	(475.0)kΩ	(288.0)kΩ	(87.7)kΩ
4.2	92.4kΩ	(533.0)kΩ	(335.0)kΩ	(91.9)kΩ
4.3	83.1kΩ	(654.0)kΩ	(396.0)kΩ	(96.3)kΩ
4.4	75.6kΩ	(788.0)kΩ	(477.0)kΩ	(101.0)kΩ
4.5	69.3kΩ	(975.0)kΩ	(591.0)kΩ	(105.0)kΩ
4.6	63.9kΩ	(1260.0)kΩ	(761.0)kΩ	(110.0)kΩ
4.7	59.4kΩ	(1730.0)kΩ	(1050.0)kΩ	(115.0)kΩ
4.8	55.4kΩ		(1610.0)kΩ	(120.0)kΩ
4.9	52.0kΩ			(125.0)kΩ
5.0	48.9kΩ			(130.0)kΩ
5.1	46.2kΩ	1880.0kΩ	1140.0kΩ	(136.0)kΩ
5.2	43.8kΩ	937.0kΩ	568.0kΩ	(141.0)kΩ
5.3	41.6kΩ	625.0kΩ	379.0kΩ	(147.0)kΩ
5.4	39.6kΩ	469.0kΩ	284.0kΩ	(153.0)kΩ
5.5	37.8kΩ	375.0kΩ	227.0kΩ	(159.0)kΩ
5.6	36.1kΩ	313.0kΩ	189.0kΩ	(165.0)kΩ
5.7	34.6kΩ	268.0kΩ	162.0kΩ	(172.0)kΩ
5.8	33.3kΩ	234.0kΩ	142.0kΩ	(178.0)kΩ
5.9	32.0kΩ	208.0kΩ	126.0kΩ	(185.0)kΩ
6.0	30.8kΩ	188.0kΩ	114.0kΩ	(192.0)kΩ

ISR ADJUSTMENT RESISTOR VALUES (Cont)

1Adc Rated	PT6101 / PT6121		PT6103
2Adc Rated		PT6212 / PT6222	PT6214
3Adc Rated		PT6302 / PT6322	PT6304
V_o (nom)	5.0	5.0	12.0
V_a (req.d)			
6.2	156.0kΩ	94.7kΩ	(207.0)kΩ
6.4	134.0kΩ	81.2kΩ	(223.0)kΩ
6.6	117.0kΩ	71.0kΩ	(241.0)kΩ
6.8	104.0kΩ	63.1kΩ	(259.0)kΩ
7.0	93.8kΩ	56.8kΩ	(279.0)kΩ
7.2	85.2kΩ	51.6kΩ	(301.0)kΩ
7.4	78.1kΩ	47.3kΩ	(325.0)kΩ
7.6	72.1kΩ	43.7kΩ	(351.0)kΩ
7.8	67.0kΩ	40.6kΩ	(379.0)kΩ
8.0	62.5kΩ	37.9kΩ	(410.0)kΩ
8.2	58.6kΩ	35.5kΩ	(444.0)kΩ
8.4	55.1kΩ	33.4kΩ	(483.0)kΩ
8.6	52.1kΩ		(525.0)kΩ
8.8	49.3kΩ		(573.0)kΩ
9.0	46.9kΩ		(628.0)kΩ
9.5	41.7kΩ		(802.0)kΩ
10.0	37.5kΩ		(1060.0)kΩ
10.5	34.1kΩ		(1500.0)kΩ
11.0	31.3kΩ		
11.5			
12.0			
12.5			608.0kΩ
13.0			304.0kΩ
13.5			203.0kΩ
14.0			152.0kΩ
14.5			122.0kΩ
15.0			101.0kΩ
15.5			86.8kΩ
16.0			75.9kΩ
16.5			67.5kΩ
17.0			60.8kΩ
17.5			55.2kΩ
18.0			50.6kΩ
18.5			46.7kΩ
19.0			43.4kΩ
19.5			40.5kΩ
20.0			38.0kΩ
20.5			35.7kΩ
21.5			33.8kΩ
21.5			32.0kΩ
22.0			30.4kΩ

R1 = (Red) R2 = Black


Using the Inhibit Function on Power Trends' Wide Input Range Bus ISRs

For applications requiring output voltage On/Off control, the 12pin ISR products incorporate an inhibit function. The function has uses in areas such as battery conservation, power-up sequencing, or any other application where the regulated output from the module is required to be switched off. The On/Off function is provided by the *Inhibit* control, pin 1.

The ISR functions normally with pin 1 open-circuit, providing a regulated output whenever a valid source voltage is applied to V_{in}, (pins 2, 3, & 4). When a low-level[2] ground signal is applied to pin 1 the regulator output is disabled, and the input current to the ISR is reduced to about 100µA [3/].


Figure 1 shows an application schematic, which details the typical use of the inhibit function. Note the discrete transistor, Q1. The inhibit control has its own internal pull-up with a maximum open-circuit voltage of 8.3VDC. Only devices with a true open-collector or open-drain output can be used to control this pin. A discrete bipolar transistor or MOSFET is recommended.

Figure 1

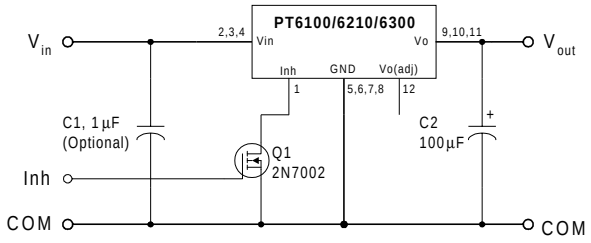

Turn-On Time: The output of the ISR is enabled automatically when external power is applied to the input. The *Inhibit* control pin is pulled high by its internal pull-up resistor. The ISR produces a fully regulated output voltage within 1-msec of either the release of the Inhibit control pin, or the application of power. The actual turn-on time will vary with the input voltage, output load, and the total amount of capacitance connected to the output Using the circuit of Figure 1, Figure 2 shows the typical rise in output voltage for the PT6101 following the turn-off of Q1 at time t =0. The waveform was measured with a 9Vdc input voltage, and 5-Ohm resistive load.

Figure 2

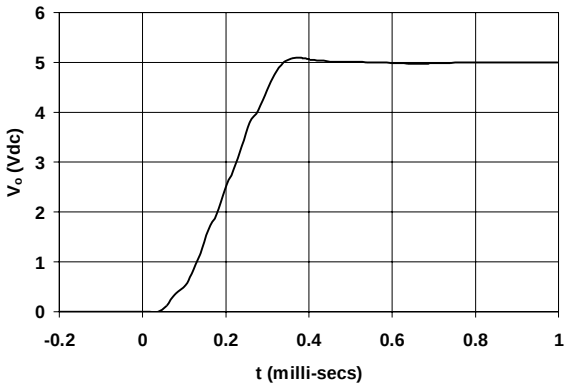

Notes:

1. The inhibit control logic is similar for all Power Trends' modules, but the flexibility and threshold tolerances will be different. For specific information on the inhibit function of other ISR models, consult the applicable application note.
2. Use only a true open-collector device (preferably a discrete transistor) for the inhibit input. Do Not use a pull-up resistor, or drive the input directly from the output of a TTL or other logic gate. To disable the output voltage, the control pin should be pulled low to less than +1.5VDC.
3. The following equation may be used to determine the approximate current drawn from the input supply at V_{in}, and through Q1 when the inhibit is active.

   $I_{stby} = V_{in} \div 155k\Omega \pm 20\%$
4. When the inhibit control pin is active, i.e. pulled low, the maximum input voltage is limited to +30Vdc.
5. Do not control the inhibit input with an external DC voltage. This will lead to erratic operation of the ISR and may over-stress the regulator.
6. Avoid capacitance greater than 500pF at the Inhibit control pin. Excessive capacitance at this pin will cause the ISR to produce a pulse on the output voltage bus at turn-on.
7. Keep the On/Off transition to less than 10µs. This prevents erratic operation of the ISR, which can cause a momentary high output voltage.

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgment, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Customers are responsible for their applications using TI components.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.

Copyright © 2000, Texas Instruments Incorporated