

Han 300A PE axial module, 95-120mm² fem.

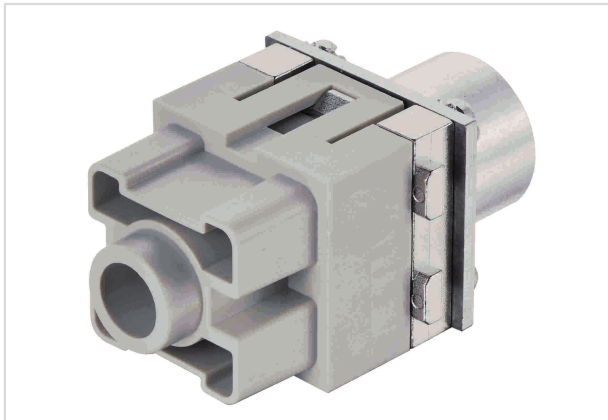


Image is for illustration purposes only. Please refer to product description.

Part number	09 14 001 2781
Specification	Han 300A PE axial module, 95-120mm ² fem.
HARTING eCatalogue	https://b2b.harting.com/09140012781

Identification

Category	Modules
Series	Han-Modular [®]
Type of module	Han [®] 300 A PE module

Version

Termination method	Axial screw termination
Gender	Female
Number of contacts	1

Technical characteristics

Conductor cross-section	95 ... 120 mm ²
Insulation resistance	>10 ¹⁰ Ω
Contact resistance	≤0.2 mΩ
Stripping length	19 ... 20 mm
Tightening torque	14 Nm @ 95 mm ² 16 Nm @ 120 mm ²
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500

Material properties

Material (insert)	Polycarbonate (PC)
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy



Pushing Performance

Material properties

Surface (contacts)	Silver plated
--------------------	---------------

Material flammability class acc. to UL 94	V-0
---	-----

Specifications and approvals

Specifications	EN 60664-1
	IEC 61984

Commercial data

Packaging size	1
----------------	---

Net weight	95 g
------------	------

Country of origin	Germany
-------------------	---------

European customs tariff number	85366990
--------------------------------	----------

eCl@ss	27440217 Module for industrial connectors (power/signals)
--------	---