

Han 3A SC Fe, with 4x metal ferule

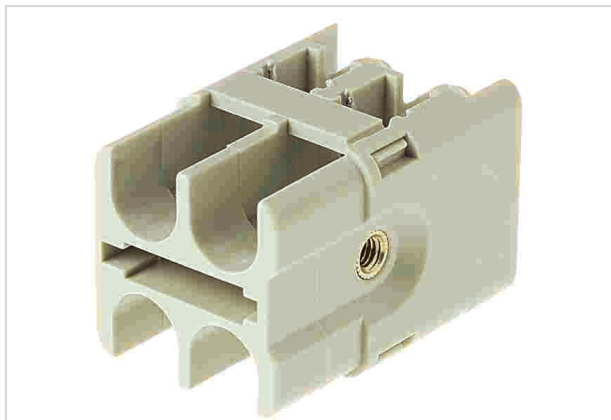


Image is for illustration purposes only. Please refer to product description.

Part number	09 20 004 4713
Specification	Han 3A SC Fe, with 4x metal ferule
HARTING eCatalogue	https://b2b.harting.com/09200044713

Identification

Category	Inserts
Series	Han-Brid [®]
Identification	Han [®] 3 A SC with 4x metal ferrule
Description of the contact	for FO

Version

Gender	Female
Size	3 A
Number of contacts	4
Details	Please order contacts separately.

Technical characteristics

Insulation resistance	$>10^{10} \Omega$
Limiting temperature	-40 ... +85 °C
Mating cycles	≥ 500

Material properties

Material (insert)	Polycarbonate (PC)
Colour (insert)	RAL 7032 (pebble grey)
Material flammability class acc. to UL 94	V-0



Pushing Performance

Commercial data

Packaging size	2
Country of origin	Germany
European customs tariff number	85366990
eCl@ss	27440205 Contact insert for industrial connectors