

## SN65HVD178x Fault-Protected RS-485 Transceivers With 3.3-V to 5-V Operation

### 1 Features

- Bus-Pin Fault Protection to:
  - $> \pm 70$  V (SN65HVD1780, SN65HVD1781)
  - $> \pm 30$  V (SN65HVD1782)
- Operation With 3.3-V to 5-V Supply Range
- $\pm 16$ -kV HBM Protection on Bus Pins
- Reduced Unit Load for Up to 320 Nodes
- Failsafe Receiver for Open-Circuit, Short-Circuit, and Idle-Bus Conditions
- Low Power Consumption
  - Low Standby Supply Current, 1  $\mu$ A Maximum
  - $I_{CC}$  4-mA Quiescent Current During Operation
- Pin-Compatible With Industry-Standard SN75176
- Signaling Rates of 115 kbps, 1 Mbps, and up to 10 Mbps
- Create a Custom Design using the SN65HVD178x with the [WEBENCH® Power Designer](#)

### 2 Applications

- HVAC Networks
- Security Electronics
- Building Automation
- Telecommunication Equipment
- Motion Control
- Industrial Networks

### 3 Description

The SN65HVD178x devices are designed to survive overvoltage faults such as direct shorts to power supplies, mis-wiring faults, connector failures, cable crushes, and tool mis-applications. The devices are also robust to ESD events with high levels of protection to the human-body-model specification.

The SN65HVD178x devices combine a differential driver and a differential receiver, which operate from a single power supply. In the SN65HVD1782, the driver differential outputs and the receiver differential inputs are connected internally to form a bus port suitable for half-duplex (two-wire bus) communication. This port features a wide common-mode voltage range, making the devices suitable for multipoint applications over long cable runs. These devices are characterized from  $-40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$ . These devices are pin-compatible with the industry-standard SN75176 transceiver, making them drop-in upgrades in most systems.


These devices are fully compliant with ANSI TIA/EIA 485-A with a 5-V supply and can operate with a 3.3-V supply with reduced driver output voltage for low-power applications. For applications where operation is required over an extended common-mode voltage range, see the SN65HVD1785 ([SLLS872](#)) data sheet.

**Device Information<sup>(1)</sup>**

| PART NUMBER | PACKAGE  | BODY SIZE (NOM)          |
|-------------|----------|--------------------------|
| SN65HVD178x | SOIC (8) | 4.90 mm $\times$ 3.91 mm |
|             | PDIP (8) | 9.81 mm $\times$ 6.35 mm |

(1) For all available packages, see the orderable addendum at the end of the data sheet.

### Protection Against Bus Shorts

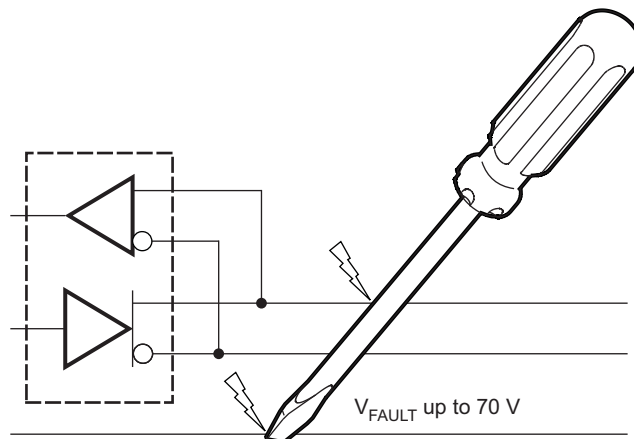

## Table of Contents

|                                                  |           |                                                                  |           |
|--------------------------------------------------|-----------|------------------------------------------------------------------|-----------|
| <b>1 Features</b> .....                          | <b>1</b>  | 9.2 Functional Block Diagram .....                               | <b>15</b> |
| <b>2 Applications</b> .....                      | <b>1</b>  | 9.3 Feature Description .....                                    | <b>15</b> |
| <b>3 Description</b> .....                       | <b>1</b>  | 9.4 Device Functional Modes .....                                | <b>16</b> |
| <b>4 Revision History</b> .....                  | <b>2</b>  | <b>10 Application and Implementation</b> .....                   | <b>18</b> |
| <b>5 Device Comparison Table</b> .....           | <b>4</b>  | 10.1 Application Information .....                               | <b>18</b> |
| <b>6 Pin Configuration and Functions</b> .....   | <b>4</b>  | 10.2 Typical Application .....                                   | <b>18</b> |
| <b>7 Specifications</b> .....                    | <b>4</b>  | <b>11 Power Supply Recommendations</b> .....                     | <b>22</b> |
| 7.1 Absolute Maximum Ratings .....               | <b>4</b>  | <b>12 Layout</b> .....                                           | <b>22</b> |
| 7.2 ESD Ratings: JEDEC .....                     | <b>5</b>  | 12.1 Layout Guidelines .....                                     | <b>22</b> |
| 7.3 ESD Ratings: IEC .....                       | <b>5</b>  | 12.2 Layout Example .....                                        | <b>22</b> |
| 7.4 Recommended Operating Conditions .....       | <b>5</b>  | <b>13 Device and Documentation Support</b> .....                 | <b>23</b> |
| 7.5 Thermal Information .....                    | <b>5</b>  | 13.1 Device Support .....                                        | <b>23</b> |
| 7.6 Electrical Characteristics .....             | <b>6</b>  | 13.2 Documentation Support .....                                 | <b>23</b> |
| 7.7 Power Dissipation Characteristics .....      | <b>7</b>  | 13.3 Related Links .....                                         | <b>23</b> |
| 7.8 Switching Characteristics .....              | <b>7</b>  | 13.4 Receiving Notification of Documentation Updates .....       | <b>23</b> |
| 7.9 Typical Characteristics .....                | <b>9</b>  | 13.5 Community Resources .....                                   | <b>24</b> |
| <b>8 Parameter Measurement Information</b> ..... | <b>10</b> | 13.6 Trademarks .....                                            | <b>24</b> |
| 8.1 Equivalent Input Schematic .....             | <b>14</b> | 13.7 Electrostatic Discharge Caution .....                       | <b>24</b> |
| <b>9 Detailed Description</b> .....              | <b>15</b> | 13.8 Glossary .....                                              | <b>24</b> |
| 9.1 Overview .....                               | <b>15</b> | <b>14 Mechanical, Packaging, and Orderable Information</b> ..... | <b>24</b> |

## 4 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

| Changes from Revision G (August 2015) to Revision H                                                                              | Page      |
|----------------------------------------------------------------------------------------------------------------------------------|-----------|
| • Added WEBENCH information to the <i>Features</i> , <i>Detailed Design Procedure</i> , and <i>Device Support</i> sections ..... | <b>1</b>  |
| • Added values to the Storage temperature in the <i>Absolute Maximum Ratings</i> table .....                                     | <b>4</b>  |
| • Added the <i>Equivalent Input Schematic</i> section .....                                                                      | <b>14</b> |

| Changes from Revision F (August 2012) to Revision G                                                                                                                                                                                                                                                                                                                                                  | Page     |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| • Added <i>Pin Configuration and Functions</i> section, <i>ESD Ratings</i> table, <i>Feature Description</i> section, <i>Device Functional Modes</i> , <i>Application and Implementation</i> section, <i>Power Supply Recommendations</i> section, <i>Layout</i> section, <i>Device and Documentation Support</i> section, and <i>Mechanical, Packaging, and Orderable Information</i> section ..... | <b>1</b> |

| Changes from Revision E (September 2008) to Revision F                                                                                                                                                                            | Page      |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|
| • Deleted text from the first Description paragraph - The internal current-limit circuits allow fault survivability without causing the high bus currents that otherwise might damage external components or power supplies. .... | <b>1</b>  |
| • Changed From: Voltage input range, transient pulse, A and B, through 100 $\Omega$ in the <i>Absolute Maximum Ratings</i> table To: Transient overvoltage pulse through 100 $\Omega$ per TIA-485 .....                           | <b>4</b>  |
| • Changed <a href="#">Figure 13</a> title From: Measurement of Receiver Enable Times With Driver Disabled To: Measurement of Receiver Enable Times With Driver Disabled .....                                                     | <b>13</b> |

| Changes from Revision D (August 2008) to Revision E                                                     | Page     |
|---------------------------------------------------------------------------------------------------------|----------|
| • Changed Bus input current (disabled driver), separating the condition for the different devices ..... | <b>6</b> |

---

**Changes from Revision C (July 2008) to Revision D** **Page**


---

- Changed Receiver propagation delay max value From: 70 ns To: 80 ns. .... [8](#)
- 

---

**Changes from Revision B (April 2008) to Revision C** **Page**


---

- Added two new part numbers 1780 and 1782 ..... [1](#)
  - Deleted Features Bullet: Designed for RS-485 and RS-422 Networks ..... [1](#)
  - Changed making it a drop-in upgrade for most devices -to- making them drop-in upgrades in most systems. .... [1](#)
- 

---

**Changes from Revision A (January 2008) to Revision B** **Page**


---

- Changed the I<sub>OS</sub> Min value From: -150 To: -200 and Max value From: 150 To: 200 ..... [6](#)
- 

---

**Changes from Original (December 2007) to Revision A** **Page**


---


- Changed Receiver propagation delay max value From: 50 ns To: 70 ns. .... [8](#)
  - Changed t<sub>PLZ</sub>, t<sub>PHZ</sub> Receiver disable time From 3000 ns To 100 ns..... [8](#)
-

## 5 Device Comparison Table

| TRANSCEIVER | SIGNALING RATE | NUMBER OF NODES |
|-------------|----------------|-----------------|
| SN65HVD1780 | Up to 115 kbps | Up to 320       |
| SN65HVD1781 | Up to 1 Mbps   | Up to 320       |
| SN65HVD1782 | Up to 10 Mbps  | Up to 64        |

## 6 Pin Configuration and Functions

**D Package and P Package  
8-Pin SOIC and 8-Pin PDIP  
Top View**



**Pin Functions**

| PIN             |        | I/O                 | DESCRIPTION                                          |
|-----------------|--------|---------------------|------------------------------------------------------|
| NAME            | NUMBER |                     |                                                      |
| A               | 6      | Bus input/output    | Driver output or receiver input (complimentary to B) |
| B               | 7      | Bus input/output    | Driver output or receiver input (complimentary to A) |
| D               | 4      | Digital input       | Driver data input                                    |
| DE              | 3      | Digital input       | Driver enable high                                   |
| GND             | 5      | Reference potential | Local device ground                                  |
| R               | 1      | Digital output      | Receive data output                                  |
| $\overline{RE}$ | 2      | Digital input       | Receiver enable low                                  |
| $V_{CC}$        | 8      | Supply              | 4.5-V to 5.5-V supply                                |

## 7 Specifications

### 7.1 Absolute Maximum Ratings<sup>(1)</sup>

|                                                              |                          |           | MIN  | MAX            | UNIT |
|--------------------------------------------------------------|--------------------------|-----------|------|----------------|------|
| Supply voltage, $V_{CC}$                                     |                          |           | -0.5 | 7              | V    |
| Voltage at bus pin                                           | SN65HVD1780, SN65HVD1781 | A, B pins | -70  | 70             | V    |
|                                                              | SN65HVD1782              | A, B pins | -70  | 30             |      |
| Input voltage at any logic pin                               |                          |           | -0.3 | $V_{CC} + 0.3$ | V    |
| Transient overvoltage pulse through 100 $\Omega$ per TIA-485 |                          |           | -70  | 70             | V    |
| Receiver output current                                      |                          |           | -24  | 24             | mA   |
| Junction temperature, $T_J$                                  |                          |           |      | 170            | °C   |
| Storage temperature, $T_{stg}$                               |                          |           | -55  | 150            | °C   |

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

## 7.2 ESD Ratings: JEDEC

|                    |                         |                                                                                          | VALUE            | UNIT   |   |
|--------------------|-------------------------|------------------------------------------------------------------------------------------|------------------|--------|---|
| V <sub>(ESD)</sub> | Electrostatic discharge | Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins <sup>(1)</sup>              | Bus pins and GND | ±16000 | V |
|                    |                         |                                                                                          | All pins         | ±4000  |   |
|                    |                         | Charged device model (CDM), per JEDEC specification JESD22-C101, all pins <sup>(2)</sup> |                  | ±2000  |   |
|                    |                         | Machine model JEDEC Standard 22, Test Method A115, all pins                              |                  | ±400   | V |

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

## 7.3 ESD Ratings: IEC

|             |                         |                                                            | VALUE  | UNIT |
|-------------|-------------------------|------------------------------------------------------------|--------|------|
| $V_{(ESD)}$ | Electrostatic discharge | IEC 60749-26 ESD (human body model), bus terminals and GND | ±16000 | V    |

## 7.4 Recommended Operating Conditions

|            |                                                                                         |             | MIN          | NOM | MAX      | UNIT     |
|------------|-----------------------------------------------------------------------------------------|-------------|--------------|-----|----------|----------|
| $V_{CC}$   | Supply voltage                                                                          |             | 3.15         | 5   | 5.5      | V        |
| $V_I$      | Input voltage at any bus terminal (separately or common mode) <sup>(1)</sup>            |             | –7           |     | 12       | V        |
| $V_{IH}$   | High-level input voltage (driver, driver enable, and receiver enable inputs)            |             | 2            |     | $V_{CC}$ | V        |
| $V_{IL}$   | Low-level input voltage (driver, driver enable, and receiver enable inputs)             |             | 0            |     | 0.8      | V        |
| $V_{ID}$   | Differential input voltage                                                              |             | –12          |     | 12       | V        |
| $I_O$      | Output current, driver                                                                  |             | –60          |     | 60       | mA       |
|            | Output current, receiver                                                                |             | –8           |     | 8        | mA       |
| $R_L$      | Differential load resistance                                                            |             | 54           | 60  |          | $\Omega$ |
| $C_L$      | Differential load capacitance                                                           |             |              | 50  |          | pF       |
| $1/t_{UI}$ | Signaling rate                                                                          | SN65HVD1780 |              |     | 115      | kbps     |
|            |                                                                                         | SN65HVD1781 |              |     | 1        | Mbps     |
|            |                                                                                         | SN65HVD1782 |              |     | 10       |          |
| $T_A$      | Operating free-air temperature (See <a href="#">Power Dissipation Characteristics</a> ) |             | 5-V supply   | –40 | 105      | °C       |
|            |                                                                                         |             | 3.3-V supply | –40 | 125      |          |
| $T_J$      | Junction temperature                                                                    |             |              | –40 | 150      | °C       |

(1) By convention, the least positive (most negative) limit is designated as minimum in this data sheet.

## 7.5 Thermal Information

| THERMAL METRIC <sup>(1)</sup> |                                              |                    | SN65HVD178x |          | UNIT |
|-------------------------------|----------------------------------------------|--------------------|-------------|----------|------|
|                               |                                              |                    | D (SOIC)    | P (PDIP) |      |
|                               |                                              |                    | 8 PINS      | 8 PINS   |      |
| $R_{\theta JA}$               | Junction-to-ambient thermal resistance       | JEDEC high-K model | 138         | 59       | °C/W |
|                               |                                              | JEDEC low-K model  | 242         | 128      |      |
| $R_{\theta JC(top)}$          | Junction-to-case (top) thermal resistance    |                    | 61          | 61       | °C/W |
| $R_{\theta JB}$               | Junction-to-board thermal resistance         |                    | 62          | 39       | °C/W |
| $\Psi_{JT}$                   | Junction-to-top characterization parameter   |                    | 3.4         | 17.6     | °C/W |
| $\Psi_{JB}$                   | Junction-to-board characterization parameter |                    | 33.4        | 28.3     | °C/W |
| $R_{\theta JC(bot)}$          | Junction-to-case (bottom) thermal resistance |                    | N/A         | N/A      | °C/W |

(1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

## 7.6 Electrical Characteristics

over operating free-air temperature range (unless otherwise noted)

| PARAMETER                |                                                                                                 | TEST CONDITIONS                                                                                    |                       |                                                                            | MIN  | TYP                   | MAX | UNIT |
|--------------------------|-------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|-----------------------|----------------------------------------------------------------------------|------|-----------------------|-----|------|
| V <sub>OD</sub>          | Driver differential output voltage magnitude                                                    | R <sub>L</sub> = 60 Ω, 4.75 V ≤ V <sub>CC</sub> ≤ 375 Ω on each output to –7 V to 12 V<br>Figure 6 |                       | T <sub>A</sub> < 85°C                                                      | 1.5  |                       | V   |      |
|                          |                                                                                                 |                                                                                                    |                       | T <sub>A</sub> < 125°C                                                     | 1.4  |                       |     |      |
|                          |                                                                                                 | R <sub>L</sub> = 54 Ω, 4.75 V ≤ V <sub>CC</sub> ≤ 5.25 V                                           |                       | T <sub>A</sub> < 85°C                                                      | 1.7  | 2                     |     |      |
|                          |                                                                                                 |                                                                                                    |                       | T <sub>A</sub> < 125°C                                                     | 1.5  |                       |     |      |
|                          |                                                                                                 | R <sub>L</sub> = 54 Ω, 3.15 V ≤ V <sub>CC</sub> ≤ 3.45 V                                           |                       |                                                                            | 0.8  | 1                     |     |      |
|                          |                                                                                                 |                                                                                                    |                       | R <sub>L</sub> = 100 Ω, 4.75 V ≤ V <sub>CC</sub> ≤ 5.25 V                  |      | T <sub>A</sub> < 85°C |     | 2.2  |
| T <sub>A</sub> < 125°C   | 2                                                                                               |                                                                                                    |                       |                                                                            |      |                       |     |      |
| Δ V <sub>OD</sub>        | Change in magnitude of driver differential output voltage                                       | R <sub>L</sub> = 54 Ω                                                                              |                       |                                                                            | –50  | 0                     | 50  | mV   |
| V <sub>OC(SS)</sub>      | Steady-state common-mode output voltage                                                         |                                                                                                    |                       |                                                                            | 1    | V <sub>CC</sub> /2    | 3   | V    |
| ΔV <sub>OC</sub>         | Change in differential driver output common-mode voltage                                        |                                                                                                    |                       |                                                                            | –50  | 0                     | 50  | mV   |
| V <sub>OC(PP)</sub>      | Peak-to-peak driver common-mode output voltage                                                  | Center of two 27-Ω load resistors<br>See Figure 7                                                  |                       |                                                                            |      | 500                   |     | mV   |
| C <sub>OD</sub>          | Differential output capacitance                                                                 |                                                                                                    |                       |                                                                            |      | 23                    |     | pF   |
| V <sub>IT+</sub>         | Positive-going receiver differential input voltage threshold                                    |                                                                                                    |                       |                                                                            |      | –100                  | –35 | mV   |
| V <sub>IT–</sub>         | Negative-going receiver differential input voltage threshold                                    |                                                                                                    |                       |                                                                            | –180 | –150                  |     | mV   |
| V <sub>HYS</sub>         | Receiver differential input voltage threshold hysteresis (V <sub>IT+</sub> – V <sub>IT–</sub> ) |                                                                                                    |                       |                                                                            | 30   | 50                    |     | mV   |
| V <sub>OH</sub>          | Receiver high-level output voltage                                                              | I <sub>OH</sub> = –8 mA                                                                            |                       |                                                                            | 2.4  | V <sub>CC</sub> – 0.3 |     | V    |
| V <sub>OL</sub>          | Receiver low-level output voltage                                                               | I <sub>OL</sub> = 8 mA                                                                             |                       | T <sub>A</sub> < 85°C                                                      |      | 0.2                   | 0.4 | V    |
|                          |                                                                                                 |                                                                                                    |                       | T <sub>A</sub> < 125°C                                                     |      |                       | 0.5 |      |
| I <sub>I(LOGIC)</sub>    | Driver input, driver enable, and receiver enable input current                                  |                                                                                                    |                       |                                                                            | –50  |                       | 50  | μA   |
| I <sub>OZ</sub>          | Receiver output high-impedance current                                                          | V <sub>O</sub> = 0 V or V <sub>CC</sub> , RE at V <sub>CC</sub>                                    |                       |                                                                            | –1   |                       | 1   | μA   |
| I <sub>OS</sub>          | Driver short-circuit output current                                                             |                                                                                                    |                       |                                                                            | –200 |                       | 200 | mA   |
| I <sub>I(BUS)</sub>      | Bus input current (disabled driver)                                                             | V <sub>CC</sub> = 3.15 to 5.5 V or V <sub>CC</sub> = 0 V, DE at 0 V                                | V <sub>I</sub> = 12 V | 1780, 1781                                                                 | 75   |                       | 100 | μA   |
|                          |                                                                                                 |                                                                                                    |                       | 1782                                                                       | 400  |                       | 500 |      |
|                          |                                                                                                 |                                                                                                    | V <sub>I</sub> = –7 V | 1780, 1781                                                                 | –60  | –40                   |     |      |
|                          |                                                                                                 |                                                                                                    |                       | 1782                                                                       | –400 | –300                  |     |      |
| I <sub>CC</sub>          | Supply current (quiescent)                                                                      | Driver and receiver enabled                                                                        |                       | DE = V <sub>CC</sub> , RE = GND, no load                                   |      | 4                     | 6   | mA   |
|                          |                                                                                                 | Driver enabled, receiver disabled                                                                  |                       | DE = V <sub>CC</sub> , RE = V <sub>CC</sub> , no load                      |      | 3                     | 5   |      |
|                          |                                                                                                 | Driver disabled, receiver enabled                                                                  |                       | DE = GND, RE = GND, no load                                                |      | 2                     | 4   |      |
|                          |                                                                                                 | Drive and receiver disabled (standby mode)                                                         |                       | DE = GND, D = open, RE = V <sub>CC</sub> , no load, T <sub>A</sub> < 85°C  |      | 0.15                  | 1   | μA   |
|                          |                                                                                                 |                                                                                                    |                       | DE = GND, D = open, RE = V <sub>CC</sub> , no load, T <sub>A</sub> < 125°C |      |                       | 12  |      |
| Supply current (dynamic) |                                                                                                 | See Typical Characteristics                                                                        |                       |                                                                            |      |                       |     |      |

## 7.7 Power Dissipation Characteristics

over operating free-air temperature range (unless otherwise noted)

| PARAMETER                                             | TEST CONDITIONS                                                                                                                                                                              | MAX | UNIT |
|-------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|------|
| P <sub>D</sub> Power dissipation                      | V <sub>CC</sub> = 5.5 V, T <sub>J</sub> = 150°C, R <sub>L</sub> = 300 Ω,<br>C <sub>L</sub> = 50 pF (driver),<br>C <sub>L</sub> = 15 pF (receiver)<br>5-V supply, unterminated <sup>(1)</sup> | 290 | mW   |
|                                                       | V <sub>CC</sub> = 5.5 V, T <sub>J</sub> = 150°C, R <sub>L</sub> = 100 Ω,<br>C <sub>L</sub> = 50 pF (driver),<br>C <sub>L</sub> = 15 pF (receiver)<br>5-V supply, RS-422 load <sup>(1)</sup>  | 320 |      |
|                                                       | V <sub>CC</sub> = 5.5 V, T <sub>J</sub> = 150°C, R <sub>L</sub> = 54 Ω,<br>C <sub>L</sub> = 50 pF (driver),<br>C <sub>L</sub> = 15 pF (receiver)<br>5-V supply, RS-485 load <sup>(1)</sup>   | 400 |      |
| T <sub>SD</sub> Thermal-shutdown junction temperature |                                                                                                                                                                                              | 170 | °C   |

(1) Driver and receiver enabled, 50% duty cycle square-wave signal at signaling rate: 1 Mbps.

## 7.8 Switching Characteristics

over recommended operating conditions (unless otherwise noted)

| PARAMETER                           |                                                                                | TEST CONDITIONS                                                                   |                                                               | MIN | TYP | MAX | UNIT |
|-------------------------------------|--------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|---------------------------------------------------------------|-----|-----|-----|------|
| DRIVER (SN65HVD1780)                |                                                                                |                                                                                   |                                                               |     |     |     |      |
| t <sub>r</sub> , t <sub>f</sub>     | Driver differential output rise or fall time                                   | R <sub>L</sub> = 54 Ω,<br>C <sub>L</sub> = 50 pF,<br>See <a href="#">Figure 8</a> | 3.15 V < V <sub>CC</sub> < 3.45 V                             | 0.4 | 1.4 | 1.8 | μs   |
|                                     |                                                                                |                                                                                   | 3.15 V < V <sub>CC</sub> < 5.5 V                              | 0.4 | 1.7 | 2.6 |      |
| t <sub>PHL</sub> , t <sub>PLH</sub> | Driver propagation delay                                                       | R <sub>L</sub> = 54 Ω,<br>C <sub>L</sub> = 50 pF,<br>See <a href="#">Figure 8</a> |                                                               |     | 0.8 | 2   | μs   |
| t <sub>SK(P)</sub>                  | Driver differential output pulse skew,<br> t <sub>PHL</sub> – t <sub>PLH</sub> | R <sub>L</sub> = 54 Ω,<br>C <sub>L</sub> = 50 pF,<br>See <a href="#">Figure 8</a> |                                                               |     | 20  | 250 | ns   |
| t <sub>PHZ</sub> , t <sub>PLZ</sub> | Driver disable time                                                            | See <a href="#">Figure 9</a> and <a href="#">Figure 10</a>                        |                                                               |     | 0.1 | 5   | μs   |
| t <sub>PZH</sub> , t <sub>PZL</sub> | Driver enable time                                                             | Receiver enabled                                                                  | See <a href="#">Figure 9</a> and<br><a href="#">Figure 10</a> |     | 0.2 | 3   | μs   |
|                                     |                                                                                | Receiver disabled                                                                 | See <a href="#">Figure 9</a> and<br><a href="#">Figure 10</a> |     | 3   | 12  |      |
| DRIVER (SN65HVD1781)                |                                                                                |                                                                                   |                                                               |     |     |     |      |
| t <sub>r</sub> , t <sub>f</sub>     | Driver differential output rise or fall time                                   | R <sub>L</sub> = 54 Ω, C <sub>L</sub> = 50 pF, See <a href="#">Figure 8</a>       |                                                               | 50  |     | 300 | ns   |
| t <sub>PHL</sub> , t <sub>PLH</sub> | Driver propagation delay                                                       | R <sub>L</sub> = 54 Ω, C <sub>L</sub> = 50 pF, See <a href="#">Figure 8</a>       |                                                               |     |     | 200 | ns   |
| t <sub>SK(P)</sub>                  | Driver differential output pulse skew,<br> t <sub>PHL</sub> – t <sub>PLH</sub> | R <sub>L</sub> = 54 Ω, C <sub>L</sub> = 50 pF, See <a href="#">Figure 8</a>       |                                                               |     |     | 25  | ns   |
| t <sub>PHZ</sub> , t <sub>PLZ</sub> | Driver disable time                                                            | See <a href="#">Figure 9</a> and <a href="#">Figure 10</a>                        |                                                               |     |     | 3   | μs   |
| t <sub>PZH</sub> , t <sub>PZL</sub> | Driver enable time                                                             | Receiver enabled                                                                  | See <a href="#">Figure 9</a> and<br><a href="#">Figure 10</a> |     |     | 300 | ns   |
|                                     |                                                                                | Receiver disabled                                                                 | See <a href="#">Figure 9</a> and<br><a href="#">Figure 10</a> |     |     | 10  | μs   |
| DRIVER (SN65HVD1782)                |                                                                                |                                                                                   |                                                               |     |     |     |      |
| t <sub>r</sub> , t <sub>f</sub>     | Driver differential output rise or fall time                                   | R <sub>L</sub> = 54 Ω,<br>C <sub>L</sub> = 50 pF                                  | All V <sub>CC</sub> and<br>Temperature                        |     |     | 50  | ns   |
|                                     |                                                                                |                                                                                   | V <sub>CC</sub> > 4.5 V and<br>T < 105°C                      | 16  |     |     |      |
| t <sub>PHL</sub> , t <sub>PLH</sub> | Driver propagation delay                                                       | R <sub>L</sub> = 54 Ω,<br>C <sub>L</sub> = 50 pF                                  | See <a href="#">Figure 8</a>                                  |     |     | 55  | ns   |
| t <sub>SK(P)</sub>                  | Driver differential output pulse skew,<br> t <sub>PHL</sub> – t <sub>PLH</sub> | R <sub>L</sub> = 54 Ω,<br>C <sub>L</sub> = 50 pF                                  | See <a href="#">Figure 8</a>                                  |     |     | 10  | ns   |
| t <sub>PHZ</sub> , t <sub>PLZ</sub> | Driver disable time                                                            | See <a href="#">Figure 9</a> and <a href="#">Figure 10</a>                        |                                                               |     |     | 3   | μs   |

## Switching Characteristics (continued)

over recommended operating conditions (unless otherwise noted)

| PARAMETER                                                  |                                                      | TEST CONDITIONS                                 |                                                            | MIN | TYP | MAX | UNIT    |
|------------------------------------------------------------|------------------------------------------------------|-------------------------------------------------|------------------------------------------------------------|-----|-----|-----|---------|
| $t_{PZH}$ , $t_{PZL}$                                      | Driver enable time                                   | Receiver enabled                                | See <a href="#">Figure 9</a> and <a href="#">Figure 10</a> |     |     | 300 | ns      |
|                                                            |                                                      | Receiver disabled                               | See <a href="#">Figure 9</a> and <a href="#">Figure 10</a> |     |     | 9   | $\mu$ s |
| RECEIVER                                                   |                                                      |                                                 |                                                            |     |     |     |         |
| $t_r$ , $t_f$                                              | Receiver output rise or fall time                    | $C_L = 15$ pF,<br>See <a href="#">Figure 11</a> | All devices                                                |     | 4   | 15  | ns      |
| $t_{PHL}$ , $t_{PLH}$                                      | Receiver propagation delay time                      | $C_L = 15$ pF,<br>See <a href="#">Figure 11</a> | SN65HVD1780,<br>SN65HVD1781                                |     | 100 | 200 | ns      |
|                                                            |                                                      |                                                 | SN65HVD1782                                                |     |     | 80  |         |
| $t_{SK(P)}$                                                | Receiver output pulse skew,<br>$ t_{PHL} - t_{PLH} $ | $C_L = 15$ pF,<br>See <a href="#">Figure 11</a> | SN65HVD1780,<br>SN65HVD1781                                |     | 6   | 20  | ns      |
|                                                            |                                                      |                                                 | SN65HVD1782                                                |     |     | 5   |         |
| $t_{PLZ}$ , $t_{PHZ}$                                      | Receiver disable time                                | Driver enabled, See <a href="#">Figure 12</a>   |                                                            |     | 15  | 100 | ns      |
| $t_{PZL(1)}$ , $t_{PZH(1)}$<br>$t_{PZL(2)}$ , $t_{PZH(2)}$ | Receiver enable time                                 | Driver enabled, See <a href="#">Figure 12</a>   |                                                            |     | 80  | 300 | ns      |
|                                                            |                                                      | Driver disabled, See <a href="#">Figure 13</a>  |                                                            |     | 3   | 9   | $\mu$ s |

## 7.9 Typical Characteristics

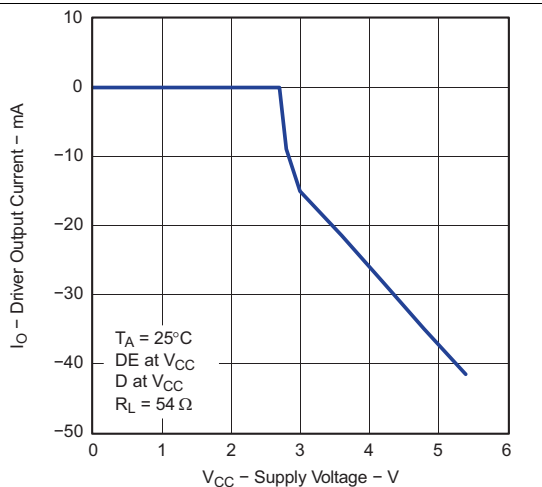


Figure 1. Driver Output Current vs Supply Voltage

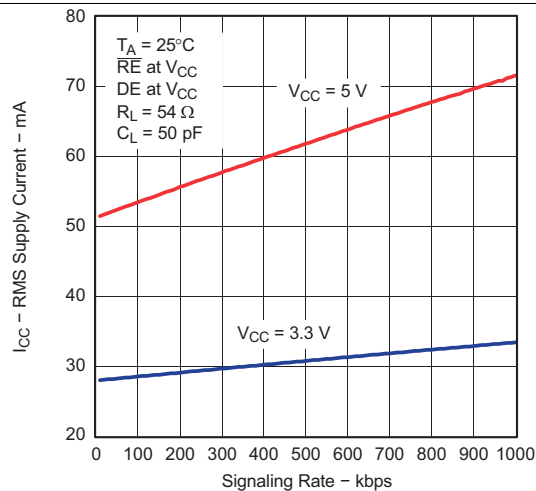


Figure 2. RMS Supply Current vs Signaling Rate

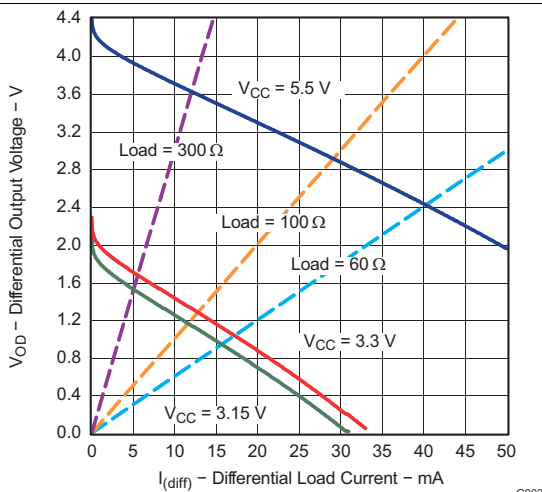


Figure 3. Differential Output Voltage vs Differential Load Current

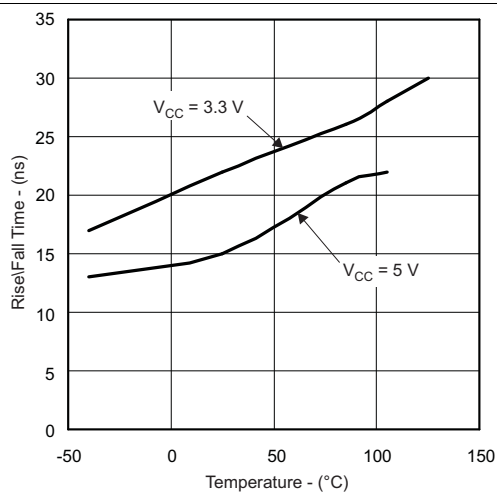


Figure 4. SN65HVD1782 Rise or Fall Time


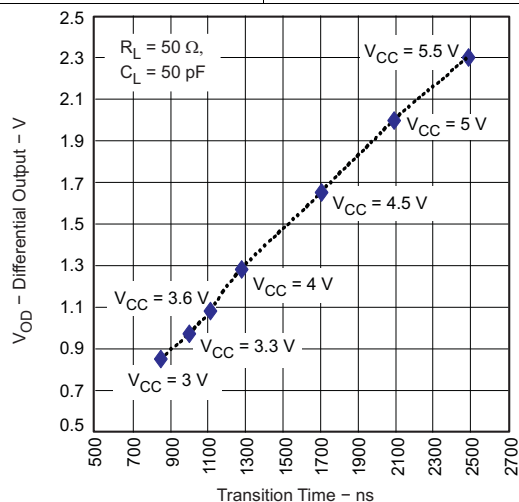



Figure 5. SN65HVD1780 Differential Output Amplitude and Transition Time vs Supply Voltage

## 8 Parameter Measurement Information


Input generator rate is 100 kbps, 50% duty cycle, rise or fall time is less than 6 ns, output impedance is 50  $\Omega$ .

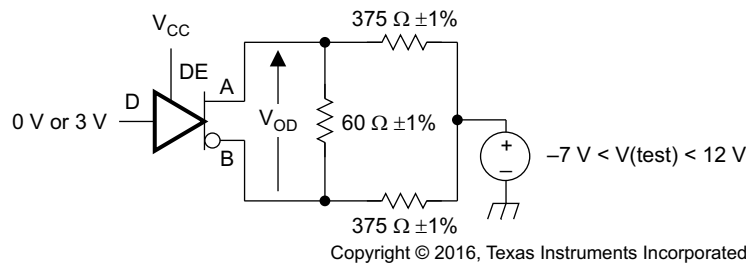


**Figure 6. Measurement of Driver Differential Output Voltage With Common-Mode Load**

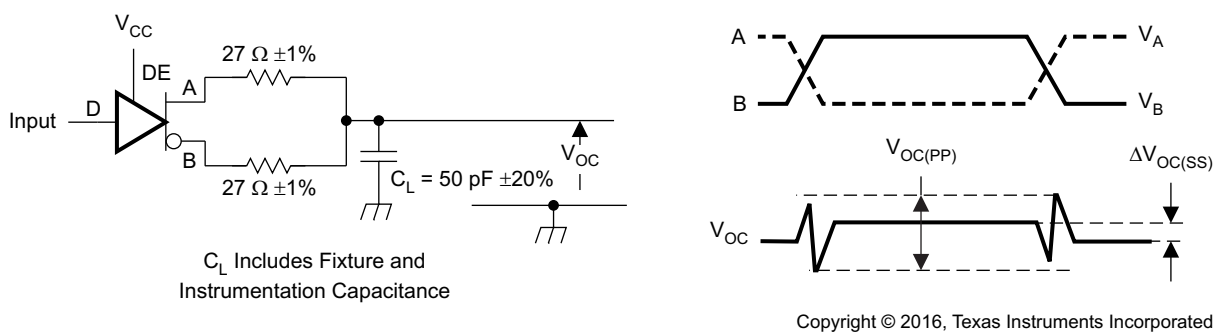

**Figure 7. Measurement of Driver Differential and Common-Mode Output With RS-485 Load**

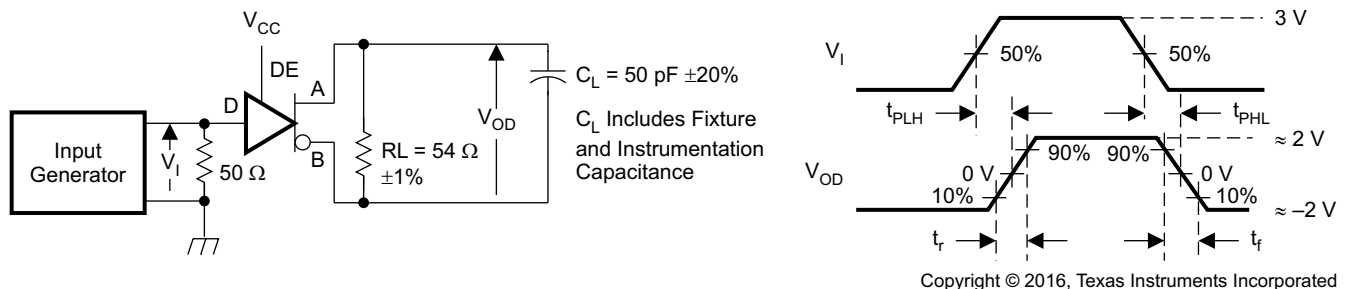


**Figure 8. Measurement of Driver Differential Output Rise and Fall Times and Propagation Delays**

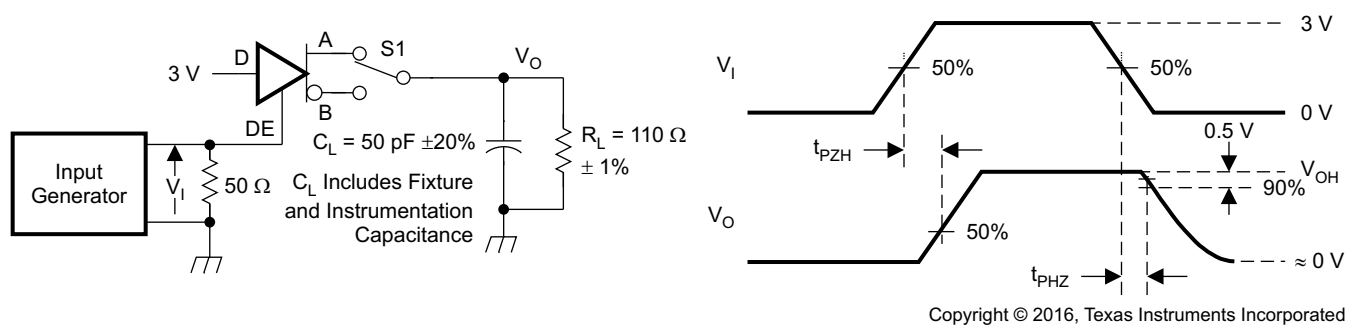

NOTE: D at 3 V to test non-inverting output, D at 0 V to test inverting output.


**Figure 9. Measurement of Driver Enable and Disable Times With Active High Output and Pulldown Load**

## Parameter Measurement Information (continued)

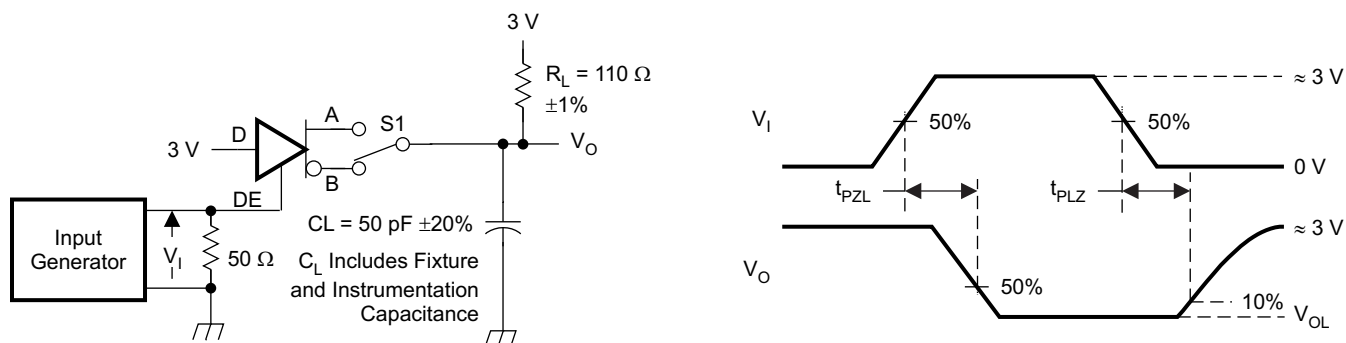


NOTE: D at 0 V to test non-inverting output, D at 3 V to test inverting output.


**Figure 10. Measurement of Driver Enable and Disable Times With Active-Low Output and Pullup Load**

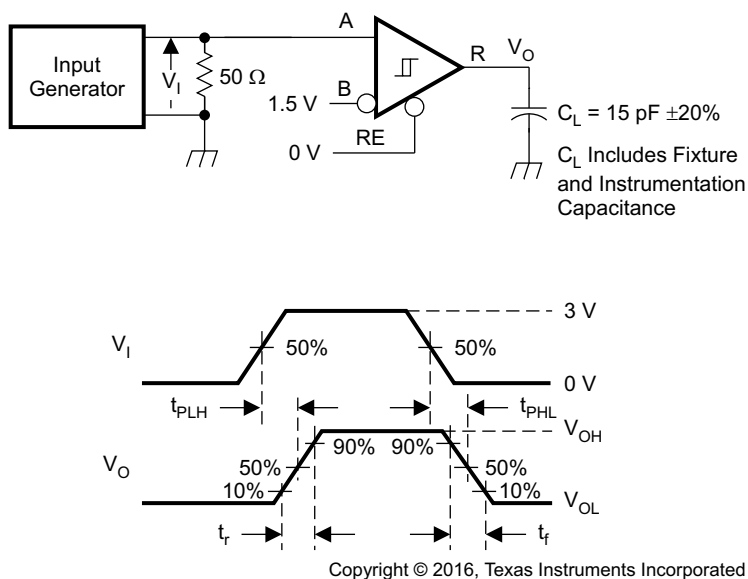

**Figure 11. Measurement of Receiver Output Rise and Fall Times and Propagation Delays**

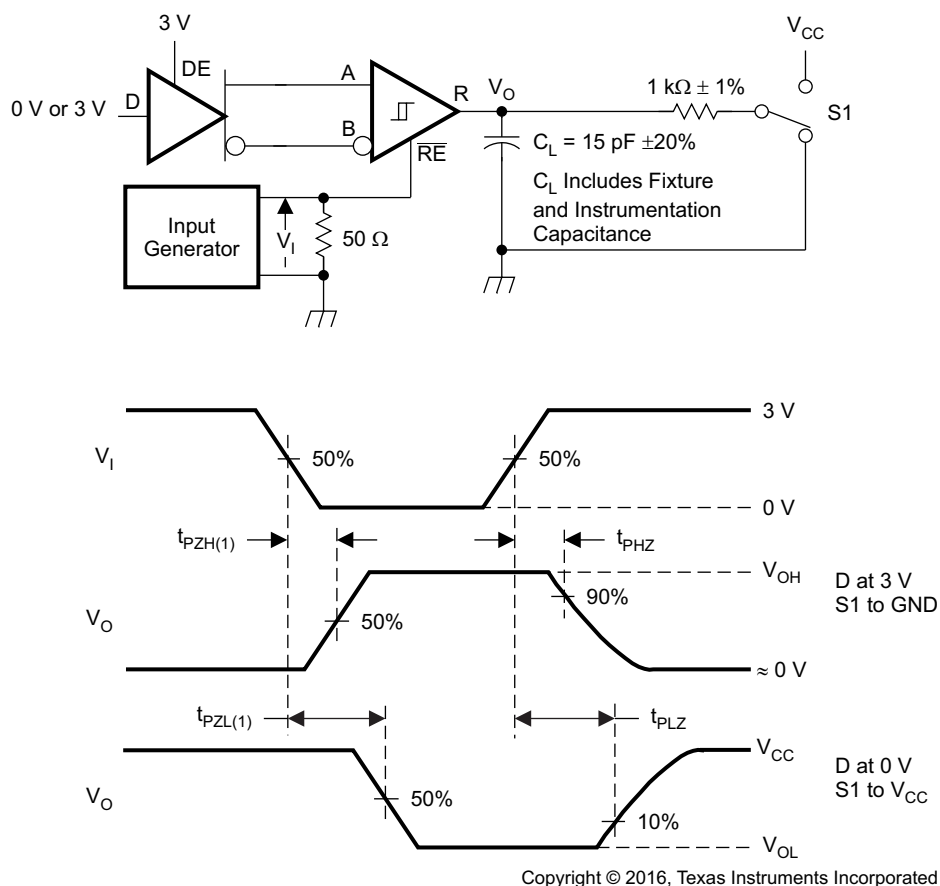**Parameter Measurement Information (continued)**

**Figure 12. Measurement of Receiver Enable and Disable Times With Driver Enabled**

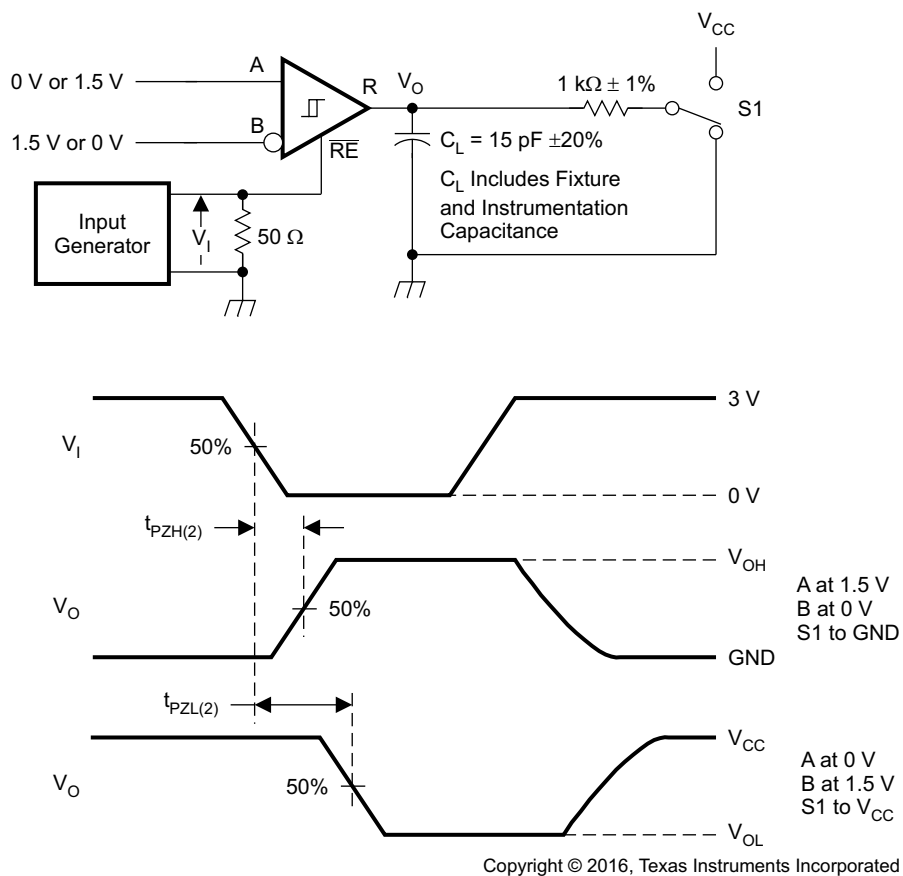**Parameter Measurement Information (continued)**




**Figure 13. SN65HVD1781 Measurement of Receiver Enable Times With Driver Disabled**

## Parameter Measurement Information (continued)

### 8.1 Equivalent Input Schematic

When the input digital pins float, internal high value resistors pull D/REB pins to  $V_{CC}$  and DE pin to GND to place the device into known states. If the voltage level of D/REB input pins is higher than that of power rail, input current can flow through the input resistor and pull up resistor to  $V_{CC}$ .

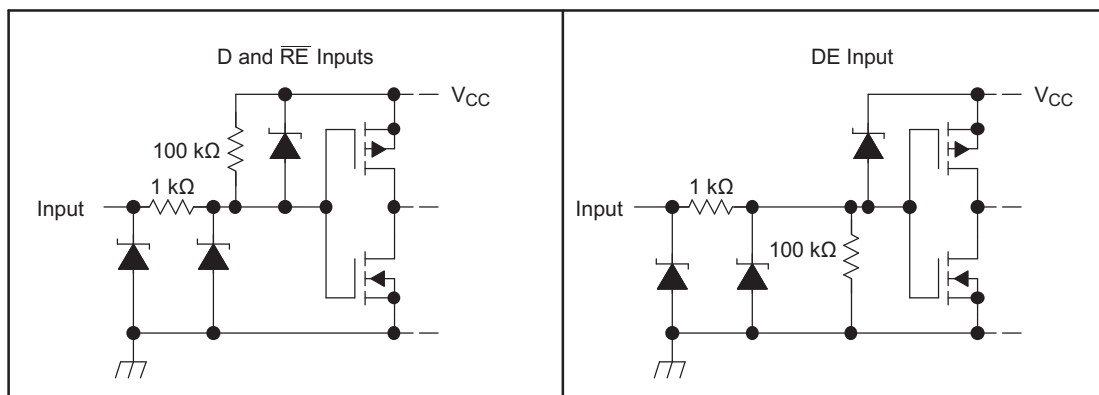

Copyright © 2017, Texas Instruments Incorporated

**Figure 14. Equivalent Input Schematic Diagrams**


## 9 Detailed Description

### 9.1 Overview

The SN65HVD178x devices are half-duplex RS-485 transceivers available in three speed grades suitable for data transmission up to 115 kbps, 1 Mbps, and 10 Mbps.

These devices feature a wide common-mode operating range and bus-pin fault protection up to  $\pm 70$  V. Each device has an active-HIGH driver enable and active-LOW receiver enable. A standby current of less than 1  $\mu$ A can be achieved by disabling both driver and receiver.

### 9.2 Functional Block Diagram



### 9.3 Feature Description

Internal ESD protection circuits protect the transceiver bus terminals against  $\pm 16$  kV human body model (HBM) electrostatic discharges.

Device operation is specified over a wide temperature range from  $-40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$ .

#### 9.3.1 70-V Fault Protection

The SN65HVD178x family of RS-485 transceivers is designed to survive bus pin faults up to  $\pm 70$  V. The SN65HVD1782 will not survive a bus pin fault with a direct short to voltages above 30 V when:

- The device is powered on, AND
- The driver is enabled (DE = HIGH), AND
  - D = HIGH AND the bus fault is applied to the A pin, OR
  - D = LOW AND the bus fault is applied to the B pin

Under other conditions, the device will survive shorts to bus pin faults up to  $\pm 70$  V. [Table 1](#) summarizes the conditions under which the device may be damaged, and the conditions under which the device will not be damaged.

**Table 1. Device Conditions**

| POWER | DE | D | A                                  | B                                  | RESULTS          |
|-------|----|---|------------------------------------|------------------------------------|------------------|
| OFF   | X  | X | $-70\text{ V} < V_A < 70\text{ V}$ | $-70\text{ V} < V_B < 70\text{ V}$ | Device survives  |
| ON    | L  | X | $-70\text{ V} < V_A < 70\text{ V}$ | $-70\text{ V} < V_B < 70\text{ V}$ | Device survives  |
| ON    | H  | L | $-70\text{ V} < V_A < 70\text{ V}$ | $-70\text{ V} < V_B < 30\text{ V}$ | Device survives  |
| ON    | H  | L | $-70\text{ V} < V_A < 70\text{ V}$ | $30\text{ V} < V_B$                | Damage may occur |
| ON    | H  | H | $-70\text{ V} < V_A < 30\text{ V}$ | $-70\text{ V} < V_B < 30\text{ V}$ | Device survives  |
| ON    | H  | H | $30\text{ V} < V_A$                | $-70\text{ V} < V_B < 30\text{ V}$ | Damage may occur |

### 9.3.2 Receiver Failsafe

The SN65HVD178x family of half-duplex transceivers provides internal biasing of the receiver input thresholds in combination with large input-threshold hysteresis. At a positive input threshold of  $V_{IT+} = -35$  mV and an input hysteresis of  $V_{HYS} = 30$  mV, the receiver output remains logic high under bus-idle, bus-short, or open bus conditions in the presence of up to 130 mV<sub>PP</sub> differential noise without the need for external failsafe biasing resistors.

### 9.3.3 Hot-Plugging

These devices are designed to operate in "hot swap" or "hot pluggable" applications. Key features for hot-pluggable applications are power-up and power-down glitch-free operation, default disabled input and output pins, and receiver failsafe.

As shown in [Figure 1](#), an internal power-on reset circuit keeps the driver outputs in a high-impedance state until the supply voltage has reached a level at which the device will reliably operate. This ensures that no problems will occur on the bus pin outputs as the power supply turns on or turns off.

As shown in [Device Functional Modes](#), the enable inputs have the feature of default disable on both the driver enable and receiver enable. This ensures that the device will neither drive the bus nor report data on the R pin until the associated controller actively drives the enable pins.

## 9.4 Device Functional Modes

When the driver enable pin, DE, is logic high, the differential outputs A and B follow the logic states at data input D. A logic high at D causes A to turn high and B to turn low. In this case the differential output voltage defined as  $V_{OD} = V_A - V_B$  is positive. When D is low, the output states reverse, B turns high, A becomes low, and  $V_{OD}$  is negative.

When DE is low, both outputs turn high-impedance. In this condition the logic state at D is irrelevant. The DE pin has an internal pulldown resistor to ground, thus, when left open, the driver is disabled (high-impedance) by default. The D pin has an internal pullup resistor to  $V_{CC}$ , thus, when left open while the driver is enabled, output A turns high and B turns low.

**Table 2. Driver Function Table**

| INPUT | ENABLE | OUTPUTS |   | FUNCTION                                  |
|-------|--------|---------|---|-------------------------------------------|
| D     | DE     | A       | B |                                           |
| H     | H      | H       | L | Actively drive bus high                   |
| L     | H      | L       | H | Actively drive bus low                    |
| X     | L      | Z       | Z | Driver disabled <sup>(1)</sup>            |
| X     | OPEN   | Z       | Z | Driver disabled by default <sup>(1)</sup> |
| OPEN  | H      | H       | L | Actively drive bus high by default        |

(1) When both the driver and receiver are disabled, the device enters a low-power standby mode.

When the receiver enable pin,  $\overline{RE}$ , is logic low, the receiver is enabled. When the differential input voltage defined as  $V_{ID} = V_A - V_B$  is positive and higher than the positive input threshold,  $V_{IT+}$ , the receiver output, R, turns high. When  $V_{ID}$  is negative and lower than the negative input threshold,  $V_{IT-}$ , the receiver output, R, turns low. If  $V_{ID}$  is between  $V_{IT+}$  and  $V_{IT-}$ , the output is indeterminate.

When  $\overline{RE}$  is logic high or left open, the receiver output is high-impedance and the magnitude and polarity of  $V_{ID}$  are irrelevant. Internal biasing of the receiver inputs causes the output to go failsafe-high when the transceiver is disconnected from the bus (open-circuit), the bus lines are shorted (short-circuit), or the bus is not actively driven (idle bus).

**Table 3. Receiver Function Table**

| DIFFERENTIAL INPUT           | ENABLE          | OUTPUT | FUNCTION                                    |
|------------------------------|-----------------|--------|---------------------------------------------|
| $V_{ID} = V_A - V_B$         | $\overline{RE}$ | R      |                                             |
| $V_{IT+} < V_{ID}$           | L               | H      | Receive valid bus high                      |
| $V_{IT-} < V_{ID} < V_{IT+}$ | L               | ?      | Indeterminate bus state                     |
| $V_{ID} < V_{IT-}$           | L               | L      | Receive valid bus low                       |
| X                            | H               | Z      | Receiver disabled <sup>(1)</sup>            |
| X                            | OPEN            | Z      | Receiver disabled by default <sup>(1)</sup> |
| Open-circuit bus             | L               | H      | Fail-safe high output                       |
| Short-circuit bus            | L               | H      | Fail-safe high output                       |
| Idle (terminated) bus        | L               | H      | Fail-safe high output                       |

(1) When both the driver and receiver are disabled, the device enters a low-power standby mode.


## 10 Application and Implementation

### NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

### 10.1 Application Information

The SN65HVD178x devices are half-duplex RS-485 transceivers commonly used for asynchronous data transmissions. The driver and receiver enable pins allow for the configuration of different operating modes.

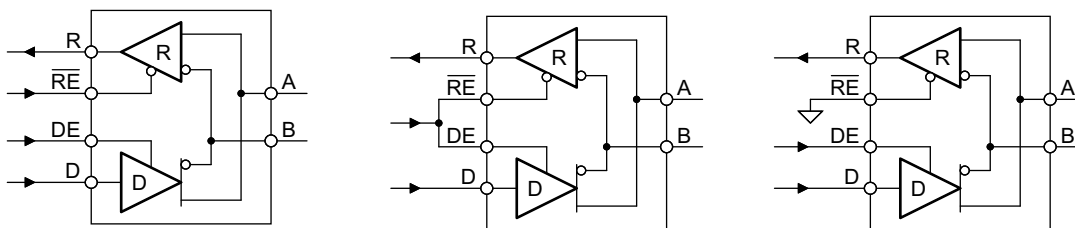

Copyright © 2017, Texas Instruments Incorporated

**Figure 15. Half-Duplex Transceiver Configurations**


Using independent enable lines provides the most flexible control as it allows for the driver and the receiver to be turned on and off individually. While this configuration requires two control lines, it allows for selective listening into the bus traffic, whether the driver is transmitting data or not.

Combining the enable signals simplifies the interface to the controller by forming a single direction-control signal. In this configuration, the transceiver operates as a driver when the direction-control line is high, and as a receiver when the direction-control line is low.

Additionally, only one line is required when connecting the receiver-enable input to ground and controlling only the driver-enable input. In this configuration, a node not only receives the data from the bus, but also the data it sends and can verify that the correct data have been transmitted.

### 10.2 Typical Application

An RS-485 bus consists of multiple transceivers connecting in parallel to a bus cable. To eliminate line reflections, each cable end is terminated with a termination resistor,  $R_T$ , whose value matches the characteristic impedance,  $Z_0$ , of the cable. This method, known as parallel termination, allows for higher data rates over longer cable length.

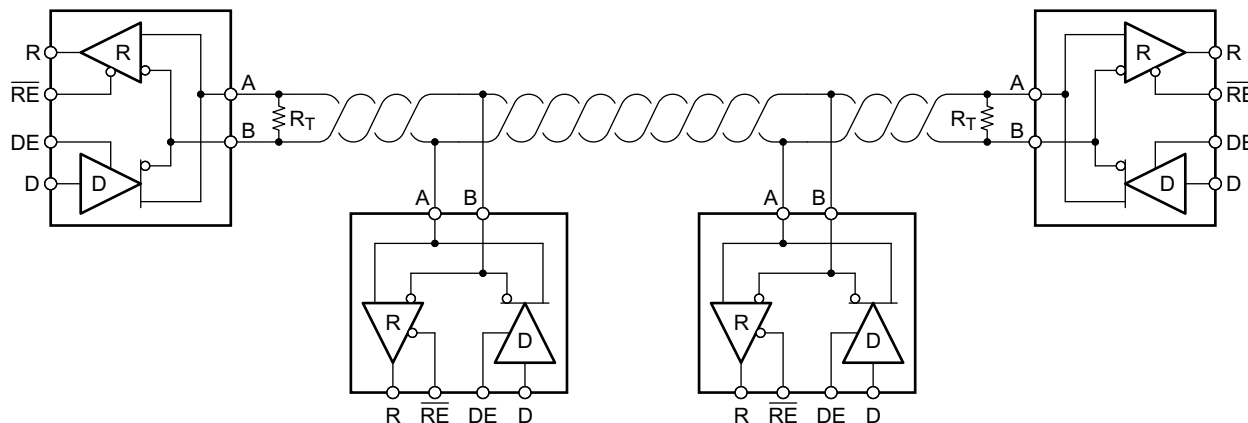

Copyright © 2017, Texas Instruments Incorporated

**Figure 16. Typical RS-485 Network With Half-Duplex Transceivers**


## Typical Application (continued)

### 10.2.1 Design Requirements

RS-485 is a robust electrical standard suitable for long-distance networking that may be used in a wide range of applications with varying requirements, such as distance, data rate, and number of nodes.

#### 10.2.1.1 Data Rate and Bus Length

There is an inverse relationship between data rate and bus length, meaning the higher the data rate, the shorter the cable length; and conversely, the lower the data rate, the longer the cable may be without introducing data errors. While most RS-485 systems use data rates from 10 kbps to 100 kbps, some applications require data rates up to 250 kbps at distances of 4000 feet and longer. Longer distances are possible by allowing for small signal jitter of up to 5% or 10%.

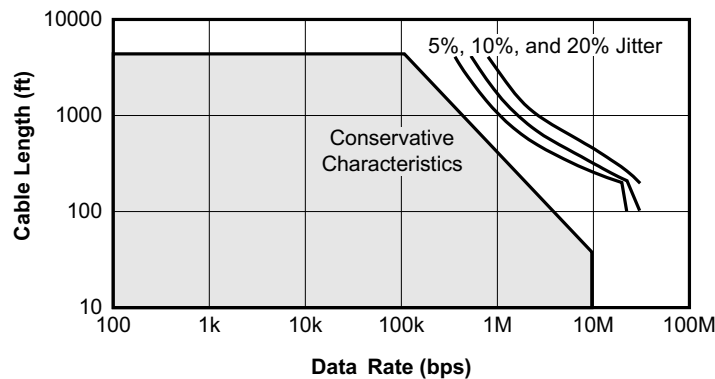

**Figure 17. Cable Length vs Data Rate Characteristic**

Even higher data rates are achievable (for example, 10 Mbps for the SN65HVD1782) in cases where the interconnect is short enough (or has suitably low attenuation at signal frequencies) to not degrade the data.

#### 10.2.1.2 Stub Length

When connecting a node to the bus, the distance between the transceiver inputs and the cable trunk, known as the stub, should be as short as possible. Stubs present a non-terminated piece of bus line which can introduce reflections as the length of the stub increases. As a general guideline, the electrical length, or round-trip delay, of a stub should be less than one-tenth of the rise time of the driver, thus giving a maximum physical stub length as shown in Equation 1.

$$L_{stub} \leq 0.1 \times t_r \times v \times c$$

where

- $t_r$  is the 10/90 rise time of the driver
- $c$  is the speed of light ( $3 \times 10^8$  m/s)
- $v$  is the signal velocity of the cable or trace as a factor of  $c$

(1)

#### 10.2.1.3 Bus Loading

The RS-485 standard specifies that a compliant driver must be able to driver 32 unit loads (UL), where 1 unit load represents a load impedance of approximately 12 kΩ. The SN65HVD1780 and SN65HVD1781 are 1/10 unit load transceivers, and so up to 320 can be placed on a common bus. The SN65HVD1782 is a 1/2 unit load transceiver, so up to 64 can share a bus.

## Typical Application (continued)

### 10.2.1.4 Receiver Failsafe


The differential receivers of the SN65HVD178x family are “failsafe” to invalid bus states caused by:

- Open bus conditions, such as a disconnected connector
- Shorted bus conditions, such as cable damage shorting the twisted-pair together
- Idle bus conditions that occur when no driver on the bus is actively driving

In any of these cases, the differential receiver will output a failsafe logic High state so that the output of the receiver is not indeterminate.

Receiver failsafe is accomplished by offsetting the receiver thresholds such that the “input indeterminate” range does not include zero volts differential. To comply with the RS-422 and RS-485 standards, the receiver output must output a High when the differential input  $V_{ID}$  is more positive than +200 mV, and must output a Low when  $V_{ID}$  is more negative than –200 mV. The receiver parameters which determine the failsafe performance are  $V_{IT(+)}$ ,  $V_{IT(-)}$ , and  $V_{HYS}$  (the separation between  $V_{IT(+)}$  and  $V_{IT(-)}$ ). As shown in the [Electrical Characteristics](#), differential signals more negative than –200 mV will always cause a Low receiver output, and differential signals more positive than +200 mV will always cause a High receiver output.

When the differential input signal is close to zero, it is still above the maximum  $V_{IT(+)}$  threshold of –35 mV, and the receiver output will be High. Only when the differential input is more than  $V_{HYS}$  below  $V_{IT(+)}$  will the receiver output transition to a Low state. Therefore, the noise immunity of the receiver inputs during a bus fault condition includes the receiver hysteresis value,  $V_{HYS}$ , as well as the value of  $V_{IT(+)}$ .

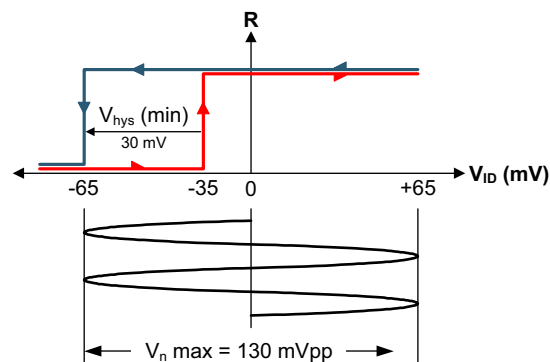

**Figure 18. SN65HVD178x Noise Immunity Under Bus Fault Conditions**

## 10.2.2 Detailed Design Procedure


### 10.2.2.1 Custom Design with WEBENCH® Tools

[Click here](#) to create a custom design using the SN65HVD178x device with the WEBENCH® Power Designer.

1. Start by entering your  $V_{IN}$ ,  $V_{OUT}$ , and  $I_{OUT}$  requirements.
2. Optimize your design for key parameters like efficiency, footprint and cost using the optimizer dial and compare this design with other possible solutions from Texas Instruments.
3. The WEBENCH Power Designer provides you with a customized schematic along with a list of materials with real time pricing and component availability.
4. In most cases, you will also be able to:
  - Run electrical simulations to see important waveforms and circuit performance
  - Run thermal simulations to understand the thermal performance of your board
  - Export your customized schematic and layout into popular CAD formats
  - Print PDF reports for the design, and share your design with colleagues
5. Get more information about WEBENCH tools at [www.ti.com/WBENCH](http://www.ti.com/WBENCH).

Although the SN65HVD178x family is internally protected against human-body-model ESD strikes up to 16 kV, additional protection against higher-energy transients can be provided at the application level by implementing external protection devices.

## Typical Application (continued)

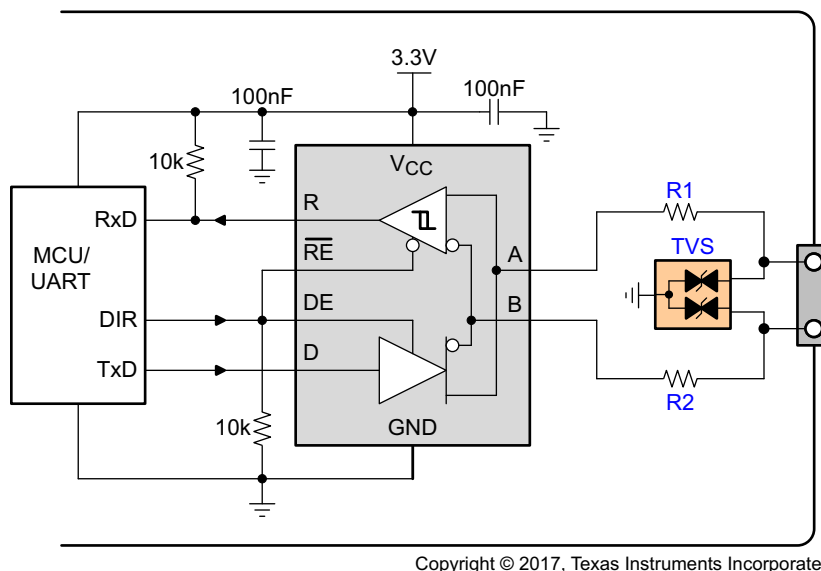


**Figure 19. RS-485 Transceiver With External Transient Protection**

Figure 19 shows a protection circuit intended to withstand 8-kV IEC ESD (per IEC 61000-4-2) as well as 4-kV EFT (per IEC 61000-4-4).

**Table 4. Bill of Materials**

| DEVICE | FUNCTION                                 | ORDER NUMBER       | MANUFACTURER |
|--------|------------------------------------------|--------------------|--------------|
| XCVR   | RS-485 Transceiver                       | SN65HVD1781        | TI           |
| R1,R2  | 10 Ω, Pulse-Proof Thick-Film Resistor    | CRCW0603010RJNEAHP | Vishay       |
| TVS    | Bidirectional 600-W Transient Suppressor | SMBJ43CA           | Littelfuse   |

### 10.2.3 Application Curve

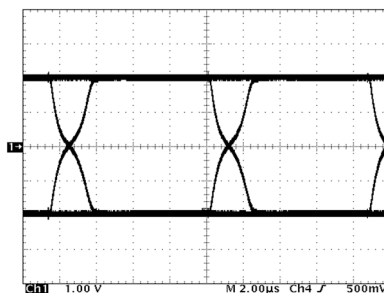

**Figure 20. SN65HVD1780 Differential Output at 115 kbps**

## 11 Power Supply Recommendations

To assure reliable operation at all data rates and supply voltages, each supply should be buffered with a 100-nF ceramic capacitor located as close to the supply pins as possible. The TPS76350 is a linear voltage regulator suitable for the 5-V supply.

## 12 Layout


### 12.1 Layout Guidelines

On-chip IEC-ESD protection is good for laboratory and portable equipment but often insufficient for EFT and surge transients occurring in industrial environments. Therefore robust and reliable bus node design requires the use of external transient protection devices.

Because ESD and EFT transients have a wide-frequency bandwidth from approximately 3 MHz to 3 GHz, high-frequency layout techniques must be applied during PCB design.

1. Place the protection circuitry close to the bus connector to prevent noise transients from entering the board.
2. Use VCC and ground planes to provide low-inductance. Note that high-frequency currents follow the path of least inductance and not the path of least impedance.
3. Design the protection components into the direction of the signal path. Do not force the transient currents to divert from the signal path to reach the protection device.
4. Apply 100-nF to 220-nF bypass capacitors as close as possible to the VCC pins of the transceiver, UART, or controller ICs on the board.
5. Use at least two vias for VCC and ground connections of bypass capacitors and protection devices to minimize effective via-inductance.
6. Use 1-k $\Omega$  to 10-k $\Omega$  pullup and pulldown resistors for enable lines to limit noise currents in these lines during transient events.
7. While pure TVS protection is sufficient for surge transients up to 1 kV, higher transients require metal-oxide varistors (MOVs) which reduce the transients to a few hundred volts of clamping voltage, and transient blocking units (TBUs) that limit transient current to less than 1 mA.

### 12.2 Layout Example

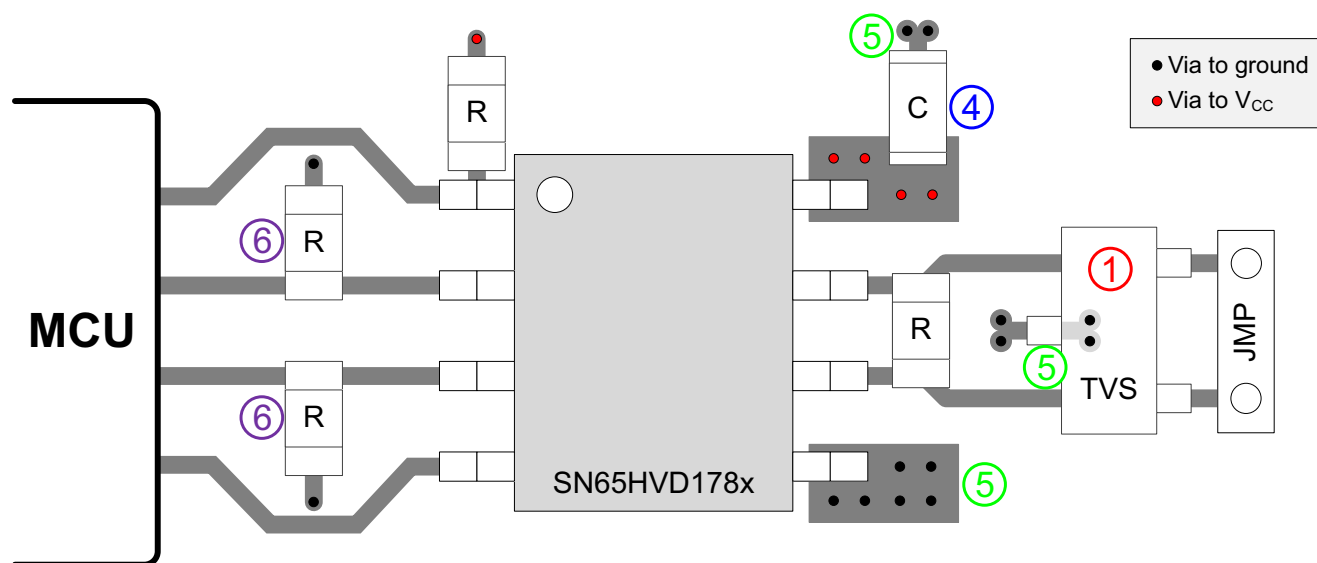

**Figure 21. SN65HVD178x Half-Duplex Layout Example**

## 13 Device and Documentation Support

### 13.1 Device Support

#### 13.1.1 Custom Design with WEBENCH® Tools

Click [here](#) to create a custom design using the SN65HVD178x device with the WEBENCH® Power Designer.

1. Start by entering your  $V_{IN}$ ,  $V_{OUT}$ , and  $I_{OUT}$  requirements.
2. Optimize your design for key parameters like efficiency, footprint and cost using the optimizer dial and compare this design with other possible solutions from Texas Instruments.
3. The WEBENCH Power Designer provides you with a customized schematic along with a list of materials with real time pricing and component availability.
4. In most cases, you will also be able to:
  - Run electrical simulations to see important waveforms and circuit performance
  - Run thermal simulations to understand the thermal performance of your board
  - Export your customized schematic and layout into popular CAD formats
  - Print PDF reports for the design, and share your design with colleagues
5. Get more information about WEBENCH tools at [www.ti.com/WEBENCH](http://www.ti.com/WEBENCH).

#### 13.1.2 Third-Party Products Disclaimer

TI'S PUBLICATION OF INFORMATION REGARDING THIRD-PARTY PRODUCTS OR SERVICES DOES NOT CONSTITUTE AN ENDORSEMENT REGARDING THE SUITABILITY OF SUCH PRODUCTS OR SERVICES OR A WARRANTY, REPRESENTATION OR ENDORSEMENT OF SUCH PRODUCTS OR SERVICES, EITHER ALONE OR IN COMBINATION WITH ANY TI PRODUCT OR SERVICE.

### 13.2 Documentation Support

#### 13.2.1 Related Documentation

For related documentation, see the following:

*SN65HVD17xx Fault-Protected RS-485 Transceivers With Extended Common-Mode Range*, [SLLS872](#)

### 13.3 Related Links

The table below lists quick access links. Categories include technical documents, support and community resources, tools and software, and quick access to sample or buy.

**Table 5. Related Links**

| PART        | PRODUCT FOLDER             | ORDER NOW                  | TECHNICAL DOCUMENTS        | TOOLS & SOFTWARE           | SUPPORT & COMMUNITY        |
|-------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| SN65HVD1780 | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> |
| SN65HVD1781 | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> |
| SN65HVD1782 | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> |

### 13.4 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. In the upper right corner, click on *Alert me* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

### 13.5 Community Resources

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

**TI E2E™ Online Community** *TI's Engineer-to-Engineer (E2E) Community*. Created to foster collaboration among engineers. At [e2e.ti.com](http://e2e.ti.com), you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

**Design Support** *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

### 13.6 Trademarks

E2E is a trademark of Texas Instruments.

WEBENCH is a registered trademark of Texas Instruments.

All other trademarks are the property of their respective owners.

### 13.7 Electrostatic Discharge Caution



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

### 13.8 Glossary

[SLYZ022](#) — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

## 14 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

**PACKAGING INFORMATION**

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2)            | Lead/Ball Finish<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5) | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|----------------------------|-------------------------|----------------------|--------------|-------------------------|-------------------------|
| SN65HVD1780D     | ACTIVE        | SOIC         | D                  | 8    | 75             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | -40 to 105   | VP1780                  | <a href="#">Samples</a> |
| SN65HVD1780DG4   | ACTIVE        | SOIC         | D                  | 8    | 75             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | -40 to 105   | VP1780                  | <a href="#">Samples</a> |
| SN65HVD1780DR    | ACTIVE        | SOIC         | D                  | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | -40 to 105   | VP1780                  | <a href="#">Samples</a> |
| SN65HVD1780DRG4  | ACTIVE        | SOIC         | D                  | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | -40 to 105   | VP1780                  | <a href="#">Samples</a> |
| SN65HVD1780P     | ACTIVE        | PDIP         | P                  | 8    | 50             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | N / A for Pkg Type   | -40 to 105   | 65HVD1780               | <a href="#">Samples</a> |
| SN65HVD1781D     | ACTIVE        | SOIC         | D                  | 8    | 75             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | -40 to 125   | VP1781                  | <a href="#">Samples</a> |
| SN65HVD1781DG4   | ACTIVE        | SOIC         | D                  | 8    | 75             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | -40 to 125   | VP1781                  | <a href="#">Samples</a> |
| SN65HVD1781DR    | ACTIVE        | SOIC         | D                  | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | -40 to 125   | VP1781                  | <a href="#">Samples</a> |
| SN65HVD1781DRG4  | ACTIVE        | SOIC         | D                  | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | -40 to 125   | VP1781                  | <a href="#">Samples</a> |
| SN65HVD1781P     | ACTIVE        | PDIP         | P                  | 8    | 50             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | N / A for Pkg Type   | -40 to 105   | 65HVD1781               | <a href="#">Samples</a> |
| SN65HVD1782D     | ACTIVE        | SOIC         | D                  | 8    | 75             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | -40 to 105   | VP1782                  | <a href="#">Samples</a> |
| SN65HVD1782DG4   | ACTIVE        | SOIC         | D                  | 8    | 75             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | -40 to 105   | VP1782                  | <a href="#">Samples</a> |
| SN65HVD1782DR    | ACTIVE        | SOIC         | D                  | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | -40 to 105   | VP1782                  | <a href="#">Samples</a> |
| SN65HVD1782DRG4  | ACTIVE        | SOIC         | D                  | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | -40 to 105   | VP1782                  | <a href="#">Samples</a> |
| SN65HVD1782P     | ACTIVE        | PDIP         | P                  | 8    | 50             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | N / A for Pkg Type   | -40 to 105   | 65HVD1782               | <a href="#">Samples</a> |

<sup>(1)</sup> The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

---

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

<sup>(2)</sup> Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

<sup>(3)</sup> MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

<sup>(4)</sup> There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

<sup>(5)</sup> Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "-" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

<sup>(6)</sup> Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**OTHER QUALIFIED VERSIONS OF SN65HVD1780, SN65HVD1781, SN65HVD1782 :**

- Automotive: [SN65HVD1780-Q1](#), [SN65HVD1781-Q1](#), [SN65HVD1782-Q1](#)

NOTE: Qualified Version Definitions:

- Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects

**TAPE AND REEL INFORMATION**


\*All dimensions are nominal

| Device        | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|---------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| SN65HVD1780DR | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| SN65HVD1781DR | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| SN65HVD1782DR | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |

## TAPE AND REEL BOX DIMENSIONS



\*All dimensions are nominal

| Device        | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|---------------|--------------|-----------------|------|------|-------------|------------|-------------|
| SN65HVD1780DR | SOIC         | D               | 8    | 2500 | 367.0       | 367.0      | 35.0        |
| SN65HVD1781DR | SOIC         | D               | 8    | 2500 | 367.0       | 367.0      | 35.0        |
| SN65HVD1782DR | SOIC         | D               | 8    | 2500 | 367.0       | 367.0      | 35.0        |

D (R-PDSO-G8)

PLASTIC SMALL OUTLINE




## NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- $\triangle C$  Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
- $\triangle D$  Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
- E. Reference JEDEC MS-012 variation AA.

D (R-PDSO-G8)

# PLASTIC SMALL OUTLINE

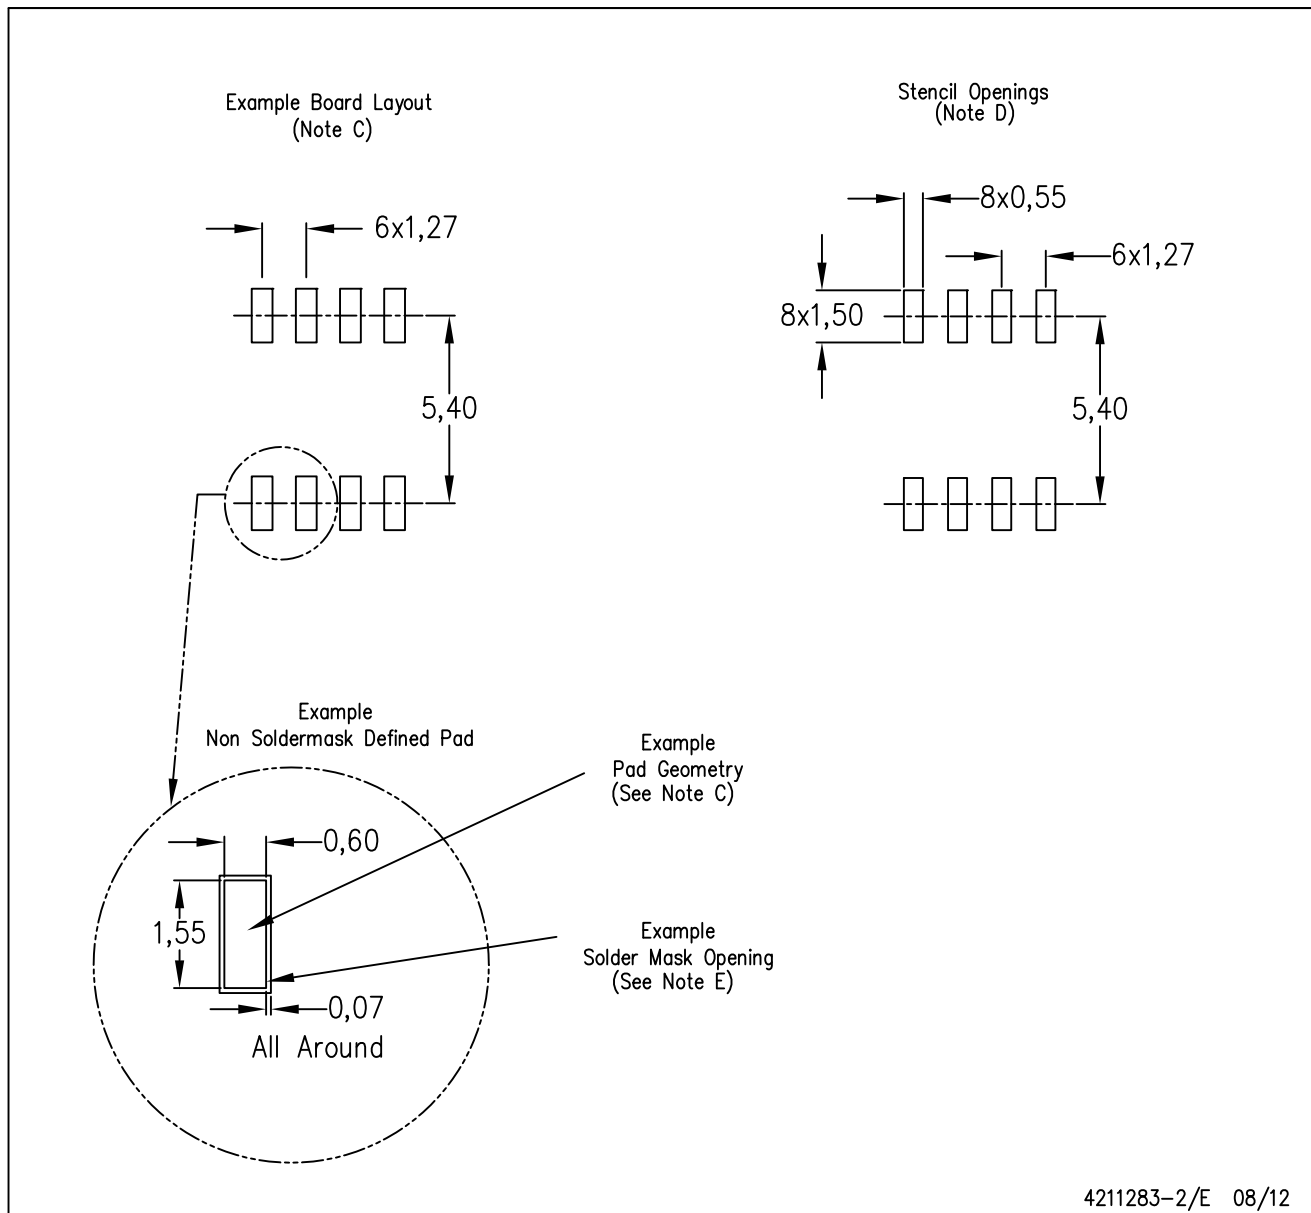

NOTES:

- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Publication IPC-7351 is recommended for alternate designs.
- D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
- E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

P (R-PDIP-T8)

PLASTIC DUAL-IN-LINE PACKAGE



- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. Falls within JEDEC MS-001 variation BA.

## IMPORTANT NOTICE

Texas Instruments Incorporated (TI) reserves the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete.

TI's published terms of sale for semiconductor products (<http://www.ti.com/sc/docs/stdterms.htm>) apply to the sale of packaged integrated circuit products that TI has qualified and released to market. Additional terms may apply to the use or sale of other types of TI products and services.

Reproduction of significant portions of TI information in TI data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such reproduced documentation. Information of third parties may be subject to additional restrictions. Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyers and others who are developing systems that incorporate TI products (collectively, "Designers") understand and agree that Designers remain responsible for using their independent analysis, evaluation and judgment in designing their applications and that Designers have full and exclusive responsibility to assure the safety of Designers' applications and compliance of their applications (and of all TI products used in or for Designers' applications) with all applicable regulations, laws and other applicable requirements. Designer represents that, with respect to their applications, Designer has all the necessary expertise to create and implement safeguards that (1) anticipate dangerous consequences of failures, (2) monitor failures and their consequences, and (3) lessen the likelihood of failures that might cause harm and take appropriate actions. Designer agrees that prior to using or distributing any applications that include TI products, Designer will thoroughly test such applications and the functionality of such TI products as used in such applications.

TI's provision of technical, application or other design advice, quality characterization, reliability data or other services or information, including, but not limited to, reference designs and materials relating to evaluation modules, (collectively, "TI Resources") are intended to assist designers who are developing applications that incorporate TI products; by downloading, accessing or using TI Resources in any way, Designer (individually or, if Designer is acting on behalf of a company, Designer's company) agrees to use any particular TI Resource solely for this purpose and subject to the terms of this Notice.

TI's provision of TI Resources does not expand or otherwise alter TI's applicable published warranties or warranty disclaimers for TI products, and no additional obligations or liabilities arise from TI providing such TI Resources. TI reserves the right to make corrections, enhancements, improvements and other changes to its TI Resources. TI has not conducted any testing other than that specifically described in the published documentation for a particular TI Resource.

Designer is authorized to use, copy and modify any individual TI Resource only in connection with the development of applications that include the TI product(s) identified in such TI Resource. NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER TI INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT OF TI OR ANY THIRD PARTY IS GRANTED HEREIN, including but not limited to any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information regarding or referencing third-party products or services does not constitute a license to use such products or services, or a warranty or endorsement thereof. Use of TI Resources may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

TI RESOURCES ARE PROVIDED "AS IS" AND WITH ALL FAULTS. TI DISCLAIMS ALL OTHER WARRANTIES OR REPRESENTATIONS, EXPRESS OR IMPLIED, REGARDING RESOURCES OR USE THEREOF, INCLUDING BUT NOT LIMITED TO ACCURACY OR COMPLETENESS, TITLE, ANY EPIDEMIC FAILURE WARRANTY AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS. TI SHALL NOT BE LIABLE FOR AND SHALL NOT DEFEND OR INDEMNIFY DESIGNER AGAINST ANY CLAIM, INCLUDING BUT NOT LIMITED TO ANY INFRINGEMENT CLAIM THAT RELATES TO OR IS BASED ON ANY COMBINATION OF PRODUCTS EVEN IF DESCRIBED IN TI RESOURCES OR OTHERWISE. IN NO EVENT SHALL TI BE LIABLE FOR ANY ACTUAL, DIRECT, SPECIAL, COLLATERAL, INDIRECT, PUNITIVE, INCIDENTAL, CONSEQUENTIAL OR EXEMPLARY DAMAGES IN CONNECTION WITH OR ARISING OUT OF TI RESOURCES OR USE THEREOF, AND REGARDLESS OF WHETHER TI HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Unless TI has explicitly designated an individual product as meeting the requirements of a particular industry standard (e.g., ISO/TS 16949 and ISO 26262), TI is not responsible for any failure to meet such industry standard requirements.

Where TI specifically promotes products as facilitating functional safety or as compliant with industry functional safety standards, such products are intended to help enable customers to design and create their own applications that meet applicable functional safety standards and requirements. Using products in an application does not by itself establish any safety features in the application. Designers must ensure compliance with safety-related requirements and standards applicable to their applications. Designer may not use any TI products in life-critical medical equipment unless authorized officers of the parties have executed a special contract specifically governing such use. Life-critical medical equipment is medical equipment where failure of such equipment would cause serious bodily injury or death (e.g., life support, pacemakers, defibrillators, heart pumps, neurostimulators, and implantables). Such equipment includes, without limitation, all medical devices identified by the U.S. Food and Drug Administration as Class III devices and equivalent classifications outside the U.S.

TI may expressly designate certain products as completing a particular qualification (e.g., Q100, Military Grade, or Enhanced Product). Designers agree that it has the necessary expertise to select the product with the appropriate qualification designation for their applications and that proper product selection is at Designers' own risk. Designers are solely responsible for compliance with all legal and regulatory requirements in connection with such selection.

Designer will fully indemnify TI and its representatives against any damages, costs, losses, and/or liabilities arising out of Designer's non-compliance with the terms and provisions of this Notice.