

Han 3EMC-HBM-SL-C (cover w. gasket)

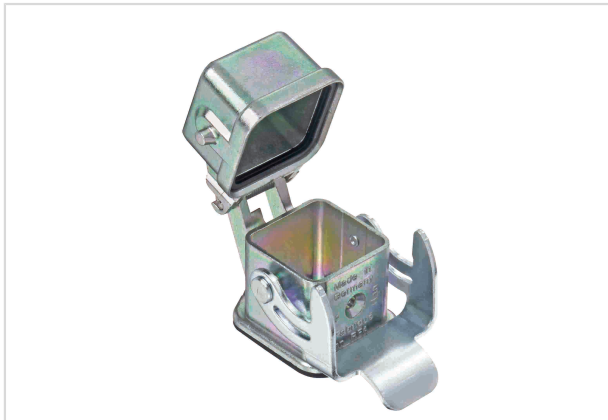


Image is for illustration purposes only. Please refer to product description.

Part number	09 62 003 0306
Specification	Han 3EMC-HBM-SL-C (cover w. gasket)
HARTING eCatalogue	https://b2b.harting.com/09620030306

Identification

Category	Hoods/Housings
Series of hoods/housings	Han [®] EMC
Type of hood/housing	Bulkhead mounted housing
Description of hood/housing	With metal cover With seal (NBR)

Version

Locking type	Single locking lever
Size	3 A
Field of application	Hoods/Housings for higher EMC requirements
Details	for female inserts

Technical characteristics

Limiting temperature	-40 ... +125 °C
Degree of protection acc. to IEC 60529	IP44 IP65 / IP67 with seal screw 09 20 000 9918
Type rating acc. to UL 50 / UL 50E	12

Material properties

Material (hood/housing)	Zinc die-cast
Surface (hood/housing)	Uncoated
Colour (hood/housing)	Unpainted
Material (seal)	PTFE
Material (locking)	Steel



Pushing Performance

Material properties

Surface (locking)	Zinc plated
RoHS	compliant with exemption
RoHS exemptions	6(a) / 6(a)-I: Lead as an alloying element in steel for machining purposes and in galvanised steel containing up to 0,35 % lead by weight / Lead as an alloying element in steel for machining purposes containing up to 0,35 % lead by weight and in batch hot dip galvanised steel components containing up to 0,2 % lead by weight
ELV status	compliant with exemption
China RoHS	50
REACH Annex XVII substances	No
REACH ANNEX XIV substances	No
REACH SVHC substances	Yes
REACH SVHC substances	Lead

Specifications and approvals

Approvals	DNV GL
UL / CSA	UL 1977 ECBT2.E235076 CSA-C22.2 No. 182.3 ECBT8.E235076
CE	Yes

Commercial data

Packaging size	10
Net weight	62.66 g
Country of origin	Romania
European customs tariff number	85389099
eCl@ss	27440202 Shell for industrial connectors