

AM64x Sitara™ Processors

1 Features

Processor cores:

- 1× Dual 64-bit Arm® Cortex®-A53 microprocessor subsystem at up to 1.0 GHz
 - Dual-core Cortex-A53 cluster with 256KB L2 shared cache with SECDED ECC
 - Each A53 Core has 32KB L1 DCache with SECDED ECC and 32KB L1 ICache with Parity protection
- Up to 2× Dual-core Arm® Cortex®-R5F MCU subsystems at up to 800 MHz, integrated for real-time processing
 - Dual-core Arm® Cortex®-R5F supports dual-core and single-core modes
 - 32KB ICache, 32KB DCache and 64KB TCM per each R5F core for a total of 256KB TCM with SECDED ECC on all memories
- 1× Single-core Arm® Cortex®-M4F MCU at up to 400 MHz
 - 256KB SRAM with SECDED ECC

Industrial subsystem:

- 2× gigabit Industrial Communication Subsystems (PRU_ICSSG)
 - Supports Profinet IRT, Profinet RT, EtherNet/IP, EtherCAT, Time-Sensitive Networking (TSN), and more
 - Backward compatibility with 10/100Mb PRU_ICSS
 - Each PRU_ICSSG contains:
 - 2× Ethernet ports
 - MII (10/100)
 - RGMII (10/100/1000)
 - 6 PRU RISC cores per PRU_ICSSG each core having:
 - Instruction RAM with ECC
 - Broadside RAM
 - Multiplier with optional accumulator (MAC)
 - CRC16/32 hardware accelerator
 - Byte swap for Big/Little Endian conversion
 - SUM32 hardware accelerator for UDP checksum
 - Task Manager for preemption support
 - Three Data RAMs with ECC
 - 8 banks of 30 × 32-bit register scratchpad memory
 - Interrupt controller and task manager

- Two 64-bit Industrial Ethernet Peripherals (IEPs) for time stamping and other time synchronization functions
- 18× Sigma-Delta filters
 - Short circuit logic
 - Over-current logic
- 6× Multi-protocol position encoder interfaces
- One Enhanced Capture Module (ECAP)
- 16550-compatible UART with a dedicated 192-MHz clock to support 12-Mbps PROFIBUS

Memory subsystem:

- Up to 2MB of On-chip RAM (OCSRAM) with SECDED ECC:
 - Can be divided into smaller banks in increments of 256KB for as many as 8 separate memory banks
 - Each memory bank can be allocated to a single core to facilitate software task partitioning
- DDR Subsystem (DDRSS)
 - Supports LPDDR4, DDR4 memory types
 - 16-Bit data bus with inline ECC
 - Supports speeds up to 1600 MT/s
- 1× General-Purpose Memory Controller (GPMC)
 - 16-Bit parallel bus with 133 MHz clock or
 - 32-Bit parallel bus with 100 MHz clock
 - Error Location Module (ELM) support

System on Chip (SoC) Services:

- Device Management Security Controller (DMSC-L)
 - Centralized SoC system controller
 - Manages system services including initial boot, security, and clock/reset/power management
 - Communication with various processing units over message manager
 - Simplified interface for optimizing unused peripherals
- Data Movement Subsystem (DMSS)
 - Block Copy DMA (BCDMA)
 - Packet DMA (PKTDMA)
 - Secure Proxy (SEC_PROXY)
 - Ring Accelerator (RINGACC)

Security:

- Secure boot supported
 - Hardware-enforced Root-of-Trust (RoT)
 - Support to switch RoT via backup key
 - Support for takeover protection, IP protection, and anti-roll back protection
- Cryptographic acceleration supported



- Session-aware cryptographic engine with ability to auto-switch key-material based on incoming data stream
- Supports cryptographic cores
 - AES – 128/192/256 Bits key sizes
 - 3DES – 56/112/168 Bits key sizes
 - MD5, SHA1
 - SHA2 – 224/256/384/512
 - DRBG with true random number generator
 - PKA (Public Key Accelerator) to Assist in RSA/ECC processing
- DMA support
- Debugging security
 - Secure software controlled debug access
 - Security aware debugging
- Trusted Execution Environment (TEE) supported
 - Arm TrustZone® based TEE
 - Extensive firewall support for isolation
 - Secure watchdog/timer/IPC
- Secure storage support
- On-the-Fly encryption support for OSPI interface in XIP mode
- Networking security support for data (Payload) encryption/authentication via packet based hardware cryptographic engine
- Security co-processor (DMSC-L) for key and security management, with dedicated device level interconnect for security

High-speed interfaces:

- 1× Integrated Ethernet switch (CPSW3G) supporting
 - Up to 2 Ethernet ports
 - RMII (10/100)
 - RGMII (10/100/1000)
 - IEEE 1588 (2008 Annex D, Annex E, Annex F) with 802.1AS PTP
 - Clause 45 MDIO PHY management
 - Energy efficient Ethernet (802.3az)
- 1× PCI-Express® Gen2 controller (PCIE)
 - Supports Gen2 operation
 - Supports Single Lane operation
- 1× USB 3.1-Gen1 Dual-Role Device (DRD) Subsystem (USBSS)
 - One enhanced SuperSpeed Gen1 port
 - Port configurable as USB host, USB peripheral, or USB Dual-Role Device
 - Integrated USB VBUS detection

General connectivity:

- 6× Inter-Integrated Circuit (I2C) ports
- 9× configurable Universal Asynchronous Receive/Transmit (UART) modules

- 1× Flash Subsystem (FSS) that can be configured as Octal SPI (OSPI) flash interfaces or one Quad SPI (QSPI)
- 1× 12-Bit Analog-to-Digital Converters (ADC)
 - Up to 4 MSPS
 - 8× multiplexed analog inputs
- 7× Multichannel Serial Peripheral Interfaces (MCSPi) controllers
- 6× Fast Serial Interface Receiver (FSI_RX) cores
- 2× Fast Serial Interface Transmitter (FSI_TX) cores
- 3× General-Purpose I/O (GPIO) modules

Control interfaces:

- 9x Enhanced Pulse-Width Modulator (EPWM) modules
- 3× Enhanced Capture (ECAP) modules
- 3× Enhanced Quadrature Encoder Pulse (EQEP) modules
- 2× Modular Controller Area Network (MCAN) modules with or without full CAN-FD support

Media and data storage:

- 2× Multi-Media Card/Secure Digital (MMC/SD/SDIO) interfaces
 - One 4-bit for SD/SDIO;
 - One 8-bit for eMMC
 - Integrated analog switch for voltage switching between 3.3V to 1.8V for high-speed cards

Power management:

- Simplified power sequence
- Integrated SDIO LDO for handling automatic voltage transition for SD interface
- Integrated voltage supervisor for safety monitoring of over-under voltage conditions
- Integrated power supply glitch detector for detecting fast supply transients

Functional Safety:

- **Functional Safety-Compliant** targeted
 - Developed for functional safety applications
 - Documentation will be available to aid IEC 61508 functional safety system design
 - Systematic capability up to SIL 3
 - Hardware integrity up to SIL 2 targeted for MCU domain
 - Quality-Managed Main Domain
 - Safety-related certification
 - IEC 61508 certification planned
 - ECC or parity on calculation-critical memories
 - ECC and parity on select internal bus interconnect
 - Built-In Self-Test (BIST) for CPU and on-chip RAM
 - Error Signaling Module (ESM) with error pin
 - Runtime safety diagnostics, voltage, temperature, and clock monitoring, windowed watchdog timers, CRC engine for memory integrity checks
 - Dedicated MCU domain memory, interfaces, and M4F core capable of being isolated from the larger SoC with Freedom From Interference (FFI) features
 - Separate interconnect
 - Firewalls and timeout gaskets
 - Dedicated PLL
 - Dedicated I/O supply
 - Separate reset

SoC architecture:

- Supports primary boot from UART, I2C, OSPI/QSPI Flash, SPI Flash, parallel NOR Flash, parallel NAND Flash, SD, eMMC, USB 2.0, PCIe, and Ethernet interfaces
- 16-nm FinFET technology
- 17.2 mm × 17.2 mm, 0.8-mm pitch, 441-pin BGA package

2 Applications

- [Programmable Logic Controller \(PLC\)](#)
- [Motor Drives](#)
- [Remote I/O](#)
- [Industrial Robots](#)

3 Description

AM64x is an extension of the Sitara™ Industrial-grade family of heterogeneous Arm® processors. AM64x is built for industrial applications, such as motor drives and Programmable Logic Controllers (PLCs), which require a unique combination of real-time processing and communications with applications processing. AM64x combines two instances of the Sitara device's gigabit TSN-enabled PRU-ICSSG with up to two Arm® Cortex®-A53 cores, up to four Cortex-R5F MCUs, and a Cortex-M4F MCU.

AM64x is architected to provide real-time performance through the high-performance R5Fs, Tightly-Coupled Memory banks, configurable SRAM partitioning, and dedicated low-latency paths to and from peripherals for rapid data movement in and out of the SoC. This deterministic architecture allows for AM64x to handle the tight control loops found in servo drives while the peripherals like FSI, GPMC, PWMs, sigma delta decimation filters, and absolute encoder interfaces help enable a number of different architectures found in these systems.

The Cortex-A53s provide the powerful computing elements necessary for Linux applications. Linux, and Real-time (RT) Linux, is provided through TI's Processor SDK Linux which stays updated to the latest Long Term Support (LTS) Linux kernel, bootloader and Yocto file system on an annual basis. AM64x helps bridge the Linux world with the real-time world by enabling isolation between Linux applications and real-time streams through configurable memory partitioning. The Cortex-A53s can be assigned to work strictly out of DDR for Linux, and the internal SRAM can be broken up into various sizes for the Cortex-R5Fs to use together or independently.

The AM64x provides flexible industrial communications capability including full protocol stacks for EtherCAT slave, PROFINET device, EtherNet/IP adapter, and IO-Link Master. The PRU-ICSSG further provides capability for gigabit and TSN based protocols. In addition, the PRU-ICSSG also enables additional interfaces in the SoC including sigma delta decimation filters and absolute encoder interfaces.

Functional safety features can be enabled through the integrated Cortex-M4F along with its dedicated peripherals which can all be isolated from the rest of the SoC. AM64x also supports secure boot.

Device Information

| PART NUMBER | PACKAGE ⁽¹⁾ | BODY SIZE |
|--------------|------------------------|-------------------|
| AM6442...ALV | (441-Pin) FCBGA | 17.2 mm × 17.2 mm |
| AM6441...ALV | (441-Pin) FCBGA | 17.2 mm × 17.2 mm |
| AM6422...ALV | (441-Pin) FCBGA | 17.2 mm × 17.2 mm |
| AM6421...ALV | (441-Pin) FCBGA | 17.2 mm × 17.2 mm |
| AM6412...ALV | (441-Pin) FCBGA | 17.2 mm × 17.2 mm |
| AM6411...ALV | (441-Pin) FCBGA | 17.2 mm × 17.2 mm |


(1) For more information, see [Section 11, Mechanical, Packaging, and Orderable Information](#).

3.1 Functional Block Diagram

Figure 3-1 is functional block diagram for the device.

Note

To understand what device features are currently supported by TI Software Development Kits (SDKs), see the [AM64x Software Build Sheet](#).

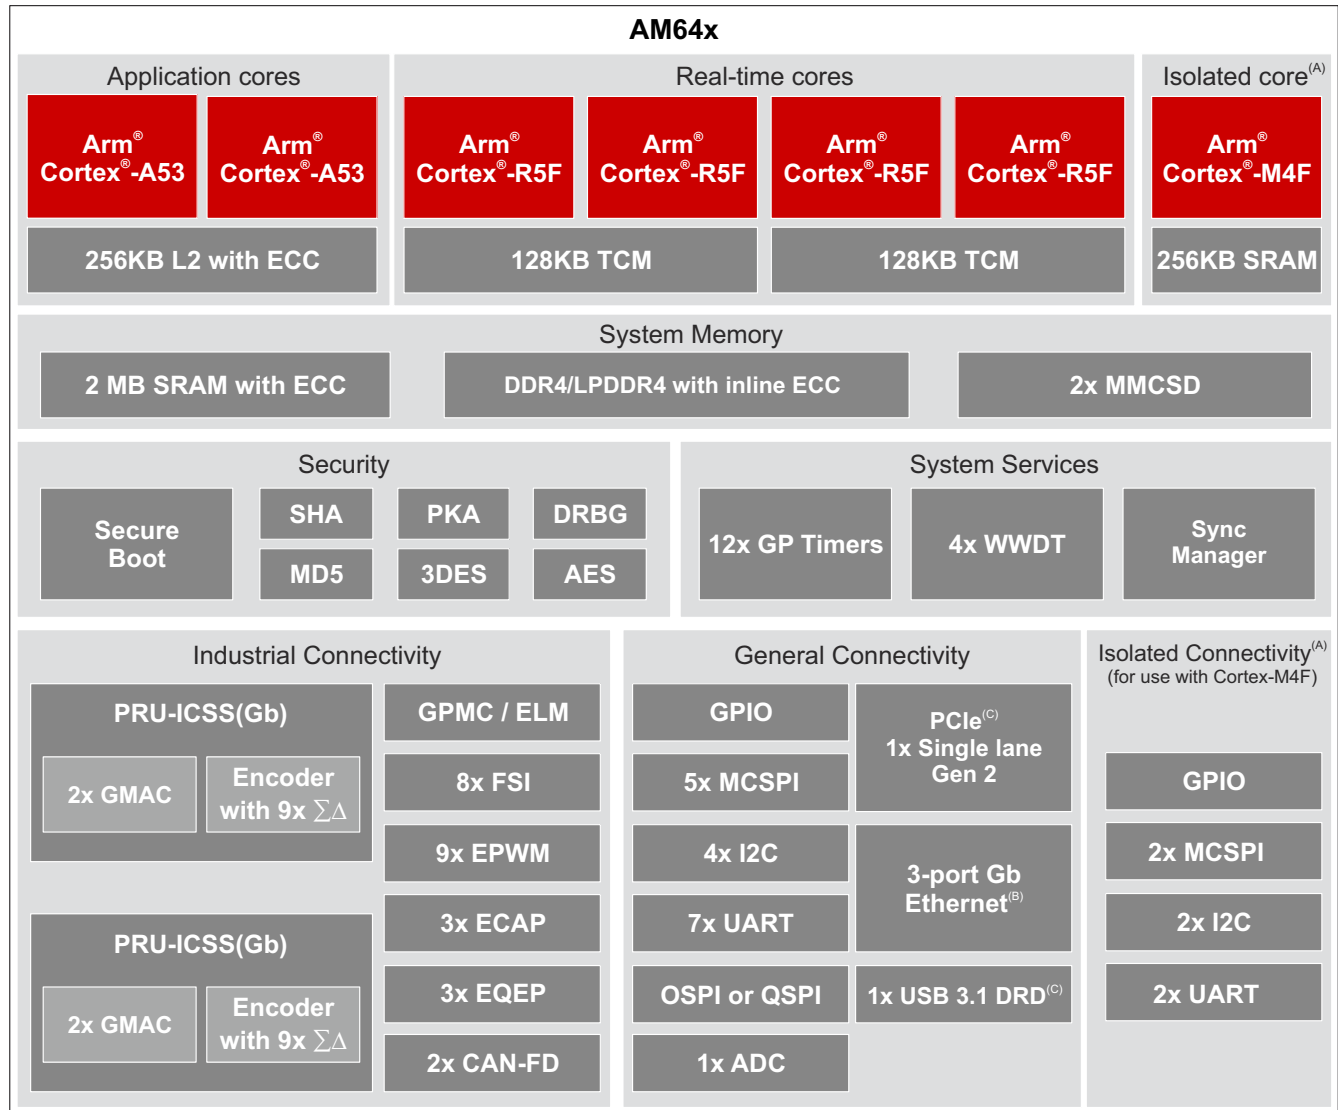

- A. Isolation of peripherals and M4F core is an optional feature. MCU domain resources are shared across SoC when in non-isolated configuration.
- B. One port is internally connected only; not connected to any pins.
- C. USB3.1 and PCIe share a common SerDes lanes.

Figure 3-1. Functional Block Diagram

Table of Contents

| | | | |
|---|-----|--|-----|
| 1 Features | 1 | 7.10 Timing and Switching Characteristics..... | 108 |
| 2 Applications | 4 | 8 Detailed Description | 206 |
| 3 Description | 4 | 8.1 Overview..... | 206 |
| 3.1 Functional Block Diagram..... | 5 | 8.2 Processor Subsystems..... | 207 |
| 4 Revision History | 7 | 8.3 Accelerators and Coprocessors..... | 209 |
| 5 Device Comparison | 8 | 8.4 Other Subsystems..... | 209 |
| 5.1 Related Products..... | 10 | 9 Applications, Implementation, and Layout | 217 |
| 6 Terminal Configuration and Functions | 11 | 9.1 Power Supply Mapping..... | 217 |
| 6.1 Pin Diagrams..... | 11 | 9.2 Device Connection and Layout Fundamentals..... | 218 |
| 6.2 Pin Attributes..... | 12 | 9.3 Peripheral- and Interface-Specific Design Information..... | 219 |
| 6.3 Signal Descriptions..... | 57 | 10 Device and Documentation Support | 224 |
| 6.4 Pin Connectivity Requirements..... | 92 | 10.1 Device Nomenclature..... | 224 |
| 7 Specifications | 96 | 10.2 Tools and Software..... | 226 |
| 7.1 Absolute Maximum Ratings..... | 96 | 10.3 Documentation Support..... | 227 |
| 7.2 ESD Ratings..... | 98 | 10.4 Support Resources..... | 227 |
| 7.3 Power-On Hours (POH)..... | 98 | 10.5 Trademarks..... | 227 |
| 7.4 Recommended Operating Conditions..... | 99 | 10.6 Electrostatic Discharge Caution..... | 227 |
| 7.5 Operating Performance Points..... | 100 | 10.7 Glossary..... | 227 |
| 7.6 Power Consumption Summary..... | 100 | 11 Mechanical, Packaging, and Orderable Information | 228 |
| 7.7 Electrical Characteristics..... | 100 | 11.1 Packaging Information..... | 228 |
| 7.8 VPP Specifications for One-Time Programmable (OTP) eFuses..... | 106 | | |
| 7.9 Thermal Resistance Characteristics..... | 107 | | |

4 Revision History

Changes from August 6, 2021 to February 16, 2022 (from Revision B (AUGUST 2021) to Revision C (FEBRUARY 2022))

| | Page |
|---|------|
| • (Features): Removed On-the-Fly authentication support from OSPI..... | 1 |
| • (Device Comparison): Clarified speed grade options for each device. Also clarified functional safety support and added a note that references the Nomenclature Description table..... | 8 |
| • (Pin Connectivity Requirements [was "Connections for Unused Pins"]): Added new pin connection requirements and updated SERDES power pin connection requirements to include a condition of device boundary scan usage..... | 92 |
| • (Absolute Maximum Ratings): Replaced free-air in the table description with junction and moved MCU_PORz from a row of dual-voltage fail-safe pins to its own row..... | 96 |
| • (Recommended Operating Conditions): Replaced free-air in the table description with junction and added a note to VDD_MMC0 and VDD_DLL_MMC0..... | 99 |
| • (Recommended Operating Conditions): Combined VDDS_DDR and VDDS_DDR_C into a single row and added a note that explains these two power rails should be powered from the same source..... | 99 |
| • (Speed Grade Maximum Frequency): Updated Note 1 to reference the AM64x\AM243x DDR Board Design and Layout Guidelines..... | 100 |
| • (LVCMOS Electrical Characteristics): Corrected the V _{OH} MIN value for 1.8V Mode..... | 103 |
| • (Recommended Operating Conditions for OTP eFuse Programming): Replaced free-air in the table description with junction and changed operating temperature description to remove ambient and replace with junction. Also removed the recommendation for using a specific power management solution..... | 106 |
| • (ALV Package Thermal Resistance Characteristics): Updated TBD values in the table with actual values... | 107 |
| • (Power-Up Sequencing): Updated Note 10 to clarify VDD_CORE and VDDR_CORE dependencies..... | 110 |
| • (Power-Down Sequencing): Added Note 5 to clarify VDD_CORE and VDDR_CORE dependencies..... | 112 |
| • (System Timing): Removed the maximum input slew rate requirement from the Systems Timing Conditions table..... | 113 |
| • (Clock Timing): Added MCU_EXT_REFCLK0 to the Clock Timing Requirements, and added MCU_SYSCCLKOUT0 and MCU_OBSCLK0 to the Clock Switching Characteristics..... | 117 |
| • (MCU_OSC0 Internal Oscillator Clock Source): Added a note to define the maximum ESR _{xtal} value based on the C _{shunt} parameter..... | 120 |
| • (DDRSS Switching Characteristics): Added a note that clarifies the min cycle time definition and references the AM64x\AM243x DDR Board Design and Layout Guidelines..... | 132 |
| • (GPMC and NOR Flash — Synchronous Mode): Added a note to Timing Requirements and Switching Characteristics tables to clarify maximum frequency relationship to data bus width..... | 139 |
| • (System Power Supply Monitor Design Guidelines): Updated maximum and minimum threshold values to remove a few mV of rounding error in example provided..... | 222 |
| • (Standard Package Symbolization): Updated package symbolization figure..... | 225 |
| • (Tools and Software): Updated the supported development tools..... | 226 |
| • (Documentation Support) Updated/Changed the titles and URLs of Technical Reference Manual and Silicon Errata references..... | 227 |

5 Device Comparison

Table 5-1 shows a comparison between devices, highlighting the differences.

Note

Availability of features listed in this table are a function of shared IO pins, where IO signals associated with many of the features are multiplexed to a limited number of pins. The SysConfig tool should be used to assign signal functions to pins. This will provide a better understanding of limitations associated with pin multiplexing.

Note

To understand what device features are currently supported by TI Software Development Kits (SDKs), see the [AM64x Software Build Sheet](#).

Table 5-1. Device Comparison

| FEATURES | REFERENCE NAME | AM6442 | AM6441 | AM6422 | AM6421 | AM6412 | AM6411 |
|--|----------------|--|--|---------------|--|-------------|-------------|
| CTRLMMR_WKUP_JTAG_DEVICE_ID[31:13] DEVICE_ID register bit field value ⁽¹⁾ | | D: 0x19464 E: 0x19465 F: 0x19466 | D: 0x19264 E: 0x19265 F: 0x19266 | C: 0x19423 | D: 0x19224 E: 0x19225 F: 0x19226 | C: 0x19403 | C: 0x19203 |
| PROCESSORS AND ACCELERATORS | | | | | | | |
| Speed Grades (See Table 7-1) | | S | S | S | S | S, K | S, K |
| Arm Cortex-A53 Microprocessor Subsystem | Arm A53 | Dual Core | Single Core | Dual Core | Single Core | Dual Core | Single Core |
| Arm Cortex-R5F | Arm R5F | 2 × Dual Core | 2 × Dual Core | 1 × Dual Core | 1 × Dual Core | Single Core | Single Core |
| Arm Cortex-M4F | Arm M4F | Single Core Functional Safety Optional ⁽⁴⁾ | | | | Single Core | |
| Device Management Security Controller | DMSC-L | Yes | | | | | |
| Crypto Accelerators | Security | Yes | | | | | |
| PROGRAM AND DATA STORAGE | | | | | | | |
| On-Chip Shared Memory (RAM) in MAIN Domain | OCSRAM | 2MB | | | | | |
| R5F Tightly Coupled Memory (TCM) | TCM | 256KB | 256KB | 256KB | 256KB | 128KB | 128KB |
| On-Chip Shared Memory (RAM) in M4F Domain | MCU_MS RAM | 256KB | | | | | |
| DDR4/LPDDR4 DDR Subsystem | DDRSS | Up to 2GB (16-bit data) with inline ECC | | | | | |
| General-Purpose Memory Controller | GPMC | Up to 1GB with ECC | | | | | |
| PERIPHERALS | | | | | | | |
| Modular Controller Area Network Interface | MCAN | 2 | | | | | |
| Full CAN-FD Support ⁽²⁾ | MCAN | Optional | Optional | No | Optional | No | No |
| General-Purpose I/O | GPIO | Up to 198 | | | | | |
| Inter-Integrated Circuit Interface | I2C | 6 | | | | | |
| Analog-to-Digital Converter | ADC | 1 | | | | No | No |
| Multichannel Serial Peripheral Interface | MCSP I | 7 | | | | | |
| Multi-Media Card/ Secure Digital Interface | MMCSD0 | eMMC (8-bits) | | | | | |
| | MMCSD1 | SD/SDIO (4-bits) | | | | | |
| Fast Serial Interface | FSI_TX | 2 | | | | | |
| | FSI_RX | 6 | | | | | |
| Flash Subsystem (FSS) ⁽³⁾ | OSPI0/QSPI0 | Yes | | | | | |
| PCI Express Port with Integrated PHY | PCIE0 | Single Lane | | | | | |
| Programmable Real-Time Unit Subsystem ⁽⁵⁾ | PRU_ICSSG | 2 | | | | | |
| Industrial Communication Subsystem Support ⁽⁶⁾ | PRU_ICSSG | Optional | Optional | No | Optional | No | No |
| Gigabit Ethernet Interface | CPSW3G | Yes | | | | | |
| General-Purpose Timers | TIMER | 16 (4 in MCU Channel) | | | | | |
| Enhanced Pulse-Width Modulator Module | EPWM | 9 | | | | | |

Table 5-1. Device Comparison (continued)

| FEATURES | REFERENCE NAME | AM6442 | AM6441 | AM6422 | AM6421 | AM6412 | AM6411 |
|--|----------------|--------|--------|--------|--------|--------|--------|
| Enhanced Capture Module | ECAP | | | | 3 | | |
| Enhanced Quadrature Encoder Pulse Module | EQEP | | | | 3 | | |
| Universal Asynchronous Receiver and Transmitter | UART | | | | 9 | | |
| Universal Serial Bus (USB3.1 Gen1) SuperSpeed Dual-Role-Device (DRD) Ports with SS PHY | USB0 | | | | Yes | | |

- (1) For more details about the CTRLMMR_WKUP_JTAG_DEVICE_ID register and DEVICE_ID bit field, see the device TRM.
- (2) Full CAN-FD Support is available when selecting an orderable part number that includes a feature code of E or F. Refer to [Nomenclature Description](#) for definition of feature codes.
- (3) One flash interface, configured as OSPI0 or QSPI0.
- (4) Functional Safety is available when selecting an orderable part number that includes a feature code of F. Refer to [Nomenclature Description](#) for definition of feature codes.
- (5) Programmable Real-Time Unit Subsystem is available when selecting an orderable part number that includes a feature code of C. Refer to [Nomenclature Description](#) for definition of feature codes.
- (6) Industrial Communication Subsystem Support is available when selecting an orderable part number that includes a feature code of D, E, or F. Refer to [Nomenclature Description](#) for definition of feature codes.

5.1 Related Products

Sitara™ processors Broad family of scalable processors based on Arm® Cortex®-A cores with flexible accelerators, peripherals, connectivity and unified software support – perfect for sensors to servers. Sitara processors have the reliability needed for use in industrial applications.

AM64x Sitara™ processors AM6x processors enable gigabit industrial Ethernet networks, robust operation with extensive ECC on memories, and enhanced security features. Additional features such as an integrated lockstep MCU subsystem and diagnostic libraries help enable functional safety systems.

Sitara™ processors - Applications Sitara™ processors provide scalable solutions for a wide range of applications from HMI and gateways to more complex equipment such as drives and substation automation equipment. Sitara processors also offer multi-protocol support for industrial communication protocols such as EtherCAT®, Ethernet/IP, and Profinet.

Sitara™ processors - Reference designs TI provides many reference designs containing 'building block' solutions to enable customers to rapidly develop their own unique products and solutions.

Companion Products for AM64x Review products that are frequently purchased or used in conjunction with this product to complete your design.


6 Terminal Configuration and Functions

6.1 Pin Diagrams

Note

The terms "ball", "pin", and "terminal" are used interchangeably throughout the document. An attempt is made to use "ball" only when referring to the physical package.

Figure 6-1 shows the ball locations for the 441-ball flip chip ball grid array (FCBGA) package to quickly locate signal names and ball grid numbering. This figure is used in conjunction with Table 6-1 through Table 6-80 (Pin Attributes table and all Signal Descriptions tables, including the Connectivity Requirements table).

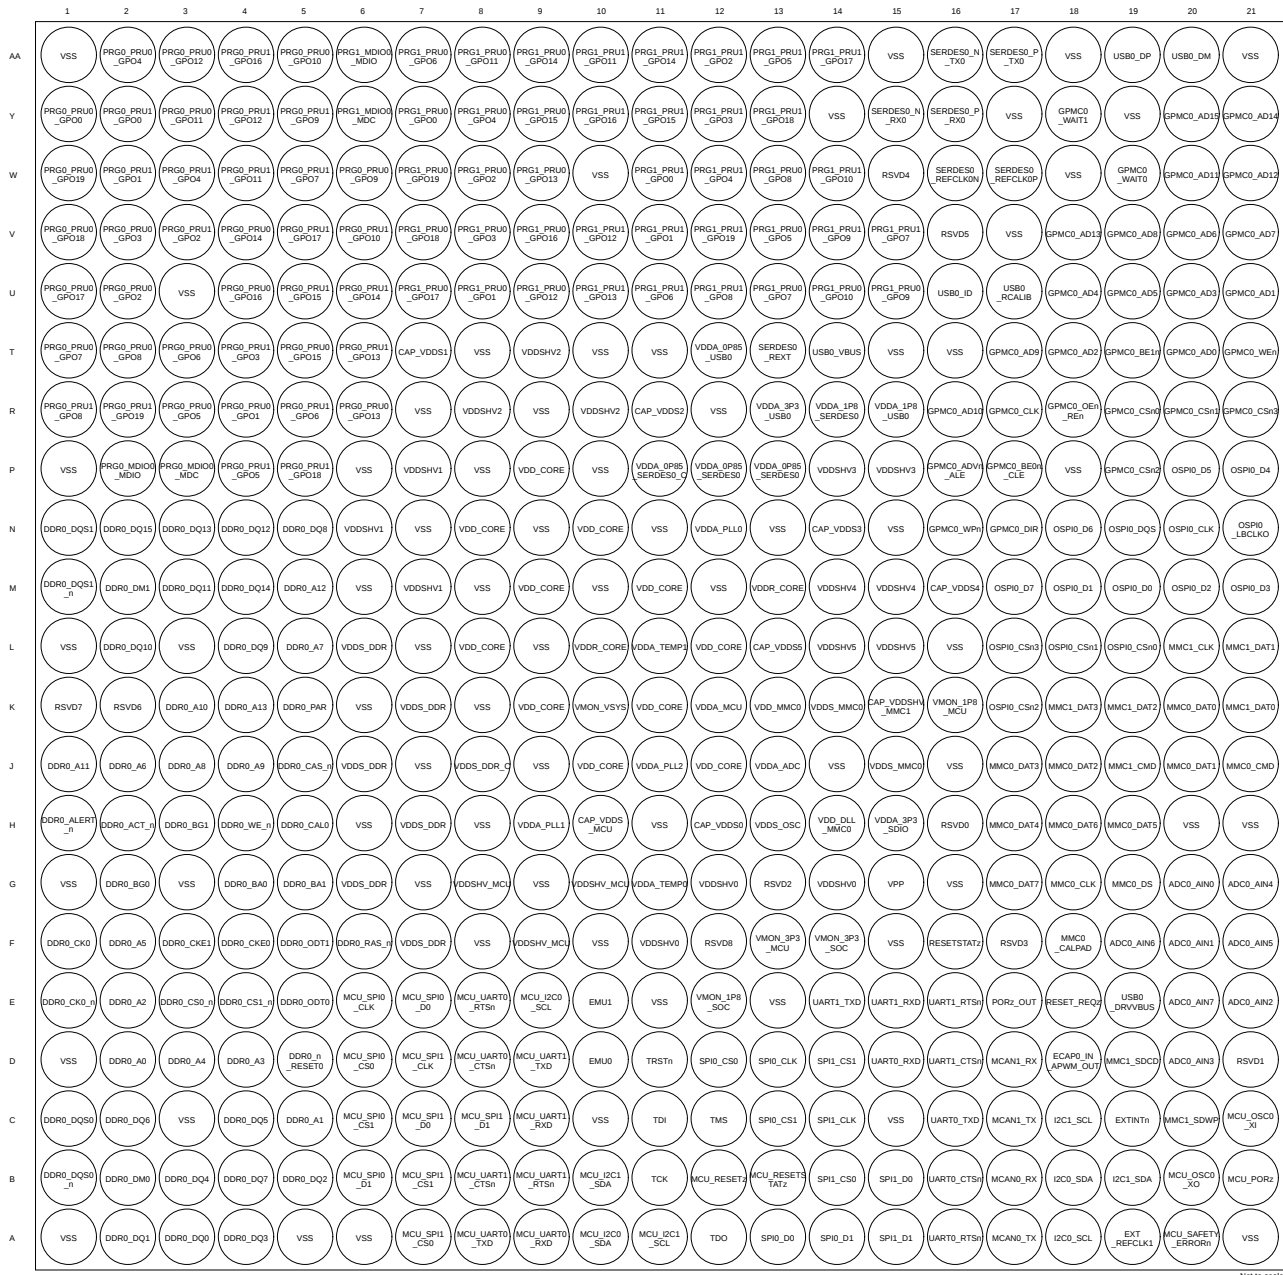

ADVANCE INFORMATION

Figure 6-1. ALV FCBGA-N441 Pin Diagram (Bottom View)

6.2 Pin Attributes

The following list describes the contents of each column in [Table 6-1, Pin Attributes](#):

1. **BALL NUMBER:** Ball numbers assigned to each terminal of the Ball Grid Array package.
2. **BALL NAME:** Ball name assigned to each terminal of the Ball Grid Array package (this name is typically taken from the primary MUXMODE 0 signal function).
3. **SIGNAL NAME:** Signal name(s) of all dedicated and pin multiplexed signal functions associated with a ball.

Note

Many device pins support multiple signal functions. Some signal functions are selected via a single layer of multiplexers associated with pins. Other signal functions are selected via two or more layers of multiplexers, where one layer is associated with the pins and other layers are associated with peripheral logic functions.

[Table 6-1, Pin Attributes](#) only defines signal multiplexing at the pins. For more information, related to signal multiplexing at the pins, see the *Pad Configuration Registers* section in the *Device Configuration* chapter of the device TRM. For information associated with peripheral signal multiplexing, see the respective peripheral chapter in the device TRM.

4. **MUX MODE:** The MUXMODE value associated with each pin multiplexed signal function:
 - a. MUXMODE 0 is the primary pin multiplexed signal function. However, the primary pin multiplexed signal function is not necessarily the default pin multiplexed signal function.

Note

The value found in the MUX MODE AFTER RESET column defines the default pin multiplexed signal function selected when MCU_PORz is deasserted.

- b. MUXMODE values 1 through 15 are possible for pin multiplexed signal functions. However, not all MUXMODE values have been implemented. The only valid MUXMODE values are those defined as pin multiplexed signal functions within the [Pin Attributes](#) table. Only valid values of MUXMODE should be used.
- c. Bootstrap defines SOC configuration pins, where the logic state applied to each pin is latched on the rising edge of PORz_OUT. These input signal functions are fixed to their respective pins and are not programmable via MUXMODE.
- d. An empty box means Not Applicable.

Note

The following configurations of MUXMODE must be avoided for proper device operation.

- Configuring multiple pins operating as inputs to the same pin multiplexed signal function is not supported as it can yield unexpected results.
 - Configuring a pin to an undefined pin multiplexing mode will cause the pin behavior to be undefined.
-

5. **TYPE:** Signal type and direction:
 - I = Input
 - O = Output
 - IO = Input, Output, or simultaneously Input and Output
 - IOD = Input, Output, or simultaneously Input and Output, with open-drain output function
 - IOZ = Input, Output, or simultaneously Input and Output, with three-state output function
 - OZ = Output with three-state output function
 - A = Analog
 - PWR = Power
 - GND = Ground
 - CAP = LDO Capacitor.

6. **DSIS:** The deselected input state (DSIS) indicates the state driven to the subsystem input (logic "0", logic "1", or "pad" level) when the pin multiplexed signal function is not selected by MUXMODE.
 - 0: Logic 0 driven to the subsystem input.
 - 1: Logic 1 driven to the subsystem input.
 - pad: Logic state of the pad is driven to the subsystem input.
 - An empty box means Not Applicable.

7. **BALL STATE DURING RESET RX/TX/PULL:** State of the terminal while MCU_PORz is asserted, where RX defines the state of the input buffer, TX defines the state of the output buffer, and PULL defines the state of internal pull resistors:
 - RX (Input buffer)
 - Off: The input buffer is disabled.
 - On: The input buffer is enabled.
 - TX (Output buffer)
 - Off: The output buffer is disabled.
 - Low: The output buffer is enabled and drives V_{OL} .
 - PULL (Internal pull resistors)
 - Off: Internal pull resistors are turned off.
 - Up: Internal pull-up resistor is turned on.
 - Down: Internal pull-down resistor is turned on.
 - An empty box means Not Applicable.

8. **BALL STATE AFTER RESET RX/TX/PULL:** State of the terminal after MCU_PORz is deasserted, where RX defines the state of the input buffer, TX defines the state of the output buffer, and PULL defines the state of internal pull resistors:
 - RX (Input buffer)
 - Off: The input buffer is disabled.
 - On: The input buffer is enabled.
 - TX (Output buffer)
 - Off: The output buffer is disabled.
 - SS: The subsystem selected with MUXMODE determines the output buffer state.
 - PULL (Internal pull resistors)
 - Off: Internal pull resistors are turned off.
 - Up: Internal pull-up resistor is turned on.
 - Down: Internal pull-down resistor is turned on.
 - An empty box means Not Applicable.

9. **MUX MODE AFTER RESET:** The value found in this column defines the default pin multiplexed signal function after MCU_PORz is deasserted.
An empty box means Not Applicable.

10. **I/O OPERATING VOLTAGE:** This column describes I/O operating voltage options of the respective power supply, when applicable.

An empty box means Not Applicable.

For more information, see valid operating voltage range(s) defined for each power supply in [Section 7.4](#), *Recommended Operating Conditions*.

11. **POWER:** The power supply of the associated I/O, when applicable.

An empty box means Not Applicable.

12. **HYS:** Indicates if the input buffer associated with this I/O has hysteresis:

- Yes: With hysteresis
- No: Without hysteresis
- An empty box means Not Applicable.

For more information, see the hysteresis values in [Section 7.7](#), *Electrical Characteristics*.

13. **BUFFER TYPE:** This column defines the buffer type associated with a terminal. This information can be used to determine which Electrical Characteristics table is applicable.

An empty box means Not Applicable.

For electrical characteristics, refer to the appropriate buffer type table in [Section 7.7](#), *Electrical Characteristics*.

14. **PULL UP/DOWN TYPE:** Indicates the presence of an internal pullup or pulldown resistor. Pullup and pulldown resistors can be enabled or disabled via software.

- PU: Internal pull-up
- PD: Internal pull-down
- PU/PD: Internal pull-up and pull-down
- An empty box means No internal pull.

15. **PADCONFIG Register:** Name of the IO pad configuration register associated with Ball.

16. **PADCONFIG Address:** Physical address of the IO pad configuration register associated with Ball.

Table 6-1. Pin Attributes (ALV Package)

| BALL NUMBER [1] | BALL NAME [2] PADCONFIG Register [15] PADCONFIG Address [16] | SIGNAL NAME [3] | MUX MODE [4] | TYPE [5] | DSIS [6] | BALL STATE DURING RESET RX/TX/PULL [7] | BALL STATE AFTER RESET RX/TX/PULL [8] | MUX MODE AFTER RESET [9] | I/O OPERATING VOLTAGE [10] | POWER [11] | HYS [12] | BUFFER TYPE [13] | PULL UP/DOWN TYPE [14] |
|-----------------|--|-----------------|--------------|----------|----------|--|---------------------------------------|--------------------------|----------------------------|----------------------|----------|------------------|------------------------|
| G20 | ADC0_AIN0 | ADC0_AIN0 | | A | | | | | 1.8 V | VDDA_ADC0 | Yes | ADC12B | |
| F20 | ADC0_AIN1 | ADC0_AIN1 | | A | | | | | 1.8 V | VDDA_ADC0 | Yes | ADC12B | |
| E21 | ADC0_AIN2 | ADC0_AIN2 | | A | | | | | 1.8 V | VDDA_ADC0 | Yes | ADC12B | |
| D20 | ADC0_AIN3 | ADC0_AIN3 | | A | | | | | 1.8 V | VDDA_ADC0 | Yes | ADC12B | |
| G21 | ADC0_AIN4 | ADC0_AIN4 | | A | | | | | 1.8 V | VDDA_ADC0 | Yes | ADC12B | |
| F21 | ADC0_AIN5 | ADC0_AIN5 | | A | | | | | 1.8 V | VDDA_ADC0 | Yes | ADC12B | |
| F19 | ADC0_AIN6 | ADC0_AIN6 | | A | | | | | 1.8 V | VDDA_ADC0 | Yes | ADC12B | |
| E20 | ADC0_AIN7 | ADC0_AIN7 | | A | | | | | 1.8 V | VDDA_ADC0 | Yes | ADC12B | |
| H12 | CAP_VDDS0 | CAP_VDDS0 | | CAP | | | | | | | | | |
| T7 | CAP_VDDS1 | CAP_VDDS1 | | CAP | | | | | | | | | |
| R11 | CAP_VDDS2 | CAP_VDDS2 | | CAP | | | | | | | | | |
| N14 | CAP_VDDS3 | CAP_VDDS3 | | CAP | | | | | | | | | |
| M16 | CAP_VDDS4 | CAP_VDDS4 | | CAP | | | | | | | | | |
| L13 | CAP_VDDS5 | CAP_VDDS5 | | CAP | | | | | | | | | |
| K15 | CAP_VDDSHV_MMC1 | CAP_VDDSHV_MMC1 | | CAP | | | | | | | | | |
| H10 | CAP_VDDS_MCU | CAP_VDDS_MCU | | CAP | | | | | | | | | |
| H2 | DDR0_ACT_n | DDR0_ACT_n | | O | | | | | 1.1 V/1.2 V | VDDS_DDR, VDDS_DDR_C | | DDR | |
| H1 | DDR0_ALERT_n | DDR0_ALERT_n | | IO | | | | | 1.1 V/1.2 V | VDDS_DDR, VDDS_DDR_C | | DDR | |
| J5 | DDR0_CAS_n | DDR0_CAS_n | | O | | | | | 1.1 V/1.2 V | VDDS_DDR, VDDS_DDR_C | | DDR | |
| K5 | DDR0_PAR | DDR0_PAR | | O | | | | | 1.1 V/1.2 V | VDDS_DDR, VDDS_DDR_C | | DDR | |
| F6 | DDR0_RAS_n | DDR0_RAS_n | | O | | | | | 1.1 V/1.2 V | VDDS_DDR, VDDS_DDR_C | | DDR | |
| H4 | DDR0_WE_n | DDR0_WE_n | | O | | | | | 1.1 V/1.2 V | VDDS_DDR, VDDS_DDR_C | | DDR | |
| D2 | DDR0_A0 | DDR0_A0 | | O | | | | | 1.1 V/1.2 V | VDDS_DDR, VDDS_DDR_C | | DDR | |
| C5 | DDR0_A1 | DDR0_A1 | | O | | | | | 1.1 V/1.2 V | VDDS_DDR, VDDS_DDR_C | | DDR | |
| E2 | DDR0_A2 | DDR0_A2 | | O | | | | | 1.1 V/1.2 V | VDDS_DDR, VDDS_DDR_C | | DDR | |
| D4 | DDR0_A3 | DDR0_A3 | | O | | | | | 1.1 V/1.2 V | VDDS_DDR, VDDS_DDR_C | | DDR | |
| D3 | DDR0_A4 | DDR0_A4 | | O | | | | | 1.1 V/1.2 V | VDDS_DDR, VDDS_DDR_C | | DDR | |
| F2 | DDR0_A5 | DDR0_A5 | | O | | | | | 1.1 V/1.2 V | VDDS_DDR, VDDS_DDR_C | | DDR | |

Table 6-1. Pin Attributes (ALV Package) (continued)

| BALL NUMBER [1] | BALL NAME [2] PADCONFIG Register [15] PADCONFIG Address [16] | SIGNAL NAME [3] | MUX MODE [4] | TYPE [5] | DSIS [6] | BALL STATE DURING RESET RX/TX/PULL [7] | BALL STATE AFTER RESET RX/TX/PULL [8] | MUX MODE AFTER RESET [9] | I/O OPERATING VOLTAGE [10] | POWER [11] | HYS [12] | BUFFER TYPE [13] | PULL UP/DOWN TYPE [14] |
|-----------------|--|-----------------|--------------|----------|----------|---|--|--------------------------|----------------------------|-----------------------|----------|------------------|------------------------|
| J2 | DDR0_A6 | DDR0_A6 | | O | | | | | 1.1 V/1.2 V | VDDSDDR, VDDSDDR_C | | DDR | |
| L5 | DDR0_A7 | DDR0_A7 | | O | | | | | 1.1 V/1.2 V | VDDSDDR, VDDSDDR_C | | DDR | |
| J3 | DDR0_A8 | DDR0_A8 | | O | | | | | 1.1 V/1.2 V | VDDSDDR, VDDSDDR_C | | DDR | |
| J4 | DDR0_A9 | DDR0_A9 | | O | | | | | 1.1 V/1.2 V | VDDSDDR, VDDSDDR_C | | DDR | |
| K3 | DDR0_A10 | DDR0_A10 | | O | | | | | 1.1 V/1.2 V | VDDSDDR, VDDSDDR_C | | DDR | |
| J1 | DDR0_A11 | DDR0_A11 | | O | | | | | 1.1 V/1.2 V | VDDSDDR, VDDSDDR_C | | DDR | |
| M5 | DDR0_A12 | DDR0_A12 | | O | | | | | 1.1 V/1.2 V | VDDSDDR, VDDSDDR_C | | DDR | |
| K4 | DDR0_A13 | DDR0_A13 | | O | | | | | 1.1 V/1.2 V | VDDSDDR, VDDSDDR_C | | DDR | |
| G4 | DDR0_BA0 | DDR0_BA0 | | O | | | | | 1.1 V/1.2 V | VDDSDDR, VDDSDDR_C | | DDR | |
| G5 | DDR0_BA1 | DDR0_BA1 | | O | | | | | 1.1 V/1.2 V | VDDSDDR, VDDSDDR_C | | DDR | |
| G2 | DDR0_BG0 | DDR0_BG0 | | O | | | | | 1.1 V/1.2 V | VDDSDDR, VDDSDDR_C | | DDR | |
| H3 | DDR0_BG1 | DDR0_BG1 | | O | | | | | 1.1 V/1.2 V | VDDSDDR, VDDSDDR_C | | DDR | |
| H5 | DDR0_CAL0 | DDR0_CAL0 | | A | | | | | 1.1 V/1.2 V | VDDSDDR, VDDSDDR_C | | DDR | |
| F1 | DDR0_CK0 | DDR0_CK0 | | O | | | | | 1.1 V/1.2 V | VDDSDDR, VDDSDDR_C | | DDR | |
| E1 | DDR0_CK0_n | DDR0_CK0_n | | O | | | | | 1.1 V/1.2 V | VDDSDDR, VDDSDDR_C | | DDR | |
| F4 | DDR0_CKE0 | DDR0_CKE0 | | O | | | | | 1.1 V/1.2 V | VDDSDDR, VDDSDDR_C | | DDR | |
| F3 | DDR0_CKE1 | DDR0_CKE1 | | O | | | | | 1.1 V/1.2 V | VDDSDDR, VDDSDDR_C | | DDR | |
| E3 | DDR0_CS0_n | DDR0_CS0_n | | O | | | | | 1.1 V/1.2 V | VDDSDDR, VDDSDDR_C | | DDR | |
| E4 | DDR0_CS1_n | DDR0_CS1_n | | O | | | | | 1.1 V/1.2 V | VDDSDDR, VDDSDDR_C | | DDR | |
| B2 | DDR0_DM0 | DDR0_DM0 | | IO | | | | | 1.1 V/1.2 V | VDDSDDR, VDDSDDR_C | | DDR | |
| M2 | DDR0_DM1 | DDR0_DM1 | | IO | | | | | 1.1 V/1.2 V | VDDSDDR, VDDSDDR_C | | DDR | |
| A3 | DDR0_DQ0 | DDR0_DQ0 | | IO | | | | | 1.1 V/1.2 V | VDDSDDR, VDDSDDR_C | | DDR | |
| A2 | DDR0_DQ1 | DDR0_DQ1 | | IO | | | | | 1.1 V/1.2 V | VDDSDDR, VDDSDDR_C | | DDR | |

ADVANCE INFORMATION

Table 6-1. Pin Attributes (ALV Package) (continued)

| BALL NUMBER [1] | BALL NAME [2] PADCONFIG Register [15] PADCONFIG Address [16] | SIGNAL NAME [3] | MUX MODE [4] | TYPE [5] | DSIS [6] | BALL STATE DURING RESET RX/TX/PULL [7] | BALL STATE AFTER RESET RX/TX/PULL [8] | MUX MODE AFTER RESET [9] | I/O OPERATING VOLTAGE [10] | POWER [11] | HYS [12] | BUFFER TYPE [13] | PULL UP/DOWN TYPE [14] |
|-----------------|--|-----------------|--------------|----------|----------|---|--|--------------------------|----------------------------|-------------------------|----------|------------------|------------------------|
| B5 | DDR0_DQ2 | DDR0_DQ2 | | IO | | | | | 1.1 V/1.2 V | VDDS_DDR, VDDS_DDR_C | | DDR | |
| A4 | DDR0_DQ3 | DDR0_DQ3 | | IO | | | | | 1.1 V/1.2 V | VDDS_DDR, VDDS_DDR_C | | DDR | |
| B3 | DDR0_DQ4 | DDR0_DQ4 | | IO | | | | | 1.1 V/1.2 V | VDDS_DDR, VDDS_DDR_C | | DDR | |
| C4 | DDR0_DQ5 | DDR0_DQ5 | | IO | | | | | 1.1 V/1.2 V | VDDS_DDR, VDDS_DDR_C | | DDR | |
| C2 | DDR0_DQ6 | DDR0_DQ6 | | IO | | | | | 1.1 V/1.2 V | VDDS_DDR, VDDS_DDR_C | | DDR | |
| B4 | DDR0_DQ7 | DDR0_DQ7 | | IO | | | | | 1.1 V/1.2 V | VDDS_DDR, VDDS_DDR_C | | DDR | |
| N5 | DDR0_DQ8 | DDR0_DQ8 | | IO | | | | | 1.1 V/1.2 V | VDDS_DDR, VDDS_DDR_C | | DDR | |
| L4 | DDR0_DQ9 | DDR0_DQ9 | | IO | | | | | 1.1 V/1.2 V | VDDS_DDR, VDDS_DDR_C | | DDR | |
| L2 | DDR0_DQ10 | DDR0_DQ10 | | IO | | | | | 1.1 V/1.2 V | VDDS_DDR, VDDS_DDR_C | | DDR | |
| M3 | DDR0_DQ11 | DDR0_DQ11 | | IO | | | | | 1.1 V/1.2 V | VDDS_DDR, VDDS_DDR_C | | DDR | |
| N4 | DDR0_DQ12 | DDR0_DQ12 | | IO | | | | | 1.1 V/1.2 V | VDDS_DDR, VDDS_DDR_C | | DDR | |
| N3 | DDR0_DQ13 | DDR0_DQ13 | | IO | | | | | 1.1 V/1.2 V | VDDS_DDR, VDDS_DDR_C | | DDR | |
| M4 | DDR0_DQ14 | DDR0_DQ14 | | IO | | | | | 1.1 V/1.2 V | VDDS_DDR, VDDS_DDR_C | | DDR | |
| N2 | DDR0_DQ15 | DDR0_DQ15 | | IO | | | | | 1.1 V/1.2 V | VDDS_DDR, VDDS_DDR_C | | DDR | |
| C1 | DDR0_DQS0 | DDR0_DQS0 | | IO | | | | | 1.1 V/1.2 V | VDDS_DDR, VDDS_DDR_C | | DDR | |
| B1 | DDR0_DQS0_n | DDR0_DQS0_n | | IO | | | | | 1.1 V/1.2 V | VDDS_DDR, VDDS_DDR_C | | DDR | |
| N1 | DDR0_DQS1 | DDR0_DQS1 | | IO | | | | | 1.1 V/1.2 V | VDDS_DDR, VDDS_DDR_C | | DDR | |
| M1 | DDR0_DQS1_n | DDR0_DQS1_n | | IO | | | | | 1.1 V/1.2 V | VDDS_DDR, VDDS_DDR_C | | DDR | |
| E5 | DDR0_ODT0 | DDR0_ODT0 | | O | | | | | 1.1 V/1.2 V | VDDS_DDR, VDDS_DDR_C | | DDR | |
| F5 | DDR0_ODT1 | DDR0_ODT1 | | O | | | | | 1.1 V/1.2 V | VDDS_DDR, VDDS_DDR_C | | DDR | |
| D5 | DDR0_RESET0_n | DDR0_RESET0_n | | O | | | | | 1.1 V/1.2 V | VDDS_DDR, VDDS_DDR_C | | DDR | |

Table 6-1. Pin Attributes (ALV Package) (continued)

| BALL NUMBER [1] | BALL NAME [2] PADCONFIG Register [15] PADCONFIG Address [16] | SIGNAL NAME [3] | MUX MODE [4] | TYPE [5] | DSIS [6] | BALL STATE DURING RESET RX/TX/PULL [7] | BALL STATE AFTER RESET RX/TX/PULL [8] | MUX MODE AFTER RESET [9] | I/O OPERATING VOLTAGE [10] | POWER [11] | HYS [12] | BUFFER TYPE [13] | PULL UP/DOWN TYPE [14] |
|-----------------|--|------------------------|--------------|----------|----------|---|--|--------------------------|----------------------------|------------|----------|------------------|------------------------|
| D18 | ECAP0_IN_APWM_OUT PADCONFIG: PADCONFIG156 0x000F4270 | ECAP0_IN_APWM_OUT | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV0 | Yes | LVCMOS | PU/PD |
| | | SYNC0_OUT | 1 | O | | | | | | | | | |
| | | CPTS0_RFT_CLK | 2 | I | 0 | | | | | | | | |
| | | CP_GEMAC_CPTS0_RFT_CLK | 5 | I | 0 | | | | | | | | |
| | | SPI4_CS3 | 6 | IO | 1 | | | | | | | | |
| | | GPIO1_68 | 7 | IO | pad | | | | | | | | |
| D10 | EMU0 PADCONFIG: MCU_PADCONFIG31 0x0408407C | EMU0 | 0 | IO | | On / Off / Up | On / Off / Up | 0 | 1.8 V/3.3 V | VDDSHV_MCU | Yes | LVCMOS | PU/PD |
| E10 | EMU1 PADCONFIG: MCU_PADCONFIG32 0x04084080 | EMU1 | 0 | IO | | On / Off / Up | On / Off / Up | 0 | 1.8 V/3.3 V | VDDSHV_MCU | Yes | LVCMOS | PU/PD |
| | | MCU_OBSCLK0 | 15 | O | | | | | | | | | |
| C19 | EXTINTn PADCONFIG: PADCONFIG158 0x000F4278 | EXTINTn | 0 | I | 1 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV0 | Yes | I2C OD FS | |
| | | GPIO1_70 | 7 | IO | pad | | | | | | | | |
| A19 | EXT_REFCLK1 PADCONFIG: PADCONFIG157 0x000F4274 | EXT_REFCLK1 | 0 | I | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV0 | Yes | LVCMOS | PU/PD |
| | | SYNC1_OUT | 1 | O | | | | | | | | | |
| | | SPI2_CS3 | 2 | IO | 1 | | | | | | | | |
| | | CLKOUT0 | 5 | O | | | | | | | | | |
| | | GPIO1_69 | 7 | IO | pad | | | | | | | | |
| P16 | GPMC0_ADVn_ALE PADCONFIG: PADCONFIG33 0x000F4084 | GPMC0_ADVn_ALE | 0 | O | | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV3 | Yes | LVCMOS | PU/PD |
| | | FSI_RX5_CLK | 1 | I | 0 | | | | | | | | |
| | | UART5_RXD | 2 | I | 1 | | | | | | | | |
| | | EHRPWM_TZn_IN3 | 3 | I | 0 | | | | | | | | |
| | | TRC_DATA15 | 6 | O | | | | | | | | | |
| | | GPIO0_32 | 7 | IO | pad | | | | | | | | |
| | | PRG0_PWM3_TZ_IN | 9 | I | 0 | | | | | | | | |
| R17 | GPMC0_CLK PADCONFIG: PADCONFIG31 0x000F407C | GPMC0_CLK | 0 | O | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV3 | Yes | LVCMOS | PU/PD |
| | | FSI_RX4_CLK | 1 | I | 0 | | | | | | | | |
| | | UART4_RTSn | 2 | O | | | | | | | | | |
| | | EHRPWM3_SYNC0 | 3 | O | | | | | | | | | |
| | | GPMC0_FCLK_MUX | 4 | O | | | | | | | | | |
| | | TRC_DATA14 | 6 | O | | | | | | | | | |
| | | GPIO0_31 | 7 | IO | pad | | | | | | | | |
| | | PRG0_PWM3_TZ_OUT | 9 | O | | | | | | | | | |

Table 6-1. Pin Attributes (ALV Package) (continued)

| BALL NUMBER [1] | BALL NAME [2] PADCONFIG Register [15] PADCONFIG Address [16] | SIGNAL NAME [3] | MUX MODE [4] | TYPE [5] | DSIS [6] | BALL STATE DURING RESET RX/TX/PULL [7] | BALL STATE AFTER RESET RX/TX/PULL [8] | MUX MODE AFTER RESET [9] | I/O OPERATING VOLTAGE [10] | POWER [11] | HYS [12] | BUFFER TYPE [13] | PULL UP/DOWN TYPE [14] |
|-----------------|--|-----------------|--------------|----------|----------|---|--|--------------------------|----------------------------|------------|----------|------------------|------------------------|
| N17 | GPMC0_DIR PADCONFIG: PADCONFIG41 0x000F40A4 | GPMC0_DIR | 0 | O | | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV3 | Yes | LVCMOS | PU/PD |
| | | EQEP0_B | 3 | I | 0 | | | | | | | | |
| | | GPIO0_40 | 7 | IO | pad | | | | | | | | |
| | | EHRPWM6_B | 8 | IO | 0 | | | | | | | | |
| | | PRG1_PWM2_B0 | 9 | IO | 1 | | | | | | | | |
| R18 | GPMC0_OEn_REn PADCONFIG: PADCONFIG34 0x000F4088 | GPMC0_OEn_REn | 0 | O | | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV3 | Yes | LVCMOS | PU/PD |
| | | FSI_RX5_D0 | 1 | I | 0 | | | | | | | | |
| | | UART5_TXD | 2 | O | | | | | | | | | |
| | | EHRPWM4_A | 3 | IO | 0 | | | | | | | | |
| | | TRC_DATA16 | 6 | O | | | | | | | | | |
| | | GPIO0_33 | 7 | IO | pad | | | | | | | | |
| T21 | GPMC0_WEn PADCONFIG: PADCONFIG35 0x000F408C | GPMC0_WEn | 0 | O | | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV3 | Yes | LVCMOS | PU/PD |
| | | FSI_RX5_D1 | 1 | I | 0 | | | | | | | | |
| | | UART5_RTSn | 2 | O | | | | | | | | | |
| | | EHRPWM4_B | 3 | IO | 0 | | | | | | | | |
| | | TRC_DATA17 | 6 | O | | | | | | | | | |
| | | GPIO0_34 | 7 | IO | pad | | | | | | | | |
| N16 | GPMC0_WPn PADCONFIG: PADCONFIG40 0x000F40A0 | GPMC0_WPn | 0 | O | | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV3 | Yes | LVCMOS | PU/PD |
| | | FSI_TX1_CLK | 1 | O | | | | | | | | | |
| | | EQEP0_A | 3 | I | 0 | | | | | | | | |
| | | GPMC0_A22 | 4 | OZ | | | | | | | | | |
| | | TRC_DATA22 | 6 | O | | | | | | | | | |
| | | GPIO0_39 | 7 | IO | pad | | | | | | | | |
| | | EHRPWM6_A | 8 | IO | 0 | | | | | | | | |
| PRG1_PWM2_A0 | 9 | IO | 0 | | | | | | | | | | |
| T20 | GPMC0_AD0 PADCONFIG: PADCONFIG15 0x000F403C | GPMC0_AD0 | 0 | IO | 0 | On / Off / Off | On / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV3 | Yes | LVCMOS | PU/PD |
| | | FSI_RX2_CLK | 1 | I | 0 | | | | | | | | |
| | | UART2_RXD | 2 | I | 1 | | | | | | | | |
| | | EHRPWM0_SYNCI | 3 | I | 0 | | | | | | | | |
| | | TRC_CLK | 6 | O | | | | | | | | | |
| | | GPIO0_15 | 7 | IO | pad | | | | | | | | |
| | | BOOTMODE00 | Bootstrap | I | | | | | | | | | |

ADVANCE INFORMATION

Table 6-1. Pin Attributes (ALV Package) (continued)

| BALL NUMBER [1] | BALL NAME [2] PADCONFIG Register [15] PADCONFIG Address [16] | SIGNAL NAME [3] | MUX MODE [4] | TYPE [5] | DSIS [6] | BALL STATE DURING RESET RX/TX/PULL [7] | BALL STATE AFTER RESET RX/TX/PULL [8] | MUX MODE AFTER RESET [9] | I/O OPERATING VOLTAGE [10] | POWER [11] | HYS [12] | BUFFER TYPE [13] | PULL UP/DOWN TYPE [14] |
|-----------------|--|------------------|--------------|----------|----------|---|--|--------------------------|----------------------------|------------|----------|------------------|------------------------|
| U21 | GPMC0_AD1 PADCONFIG: PADCONFIG16 0x000F4040 | GPMC0_AD1 | 0 | IO | 0 | On / Off / Off | On / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV3 | Yes | LVCMOS | PU/PD |
| | | FSI_RX2_D0 | 1 | I | 0 | | | | | | | | |
| | | UART2_TXD | 2 | O | | | | | | | | | |
| | | EHRPWM0_SYNC0 | 3 | O | | | | | | | | | |
| | | TRC_CTL | 6 | O | | | | | | | | | |
| | | GPIO0_16 | 7 | IO | pad | | | | | | | | |
| | | PRG0_PWM2_TZ_OUT | 9 | O | | | | | | | | | |
| | | BOOTMODE01 | Bootstrap | I | | | | | | | | | |
| T18 | GPMC0_AD2 PADCONFIG: PADCONFIG17 0x000F4044 | GPMC0_AD2 | 0 | IO | 0 | On / Off / Off | On / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV3 | Yes | LVCMOS | PU/PD |
| | | FSI_RX2_D1 | 1 | I | 0 | | | | | | | | |
| | | UART2_RTSn | 2 | O | | | | | | | | | |
| | | EHRPWM_TZn_IN0 | 3 | I | 0 | | | | | | | | |
| | | TRC_DATA0 | 6 | O | | | | | | | | | |
| | | GPIO0_17 | 7 | IO | pad | | | | | | | | |
| | | PRG0_PWM2_TZ_IN | 9 | I | 0 | | | | | | | | |
| | | BOOTMODE02 | Bootstrap | I | | | | | | | | | |
| U20 | GPMC0_AD3 PADCONFIG: PADCONFIG18 0x000F4048 | GPMC0_AD3 | 0 | IO | 0 | On / Off / Off | On / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV3 | Yes | LVCMOS | PU/PD |
| | | FSI_RX3_CLK | 1 | I | 0 | | | | | | | | |
| | | UART3_RXD | 2 | I | 1 | | | | | | | | |
| | | EHRPWM0_A | 3 | IO | 0 | | | | | | | | |
| | | TRC_DATA1 | 6 | O | | | | | | | | | |
| | | GPIO0_18 | 7 | IO | pad | | | | | | | | |
| | | PRG0_PWM2_A0 | 9 | IO | 0 | | | | | | | | |
| | | BOOTMODE03 | Bootstrap | I | | | | | | | | | |
| U18 | GPMC0_AD4 PADCONFIG: PADCONFIG19 0x000F404C | GPMC0_AD4 | 0 | IO | 0 | On / Off / Off | On / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV3 | Yes | LVCMOS | PU/PD |
| | | FSI_RX3_D0 | 1 | I | 0 | | | | | | | | |
| | | UART3_TXD | 2 | O | | | | | | | | | |
| | | EHRPWM0_B | 3 | IO | 0 | | | | | | | | |
| | | TRC_DATA2 | 6 | O | | | | | | | | | |
| | | GPIO0_82 | 7 | IO | pad | | | | | | | | |
| | | PRG0_PWM2_B0 | 9 | IO | 1 | | | | | | | | |
| | | BOOTMODE04 | Bootstrap | I | | | | | | | | | |

Table 6-1. Pin Attributes (ALV Package) (continued)

| BALL NUMBER [1] | BALL NAME [2] PADCONFIG Register [15] PADCONFIG Address [16] | SIGNAL NAME [3] | MUX MODE [4] | TYPE [5] | DSIS [6] | BALL STATE DURING RESET RX/TX/PULL [7] | BALL STATE AFTER RESET RX/TX/PULL [8] | MUX MODE AFTER RESET [9] | I/O OPERATING VOLTAGE [10] | POWER [11] | HYS [12] | BUFFER TYPE [13] | PULL UP/DOWN TYPE [14] |
|-----------------|--|-----------------|--------------|----------|----------|---|--|--------------------------|----------------------------|------------|----------|------------------|------------------------|
| U19 | GPMC0_AD5 PADCONFIG: PADCONFIG20 0x000F4050 | GPMC0_AD5 | 0 | IO | 0 | On / Off / Off | On / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV3 | Yes | LVCMOS | PU/PD |
| | | FSI_RX3_D1 | 1 | I | 0 | | | | | | | | |
| | | UART3_RTSn | 2 | O | | | | | | | | | |
| | | EHRPWM1_A | 3 | IO | 0 | | | | | | | | |
| | | TRC_DATA3 | 6 | O | | | | | | | | | |
| | | GPIO0_83 | 7 | IO | pad | | | | | | | | |
| | | PRG0_PWM2_A1 | 9 | IO | 0 | | | | | | | | |
| | | BOOTMODE05 | Bootstrap | I | | | | | | | | | |
| V20 | GPMC0_AD6 PADCONFIG: PADCONFIG21 0x000F4054 | GPMC0_AD6 | 0 | IO | 0 | On / Off / Off | On / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV3 | Yes | LVCMOS | PU/PD |
| | | FSI_RX4_D0 | 1 | I | 0 | | | | | | | | |
| | | UART4_RXD | 2 | I | 1 | | | | | | | | |
| | | EHRPWM1_B | 3 | IO | 0 | | | | | | | | |
| | | TRC_DATA4 | 6 | O | | | | | | | | | |
| | | GPIO0_21 | 7 | IO | pad | | | | | | | | |
| | | PRG0_PWM2_B1 | 9 | IO | 1 | | | | | | | | |
| | | BOOTMODE06 | Bootstrap | I | | | | | | | | | |
| V21 | GPMC0_AD7 PADCONFIG: PADCONFIG22 0x000F4058 | GPMC0_AD7 | 0 | IO | 0 | On / Off / Off | On / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV3 | Yes | LVCMOS | PU/PD |
| | | FSI_RX4_D1 | 1 | I | 0 | | | | | | | | |
| | | UART4_TXD | 2 | O | | | | | | | | | |
| | | EHRPWM_TZn_JN1 | 3 | I | 0 | | | | | | | | |
| | | EHRPWM8_A | 4 | IO | 0 | | | | | | | | |
| | | TRC_DATA5 | 6 | O | | | | | | | | | |
| | | GPIO0_22 | 7 | IO | pad | | | | | | | | |
| | | PRG1_PWM2_A2 | 9 | IO | 0 | | | | | | | | |
| BOOTMODE07 | Bootstrap | I | | | | | | | | | | | |
| V19 | GPMC0_AD8 PADCONFIG: PADCONFIG23 0x000F405C | GPMC0_AD8 | 0 | IO | 0 | On / Off / Off | On / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV3 | Yes | LVCMOS | PU/PD |
| | | FSI_RX0_CLK | 1 | I | 0 | | | | | | | | |
| | | UART2_CTSn | 2 | I | 1 | | | | | | | | |
| | | EHRPWM2_A | 3 | IO | 0 | | | | | | | | |
| | | TRC_DATA6 | 6 | O | | | | | | | | | |
| | | GPIO0_23 | 7 | IO | pad | | | | | | | | |
| | | PRG0_PWM2_A2 | 9 | IO | 0 | | | | | | | | |
| | | BOOTMODE08 | Bootstrap | I | | | | | | | | | |

ADVANCE INFORMATION

Table 6-1. Pin Attributes (ALV Package) (continued)

| BALL NUMBER [1] | BALL NAME [2] PADCONFIG Register [15] PADCONFIG Address [16] | SIGNAL NAME [3] | MUX MODE [4] | TYPE [5] | DSIS [6] | BALL STATE DURING RESET RX/TX/PULL [7] | BALL STATE AFTER RESET RX/TX/PULL [8] | MUX MODE AFTER RESET [9] | I/O OPERATING VOLTAGE [10] | POWER [11] | HYS [12] | BUFFER TYPE [13] | PULL UP/DOWN TYPE [14] |
|-----------------|--|-----------------|--------------|----------|----------|---|--|--------------------------|----------------------------|------------|----------|------------------|------------------------|
| T17 | GPMC0_AD9 PADCONFIG: PADCONFIG24 0x000F4060 | GPMC0_AD9 | 0 | IO | 0 | On / Off / Off | On / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV3 | Yes | LVCMOS | PU/PD |
| | | FSI_RX0_D0 | 1 | I | 0 | | | | | | | | |
| | | UART3_CTSn | 2 | I | 1 | | | | | | | | |
| | | EHRPWM2_B | 3 | IO | 0 | | | | | | | | |
| | | TRC_DATA7 | 6 | O | | | | | | | | | |
| | | GPIO0_24 | 7 | IO | pad | | | | | | | | |
| | | PRG0_PWM2_B2 | 9 | IO | 1 | | | | | | | | |
| | | BOOTMODE09 | Bootstrap | I | | | | | | | | | |
| R16 | GPMC0_AD10 PADCONFIG: PADCONFIG25 0x000F4064 | GPMC0_AD10 | 0 | IO | 0 | On / Off / Off | On / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV3 | Yes | LVCMOS | PU/PD |
| | | FSI_RX0_D1 | 1 | I | 0 | | | | | | | | |
| | | UART4_CTSn | 2 | I | 1 | | | | | | | | |
| | | EHRPWM_TZn_IN2 | 3 | I | 0 | | | | | | | | |
| | | EHRPWM8_B | 4 | IO | 0 | | | | | | | | |
| | | TRC_DATA8 | 6 | O | | | | | | | | | |
| | | GPIO0_25 | 7 | IO | pad | | | | | | | | |
| | | PRG1_PWM2_B2 | 9 | IO | 1 | | | | | | | | |
| BOOTMODE10 | Bootstrap | I | | | | | | | | | | | |
| W20 | GPMC0_AD11 PADCONFIG: PADCONFIG26 0x000F4068 | GPMC0_AD11 | 0 | IO | 0 | On / Off / Off | On / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV3 | Yes | LVCMOS | PU/PD |
| | | FSI_RX1_CLK | 1 | I | 0 | | | | | | | | |
| | | UART5_CTSn | 2 | I | 1 | | | | | | | | |
| | | EQEP1_A | 3 | I | 0 | | | | | | | | |
| | | TRC_DATA9 | 6 | O | | | | | | | | | |
| | | GPIO0_26 | 7 | IO | pad | | | | | | | | |
| | | EHRPWM7_A | 8 | IO | 0 | | | | | | | | |
| | | BOOTMODE11 | Bootstrap | I | | | | | | | | | |
| W21 | GPMC0_AD12 PADCONFIG: PADCONFIG27 0x000F406C | GPMC0_AD12 | 0 | IO | 0 | On / Off / Off | On / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV3 | Yes | LVCMOS | PU/PD |
| | | FSI_RX1_D0 | 1 | I | 0 | | | | | | | | |
| | | UART6_CTSn | 2 | I | 1 | | | | | | | | |
| | | EQEP1_B | 3 | I | 0 | | | | | | | | |
| | | TRC_DATA10 | 6 | O | | | | | | | | | |
| | | GPIO0_27 | 7 | IO | pad | | | | | | | | |
| | | EHRPWM7_B | 8 | IO | 0 | | | | | | | | |
| | | BOOTMODE12 | Bootstrap | I | | | | | | | | | |

Table 6-1. Pin Attributes (ALV Package) (continued)

| BALL NUMBER [1] | BALL NAME [2] PADCONFIG Register [15] PADCONFIG Address [16] | SIGNAL NAME [3] | MUX MODE [4] | TYPE [5] | DSIS [6] | BALL STATE DURING RESET RX/TX/PULL [7] | BALL STATE AFTER RESET RX/TX/PULL [8] | MUX MODE AFTER RESET [9] | I/O OPERATING VOLTAGE [10] | POWER [11] | HYS [12] | BUFFER TYPE [13] | PULL UP/DOWN TYPE [14] |
|-----------------|--|-----------------|--------------|----------|----------|---|--|--------------------------|----------------------------|------------|----------|------------------|------------------------|
| V18 | GPMC0_AD13 PADCONFIG: PADCONFIG28 0x000F4070 | GPMC0_AD13 | 0 | IO | 0 | On / Off / Off | On / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV3 | Yes | LVCMOS | PU/PD |
| | | FSI_RX1_D1 | 1 | I | 0 | | | | | | | | |
| | | EHRPWM3_A | 3 | IO | 0 | | | | | | | | |
| | | TRC_DATA11 | 6 | O | | | | | | | | | |
| | | GPIO0_28 | 7 | IO | pad | | | | | | | | |
| | | PRG0_PWM3_A0 | 9 | IO | 0 | | | | | | | | |
| | | BOOTMODE13 | Bootstrap | I | | | | | | | | | |
| Y21 | GPMC0_AD14 PADCONFIG: PADCONFIG29 0x000F4074 | GPMC0_AD14 | 0 | IO | 0 | On / Off / Off | On / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV3 | Yes | LVCMOS | PU/PD |
| | | FSI_TX0_D0 | 1 | O | | | | | | | | | |
| | | UART6_RXD | 2 | I | 1 | | | | | | | | |
| | | EHRPWM3_B | 3 | IO | 0 | | | | | | | | |
| | | TRC_DATA12 | 6 | O | | | | | | | | | |
| | | GPIO0_29 | 7 | IO | pad | | | | | | | | |
| | | PRG0_PWM3_B0 | 9 | IO | 1 | | | | | | | | |
| BOOTMODE14 | Bootstrap | I | | | | | | | | | | | |
| Y20 | GPMC0_AD15 PADCONFIG: PADCONFIG30 0x000F4078 | GPMC0_AD15 | 0 | IO | 0 | On / Off / Off | On / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV3 | Yes | LVCMOS | PU/PD |
| | | FSI_TX0_D1 | 1 | O | | | | | | | | | |
| | | UART6_TXD | 2 | O | | | | | | | | | |
| | | EHRPWM3_SYNCI | 3 | I | 0 | | | | | | | | |
| | | TRC_DATA13 | 6 | O | | | | | | | | | |
| | | GPIO0_30 | 7 | IO | pad | | | | | | | | |
| | | BOOTMODE15 | Bootstrap | I | | | | | | | | | |
| P17 | GPMC0_BE0n_CLE PADCONFIG: PADCONFIG36 0x000F4090 | GPMC0_BE0n_CLE | 0 | O | | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV3 | Yes | LVCMOS | PU/PD |
| | | FSI_TX1_D0 | 1 | O | | | | | | | | | |
| | | UART6_RTSn | 2 | O | | | | | | | | | |
| | | EHRPWM_TZn_IN4 | 3 | I | 0 | | | | | | | | |
| | | EHRPWM7_A | 5 | IO | 0 | | | | | | | | |
| | | TRC_DATA18 | 6 | O | | | | | | | | | |
| | | GPIO0_35 | 7 | IO | pad | | | | | | | | |
| PRG1_PWM2_A1 | 9 | IO | 0 | | | | | | | | | | |
| T19 | GPMC0_BE1n PADCONFIG: PADCONFIG37 0x000F4094 | GPMC0_BE1n | 0 | O | | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV3 | Yes | LVCMOS | PU/PD |
| | | FSI_TX0_CLK | 1 | O | | | | | | | | | |
| | | EHRPWM5_A | 3 | IO | 0 | | | | | | | | |
| | | TRC_DATA19 | 6 | O | | | | | | | | | |
| | | GPIO0_36 | 7 | IO | pad | | | | | | | | |
| PRG0_PWM3_A2 | 9 | IO | 0 | | | | | | | | | | |

ADVANCE INFORMATION

Table 6-1. Pin Attributes (ALV Package) (continued)

| BALL NUMBER [1] | BALL NAME [2] PADCONFIG Register [15] PADCONFIG Address [16] | SIGNAL NAME [3] | MUX MODE [4] | TYPE [5] | DSIS [6] | BALL STATE DURING RESET RX/TX/PULL [7] | BALL STATE AFTER RESET RX/TX/PULL [8] | MUX MODE AFTER RESET [9] | I/O OPERATING VOLTAGE [10] | POWER [11] | HYS [12] | BUFFER TYPE [13] | PULL UP/DOWN TYPE [14] |
|-----------------|--|------------------|--------------|----------|----------|---|--|--------------------------|----------------------------|------------|----------|------------------|------------------------|
| R19 | GPMC0_CSn0 PADCONFIG: PADCONFIG42 0x000F40A8 | GPMC0_CSn0 | 0 | O | | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV3 | Yes | LVCMOS | PU/PD |
| | | EQEP0_S | 3 | IO | 0 | | | | | | | | |
| | | TRC_DATA23 | 6 | O | | | | | | | | | |
| | | GPIO0_41 | 7 | IO | pad | | | | | | | | |
| | | EHRPWM6_SYNCI | 8 | I | 0 | | | | | | | | |
| R20 | GPMC0_CSn1 PADCONFIG: PADCONFIG43 0x000F40AC | GPMC0_CSn1 | 0 | O | | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV3 | Yes | LVCMOS | PU/PD |
| | | EQEP0_I | 3 | IO | 0 | | | | | | | | |
| | | EHRPWM_TZn_IN2 | 5 | I | 0 | | | | | | | | |
| | | GPIO0_42 | 7 | IO | pad | | | | | | | | |
| | | EHRPWM6_SYNCO | 8 | O | | | | | | | | | |
| | | PRG1_PWM2_TZ_OUT | 9 | O | | | | | | | | | |
| P19 | GPMC0_CSn2 PADCONFIG: PADCONFIG44 0x000F40B0 | GPMC0_CSn2 | 0 | O | | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV3 | Yes | LVCMOS | PU/PD |
| | | I2C2_SCL | 1 | IOD | 1 | | | | | | | | |
| | | TIMER_IO8 | 2 | IO | 0 | | | | | | | | |
| | | EQEP1_S | 3 | IO | 0 | | | | | | | | |
| | | EHRPWM_TZn_IN4 | 5 | I | 0 | | | | | | | | |
| | | GPIO0_43 | 7 | IO | pad | | | | | | | | |
| | | PRG1_PWM2_TZ_IN | 9 | I | 0 | | | | | | | | |
| R21 | GPMC0_CSn3 PADCONFIG: PADCONFIG45 0x000F40B4 | GPMC0_CSn3 | 0 | O | | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV3 | Yes | LVCMOS | PU/PD |
| | | I2C2_SDA | 1 | IOD | 1 | | | | | | | | |
| | | TIMER_IO9 | 2 | IO | 0 | | | | | | | | |
| | | EQEP1_I | 3 | IO | 0 | | | | | | | | |
| | | GPMC0_A20 | 4 | OZ | | | | | | | | | |
| | | EHRPWM_TZn_IN5 | 5 | I | 0 | | | | | | | | |
| | | GPIO0_44 | 7 | IO | pad | | | | | | | | |
| W19 | GPMC0_WAIT0 PADCONFIG: PADCONFIG38 0x000F4098 | GPMC0_WAIT0 | 0 | I | 1 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV3 | Yes | LVCMOS | PU/PD |
| | | EHRPWM5_B | 3 | IO | 0 | | | | | | | | |
| | | TRC_DATA20 | 6 | O | | | | | | | | | |
| | | GPIO0_37 | 7 | IO | pad | | | | | | | | |
| | | PRG0_PWM3_B2 | 9 | IO | 1 | | | | | | | | |

Table 6-1. Pin Attributes (ALV Package) (continued)

| BALL NUMBER [1] | BALL NAME [2] PADCONFIG Register [15] PADCONFIG Address [16] | SIGNAL NAME [3] | MUX MODE [4] | TYPE [5] | DSIS [6] | BALL STATE DURING RESET RX/TX/PULL [7] | BALL STATE AFTER RESET RX/TX/PULL [8] | MUX MODE AFTER RESET [9] | I/O OPERATING VOLTAGE [10] | POWER [11] | HYS [12] | BUFFER TYPE [13] | PULL UP/DOWN TYPE [14] |
|-----------------|--|-----------------|--------------|----------|----------|---|--|--------------------------|----------------------------|------------|----------|------------------|------------------------|
| Y18 | GPMC0_WAIT1 PADCONFIG: PADCONFIG39 0x000F409C | GPMC0_WAIT1 | 0 | I | 1 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV3 | Yes | LVCMOS | PU/PD |
| | | FSI_TX1_D1 | 1 | O | 0 | | | | | | | | |
| | | EHRPWM_TZn_IN5 | 3 | I | 0 | | | | | | | | |
| | | GPMC0_A21 | 4 | OZ | 0 | | | | | | | | |
| | | EHRPWM7_B | 5 | IO | 0 | | | | | | | | |
| | | TRC_DATA21 | 6 | O | 0 | | | | | | | | |
| | | GPIO0_38 | 7 | IO | pad | | | | | | | | |
| A18 | I2C0_SCL PADCONFIG: PADCONFIG152 0x000F4260 | I2C0_SCL | 0 | IOD | 1 | Off / Off / Off | On / SS / Off | 7 | 1.8 V/3.3 V | VDDSHV0 | Yes | I2C OD FS | |
| | | UART6_CTSn | 4 | I | 1 | | | | | | | | |
| | | GPIO1_64 | 7 | IO | pad | | | | | | | | |
| B18 | I2C0_SDA PADCONFIG: PADCONFIG153 0x000F4264 | I2C0_SDA | 0 | IOD | 1 | Off / Off / Off | On / SS / Off | 7 | 1.8 V/3.3 V | VDDSHV0 | Yes | I2C OD FS | |
| | | UART6_RTSn | 4 | O | 0 | | | | | | | | |
| | | GPIO1_65 | 7 | IO | pad | | | | | | | | |
| C18 | I2C1_SCL PADCONFIG: PADCONFIG154 0x000F4268 | I2C1_SCL | 0 | IOD | 1 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV0 | Yes | LVCMOS | PU/PD |
| | | CPTS0_HW1TSPUSH | 1 | I | 0 | | | | | | | | |
| | | TIMER_IO0 | 2 | IO | 0 | | | | | | | | |
| | | SPI2_CS1 | 3 | IO | 1 | | | | | | | | |
| B19 | I2C1_SDA PADCONFIG: PADCONFIG155 0x000F426C | I2C1_SDA | 0 | IOD | 1 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV0 | Yes | LVCMOS | PU/PD |
| | | CPTS0_HW2TSPUSH | 1 | I | 0 | | | | | | | | |
| | | TIMER_IO1 | 2 | IO | 0 | | | | | | | | |
| | | SPI2_CS2 | 3 | IO | 1 | | | | | | | | |
| B17 | MCAN0_RX PADCONFIG: PADCONFIG149 0x000F4254 | MCAN0_RX | 0 | I | 1 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV0 | Yes | LVCMOS | PU/PD |
| | | UART4_TXD | 1 | O | 0 | | | | | | | | |
| | | TIMER_IO3 | 2 | IO | 0 | | | | | | | | |
| | | SYNC3_OUT | 3 | O | 0 | | | | | | | | |
| | | SPI4_CS2 | 6 | IO | 1 | | | | | | | | |
| | | GPIO1_61 | 7 | IO | pad | | | | | | | | |
| | | EQEP2_S | 8 | IO | 0 | | | | | | | | |
| UART0_RIn | 9 | I | 1 | | | | | | | | | | |

Table 6-1. Pin Attributes (ALV Package) (continued)

| BALL NUMBER [1] | BALL NAME [2] PADCONFIG Register [15] PADCONFIG Address [16] | SIGNAL NAME [3] | MUX MODE [4] | TYPE [5] | DSIS [6] | BALL STATE DURING RESET RX/TX/PULL [7] | BALL STATE AFTER RESET RX/TX/PULL [8] | MUX MODE AFTER RESET [9] | I/O OPERATING VOLTAGE [10] | POWER [11] | HYS [12] | BUFFER TYPE [13] | PULL UP/DOWN TYPE [14] |
|-----------------|--|-------------------|--------------|----------|----------|---|--|--------------------------|----------------------------|------------|----------|------------------|------------------------|
| A17 | MCAN0_TX PADCONFIG: PADCONFIG148 0x000F4250 | MCAN0_TX | 0 | O | | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV0 | Yes | LVCMOS | PU/PD |
| | | UART4_RXD | 1 | I | 1 | | | | | | | | |
| | | TIMER_IO2 | 2 | IO | 0 | | | | | | | | |
| | | SYNC2_OUT | 3 | O | | | | | | | | | |
| | | SPI4_CS1 | 6 | IO | 1 | | | | | | | | |
| | | GPIO1_60 | 7 | IO | pad | | | | | | | | |
| | | EQEP2_I | 8 | IO | 0 | | | | | | | | |
| | | UART0_DTRn | 9 | O | | | | | | | | | |
| D17 | MCAN1_RX PADCONFIG: PADCONFIG151 0x000F425C | MCAN1_RX | 0 | I | 1 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV0 | Yes | LVCMOS | PU/PD |
| | | I2C3_SDA | 1 | IOD | 1 | | | | | | | | |
| | | ECAP2_IN_APWM_OUT | 2 | IO | 0 | | | | | | | | |
| | | OBSCCLK0 | 3 | O | | | | | | | | | |
| | | TIMER_IO5 | 4 | IO | 0 | | | | | | | | |
| | | UART5_TXD | 5 | O | | | | | | | | | |
| | | EHRPWM_SOCB | 6 | O | | | | | | | | | |
| | | GPIO1_63 | 7 | IO | pad | | | | | | | | |
| | | EQEP2_B | 8 | I | 0 | | | | | | | | |
| | | UART0_DSRn | 9 | I | 1 | | | | | | | | |
| OBSCCLK0 | 15 | O | | | | | | | | | | | |
| C17 | MCAN1_TX PADCONFIG: PADCONFIG150 0x000F4258 | MCAN1_TX | 0 | O | | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV0 | Yes | LVCMOS | PU/PD |
| | | I2C3_SCL | 1 | IOD | 1 | | | | | | | | |
| | | ECAP1_IN_APWM_OUT | 2 | IO | 0 | | | | | | | | |
| | | SYSCCLKOUT0 | 3 | O | | | | | | | | | |
| | | TIMER_IO4 | 4 | IO | 0 | | | | | | | | |
| | | UART5_RXD | 5 | I | 1 | | | | | | | | |
| | | EHRPWM_SOCA | 6 | O | | | | | | | | | |
| | | GPIO1_62 | 7 | IO | pad | | | | | | | | |
| | | EQEP2_A | 8 | I | 0 | | | | | | | | |
| UART0_DCDn | 9 | I | 1 | | | | | | | | | | |
| E9 | MCU_I2C0_SCL PADCONFIG: MCU_PADCONFIG18 0x04084048 | MCU_I2C0_SCL | 0 | IOD | 1 | Off / Off / Off | On / SS / Off | 7 | 1.8 V/3.3 V | VDDSHV_MCU | Yes | I2C OD FS | |
| | | MCU_GPIO0_18 | 7 | IO | pad | | | | | | | | |
| A10 | MCU_I2C0_SDA PADCONFIG: MCU_PADCONFIG19 0x0408404C | MCU_I2C0_SDA | 0 | IOD | 1 | Off / Off / Off | On / SS / Off | 7 | 1.8 V/3.3 V | VDDSHV_MCU | Yes | I2C OD FS | |
| | | MCU_GPIO0_19 | 7 | IO | pad | | | | | | | | |

ADVANCE INFORMATION

Table 6-1. Pin Attributes (ALV Package) (continued)

| BALL NUMBER [1] | BALL NAME [2] PADCONFIG Register [15] PADCONFIG Address [16] | SIGNAL NAME [3] | MUX MODE [4] | TYPE [5] | DSIS [6] | BALL STATE DURING RESET RX/TX/PULL [7] | BALL STATE AFTER RESET RX/TX/PULL [8] | MUX MODE AFTER RESET [9] | I/O OPERATING VOLTAGE [10] | POWER [11] | HYS [12] | BUFFER TYPE [13] | PULL UP/DOWN TYPE [14] |
|-----------------|--|-------------------|--------------|----------|----------|---|--|--------------------------|----------------------------|------------|----------|------------------|------------------------|
| A11 | MCU_I2C1_SCL PADCONFIG: MCU_PADCONFIG20 0x04084050 | MCU_I2C1_SCL | 0 | IOD | 1 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV_MCU | Yes | LVCMOS | PU/PD |
| | | MCU_GPIO0_20 | 7 | IO | pad | | | | | | | | |
| B10 | MCU_I2C1_SDA PADCONFIG: MCU_PADCONFIG21 0x04084054 | MCU_I2C1_SDA | 0 | IOD | 1 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV_MCU | Yes | LVCMOS | PU/PD |
| | | MCU_GPIO0_21 | 7 | IO | pad | | | | | | | | |
| C21 | MCU_OSC0_XI | MCU_OSC0_XI | | I | | | | | 1.8 V | VDDS_OSC | Yes | HFOSC | |
| B20 | MCU_OSC0_XO | MCU_OSC0_XO | | O | | | | | 1.8 V | VDDS_OSC | Yes | HFOSC | |
| B21 | MCU_PORz PADCONFIG: MCU_PADCONFIG23 0x0408405C | MCU_PORz | 0 | I | | | | 0 | 1.8 V | VDDS_OSC | Yes | FS RESET | |
| B13 | MCU_RESETSTATz PADCONFIG: MCU_PADCONFIG24 0x04084060 | MCU_RESETSTATz | 0 | O | | Off / Low / Off | Off / SS / Off | 0 | 1.8 V/3.3 V | VDDSHV_MCU | Yes | LVCMOS | PU/PD |
| | | MCU_GPIO0_22 | 7 | IO | pad | | | | | | | | |
| B12 | MCU_RESETz PADCONFIG: MCU_PADCONFIG22 0x04084058 | MCU_RESETz | 0 | I | | On / Off / Up | On / Off / Up | 0 | 1.8 V/3.3 V | VDDSHV_MCU | Yes | LVCMOS | PU/PD |
| A20 | MCU_SAFETY_ERRORn PADCONFIG: MCU_PADCONFIG25 0x04084064 | MCU_SAFETY_ERRORn | 0 | IO | | Off / Off / Down | On / SS / Down | 0 | 1.8 V | VDDS_OSC | Yes | LVCMOS | PU/PD |
| E6 | MCU_SPI0_CLK PADCONFIG: MCU_PADCONFIG2 0x04084008 | MCU_SPI0_CLK | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV_MCU | Yes | LVCMOS | PU/PD |
| | | MCU_GPIO0_11 | 7 | IO | pad | | | | | | | | |
| D7 | MCU_SPI1_CLK PADCONFIG: MCU_PADCONFIG7 0x0408401C | MCU_SPI1_CLK | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV_MCU | Yes | LVCMOS | PU/PD |
| | | MCU_GPIO0_7 | 7 | IO | pad | | | | | | | | |
| D6 | MCU_SPI0_CS0 PADCONFIG: MCU_PADCONFIG0 0x04084000 | MCU_SPI0_CS0 | 0 | IO | 1 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV_MCU | Yes | LVCMOS | PU/PD |
| | | MCU_GPIO0_13 | 7 | IO | pad | | | | | | | | |
| C6 | MCU_SPI0_CS1 PADCONFIG: MCU_PADCONFIG1 0x04084004 | MCU_SPI0_CS1 | 0 | IO | 1 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV_MCU | Yes | LVCMOS | PU/PD |
| | | MCU_OBSCLK0 | 1 | O | | | | | | | | | |
| | | MCU_SYSCLKOUT0 | 2 | O | | | | | | | | | |
| | | MCU_GPIO0_12 | 7 | IO | pad | | | | | | | | |

Table 6-1. Pin Attributes (ALV Package) (continued)

| BALL NUMBER [1] | BALL NAME [2] PADCONFIG Register [15] PADCONFIG Address [16] | SIGNAL NAME [3] | MUX MODE [4] | TYPE [5] | DSIS [6] | BALL STATE DURING RESET RX/TX/PULL [7] | BALL STATE AFTER RESET RX/TX/PULL [8] | MUX MODE AFTER RESET [9] | I/O OPERATING VOLTAGE [10] | POWER [11] | HYS [12] | BUFFER TYPE [13] | PULL UP/DOWN TYPE [14] |
|-----------------|--|-----------------|--------------|----------|----------|---|--|--------------------------|----------------------------|------------|----------|------------------|------------------------|
| E7 | MCU_SPI0_D0 PADCONFIG: MCU_PADCONFIG3 0x0408400C | MCU_SPI0_D0 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV_MCU | Yes | LVCMOS | PU/PD |
| | | MCU_GPIO0_10 | 7 | IO | pad | | | | | | | | |
| B6 | MCU_SPI0_D1 PADCONFIG: MCU_PADCONFIG4 0x04084010 | MCU_SPI0_D1 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV_MCU | Yes | LVCMOS | PU/PD |
| | | MCU_GPIO0_4 | 7 | IO | pad | | | | | | | | |
| A7 | MCU_SPI1_CS0 PADCONFIG: MCU_PADCONFIG5 0x04084014 | MCU_SPI1_CS0 | 0 | IO | 1 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV_MCU | Yes | LVCMOS | PU/PD |
| | | MCU_GPIO0_5 | 7 | IO | pad | | | | | | | | |
| B7 | MCU_SPI1_CS1 PADCONFIG: MCU_PADCONFIG6 0x04084018 | MCU_SPI1_CS1 | 0 | IO | 1 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV_MCU | Yes | LVCMOS | PU/PD |
| | | MCU_EXT_REFCLK0 | 1 | I | 0 | | | | | | | | |
| | | MCU_GPIO0_6 | 7 | IO | pad | | | | | | | | |
| C7 | MCU_SPI1_D0 PADCONFIG: MCU_PADCONFIG8 0x04084020 | MCU_SPI1_D0 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV_MCU | Yes | LVCMOS | PU/PD |
| | | MCU_GPIO0_8 | 7 | IO | pad | | | | | | | | |
| C8 | MCU_SPI1_D1 PADCONFIG: MCU_PADCONFIG9 0x04084024 | MCU_SPI1_D1 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV_MCU | Yes | LVCMOS | PU/PD |
| | | MCU_GPIO0_9 | 7 | IO | pad | | | | | | | | |
| D8 | MCU_UART0_CTSn PADCONFIG: MCU_PADCONFIG12 0x04084030 | MCU_UART0_CTSn | 0 | I | 1 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV_MCU | Yes | LVCMOS | PU/PD |
| | | MCU_TIMER_IO0 | 1 | IO | 0 | | | | | | | | |
| | | MCU_SPI0_CS2 | 2 | IO | 1 | | | | | | | | |
| | | MCU_GPIO0_1 | 7 | IO | pad | | | | | | | | |
| E8 | MCU_UART0_RTSn PADCONFIG: MCU_PADCONFIG13 0x04084034 | MCU_UART0_RTSn | 0 | O | | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV_MCU | Yes | LVCMOS | PU/PD |
| | | MCU_TIMER_IO1 | 1 | IO | 0 | | | | | | | | |
| | | MCU_SPI1_CS2 | 2 | IO | 1 | | | | | | | | |
| | | MCU_GPIO0_0 | 7 | IO | pad | | | | | | | | |
| A9 | MCU_UART0_RXD PADCONFIG: MCU_PADCONFIG10 0x04084028 | MCU_UART0_RXD | 0 | I | 1 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV_MCU | Yes | LVCMOS | PU/PD |
| | | MCU_GPIO0_3 | 7 | IO | pad | | | | | | | | |
| A8 | MCU_UART0_TXD PADCONFIG: MCU_PADCONFIG11 0x0408402C | MCU_UART0_TXD | 0 | O | | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV_MCU | Yes | LVCMOS | PU/PD |
| | | MCU_GPIO0_2 | 7 | IO | pad | | | | | | | | |
| B8 | MCU_UART1_CTSn PADCONFIG: MCU_PADCONFIG16 0x04084040 | MCU_UART1_CTSn | 0 | I | 1 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV_MCU | Yes | LVCMOS | PU/PD |
| | | MCU_TIMER_IO2 | 1 | IO | 0 | | | | | | | | |
| | | MCU_SPI0_CS3 | 2 | IO | 1 | | | | | | | | |
| | | MCU_GPIO0_16 | 7 | IO | pad | | | | | | | | |

Table 6-1. Pin Attributes (ALV Package) (continued)

| BALL NUMBER [1] | BALL NAME [2] PADCONFIG Register [15] PADCONFIG Address [16] | SIGNAL NAME [3] | MUX MODE [4] | TYPE [5] | DSIS [6] | BALL STATE DURING RESET RX/TX/PULL [7] | BALL STATE AFTER RESET RX/TX/PULL [8] | MUX MODE AFTER RESET [9] | I/O OPERATING VOLTAGE [10] | POWER [11] | HYS [12] | BUFFER TYPE [13] | PULL UP/DOWN TYPE [14] |
|-----------------|--|-----------------|--------------|----------|----------|---|--|--------------------------|----------------------------|--|----------|------------------|------------------------|
| B9 | MCU_UART1_RTSn PADCONFIG: MCU_PADCONFIG17 0x04084044 | MCU_UART1_RTSn | 0 | O | | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV_MCU | Yes | LVC MOS | PU/PD |
| | | MCU_TIMER_IO3 | 1 | IO | 0 | | | | | | | | |
| | | MCU_SPI1_CS3 | 2 | IO | 1 | | | | | | | | |
| | | MCU_GPIO0_17 | 7 | IO | pad | | | | | | | | |
| C9 | MCU_UART1_RXD PADCONFIG: MCU_PADCONFIG14 0x04084038 | MCU_UART1_RXD | 0 | I | 1 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV_MCU | Yes | LVC MOS | PU/PD |
| | | MCU_GPIO0_14 | 7 | IO | pad | | | | | | | | |
| D9 | MCU_UART1_TXD PADCONFIG: MCU_PADCONFIG15 0x0408403C | MCU_UART1_TXD | 0 | O | | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV_MCU | Yes | LVC MOS | PU/PD |
| | | MCU_GPIO0_15 | 7 | IO | pad | | | | | | | | |
| F18 | MMC0_CALPAD | MMC0_CALPAD | | A | | | | | 1.8 V | VDD_MMC0, VDD_MMC0, VDD_DLL_MMC0 | | eMMC PHY | PU/PD |
| G18 | MMC0_CLK | MMC0_CLK | | IO | | | | | 1.8 V | VDD_MMC0, VDD_MMC0, VDD_DLL_MMC0 | | eMMC PHY | PU/PD |
| J21 | MMC0_CMD | MMC0_CMD | | IO | 1 | | | | 1.8 V | VDD_MMC0, VDD_MMC0, VDD_DLL_MMC0 | | eMMC PHY | PU/PD |
| G19 | MMC0_DS | MMC0_DS | | IO | 1 | | | | 1.8 V | VDD_MMC0, VDD_MMC0, VDD_DLL_MMC0 | | eMMC PHY | PU/PD |
| L20 | MMC1_CLK PADCONFIG: PADCONFIG163 0x000F428C | MMC1_CLK | 0 | IO | | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV5 | Yes | SDIO | PU/PD |
| | | UART2_CTSn | 1 | I | 1 | | | | | | | | |
| | | TIMER_IO4 | 2 | IO | 0 | | | | | | | | |
| | | UART4_RXD | 3 | I | 1 | | | | | | | | |
| J19 | MMC1_CMD PADCONFIG: PADCONFIG165 0x000F4294 | GPIO1_75 | 7 | IO | pad | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV5 | Yes | SDIO | PU/PD |
| | | MMC1_CMD | 0 | IO | 1 | | | | | | | | |
| | | UART2_RTSn | 1 | O | | | | | | | | | |
| | | TIMER_IO5 | 2 | IO | 0 | | | | | | | | |
| D19 | MMC1_SDCD PADCONFIG: PADCONFIG166 0x000F4298 | UART4_TXD | 3 | O | | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV0 | Yes | LVC MOS | PU/PD |
| | | GPIO1_76 | 7 | IO | pad | | | | | | | | |
| | | MMC1_SDCD | 0 | I | 1 | | | | | | | | |
| | | UART3_CTSn | 1 | I | 1 | | | | | | | | |
| | | TIMER_IO6 | 2 | IO | 0 | | | | | | | | |
| D19 | MMC1_SDCD PADCONFIG: PADCONFIG166 0x000F4298 | UART5_RXD | 3 | I | 1 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV0 | Yes | LVC MOS | PU/PD |
| | | GPIO1_77 | 7 | IO | pad | | | | | | | | |

ADVANCE INFORMATION

Table 6-1. Pin Attributes (ALV Package) (continued)

| BALL NUMBER [1] | BALL NAME [2] PADCONFIG Register [15] PADCONFIG Address [16] | SIGNAL NAME [3] | MUX MODE [4] | TYPE [5] | DSIS [6] | BALL STATE DURING RESET RX/TX/PULL [7] | BALL STATE AFTER RESET RX/TX/PULL [8] | MUX MODE AFTER RESET [9] | I/O OPERATING VOLTAGE [10] | POWER [11] | HYS [12] | BUFFER TYPE [13] | PULL UP/DOWN TYPE [14] |
|-----------------|--|--------------------------|--------------|----------|----------|---|--|--------------------------|----------------------------|---|----------|------------------|------------------------|
| C20 | MMC1_SDWP PADCONFIG: PADCONFIG167 0x000F429C | MMC1_SDWP | 0 | I | 1 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV0 | Yes | LVCMOS | PU/PD |
| | | UART3_RTSn | 1 | O | | | | | | | | | |
| | | TIMER_IO7 | 2 | IO | 0 | | | | | | | | |
| | | UART5_TXD | 3 | O | | | | | | | | | |
| | | GPIO1_78 | 7 | IO | pad | | | | | | | | |
| K20 | MMC0_DAT0 | MMC0_DAT0 | | IO | 1 | | | | 1.8 V | VDDS_MMC0, VDD_MMC0, VDD_DLL_MMC0 | | eMMCPHY | PU/PD |
| J20 | MMC0_DAT1 | MMC0_DAT1 | | IO | 1 | | | | 1.8 V | VDDS_MMC0, VDD_MMC0, VDD_DLL_MMC0 | | eMMCPHY | PU/PD |
| J18 | MMC0_DAT2 | MMC0_DAT2 | | IO | 1 | | | | 1.8 V | VDDS_MMC0, VDD_MMC0, VDD_DLL_MMC0 | | eMMCPHY | PU/PD |
| J17 | MMC0_DAT3 | MMC0_DAT3 | | IO | 1 | | | | 1.8 V | VDDS_MMC0, VDD_MMC0, VDD_DLL_MMC0 | | eMMCPHY | PU/PD |
| H17 | MMC0_DAT4 | MMC0_DAT4 | | IO | 1 | | | | 1.8 V | VDDS_MMC0, VDD_MMC0, VDD_DLL_MMC0 | | eMMCPHY | PU/PD |
| H19 | MMC0_DAT5 | MMC0_DAT5 | | IO | 1 | | | | 1.8 V | VDDS_MMC0, VDD_MMC0, VDD_DLL_MMC0 | | eMMCPHY | PU/PD |
| H18 | MMC0_DAT6 | MMC0_DAT6 | | IO | 1 | | | | 1.8 V | VDDS_MMC0, VDD_MMC0, VDD_DLL_MMC0 | | eMMCPHY | PU/PD |
| G17 | MMC0_DAT7 | MMC0_DAT7 | | IO | 1 | | | | 1.8 V | VDDS_MMC0, VDD_MMC0, VDD_DLL_MMC0 | | eMMCPHY | PU/PD |
| K21 | MMC1_DAT0 PADCONFIG: PADCONFIG162 0x000F4288 | MMC1_DAT0 | 0 | IO | 1 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV5 | Yes | SDIO | PU/PD |
| | | CP_GEMAC_CPTS0_HW2TSPUSH | 1 | I | 0 | | | | | | | | |
| | | TIMER_IO3 | 2 | IO | 0 | | | | | | | | |
| | | UART3_TXD | 3 | O | | | | | | | | | |
| | | GPIO1_74 | 7 | IO | pad | | | | | | | | |
| L21 | MMC1_DAT1 PADCONFIG: PADCONFIG161 0x000F4284 | MMC1_DAT1 | 0 | IO | 1 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV5 | Yes | SDIO | PU/PD |
| | | CP_GEMAC_CPTS0_HW1TSPUSH | 1 | I | 0 | | | | | | | | |
| | | TIMER_IO2 | 2 | IO | 0 | | | | | | | | |
| | | UART3_RXD | 3 | I | 1 | | | | | | | | |
| | | GPIO1_73 | 7 | IO | pad | | | | | | | | |

Table 6-1. Pin Attributes (ALV Package) (continued)

| BALL NUMBER [1] | BALL NAME [2] PADCONFIG Register [15] PADCONFIG Address [16] | SIGNAL NAME [3] | MUX MODE [4] | TYPE [5] | DSIS [6] | BALL STATE DURING RESET RX/TX/PULL [7] | BALL STATE AFTER RESET RX/TX/PULL [8] | MUX MODE AFTER RESET [9] | I/O OPERATING VOLTAGE [10] | POWER [11] | HYS [12] | BUFFER TYPE [13] | PULL UP/DOWN TYPE [14] |
|-----------------|--|------------------------|--------------|----------|----------|---|--|--------------------------|----------------------------|------------|----------|------------------|------------------------|
| K19 | MMC1_DAT2 PADCONFIG: PADCONFIG160 0x000F4280 | MMC1_DAT2 | 0 | IO | 1 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV5 | Yes | SDIO | PU/PD |
| | | CP_GEMAC_CPTS0_TS_SYNC | 1 | O | | | | | | | | | |
| | | TIMER_IO1 | 2 | IO | 0 | | | | | | | | |
| | | UART2_TXD | 3 | O | | | | | | | | | |
| | | GPIO1_72 | 7 | IO | pad | | | | | | | | |
| K18 | MMC1_DAT3 PADCONFIG: PADCONFIG159 0x000F427C | MMC1_DAT3 | 0 | IO | 1 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV5 | Yes | SDIO | PU/PD |
| | | CP_GEMAC_CPTS0_TS_COMP | 1 | O | | | | | | | | | |
| | | TIMER_IO0 | 2 | IO | 0 | | | | | | | | |
| | | UART2_RXD | 3 | I | 1 | | | | | | | | |
| | | GPIO1_71 | 7 | IO | pad | | | | | | | | |
| N20 | OSPI0_CLK PADCONFIG: PADCONFIG0 0x000F4000 | OSPI0_CLK | 0 | O | | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV4 | Yes | LVC MOS | PU/PD |
| | | GPIO0_0 | 7 | IO | pad | | | | | | | | |
| N19 | OSPI0_DQS PADCONFIG: PADCONFIG2 0x000F4008 | OSPI0_DQS | 0 | I | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV4 | Yes | LVC MOS | PU/PD |
| | | GPIO0_2 | 7 | IO | pad | | | | | | | | |
| N21 | OSPI0_LBCLKO PADCONFIG: PADCONFIG1 0x000F4004 | OSPI0_LBCLKO | 0 | IO | 0 | Off / Off / Off | On / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV4 | Yes | LVC MOS | PU/PD |
| | | GPIO0_1 | 7 | IO | pad | | | | | | | | |
| L19 | OSPI0_CSn0 PADCONFIG: PADCONFIG11 0x000F402C | OSPI0_CSn0 | 0 | O | | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV4 | Yes | LVC MOS | PU/PD |
| | | GPIO0_11 | 7 | IO | pad | | | | | | | | |
| L18 | OSPI0_CSn1 PADCONFIG: PADCONFIG12 0x000F4030 | OSPI0_CSn1 | 0 | O | | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV4 | Yes | LVC MOS | PU/PD |
| | | GPIO0_12 | 7 | IO | pad | | | | | | | | |
| K17 | OSPI0_CSn2 PADCONFIG: PADCONFIG13 0x000F4034 | OSPI0_CSn2 | 0 | O | | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV4 | Yes | LVC MOS | PU/PD |
| | | OSPI0_RESET_OUT1 | 2 | O | | | | | | | | | |
| | | GPIO0_13 | 7 | IO | pad | | | | | | | | |
| L17 | OSPI0_CSn3 PADCONFIG: PADCONFIG14 0x000F4038 | OSPI0_CSn3 | 0 | O | | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV4 | Yes | LVC MOS | PU/PD |
| | | OSPI0_RESET_OUT0 | 1 | O | | | | | | | | | |
| | | OSPI0_ECC_FAIL | 2 | I | 1 | | | | | | | | |
| | | GPIO0_14 | 7 | IO | pad | | | | | | | | |
| M19 | OSPI0_D0 PADCONFIG: PADCONFIG3 0x000F400C | OSPI0_D0 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV4 | Yes | LVC MOS | PU/PD |
| | | GPIO0_3 | 7 | IO | pad | | | | | | | | |

ADVANCE INFORMATION

Table 6-1. Pin Attributes (ALV Package) (continued)

| BALL NUMBER [1] | BALL NAME [2] PADCONFIG Register [15] PADCONFIG Address [16] | SIGNAL NAME [3] | MUX MODE [4] | TYPE [5] | DSIS [6] | BALL STATE DURING RESET RX/TX/PULL [7] | BALL STATE AFTER RESET RX/TX/PULL [8] | MUX MODE AFTER RESET [9] | I/O OPERATING VOLTAGE [10] | POWER [11] | HYS [12] | BUFFER TYPE [13] | PULL UP/DOWN TYPE [14] |
|-----------------|--|-----------------|--------------|----------|----------|---|--|--------------------------|----------------------------|------------|----------|------------------|------------------------|
| M18 | OSPI0_D1 PADCONFIG: PADCONFIG4 0x000F4010 | OSPI0_D1 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV4 | Yes | LVCMOS | PU/PD |
| | | GPIO0_4 | 7 | IO | pad | | | | | | | | |
| M20 | OSPI0_D2 PADCONFIG: PADCONFIG5 0x000F4014 | OSPI0_D2 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV4 | Yes | LVCMOS | PU/PD |
| | | GPIO0_5 | 7 | IO | pad | | | | | | | | |
| M21 | OSPI0_D3 PADCONFIG: PADCONFIG6 0x000F4018 | OSPI0_D3 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV4 | Yes | LVCMOS | PU/PD |
| | | GPIO0_6 | 7 | IO | pad | | | | | | | | |
| P21 | OSPI0_D4 PADCONFIG: PADCONFIG7 0x000F401C | OSPI0_D4 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV4 | Yes | LVCMOS | PU/PD |
| | | GPIO0_7 | 7 | IO | pad | | | | | | | | |
| P20 | OSPI0_D5 PADCONFIG: PADCONFIG8 0x000F4020 | OSPI0_D5 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV4 | Yes | LVCMOS | PU/PD |
| | | GPIO0_8 | 7 | IO | pad | | | | | | | | |
| N18 | OSPI0_D6 PADCONFIG: PADCONFIG9 0x000F4024 | OSPI0_D6 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV4 | Yes | LVCMOS | PU/PD |
| | | GPIO0_9 | 7 | IO | pad | | | | | | | | |
| M17 | OSPI0_D7 PADCONFIG: PADCONFIG10 0x000F4028 | OSPI0_D7 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV4 | Yes | LVCMOS | PU/PD |
| | | GPIO0_10 | 7 | IO | pad | | | | | | | | |
| E17 | PORz_OUT PADCONFIG: PADCONFIG171 0x000F42AC | PORz_OUT | 0 | O | | Off / Low / Off | Off / SS / Off | 0 | 1.8 V/3.3 V | VDDSHV0 | Yes | LVCMOS | PU/PD |
| P3 | PRG0_MDIO0_MDC PADCONFIG: PADCONFIG129 0x000F4204 | PRG0_MDIO0_MDC | 0 | O | | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV1 | Yes | LVCMOS | PU/PD |
| | | GPIO1_41 | 7 | IO | pad | | | | | | | | |
| | | GPMC0_A13 | 9 | OZ | | | | | | | | | |
| P2 | PRG0_MDIO0_MDIO PADCONFIG: PADCONFIG128 0x000F4200 | PRG0_MDIO0_MDIO | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV1 | Yes | LVCMOS | PU/PD |
| | | GPIO1_40 | 7 | IO | pad | | | | | | | | |
| | | GPMC0_A12 | 9 | OZ | | | | | | | | | |

Table 6-1. Pin Attributes (ALV Package) (continued)

| BALL NUMBER [1] | BALL NAME [2] PADCONFIG Register [15] PADCONFIG Address [16] | SIGNAL NAME [3] | MUX MODE [4] | TYPE [5] | DSIS [6] | BALL STATE DURING RESET RX/TX/PULL [7] | BALL STATE AFTER RESET RX/TX/PULL [8] | MUX MODE AFTER RESET [9] | I/O OPERATING VOLTAGE [10] | POWER [11] | HYS [12] | BUFFER TYPE [13] | PULL UP/DOWN TYPE [14] |
|-----------------|--|--------------------|--------------|----------|----------|---|--|--------------------------|----------------------------|------------|----------|------------------|------------------------|
| Y1 | PRG0_PRU0_GPO0 PADCONFIG: PADCONFIG88 0x000F4160 | PRG0_PRU0_GPO0 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV1 | Yes | LVCMOS | PU/PD |
| | | PRG0_PRU0_GPI0 | 1 | I | 0 | | | | | | | | |
| | | PRG0_RGMII1_RD0 | 2 | I | 0 | | | | | | | | |
| | | PRG0_PWM3_A0 | 3 | IO | 0 | | | | | | | | |
| | | GPIO1_0 | 7 | IO | pad | | | | | | | | |
| | | UART2_CTSn | 10 | I | 1 | | | | | | | | |
| R4 | PRG0_PRU0_GPO1 PADCONFIG: PADCONFIG89 0x000F4164 | PRG0_PRU0_GPO1 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV1 | Yes | LVCMOS | PU/PD |
| | | PRG0_PRU0_GPI1 | 1 | I | 0 | | | | | | | | |
| | | PRG0_RGMII1_RD1 | 2 | I | 0 | | | | | | | | |
| | | PRG0_PWM3_B0 | 3 | IO | 1 | | | | | | | | |
| | | GPIO1_1 | 7 | IO | pad | | | | | | | | |
| | | UART2_TXD | 10 | O | | | | | | | | | |
| U2 | PRG0_PRU0_GPO2 PADCONFIG: PADCONFIG90 0x000F4168 | PRG0_PRU0_GPO2 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV1 | Yes | LVCMOS | PU/PD |
| | | PRG0_PRU0_GPI2 | 1 | I | 0 | | | | | | | | |
| | | PRG0_RGMII1_RD2 | 2 | I | 0 | | | | | | | | |
| | | PRG0_PWM2_A0 | 3 | IO | 0 | | | | | | | | |
| | | GPIO1_2 | 7 | IO | pad | | | | | | | | |
| | | GPMC0_A0 | 9 | OZ | | | | | | | | | |
| UART2_RTSn | 10 | O | | | | | | | | | | | |
| V2 | PRG0_PRU0_GPO3 PADCONFIG: PADCONFIG91 0x000F416C | PRG0_PRU0_GPO3 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV1 | Yes | LVCMOS | PU/PD |
| | | PRG0_PRU0_GPI3 | 1 | I | 0 | | | | | | | | |
| | | PRG0_RGMII1_RD3 | 2 | I | 0 | | | | | | | | |
| | | PRG0_PWM3_A2 | 3 | IO | 0 | | | | | | | | |
| | | GPIO1_3 | 7 | IO | pad | | | | | | | | |
| | | UART3_CTSn | 10 | I | 1 | | | | | | | | |
| AA2 | PRG0_PRU0_GPO4 PADCONFIG: PADCONFIG92 0x000F4170 | PRG0_PRU0_GPO4 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV1 | Yes | LVCMOS | PU/PD |
| | | PRG0_PRU0_GPI4 | 1 | I | 0 | | | | | | | | |
| | | PRG0_RGMII1_RX_CTL | 2 | I | 0 | | | | | | | | |
| | | PRG0_PWM2_B0 | 3 | IO | 1 | | | | | | | | |
| | | GPIO1_4 | 7 | IO | pad | | | | | | | | |
| | | GPMC0_A1 | 9 | OZ | | | | | | | | | |
| UART3_TXD | 10 | O | | | | | | | | | | | |
| R3 | PRG0_PRU0_GPO5 PADCONFIG: PADCONFIG93 0x000F4174 | PRG0_PRU0_GPO5 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV1 | Yes | LVCMOS | PU/PD |
| | | PRG0_PRU0_GPI5 | 1 | I | 0 | | | | | | | | |
| | | PRG0_PWM3_B2 | 3 | IO | 1 | | | | | | | | |
| | | GPIO1_5 | 7 | IO | pad | | | | | | | | |
| | | UART3_RTSn | 10 | O | | | | | | | | | |

ADVANCE INFORMATION

Table 6-1. Pin Attributes (ALV Package) (continued)

| BALL NUMBER [1] | BALL NAME [2] PADCONFIG Register [15] PADCONFIG Address [16] | SIGNAL NAME [3] | MUX MODE [4] | TYPE [5] | DSIS [6] | BALL STATE DURING RESET RX/TX/PULL [7] | BALL STATE AFTER RESET RX/TX/PULL [8] | MUX MODE AFTER RESET [9] | I/O OPERATING VOLTAGE [10] | POWER [11] | HYS [12] | BUFFER TYPE [13] | PULL UP/DOWN TYPE [14] |
|-----------------|--|------------------------------|--------------|----------|----------|---|--|--------------------------|----------------------------|------------|----------|------------------|------------------------|
| T3 | PRG0_PRU0_GPO6 PADCONFIG: PADCONFIG94 0x000F4178 | PRG0_PRU0_GPO6 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV1 | Yes | LVCMOS | PU/PD |
| | | PRG0_PRU0_GPI6 | 1 | I | 0 | | | | | | | | |
| | | PRG0_RGMII1_RXC | 2 | I | 0 | | | | | | | | |
| | | PRG0_PWM3_A1 | 3 | IO | 0 | | | | | | | | |
| | | GPIO1_6 | 7 | IO | pad | | | | | | | | |
| | | UART4_CTSn | 10 | I | 1 | | | | | | | | |
| T1 | PRG0_PRU0_GPO7 PADCONFIG: PADCONFIG95 0x000F417C | PRG0_PRU0_GPO7 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV1 | Yes | LVCMOS | PU/PD |
| | | PRG0_PRU0_GPI7 | 1 | I | 0 | | | | | | | | |
| | | PRG0_IEP0_EDC_LATCH_IN1 | 2 | I | 0 | | | | | | | | |
| | | PRG0_PWM3_B1 | 3 | IO | 1 | | | | | | | | |
| | | CPTS0_HW2TSPUSH | 4 | I | 0 | | | | | | | | |
| | | CP_GEMAC_CPTS0_HW2TSPUSH | 5 | I | 0 | | | | | | | | |
| | | TIMER_IO6 | 6 | IO | 0 | | | | | | | | |
| | | GPIO1_7 | 7 | IO | pad | | | | | | | | |
| UART4_TXD | 10 | O | | | | | | | | | | | |
| T2 | PRG0_PRU0_GPO8 PADCONFIG: PADCONFIG96 0x000F4180 | PRG0_PRU0_GPO8 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV1 | Yes | LVCMOS | PU/PD |
| | | PRG0_PRU0_GPI8 | 1 | I | 0 | | | | | | | | |
| | | PRG0_PWM2_A1 | 3 | IO | 0 | | | | | | | | |
| | | GPIO1_8 | 7 | IO | pad | | | | | | | | |
| | | GPMC0_A2 | 9 | OZ | | | | | | | | | |
| UART4_RTSn | 10 | O | | | | | | | | | | | |
| W6 | PRG0_PRU0_GPO9 PADCONFIG: PADCONFIG97 0x000F4184 | PRG0_PRU0_GPO9 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV1 | Yes | LVCMOS | PU/PD |
| | | PRG0_PRU0_GPI9 | 1 | I | 0 | | | | | | | | |
| | | PRG0_UART0_CTSn | 2 | I | 1 | | | | | | | | |
| | | PRG0_PWM3_TZ_IN | 3 | I | 0 | | | | | | | | |
| | | RGMII1_RX_CTL | 4 | I | 0 | | | | | | | | |
| | | RMII1_RX_ER | 5 | I | 0 | | | | | | | | |
| | | PRG0_IEP0_EDIO_DATA_IN_OUT28 | 6 | IO | 0 | | | | | | | | |
| | | GPIO1_9 | 7 | IO | pad | | | | | | | | |
| UART2_RXD | 10 | I | 1 | | | | | | | | | | |

Table 6-1. Pin Attributes (ALV Package) (continued)

| BALL NUMBER [1] | BALL NAME [2] PADCONFIG Register [15] PADCONFIG Address [16] | SIGNAL NAME [3] | MUX MODE [4] | TYPE [5] | DSIS [6] | BALL STATE DURING RESET RX/TX/PULL [7] | BALL STATE AFTER RESET RX/TX/PULL [8] | MUX MODE AFTER RESET [9] | I/O OPERATING VOLTAGE [10] | POWER [11] | HYS [12] | BUFFER TYPE [13] | PULL UP/DOWN TYPE [14] |
|-----------------|--|------------------------------|--------------|----------|----------|---|--|--------------------------|----------------------------|------------|----------|------------------|------------------------|
| AA5 | PRG0_PRU0_GPO10 PADCONFIG: PADCONFIG98 0x000F4188 | PRG0_PRU0_GPO10 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV1 | Yes | LVCMOS | PU/PD |
| | | PRG0_PRU0_GPI10 | 1 | I | 0 | | | | | | | | |
| | | PRG0_UART0_RTSn | 2 | O | | | | | | | | | |
| | | PRG0_PWM2_B1 | 3 | IO | 1 | | | | | | | | |
| | | RGMI1_RXC | 4 | I | 0 | | | | | | | | |
| | | RMII_REF_CLK | 5 | I | 0 | | | | | | | | |
| | | PRG0_IEP0_EDIO_DATA_IN_OUT29 | 6 | IO | 0 | | | | | | | | |
| | | GPIO1_10 | 7 | IO | pad | | | | | | | | |
| UART3_RXD | 10 | I | 1 | | | | | | | | | | |
| Y3 | PRG0_PRU0_GPO11 PADCONFIG: PADCONFIG99 0x000F418C | PRG0_PRU0_GPO11 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV1 | Yes | LVCMOS | PU/PD |
| | | PRG0_PRU0_GPI11 | 1 | I | 0 | | | | | | | | |
| | | PRG0_RGMII1_TD0 | 2 | O | | | | | | | | | |
| | | PRG0_PWM3_TZ_OUT | 3 | O | | | | | | | | | |
| | | GPIO1_11 | 7 | IO | pad | | | | | | | | |
| UART4_RXD | 10 | I | 1 | | | | | | | | | | |
| AA3 | PRG0_PRU0_GPO12 PADCONFIG: PADCONFIG100 0x000F4190 | PRG0_PRU0_GPO12 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV1 | Yes | LVCMOS | PU/PD |
| | | PRG0_PRU0_GPI12 | 1 | I | 0 | | | | | | | | |
| | | PRG0_RGMII1_TD1 | 2 | O | | | | | | | | | |
| | | PRG0_PWM0_A0 | 3 | IO | 0 | | | | | | | | |
| | | GPIO1_12 | 7 | IO | pad | | | | | | | | |
| GPMC0_A14 | 9 | OZ | | | | | | | | | | | |
| R6 | PRG0_PRU0_GPO13 PADCONFIG: PADCONFIG101 0x000F4194 | PRG0_PRU0_GPO13 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV1 | Yes | LVCMOS | PU/PD |
| | | PRG0_PRU0_GPI13 | 1 | I | 0 | | | | | | | | |
| | | PRG0_RGMII1_TD2 | 2 | O | | | | | | | | | |
| | | PRG0_PWM0_B0 | 3 | IO | 1 | | | | | | | | |
| | | SPI3_D0 | 6 | IO | 0 | | | | | | | | |
| | | GPIO1_13 | 7 | IO | pad | | | | | | | | |
| GPMC0_A15 | 9 | OZ | | | | | | | | | | | |
| V4 | PRG0_PRU0_GPO14 PADCONFIG: PADCONFIG102 0x000F4198 | PRG0_PRU0_GPO14 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV1 | Yes | LVCMOS | PU/PD |
| | | PRG0_PRU0_GPI14 | 1 | I | 0 | | | | | | | | |
| | | PRG0_RGMII1_TD3 | 2 | O | | | | | | | | | |
| | | PRG0_PWM0_A1 | 3 | IO | 0 | | | | | | | | |
| | | SPI3_D1 | 6 | IO | 0 | | | | | | | | |
| | | GPIO1_14 | 7 | IO | pad | | | | | | | | |
| | | GPMC0_A3 | 9 | OZ | | | | | | | | | |

ADVANCE INFORMATION

Table 6-1. Pin Attributes (ALV Package) (continued)

| BALL NUMBER [1] | BALL NAME [2] PADCONFIG Register [15] PADCONFIG Address [16] | SIGNAL NAME [3] | MUX MODE [4] | TYPE [5] | DSIS [6] | BALL STATE DURING RESET RX/TX/PULL [7] | BALL STATE AFTER RESET RX/TX/PULL [8] | MUX MODE AFTER RESET [9] | I/O OPERATING VOLTAGE [10] | POWER [11] | HYS [12] | BUFFER TYPE [13] | PULL UP/DOWN TYPE [14] |
|-----------------|--|--------------------------|--------------|----------|----------|---|--|--------------------------|----------------------------|------------|----------|------------------|------------------------|
| T5 | PRG0_PRU0_GPO15 PADCONFIG: PADCONFIG103 0x000F419C | PRG0_PRU0_GPO15 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV1 | Yes | LVCMOS | PU/PD |
| | | PRG0_PRU0_GPI15 | 1 | I | 0 | | | | | | | | |
| | | PRG0_RGMII1_TX_CTL | 2 | O | | | | | | | | | |
| | | PRG0_PWM0_B1 | 3 | IO | 1 | | | | | | | | |
| | | SPI3_CS1 | 6 | IO | 1 | | | | | | | | |
| | | GPIO1_15 | 7 | IO | pad | | | | | | | | |
| | | GPMC0_A16 | 9 | OZ | | | | | | | | | |
| U4 | PRG0_PRU0_GPO16 PADCONFIG: PADCONFIG104 0x000F41A0 | PRG0_PRU0_GPO16 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV1 | Yes | LVCMOS | PU/PD |
| | | PRG0_PRU0_GPI16 | 1 | I | 0 | | | | | | | | |
| | | PRG0_RGMII1_TXC | 2 | IO | 0 | | | | | | | | |
| | | PRG0_PWM0_A2 | 3 | IO | 0 | | | | | | | | |
| | | SPI3_CLK | 6 | IO | 0 | | | | | | | | |
| | | GPIO1_16 | 7 | IO | pad | | | | | | | | |
| | | GPMC0_A4 | 9 | OZ | | | | | | | | | |
| U1 | PRG0_PRU0_GPO17 PADCONFIG: PADCONFIG105 0x000F41A4 | PRG0_PRU0_GPO17 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV1 | Yes | LVCMOS | PU/PD |
| | | PRG0_PRU0_GPI17 | 1 | I | 0 | | | | | | | | |
| | | PRG0_IEP0_EDC_SYNC_OUT1 | 2 | O | | | | | | | | | |
| | | PRG0_PWM0_B2 | 3 | IO | 1 | | | | | | | | |
| | | CPTS0_TS_SYNC | 4 | O | | | | | | | | | |
| | | CP_GEMAC_CPTS0_TS_SYNC | 5 | O | | | | | | | | | |
| | | SPI3_CS0 | 6 | IO | 1 | | | | | | | | |
| | | GPIO1_17 | 7 | IO | pad | | | | | | | | |
| | | TIMER_IO11 | 8 | IO | 0 | | | | | | | | |
| GPMC0_A17 | 9 | OZ | | | | | | | | | | | |
| V1 | PRG0_PRU0_GPO18 PADCONFIG: PADCONFIG106 0x000F41A8 | PRG0_PRU0_GPO18 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV1 | Yes | LVCMOS | PU/PD |
| | | PRG0_PRU0_GPI18 | 1 | I | 0 | | | | | | | | |
| | | PRG0_IEP0_EDC_LATCH_IN0 | 2 | I | 0 | | | | | | | | |
| | | PRG0_PWM0_TZ_IN | 3 | I | 0 | | | | | | | | |
| | | CPTS0_HW1TSPUSH | 4 | I | 0 | | | | | | | | |
| | | CP_GEMAC_CPTS0_HW1TSPUSH | 5 | I | 0 | | | | | | | | |
| | | EHRPWM8_A | 6 | IO | 0 | | | | | | | | |
| | | GPIO1_18 | 7 | IO | pad | | | | | | | | |
| | | UART4_CTSn | 8 | I | 1 | | | | | | | | |
| | | GPMC0_A5 | 9 | OZ | | | | | | | | | |
| | | UART2_RXD | 10 | I | 1 | | | | | | | | |

Table 6-1. Pin Attributes (ALV Package) (continued)

| BALL NUMBER [1] | BALL NAME [2] PADCONFIG Register [15] PADCONFIG Address [16] | SIGNAL NAME [3] | MUX MODE [4] | TYPE [5] | DSIS [6] | BALL STATE DURING RESET RX/TX/PULL [7] | BALL STATE AFTER RESET RX/TX/PULL [8] | MUX MODE AFTER RESET [9] | I/O OPERATING VOLTAGE [10] | POWER [11] | HYS [12] | BUFFER TYPE [13] | PULL UP/DOWN TYPE [14] |
|-----------------|--|-------------------------|--------------|----------|----------|---|--|--------------------------|----------------------------|------------|----------|------------------|------------------------|
| W1 | PRG0_PRU0_GPO19 PADCONFIG: PADCONFIG107 0x000F41AC | PRG0_PRU0_GPO19 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV1 | Yes | LVCMOS | PU/PD |
| | | PRG0_PRU0_GPI19 | 1 | I | 0 | | | | | | | | |
| | | PRG0_IEP0_EDC_SYNC_OUT0 | 2 | O | | | | | | | | | |
| | | PRG0_PWM0_TZ_OUT | 3 | O | | | | | | | | | |
| | | CPTS0_TS_COMP | 4 | O | | | | | | | | | |
| | | CP_GEMAC_CPTS0_TS_COMP | 5 | O | | | | | | | | | |
| | | EHRPWM8_B | 6 | IO | 0 | | | | | | | | |
| | | GPIO1_19 | 7 | IO | pad | | | | | | | | |
| | | UART4_RTSn | 8 | O | | | | | | | | | |
| | | GPMC0_A6 | 9 | OZ | | | | | | | | | |
| Y2 | PRG0_PRU1_GPO0 PADCONFIG: PADCONFIG108 0x000F41B0 | PRG0_PRU1_GPO0 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV1 | Yes | LVCMOS | PU/PD |
| | | PRG0_PRU1_GPI0 | 1 | I | 0 | | | | | | | | |
| | | PRG0_RGMII2_RD0 | 2 | I | 0 | | | | | | | | |
| | | GPIO1_20 | 7 | IO | pad | | | | | | | | |
| | | EQEP0_A | 8 | I | 0 | | | | | | | | |
| W2 | PRG0_PRU1_GPO1 PADCONFIG: PADCONFIG109 0x000F41B4 | PRG0_PRU1_GPO1 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV1 | Yes | LVCMOS | PU/PD |
| | | PRG0_PRU1_GPI1 | 1 | I | 0 | | | | | | | | |
| | | PRG0_RGMII2_RD1 | 2 | I | 0 | | | | | | | | |
| | | GPIO1_21 | 7 | IO | pad | | | | | | | | |
| | | EQEP0_B | 8 | I | 0 | | | | | | | | |
| V3 | PRG0_PRU1_GPO2 PADCONFIG: PADCONFIG110 0x000F41B8 | PRG0_PRU1_GPO2 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV1 | Yes | LVCMOS | PU/PD |
| | | PRG0_PRU1_GPI2 | 1 | I | 0 | | | | | | | | |
| | | PRG0_RGMII2_RD2 | 2 | I | 0 | | | | | | | | |
| | | PRG0_PWM2_A2 | 3 | IO | 0 | | | | | | | | |
| | | GPIO1_22 | 7 | IO | pad | | | | | | | | |
| | | EQEP0_S | 8 | IO | 0 | | | | | | | | |
| T4 | PRG0_PRU1_GPO3 PADCONFIG: PADCONFIG111 0x000F41BC | PRG0_PRU1_GPO3 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV1 | Yes | LVCMOS | PU/PD |
| | | PRG0_PRU1_GPI3 | 1 | I | 0 | | | | | | | | |
| | | PRG0_RGMII2_RD3 | 2 | I | 0 | | | | | | | | |
| | | GPIO1_23 | 7 | IO | pad | | | | | | | | |
| | | EQEP1_A | 8 | I | 0 | | | | | | | | |
| | | GPMC0_A18 | 9 | OZ | | | | | | | | | |
| | | UART6_CTSn | 10 | I | 1 | | | | | | | | |

ADVANCE INFORMATION

Table 6-1. Pin Attributes (ALV Package) (continued)

| BALL NUMBER [1] | BALL NAME [2] PADCONFIG Register [15] PADCONFIG Address [16] | SIGNAL NAME [3] | MUX MODE [4] | TYPE [5] | DSIS [6] | BALL STATE DURING RESET RX/TX/PULL [7] | BALL STATE AFTER RESET RX/TX/PULL [8] | MUX MODE AFTER RESET [9] | I/O OPERATING VOLTAGE [10] | POWER [11] | HYS [12] | BUFFER TYPE [13] | PULL UP/DOWN TYPE [14] |
|-----------------|--|-------------------------|--------------|----------|----------|---|--|--------------------------|----------------------------|------------|----------|------------------|------------------------|
| W3 | PRG0_PRU1_GPO4 PADCONFIG: PADCONFIG112 0x000F41C0 | PRG0_PRU1_GPO4 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV1 | Yes | LVCMOS | PU/PD |
| | | PRG0_PRU1_GPI4 | 1 | I | 0 | | | | | | | | |
| | | PRG0_RGMII2_RX_CTL | 2 | I | 0 | | | | | | | | |
| | | PRG0_PWM2_B2 | 3 | IO | 1 | | | | | | | | |
| | | GPIO1_24 | 7 | IO | pad | | | | | | | | |
| | | EQEP1_B | 8 | I | 0 | | | | | | | | |
| | | UART6_TXD | 10 | O | | | | | | | | | |
| P4 | PRG0_PRU1_GPO5 PADCONFIG: PADCONFIG113 0x000F41C4 | PRG0_PRU1_GPO5 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV1 | Yes | LVCMOS | PU/PD |
| | | PRG0_PRU1_GPI5 | 1 | I | 0 | | | | | | | | |
| | | GPIO1_25 | 7 | IO | pad | | | | | | | | |
| | | EQEP1_S | 8 | IO | 0 | | | | | | | | |
| | | UART6_RTSn | 10 | O | | | | | | | | | |
| R5 | PRG0_PRU1_GPO6 PADCONFIG: PADCONFIG114 0x000F41C8 | PRG0_PRU1_GPO6 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV1 | Yes | LVCMOS | PU/PD |
| | | PRG0_PRU1_GPI6 | 1 | I | 0 | | | | | | | | |
| | | PRG0_RGMII2_RXC | 2 | I | 0 | | | | | | | | |
| | | GPIO1_26 | 7 | IO | pad | | | | | | | | |
| | | EQEP2_A | 8 | I | 0 | | | | | | | | |
| | | GPMC0_A19 | 9 | OZ | | | | | | | | | |
| | | UART4_CTSn | 10 | I | 1 | | | | | | | | |
| W5 | PRG0_PRU1_GPO7 PADCONFIG: PADCONFIG115 0x000F41CC | PRG0_PRU1_GPO7 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV1 | Yes | LVCMOS | PU/PD |
| | | PRG0_PRU1_GPI7 | 1 | I | 0 | | | | | | | | |
| | | PRG0_IEP1_EDC_LATCH_IN1 | 2 | I | 0 | | | | | | | | |
| | | RGMI1_RD0 | 4 | I | 0 | | | | | | | | |
| | | RMII1_RXD0 | 5 | I | 0 | | | | | | | | |
| | | GPIO1_27 | 7 | IO | pad | | | | | | | | |
| | | EQEP2_B | 8 | I | 0 | | | | | | | | |
| | | UART4_TXD | 10 | O | | | | | | | | | |
| R1 | PRG0_PRU1_GPO8 PADCONFIG: PADCONFIG116 0x000F41D0 | PRG0_PRU1_GPO8 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV1 | Yes | LVCMOS | PU/PD |
| | | PRG0_PRU1_GPI8 | 1 | I | 0 | | | | | | | | |
| | | PRG0_PWM2_TZ_OUT | 3 | O | | | | | | | | | |
| | | GPIO1_28 | 7 | IO | pad | | | | | | | | |
| | | EQEP2_S | 8 | IO | 0 | | | | | | | | |
| | | UART4_RTSn | 10 | O | | | | | | | | | |

Table 6-1. Pin Attributes (ALV Package) (continued)

| BALL NUMBER [1] | BALL NAME [2] PADCONFIG Register [15] PADCONFIG Address [16] | SIGNAL NAME [3] | MUX MODE [4] | TYPE [5] | DSIS [6] | BALL STATE DURING RESET RX/TX/PULL [7] | BALL STATE AFTER RESET RX/TX/PULL [8] | MUX MODE AFTER RESET [9] | I/O OPERATING VOLTAGE [10] | POWER [11] | HYS [12] | BUFFER TYPE [13] | PULL UP/DOWN TYPE [14] |
|-----------------|--|------------------------------|--------------|----------|----------|---|--|--------------------------|----------------------------|------------|----------|------------------|------------------------|
| Y5 | PRG0_PRU1_GPO9 PADCONFIG: PADCONFIG117 0x000F41D4 | PRG0_PRU1_GPO9 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV1 | Yes | LVCMOS | PU/PD |
| | | PRG0_PRU1_GPI9 | 1 | I | 0 | | | | | | | | |
| | | PRG0_UART0_RXD | 2 | I | 1 | | | | | | | | |
| | | RGMI1_RD1 | 4 | I | 0 | | | | | | | | |
| | | RMII1_RXD1 | 5 | I | 0 | | | | | | | | |
| | | PRG0_IEP0_EDIO_DATA_IN_OUT30 | 6 | IO | 0 | | | | | | | | |
| | | GPIO1_29 | 7 | IO | pad | | | | | | | | |
| | | EQEP0_I | 8 | IO | 0 | | | | | | | | |
| UART5_RXD | 10 | I | 1 | | | | | | | | | | |
| V6 | PRG0_PRU1_GPO10 PADCONFIG: PADCONFIG118 0x000F41D8 | PRG0_PRU1_GPO10 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV1 | Yes | LVCMOS | PU/PD |
| | | PRG0_PRU1_GPI10 | 1 | I | 0 | | | | | | | | |
| | | PRG0_UART0_TXD | 2 | O | | | | | | | | | |
| | | PRG0_PWM2_TZ_IN | 3 | I | 0 | | | | | | | | |
| | | RGMI1_RD2 | 4 | I | 0 | | | | | | | | |
| | | RMII1_TXD0 | 5 | O | | | | | | | | | |
| | | PRG0_IEP0_EDIO_DATA_IN_OUT31 | 6 | IO | 0 | | | | | | | | |
| | | GPIO1_30 | 7 | IO | pad | | | | | | | | |
| EQEP1_I | 8 | IO | 0 | | | | | | | | | | |
| UART6_RXD | 10 | I | 1 | | | | | | | | | | |
| W4 | PRG0_PRU1_GPO11 PADCONFIG: PADCONFIG119 0x000F41DC | PRG0_PRU1_GPO11 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV1 | Yes | LVCMOS | PU/PD |
| | | PRG0_PRU1_GPI11 | 1 | I | 0 | | | | | | | | |
| | | PRG0_RGMII2_TD0 | 2 | O | | | | | | | | | |
| | | GPIO1_31 | 7 | IO | pad | | | | | | | | |
| | | EQEP2_I | 8 | IO | 0 | | | | | | | | |
| | | UART4_RXD | 10 | I | 1 | | | | | | | | |
| Y4 | PRG0_PRU1_GPO12 PADCONFIG: PADCONFIG120 0x000F41E0 | PRG0_PRU1_GPO12 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV1 | Yes | LVCMOS | PU/PD |
| | | PRG0_PRU1_GPI12 | 1 | I | 0 | | | | | | | | |
| | | PRG0_RGMII2_TD1 | 2 | O | | | | | | | | | |
| | | PRG0_PWM1_A0 | 3 | IO | 0 | | | | | | | | |
| | | GPIO1_32 | 7 | IO | pad | | | | | | | | |
| | | EQEP2_B | 8 | I | 0 | | | | | | | | |
| | | GPMC0_A7 | 9 | OZ | | | | | | | | | |
| | | UART4_TXD | 10 | O | | | | | | | | | |

ADVANCE INFORMATION

Table 6-1. Pin Attributes (ALV Package) (continued)

| BALL NUMBER [1] | BALL NAME [2] PADCONFIG Register [15] PADCONFIG Address [16] | SIGNAL NAME [3] | MUX MODE [4] | TYPE [5] | DSIS [6] | BALL STATE DURING RESET RX/TX/PULL [7] | BALL STATE AFTER RESET RX/TX/PULL [8] | MUX MODE AFTER RESET [9] | I/O OPERATING VOLTAGE [10] | POWER [11] | HYS [12] | BUFFER TYPE [13] | PULL UP/DOWN TYPE [14] |
|-----------------|--|------------------------|--------------|----------|----------|---|--|--------------------------|----------------------------|------------|----------|------------------|------------------------|
| T6 | PRG0_PRU1_GPO13 PADCONFIG: PADCONFIG121 0x000F41E4 | PRG0_PRU1_GPO13 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV1 | Yes | LVCMOS | PU/PD |
| | | PRG0_PRU1_GPI13 | 1 | I | 0 | | | | | | | | |
| | | PRG0_RGMII2_TD2 | 2 | O | | | | | | | | | |
| | | PRG0_PWM1_B0 | 3 | IO | 1 | | | | | | | | |
| | | GPIO1_33 | 7 | IO | pad | | | | | | | | |
| | | EQEP0_I | 8 | IO | 0 | | | | | | | | |
| | | GPMC0_A8 | 9 | OZ | | | | | | | | | |
| | | UART5_RXD | 10 | I | 1 | | | | | | | | |
| U6 | PRG0_PRU1_GPO14 PADCONFIG: PADCONFIG122 0x000F41E8 | PRG0_PRU1_GPO14 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV1 | Yes | LVCMOS | PU/PD |
| | | PRG0_PRU1_GPI14 | 1 | I | 0 | | | | | | | | |
| | | PRG0_RGMII2_TD3 | 2 | O | | | | | | | | | |
| | | PRG0_PWM1_A1 | 3 | IO | 0 | | | | | | | | |
| | | GPIO1_34 | 7 | IO | pad | | | | | | | | |
| | | EQEP1_I | 8 | IO | 0 | | | | | | | | |
| | | GPMC0_A9 | 9 | OZ | | | | | | | | | |
| | | UART6_RXD | 10 | I | 1 | | | | | | | | |
| U5 | PRG0_PRU1_GPO15 PADCONFIG: PADCONFIG123 0x000F41EC | PRG0_PRU1_GPO15 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV1 | Yes | LVCMOS | PU/PD |
| | | PRG0_PRU1_GPI15 | 1 | I | 0 | | | | | | | | |
| | | PRG0_RGMII2_TX_CTL | 2 | O | | | | | | | | | |
| | | PRG0_PWM1_B1 | 3 | IO | 1 | | | | | | | | |
| | | GPIO1_35 | 7 | IO | pad | | | | | | | | |
| | | GPMC0_A10 | 9 | OZ | | | | | | | | | |
| | | PRG0_ECAP0_IN_APWM_OUT | 10 | IO | 0 | | | | | | | | |
| | | | | | | | | | | | | | |
| AA4 | PRG0_PRU1_GPO16 PADCONFIG: PADCONFIG124 0x000F41F0 | PRG0_PRU1_GPO16 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV1 | Yes | LVCMOS | PU/PD |
| | | PRG0_PRU1_GPI16 | 1 | I | 0 | | | | | | | | |
| | | PRG0_RGMII2_TXC | 2 | IO | 0 | | | | | | | | |
| | | PRG0_PWM1_A2 | 3 | IO | 0 | | | | | | | | |
| | | GPIO1_36 | 7 | IO | pad | | | | | | | | |
| | | GPMC0_A11 | 9 | OZ | | | | | | | | | |
| | | PRG0_ECAP0_SYNC_OUT | 10 | O | | | | | | | | | |
| | | | | | | | | | | | | | |

Table 6-1. Pin Attributes (ALV Package) (continued)

| BALL NUMBER [1] | BALL NAME [2] PADCONFIG Register [15] PADCONFIG Address [16] | SIGNAL NAME [3] | MUX MODE [4] | TYPE [5] | DSIS [6] | BALL STATE DURING RESET RX/TX/PULL [7] | BALL STATE AFTER RESET RX/TX/PULL [8] | MUX MODE AFTER RESET [9] | I/O OPERATING VOLTAGE [10] | POWER [11] | HYS [12] | BUFFER TYPE [13] | PULL UP/DOWN TYPE [14] |
|------------------------|--|-------------------------|--------------|----------|----------|---|--|--------------------------|----------------------------|------------|----------|------------------|------------------------|
| V5 | PRG0_PRU1_GPO17 PADCONFIG: PADCONFIG125 0x000F41F4 | PRG0_PRU1_GPO17 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV1 | Yes | LVCMOS | PU/PD |
| | | PRG0_PRU1_GPI17 | 1 | I | 0 | | | | | | | | |
| | | PRG0_IEP1_EDC_SYNC_OUT1 | 2 | O | | | | | | | | | |
| | | PRG0_PWM1_B2 | 3 | IO | 1 | | | | | | | | |
| | | RGMI1_RD3 | 4 | I | 0 | | | | | | | | |
| | | RMII1_TXD1 | 5 | O | | | | | | | | | |
| | | GPIO1_37 | 7 | IO | pad | | | | | | | | |
| | | PRG0_ECAP0_SYNC_OUT | 8 | O | | | | | | | | | |
| PRG0_ECAP0_SYNC_IN | 10 | I | 0 | | | | | | | | | | |
| P5 | PRG0_PRU1_GPO18 PADCONFIG: PADCONFIG126 0x000F41F8 | PRG0_PRU1_GPO18 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV1 | Yes | LVCMOS | PU/PD |
| | | PRG0_PRU1_GPI18 | 1 | I | 0 | | | | | | | | |
| | | PRG0_IEP1_EDC_LATCH_IN0 | 2 | I | 0 | | | | | | | | |
| | | PRG0_PWM1_TZ_IN | 3 | I | 0 | | | | | | | | |
| | | MDIO0_MDIO | 4 | IO | 0 | | | | | | | | |
| | | RMII1_TX_EN | 5 | O | | | | | | | | | |
| | | EHRPWM7_A | 6 | IO | 0 | | | | | | | | |
| | | GPIO1_38 | 7 | IO | pad | | | | | | | | |
| PRG0_ECAP0_SYNC_IN | 8 | I | 0 | | | | | | | | | | |
| R2 | PRG0_PRU1_GPO19 PADCONFIG: PADCONFIG127 0x000F41FC | PRG0_PRU1_GPO19 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV1 | Yes | LVCMOS | PU/PD |
| | | PRG0_PRU1_GPI19 | 1 | I | 0 | | | | | | | | |
| | | PRG0_IEP1_EDC_SYNC_OUT0 | 2 | O | | | | | | | | | |
| | | PRG0_PWM1_TZ_OUT | 3 | O | | | | | | | | | |
| | | MDIO0_MDC | 4 | O | | | | | | | | | |
| | | RMII1_CRSDV | 5 | I | 0 | | | | | | | | |
| | | EHRPWM7_B | 6 | IO | 0 | | | | | | | | |
| | | GPIO1_39 | 7 | IO | pad | | | | | | | | |
| PRG0_ECAP0_IN_APWM_OUT | 8 | IO | 0 | | | | | | | | | | |
| Y6 | PRG1_MDIO0_MDC PADCONFIG: PADCONFIG87 0x000F415C | PRG1_MDIO0_MDC | 0 | O | | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV2 | Yes | LVCMOS | PU/PD |
| | | MDIO0_MDC | 4 | O | | | | | | | | | |
| | | GPIO0_86 | 7 | IO | pad | | | | | | | | |
| AA6 | PRG1_MDIO0_MDIO PADCONFIG: PADCONFIG86 0x000F4158 | PRG1_MDIO0_MDIO | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV2 | Yes | LVCMOS | PU/PD |
| | | MDIO0_MDIO | 4 | IO | 0 | | | | | | | | |
| | | GPIO0_85 | 7 | IO | pad | | | | | | | | |

ADVANCE INFORMATION

Table 6-1. Pin Attributes (ALV Package) (continued)

| BALL NUMBER [1] | BALL NAME [2] PADCONFIG Register [15] PADCONFIG Address [16] | SIGNAL NAME [3] | MUX MODE [4] | TYPE [5] | DSIS [6] | BALL STATE DURING RESET RX/TX/PULL [7] | BALL STATE AFTER RESET RX/TX/PULL [8] | MUX MODE AFTER RESET [9] | I/O OPERATING VOLTAGE [10] | POWER [11] | HYS [12] | BUFFER TYPE [13] | PULL UP/DOWN TYPE [14] |
|-----------------|--|--------------------|--------------|----------|----------|---|--|--------------------------|----------------------------|------------|----------|------------------|------------------------|
| Y7 | PRG1_PRU0_GPO0 PADCONFIG: PADCONFIG46 0x000F40B8 | PRG1_PRU0_GPO0 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV2 | Yes | LVCMOS | PU/PD |
| | | PRG1_PRU0_GPI0 | 1 | I | 0 | | | | | | | | |
| | | PRG1_RGMII1_RD0 | 2 | I | 0 | | | | | | | | |
| | | PRG1_PWM3_A0 | 3 | IO | 0 | | | | | | | | |
| | | GPIO0_45 | 7 | IO | pad | | | | | | | | |
| | | GPMC0_AD16 | 8 | IO | 0 | | | | | | | | |
| U8 | PRG1_PRU0_GPO1 PADCONFIG: PADCONFIG47 0x000F40BC | PRG1_PRU0_GPO1 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV2 | Yes | LVCMOS | PU/PD |
| | | PRG1_PRU0_GPI1 | 1 | I | 0 | | | | | | | | |
| | | PRG1_RGMII1_RD1 | 2 | I | 0 | | | | | | | | |
| | | PRG1_PWM3_B0 | 3 | IO | 1 | | | | | | | | |
| | | GPIO0_46 | 7 | IO | pad | | | | | | | | |
| | | GPMC0_AD17 | 8 | IO | 0 | | | | | | | | |
| W8 | PRG1_PRU0_GPO2 PADCONFIG: PADCONFIG48 0x000F40C0 | PRG1_PRU0_GPO2 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV2 | Yes | LVCMOS | PU/PD |
| | | PRG1_PRU0_GPI2 | 1 | I | 0 | | | | | | | | |
| | | PRG1_RGMII1_RD2 | 2 | I | 0 | | | | | | | | |
| | | PRG1_PWM2_A0 | 3 | IO | 0 | | | | | | | | |
| | | GPIO0_47 | 7 | IO | pad | | | | | | | | |
| | | GPMC0_AD18 | 8 | IO | 0 | | | | | | | | |
| V8 | PRG1_PRU0_GPO3 PADCONFIG: PADCONFIG49 0x000F40C4 | PRG1_PRU0_GPO3 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV2 | Yes | LVCMOS | PU/PD |
| | | PRG1_PRU0_GPI3 | 1 | I | 0 | | | | | | | | |
| | | PRG1_RGMII1_RD3 | 2 | I | 0 | | | | | | | | |
| | | PRG1_PWM3_A2 | 3 | IO | 0 | | | | | | | | |
| | | GPIO0_48 | 7 | IO | pad | | | | | | | | |
| | | GPMC0_AD19 | 8 | IO | 0 | | | | | | | | |
| Y8 | PRG1_PRU0_GPO4 PADCONFIG: PADCONFIG50 0x000F40C8 | PRG1_PRU0_GPO4 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV2 | Yes | LVCMOS | PU/PD |
| | | PRG1_PRU0_GPI4 | 1 | I | 0 | | | | | | | | |
| | | PRG1_RGMII1_RX_CTL | 2 | I | 0 | | | | | | | | |
| | | PRG1_PWM2_B0 | 3 | IO | 1 | | | | | | | | |
| | | GPIO0_49 | 7 | IO | pad | | | | | | | | |
| | | GPMC0_AD20 | 8 | IO | 0 | | | | | | | | |
| V13 | PRG1_PRU0_GPO5 PADCONFIG: PADCONFIG51 0x000F40CC | PRG1_PRU0_GPO5 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV2 | Yes | LVCMOS | PU/PD |
| | | PRG1_PRU0_GPI5 | 1 | I | 0 | | | | | | | | |
| | | PRG1_PWM3_B2 | 3 | IO | 1 | | | | | | | | |
| | | RGMII1_RX_CTL | 4 | I | 0 | | | | | | | | |
| | | GPIO0_50 | 7 | IO | pad | | | | | | | | |
| | | GPMC0_AD21 | 8 | IO | 0 | | | | | | | | |

Table 6-1. Pin Attributes (ALV Package) (continued)

| BALL NUMBER [1] | BALL NAME [2] PADCONFIG Register [15] PADCONFIG Address [16] | SIGNAL NAME [3] | MUX MODE [4] | TYPE [5] | DSIS [6] | BALL STATE DURING RESET RX/TX/PULL [7] | BALL STATE AFTER RESET RX/TX/PULL [8] | MUX MODE AFTER RESET [9] | I/O OPERATING VOLTAGE [10] | POWER [11] | HYS [12] | BUFFER TYPE [13] | PULL UP/DOWN TYPE [14] |
|-----------------|--|------------------------------|--------------|----------|----------|---|--|--------------------------|----------------------------|------------|----------|------------------|------------------------|
| AA7 | PRG1_PRU0_GPO6 PADCONFIG: PADCONFIG52 0x000F40D0 | PRG1_PRU0_GPO6 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV2 | Yes | LVCMOS | PU/PD |
| | | PRG1_PRU0_GPI6 | 1 | I | 0 | | | | | | | | |
| | | PRG1_RGMII1_RXC | 2 | I | 0 | | | | | | | | |
| | | PRG1_PWM3_A1 | 3 | IO | 0 | | | | | | | | |
| | | GPIO0_51 | 7 | IO | pad | | | | | | | | |
| | | GPMC0_AD22 | 8 | IO | 0 | | | | | | | | |
| U13 | PRG1_PRU0_GPO7 PADCONFIG: PADCONFIG53 0x000F40D4 | PRG1_PRU0_GPO7 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV2 | Yes | LVCMOS | PU/PD |
| | | PRG1_PRU0_GPI7 | 1 | I | 0 | | | | | | | | |
| | | PRG1_IEP0_EDC_LATCH_IN1 | 2 | I | 0 | | | | | | | | |
| | | PRG1_PWM3_B1 | 3 | IO | 1 | | | | | | | | |
| | | CPTS0_HW2TSPUSH | 4 | I | 0 | | | | | | | | |
| | | CLKOUT0 | 5 | O | | | | | | | | | |
| | | TIMER_IO10 | 6 | IO | 0 | | | | | | | | |
| | | GPIO0_52 | 7 | IO | pad | | | | | | | | |
| GPMC0_AD23 | 8 | IO | 0 | | | | | | | | | | |
| W13 | PRG1_PRU0_GPO8 PADCONFIG: PADCONFIG54 0x000F40D8 | PRG1_PRU0_GPO8 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV2 | Yes | LVCMOS | PU/PD |
| | | PRG1_PRU0_GPI8 | 1 | I | 0 | | | | | | | | |
| | | PRG1_PWM2_A1 | 3 | IO | 0 | | | | | | | | |
| | | RGMII1_RXC | 4 | I | 0 | | | | | | | | |
| | | GPIO0_53 | 7 | IO | pad | | | | | | | | |
| | | GPMC0_AD24 | 8 | IO | 0 | | | | | | | | |
| U15 | PRG1_PRU0_GPO9 PADCONFIG: PADCONFIG55 0x000F40DC | PRG1_PRU0_GPO9 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV2 | Yes | LVCMOS | PU/PD |
| | | PRG1_PRU0_GPI9 | 1 | I | 0 | | | | | | | | |
| | | PRG1_UART0_CTSn | 2 | I | 1 | | | | | | | | |
| | | PRG1_PWM3_TZ_IN | 3 | I | 0 | | | | | | | | |
| | | RGMII1_TX_CTL | 4 | O | | | | | | | | | |
| | | RMII1_RX_ER | 5 | I | 0 | | | | | | | | |
| | | PRG1_IEP0_EDIO_DATA_IN_OUT28 | 6 | IO | 0 | | | | | | | | |
| | | GPIO0_54 | 7 | IO | pad | | | | | | | | |
| GPMC0_AD25 | 8 | IO | 0 | | | | | | | | | | |

ADVANCE INFORMATION

Table 6-1. Pin Attributes (ALV Package) (continued)

| BALL NUMBER [1] | BALL NAME [2] PADCONFIG Register [15] PADCONFIG Address [16] | SIGNAL NAME [3] | MUX MODE [4] | TYPE [5] | DSIS [6] | BALL STATE DURING RESET RX/TX/PULL [7] | BALL STATE AFTER RESET RX/TX/PULL [8] | MUX MODE AFTER RESET [9] | I/O OPERATING VOLTAGE [10] | POWER [11] | HYS [12] | BUFFER TYPE [13] | PULL UP/DOWN TYPE [14] |
|-----------------|--|------------------------------|--------------|----------|----------|---|--|--------------------------|----------------------------|------------|----------|------------------|------------------------|
| U14 | PRG1_PRU0_GPO10 PADCONFIG: PADCONFIG56 0x000F40E0 | PRG1_PRU0_GPO10 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV2 | Yes | LVCMOS | PU/PD |
| | | PRG1_PRU0_GPI10 | 1 | I | 0 | | | | | | | | |
| | | PRG1_UART0_RTSn | 2 | O | | | | | | | | | |
| | | PRG1_PWM2_B1 | 3 | IO | 1 | | | | | | | | |
| | | RGMI11_TXC | 4 | IO | 0 | | | | | | | | |
| | | RMII_REF_CLK | 5 | I | 0 | | | | | | | | |
| | | PRG1_IEP0_EDIO_DATA_IN_OUT29 | 6 | IO | 0 | | | | | | | | |
| | | GPIO0_55 | 7 | IO | pad | | | | | | | | |
| GPMC0_AD26 | 8 | IO | 0 | | | | | | | | | | |
| AA8 | PRG1_PRU0_GPO11 PADCONFIG: PADCONFIG57 0x000F40E4 | PRG1_PRU0_GPO11 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV2 | Yes | LVCMOS | PU/PD |
| | | PRG1_PRU0_GPI11 | 1 | I | 0 | | | | | | | | |
| | | PRG1_RGMII1_TD0 | 2 | O | | | | | | | | | |
| | | PRG1_PWM3_TZ_OUT | 3 | O | | | | | | | | | |
| | | GPIO0_56 | 7 | IO | pad | | | | | | | | |
| GPMC0_AD27 | 8 | IO | 0 | | | | | | | | | | |
| U9 | PRG1_PRU0_GPO12 PADCONFIG: PADCONFIG58 0x000F40E8 | PRG1_PRU0_GPO12 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV2 | Yes | LVCMOS | PU/PD |
| | | PRG1_PRU0_GPI12 | 1 | I | 0 | | | | | | | | |
| | | PRG1_RGMII1_TD1 | 2 | O | | | | | | | | | |
| | | PRG1_PWM0_A0 | 3 | IO | 0 | | | | | | | | |
| | | GPIO0_57 | 7 | IO | pad | | | | | | | | |
| GPMC0_AD28 | 8 | IO | 0 | | | | | | | | | | |
| W9 | PRG1_PRU0_GPO13 PADCONFIG: PADCONFIG59 0x000F40EC | PRG1_PRU0_GPO13 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV2 | Yes | LVCMOS | PU/PD |
| | | PRG1_PRU0_GPI13 | 1 | I | 0 | | | | | | | | |
| | | PRG1_RGMII1_TD2 | 2 | O | | | | | | | | | |
| | | PRG1_PWM0_B0 | 3 | IO | 1 | | | | | | | | |
| | | GPIO0_58 | 7 | IO | pad | | | | | | | | |
| GPMC0_AD29 | 8 | IO | 0 | | | | | | | | | | |
| AA9 | PRG1_PRU0_GPO14 PADCONFIG: PADCONFIG60 0x000F40F0 | PRG1_PRU0_GPO14 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV2 | Yes | LVCMOS | PU/PD |
| | | PRG1_PRU0_GPI14 | 1 | I | 0 | | | | | | | | |
| | | PRG1_RGMII1_TD3 | 2 | O | | | | | | | | | |
| | | PRG1_PWM0_A1 | 3 | IO | 0 | | | | | | | | |
| | | GPIO0_59 | 7 | IO | pad | | | | | | | | |
| GPMC0_AD30 | 8 | IO | 0 | | | | | | | | | | |

Table 6-1. Pin Attributes (ALV Package) (continued)

| BALL NUMBER [1] | BALL NAME [2] PADCONFIG Register [15] PADCONFIG Address [16] | SIGNAL NAME [3] | MUX MODE [4] | TYPE [5] | DSIS [6] | BALL STATE DURING RESET RX/TX/PULL [7] | BALL STATE AFTER RESET RX/TX/PULL [8] | MUX MODE AFTER RESET [9] | I/O OPERATING VOLTAGE [10] | POWER [11] | HYS [12] | BUFFER TYPE [13] | PULL UP/DOWN TYPE [14] |
|-----------------|--|-------------------------|--------------|----------|----------|---|--|--------------------------|----------------------------|------------|----------|------------------|------------------------|
| Y9 | PRG1_PRU0_GPO15 PADCONFIG: PADCONFIG61 0x000F40F4 | PRG1_PRU0_GPO15 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV2 | Yes | LVCMOS | PU/PD |
| | | PRG1_PRU0_GPI15 | 1 | I | 0 | | | | | | | | |
| | | PRG1_RGMII1_TX_CTL | 2 | O | | | | | | | | | |
| | | PRG1_PWM0_B1 | 3 | IO | 1 | | | | | | | | |
| | | GPIO0_60 | 7 | IO | pad | | | | | | | | |
| | | GPMC0_AD31 | 8 | IO | 0 | | | | | | | | |
| V9 | PRG1_PRU0_GPO16 PADCONFIG: PADCONFIG62 0x000F40F8 | PRG1_PRU0_GPO16 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV2 | Yes | LVCMOS | PU/PD |
| | | PRG1_PRU0_GPI16 | 1 | I | 0 | | | | | | | | |
| | | PRG1_RGMII1_TXC | 2 | IO | 0 | | | | | | | | |
| | | PRG1_PWM0_A2 | 3 | IO | 0 | | | | | | | | |
| | | GPIO0_61 | 7 | IO | pad | | | | | | | | |
| | | GPMC0_BE2n | 8 | O | | | | | | | | | |
| U7 | PRG1_PRU0_GPO17 PADCONFIG: PADCONFIG63 0x000F40FC | PRG1_PRU0_GPO17 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV2 | Yes | LVCMOS | PU/PD |
| | | PRG1_PRU0_GPI17 | 1 | I | 0 | | | | | | | | |
| | | PRG1_IEP0_EDC_SYNC_OUT1 | 2 | O | | | | | | | | | |
| | | PRG1_PWM0_B2 | 3 | IO | 1 | | | | | | | | |
| | | CPTS0_TS_SYNC | 4 | O | | | | | | | | | |
| | | TIMER_IO7 | 6 | IO | 0 | | | | | | | | |
| | | GPIO0_62 | 7 | IO | pad | | | | | | | | |
| | | GPMC0_A0 | 8 | OZ | | | | | | | | | |
| V7 | PRG1_PRU0_GPO18 PADCONFIG: PADCONFIG64 0x000F4100 | PRG1_PRU0_GPO18 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV2 | Yes | LVCMOS | PU/PD |
| | | PRG1_PRU0_GPI18 | 1 | I | 0 | | | | | | | | |
| | | PRG1_IEP0_EDC_LATCH_IN0 | 2 | I | 0 | | | | | | | | |
| | | PRG1_PWM0_TZ_IN | 3 | I | 0 | | | | | | | | |
| | | CPTS0_HW1TSPUSH | 4 | I | 0 | | | | | | | | |
| | | TIMER_IO8 | 6 | IO | 0 | | | | | | | | |
| | | GPIO0_63 | 7 | IO | pad | | | | | | | | |
| | | GPMC0_A1 | 8 | OZ | | | | | | | | | |
| W7 | PRG1_PRU0_GPO19 PADCONFIG: PADCONFIG65 0x000F4104 | PRG1_PRU0_GPO19 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV2 | Yes | LVCMOS | PU/PD |
| | | PRG1_PRU0_GPI19 | 1 | I | 0 | | | | | | | | |
| | | PRG1_IEP0_EDC_SYNC_OUT0 | 2 | O | | | | | | | | | |
| | | PRG1_PWM0_TZ_OUT | 3 | O | | | | | | | | | |
| | | CPTS0_TS_COMP | 4 | O | | | | | | | | | |
| | | TIMER_IO9 | 6 | IO | 0 | | | | | | | | |
| | | GPIO0_64 | 7 | IO | pad | | | | | | | | |
| | | GPMC0_A2 | 8 | OZ | | | | | | | | | |

ADVANCE INFORMATION

Table 6-1. Pin Attributes (ALV Package) (continued)

| BALL NUMBER [1] | BALL NAME [2] PADCONFIG Register [15] PADCONFIG Address [16] | SIGNAL NAME [3] | MUX MODE [4] | TYPE [5] | DSIS [6] | BALL STATE DURING RESET RX/TX/PULL [7] | BALL STATE AFTER RESET RX/TX/PULL [8] | MUX MODE AFTER RESET [9] | I/O OPERATING VOLTAGE [10] | POWER [11] | HYS [12] | BUFFER TYPE [13] | PULL UP/DOWN TYPE [14] |
|--------------------|--|-----------------|---|----------------|----------|---|--|--------------------------|----------------------------|------------|----------|------------------|------------------------|
| W11 | PRG1_PRU1_GPO0 PADCONFIG: PADCONFIG66 0x000F4108 | PRG1_PRU1_GPO0 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV2 | Yes | LVCMOS | PU/PD |
| | | PRG1_PRU1_GPI0 | 1 | I | 0 | | | | | | | | |
| | | PRG1_RGMII2_RD0 | 2 | I | 0 | | | | | | | | |
| | | RGMII2_RD0 | 4 | I | 0 | | | | | | | | |
| | | RMII2_RXD0 | 5 | I | 0 | | | | | | | | |
| | | GPIO0_65 | 7 | IO | pad | | | | | | | | |
| | | GPMC0_A3 | 8 | OZ | | | | | | | | | |
| V11 | PRG1_PRU1_GPO1 PADCONFIG: PADCONFIG67 0x000F410C | PRG1_PRU1_GPO1 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV2 | Yes | LVCMOS | PU/PD |
| | | PRG1_PRU1_GPI1 | 1 | I | 0 | | | | | | | | |
| | | PRG1_RGMII2_RD1 | 2 | I | 0 | | | | | | | | |
| | | RGMII2_RD1 | 4 | I | 0 | | | | | | | | |
| | | RMII2_RXD1 | 5 | I | 0 | | | | | | | | |
| | | GPIO0_66 | 7 | IO | pad | | | | | | | | |
| | | GPMC0_A4 | 8 | OZ | | | | | | | | | |
| AA12 | PRG1_PRU1_GPO2 PADCONFIG: PADCONFIG68 0x000F4110 | PRG1_PRU1_GPO2 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV2 | Yes | LVCMOS | PU/PD |
| | | PRG1_PRU1_GPI2 | 1 | I | 0 | | | | | | | | |
| | | PRG1_RGMII2_RD2 | 2 | I | 0 | | | | | | | | |
| | | PRG1_PWM2_A2 | 3 | IO | 0 | | | | | | | | |
| | | RGMII2_RD2 | 4 | I | 0 | | | | | | | | |
| | | GPIO0_67 | 7 | IO | pad | | | | | | | | |
| | | GPMC0_A5 | 8 | OZ | | | | | | | | | |
| Y12 | PRG1_PRU1_GPO3 PADCONFIG: PADCONFIG69 0x000F4114 | PRG1_PRU1_GPO3 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV2 | Yes | LVCMOS | PU/PD |
| | | PRG1_PRU1_GPI3 | 1 | I | 0 | | | | | | | | |
| | | PRG1_RGMII2_RD3 | 2 | I | 0 | | | | | | | | |
| | | RGMII2_RD3 | 4 | I | 0 | | | | | | | | |
| | | GPIO0_68 | 7 | IO | pad | | | | | | | | |
| | | GPMC0_A6 | 8 | OZ | | | | | | | | | |
| | | W12 | PRG1_PRU1_GPO4 PADCONFIG: PADCONFIG70 0x000F4118 | PRG1_PRU1_GPO4 | 0 | | | | | | | | |
| PRG1_PRU1_GPI4 | 1 | | | I | 0 | | | | | | | | |
| PRG1_RGMII2_RX_CTL | 2 | | | I | 0 | | | | | | | | |
| PRG1_PWM2_B2 | 3 | | | IO | 1 | | | | | | | | |
| RGMII2_RX_CTL | 4 | | | I | 0 | | | | | | | | |
| RMII2_RX_ER | 5 | | | I | 0 | | | | | | | | |
| GPIO0_69 | 7 | | | IO | pad | | | | | | | | |
| GPMC0_A7 | 8 | | | OZ | | | | | | | | | |

Table 6-1. Pin Attributes (ALV Package) (continued)

| BALL NUMBER [1] | BALL NAME [2] PADCONFIG Register [15] PADCONFIG Address [16] | SIGNAL NAME [3] | MUX MODE [4] | TYPE [5] | DSIS [6] | BALL STATE DURING RESET RX/TX/PULL [7] | BALL STATE AFTER RESET RX/TX/PULL [8] | MUX MODE AFTER RESET [9] | I/O OPERATING VOLTAGE [10] | POWER [11] | HYS [12] | BUFFER TYPE [13] | PULL UP/DOWN TYPE [14] |
|-----------------|--|------------------------------|--------------|----------|----------|---|--|--------------------------|----------------------------|------------|----------|------------------|------------------------|
| AA13 | PRG1_PRU1_GPO5 PADCONFIG: PADCONFIG71 0x000F411C | PRG1_PRU1_GPO5 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV2 | Yes | LVCMOS | PU/PD |
| | | PRG1_PRU1_GPI5 | 1 | I | 0 | | | | | | | | |
| | | RGMII1_RD0 | 4 | I | 0 | | | | | | | | |
| | | GPIO0_70 | 7 | IO | pad | | | | | | | | |
| U11 | PRG1_PRU1_GPO6 PADCONFIG: PADCONFIG72 0x000F4120 | PRG1_PRU1_GPO6 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV2 | Yes | LVCMOS | PU/PD |
| | | PRG1_PRU1_GPI6 | 1 | I | 0 | | | | | | | | |
| | | PRG1_RGMII2_RXC | 2 | I | 0 | | | | | | | | |
| | | RGMII2_RXC | 4 | I | 0 | | | | | | | | |
| | | GPIO0_71 | 7 | IO | pad | | | | | | | | |
| V15 | PRG1_PRU1_GPO7 PADCONFIG: PADCONFIG73 0x000F4124 | PRG1_PRU1_GPO7 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV2 | Yes | LVCMOS | PU/PD |
| | | PRG1_PRU1_GPI7 | 1 | I | 0 | | | | | | | | |
| | | PRG1_IEP1_EDC_LATCH_IN1 | 2 | I | 0 | | | | | | | | |
| | | RGMII1_TD0 | 4 | O | | | | | | | | | |
| | | RMII1_RXD0 | 5 | I | 0 | | | | | | | | |
| | | SPI3_CS3 | 6 | IO | 1 | | | | | | | | |
| | | GPIO0_72 | 7 | IO | pad | | | | | | | | |
| GPMC0_A10 | 8 | OZ | | | | | | | | | | | |
| U12 | PRG1_PRU1_GPO8 PADCONFIG: PADCONFIG74 0x000F4128 | PRG1_PRU1_GPO8 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV2 | Yes | LVCMOS | PU/PD |
| | | PRG1_PRU1_GPI8 | 1 | I | 0 | | | | | | | | |
| | | PRG1_PWM2_TZ_OUT | 3 | O | | | | | | | | | |
| | | RGMII1_RD1 | 4 | I | 0 | | | | | | | | |
| | | GPIO0_73 | 7 | IO | pad | | | | | | | | |
| V14 | PRG1_PRU1_GPO9 PADCONFIG: PADCONFIG75 0x000F412C | GPMC0_A11 | 8 | OZ | | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV2 | Yes | LVCMOS | PU/PD |
| | | PRG1_PRU1_GPO9 | 0 | IO | 0 | | | | | | | | |
| | | PRG1_PRU1_GPI9 | 1 | I | 0 | | | | | | | | |
| | | PRG1_UART0_RXD | 2 | I | 1 | | | | | | | | |
| | | RGMII1_TD1 | 4 | O | | | | | | | | | |
| | | RMII1_RXD1 | 5 | I | 0 | | | | | | | | |
| | | PRG1_IEP0_EDIO_DATA_IN_OUT30 | 6 | IO | 0 | | | | | | | | |
| GPIO0_74 | 7 | IO | pad | | | | | | | | | | |
| GPMC0_A12 | 8 | OZ | | | | | | | | | | | |

ADVANCE INFORMATION

Table 6-1. Pin Attributes (ALV Package) (continued)

| BALL NUMBER [1] | BALL NAME [2] PADCONFIG Register [15] PADCONFIG Address [16] | SIGNAL NAME [3] | MUX MODE [4] | TYPE [5] | DSIS [6] | BALL STATE DURING RESET RX/TX/PULL [7] | BALL STATE AFTER RESET RX/TX/PULL [8] | MUX MODE AFTER RESET [9] | I/O OPERATING VOLTAGE [10] | POWER [11] | HYS [12] | BUFFER TYPE [13] | PULL UP/DOWN TYPE [14] |
|-----------------|--|------------------------------|--------------|----------|----------|---|--|--------------------------|----------------------------|------------|----------|------------------|------------------------|
| W14 | PRG1_PRU1_GPO10 PADCONFIG: PADCONFIG76 0x000F4130 | PRG1_PRU1_GPO10 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV2 | Yes | LVCMOS | PU/PD |
| | | PRG1_PRU1_GPI10 | 1 | I | 0 | | | | | | | | |
| | | PRG1_UART0_TXD | 2 | O | | | | | | | | | |
| | | PRG1_PWM2_TZ_IN | 3 | I | 0 | | | | | | | | |
| | | RGMI1_TD2 | 4 | O | | | | | | | | | |
| | | RMII1_TXD0 | 5 | O | | | | | | | | | |
| | | PRG1_IEP0_EDIO_DATA_IN_OUT31 | 6 | IO | 0 | | | | | | | | |
| | | GPIO0_75 | 7 | IO | pad | | | | | | | | |
| | | GPMC0_A13 | 8 | OZ | | | | | | | | | |
| AA10 | PRG1_PRU1_GPO11 PADCONFIG: PADCONFIG77 0x000F4134 | PRG1_PRU1_GPO11 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV2 | Yes | LVCMOS | PU/PD |
| | | PRG1_PRU1_GPI11 | 1 | I | 0 | | | | | | | | |
| | | PRG1_RGMII2_TD0 | 2 | O | | | | | | | | | |
| | | RGMI2_TD0 | 4 | O | | | | | | | | | |
| | | RMII2_TXD0 | 5 | O | | | | | | | | | |
| | | GPIO0_76 | 7 | IO | pad | | | | | | | | |
| | | GPMC0_A14 | 8 | OZ | | | | | | | | | |
| V10 | PRG1_PRU1_GPO12 PADCONFIG: PADCONFIG78 0x000F4138 | PRG1_PRU1_GPO12 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV2 | Yes | LVCMOS | PU/PD |
| | | PRG1_PRU1_GPI12 | 1 | I | 0 | | | | | | | | |
| | | PRG1_RGMII2_TD1 | 2 | O | | | | | | | | | |
| | | PRG1_PWM1_A0 | 3 | IO | 0 | | | | | | | | |
| | | RGMI2_TD1 | 4 | O | | | | | | | | | |
| | | RMII2_TXD1 | 5 | O | | | | | | | | | |
| | | GPIO0_77 | 7 | IO | pad | | | | | | | | |
| | | GPMC0_A15 | 8 | OZ | | | | | | | | | |
| U10 | PRG1_PRU1_GPO13 PADCONFIG: PADCONFIG79 0x000F413C | PRG1_PRU1_GPO13 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV2 | Yes | LVCMOS | PU/PD |
| | | PRG1_PRU1_GPI13 | 1 | I | 0 | | | | | | | | |
| | | PRG1_RGMII2_TD2 | 2 | O | | | | | | | | | |
| | | PRG1_PWM1_B0 | 3 | IO | 1 | | | | | | | | |
| | | RGMI2_TD2 | 4 | O | | | | | | | | | |
| | | RMII2_CRS_DV | 5 | I | 0 | | | | | | | | |
| | | GPIO0_78 | 7 | IO | pad | | | | | | | | |
| | | GPMC0_A16 | 8 | OZ | | | | | | | | | |

Table 6-1. Pin Attributes (ALV Package) (continued)

| BALL NUMBER [1] | BALL NAME [2] PADCONFIG Register [15] PADCONFIG Address [16] | SIGNAL NAME [3] | MUX MODE [4] | TYPE [5] | DSIS [6] | BALL STATE DURING RESET RX/TX/PULL [7] | BALL STATE AFTER RESET RX/TX/PULL [8] | MUX MODE AFTER RESET [9] | I/O OPERATING VOLTAGE [10] | POWER [11] | HYS [12] | BUFFER TYPE [13] | PULL UP/DOWN TYPE [14] |
|---------------------|--|-------------------------|--------------|----------|----------|---|--|--------------------------|----------------------------|------------|----------|------------------|------------------------|
| AA11 | PRG1_PRU1_GPO14 PADCONFIG: PADCONFIG80 0x000F4140 | PRG1_PRU1_GPO14 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV2 | Yes | LVCMOS | PU/PD |
| | | PRG1_PRU1_GPI14 | 1 | I | 0 | | | | | | | | |
| | | PRG1_RGMII2_TD3 | 2 | O | | | | | | | | | |
| | | PRG1_PWM1_A1 | 3 | IO | 0 | | | | | | | | |
| | | RGMII2_TD3 | 4 | O | | | | | | | | | |
| | | GPIO0_79 | 7 | IO | pad | | | | | | | | |
| | | GPMC0_A17 | 8 | OZ | | | | | | | | | |
| Y11 | PRG1_PRU1_GPO15 PADCONFIG: PADCONFIG81 0x000F4144 | PRG1_PRU1_GPO15 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV2 | Yes | LVCMOS | PU/PD |
| | | PRG1_PRU1_GPI15 | 1 | I | 0 | | | | | | | | |
| | | PRG1_RGMII2_TX_CTL | 2 | O | | | | | | | | | |
| | | PRG1_PWM1_B1 | 3 | IO | 1 | | | | | | | | |
| | | RGMII2_TX_CTL | 4 | O | | | | | | | | | |
| | | RMI2_TX_EN | 5 | O | | | | | | | | | |
| | | GPIO0_80 | 7 | IO | pad | | | | | | | | |
| GPMC0_A18 | 8 | OZ | | | | | | | | | | | |
| Y10 | PRG1_PRU1_GPO16 PADCONFIG: PADCONFIG82 0x000F4148 | PRG1_PRU1_GPO16 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV2 | Yes | LVCMOS | PU/PD |
| | | PRG1_PRU1_GPI16 | 1 | I | 0 | | | | | | | | |
| | | PRG1_RGMII2_TXC | 2 | IO | 0 | | | | | | | | |
| | | PRG1_PWM1_A2 | 3 | IO | 0 | | | | | | | | |
| | | RGMII2_TXC | 4 | IO | 0 | | | | | | | | |
| | | GPIO0_81 | 7 | IO | pad | | | | | | | | |
| | | GPMC0_A19 | 8 | OZ | | | | | | | | | |
| AA14 | PRG1_PRU1_GPO17 PADCONFIG: PADCONFIG83 0x000F414C | PRG1_PRU1_GPO17 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV2 | Yes | LVCMOS | PU/PD |
| | | PRG1_PRU1_GPI17 | 1 | I | 0 | | | | | | | | |
| | | PRG1_IEP1_EDC_SYNC_OUT1 | 2 | O | | | | | | | | | |
| | | PRG1_PWM1_B2 | 3 | IO | 1 | | | | | | | | |
| | | RGMII1_TD3 | 4 | O | | | | | | | | | |
| | | RMI1_TXD1 | 5 | O | | | | | | | | | |
| | | GPIO0_19 | 7 | IO | pad | | | | | | | | |
| | | GPMC0_BE3n | 8 | O | | | | | | | | | |
| PRG1_ECAP0_SYNC_OUT | 9 | O | | | | | | | | | | | |

ADVANCE INFORMATION

Table 6-1. Pin Attributes (ALV Package) (continued)

| BALL NUMBER [1] | BALL NAME [2] PADCONFIG Register [15] PADCONFIG Address [16] | SIGNAL NAME [3] | MUX MODE [4] | TYPE [5] | DSIS [6] | BALL STATE DURING RESET RX/TX/PULL [7] | BALL STATE AFTER RESET RX/TX/PULL [8] | MUX MODE AFTER RESET [9] | I/O OPERATING VOLTAGE [10] | POWER [11] | HYS [12] | BUFFER TYPE [13] | PULL UP/DOWN TYPE [14] |
|------------------------|--|-------------------------|--------------|----------|----------|---|--|--------------------------|----------------------------|------------|----------|------------------|------------------------|
| Y13 | PRG1_PRU1_GPO18 PADCONFIG: PADCONFIG84 0x000F4150 | PRG1_PRU1_GPO18 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV2 | Yes | LVCMOS | PU/PD |
| | | PRG1_PRU1_GPI18 | 1 | I | 0 | | | | | | | | |
| | | PRG1_IEP1_EDC_LATCH_IN0 | 2 | I | 0 | | | | | | | | |
| | | PRG1_PWM1_TZ_IN | 3 | I | 0 | | | | | | | | |
| | | RGMI1_RD2 | 4 | I | 0 | | | | | | | | |
| | | RMII1_TX_EN | 5 | O | | | | | | | | | |
| | | GPIO0_20 | 7 | IO | pad | | | | | | | | |
| | | UART5_CTSn | 8 | I | 1 | | | | | | | | |
| | | PRG1_ECAP0_SYNC_IN | 9 | I | 0 | | | | | | | | |
| V12 | PRG1_PRU1_GPO19 PADCONFIG: PADCONFIG85 0x000F4154 | PRG1_PRU1_GPO19 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV2 | Yes | LVCMOS | PU/PD |
| | | PRG1_PRU1_GPI19 | 1 | I | 0 | | | | | | | | |
| | | PRG1_IEP1_EDC_SYNC_OUT0 | 2 | O | | | | | | | | | |
| | | PRG1_PWM1_TZ_OUT | 3 | O | | | | | | | | | |
| | | RGMI1_RD3 | 4 | I | 0 | | | | | | | | |
| | | RMII1_CRS_DV | 5 | I | 0 | | | | | | | | |
| | | SPI3_CS2 | 6 | IO | 1 | | | | | | | | |
| | | GPIO0_84 | 7 | IO | pad | | | | | | | | |
| | | UART5_RTSn | 8 | O | | | | | | | | | |
| PRG1_ECAP0_IN_APWM_OUT | 9 | IO | 0 | | | | | | | | | | |
| F16 | RESETSTATz PADCONFIG: PADCONFIG169 0x000F42A4 | RESETSTATz | 0 | O | | Off / Low / Off | Off / SS / Off | 0 | 1.8 V/3.3 V | VDDSHV0 | Yes | LVCMOS | PU/PD |
| E18 | RESET_REQz PADCONFIG: PADCONFIG168 0x000F42A0 | RESET_REQz | 0 | I | | On / Off / Up | On / Off / Up | 0 | 1.8 V/3.3 V | VDDSHV0 | Yes | LVCMOS | PU/PD |
| H16 | RSVD0 | RSVD0 | | N/A | | | | | | | | | |
| D21 | RSVD1 | RSVD1 | | N/A | | | | | | | | | |
| G13 | RSVD2 | RSVD2 | | N/A | | | | | | | | | |
| F17 | RSVD3 | RSVD3 | | N/A | | | | | | | | | |
| W15 | RSVD4 | RSVD4 | | N/A | | | | | | | | | |
| V16 | RSVD5 | RSVD5 | | N/A | | | | | | | | | |
| K2 | RSVD6 | RSVD6 | | N/A | | | | | | | | | |
| K1 | RSVD7 | RSVD7 | | N/A | | | | | | | | | |
| F12 | RSVD8 | RSVD8 | | N/A | | | | | | | | | |

ADVANCE INFORMATION

Table 6-1. Pin Attributes (ALV Package) (continued)

| BALL NUMBER [1] | BALL NAME [2] PADCONFIG Register [15] PADCONFIG Address [16] | SIGNAL NAME [3] | MUX MODE [4] | TYPE [5] | DSIS [6] | BALL STATE DURING RESET RX/TX/PULL [7] | BALL STATE AFTER RESET RX/TX/PULL [8] | MUX MODE AFTER RESET [9] | I/O OPERATING VOLTAGE [10] | POWER [11] | HYS [12] | BUFFER TYPE [13] | PULL UP/DOWN TYPE [14] |
|-----------------|--|------------------|--------------|----------|----------|---|--|--------------------------|----------------------------|--|----------|------------------|------------------------|
| T13 | SERDES0_REXT | SERDES0_REXT | | A | | | | | 1.8 V | VDDA_1P8_SERDES0 VDDA_0P85_SERDES0 VDDA_0P85_SERDES0_C | | SERDES | |
| W16 | SERDES0_REFCLK0N | SERDES0_REFCLK0N | | IO | | | | | 1.8 V | VDDA_1P8_SERDES0 VDDA_0P85_SERDES0 VDDA_0P85_SERDES0_C | | SERDES | |
| W17 | SERDES0_REFCLK0P | SERDES0_REFCLK0P | | IO | | | | | 1.8 V | VDDA_1P8_SERDES0 VDDA_0P85_SERDES0 VDDA_0P85_SERDES0_C | | SERDES | |
| Y15 | SERDES0_RX0_N | SERDES0_RX0_N | | I | | | | | 1.8 V | VDDA_1P8_SERDES0 VDDA_0P85_SERDES0 VDDA_0P85_SERDES0_C | | SERDES | |
| Y16 | SERDES0_RX0_P | SERDES0_RX0_P | | I | | | | | 1.8 V | VDDA_1P8_SERDES0 VDDA_0P85_SERDES0 VDDA_0P85_SERDES0_C | | SERDES | |
| AA16 | SERDES0_TX0_N | SERDES0_TX0_N | | O | | | | | 1.8 V | VDDA_1P8_SERDES0 VDDA_0P85_SERDES0 VDDA_0P85_SERDES0_C | | SERDES | |
| AA17 | SERDES0_TX0_P | SERDES0_TX0_P | | O | | | | | 1.8 V | VDDA_1P8_SERDES0 VDDA_0P85_SERDES0 VDDA_0P85_SERDES0_C | | SERDES | |
| D13 | SPI0_CLK PADCONFIG: PADCONFIG132 0x000F4210 | SPI0_CLK | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV0 | Yes | LVCMOS | PU/PD |
| | | GPIO1_44 | 7 | IO | pad | | | | | | | | |
| C14 | SPI1_CLK PADCONFIG: PADCONFIG137 0x000F4224 | SPI1_CLK | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV0 | Yes | LVCMOS | PU/PD |
| | | EHRPWM6_SYNCI | 3 | I | 0 | | | | | | | | |
| | | GPIO1_49 | 7 | IO | pad | | | | | | | | |

Table 6-1. Pin Attributes (ALV Package) (continued)

| BALL NUMBER [1] | BALL NAME [2] PADCONFIG Register [15] PADCONFIG Address [16] | SIGNAL NAME [3] | MUX MODE [4] | TYPE [5] | DSIS [6] | BALL STATE DURING RESET RX/TX/PULL [7] | BALL STATE AFTER RESET RX/TX/PULL [8] | MUX MODE AFTER RESET [9] | I/O OPERATING VOLTAGE [10] | POWER [11] | HYS [12] | BUFFER TYPE [13] | PULL UP/DOWN TYPE [14] |
|-----------------|--|-------------------------|--------------|----------|----------|---|--|--------------------------|----------------------------|------------|----------|------------------|------------------------|
| D12 | SPI0_CS0 PADCONFIG: PADCONFIG130 0x000F4208 | SPI0_CS0 | 0 | IO | 1 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV0 | Yes | LVCMOS | PU/PD |
| | | GPIO1_42 | 7 | IO | pad | | | | | | | | |
| C13 | SPI0_CS1 PADCONFIG: PADCONFIG131 0x000F420C | SPI0_CS1 | 0 | IO | 1 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV0 | Yes | LVCMOS | PU/PD |
| | | CPTS0_TS_COMP | 1 | O | | | | | | | | | |
| | | I2C2_SCL | 2 | IOD | 1 | | | | | | | | |
| | | TIMER_IO10 | 3 | IO | 0 | | | | | | | | |
| | | PRG0_IEP0_EDIO_OUTVALID | 4 | O | | | | | | | | | |
| | | UART6_RXD | 5 | I | 1 | | | | | | | | |
| | | ADC_EXT_TRIGGER0 | 6 | I | 0 | | | | | | | | |
| GPIO1_43 | 7 | IO | pad | | | | | | | | | | |
| A13 | SPI0_D0 PADCONFIG: PADCONFIG133 0x000F4214 | SPI0_D0 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV0 | Yes | LVCMOS | PU/PD |
| | | GPIO1_45 | 7 | IO | pad | | | | | | | | |
| A14 | SPI0_D1 PADCONFIG: PADCONFIG134 0x000F4218 | SPI0_D1 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV0 | Yes | LVCMOS | PU/PD |
| | | GPIO1_46 | 7 | IO | pad | | | | | | | | |
| B14 | SPI1_CS0 PADCONFIG: PADCONFIG135 0x000F421C | SPI1_CS0 | 0 | IO | 1 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV0 | Yes | LVCMOS | PU/PD |
| | | EHRPWM6_A | 3 | IO | 0 | | | | | | | | |
| | | GPIO1_47 | 7 | IO | pad | | | | | | | | |
| D14 | SPI1_CS1 PADCONFIG: PADCONFIG136 0x000F4220 | SPI1_CS1 | 0 | IO | 1 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV0 | Yes | LVCMOS | PU/PD |
| | | CPTS0_TS_SYNC | 1 | O | | | | | | | | | |
| | | I2C2_SDA | 2 | IOD | 1 | | | | | | | | |
| | | PRG1_IEP0_EDIO_OUTVALID | 4 | O | | | | | | | | | |
| | | UART6_TXD | 5 | O | | | | | | | | | |
| | | ADC_EXT_TRIGGER1 | 6 | I | 0 | | | | | | | | |
| | | GPIO1_48 | 7 | IO | pad | | | | | | | | |
| TIMER_IO11 | 8 | IO | 0 | | | | | | | | | | |
| B15 | SPI1_D0 PADCONFIG: PADCONFIG138 0x000F4228 | SPI1_D0 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV0 | Yes | LVCMOS | PU/PD |
| | | EHRPWM6_SYNC0 | 3 | O | | | | | | | | | |
| | | GPIO1_50 | 7 | IO | pad | | | | | | | | |
| A15 | SPI1_D1 PADCONFIG: PADCONFIG139 0x000F422C | SPI1_D1 | 0 | IO | 0 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV0 | Yes | LVCMOS | PU/PD |
| | | EHRPWM6_B | 3 | IO | 0 | | | | | | | | |
| | | GPIO1_51 | 7 | IO | pad | | | | | | | | |

Table 6-1. Pin Attributes (ALV Package) (continued)

| BALL NUMBER [1] | BALL NAME [2] PADCONFIG Register [15] PADCONFIG Address [16] | SIGNAL NAME [3] | MUX MODE [4] | TYPE [5] | DSIS [6] | BALL STATE DURING RESET RX/TX/PULL [7] | BALL STATE AFTER RESET RX/TX/PULL [8] | MUX MODE AFTER RESET [9] | I/O OPERATING VOLTAGE [10] | POWER [11] | HYS [12] | BUFFER TYPE [13] | PULL UP/DOWN TYPE [14] |
|------------------------|--|------------------|--------------|----------|----------|---|--|--------------------------|----------------------------|------------|----------|------------------|------------------------|
| B11 | TCK PADCONFIG: MCU_PADCONFIG26 0x04084068 | TCK | 0 | I | | On / Off / Up | On / Off / Up | 0 | 1.8 V/3.3 V | VDDSHV_MCU | Yes | LVC MOS | PU/PD |
| C11 | TDI PADCONFIG: MCU_PADCONFIG28 0x04084070 | TDI | 0 | I | | On / Off / Up | On / Off / Up | 0 | 1.8 V/3.3 V | VDDSHV_MCU | Yes | LVC MOS | PU/PD |
| A12 | TDO PADCONFIG: MCU_PADCONFIG29 0x04084074 | TDO | 0 | OZ | | Off / Off / Up | Off / SS / Up | 0 | 1.8 V/3.3 V | VDDSHV_MCU | Yes | LVC MOS | PU/PD |
| C12 | TMS PADCONFIG: MCU_PADCONFIG30 0x04084078 | TMS | 0 | I | | On / Off / Up | On / Off / Up | 0 | 1.8 V/3.3 V | VDDSHV_MCU | Yes | LVC MOS | PU/PD |
| D11 | TRSTn PADCONFIG: MCU_PADCONFIG27 0x0408406C | TRSTn | 0 | I | | On / Off / Down | On / Off / Down | 0 | 1.8 V/3.3 V | VDDSHV_MCU | Yes | LVC MOS | PU/PD |
| B16 | UART0_CTSn PADCONFIG: PADCONFIG142 0x000F4238 | UART0_CTSn | 0 | I | 1 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV0 | Yes | LVC MOS | PU/PD |
| | | SPI0_CS2 | 1 | IO | 1 | | | | | | | | |
| | | ADC_EXT_TRIGGER0 | 2 | I | 0 | | | | | | | | |
| | | UART2_RXD | 3 | I | 1 | | | | | | | | |
| | | TIMER_IO6 | 4 | IO | 0 | | | | | | | | |
| | | SPI4_CLK | 6 | IO | 0 | | | | | | | | |
| | | GPIO1_54 | 7 | IO | pad | | | | | | | | |
| | | EQEP0_S | 8 | IO | 0 | | | | | | | | |
| CP_GEMAC_CPTS0_TS_SYNC | 9 | O | | | | | | | | | | | |
| A16 | UART0_RTSn PADCONFIG: PADCONFIG143 0x000F423C | UART0_RTSn | 0 | O | | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV0 | Yes | LVC MOS | PU/PD |
| | | SPI0_CS3 | 1 | IO | 1 | | | | | | | | |
| | | UART2_TXD | 3 | O | | | | | | | | | |
| | | TIMER_IO7 | 4 | IO | 0 | | | | | | | | |
| | | SPI4_D0 | 6 | IO | 0 | | | | | | | | |
| | | GPIO1_55 | 7 | IO | pad | | | | | | | | |
| | | EQEP0_I | 8 | IO | 0 | | | | | | | | |
| D15 | UART0_RXD PADCONFIG: PADCONFIG140 0x000F4230 | UART0_RXD | 0 | I | 1 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV0 | Yes | LVC MOS | PU/PD |
| | | SPI2_D0 | 2 | IO | 0 | | | | | | | | |
| | | GPIO1_52 | 7 | IO | pad | | | | | | | | |
| | | EQEP0_A | 8 | I | 0 | | | | | | | | |

Table 6-1. Pin Attributes (ALV Package) (continued)

| BALL NUMBER [1] | BALL NAME [2] PADCONFIG Register [15] PADCONFIG Address [16] | SIGNAL NAME [3] | MUX MODE [4] | TYPE [5] | DSIS [6] | BALL STATE DURING RESET RX/TX/PULL [7] | BALL STATE AFTER RESET RX/TX/PULL [8] | MUX MODE AFTER RESET [9] | I/O OPERATING VOLTAGE [10] | POWER [11] | HYS [12] | BUFFER TYPE [13] | PULL UP/DOWN TYPE [14] |
|-----------------|--|--------------------------|--------------|----------|----------|---|--|--------------------------|----------------------------|--|----------|------------------|------------------------|
| C16 | UART0_TXD PADCONFIG: PADCONFIG141 0x000F4234 | UART0_TXD | 0 | O | | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV0 | Yes | LVCMOS | PU/PD |
| | | SPI2_D1 | 2 | IO | 0 | | | | | | | | |
| | | GPIO1_53 | 7 | IO | pad | | | | | | | | |
| | | EQEP0_B | 8 | I | 0 | | | | | | | | |
| D16 | UART1_CTSn PADCONFIG: PADCONFIG146 0x000F4248 | UART1_CTSn | 0 | I | 1 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV0 | Yes | LVCMOS | PU/PD |
| | | SPI1_CS2 | 1 | IO | 1 | | | | | | | | |
| | | ADC_EXT_TRIGGER1 | 2 | I | 0 | | | | | | | | |
| | | PCIE0_CLKREQn | 3 | IO | 0 | | | | | | | | |
| | | UART3_RXD | 4 | I | 1 | | | | | | | | |
| | | CP_GEMAC_CPTS0_TS_SYNC | 5 | O | | | | | | | | | |
| | | SPI4_D1 | 6 | IO | 0 | | | | | | | | |
| | | GPIO1_58 | 7 | IO | pad | | | | | | | | |
| EQEP1_S | 8 | IO | 0 | | | | | | | | | | |
| E16 | UART1_RTSn PADCONFIG: PADCONFIG147 0x000F424C | UART1_RTSn | 0 | O | | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV0 | Yes | LVCMOS | PU/PD |
| | | SPI1_CS3 | 1 | IO | 1 | | | | | | | | |
| | | UART3_TXD | 4 | O | | | | | | | | | |
| | | CP_GEMAC_CPTS0_HW2TSPUSH | 5 | I | 0 | | | | | | | | |
| | | SPI4_CS0 | 6 | IO | 1 | | | | | | | | |
| | | GPIO1_59 | 7 | IO | pad | | | | | | | | |
| EQEP1_I | 8 | IO | 0 | | | | | | | | | | |
| E15 | UART1_RXD PADCONFIG: PADCONFIG144 0x000F4240 | UART1_RXD | 0 | I | 1 | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV0 | Yes | LVCMOS | PU/PD |
| | | SPI2_CS0 | 2 | IO | 1 | | | | | | | | |
| | | CP_GEMAC_CPTS0_TS_COMP | 5 | O | | | | | | | | | |
| | | GPIO1_56 | 7 | IO | pad | | | | | | | | |
| EQEP1_A | 8 | I | 0 | | | | | | | | | | |
| E14 | UART1_TXD PADCONFIG: PADCONFIG145 0x000F4244 | UART1_TXD | 0 | O | | Off / Off / Off | Off / Off / Off | 7 | 1.8 V/3.3 V | VDDSHV0 | Yes | LVCMOS | PU/PD |
| | | SPI2_CLK | 2 | IO | 0 | | | | | | | | |
| | | CP_GEMAC_CPTS0_HW1TSPUSH | 5 | I | 0 | | | | | | | | |
| | | GPIO1_57 | 7 | IO | pad | | | | | | | | |
| EQEP1_B | 8 | I | 0 | | | | | | | | | | |
| AA20 | USB0_DM | USB0_DM | | IO | | | | | 1.8 V/3.3 V | VDDA_3P3_USB0, VDDA_1P8_USB0, VDDA_0P85_USB0 | | USB2PHY | |
| AA19 | USB0_DP | USB0_DP | | IO | | | | | 1.8 V/3.3 V | VDDA_3P3_USB0, VDDA_1P8_USB0, VDDA_0P85_USB0 | | USB2PHY | |

Table 6-1. Pin Attributes (ALV Package) (continued)

| BALL NUMBER [1] | BALL NAME [2] PADCONFIG Register [15] PADCONFIG Address [16] | SIGNAL NAME [3] | MUX MODE [4] | TYPE [5] | DSIS [6] | BALL STATE DURING RESET RX/TX/PULL [7] | BALL STATE AFTER RESET RX/TX/PULL [8] | MUX MODE AFTER RESET [9] | I/O OPERATING VOLTAGE [10] | POWER [11] | HYS [12] | BUFFER TYPE [13] | PULL UP/DOWN TYPE [14] |
|---------------------------|--|---------------------|--------------|----------|----------|---|--|--------------------------|----------------------------|--|----------|------------------|------------------------|
| E19 | USB0_DRVVBUS PADCONFIG: PADCONFIG170 0x000F42A8 | USB0_DRVVBUS | 0 | O | | | | | | | | | |
| | | GPIO1_79 | 7 | IO | pad | Off / Off / Down | Off / Off / Down | 7 | 1.8 V/3.3 V | VDDSHV0 | Yes | LVC MOS | PU/PD |
| U16 | USB0_ID | USB0_ID | | A | | | | | 1.8 V/3.3 V | VDDA_3P3_USB0, VDDA_1P8_USB0, VDDA_0P85_USB0 | | USB2PHY | |
| U17 | USB0_RCALIB | USB0_RCALIB | | A | | | | | 1.8 V/3.3 V | VDDA_3P3_USB0, VDDA_1P8_USB0, VDDA_0P85_USB0 | | USB2PHY | |
| T14 | USB0_VBUS | USB0_VBUS | | A | | | | | 1.8 V/3.3 V | VDDA_3P3_USB0, VDDA_1P8_USB0, VDDA_0P85_USB0 | | USB2PHY | |
| P12, P13 | VDDA_0P85_SERDES0 | VDDA_0P85_SERDES0 | | PWR | | | | | | | | | |
| P11 | VDDA_0P85_SERDES0_C | VDDA_0P85_SERDES0_C | | PWR | | | | | | | | | |
| T12 | VDDA_0P85_USB0 | VDDA_0P85_USB0 | | PWR | | | | | | | | | |
| R14 | VDDA_1P8_SERDES0 | VDDA_1P8_SERDES0 | | PWR | | | | | | | | | |
| R15 | VDDA_1P8_USB0 | VDDA_1P8_USB0 | | PWR | | | | | | | | | |
| H15 | VDDA_3P3_SDIO | VDDA_3P3_SDIO | | PWR | | | | | | | | | |
| R13 | VDDA_3P3_USB0 | VDDA_3P3_USB0 | | PWR | | | | | | | | | |
| J13 | VDDA_ADC | VDDA_ADC | | PWR | | | | | | | | | |
| K12 | VDDA_MCU | VDDA_MCU | | PWR | | | | | | | | | |
| N12 | VDDA_PLL0 | VDDA_PLL0 | | PWR | | | | | | | | | |
| H9 | VDDA_PLL1 | VDDA_PLL1 | | PWR | | | | | | | | | |
| J11 | VDDA_PLL2 | VDDA_PLL2 | | PWR | | | | | | | | | |
| G11 | VDDA_TEMP0 | VDDA_TEMP0 | | PWR | | | | | | | | | |
| L11 | VDDA_TEMP1 | VDDA_TEMP1 | | PWR | | | | | | | | | |
| L10, M13 | VDDR_CORE | VDDR_CORE | | PWR | | | | | | | | | |
| F11, G12, G14 | VDDSHV0 | VDDSHV0 | | PWR | | | | | | | | | |
| M7, N6, P7 | VDDSHV1 | VDDSHV1 | | PWR | | | | | | | | | |
| R10, R8, T9 | VDDSHV2 | VDDSHV2 | | PWR | | | | | | | | | |
| P14, P15 | VDDSHV3 | VDDSHV3 | | PWR | | | | | | | | | |
| M14, M15 | VDDSHV4 | VDDSHV4 | | PWR | | | | | | | | | |
| L14, L15 | VDDSHV5 | VDDSHV5 | | PWR | | | | | | | | | |
| F9, G10, G8 | VDDSHV_MCU | VDDSHV_MCU | | PWR | | | | | | | | | |
| F7, G6, H7, J6, K7, L6 | VDDS_DDR | VDDS_DDR | | PWR | | | | | | | | | |
| J8 | VDDS_DDR_C | VDDS_DDR_C | | PWR | | | | | | | | | |
| J15, K14 | VDDS_MMC0 | VDDS_MMC0 | | PWR | | | | | | | | | |
| H13 | VDDS_OSC | VDDS_OSC | | PWR | | | | | | | | | |

Table 6-1. Pin Attributes (ALV Package) (continued)

| BALL NUMBER [1] | BALL NAME [2] PADCONFIG Register [15] PADCONFIG Address [16] | SIGNAL NAME [3] | MUX MODE [4] | TYPE [5] | DSIS [6] | BALL STATE DURING RESET RX/TX/PULL [7] | BALL STATE AFTER RESET RX/TX/PULL [8] | MUX MODE AFTER RESET [9] | I/O OPERATING VOLTAGE [10] | POWER [11] | HYS [12] | BUFFER TYPE [13] | PULL UP/DOWN TYPE [14] |
|---|--|-----------------|--------------|----------|----------|---|--|--------------------------|----------------------------|------------|----------|------------------|------------------------|
| J10, J12, K11, K9, L12, L8, M11, M9, N10, N8, P9 | VDD_CORE | VDD_CORE | | PWR | | | | | | | | | |
| H14 | VDD_DLL_MMC0 | VDD_DLL_MMC0 | | PWR | | | | | | | | | |
| K13 | VDD_MMC0 | VDD_MMC0 | | PWR | | | | | | | | | |
| K16 | VMON_1P8_MCU | VMON_1P8_MCU | | A | | | | | | | | | |
| E12 | VMON_1P8_SOC | VMON_1P8_SOC | | A | | | | | | | | | |
| F13 | VMON_3P3_MCU | VMON_3P3_MCU | | A | | | | | | | | | |
| F14 | VMON_3P3_SOC | VMON_3P3_SOC | | A | | | | | | | | | |
| K10 | VMON_VSYS | VMON_VSYS | | A | | | | | | | | | |
| G15 | VPP | VPP | | PWR | | | | | | | | | |
| A1, A21, A5, A6, AA1, AA15, AA18, AA21, C10, C15, C3, D1, E11, E13, F10, F15, F8, G1, G16, G3, G7, G9, H11, H20, H21, H6, H8, J14, J16, J7, J9, K6, K8, L1, L16, L3, L7, L9, M10, M12, M6, M8, N11, N13, N15, N7, N9, P1, P10, P18, P6, P8, R12, R7, R9, T10, T11, T15, T16, T8, U3, V17, W10, W18, Y14, Y17, Y19 | VSS | VSS | | GND | | | | | | | | | |

6.3 Signal Descriptions

Many signals are available on multiple pins, according to the software configuration of the pin multiplexing options.

The following list describes the column headers:

1. **SIGNAL NAME:** The name of the signal passing through the pin.

Note

Signal names and descriptions provided in each Signal Descriptions table, represent the pin multiplexed signal function which is implemented at the pin and selected via PADCONFIG registers. Device subsystems may provide secondary multiplexing of signal functions, which are not described in these tables. For more information on secondary multiplexed signal functions, see the respective peripheral chapter of the device TRM.

2. **PIN TYPE:** Signal direction and type:

- I = Input
- O = Output
- IO = Input, Output, or simultaneously Input and Output
- IOD = Input, Output, or simultaneously Input and Output with open-drain output function
- IOZ = Input, Output, or simultaneously Input and Output with three-state output function
- OZ = Output with three-state output function
- A = Analog
- PWR = Power
- GND = Ground
- CAP = LDO Capacitor

3. **DESCRIPTION:** Description of the signal

4. **BALL:** Ball number(s) associated with signal

For more information on the IO cell configurations, see the *Pad Configuration Registers* section in *Device Configuration* chapter of the device TRM.

6.3.1 ADC

Note

The ADC can be configured to operate as eight general-purpose digital inputs. For more information, see Analog-to-Digital Converter (ADC) section in Peripherals chapter in the device TRM.

6.3.1.1 MAIN Domain

Table 6-2. ADC0 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|------------------|--------------|--|-------------|
| ADC0_AIN0 | A | ADC Analog Input 0 / GPIO1_80 (Input Only) | G20 |
| ADC0_AIN1 | A | ADC Analog Input 1 / GPIO1_81 (Input Only) | F20 |
| ADC0_AIN2 | A | ADC Analog Input 2 / GPIO1_82 (Input Only) | E21 |
| ADC0_AIN3 | A | ADC Analog Input 3 / GPIO1_83 (Input Only) | D20 |
| ADC0_AIN4 | A | ADC Analog Input 4 / GPIO1_84 (Input Only) | G21 |
| ADC0_AIN5 | A | ADC Analog Input 5 / GPIO1_85 (Input Only) | F21 |
| ADC0_AIN6 | A | ADC Analog Input 6 / GPIO1_86 (Input Only) | F19 |
| ADC0_AIN7 | A | ADC Analog Input 7 / GPIO1_87 (Input Only) | E20 |
| ADC_EXT_TRIGGER0 | I | ADC Trigger Input | B16, C13 |

Table 6-2. ADC0 Signal Descriptions (continued)

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|------------------|--------------|-------------------|-------------|
| ADC_EXT_TRIGGER1 | I | ADC Trigger Input | D14, D16 |

6.3.2 CPSW3G

6.3.2.1 MAIN Domain

Table 6-3. CPSW3G0 RGMII1 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|------------------------|-------------|
| RGMII1_RXC | I | RGMII Receive Clock | AA5, W13 |
| RGMII1_RX_CTL | I | RGMII Receive Control | V13, W6 |
| RGMII1_TXC | IO | RGMII Transmit Clock | U14 |
| RGMII1_TX_CTL | O | RGMII Transmit Control | U15 |
| RGMII1_RD0 | I | RGMII Receive Data 0 | AA13, W5 |
| RGMII1_RD1 | I | RGMII Receive Data 1 | U12, Y5 |
| RGMII1_RD2 | I | RGMII Receive Data 2 | V6, Y13 |
| RGMII1_RD3 | I | RGMII Receive Data 3 | V12, V5 |
| RGMII1_TD0 | O | RGMII Transmit Data 0 | V15 |
| RGMII1_TD1 | O | RGMII Transmit Data 1 | V14 |
| RGMII1_TD2 | O | RGMII Transmit Data 2 | W14 |
| RGMII1_TD3 | O | RGMII Transmit Data 3 | AA14 |

Table 6-4. CPSW3G0 RGMII2 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|------------------------|-------------|
| RGMII2_RXC | I | RGMII Receive Clock | U11 |
| RGMII2_RX_CTL | I | RGMII Receive Control | W12 |
| RGMII2_TXC | IO | RGMII Transmit Clock | Y10 |
| RGMII2_TX_CTL | O | RGMII Transmit Control | Y11 |
| RGMII2_RD0 | I | RGMII Receive Data 0 | W11 |
| RGMII2_RD1 | I | RGMII Receive Data 1 | V11 |
| RGMII2_RD2 | I | RGMII Receive Data 2 | AA12 |
| RGMII2_RD3 | I | RGMII Receive Data 3 | Y12 |
| RGMII2_TD0 | O | RGMII Transmit Data 0 | AA10 |
| RGMII2_TD1 | O | RGMII Transmit Data 1 | V10 |
| RGMII2_TD2 | O | RGMII Transmit Data 2 | U10 |
| RGMII2_TD3 | O | RGMII Transmit Data 3 | AA11 |

Table 6-5. CPSW3G0 RMII1 and RMII2 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|---------------------------------|-------------|
| RMII1_CRS_DV | I | RMII Carrier Sense / Data Valid | R2, V12 |
| RMII1_RX_ER | I | RMII Receive Data Error | U15, W6 |
| RMII1_TX_EN | O | RMII Transmit Enable | P5, Y13 |
| RMII2_CRS_DV | I | RMII Carrier Sense / Data Valid | U10 |
| RMII2_RX_ER | I | RMII Receive Data Error | W12 |
| RMII2_TX_EN | O | RMII Transmit Enable | Y11 |
| RMII1_RXD0 | I | RMII Receive Data 0 | V15, W5 |
| RMII1_RXD1 | I | RMII Receive Data 1 | V14, Y5 |
| RMII1_TXD0 | O | RMII Transmit Data 0 | V6, W14 |

Table 6-5. CPSW3G0 RMI1 and RMI2 Signal Descriptions (continued)

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|------------------|--------------|----------------------|-------------|
| RMI1_TXD1 | O | RMI1 Transmit Data 1 | AA14, V5 |
| RMI2_RXD0 | I | RMI2 Receive Data 0 | W11 |
| RMI2_RXD1 | I | RMI2 Receive Data 1 | V11 |
| RMI2_TXD0 | O | RMI2 Transmit Data 0 | AA10 |
| RMI2_TXD1 | O | RMI2 Transmit Data 1 | V10 |
| RMI2_REF_CLK (1) | I | RMI2 Reference Clock | AA5, U14 |

(1) RMI2_REF_CLK is common to both RMI1 and RMI2.

6.3.3 CPTS

6.3.3.1 MAIN Domain

Table 6-6. CP GEMAC CPTS0 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|--------------------------|--------------|--|-------------------|
| CP_GEMAC_CPTS0_RFT_CLK | I | CPTS Reference Clock Input to CPSW3G0 CPTS | D18 |
| CP_GEMAC_CPTS0_TS_COMP | O | CPTS Time Stamp Counter Compare Output from CPSW3G0 CPTS | E15, K18, W1 |
| CP_GEMAC_CPTS0_TS_SYNC | O | CPTS Time Stamp Counter Bit Output from CPSW3G0 CPTS | B16, D16, K19, U1 |
| CP_GEMAC_CPTS0_HW1TSPUSH | I | CPTS Hardware Time Stamp Push Input to CPSW3G0 CPTS | E14, L21, V1 |
| CP_GEMAC_CPTS0_HW2TSPUSH | I | CPTS Hardware Time Stamp Push Input to CPSW3G0 CPTS | E16, K21, T1 |

Table 6-7. CPTS0 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|--|--------------|
| CPTS0_RFT_CLK | I | CPTS Reference Clock Input | D18 |
| CPTS0_TS_COMP | O | CPTS Time Stamp Counter Compare Output | C13, W1, W7 |
| CPTS0_TS_SYNC | O | CPTS Time Stamp Counter Bit Output | D14, U1, U7 |
| CPTS0_HW1TSPUSH | I | CPTS Hardware Time Stamp Push Input to Time Sync Router | C18, V1, V7 |
| CPTS0_HW2TSPUSH | I | CPTS Hardware Time Stamp Push Input to Time Sync Router | B19, T1, U13 |
| SYNC0_OUT | O | CPTS Time Stamp Generator Bit 0 Output from Time Sync Router | D18 |
| SYNC1_OUT | O | CPTS Time Stamp Generator Bit 1 Output from Time Sync Router | A19 |
| SYNC2_OUT | O | CPTS Time Stamp Generator Bit 2 Output from Time Sync Router | A17 |
| SYNC3_OUT | O | CPTS Time Stamp Generator Bit 3 Output from Time Sync Router | B17 |

6.3.4 DDRSS

6.3.4.1 MAIN Domain

Table 6-8. DDRSS0 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|----------------------------------|-------------|
| DDR0_ACT_n | O | DDRSS Activation Command | H2 |
| DDR0_ALERT_n | IO | DDRSS Alert | H1 |
| DDR0_CAS_n | O | DDRSS Column Address Strobe | J5 |
| DDR0_PAR | O | DDRSS Command and Address Parity | K5 |

Table 6-8. DDRSS0 Signal Descriptions (continued)

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|--------------------------|--------------|-----------------------------|-------------|
| DDR0_RAS_n | O | DDRSS Row Address Strobe | F6 |
| DDR0_WE_n | O | DDRSS Write Enable | H4 |
| DDR0_A0 | O | DDRSS Address Bus | D2 |
| DDR0_A1 | O | DDRSS Address Bus | C5 |
| DDR0_A2 | O | DDRSS Address Bus | E2 |
| DDR0_A3 | O | DDRSS Address Bus | D4 |
| DDR0_A4 | O | DDRSS Address Bus | D3 |
| DDR0_A5 | O | DDRSS Address Bus | F2 |
| DDR0_A6 | O | DDRSS Address Bus | J2 |
| DDR0_A7 | O | DDRSS Address Bus | L5 |
| DDR0_A8 | O | DDRSS Address Bus | J3 |
| DDR0_A9 | O | DDRSS Address Bus | J4 |
| DDR0_A10 | O | DDRSS Address Bus | K3 |
| DDR0_A11 | O | DDRSS Address Bus | J1 |
| DDR0_A12 | O | DDRSS Address Bus | M5 |
| DDR0_A13 | O | DDRSS Address Bus | K4 |
| DDR0_BA0 | O | DDRSS Bank Address | G4 |
| DDR0_BA1 | O | DDRSS Bank Address | G5 |
| DDR0_BG0 | O | DDRSS Bank Group | G2 |
| DDR0_BG1 | O | DDRSS Bank Group | H3 |
| DDR0_CAL0 ⁽¹⁾ | A | IO Pad Calibration Resistor | H5 |
| DDR0_CK0 | O | DDRSS Clock | F1 |
| DDR0_CK0_n | O | DDRSS Negative Clock | E1 |
| DDR0_CKE0 | O | DDRSS Clock Enable | F4 |
| DDR0_CKE1 | O | DDRSS Clock Enable | F3 |
| DDR0_CS0_n | O | DDRSS Chip Select 0 | E3 |
| DDR0_CS1_n | O | DDRSS Chip Select 1 | E4 |
| DDR0_DM0 | IO | DDRSS Data Mask | B2 |
| DDR0_DM1 | IO | DDRSS Data Mask | M2 |
| DDR0_DQ0 | IO | DDRSS Data | A3 |
| DDR0_DQ1 | IO | DDRSS Data | A2 |
| DDR0_DQ2 | IO | DDRSS Data | B5 |
| DDR0_DQ3 | IO | DDRSS Data | A4 |
| DDR0_DQ4 | IO | DDRSS Data | B3 |
| DDR0_DQ5 | IO | DDRSS Data | C4 |
| DDR0_DQ6 | IO | DDRSS Data | C2 |
| DDR0_DQ7 | IO | DDRSS Data | B4 |
| DDR0_DQ8 | IO | DDRSS Data | N5 |
| DDR0_DQ9 | IO | DDRSS Data | L4 |
| DDR0_DQ10 | IO | DDRSS Data | L2 |
| DDR0_DQ11 | IO | DDRSS Data | M3 |
| DDR0_DQ12 | IO | DDRSS Data | N4 |
| DDR0_DQ13 | IO | DDRSS Data | N3 |
| DDR0_DQ14 | IO | DDRSS Data | M4 |
| DDR0_DQ15 | IO | DDRSS Data | N2 |

ADVANCE INFORMATION

Table 6-8. DDRSS0 Signal Descriptions (continued)

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|--|-------------|
| DDR0_DQS0 | IO | DDRSS Data Strobe 0 | C1 |
| DDR0_DQS0_n | IO | DDRSS Complimentary Data Strobe 0 | B1 |
| DDR0_DQS1 | IO | DDRSS Data Strobe 1 | N1 |
| DDR0_DQS1_n | IO | DDRSS Complimentary Data Strobe 1 | M1 |
| DDR0_ODT0 | O | DDRSS On-Die Termination for Chip Select 0 | E5 |
| DDR0_ODT1 | O | DDRSS On-Die Termination for Chip Select 1 | F5 |
| DDR0_RESET0_n | O | DDRSS Reset | D5 |

(1) An external 240 Ω ±1% resistor must be connected between this pin and VSS. No external voltage should be applied to this pin.

6.3.5 ECAP

6.3.5.1 MAIN Domain

Table 6-9. ECAP0 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-------------------|--------------|---|-------------|
| ECAP0_IN_APWM_OUT | IO | Enhanced Capture (ECAP) Input or Auxiliary PWM (APWM) Ouput | D18 |

Table 6-10. ECAP1 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-------------------|--------------|---|-------------|
| ECAP1_IN_APWM_OUT | IO | Enhanced Capture (ECAP) Input or Auxiliary PWM (APWM) Ouput | C17 |

Table 6-11. ECAP2 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-------------------|--------------|---|-------------|
| ECAP2_IN_APWM_OUT | IO | Enhanced Capture (ECAP) Input or Auxiliary PWM (APWM) Ouput | D17 |

6.3.6 Emulation and Debug

6.3.6.1 MAIN Domain

Table 6-12. Trace Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|-----------------|-------------|
| TRC_CLK | O | Trace Clock | T20 |
| TRC_CTL | O | Trace Control | U21 |
| TRC_DATA0 | O | Trace Data 0 | T18 |
| TRC_DATA1 | O | Trace Data 1 | U20 |
| TRC_DATA2 | O | Trace Data 2 | U18 |
| TRC_DATA3 | O | Trace Data 3 | U19 |
| TRC_DATA4 | O | Trace Data 4 | V20 |
| TRC_DATA5 | O | Trace Data 5 | V21 |
| TRC_DATA6 | O | Trace Data 6 | V19 |
| TRC_DATA7 | O | Trace Data 7 | T17 |
| TRC_DATA8 | O | Trace Data 8 | R16 |
| TRC_DATA9 | O | Trace Data 9 | W20 |
| TRC_DATA10 | O | Trace Data 10 | W21 |
| TRC_DATA11 | O | Trace Data 11 | V18 |
| TRC_DATA12 | O | Trace Data 12 | Y21 |
| TRC_DATA13 | O | Trace Data 13 | Y20 |

Table 6-12. Trace Signal Descriptions (continued)

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|-----------------|-------------|
| TRC_DATA14 | O | Trace Data 14 | R17 |
| TRC_DATA15 | O | Trace Data 15 | P16 |
| TRC_DATA16 | O | Trace Data 16 | R18 |
| TRC_DATA17 | O | Trace Data 17 | T21 |
| TRC_DATA18 | O | Trace Data 18 | P17 |
| TRC_DATA19 | O | Trace Data 19 | T19 |
| TRC_DATA20 | O | Trace Data 20 | W19 |
| TRC_DATA21 | O | Trace Data 21 | Y18 |
| TRC_DATA22 | O | Trace Data 22 | N16 |
| TRC_DATA23 | O | Trace Data 23 | R19 |

6.3.6.2 MCU Domain

Table 6-13. JTAG Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|-----------------------------|-------------|
| EMU0 | IO | Emulation Control 0 | D10 |
| EMU1 | IO | Emulation Control 1 | E10 |
| TCK | I | JTAG Test Clock Input | B11 |
| TDI | I | JTAG Test Data Input | C11 |
| TDO | OZ | JTAG Test Data Output | A12 |
| TMS | I | JTAG Test Mode Select Input | C12 |
| TRSTn | I | JTAG Reset | D11 |

6.3.7 EPWM

6.3.7.1 MAIN Domain

Table 6-14. EPWM Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|---------------------------------------|-------------|
| EHRPWM_SOC_A | O | EHRPWM Start of Conversion A | C17 |
| EHRPWM_SOC_B | O | EHRPWM Start of Conversion B | D17 |
| EHRPWM_TZn_IN0 | I | EHRPWM Trip Zone Input 0 (active low) | T18 |
| EHRPWM_TZn_IN1 | I | EHRPWM Trip Zone Input 1 (active low) | V21 |
| EHRPWM_TZn_IN2 | I | EHRPWM Trip Zone Input 2 (active low) | R16, R20 |
| EHRPWM_TZn_IN3 | I | EHRPWM Trip Zone Input 3 (active low) | P16 |
| EHRPWM_TZn_IN4 | I | EHRPWM Trip Zone Input 4 (active low) | P17, P19 |
| EHRPWM_TZn_IN5 | I | EHRPWM Trip Zone Input 5 (active low) | R21, Y18 |

Table 6-15. EPWM0 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|--|-------------|
| EHRPWM0_A | IO | EHRPWM Output A | U20 |
| EHRPWM0_B | IO | EHRPWM Output B | U18 |
| EHRPWM0_SYNCI | I | Sync Input to EHRPWM module from an external pin | T20 |
| EHRPWM0_SYNCO | O | Sync Output to EHRPWM module to an external pin | U21 |

Table 6-16. EPWM1 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|-----------------|-------------|
| EHRPWM1_A | IO | EHRPWM Output A | U19 |

Table 6-16. EPWM1 Signal Descriptions (continued)

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|-----------------|-------------|
| EHRPWM1_B | IO | EHRPWM Output B | V20 |

Table 6-17. EPWM2 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|-----------------|-------------|
| EHRPWM2_A | IO | EHRPWM Output A | V19 |
| EHRPWM2_B | IO | EHRPWM Output B | T17 |

Table 6-18. EPWM3 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|--|-------------|
| EHRPWM3_A | IO | EHRPWM Output A | V18 |
| EHRPWM3_B | IO | EHRPWM Output B | Y21 |
| EHRPWM3_SYNCI | I | Sync Input to EHRPWM module from an external pin | Y20 |
| EHRPWM3_SYNCO | O | Sync Output to EHRPWM module to an external pin | R17 |

Table 6-19. EPWM4 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|-----------------|-------------|
| EHRPWM4_A | IO | EHRPWM Output A | R18 |
| EHRPWM4_B | IO | EHRPWM Output B | T21 |

Table 6-20. EPWM5 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|-----------------|-------------|
| EHRPWM5_A | IO | EHRPWM Output A | T19 |
| EHRPWM5_B | IO | EHRPWM Output B | W19 |

Table 6-21. EPWM6 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|--|-------------|
| EHRPWM6_A | IO | EHRPWM Output A | B14, N16 |
| EHRPWM6_B | IO | EHRPWM Output B | A15, N17 |
| EHRPWM6_SYNCI | I | Sync Input to EHRPWM module from an external pin | C14, R19 |
| EHRPWM6_SYNCO | O | Sync Output to EHRPWM module to an external pin | B15, R20 |

Table 6-22. EPWM7 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|-----------------|--------------|
| EHRPWM7_A | IO | EHRPWM Output A | P17, P5, W20 |
| EHRPWM7_B | IO | EHRPWM Output B | R2, W21, Y18 |

Table 6-23. EPWM8 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|-----------------|-------------|
| EHRPWM8_A | IO | EHRPWM Output A | V1, V21 |
| EHRPWM8_B | IO | EHRPWM Output B | R16, W1 |

6.3.8 EQEP

6.3.8.1 MAIN Domain

Table 6-24. EQEP0 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|-------------------------|--------------|
| EQEP0_A | I | EQEP Quadrature Input A | D15, N16, Y2 |

Table 6-24. EQEP0 Signal Descriptions (continued)

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|-------------------------|------------------|
| EQEP0_B | I | EQEP Quadrature Input B | C16, N17, W2 |
| EQEP0_I | IO | EQEP Index | A16, R20, T6, Y5 |
| EQEP0_S | IO | EQEP Strobe | B16, R19, V3 |

Table 6-25. EQEP1 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|-------------------------|------------------|
| EQEP1_A | I | EQEP Quadrature Input A | E15, T4, W20 |
| EQEP1_B | I | EQEP Quadrature Input B | E14, W21, W3 |
| EQEP1_I | IO | EQEP Index | E16, R21, U6, V6 |
| EQEP1_S | IO | EQEP Strobe | D16, P19, P4 |

Table 6-26. EQEP2 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|-------------------------|-------------|
| EQEP2_A | I | EQEP Quadrature Input A | C17, R5 |
| EQEP2_B | I | EQEP Quadrature Input B | D17, W5, Y4 |
| EQEP2_I | IO | EQEP Index | A17, W4 |
| EQEP2_S | IO | EQEP Strobe | B17, R1 |

6.3.9 FSI

6.3.9.1 MAIN Domain

Table 6-27. FSI0 RX Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|-----------------|-------------|
| FSI_RX0_CLK | I | FSI Clock | V19 |
| FSI_RX0_D0 | I | FSI Data | T17 |
| FSI_RX0_D1 | I | FSI Data | R16 |

Table 6-28. FSI0 TX Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|-----------------|-------------|
| FSI_TX0_CLK | O | FSI Clock | T19 |
| FSI_TX0_D0 | O | FSI Data | Y21 |
| FSI_TX0_D1 | O | FSI Data | Y20 |

Table 6-29. FSI1 RX Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|-----------------|-------------|
| FSI_RX1_CLK | I | FSI Clock | W20 |
| FSI_RX1_D0 | I | FSI Data | W21 |
| FSI_RX1_D1 | I | FSI Data | V18 |

Table 6-30. FSI1 TX Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|-----------------|-------------|
| FSI_TX1_CLK | O | FSI Clock | N16 |
| FSI_TX1_D0 | O | FSI Data | P17 |
| FSI_TX1_D1 | O | FSI Data | Y18 |

Table 6-31. FSI2 RX Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|-----------------|-------------|
| FSI_RX2_CLK | I | FSI Clock | T20 |
| FSI_RX2_D0 | I | FSI Data | U21 |
| FSI_RX2_D1 | I | FSI Data | T18 |

Table 6-32. FSI3 RX Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|-----------------|-------------|
| FSI_RX3_CLK | I | FSI Clock | U20 |
| FSI_RX3_D0 | I | FSI Data | U18 |
| FSI_RX3_D1 | I | FSI Data | U19 |

Table 6-33. FSI4 RX Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|-----------------|-------------|
| FSI_RX4_CLK | I | FSI Clock | R17 |
| FSI_RX4_D0 | I | FSI Data | V20 |
| FSI_RX4_D1 | I | FSI Data | V21 |

Table 6-34. FSI5 RX Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|-----------------|-------------|
| FSI_RX5_CLK | I | FSI Clock | P16 |
| FSI_RX5_D0 | I | FSI Data | R18 |
| FSI_RX5_D1 | I | FSI Data | T21 |

6.3.10 GPIO

6.3.10.1 MAIN Domain

Table 6-35. GPIO0 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|------------------------------|-------------|
| GPIO0_0 | IO | General Purpose Input/Output | N20 |
| GPIO0_1 | IO | General Purpose Input/Output | N21 |
| GPIO0_2 | IO | General Purpose Input/Output | N19 |
| GPIO0_3 | IO | General Purpose Input/Output | M19 |
| GPIO0_4 | IO | General Purpose Input/Output | M18 |
| GPIO0_5 | IO | General Purpose Input/Output | M20 |
| GPIO0_6 | IO | General Purpose Input/Output | M21 |
| GPIO0_7 | IO | General Purpose Input/Output | P21 |
| GPIO0_8 | IO | General Purpose Input/Output | P20 |
| GPIO0_9 | IO | General Purpose Input/Output | N18 |
| GPIO0_10 | IO | General Purpose Input/Output | M17 |
| GPIO0_11 | IO | General Purpose Input/Output | L19 |
| GPIO0_12 | IO | General Purpose Input/Output | L18 |
| GPIO0_13 | IO | General Purpose Input/Output | K17 |
| GPIO0_14 | IO | General Purpose Input/Output | L17 |
| GPIO0_15 | IO | General Purpose Input/Output | T20 |
| GPIO0_16 | IO | General Purpose Input/Output | U21 |
| GPIO0_17 | IO | General Purpose Input/Output | T18 |
| GPIO0_18 | IO | General Purpose Input/Output | U20 |

Table 6-35. GPIO0 Signal Descriptions (continued)

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|------------------------------|-------------|
| GPIO0_19 | IO | General Purpose Input/Output | AA14 |
| GPIO0_20 | IO | General Purpose Input/Output | Y13 |
| GPIO0_21 | IO | General Purpose Input/Output | V20 |
| GPIO0_22 | IO | General Purpose Input/Output | V21 |
| GPIO0_23 | IO | General Purpose Input/Output | V19 |
| GPIO0_24 | IO | General Purpose Input/Output | T17 |
| GPIO0_25 | IO | General Purpose Input/Output | R16 |
| GPIO0_26 | IO | General Purpose Input/Output | W20 |
| GPIO0_27 | IO | General Purpose Input/Output | W21 |
| GPIO0_28 | IO | General Purpose Input/Output | V18 |
| GPIO0_29 | IO | General Purpose Input/Output | Y21 |
| GPIO0_30 | IO | General Purpose Input/Output | Y20 |
| GPIO0_31 | IO | General Purpose Input/Output | R17 |
| GPIO0_32 | IO | General Purpose Input/Output | P16 |
| GPIO0_33 | IO | General Purpose Input/Output | R18 |
| GPIO0_34 | IO | General Purpose Input/Output | T21 |
| GPIO0_35 | IO | General Purpose Input/Output | P17 |
| GPIO0_36 | IO | General Purpose Input/Output | T19 |
| GPIO0_37 | IO | General Purpose Input/Output | W19 |
| GPIO0_38 | IO | General Purpose Input/Output | Y18 |
| GPIO0_39 | IO | General Purpose Input/Output | N16 |
| GPIO0_40 | IO | General Purpose Input/Output | N17 |
| GPIO0_41 | IO | General Purpose Input/Output | R19 |
| GPIO0_42 | IO | General Purpose Input/Output | R20 |
| GPIO0_43 | IO | General Purpose Input/Output | P19 |
| GPIO0_44 | IO | General Purpose Input/Output | R21 |
| GPIO0_45 | IO | General Purpose Input/Output | Y7 |
| GPIO0_46 | IO | General Purpose Input/Output | U8 |
| GPIO0_47 | IO | General Purpose Input/Output | W8 |
| GPIO0_48 | IO | General Purpose Input/Output | V8 |
| GPIO0_49 | IO | General Purpose Input/Output | Y8 |
| GPIO0_50 | IO | General Purpose Input/Output | V13 |
| GPIO0_51 | IO | General Purpose Input/Output | AA7 |
| GPIO0_52 | IO | General Purpose Input/Output | U13 |
| GPIO0_53 | IO | General Purpose Input/Output | W13 |
| GPIO0_54 | IO | General Purpose Input/Output | U15 |
| GPIO0_55 | IO | General Purpose Input/Output | U14 |
| GPIO0_56 | IO | General Purpose Input/Output | AA8 |
| GPIO0_57 | IO | General Purpose Input/Output | U9 |
| GPIO0_58 | IO | General Purpose Input/Output | W9 |
| GPIO0_59 | IO | General Purpose Input/Output | AA9 |
| GPIO0_60 | IO | General Purpose Input/Output | Y9 |
| GPIO0_61 | IO | General Purpose Input/Output | V9 |
| GPIO0_62 | IO | General Purpose Input/Output | U7 |
| GPIO0_63 | IO | General Purpose Input/Output | V7 |

Table 6-35. GPIO0 Signal Descriptions (continued)

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|------------------------------|-------------|
| GPIO0_64 | IO | General Purpose Input/Output | W7 |
| GPIO0_65 | IO | General Purpose Input/Output | W11 |
| GPIO0_66 | IO | General Purpose Input/Output | V11 |
| GPIO0_67 | IO | General Purpose Input/Output | AA12 |
| GPIO0_68 | IO | General Purpose Input/Output | Y12 |
| GPIO0_69 | IO | General Purpose Input/Output | W12 |
| GPIO0_70 | IO | General Purpose Input/Output | AA13 |
| GPIO0_71 | IO | General Purpose Input/Output | U11 |
| GPIO0_72 | IO | General Purpose Input/Output | V15 |
| GPIO0_73 | IO | General Purpose Input/Output | U12 |
| GPIO0_74 | IO | General Purpose Input/Output | V14 |
| GPIO0_75 | IO | General Purpose Input/Output | W14 |
| GPIO0_76 | IO | General Purpose Input/Output | AA10 |
| GPIO0_77 | IO | General Purpose Input/Output | V10 |
| GPIO0_78 | IO | General Purpose Input/Output | U10 |
| GPIO0_79 | IO | General Purpose Input/Output | AA11 |
| GPIO0_80 | IO | General Purpose Input/Output | Y11 |
| GPIO0_81 | IO | General Purpose Input/Output | Y10 |
| GPIO0_82 | IO | General Purpose Input/Output | U18 |
| GPIO0_83 | IO | General Purpose Input/Output | U19 |
| GPIO0_84 | IO | General Purpose Input/Output | V12 |
| GPIO0_85 | IO | General Purpose Input/Output | AA6 |
| GPIO0_86 | IO | General Purpose Input/Output | Y6 |

Table 6-36. GPIO1 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|------------------------------|-------------|
| GPIO1_0 | IO | General Purpose Input/Output | Y1 |
| GPIO1_1 | IO | General Purpose Input/Output | R4 |
| GPIO1_2 | IO | General Purpose Input/Output | U2 |
| GPIO1_3 | IO | General Purpose Input/Output | V2 |
| GPIO1_4 | IO | General Purpose Input/Output | AA2 |
| GPIO1_5 | IO | General Purpose Input/Output | R3 |
| GPIO1_6 | IO | General Purpose Input/Output | T3 |
| GPIO1_7 | IO | General Purpose Input/Output | T1 |
| GPIO1_8 | IO | General Purpose Input/Output | T2 |
| GPIO1_9 | IO | General Purpose Input/Output | W6 |
| GPIO1_10 | IO | General Purpose Input/Output | AA5 |
| GPIO1_11 | IO | General Purpose Input/Output | Y3 |
| GPIO1_12 | IO | General Purpose Input/Output | AA3 |
| GPIO1_13 | IO | General Purpose Input/Output | R6 |
| GPIO1_14 | IO | General Purpose Input/Output | V4 |
| GPIO1_15 | IO | General Purpose Input/Output | T5 |
| GPIO1_16 | IO | General Purpose Input/Output | U4 |
| GPIO1_17 | IO | General Purpose Input/Output | U1 |
| GPIO1_18 | IO | General Purpose Input/Output | V1 |

Table 6-36. GPIO1 Signal Descriptions (continued)

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|------------------------------|-------------|
| GPIO1_19 | IO | General Purpose Input/Output | W1 |
| GPIO1_20 | IO | General Purpose Input/Output | Y2 |
| GPIO1_21 | IO | General Purpose Input/Output | W2 |
| GPIO1_22 | IO | General Purpose Input/Output | V3 |
| GPIO1_23 | IO | General Purpose Input/Output | T4 |
| GPIO1_24 | IO | General Purpose Input/Output | W3 |
| GPIO1_25 | IO | General Purpose Input/Output | P4 |
| GPIO1_26 | IO | General Purpose Input/Output | R5 |
| GPIO1_27 | IO | General Purpose Input/Output | W5 |
| GPIO1_28 | IO | General Purpose Input/Output | R1 |
| GPIO1_29 | IO | General Purpose Input/Output | Y5 |
| GPIO1_30 | IO | General Purpose Input/Output | V6 |
| GPIO1_31 | IO | General Purpose Input/Output | W4 |
| GPIO1_32 | IO | General Purpose Input/Output | Y4 |
| GPIO1_33 | IO | General Purpose Input/Output | T6 |
| GPIO1_34 | IO | General Purpose Input/Output | U6 |
| GPIO1_35 | IO | General Purpose Input/Output | U5 |
| GPIO1_36 | IO | General Purpose Input/Output | AA4 |
| GPIO1_37 | IO | General Purpose Input/Output | V5 |
| GPIO1_38 | IO | General Purpose Input/Output | P5 |
| GPIO1_39 | IO | General Purpose Input/Output | R2 |
| GPIO1_40 | IO | General Purpose Input/Output | P2 |
| GPIO1_41 | IO | General Purpose Input/Output | P3 |
| GPIO1_42 | IO | General Purpose Input/Output | D12 |
| GPIO1_43 | IO | General Purpose Input/Output | C13 |
| GPIO1_44 | IO | General Purpose Input/Output | D13 |
| GPIO1_45 | IO | General Purpose Input/Output | A13 |
| GPIO1_46 | IO | General Purpose Input/Output | A14 |
| GPIO1_47 | IO | General Purpose Input/Output | B14 |
| GPIO1_48 | IO | General Purpose Input/Output | D14 |
| GPIO1_49 | IO | General Purpose Input/Output | C14 |
| GPIO1_50 | IO | General Purpose Input/Output | B15 |
| GPIO1_51 | IO | General Purpose Input/Output | A15 |
| GPIO1_52 | IO | General Purpose Input/Output | D15 |
| GPIO1_53 | IO | General Purpose Input/Output | C16 |
| GPIO1_54 | IO | General Purpose Input/Output | B16 |
| GPIO1_55 | IO | General Purpose Input/Output | A16 |
| GPIO1_56 | IO | General Purpose Input/Output | E15 |
| GPIO1_57 | IO | General Purpose Input/Output | E14 |
| GPIO1_58 | IO | General Purpose Input/Output | D16 |
| GPIO1_59 | IO | General Purpose Input/Output | E16 |
| GPIO1_60 | IO | General Purpose Input/Output | A17 |
| GPIO1_61 | IO | General Purpose Input/Output | B17 |
| GPIO1_62 | IO | General Purpose Input/Output | C17 |
| GPIO1_63 | IO | General Purpose Input/Output | D17 |

Table 6-36. GPIO1 Signal Descriptions (continued)

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|------------------------------|-------------|
| GPIO1_64 | IO | General Purpose Input/Output | A18 |
| GPIO1_65 | IO | General Purpose Input/Output | B18 |
| GPIO1_66 | IO | General Purpose Input/Output | C18 |
| GPIO1_67 | IO | General Purpose Input/Output | B19 |
| GPIO1_68 | IO | General Purpose Input/Output | D18 |
| GPIO1_69 | IO | General Purpose Input/Output | A19 |
| GPIO1_70 | IO | General Purpose Input/Output | C19 |
| GPIO1_71 | IO | General Purpose Input/Output | K18 |
| GPIO1_72 | IO | General Purpose Input/Output | K19 |
| GPIO1_73 | IO | General Purpose Input/Output | L21 |
| GPIO1_74 | IO | General Purpose Input/Output | K21 |
| GPIO1_75 | IO | General Purpose Input/Output | L20 |
| GPIO1_76 | IO | General Purpose Input/Output | J19 |
| GPIO1_77 | IO | General Purpose Input/Output | D19 |
| GPIO1_78 | IO | General Purpose Input/Output | C20 |
| GPIO1_79 | IO | General Purpose Input/Output | E19 |

6.3.10.2 MCU Domain

Table 6-37. MCU_GPIO0 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|------------------------------|-------------|
| MCU_GPIO0_0 | IO | General Purpose Input/Output | E8 |
| MCU_GPIO0_1 | IO | General Purpose Input/Output | D8 |
| MCU_GPIO0_2 | IO | General Purpose Input/Output | A8 |
| MCU_GPIO0_3 | IO | General Purpose Input/Output | A9 |
| MCU_GPIO0_4 | IO | General Purpose Input/Output | B6 |
| MCU_GPIO0_5 | IO | General Purpose Input/Output | A7 |
| MCU_GPIO0_6 | IO | General Purpose Input/Output | B7 |
| MCU_GPIO0_7 | IO | General Purpose Input/Output | D7 |
| MCU_GPIO0_8 | IO | General Purpose Input/Output | C7 |
| MCU_GPIO0_9 | IO | General Purpose Input/Output | C8 |
| MCU_GPIO0_10 | IO | General Purpose Input/Output | E7 |
| MCU_GPIO0_11 | IO | General Purpose Input/Output | E6 |
| MCU_GPIO0_12 | IO | General Purpose Input/Output | C6 |
| MCU_GPIO0_13 | IO | General Purpose Input/Output | D6 |
| MCU_GPIO0_14 | IO | General Purpose Input/Output | C9 |
| MCU_GPIO0_15 | IO | General Purpose Input/Output | D9 |
| MCU_GPIO0_16 | IO | General Purpose Input/Output | B8 |
| MCU_GPIO0_17 | IO | General Purpose Input/Output | B9 |
| MCU_GPIO0_18 | IO | General Purpose Input/Output | E9 |
| MCU_GPIO0_19 | IO | General Purpose Input/Output | A10 |
| MCU_GPIO0_20 | IO | General Purpose Input/Output | A11 |
| MCU_GPIO0_21 | IO | General Purpose Input/Output | B10 |
| MCU_GPIO0_22 | IO | General Purpose Input/Output | B13 |

6.3.11 GPMC

6.3.11.1 MAIN Domain

Table 6-38. GPMC0 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|--------------------------|--------------|---|-------------|
| GPMC0_ADVn_ALE | O | GPMC Address Valid (active low) or Address Latch Enable | P16 |
| GPMC0_CLK ⁽¹⁾ | O | GPMC clock | R17 |
| GPMC0_DIR | O | GPMC Data Bus Signal Direction Control | N17 |
| GPMC0_OEn_REn | O | GPMC Output Enable (active low) or Read Enable (active low) | R18 |
| GPMC0_WEn | O | GPMC Write Enable (active low) | T21 |
| GPMC0_WPn | O | GPMC Flash Write Protect (active low) | N16 |
| GPMC0_A0 | OZ | GPMC Address 0 Output. Only used to effectively address 8-bit data non-multiplexed memories | U2, U7 |
| GPMC0_A1 | OZ | GPMC address 1 Output in A/D non-multiplexed mode and Address 17 in A/D multiplexed mode | AA2, V7 |
| GPMC0_A2 | OZ | GPMC address 2 Output in A/D non-multiplexed mode and Address 18 in A/D multiplexed mode | T2, W7 |
| GPMC0_A3 | OZ | GPMC address 3 Output in A/D non-multiplexed mode and Address 19 in A/D multiplexed mode | V4, W11 |
| GPMC0_A4 | OZ | GPMC address 4 Output in A/D non-multiplexed mode and Address 20 in A/D multiplexed mode | U4, V11 |
| GPMC0_A5 | OZ | GPMC address 5 Output in A/D non-multiplexed mode and Address 21 in A/D multiplexed mode | AA12, V1 |
| GPMC0_A6 | OZ | GPMC address 6 Output in A/D non-multiplexed mode and Address 22 in A/D multiplexed mode | W1, Y12 |
| GPMC0_A7 | OZ | GPMC address 7 Output in A/D non-multiplexed mode and Address 23 in A/D multiplexed mode | W12, Y4 |
| GPMC0_A8 | OZ | GPMC address 8 Output in A/D non-multiplexed mode and Address 24 in A/D multiplexed mode | AA13, T6 |
| GPMC0_A9 | OZ | GPMC address 9 Output in A/D non-multiplexed mode and Address 25 in A/D multiplexed mode | U11, U6 |
| GPMC0_A10 | OZ | GPMC address 10 Output in A/D non-multiplexed mode and Address 26 in A/D multiplexed mode | U5, V15 |
| GPMC0_A11 | OZ | GPMC address 11 Output in A/D non-multiplexed mode and unused in A/D multiplexed mode | AA4, U12 |
| GPMC0_A12 | OZ | GPMC address 12 Output in A/D non-multiplexed mode and unused in A/D multiplexed mode | P2, V14 |
| GPMC0_A13 | OZ | GPMC address 13 Output in A/D non-multiplexed mode and unused in A/D multiplexed mode | P3, W14 |
| GPMC0_A14 | OZ | GPMC address 14 Output in A/D non-multiplexed mode and unused in A/D multiplexed mode | AA10, AA3 |
| GPMC0_A15 | OZ | GPMC address 15 Output in A/D non-multiplexed mode and unused in A/D multiplexed mode | R6, V10 |
| GPMC0_A16 | OZ | GPMC address 16 Output in A/D non-multiplexed mode and unused in A/D multiplexed mode | T5, U10 |
| GPMC0_A17 | OZ | GPMC address 17 Output in A/D non-multiplexed mode and unused in A/D multiplexed mode | AA11, U1 |
| GPMC0_A18 | OZ | GPMC address 18 Output in A/D non-multiplexed mode and unused in A/D multiplexed mode | T4, Y11 |
| GPMC0_A19 | OZ | GPMC address 19 Output in A/D non-multiplexed mode and unused in A/D multiplexed mode | R5, Y10 |
| GPMC0_A20 | OZ | GPMC address 20 Output in A/D non-multiplexed mode and unused in A/D multiplexed mode | R21 |

ADVANCE INFORMATION

Table 6-38. GPMC0 Signal Descriptions (continued)

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|--|-------------|
| GPMC0_A21 | OZ | GPMC address 21 Output in A/D non-multiplexed mode and unused in A/D multiplexed mode | Y18 |
| GPMC0_A22 | OZ | GPMC address 22 Output in A/D non-multiplexed mode and unused in A/D multiplexed mode | N16 |
| GPMC0_AD0 | IO | GPMC Data 0 Input/Output in A/D non-multiplexed mode and additionally Address 1 Output in A/D multiplexed mode | T20 |
| GPMC0_AD1 | IO | GPMC Data 1 Input/Output in A/D non-multiplexed mode and additionally Address 2 Output in A/D multiplexed mode | U21 |
| GPMC0_AD2 | IO | GPMC Data 2 Input/Output in A/D non-multiplexed mode and additionally Address 3 Output in A/D multiplexed mode | T18 |
| GPMC0_AD3 | IO | GPMC Data 3 Input/Output in A/D non-multiplexed mode and additionally Address 4 Output in A/D multiplexed mode | U20 |
| GPMC0_AD4 | IO | GPMC Data 4 Input/Output in A/D non-multiplexed mode and additionally Address 5 Output in A/D multiplexed mode | U18 |
| GPMC0_AD5 | IO | GPMC Data 5 Input/Output in A/D non-multiplexed mode and additionally Address 6 Output in A/D multiplexed mode | U19 |
| GPMC0_AD6 | IO | GPMC Data 6 Input/Output in A/D non-multiplexed mode and additionally Address 7 Output in A/D multiplexed mode | V20 |
| GPMC0_AD7 | IO | GPMC Data 7 Input/Output in A/D non-multiplexed mode and additionally Address 8 Output in A/D multiplexed mode | V21 |
| GPMC0_AD8 | IO | GPMC Data 8 Input/Output in A/D non-multiplexed mode and additionally Address 9 Output in A/D multiplexed mode | V19 |
| GPMC0_AD9 | IO | GPMC Data 9 Input/Output in A/D non-multiplexed mode and additionally Address 10 Output in A/D multiplexed mode | T17 |
| GPMC0_AD10 | IO | GPMC Data 10 Input/Output in A/D non-multiplexed mode and additionally Address 11 Output in A/D multiplexed mode | R16 |
| GPMC0_AD11 | IO | GPMC Data 11 Input/Output in A/D non-multiplexed mode and additionally Address 12 Output in A/D multiplexed mode | W20 |
| GPMC0_AD12 | IO | GPMC Data 12 Input/Output in A/D non-multiplexed mode and additionally Address 13 Output in A/D multiplexed mode | W21 |
| GPMC0_AD13 | IO | GPMC Data 13 Input/Output in A/D non-multiplexed mode and additionally Address 14 Output in A/D multiplexed mode | V18 |
| GPMC0_AD14 | IO | GPMC Data 14 Input/Output in A/D non-multiplexed mode and additionally Address 15 Output in A/D multiplexed mode | Y21 |
| GPMC0_AD15 | IO | GPMC Data 15 Input/Output in A/D non-multiplexed mode and additionally Address 16 Output in A/D multiplexed mode | Y20 |
| GPMC0_AD16 | IO | GPMC Data 16 Input/Output in A/D non-multiplexed mode and additionally Address 17 Output in A/D multiplexed mode | Y7 |

Table 6-38. GPMC0 Signal Descriptions (continued)

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|--|-------------|
| GPMC0_AD17 | IO | GPMC Data 17 Input/Output in A/D non-multiplexed mode and additionally Address 18 Output in A/D multiplexed mode | U8 |
| GPMC0_AD18 | IO | GPMC Data 18 Input/Output in A/D non-multiplexed mode and additionally Address 19 Output in A/D multiplexed mode | W8 |
| GPMC0_AD19 | IO | GPMC Data 19 Input/Output in A/D non-multiplexed mode and additionally Address 20 Output in A/D multiplexed mode | V8 |
| GPMC0_AD20 | IO | GPMC Data 20 Input/Output in A/D non-multiplexed mode and additionally Address 21 Output in A/D multiplexed mode | Y8 |
| GPMC0_AD21 | IO | GPMC Data 21 Input/Output in A/D non-multiplexed mode and additionally Address 22 Output in A/D multiplexed mode | V13 |
| GPMC0_AD22 | IO | GPMC Data 22 Input/Output in A/D non-multiplexed mode and additionally Address 23 Output in A/D multiplexed mode | AA7 |
| GPMC0_AD23 | IO | GPMC Data 23 Input/Output in A/D non-multiplexed mode and additionally Address 24 Output in A/D multiplexed mode | U13 |
| GPMC0_AD24 | IO | GPMC Data 24 Input/Output in A/D non-multiplexed mode and additionally Address 25 Output in A/D multiplexed mode | W13 |
| GPMC0_AD25 | IO | GPMC Data 25 Input/Output in A/D non-multiplexed mode and additionally Address 26 Output in A/D multiplexed mode | U15 |
| GPMC0_AD26 | IO | GPMC Data 26 Input/Output in A/D non-multiplexed mode and additionally Address 27 Output in A/D multiplexed mode | U14 |
| GPMC0_AD27 | IO | GPMC Data 27 Input/Output in A/D non-multiplexed mode and additionally Address 28 Output in A/D multiplexed mode | AA8 |
| GPMC0_AD28 | IO | GPMC Data 28 Input/Output in A/D non-multiplexed mode and additionally Address 29 Output in A/D multiplexed mode | U9 |
| GPMC0_AD29 | IO | GPMC Data 29 Input/Output in A/D non-multiplexed mode and additionally Address 30 Output in A/D multiplexed mode | W9 |
| GPMC0_AD30 | IO | GPMC Data 30 Input/Output in A/D non-multiplexed mode and additionally Address 31 Output in A/D multiplexed mode | AA9 |
| GPMC0_AD31 | IO | GPMC Data 31 Input/Output in A/D non-multiplexed mode and additionally Address 0 Output in A/D multiplexed mode | Y9 |
| GPMC0_BE0n_CLE | O | GPMC Lower-Byte Enable (active low) or Command Latch Enable | P17 |
| GPMC0_BE1n | O | GPMC Upper-Byte Enable (active low) | T19 |
| GPMC0_BE2n | O | GPMC Upper-Byte Enable (active low) | V9 |
| GPMC0_BE3n | O | GPMC Upper-Byte Enable (active low) | AA14 |
| GPMC0_CS0n | O | GPMC Chip Select 0 (active low) | R19 |
| GPMC0_CS1n | O | GPMC Chip Select 1 (active low) | R20 |
| GPMC0_CS2n | O | GPMC Chip Select 2 (active low) | P19 |
| GPMC0_CS3n | O | GPMC Chip Select 3 (active low) | R21 |
| GPMC0_WAIT0 | I | GPMC External Indication of Wait | W19 |

ADVANCE INFORMATION

Table 6-38. GPMC0 Signal Descriptions (continued)

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|----------------------------------|-------------|
| GPMC0_WAIT1 | I | GPMC External Indication of Wait | Y18 |

(1) The RXACTIVE bit of the CTRLMMR_PADCONFIG32 register must be set to 0x1 and the TX_DIS bit of the CTRLMMR_PADCONFIG32 register must be reset to 0x0 when GPMC0 is operating in synchronous mode.

6.3.12 I2C

6.3.12.1 MAIN Domain

Table 6-39. I2C0 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|-----------------|-------------|
| I2C0_SCL | IOD | I2C Clock | A18 |
| I2C0_SDA | IOD | I2C Data | B18 |

Table 6-40. I2C1 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|-----------------|-------------|
| I2C1_SCL | IOD | I2C Clock | C18 |
| I2C1_SDA | IOD | I2C Data | B19 |

Table 6-41. I2C2 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|-----------------|-------------|
| I2C2_SCL | IOD | I2C Clock | C13, P19 |
| I2C2_SDA | IOD | I2C Data | D14, R21 |

Table 6-42. I2C3 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|-----------------|-------------|
| I2C3_SCL | IOD | I2C Clock | C17 |
| I2C3_SDA | IOD | I2C Data | D17 |

6.3.12.2 MCU Domain

Table 6-43. MCU_I2C0 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|-----------------|-------------|
| MCU_I2C0_SCL | IOD | I2C Clock | E9 |
| MCU_I2C0_SDA | IOD | I2C Data | A10 |

Table 6-44. MCU_I2C1 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|-----------------|-------------|
| MCU_I2C1_SCL | IOD | I2C Clock | A11 |
| MCU_I2C1_SDA | IOD | I2C Data | B10 |

6.3.13 MCAN

6.3.13.1 MAIN Domain

Table 6-45. MCAN0 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|--------------------|-------------|
| MCAN0_RX | I | MCAN Receive Data | B17 |
| MCAN0_TX | O | MCAN Transmit Data | A17 |

Table 6-46. MCAN1 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|--------------------|-------------|
| MCAN1_RX | I | MCAN Receive Data | D17 |
| MCAN1_TX | O | MCAN Transmit Data | C17 |

6.3.14 MCSPI

6.3.14.1 MAIN Domain

Table 6-47. MCSPI0 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|-------------------|-------------|
| SPI0_CLK | IO | SPI Clock | D13 |
| SPI0_CS0 | IO | SPI Chip Select 0 | D12 |
| SPI0_CS1 | IO | SPI Chip Select 1 | C13 |
| SPI0_CS2 | IO | SPI Chip Select 2 | B16 |
| SPI0_CS3 | IO | SPI Chip Select 3 | A16 |
| SPI0_D0 | IO | SPI Data 0 | A13 |
| SPI0_D1 | IO | SPI Data 1 | A14 |

Table 6-48. MCSPI1 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|-------------------|-------------|
| SPI1_CLK | IO | SPI Clock | C14 |
| SPI1_CS0 | IO | SPI Chip Select 0 | B14 |
| SPI1_CS1 | IO | SPI Chip Select 1 | D14 |
| SPI1_CS2 | IO | SPI Chip Select 2 | D16 |
| SPI1_CS3 | IO | SPI Chip Select 3 | E16 |
| SPI1_D0 | IO | SPI Data 0 | B15 |
| SPI1_D1 | IO | SPI Data 1 | A15 |

Table 6-49. MCSPI2 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|-------------------|-------------|
| SPI2_CLK | IO | SPI Clock | E14 |
| SPI2_CS0 | IO | SPI Chip Select 0 | E15 |
| SPI2_CS1 | IO | SPI Chip Select 1 | C18 |
| SPI2_CS2 | IO | SPI Chip Select 2 | B19 |
| SPI2_CS3 | IO | SPI Chip Select 3 | A19 |
| SPI2_D0 | IO | SPI Data 0 | D15 |
| SPI2_D1 | IO | SPI Data 1 | C16 |

Table 6-50. MCSPI3 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|-------------------|-------------|
| SPI3_CLK | IO | SPI Clock | U4 |
| SPI3_CS0 | IO | SPI Chip Select 0 | U1 |
| SPI3_CS1 | IO | SPI Chip Select 1 | T5 |
| SPI3_CS2 | IO | SPI Chip Select 2 | V12 |
| SPI3_CS3 | IO | SPI Chip Select 3 | V15 |
| SPI3_D0 | IO | SPI Data 0 | R6 |
| SPI3_D1 | IO | SPI Data 1 | V4 |

Table 6-51. MCSPI4 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|-------------------|-------------|
| SPI4_CLK | IO | SPI Clock | B16 |
| SPI4_CS0 | IO | SPI Chip Select 0 | E16 |
| SPI4_CS1 | IO | SPI Chip Select 1 | A17 |
| SPI4_CS2 | IO | SPI Chip Select 0 | B17 |
| SPI4_CS3 | IO | SPI Chip Select 2 | D18 |
| SPI4_D0 | IO | SPI Data 0 | A16 |
| SPI4_D1 | IO | SPI Data 1 | D16 |

6.3.14.2 MCU Domain

Table 6-52. MCU_MCSPi0 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|-------------------|-------------|
| MCU_SPI0_CLK | IO | SPI Clock | E6 |
| MCU_SPI0_CS0 | IO | SPI Chip Select 0 | D6 |
| MCU_SPI0_CS1 | IO | SPI Chip Select 1 | C6 |
| MCU_SPI0_CS2 | IO | SPI Chip Select 2 | D8 |
| MCU_SPI0_CS3 | IO | SPI Chip Select 3 | B8 |
| MCU_SPI0_D0 | IO | SPI Data 0 | E7 |
| MCU_SPI0_D1 | IO | SPI Data 1 | B6 |

Table 6-53. MCU_MCSPi1 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|-------------------|-------------|
| MCU_SPI1_CLK | IO | SPI Clock | D7 |
| MCU_SPI1_CS0 | IO | SPI Chip Select 0 | A7 |
| MCU_SPI1_CS1 | IO | SPI Chip Select 1 | B7 |
| MCU_SPI1_CS2 | IO | SPI Chip Select 2 | E8 |
| MCU_SPI1_CS3 | IO | SPI Chip Select 3 | B9 |
| MCU_SPI1_D0 | IO | SPI Data 0 | C7 |
| MCU_SPI1_D1 | IO | SPI Data 1 | C8 |

6.3.15 MDIO

6.3.15.1 MAIN Domain

Table 6-54. MDIO0 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|-----------------|-------------|
| MDIO0_MDC | O | MDIO Clock | R2, Y6 |
| MDIO0_MDIO | IO | MDIO Data | AA6, P5 |

6.3.16 MMC

6.3.16.1 MAIN Domain

Table 6-55. MMC0 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|----------------------------|--------------|----------------------------------|-------------|
| MMC0_CALPAD ⁽¹⁾ | A | MMC/SD/SDIO Calibration Resistor | F18 |
| MMC0_CLK | IO | MMC/SD/SDIO Clock | G18 |
| MMC0_CMD | IO | MMC/SD/SDIO Command | J21 |
| MMC0_DS | IO | MMC Data Strobe | G19 |
| MMC0_DAT0 | IO | MMC/SD/SDIO Data | K20 |

Table 6-55. MMC0 Signal Descriptions (continued)

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|------------------|-------------|
| MMC0_DAT1 | IO | MMC/SD/SDIO Data | J20 |
| MMC0_DAT2 | IO | MMC/SD/SDIO Data | J18 |
| MMC0_DAT3 | IO | MMC/SD/SDIO Data | J17 |
| MMC0_DAT4 | IO | MMC/SD/SDIO Data | H17 |
| MMC0_DAT5 | IO | MMC/SD/SDIO Data | H19 |
| MMC0_DAT6 | IO | MMC/SD/SDIO Data | H18 |
| MMC0_DAT7 | IO | MMC/SD/SDIO Data | G17 |

(1) An external 10 kΩ ±1% resistor must be connected between this pin and VSS. No external voltage should be applied to this pin.

Table 6-56. MMC1 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-------------------------|--------------|---------------------|-------------|
| MMC1_CLK ⁽¹⁾ | IO | MMC/SD/SDIO Clock | L20 |
| MMC1_CMD | IO | MMC/SD/SDIO Command | J19 |
| MMC1_SDCD | I | SD Card Detect | D19 |
| MMC1_SDWP | I | SD Write Protect | C20 |
| MMC1_DAT0 | IO | MMC/SD/SDIO Data | K21 |
| MMC1_DAT1 | IO | MMC/SD/SDIO Data | L21 |
| MMC1_DAT2 | IO | MMC/SD/SDIO Data | K19 |
| MMC1_DAT3 | IO | MMC/SD/SDIO Data | K18 |

(1) For MMC1_CLK signal to work properly, the RXACTIVE bit of the CTRLMMR_PADCONFIG164 register must remain in its default state of 0x1 because of retiming purposes.

6.3.17 OSPI

6.3.17.1 MAIN Domain

Table 6-57. OSPI0 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-------------------------|--------------|--|-------------|
| OSPI0_CLK | O | OSPI Clock | N20 |
| OSPI0_DQS | I | OSPI Data Strobe (DQS) or Loopback Clock Input | N19 |
| OSPI0_ECC_FAIL | I | OSPI ECC Status | L17 |
| OSPI0_LBCLKO | IO | OSPI Loopback Clock Output | N21 |
| OSPI0_CS _n 0 | O | OSPI Chip Select 0 (active low) | L19 |
| OSPI0_CS _n 1 | O | OSPI Chip Select 1 (active low) | L18 |
| OSPI0_CS _n 2 | O | OSPI Chip Select 2 (active low) | K17 |
| OSPI0_CS _n 3 | O | OSPI Chip Select 3 (active low) | L17 |
| OSPI0_D0 | IO | OSPI Data 0 | M19 |
| OSPI0_D1 | IO | OSPI Data 1 | M18 |
| OSPI0_D2 | IO | OSPI Data 2 | M20 |
| OSPI0_D3 | IO | OSPI Data 3 | M21 |
| OSPI0_D4 | IO | OSPI Data 4 | P21 |
| OSPI0_D5 | IO | OSPI Data 5 | P20 |
| OSPI0_D6 | IO | OSPI Data 6 | N18 |
| OSPI0_D7 | IO | OSPI Data 7 | M17 |
| OSPI0_RESET_OUT0 | O | OSPI Reset | L17 |
| OSPI0_RESET_OUT1 | O | OSPI Reset | K17 |

6.3.18 Power Supply

Table 6-58. Power Supply Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|--------------------------------|--------------|--|--|
| CAP_VDDS0 ⁽¹⁾ | CAP | External capacitor connection for IO group 0 | H12 |
| CAP_VDDS1 ⁽¹⁾ | CAP | External capacitor connection for IO group 1 | T7 |
| CAP_VDDS2 ⁽¹⁾ | CAP | External capacitor connection for IO group 2 | R11 |
| CAP_VDDS3 ⁽¹⁾ | CAP | External capacitor connection for IO group 3 | N14 |
| CAP_VDDS4 ⁽¹⁾ | CAP | External capacitor connection for IO group 4 | M16 |
| CAP_VDDS5 ⁽¹⁾ | CAP | External capacitor connection for IO group 5 | L13 |
| CAP_VDDSHV_MMC1 ⁽²⁾ | CAP | External capacitor connection for MMC1 | K15 |
| CAP_VDDS_MCU ⁽¹⁾ | CAP | External capacitor connection for IO MCU | H10 |
| VDDA_0P85_SERDES0 | PWR | SERDES0 0.85 V analog supply | P12, P13 |
| VDDA_0P85_SERDES0_C | PWR | SERDES0 clock 0.85 V analog supply | P11 |
| VDDA_0P85_USB0 | PWR | USB0 0.85 V analog supply | T12 |
| VDDA_1P8_SERDES0 | PWR | SERDES0 1.8 V analog supply | R14 |
| VDDA_1P8_USB0 | PWR | USB0 1.8 V analog supply | R15 |
| VDDA_3P3_SDIO | PWR | SDIO 3.3 V analog supply | H15 |
| VDDA_3P3_USB0 | PWR | USB0 3.3 V analog supply | R13 |
| VDDA_ADC | PWR | ADC0 analog supply | J13 |
| VDDA_MCU | PWR | POR and MCU PLL analog supply | K12 |
| VDDA_PLL0 | PWR | Main, PER1, and R5F PLL analog supply | N12 |
| VDDA_PLL1 | PWR | ARM and DDR PLL analog supply | H9 |
| VDDA_PLL2 | PWR | PER0 PLL analog supply | J11 |
| VDDA_TEMP0 | PWR | TEMP0 analog supply | G11 |
| VDDA_TEMP1 | PWR | TEMP1 analog supply | L11 |
| VDDR_CORE | PWR | RAM supply | L10, M13 |
| VDDSHV0 | PWR | IO supply for IO group 0 | F11, G12, G14 |
| VDDSHV1 | PWR | IO supply for IO group 1 | M7, N6, P7 |
| VDDSHV2 | PWR | IO supply for IO group 2 | R10, R8, T9 |
| VDDSHV3 | PWR | IO supply for IO group 3 | P14, P15 |
| VDDSHV4 | PWR | IO supply for IO group 4 | M14, M15 |
| VDDSHV5 | PWR | IO supply for IO group 5 | L14, L15 |
| VDDSHV_MCU | PWR | IO supply for IO MCU | F9, G10, G8 |
| VDDS_DDR | PWR | DDR PHY IO supply | F7, G6, H7, J6, K7, L6 |
| VDDS_DDR_C | PWR | DDR clock IO supply | J8 |
| VDDS_MMC0 | PWR | MMC0 PHY IO supply | J15, K14 |
| VDDS_OSC | PWR | MCU_OSC0 supply | H13 |
| VDD_CORE | PWR | Core supply | J10, J12, K11, K9, L12, L8, M11, M9, N10, N8, P9 |
| VDD_DLL_MMC0 | PWR | MMC0 PLL analog supply | H14 |
| VDD_MMC0 | PWR | MMC0 PHY core supply | K13 |
| VPP | PWR | eFuse ROM programming supply | G15 |

Table 6-58. Power Supply Signal Descriptions (continued)

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|-----------------|---|
| VSS | GND | Ground | A1, A21, A5, A6, AA1, AA15, AA18, AA21, C10, C15, C3, D1, E11, E13, F10, F15, F8, G1, G16, G3, G7, G9, H11, H20, H21, H6, H8, J14, J16, J7, J9, K6, K8, L1, L16, L3, L7, L9, M10, M12, M6, M8, N11, N13, N15, N7, N9, P1, P10, P18, P6, P8, R12, R7, R9, T10, T11, T15, T16, T8, U3, V17, W10, W18, Y14, Y17, Y19 |

- (1) This pin must always be connected via a 1- μ F capacitor to VSS.
- (2) This pin must always be connected via a 3.3- μ F \pm 20% capacitor to VSS.

6.3.19 PRU_ICSSG

Note

The PRU_ICSSG contains a second layer of multiplexing to enable additional functionality on the PRU GPO and GPI signals. This internal wrapper multiplexing is described in the PRU_ICSSG chapter in the device TRM.

6.3.19.1 MAIN Domain

Table 6-59. PRU_ICSSG0 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|------------------------------|--------------|--|-------------|
| PRG0_ECAP0_IN_APWM_OUT | IO | PRU-ICSSG Enhanced Capture (ECAP) Input or Auxiliary PWM (APWM) Output | R2, U5 |
| PRG0_ECAP0_SYNC_IN | I | PRU-ICSSG ECAP Sync Input | P5, V5 |
| PRG0_ECAP0_SYNC_OUT | O | PRU-ICSSG ECAP Sync Output | AA4, V5 |
| PRG0_IEP0_EDIO_OUTVALID | O | PRU_ICSSG Industrial Ethernet Digital I/O Outvalid | C13 |
| PRG0_IEP0_EDC_LATCH_IN0 | I | PRU_ICSSG Industrial Ethernet Distributed Clock Latch Input | V1 |
| PRG0_IEP0_EDC_LATCH_IN1 | I | PRU_ICSSG Industrial Ethernet Distributed Clock Latch Input | T1 |
| PRG0_IEP0_EDC_SYNC_OUT0 | O | PRU_ICSSG Industrial Ethernet Distributed Clock Sync Output | W1 |
| PRG0_IEP0_EDC_SYNC_OUT1 | O | PRU_ICSSG Industrial Ethernet Distributed Clock Sync Output | U1 |
| PRG0_IEP0_EDIO_DATA_IN_OUT28 | IO | PRU_ICSSG Industrial Ethernet Digital I/O Data Input/Output | W6 |
| PRG0_IEP0_EDIO_DATA_IN_OUT29 | IO | PRU_ICSSG Industrial Ethernet Digital I/O Data Input/Output | AA5 |
| PRG0_IEP0_EDIO_DATA_IN_OUT30 | IO | PRU_ICSSG Industrial Ethernet Digital I/O Data Input/Output | Y5 |
| PRG0_IEP0_EDIO_DATA_IN_OUT31 | IO | PRU_ICSSG Industrial Ethernet Digital I/O Data Input/Output | V6 |

Table 6-59. PRU_ICSSG0 Signal Descriptions (continued)

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-------------------------|--------------|---|-------------|
| PRG0_IEP1_EDC_LATCH_IN0 | I | PRU_ICSSG Industrial Ethernet Distributed Clock Latch Input | P5 |
| PRG0_IEP1_EDC_LATCH_IN1 | I | PRU_ICSSG Industrial Ethernet Distributed Clock Latch Input | W5 |
| PRG0_IEP1_EDC_SYNC_OUT0 | O | PRU_ICSSG Industrial Ethernet Distributed Clock Sync Output | R2 |
| PRG0_IEP1_EDC_SYNC_OUT1 | O | PRU_ICSSG Industrial Ethernet Distributed Clock Sync Output | V5 |
| PRG0_MDIO0_MDC | O | PRU-ICSSG MDIO Clock | P3 |
| PRG0_MDIO0_MDIO | IO | PRU-ICSSG MDIO Data | P2 |
| PRG0_PRU0_GPI0 | I | PRU-ICSSG PRU Data Input | Y1 |
| PRG0_PRU0_GPI1 | I | PRU-ICSSG PRU Data Input | R4 |
| PRG0_PRU0_GPI2 | I | PRU-ICSSG PRU Data Input | U2 |
| PRG0_PRU0_GPI3 | I | PRU-ICSSG PRU Data Input | V2 |
| PRG0_PRU0_GPI4 | I | PRU-ICSSG PRU Data Input | AA2 |
| PRG0_PRU0_GPI5 | I | PRU-ICSSG PRU Data Input | R3 |
| PRG0_PRU0_GPI6 | I | PRU-ICSSG PRU Data Input | T3 |
| PRG0_PRU0_GPI7 | I | PRU-ICSSG PRU Data Input | T1 |
| PRG0_PRU0_GPI8 | I | PRU-ICSSG PRU Data Input | T2 |
| PRG0_PRU0_GPI9 | I | PRU-ICSSG PRU Data Input | W6 |
| PRG0_PRU0_GPI10 | I | PRU-ICSSG PRU Data Input | AA5 |
| PRG0_PRU0_GPI11 | I | PRU-ICSSG PRU Data Input | Y3 |
| PRG0_PRU0_GPI12 | I | PRU-ICSSG PRU Data Input | AA3 |
| PRG0_PRU0_GPI13 | I | PRU-ICSSG PRU Data Input | R6 |
| PRG0_PRU0_GPI14 | I | PRU-ICSSG PRU Data Input | V4 |
| PRG0_PRU0_GPI15 | I | PRU-ICSSG PRU Data Input | T5 |
| PRG0_PRU0_GPI16 | I | PRU-ICSSG PRU Data Input | U4 |
| PRG0_PRU0_GPI17 | I | PRU-ICSSG PRU Data Input | U1 |
| PRG0_PRU0_GPI18 | I | PRU-ICSSG PRU Data Input | V1 |
| PRG0_PRU0_GPI19 | I | PRU-ICSSG PRU Data Input | W1 |
| PRG0_PRU0_GPO0 | IO | PRU-ICSSG PRU Data Output | Y1 |
| PRG0_PRU0_GPO1 | IO | PRU-ICSSG PRU Data Output | R4 |
| PRG0_PRU0_GPO2 | IO | PRU-ICSSG PRU Data Output | U2 |
| PRG0_PRU0_GPO3 | IO | PRU-ICSSG PRU Data Output | V2 |
| PRG0_PRU0_GPO4 | IO | PRU-ICSSG PRU Data Output | AA2 |
| PRG0_PRU0_GPO5 | IO | PRU-ICSSG PRU Data Output | R3 |
| PRG0_PRU0_GPO6 | IO | PRU-ICSSG PRU Data Output | T3 |
| PRG0_PRU0_GPO7 | IO | PRU-ICSSG PRU Data Output | T1 |
| PRG0_PRU0_GPO8 | IO | PRU-ICSSG PRU Data Output | T2 |
| PRG0_PRU0_GPO9 | IO | PRU-ICSSG PRU Data Output | W6 |
| PRG0_PRU0_GPO10 | IO | PRU-ICSSG PRU Data Output | AA5 |
| PRG0_PRU0_GPO11 | IO | PRU-ICSSG PRU Data Output | Y3 |
| PRG0_PRU0_GPO12 | IO | PRU-ICSSG PRU Data Output | AA3 |
| PRG0_PRU0_GPO13 | IO | PRU-ICSSG PRU Data Output | R6 |
| PRG0_PRU0_GPO14 | IO | PRU-ICSSG PRU Data Output | V4 |
| PRG0_PRU0_GPO15 | IO | PRU-ICSSG PRU Data Output | T5 |
| PRG0_PRU0_GPO16 | IO | PRU-ICSSG PRU Data Output | U4 |

Table 6-59. PRU_ICSSG0 Signal Descriptions (continued)

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|------------------|--------------|--------------------------------|-------------|
| PRG0_PRU0_GPO17 | IO | PRU-ICSSG PRU Data Output | U1 |
| PRG0_PRU0_GPO18 | IO | PRU-ICSSG PRU Data Output | V1 |
| PRG0_PRU0_GPO19 | IO | PRU-ICSSG PRU Data Output | W1 |
| PRG0_PRU1_GPI0 | I | PRU-ICSSG PRU Data Input | Y2 |
| PRG0_PRU1_GPI1 | I | PRU-ICSSG PRU Data Input | W2 |
| PRG0_PRU1_GPI2 | I | PRU-ICSSG PRU Data Input | V3 |
| PRG0_PRU1_GPI3 | I | PRU-ICSSG PRU Data Input | T4 |
| PRG0_PRU1_GPI4 | I | PRU-ICSSG PRU Data Input | W3 |
| PRG0_PRU1_GPI5 | I | PRU-ICSSG PRU Data Input | P4 |
| PRG0_PRU1_GPI6 | I | PRU-ICSSG PRU Data Input | R5 |
| PRG0_PRU1_GPI7 | I | PRU-ICSSG PRU Data Input | W5 |
| PRG0_PRU1_GPI8 | I | PRU-ICSSG PRU Data Input | R1 |
| PRG0_PRU1_GPI9 | I | PRU-ICSSG PRU Data Input | Y5 |
| PRG0_PRU1_GPI10 | I | PRU-ICSSG PRU Data Input | V6 |
| PRG0_PRU1_GPI11 | I | PRU-ICSSG PRU Data Input | W4 |
| PRG0_PRU1_GPI12 | I | PRU-ICSSG PRU Data Input | Y4 |
| PRG0_PRU1_GPI13 | I | PRU-ICSSG PRU Data Input | T6 |
| PRG0_PRU1_GPI14 | I | PRU-ICSSG PRU Data Input | U6 |
| PRG0_PRU1_GPI15 | I | PRU-ICSSG PRU Data Input | U5 |
| PRG0_PRU1_GPI16 | I | PRU-ICSSG PRU Data Input | AA4 |
| PRG0_PRU1_GPI17 | I | PRU-ICSSG PRU Data Input | V5 |
| PRG0_PRU1_GPI18 | I | PRU-ICSSG PRU Data Input | P5 |
| PRG0_PRU1_GPI19 | I | PRU-ICSSG PRU Data Input | R2 |
| PRG0_PRU1_GPO0 | IO | PRU-ICSSG PRU Data Output | Y2 |
| PRG0_PRU1_GPO1 | IO | PRU-ICSSG PRU Data Output | W2 |
| PRG0_PRU1_GPO2 | IO | PRU-ICSSG PRU Data Output | V3 |
| PRG0_PRU1_GPO3 | IO | PRU-ICSSG PRU Data Output | T4 |
| PRG0_PRU1_GPO4 | IO | PRU-ICSSG PRU Data Output | W3 |
| PRG0_PRU1_GPO5 | IO | PRU-ICSSG PRU Data Output | P4 |
| PRG0_PRU1_GPO6 | IO | PRU-ICSSG PRU Data Output | R5 |
| PRG0_PRU1_GPO7 | IO | PRU-ICSSG PRU Data Output | W5 |
| PRG0_PRU1_GPO8 | IO | PRU-ICSSG PRU Data Output | R1 |
| PRG0_PRU1_GPO9 | IO | PRU-ICSSG PRU Data Output | Y5 |
| PRG0_PRU1_GPO10 | IO | PRU-ICSSG PRU Data Output | V6 |
| PRG0_PRU1_GPO11 | IO | PRU-ICSSG PRU Data Output | W4 |
| PRG0_PRU1_GPO12 | IO | PRU-ICSSG PRU Data Output | Y4 |
| PRG0_PRU1_GPO13 | IO | PRU-ICSSG PRU Data Output | T6 |
| PRG0_PRU1_GPO14 | IO | PRU-ICSSG PRU Data Output | U6 |
| PRG0_PRU1_GPO15 | IO | PRU-ICSSG PRU Data Output | U5 |
| PRG0_PRU1_GPO16 | IO | PRU-ICSSG PRU Data Output | AA4 |
| PRG0_PRU1_GPO17 | IO | PRU-ICSSG PRU Data Output | V5 |
| PRG0_PRU1_GPO18 | IO | PRU-ICSSG PRU Data Output | P5 |
| PRG0_PRU1_GPO19 | IO | PRU-ICSSG PRU Data Output | R2 |
| PRG0_PWM0_TZ_IN | I | PRU_ICSSG PWM Trip Zone Input | V1 |
| PRG0_PWM0_TZ_OUT | O | PRU_ICSSG PWM Trip Zone Output | W1 |

Table 6-59. PRU_ICSSG0 Signal Descriptions (continued)

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|--------------------|--------------|----------------------------------|-------------|
| PRG0_PWM1_TZ_IN | I | PRU_ICSSG PWM Trip Zone Input | P5 |
| PRG0_PWM1_TZ_OUT | O | PRU_ICSSG PWM Trip Zone Output | R2 |
| PRG0_PWM2_TZ_IN | I | PRU_ICSSG PWM Trip Zone Input | T18, V6 |
| PRG0_PWM2_TZ_OUT | O | PRU_ICSSG PWM Trip Zone Output | R1, U21 |
| PRG0_PWM3_TZ_IN | I | PRU_ICSSG PWM Trip Zone Input | P16, W6 |
| PRG0_PWM3_TZ_OUT | O | PRU_ICSSG PWM Trip Zone Output | R17, Y3 |
| PRG0_PWM0_A0 | IO | PRU_ICSSG PWM Output A | AA3 |
| PRG0_PWM0_A1 | IO | PRU_ICSSG PWM Output A | V4 |
| PRG0_PWM0_A2 | IO | PRU_ICSSG PWM Output A | U4 |
| PRG0_PWM0_B0 | IO | PRU_ICSSG PWM Output B | R6 |
| PRG0_PWM0_B1 | IO | PRU_ICSSG PWM Output B | T5 |
| PRG0_PWM0_B2 | IO | PRU_ICSSG PWM Output B | U1 |
| PRG0_PWM1_A0 | IO | PRU_ICSSG PWM Output A | Y4 |
| PRG0_PWM1_A1 | IO | PRU_ICSSG PWM Output A | U6 |
| PRG0_PWM1_A2 | IO | PRU_ICSSG PWM Output A | AA4 |
| PRG0_PWM1_B0 | IO | PRU_ICSSG PWM Output B | T6 |
| PRG0_PWM1_B1 | IO | PRU_ICSSG PWM Output B | U5 |
| PRG0_PWM1_B2 | IO | PRU_ICSSG PWM Output B | V5 |
| PRG0_PWM2_A0 | IO | PRU_ICSSG PWM Output A | U2, U20 |
| PRG0_PWM2_A1 | IO | PRU_ICSSG PWM Output A | T2, U19 |
| PRG0_PWM2_A2 | IO | PRU_ICSSG PWM Output A | V19, V3 |
| PRG0_PWM2_B0 | IO | PRU_ICSSG PWM Output B | AA2, U18 |
| PRG0_PWM2_B1 | IO | PRU_ICSSG PWM Output B | AA5, V20 |
| PRG0_PWM2_B2 | IO | PRU_ICSSG PWM Output B | T17, W3 |
| PRG0_PWM3_A0 | IO | PRU_ICSSG PWM Output A | V18, Y1 |
| PRG0_PWM3_A1 | IO | PRU_ICSSG PWM Output A | R18, T3 |
| PRG0_PWM3_A2 | IO | PRU_ICSSG PWM Output A | T19, V2 |
| PRG0_PWM3_B0 | IO | PRU_ICSSG PWM Output B | R4, Y21 |
| PRG0_PWM3_B1 | IO | PRU_ICSSG PWM Output B | T1, T21 |
| PRG0_PWM3_B2 | IO | PRU_ICSSG PWM Output B | R3, W19 |
| PRG0_RGMII1_RXC | I | PRU_ICSSG RGMII Receive Clock | T3 |
| PRG0_RGMII1_RX_CTL | I | PRU_ICSSG RGMII Receive Control | AA2 |
| PRG0_RGMII1_TXC | IO | PRU_ICSSG RGMII Transmit Clock | U4 |
| PRG0_RGMII1_TX_CTL | O | PRU_ICSSG RGMII Transmit Control | T5 |
| PRG0_RGMII2_RXC | I | PRU_ICSSG RGMII Receive Clock | R5 |
| PRG0_RGMII2_RX_CTL | I | PRU_ICSSG RGMII Receive Control | W3 |
| PRG0_RGMII2_TXC | IO | PRU_ICSSG RGMII Transmit Clock | AA4 |
| PRG0_RGMII2_TX_CTL | O | PRU_ICSSG RGMII Transmit Control | U5 |
| PRG0_RGMII1_RD0 | I | PRU_ICSSG RGMII Receive Data | Y1 |
| PRG0_RGMII1_RD1 | I | PRU_ICSSG RGMII Receive Data | R4 |
| PRG0_RGMII1_RD2 | I | PRU_ICSSG RGMII Receive Data | U2 |
| PRG0_RGMII1_RD3 | I | PRU_ICSSG RGMII Receive Data | V2 |
| PRG0_RGMII1_TD0 | O | PRU_ICSSG RGMII Transmit Data | Y3 |
| PRG0_RGMII1_TD1 | O | PRU_ICSSG RGMII Transmit Data | AA3 |
| PRG0_RGMII1_TD2 | O | PRU_ICSSG RGMII Transmit Data | R6 |

Table 6-59. PRU_ICSSG0 Signal Descriptions (continued)

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|---|-------------|
| PRG0_RGMII1_TD3 | O | PRU_ICSSG RGMII Transmit Data | V4 |
| PRG0_RGMII2_RD0 | I | PRU_ICSSG RGMII Receive Data | Y2 |
| PRG0_RGMII2_RD1 | I | PRU_ICSSG RGMII Receive Data | W2 |
| PRG0_RGMII2_RD2 | I | PRU_ICSSG RGMII Receive Data | V3 |
| PRG0_RGMII2_RD3 | I | PRU_ICSSG RGMII Receive Data | T4 |
| PRG0_RGMII2_TD0 | O | PRU_ICSSG RGMII Transmit Data | W4 |
| PRG0_RGMII2_TD1 | O | PRU_ICSSG RGMII Transmit Data | Y4 |
| PRG0_RGMII2_TD2 | O | PRU_ICSSG RGMII Transmit Data | T6 |
| PRG0_RGMII2_TD3 | O | PRU_ICSSG RGMII Transmit Data | U6 |
| PRG0_UART0_CTSn | I | PRU-ICSSG UART Clear to Send (active low) | W6 |
| PRG0_UART0_RTSn | O | PRU-ICSSG UART Request to Send (active low) | AA5 |
| PRG0_UART0_RXD | I | PRU-ICSSG UART Receive Data | Y5 |
| PRG0_UART0_TXD | O | PRU-ICSSG UART Transmit Data | V6 |

Table 6-60. PRU_ICSSG1 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|------------------------------|--------------|--|-------------|
| PRG1_ECAP0_IN_APWM_OUT | IO | PRU-ICSSG Enhanced Capture (ECAP) Input or Auxiliary PWM (APWM) Output | V12 |
| PRG1_ECAP0_SYNC_IN | I | PRU-ICSSG ECAP Sync Input | Y13 |
| PRG1_ECAP0_SYNC_OUT | O | PRU-ICSSG ECAP Sync Output | AA14 |
| PRG1_IEP0_EDIO_OUTVALID | O | PRU_ICSSG Industrial Ethernet Digital I/O Outvald | D14 |
| PRG1_IEP0_EDC_LATCH_IN0 | I | PRU_ICSSG Industrial Ethernet Distributed Clock Latch Input | V7 |
| PRG1_IEP0_EDC_LATCH_IN1 | I | PRU_ICSSG Industrial Ethernet Distributed Clock Latch Input | U13 |
| PRG1_IEP0_EDC_SYNC_OUT0 | O | PRU_ICSSG Industrial Ethernet Distributed Clock Sync Output | W7 |
| PRG1_IEP0_EDC_SYNC_OUT1 | O | PRU_ICSSG Industrial Ethernet Distributed Clock Sync Output | U7 |
| PRG1_IEP0_EDIO_DATA_IN_OUT28 | IO | PRU_ICSSG Industrial Ethernet Digital I/O Data Input/Output | U15 |
| PRG1_IEP0_EDIO_DATA_IN_OUT29 | IO | PRU_ICSSG Industrial Ethernet Digital I/O Data Input/Output | U14 |
| PRG1_IEP0_EDIO_DATA_IN_OUT30 | IO | PRU_ICSSG Industrial Ethernet Digital I/O Data Input/Output | V14 |
| PRG1_IEP0_EDIO_DATA_IN_OUT31 | IO | PRU_ICSSG Industrial Ethernet Digital I/O Data Input/Output | W14 |
| PRG1_IEP1_EDC_LATCH_IN0 | I | PRU_ICSSG Industrial Ethernet Distributed Clock Latch Input | Y13 |
| PRG1_IEP1_EDC_LATCH_IN1 | I | PRU_ICSSG Industrial Ethernet Distributed Clock Latch Input | V15 |
| PRG1_IEP1_EDC_SYNC_OUT0 | O | PRU_ICSSG Industrial Ethernet Distributed Clock Sync Output | V12 |
| PRG1_IEP1_EDC_SYNC_OUT1 | O | PRU_ICSSG Industrial Ethernet Distributed Clock Sync Output | AA14 |
| PRG1_MDIO0_MDC | O | PRU-ICSSG MDIO Clock | Y6 |
| PRG1_MDIO0_MDIO | IO | PRU-ICSSG MDIO Data | AA6 |
| PRG1_PRU0_GPI0 | I | PRU-ICSSG PRU Data Input | Y7 |
| PRG1_PRU0_GPI1 | I | PRU-ICSSG PRU Data Input | U8 |

Table 6-60. PRU_ICSSG1 Signal Descriptions (continued)

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|---------------------------|-------------|
| PRG1_PRU0_GPI2 | I | PRU-ICSSG PRU Data Input | W8 |
| PRG1_PRU0_GPI3 | I | PRU-ICSSG PRU Data Input | V8 |
| PRG1_PRU0_GPI4 | I | PRU-ICSSG PRU Data Input | Y8 |
| PRG1_PRU0_GPI5 | I | PRU-ICSSG PRU Data Input | V13 |
| PRG1_PRU0_GPI6 | I | PRU-ICSSG PRU Data Input | AA7 |
| PRG1_PRU0_GPI7 | I | PRU-ICSSG PRU Data Input | U13 |
| PRG1_PRU0_GPI8 | I | PRU-ICSSG PRU Data Input | W13 |
| PRG1_PRU0_GPI9 | I | PRU-ICSSG PRU Data Input | U15 |
| PRG1_PRU0_GPI10 | I | PRU-ICSSG PRU Data Input | U14 |
| PRG1_PRU0_GPI11 | I | PRU-ICSSG PRU Data Input | AA8 |
| PRG1_PRU0_GPI12 | I | PRU-ICSSG PRU Data Input | U9 |
| PRG1_PRU0_GPI13 | I | PRU-ICSSG PRU Data Input | W9 |
| PRG1_PRU0_GPI14 | I | PRU-ICSSG PRU Data Input | AA9 |
| PRG1_PRU0_GPI15 | I | PRU-ICSSG PRU Data Input | Y9 |
| PRG1_PRU0_GPI16 | I | PRU-ICSSG PRU Data Input | V9 |
| PRG1_PRU0_GPI17 | I | PRU-ICSSG PRU Data Input | U7 |
| PRG1_PRU0_GPI18 | I | PRU-ICSSG PRU Data Input | V7 |
| PRG1_PRU0_GPI19 | I | PRU-ICSSG PRU Data Input | W7 |
| PRG1_PRU0_GPO0 | IO | PRU-ICSSG PRU Data Output | Y7 |
| PRG1_PRU0_GPO1 | IO | PRU-ICSSG PRU Data Output | U8 |
| PRG1_PRU0_GPO2 | IO | PRU-ICSSG PRU Data Output | W8 |
| PRG1_PRU0_GPO3 | IO | PRU-ICSSG PRU Data Output | V8 |
| PRG1_PRU0_GPO4 | IO | PRU-ICSSG PRU Data Output | Y8 |
| PRG1_PRU0_GPO5 | IO | PRU-ICSSG PRU Data Output | V13 |
| PRG1_PRU0_GPO6 | IO | PRU-ICSSG PRU Data Output | AA7 |
| PRG1_PRU0_GPO7 | IO | PRU-ICSSG PRU Data Output | U13 |
| PRG1_PRU0_GPO8 | IO | PRU-ICSSG PRU Data Output | W13 |
| PRG1_PRU0_GPO9 | IO | PRU-ICSSG PRU Data Output | U15 |
| PRG1_PRU0_GPO10 | IO | PRU-ICSSG PRU Data Output | U14 |
| PRG1_PRU0_GPO11 | IO | PRU-ICSSG PRU Data Output | AA8 |
| PRG1_PRU0_GPO12 | IO | PRU-ICSSG PRU Data Output | U9 |
| PRG1_PRU0_GPO13 | IO | PRU-ICSSG PRU Data Output | W9 |
| PRG1_PRU0_GPO14 | IO | PRU-ICSSG PRU Data Output | AA9 |
| PRG1_PRU0_GPO15 | IO | PRU-ICSSG PRU Data Output | Y9 |
| PRG1_PRU0_GPO16 | IO | PRU-ICSSG PRU Data Output | V9 |
| PRG1_PRU0_GPO17 | IO | PRU-ICSSG PRU Data Output | U7 |
| PRG1_PRU0_GPO18 | IO | PRU-ICSSG PRU Data Output | V7 |
| PRG1_PRU0_GPO19 | IO | PRU-ICSSG PRU Data Output | W7 |
| PRG1_PRU1_GPI0 | I | PRU-ICSSG PRU Data Input | W11 |
| PRG1_PRU1_GPI1 | I | PRU-ICSSG PRU Data Input | V11 |
| PRG1_PRU1_GPI2 | I | PRU-ICSSG PRU Data Input | AA12 |
| PRG1_PRU1_GPI3 | I | PRU-ICSSG PRU Data Input | Y12 |
| PRG1_PRU1_GPI4 | I | PRU-ICSSG PRU Data Input | W12 |
| PRG1_PRU1_GPI5 | I | PRU-ICSSG PRU Data Input | AA13 |
| PRG1_PRU1_GPI6 | I | PRU-ICSSG PRU Data Input | U11 |

Table 6-60. PRU_ICSSG1 Signal Descriptions (continued)

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|------------------|--------------|--------------------------------|-------------|
| PRG1_PRU1_GPI7 | I | PRU-ICSSG PRU Data Input | V15 |
| PRG1_PRU1_GPI8 | I | PRU-ICSSG PRU Data Input | U12 |
| PRG1_PRU1_GPI9 | I | PRU-ICSSG PRU Data Input | V14 |
| PRG1_PRU1_GPI10 | I | PRU-ICSSG PRU Data Input | W14 |
| PRG1_PRU1_GPI11 | I | PRU-ICSSG PRU Data Input | AA10 |
| PRG1_PRU1_GPI12 | I | PRU-ICSSG PRU Data Input | V10 |
| PRG1_PRU1_GPI13 | I | PRU-ICSSG PRU Data Input | U10 |
| PRG1_PRU1_GPI14 | I | PRU-ICSSG PRU Data Input | AA11 |
| PRG1_PRU1_GPI15 | I | PRU-ICSSG PRU Data Input | Y11 |
| PRG1_PRU1_GPI16 | I | PRU-ICSSG PRU Data Input | Y10 |
| PRG1_PRU1_GPI17 | I | PRU-ICSSG PRU Data Input | AA14 |
| PRG1_PRU1_GPI18 | I | PRU-ICSSG PRU Data Input | Y13 |
| PRG1_PRU1_GPI19 | I | PRU-ICSSG PRU Data Input | V12 |
| PRG1_PRU1_GPO0 | IO | PRU-ICSSG PRU Data Output | W11 |
| PRG1_PRU1_GPO1 | IO | PRU-ICSSG PRU Data Output | V11 |
| PRG1_PRU1_GPO2 | IO | PRU-ICSSG PRU Data Output | AA12 |
| PRG1_PRU1_GPO3 | IO | PRU-ICSSG PRU Data Output | Y12 |
| PRG1_PRU1_GPO4 | IO | PRU-ICSSG PRU Data Output | W12 |
| PRG1_PRU1_GPO5 | IO | PRU-ICSSG PRU Data Output | AA13 |
| PRG1_PRU1_GPO6 | IO | PRU-ICSSG PRU Data Output | U11 |
| PRG1_PRU1_GPO7 | IO | PRU-ICSSG PRU Data Output | V15 |
| PRG1_PRU1_GPO8 | IO | PRU-ICSSG PRU Data Output | U12 |
| PRG1_PRU1_GPO9 | IO | PRU-ICSSG PRU Data Output | V14 |
| PRG1_PRU1_GPO10 | IO | PRU-ICSSG PRU Data Output | W14 |
| PRG1_PRU1_GPO11 | IO | PRU-ICSSG PRU Data Output | AA10 |
| PRG1_PRU1_GPO12 | IO | PRU-ICSSG PRU Data Output | V10 |
| PRG1_PRU1_GPO13 | IO | PRU-ICSSG PRU Data Output | U10 |
| PRG1_PRU1_GPO14 | IO | PRU-ICSSG PRU Data Output | AA11 |
| PRG1_PRU1_GPO15 | IO | PRU-ICSSG PRU Data Output | Y11 |
| PRG1_PRU1_GPO16 | IO | PRU-ICSSG PRU Data Output | Y10 |
| PRG1_PRU1_GPO17 | IO | PRU-ICSSG PRU Data Output | AA14 |
| PRG1_PRU1_GPO18 | IO | PRU-ICSSG PRU Data Output | Y13 |
| PRG1_PRU1_GPO19 | IO | PRU-ICSSG PRU Data Output | V12 |
| PRG1_PWM0_TZ_IN | I | PRU_ICSSG PWM Trip Zone Input | V7 |
| PRG1_PWM0_TZ_OUT | O | PRU_ICSSG PWM Trip Zone Output | W7 |
| PRG1_PWM1_TZ_IN | I | PRU_ICSSG PWM Trip Zone Input | Y13 |
| PRG1_PWM1_TZ_OUT | O | PRU_ICSSG PWM Trip Zone Output | V12 |
| PRG1_PWM2_TZ_IN | I | PRU_ICSSG PWM Trip Zone Input | P19, W14 |
| PRG1_PWM2_TZ_OUT | O | PRU_ICSSG PWM Trip Zone Output | R20, U12 |
| PRG1_PWM3_TZ_IN | I | PRU_ICSSG PWM Trip Zone Input | U15 |
| PRG1_PWM3_TZ_OUT | O | PRU_ICSSG PWM Trip Zone Output | AA8 |
| PRG1_PWM0_A0 | IO | PRU_ICSSG PWM Output A | U9 |
| PRG1_PWM0_A1 | IO | PRU_ICSSG PWM Output A | AA9 |
| PRG1_PWM0_A2 | IO | PRU_ICSSG PWM Output A | V9 |
| PRG1_PWM0_B0 | IO | PRU_ICSSG PWM Output B | W9 |

Table 6-60. PRU_ICSSG1 Signal Descriptions (continued)

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|--------------------|--------------|---|-------------|
| PRG1_PWM0_B1 | IO | PRU_ICSSG PWM Output B | Y9 |
| PRG1_PWM0_B2 | IO | PRU_ICSSG PWM Output B | U7 |
| PRG1_PWM1_A0 | IO | PRU_ICSSG PWM Output A | V10 |
| PRG1_PWM1_A1 | IO | PRU_ICSSG PWM Output A | AA11 |
| PRG1_PWM1_A2 | IO | PRU_ICSSG PWM Output A | Y10 |
| PRG1_PWM1_B0 | IO | PRU_ICSSG PWM Output B | U10 |
| PRG1_PWM1_B1 | IO | PRU_ICSSG PWM Output B | Y11 |
| PRG1_PWM1_B2 | IO | PRU_ICSSG PWM Output B | AA14 |
| PRG1_PWM2_A0 | IO | PRU_ICSSG PWM Output A | N16, W8 |
| PRG1_PWM2_A1 | IO | PRU_ICSSG PWM Output A | P17, W13 |
| PRG1_PWM2_A2 | IO | PRU_ICSSG PWM Output A | AA12, V21 |
| PRG1_PWM2_B0 | IO | PRU_ICSSG PWM Output B | N17, Y8 |
| PRG1_PWM2_B1 | IO | PRU_ICSSG PWM Output B | U14, Y18 |
| PRG1_PWM2_B2 | IO | PRU_ICSSG PWM Output B | R16, W12 |
| PRG1_PWM3_A0 | IO | PRU_ICSSG PWM Output A | Y7 |
| PRG1_PWM3_A1 | IO | PRU_ICSSG PWM Output A | AA7 |
| PRG1_PWM3_A2 | IO | PRU_ICSSG PWM Output A | V8 |
| PRG1_PWM3_B0 | IO | PRU_ICSSG PWM Output B | U8 |
| PRG1_PWM3_B1 | IO | PRU_ICSSG PWM Output B | U13 |
| PRG1_PWM3_B2 | IO | PRU_ICSSG PWM Output B | V13 |
| PRG1_RGMII1_RXC | I | PRU_ICSSG RGMII Receive Clock | AA7 |
| PRG1_RGMII1_RX_CTL | I | PRU_ICSSG RGMII Receive Control | Y8 |
| PRG1_RGMII1_TXC | IO | PRU_ICSSG RGMII Transmit Clock | V9 |
| PRG1_RGMII1_TX_CTL | O | PRU_ICSSG RGMII Transmit Control | Y9 |
| PRG1_RGMII2_RXC | I | PRU_ICSSG RGMII Receive Clock | U11 |
| PRG1_RGMII2_RX_CTL | I | PRU_ICSSG RGMII Receive Control | W12 |
| PRG1_RGMII2_TXC | IO | PRU_ICSSG RGMII Transmit Clock | Y10 |
| PRG1_RGMII2_TX_CTL | O | PRU_ICSSG RGMII Transmit Control | Y11 |
| PRG1_RGMII1_RD0 | I | PRU_ICSSG RGMII Receive Data | Y7 |
| PRG1_RGMII1_RD1 | I | PRU_ICSSG RGMII Receive Data | U8 |
| PRG1_RGMII1_RD2 | I | PRU_ICSSG RGMII Receive Data | W8 |
| PRG1_RGMII1_RD3 | I | PRU_ICSSG RGMII Receive Data | V8 |
| PRG1_RGMII1_TD0 | O | PRU_ICSSG RGMII Transmit Data | AA8 |
| PRG1_RGMII1_TD1 | O | PRU_ICSSG RGMII Transmit Data | U9 |
| PRG1_RGMII1_TD2 | O | PRU_ICSSG RGMII Transmit Data | W9 |
| PRG1_RGMII1_TD3 | O | PRU_ICSSG RGMII Transmit Data | AA9 |
| PRG1_RGMII2_RD0 | I | PRU_ICSSG RGMII Receive Data | W11 |
| PRG1_RGMII2_RD1 | I | PRU_ICSSG RGMII Receive Data | V11 |
| PRG1_RGMII2_RD2 | I | PRU_ICSSG RGMII Receive Data | AA12 |
| PRG1_RGMII2_RD3 | I | PRU_ICSSG RGMII Receive Data | Y12 |
| PRG1_RGMII2_TD0 | O | PRU_ICSSG RGMII Transmit Data | AA10 |
| PRG1_RGMII2_TD1 | O | PRU_ICSSG RGMII Transmit Data | V10 |
| PRG1_RGMII2_TD2 | O | PRU_ICSSG RGMII Transmit Data | U10 |
| PRG1_RGMII2_TD3 | O | PRU_ICSSG RGMII Transmit Data | AA11 |
| PRG1_UART0_CTSn | I | PRU-ICSSG UART Clear to Send (active low) | U15 |

Table 6-60. PRU_ICSSG1 Signal Descriptions (continued)

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|---|-------------|
| PRG1_UART0_RTSn | O | PRU-ICSSG UART Request to Send (active low) | U14 |
| PRG1_UART0_RXD | I | PRU-ICSSG UART Receive Data | V14 |
| PRG1_UART0_TXD | O | PRU-ICSSG UART Transmit Data | W14 |

6.3.20 Reserved

Table 6-61. Reserved Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|------------------------------------|-------------|
| RSVD0 | N/A | Reserved, must be left unconnected | H16 |
| RSVD1 | N/A | Reserved, must be left unconnected | D21 |
| RSVD2 | N/A | Reserved, must be left unconnected | G13 |
| RSVD3 | N/A | Reserved, must be left unconnected | F17 |
| RSVD4 | N/A | Reserved, must be left unconnected | W15 |
| RSVD5 | N/A | Reserved, must be left unconnected | V16 |
| RSVD6 | N/A | Reserved, must be left unconnected | K2 |
| RSVD7 | N/A | Reserved, must be left unconnected | K1 |
| RSVD8 | N/A | Reserved, must be left unconnected | F12 |

6.3.21 SERDES

6.3.21.1 MAIN Domain

Table 6-62. SERDES0 Signal Descriptions

| SIGNAL NAME [1] ⁽²⁾ | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|--------------------------------|--------------|--|-------------|
| PCIE0_CLKREQn | IO | PCIE Clock Request Signal | D16 |
| SERDES0_REXT ⁽¹⁾ | A | External Calibration Resistor | T13 |
| SERDES0_REFCLK0N | IO | Serdes Reference Clock Input/Output (negative) | W16 |
| SERDES0_REFCLK0P | IO | Serdes Reference Clock Input/Output (positive) | W17 |
| SERDES0_RX0_N | I | SERDES Differential Receive Data (negative) | Y15 |
| SERDES0_RX0_P | I | SERDES Differential Receive Data (positive) | Y16 |
| SERDES0_TX0_N | O | SERDES Differential Transmit Data (negative) | AA16 |
| SERDES0_TX0_P | O | SERDES Differential Transmit Data (positive) | AA17 |

(1) An external 3.01 kΩ ±1% resistor must be connected between this pin and VSS. No external voltage should be applied to this pin.

(2) The functionality of these pins is controlled by SERDES0_LN0_CTRL_LANE_FUNC_SEL.

6.3.22 System and Miscellaneous

6.3.22.1 Boot Mode Configuration

6.3.22.1.1 MAIN Domain

Table 6-63. Sysboot Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|-----------------|-------------|
| BOOTMODE00 | I | Bootmode pin 0 | T20 |
| BOOTMODE01 | I | Bootmode pin 1 | U21 |
| BOOTMODE02 | I | Bootmode pin 2 | T18 |
| BOOTMODE03 | I | Bootmode pin 3 | U20 |
| BOOTMODE04 | I | Bootmode pin 4 | U18 |
| BOOTMODE05 | I | Bootmode pin 5 | U19 |
| BOOTMODE06 | I | Bootmode pin 6 | V20 |
| BOOTMODE07 | I | Bootmode pin 7 | V21 |
| BOOTMODE08 | I | Bootmode pin 8 | V19 |

Table 6-63. Sysboot Signal Descriptions (continued)

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|-----------------|-------------|
| BOOTMODE09 | I | Bootmode pin 9 | T17 |
| BOOTMODE10 | I | Bootmode pin 10 | R16 |
| BOOTMODE11 | I | Bootmode pin 11 | W20 |
| BOOTMODE12 | I | Bootmode pin 12 | W21 |
| BOOTMODE13 | I | Bootmode pin 13 | V18 |
| BOOTMODE14 | I | Bootmode pin 14 | Y21 |
| BOOTMODE15 | I | Bootmode pin 15 | Y20 |

6.3.22.2 Clock

6.3.22.2.1 MCU Domain

Table 6-64. MCU Clock Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|----------------------------------|-------------|
| MCU_OSC0_XI | I | High frequency oscillator input | C21 |
| MCU_OSC0_XO | O | High frequency oscillator output | B20 |

6.3.22.3 System

6.3.22.3.1 MAIN Domain

Table 6-65. System Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|--|-------------|
| CLKOUT0 | O | RMII Clock Output (50 MHz). This pin is used for clock source to the external PHY and must be routed back to the RMII_REF_CLK pin for proper device operation. | A19, U13 |
| EXTINTn | I | External Interrupt | C19 |
| EXT_REFCLK1 | I | External clock input to Main Domain, routed to Timer clock muxes as one of the selectable input clock sources for Timer/WDT modules, or as reference clock to MAIN_PLL2 (PER1 PLL) | A19 |
| GPMC0_FCLK_MUX | O | GPMC functional clock output selected through a mux logic | R17 |
| OBSCLK0 | O | Observation clock output for test and debug purposes only | D17 |
| PORz_OUT | O | Main Domain POR status output | E17 |
| RESETSTATz | O | Main Domain warm reset status output | F16 |
| RESET_REQz | I | Main Domain external warm reset request input | E18 |
| SYSCLKOUT0 | O | SYSCLK0 output from Main PLL controller (divided by 6) for test and debug purposes only | C17 |

6.3.22.3.2 MCU Domain

Table 6-66. MCU System Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-------------------|--------------|---|-------------|
| MCU_EXT_REFCLK0 | I | External system clock input | B7 |
| MCU_OBSCLK0 | O | Observation clock output for test and debug purposes only | C6, E10 |
| MCU_PORz | I | MCU Domain cold reset | B21 |
| MCU_RESETSTATz | O | MCU Domain warm reset status output | B13 |
| MCU_RESETz | I | MCU Domain warm reset | B12 |
| MCU_SAFETY_ERRORn | IO | Error signal output from MCU Domain ESM | A20 |

Table 6-66. MCU System Signal Descriptions (continued)

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|---|-------------|
| MCU_SYSCLKOUT0 | O | MCU Domain system clock output for test and debug purposes only | C6 |

6.3.22.4 VMON

Table 6-67. VMON Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|--|-------------|
| VMON_1P8_MCU | A | Voltage monitor input for 1.8 V MCU power supply | K16 |
| VMON_1P8_SOC | A | Voltage monitor input for 1.8 V SoC power supply | E12 |
| VMON_3P3_MCU | A | Voltage monitor input for 3.3 V MCU power supply | F13 |
| VMON_3P3_SOC | A | Voltage monitor input for 3.3 V SoC power supply | F14 |
| VMON_VSYS | A | Voltage monitor input, fixed 0.45 V (+/-3%) threshold. Use with external precision voltage divider to monitor a higher voltage rail such as the PMIC input supply. | K10 |

6.3.23 TIMER

6.3.23.1 MAIN Domain

Table 6-68. TIMER Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|--|--------------|
| TIMER_IO0 | IO | Timer Inputs and Outputs (not tied to single timer instance) | C18, K18 |
| TIMER_IO1 | IO | Timer Inputs and Outputs (not tied to single timer instance) | B19, K19 |
| TIMER_IO2 | IO | Timer Inputs and Outputs (not tied to single timer instance) | A17, L21 |
| TIMER_IO3 | IO | Timer Inputs and Outputs (not tied to single timer instance) | B17, K21 |
| TIMER_IO4 | IO | Timer Inputs and Outputs (not tied to single timer instance) | C17, L20 |
| TIMER_IO5 | IO | Timer Inputs and Outputs (not tied to single timer instance) | D17, J19 |
| TIMER_IO6 | IO | Timer Inputs and Outputs (not tied to single timer instance) | B16, D19, T1 |
| TIMER_IO7 | IO | Timer Inputs and Outputs (not tied to single timer instance) | A16, C20, U7 |
| TIMER_IO8 | IO | Timer Inputs and Outputs (not tied to single timer instance) | P19, V7 |
| TIMER_IO9 | IO | Timer Inputs and Outputs (not tied to single timer instance) | R21, W7 |
| TIMER_IO10 | IO | Timer Inputs and Outputs (not tied to single timer instance) | C13, U13 |
| TIMER_IO11 | IO | Timer Inputs and Outputs (not tied to single timer instance) | D14, U1 |

6.3.23.2 MCU Domain

Table 6-69. MCU_TIMER Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|--|-------------|
| MCU_TIMER_IO0 | IO | Timer Inputs and Outputs (not tied to single timer instance) | D8 |
| MCU_TIMER_IO1 | IO | Timer Inputs and Outputs (not tied to single timer instance) | E8 |

Table 6-69. MCU_TIMER Signal Descriptions (continued)

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|--|-------------|
| MCU_TIMER_IO2 | IO | Timer Inputs and Outputs (not tied to single timer instance) | B8 |
| MCU_TIMER_IO3 | IO | Timer Inputs and Outputs (not tied to single timer instance) | B9 |

6.3.24 UART

6.3.24.1 MAIN Domain

Table 6-70. UART0 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|---------------------------------------|-------------|
| UART0_CTSn | I | UART Clear to Send (active low) | B16 |
| UART0_DCDn | I | UART Data Carrier Detect (active low) | C17 |
| UART0_DSRn | I | UART Data Set Ready (active low) | D17 |
| UART0_DTRn | O | UART Data Terminal Ready (active low) | A17 |
| UART0_RIn | I | UART Ring Indicator | B17 |
| UART0_RTSn | O | UART Request to Send (active low) | A16 |
| UART0_RXD | I | UART Receive Data | D15 |
| UART0_TXD | O | UART Transmit Data | C16 |

Table 6-71. UART1 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|-----------------------------------|-------------|
| UART1_CTSn | I | UART Clear to Send (active low) | D16 |
| UART1_RTSn | O | UART Request to Send (active low) | E16 |
| UART1_RXD | I | UART Receive Data | E15 |
| UART1_TXD | O | UART Transmit Data | E14 |

Table 6-72. UART2 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|-----------------------------------|-----------------------|
| UART2_CTSn | I | UART Clear to Send (active low) | L20, V19, Y1 |
| UART2_RTSn | O | UART Request to Send (active low) | J19, T18, U2 |
| UART2_RXD | I | UART Receive Data | B16, K18, T20, V1, W6 |
| UART2_TXD | O | UART Transmit Data | A16, K19, R4, U21 |

Table 6-73. UART3 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|-----------------------------------|------------------------|
| UART3_CTSn | I | UART Clear to Send (active low) | D19, T17, V2 |
| UART3_RTSn | O | UART Request to Send (active low) | C20, R3, U19 |
| UART3_RXD | I | UART Receive Data | AA5, D16, L21, U20, W1 |
| UART3_TXD | O | UART Transmit Data | AA2, E16, K21, U18 |

Table 6-74. UART4 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|-----------------------------------|-----------------|
| UART4_CTSn | I | UART Clear to Send (active low) | R16, R5, T3, V1 |
| UART4_RTSn | O | UART Request to Send (active low) | R1, R17, T2, W1 |

Table 6-74. UART4 Signal Descriptions (continued)

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|--------------------|---------------------------|
| UART4_RXD | I | UART Receive Data | A17, L20, V20, W4, Y3 |
| UART4_TXD | O | UART Transmit Data | B17, J19, T1, V21, W5, Y4 |

Table 6-75. UART5 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|-----------------------------------|-----------------------|
| UART5_CTSn | I | UART Clear to Send (active low) | W20, Y13, Y2 |
| UART5_RTSn | O | UART Request to Send (active low) | T21, V12, V3 |
| UART5_RXD | I | UART Receive Data | C17, D19, P16, T6, Y5 |
| UART5_TXD | O | UART Transmit Data | C20, D17, R18, W2 |

Table 6-76. UART6 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|-----------------------------------|------------------|
| UART6_CTSn | I | UART Clear to Send (active low) | A18, T4, W21 |
| UART6_RTSn | O | UART Request to Send (active low) | B18, P17, P4 |
| UART6_RXD | I | UART Receive Data | C13, U6, V6, Y21 |
| UART6_TXD | O | UART Transmit Data | D14, W3, Y20 |

6.3.24.2 MCU Domain

Table 6-77. MCU_UART0 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|-----------------------------------|-------------|
| MCU_UART0_CTSn | I | UART Clear to Send (active low) | D8 |
| MCU_UART0_RTSn | O | UART Request to Send (active low) | E8 |
| MCU_UART0_RXD | I | UART Receive Data | A9 |
| MCU_UART0_TXD | O | UART Transmit Data | A8 |

Table 6-78. MCU_UART1 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|-----------------|--------------|-----------------------------------|-------------|
| MCU_UART1_CTSn | I | UART Clear to Send (active low) | B8 |
| MCU_UART1_RTSn | O | UART Request to Send (active low) | B9 |
| MCU_UART1_RXD | I | UART Receive Data | C9 |
| MCU_UART1_TXD | O | UART Transmit Data | D9 |

6.3.25 USB

6.3.25.1 MAIN Domain

Table 6-79. USB0 Signal Descriptions

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|----------------------------|--------------|--|-------------|
| USB0_DM | IO | USB 2.0 Differential Data (negative) | AA20 |
| USB0_DP | IO | USB 2.0 Differential Data (positive) | AA19 |
| USB0_DRVVBUS | O | USB VBUS control output (active high) | E19 |
| USB0_ID | A | USB 2.0 Dual-Role Device Role Select | U16 |
| USB0_RCALIB ⁽¹⁾ | A | Pin to connect to calibration resistor | U17 |

Table 6-79. USB0 Signal Descriptions (continued)

| SIGNAL NAME [1] | PIN TYPE [2] | DESCRIPTION [3] | ALV PIN [4] |
|--------------------------|--------------|------------------------------|-------------|
| USB0_VBUS ⁽²⁾ | A | USB Level-shifted VBUS Input | T14 |

- (1) An external 500 Ω ±1% resistor must be connected between this pin and VSS. No external voltage should be applied to this pin.
 (2) An external resistor divider is required to limit the voltage applied to the device pin. For more information, see [Section 9.3.3, USB VBUS Design Guidelines](#).

6.4 Pin Connectivity Requirements

This section describes connectivity requirements for package balls that have specific connectivity requirements and package balls that may be unused.

Note

All power balls must be supplied with the voltages specified in the *Recommended Operating Conditions* section, unless otherwise specified in *Signal Descriptions*.

Note

For additional clarification, "leave unconnected" or "no connect" (NC) means **no** signal traces should be connected to these device ball numbers.

Table 6-80. Connectivity Requirements

| BALL NUMBER | BALL NAME | CONNECTION REQUIREMENTS |
|--|--|---|
| A20 D11 | MCU_SAFETY_ERRORn TRSTn | Each of these balls must be connected to VSS through separate external pull resistors to ensure they are held to a valid logic low level if a PCB signal trace is connected and not actively driven by an attached device. The internal pull-down may be used to hold a valid logic low level if no PCB signal trace is connected to the ball. |
| D10 E10 B12 E18 B11 C11 C12 | EMU0 EMU1 MCU_RESETz RESET_REQz TCK TDI TMS | Each of these balls must be connected to the corresponding power supply ⁽¹⁾ through separate external pull resistors to ensure these balls are held to a valid logic high level if a PCB signal trace is connected and not actively driven by an attached device. The internal pull-up may be used to hold a valid logic high level if no PCB signal trace is connected to the ball. |
| A18 B18 E9 A10 | I2C0_SCL I2C0_SDA MCU_I2C0_SCL MCU_I2C0_SDA | Each of these balls must be connected to the corresponding power supply ⁽¹⁾ through separate external pull resistors to ensure these balls are held to a valid logic high level. |
| T20 U21 T18 U20 U18 U19 V20 V21 V19 T17 R16 W20 W21 V18 Y21 Y20 | GPMC0_AD0 GPMC0_AD1 GPMC0_AD2 GPMC0_AD3 GPMC0_AD4 GPMC0_AD5 GPMC0_AD6 GPMC0_AD7 GPMC0_AD8 GPMC0_AD9 GPMC0_AD10 GPMC0_AD11 GPMC0_AD12 GPMC0_AD13 GPMC0_AD14 GPMC0_AD15 | Each of these balls must be connected to the corresponding power supply ⁽¹⁾ or VSS through separate external pull resistors to ensure these balls are held to a valid logic high or low level as appropriate to select the desired device boot mode. |
| J13 G20 F20 E21, D20 G21 F21 F19 E20 | VDDA_ADC ADC0_AIN0 ADC0_AIN1 ADC0_AIN2 ADC0_AIN3 ADC0_AIN4 ADC0_AIN5 ADC0_AIN6 ADC0_AIN7 | If the entire ADC0 is not used, each of these balls must be connected directly to VSS. |

Table 6-80. Connectivity Requirements (continued)

| BALL NUMBER | BALL NAME | CONNECTION REQUIREMENTS |
|---|--|---|
| G20 F20 E21, D20 G21 F21 F19 E20 | ADC0_AIN0 ADC0_AIN1 ADC0_AIN2 ADC0_AIN3 ADC0_AIN4 ADC0_AIN5 ADC0_AIN6 ADC0_AIN7 | Any unused ADC0_AIN[7:0] ball must be pulled to VSS through a resistor or connected directly to VSS when VDDA_ADC is connected to a power source. |
| F7 G6 H7 J6, K7 L6 J8 | VDDS_DDR VDDS_DDR VDDS_DDR VDDS_DDR VDDS_DDR VDDS_DDR VDDS_DDR_C | If DDRSS0 is not used, each of these balls must be connected directly to VSS. |

Table 6-80. Connectivity Requirements (continued)

| BALL NUMBER | BALL NAME | CONNECTION REQUIREMENTS |
|--|---|---|
| H2 H1 J5 K5 F6 H4 D2 C5 E2 D4 D3 F2 J2 L5 J3 J4 K3 J1 M5 K4 G4 G5 G2 H3 H5 F1 E1 F4 F3 E3 E4 B2 M2 A3 A2 B5 A4 B3 C4 C2 B4 N5 L4 L2 M3 N4 N3 M4 N2 C1 B1 N1 M1 E5 F5 D5 | DDR0_ACT_n DDR0_ALERT_n DDR0_CAS_n DDR0_PAR DDR0_RAS_n DDR0_WE_n DDR0_A0 DDR0_A1 DDR0_A2 DDR0_A3 DDR0_A4 DDR0_A5 DDR0_A6 DDR0_A7 DDR0_A8 DDR0_A9 DDR0_A10 DDR0_A11 DDR0_A12 DDR0_A13 DDR0_BA0 DDR0_BA1 DDR0_BG0 DDR0_BG1 DDR0_CAL0 DDR0_CK0 DDR0_CK0_n DDR0_CKE0 DDR0_CKE1 DDR0_CS0_n DDR0_CS1_n DDR0_DM0 DDR0_DM1 DDR0_DQ0 DDR0_DQ1 DDR0_DQ2 DDR0_DQ3 DDR0_DQ4 DDR0_DQ5 DDR0_DQ6 DDR0_DQ7 DDR0_DQ8 DDR0_DQ9 DDR0_DQ10 DDR0_DQ11 DDR0_DQ12 DDR0_DQ13 DDR0_DQ14 DDR0_DQ15 DDR0_DQS0 DDR0_DQS0_n DDR0_DQS1 DDR0_DQS1_n DDR0_ODT0 DDR0_ODT1 DDR0_RESET0_n | If DDRSS0 is not used, leave unconnected. Note: The DDR0 pins in this list can only be left unconnected when VDDSDDR and VDDSDDR_C are connected to VSS. The DDR0 pins must be connected as defined in the AM64x/AM243x DDR Board Design and Layout Guidelines , when VDDSDDR and VDDSDDR_C are connected to a power source. |
| K13 H14 | VDD_MMC0 VDD_DLL_MMC0 | If MMC0 is not used, each of these balls must be connected to the same power source as VDD_CORE. |
| J15 K14 | VDDSDDR_MMC0 VDDSDDR_MMC0 | If MMC0 is not used, each of these balls must be connected to any 1.8V power source that does not violate device power supply sequencing requirements. |

ADVANCE INFORMATION

Table 6-80. Connectivity Requirements (continued)

| BALL NUMBER | BALL NAME | CONNECTION REQUIREMENTS |
|--|--|---|
| F18 G18 J21 G19 K20 J20 J18 J17 H17 H19 H18 G17 | MMC0_CALPAD MMC0_CLK MMC0_CMD MMC0_DS MMC0_DAT0 MMC0_DAT1 MMC0_DAT2 MMC0_DAT3 MMC0_DAT4 MMC0_DAT5 MMC0_DAT6 MMC0_DAT7 | If MMC0 is not used, each of these balls must be left unconnected. |
| H15 K15 | VDDA_3P3_SDIO CAP_VDDSHV_MMC1 | If SDIO_LDO is not used to power VDDSHV5, each of these balls must be connected directly to VSS. |
| P12 P13 P11 R14 | VDDA_0P85_SERDES0 VDDA_0P85_SERDES0 VDDA_0P85_SERDES0_C VDDA_1P8_SERDES0 | If SERDES0 is not used and the device boundary scan function is required, each of these balls must be connected to valid power sources. If SERDES0 is not used and the device boundary scan function is not required, each of these balls may alternatively be connected directly to VSS. |
| T13 W16 W17 Y15 Y16 AA16 AA17 | SERDES0_REXT SERDES0_REFCLK0N SERDES0_REFCLK0P SERDES0_RX0_N SERDES0_RX0_P SERDES0_TX0_N SERDES0_TX0_P | If SERDES0 is not used, leave unconnected. Note: The SERDES0_REXT pin can only be left unconnected when VDDA_0P85_SERDES0, VDDA_0P85_SERDES0_C, and VDDA_1P8_SERDES0 are connected to VSS. The SERDES0_REXT pin must be connected to VSS through the appropriate external resistor when VDDA_0P85_SERDES0, VDDA_0P85_SERDES0_C, and VDDA_1P8_SERDES0 are connected to power sources. |
| T12 R15 R13 | VDDA_0P85_USB0 VDDA_1P8_USB0 VDDA_3P3_USB0 | If USB0 is not used, each of these balls must be connected directly to VSS. |
| AA20 AA19 U16 U17 T14 | USB0_DM USB0_DP USB0_ID USB0_RCALIB USB0_VBUS | If USB0 is not used, leave unconnected. Note: The USB0_RCALIB pin can only be left unconnected when VDDA_0P85_USB0, VDDA_1P8_USB0, and VDDA_3P3_USB0 are connected to VSS. The USB0_RCALIB pin must be connected to VSS through the appropriate external resistor when VDDA_0P85_USB0, VDDA_1P8_USB0, and VDDA_3P3_USB0 are connected to power sources. |

(1) To determine which power supply is associated with any IO, see POWER column of the *Pin Attributes* table.

Note

Internal pull resistors are weak and may not source enough current to maintain a valid logic level for some operating conditions. This may be the case when connected to components with leakage to the opposite logic level, or when external noise sources couple to signal traces attached to balls which are only pulled to a valid logic level by the internal resistor. Therefore, external pull resistors may be required to hold a valid logic level on balls with external connections.

If balls are allowed to float between valid logic levels, the input buffer may enter a high-current state which could damage the IO cell.

7 Specifications

Note

All specifications listed are preliminary and may change during device characterization.

7.1 Absolute Maximum Ratings

over operating junction temperature range (unless otherwise noted)⁽¹⁾⁽²⁾


| PARAMETER | | MIN | MAX | UNIT |
|--|--|------|----------------------------|------|
| VDD_CORE | Core supply | -0.3 | 1.05 | V |
| VDDR_CORE | RAM supply | -0.3 | 1.05 | V |
| VDD_MMC0 | MMC0 PHY core supply | -0.3 | 1.05 | V |
| VDD_DLL_MMC0 | MMC0 PLL analog supply | -0.3 | 1.05 | V |
| VDDA_0P85_SERDES0 | SERDES0 0.85 V analog supply | -0.3 | 1.05 | V |
| VDDA_0P85_SERDES0_C | SERDES0 clock 0.85 V analog supply | -0.3 | 1.05 | V |
| VDDA_0P85_USB0 | USB0 0.85 V analog supply | -0.3 | 1.05 | V |
| VDDS_DDR | DDR PHY IO supply | -0.3 | TBD | V |
| VDDS_DDR_C | DDR clock IO supply | -0.3 | TBD | V |
| VDDS_MMC0 | MMC0 PHY IO supply | -0.3 | 2.2 | V |
| VDDS_OSC | MCU_OSC0 supply | -0.3 | 2.2 | V |
| VDDA_MCU | POR and MCU PLL analog supply | -0.3 | 2.2 | V |
| VDDA_ADC0 | ADC0 analog supply | -0.3 | 2.2 | V |
| VDDA_PLL0 | Main, PER1, and R5F PLL analog supply | -0.3 | 2.2 | V |
| VDDA_PLL1 | ARM and DDR PLL analog supply | -0.3 | 2.2 | V |
| VDDA_PLL2 | PER0 PLL analog supply | -0.3 | 2.2 | V |
| VDDA_1P8_SERDES0 | SERDES0 1.8 V analog supply | -0.3 | 2.2 | V |
| VDDA_1P8_USB0 | USB0 1.8 V analog supply | -0.3 | 2.2 | V |
| VDDA_TEMP0 | TEMP0 analog supply | -0.3 | 2.2 | V |
| VDDA_TEMP1 | TEMP1 analog supply | -0.3 | 2.2 | V |
| VPP | eFuse ROM programming supply | -0.3 | TBD | V |
| VDDSHV_MCU | IO supply for IO MCU | -0.3 | 3.8 | V |
| VDDSHV0 | IO supply for IO group 0 | -0.3 | 3.8 | V |
| VDDSHV1 | IO supply for IO group 1 | -0.3 | 3.8 | V |
| VDDSHV2 | IO supply for IO group 2 | -0.3 | 3.8 | V |
| VDDSHV3 | IO supply for IO group 3 | -0.3 | 3.8 | V |
| VDDSHV4 | IO supply for IO group 4 | -0.3 | 3.8 | V |
| VDDSHV5 | IO supply for IO group 5 | -0.3 | 3.8 | V |
| VDDA_3P3_USB0 | USB0 3.3 V analog supply | -0.3 | 3.8 | V |
| VDDA_3P3_SDIO | SDIO 3.3 V analog supply | -0.3 | TBD | V |
| Steady-state max voltage at all fail-safe IO pins | MCU_PORz | -0.3 | 2.2 | V |
| | MCU_I2C0_SCL, MCU_I2C0_SDA, I2C0_SCL, I2C0_SDA, EXTINTn | -0.3 | TBD | V |
| | VMON_1P8_MCU, VMON_1P8_SOC | -0.3 | 2.2 | V |
| | VMON_3P3_MCU, VMON_3P3_SOC | -0.3 | 3.8 | V |
| | VMON_VSYS ⁽³⁾ | -0.3 | 2.2 | V |
| Steady-state max voltage at all other IO pins ⁽⁴⁾ | USB0_VBUS ⁽⁵⁾ | -0.3 | 3.6 | V |
| | All other IO pins | -0.3 | IO supply voltage + 0.3 | V |

over operating junction temperature range (unless otherwise noted)⁽¹⁾⁽²⁾

| PARAMETER | | MIN | MAX | UNIT |
|--|--|-----|------------------------|------|
| Transient overshoot and undershoot at IO pin | 20% of IO supply voltage for up to 20% of the signal period (see Figure 7-1, IO Transient Voltage Ranges) | | $0.2 \times VDD^{(6)}$ | V |
| Latch-up performance | | TBD | TBD | mA |
| T _{STG} | Storage temperature | -55 | +150 | °C |

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under [Section 7.4, Recommended Operating Conditions](#) is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) All voltage values are with respect to VSS, unless otherwise noted.
- (3) The VMON_VSYS pin provides a way to monitor the system power supply. For more information, see [Section 9.3.4, System Power Supply Monitor Design Guidelines](#).
- (4) This parameter applies to all IO pins which are not fail-safe and the requirement applies to all values of IO supply voltage. For example, if the voltage applied to a specific IO supply is 0 volts the valid input voltage range for any IO powered by that supply will be -0.3 to +0.3 volts. Special attention should be applied anytime peripheral devices are not powered from the same power sources used to power the respective IO supply. It is important the attached peripheral never sources a voltage outside the valid input voltage range, including power supply ramp-up and ramp-down sequences.
- (5) An external resistor divider is required to limit the voltage applied to this device pin. For more information, see [Section 9.3.3, USB Design Guidelines](#).
- (6) VDD is the voltage on the corresponding power-supply pin(s) for the IO.

Fail-safe IO terminals are designed such they do not have dependencies on the respective IO power supply voltage. This allows external voltage sources to be connected to these IO terminals when the respective IO power supplies are turned off. The MCU_I2C0_SCL, MCU_I2C0_SDA, I2C0_SCL, I2C0_SDA, EXTINTn, VMON_1P8_MCU, VMON_1P8_SOC, VMON_3P3_MCU, VMON_3P3_SOC, and MCU_PORz are the only fail-safe IO terminals. All other IO terminals are not fail-safe and the voltage applied to them should be limited to the value defined by the Steady State Max. Voltage at all IO pins parameter in [Section 7.1](#).

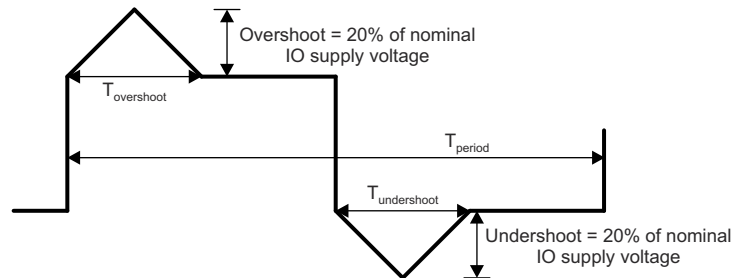

A. $T_{\text{overshoot}} + T_{\text{undershoot}} < 20\% \text{ of } T_{\text{period}}$

Figure 7-1. IO Transient Voltage Ranges

7.2 ESD Ratings

| | | | VALUE | UNIT |
|-------------|-------------------------------|---|-------|------|
| $V_{(ESD)}$ | Electrostatic discharge (ESD) | Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 ⁽¹⁾ | TBD | V |
| | | Charged-device model (CDM), per ANSI/ESDA/JEDEC JS-002 ⁽²⁾ | TBD | |

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

7.3 Power-On Hours (POH)

| EXTENDED JUNCTION TEMPERATURE RANGE ^{(1) (2) (3)} | |
|--|----------------|
| JUNCTION TEMP (T _j) | LIFETIME (POH) |
| -40°C to 105°C | 100000 |

(1) This information is provided solely for your convenience and does not extend or modify the warranty provided under TI's standard terms and conditions for TI semiconductor products.

(2) Unless specified in the table above, all voltage domains and operating conditions are supported in the device at the noted temperatures.

(3) POH is a function of voltage, temperature and time. Usage at higher voltages and temperatures will result in a reduction in POH.

7.4 Recommended Operating Conditions

over operating junction temperature range (unless otherwise noted)

| SUPPLY NAME | DESCRIPTION | | MIN ⁽¹⁾ | NOM | MAX ⁽¹⁾ | UNIT |
|--|--|------------------|--------------------|--------------------|--------------------|------|
| VDD_CORE | Core supply | 0.75-V operation | 0.715 | 0.75 | 0.79 | V |
| | | 0.85-V operation | 0.81 | 0.85 | 0.895 | V |
| VDDR_CORE | RAM supply | | 0.81 | 0.85 | 0.895 | V |
| VDD_MMC0 ⁽²⁾ | MMC0 PHY core supply | | 0.81 | 0.85 | 0.895 | V |
| VDD_DLL_MMC0 ⁽²⁾ | MMC0 PLL analog supply | | 0.81 | 0.85 | 0.895 | V |
| VDDA_0P85_SERDES0 | SERDES0 0.85 V analog supply | | 0.81 | 0.85 | 0.895 | V |
| VDDA_0P85_SERDES0_C | SERDES0 clock 0.85 V analog supply | | 0.81 | 0.85 | 0.895 | V |
| VDDA_0P85_USB0 | USB0 0.85 V analog supply | | 0.81 | 0.85 | 0.895 | V |
| VDDS_DDR ⁽³⁾ VDDS_DDR_C ⁽³⁾ | DDR PHY IO supply DDR clock IO supply | 1.1-V operation | 1.06 | 1.1 | 1.17 | V |
| | | 1.2-V operation | 1.14 | 1.2 | 1.26 | V |
| VDDS_MMC0 | MMC0 PHY IO supply | | 1.71 | 1.8 | 1.89 | V |
| VDDS_OSC | MCU_OSC0 supply | | 1.71 | 1.8 | 1.89 | V |
| VDDA_MCU | POR and MCU PLL analog supply | | 1.71 | 1.8 | 1.89 | V |
| VDDA_ADC0 | ADC0 analog supply | | 1.71 | 1.8 | 1.89 | V |
| VDDA_PLL0 | Main, PER and R5F PLL analog supply | | 1.71 | 1.8 | 1.89 | V |
| VDDA_PLL1 | ARM and DDR PLL analog supply | | 1.71 | 1.8 | 1.89 | V |
| VDDA_PLL2 | PER0 PLL analog supply | | 1.71 | 1.8 | 1.89 | V |
| VDDA_1P8_SERDES0 | SERDES0 1.8 V analog supply | | 1.71 | 1.8 | 1.89 | V |
| VDDA_1P8_USB0 | USB0 1.8 V analog supply | | 1.71 | 1.8 | 1.89 | V |
| VDDA_TEMP0 | TEMP0 analog supply | | 1.71 | 1.8 | 1.89 | V |
| VDDA_TEMP1 | TEMP1 analog supply | | 1.71 | 1.8 | 1.89 | V |
| VPP | eFuse ROM programming supply | | 1.71 | 1.8 | 1.89 | V |
| VMON_1P8_MCU | Voltage monitor for 1.8 V MCU power supply | | 1.71 | 1.8 | 1.89 | V |
| VMON_1P8_SOC | Voltage monitor for 1.8 V SoC power supply | | 1.71 | 1.8 | 1.89 | V |
| VDDA_3P3_USB0 | USB0 3.3 V analog supply | | 3.135 | 3.3 | 3.465 | V |
| VDDA_3P3_SDIO | SDIO 3.3 V analog supply | | 3.135 | 3.3 | 3.465 | V |
| VMON_3P3_MCU | Voltage monitor for 3.3 V MCU power supply | | 3.135 | 3.3 | 3.465 | V |
| VMON_3P3_SOC | Voltage monitor for 3.3 V SoC power supply | | 3.135 | 3.3 | 3.465 | V |
| VMON_VSYS | Voltage monitor pin | | 0 | see ⁽⁴⁾ | 1 | V |
| USB0_VBUS | USB Level-shifted VBUS Input | | 0 | see ⁽⁵⁾ | 3.465 | V |
| VDDSHV_MCU | Dual-voltage IO supply | 1.8-V operation | 1.71 | 1.8 | 1.89 | V |
| | | 3.3-V operation | 3.135 | 3.3 | 3.465 | V |
| VDDSHV0 | Dual-voltage IO supply | 1.8-V operation | 1.71 | 1.8 | 1.89 | V |
| | | 3.3-V operation | 3.135 | 3.3 | 3.465 | V |
| VDDSHV1 | Dual-voltage IO supply | 1.8-V operation | 1.71 | 1.8 | 1.89 | V |
| | | 3.3-V operation | 3.135 | 3.3 | 3.465 | V |
| VDDSHV2 | Dual-voltage IO supply | 1.8-V operation | 1.71 | 1.8 | 1.89 | V |
| | | 3.3-V operation | 3.135 | 3.3 | 3.465 | V |
| VDDSHV3 | Dual-voltage IO supply | 1.8-V operation | 1.71 | 1.8 | 1.89 | V |
| | | 3.3-V operation | 3.135 | 3.3 | 3.465 | V |
| VDDSHV4 | Dual-voltage IO supply | 1.8-V operation | 1.71 | 1.8 | 1.89 | V |
| | | 3.3-V operation | 3.135 | 3.3 | 3.465 | V |
| VDDSHV5 | Dual-voltage IO supply | 1.8-V operation | 1.71 | 1.8 | 1.89 | V |
| | | 3.3-V operation | 3.135 | 3.3 | 3.465 | V |

over operating junction temperature range (unless otherwise noted)

| SUPPLY NAME | DESCRIPTION | | MIN ⁽¹⁾ | NOM | MAX ⁽¹⁾ | UNIT |
|----------------|--------------------------------------|----------|--------------------|-----|--------------------|------|
| T _J | Operating junction temperature range | Extended | -40 | | 105 | °C |

- (1) The voltage at the device ball must never drop below the MIN voltage or rise above the MAX voltage for any amount of time during normal device operation.
- (2) VDD_MMC0 and VDDD_DLL_MMC0 must be connected to the same power source as VDD_CORE when MMC0 is not used. In this case, VDD_MMC0 and VDDD_DLL_MMC0 may be operated at a nominal voltage of 0.75 or 0.85.
- (3) VDDS_DDR and VDDS_DDR_C shall be sourced from the same power source.
- (4) The VMON_VSYS pin provides a way to monitor the system power supply. For more information, see [Section 9.3.4, System Power Supply Monitor Design Guidelines](#).
- (5) An external resistor divider is required to limit the voltage applied to this device pin. For more information, see [Section 9.3.3, USB Design Guidelines](#).

7.5 Operating Performance Points

This section describes the operating conditions of the device. This section also contains the description of each Operating Performance Point (OPP) for processor clocks and device core clocks.

[Table 7-1](#) describes the maximum supported frequency per speed grade for the device.

Table 7-1. Speed Grade Maximum Frequency

| DEVICE | MAXIMUM FREQUENCY (MHz) | | | | | | | | |
|--------|-------------------------|-------|-------|-------|--------|-------|--------|---------------------|-----------------------|
| | SPEED GRADE | A53SS | R5FSS | M4FSS | CBASS0 | ICSSG | DMSC-L | DDR4 ⁽¹⁾ | LPDDR4 ⁽¹⁾ |
| AM64x | S | 1000 | 800 | 400 | 250 | 333 | TBD | 800 (DDR-1600) | 800 (LPDDR-1600) |
| AM64x | K | 800 | 400 | 400 | 250 | 250 | TBD | 800 (DDR-1600) | 800 (LPDDR-1600) |

- (1) Maximum DDR Frequency will be limited based on the specific memory type (vendor) used in a system and by PCB implementation. Refer to [AM64x/AM243x DDR Board Design and Layout Guidelines](#) for the proper PCB implementation to achieve maximum DDR frequency.

7.6 Power Consumption Summary

For information on the device power consumption contact your TI Representative.

7.7 Electrical Characteristics

Note

The interfaces or signals described in [Section 7.7.1](#) through [Section 7.7.10](#) correspond to the interfaces or signals available in multiplexing mode 0 (Primary Function).

All interfaces or signals multiplexed on the balls described in these tables have the same DC electrical characteristics, unless multiplexing involves a PHY and GPIO combination, in which case different DC electrical characteristics are specified for the different multiplexing modes (Functions).

7.7.1 I2C Open-Drain, and Fail-Safe (I2C OD FS) Electrical Characteristics

over recommended operating conditions (unless otherwise noted)

| PARAMETER | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|-------------------|---------------------------------|--|-----|--------------------------|------|
| 1.8 V MODE | | | | | |
| V _{IL} | Input Low Voltage | | | 0.3 × VDD ⁽¹⁾ | V |
| V _{ILSS} | Input Low Voltage Steady State | | | 0.3 × VDD ⁽¹⁾ | V |
| V _{IH} | Input High Voltage | 0.7 × VDD ⁽¹⁾ | | | V |
| V _{IHSS} | Input High Voltage Steady State | 0.7 × VDD ⁽¹⁾ | | | V |
| V _{HYS} | Input Hysteresis Voltage | 0.1 × VDD ⁽¹⁾ | | TBD | mV |
| I _{IN} | Input Leakage Current. | V _I = 1.8 V or V _I = 0 V | ±10 | ±10 | µA |
| V _{OL} | Output Low Voltage | | | 0.2 × VDD ⁽¹⁾ | V |

over recommended operating conditions (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|----------------------------------|---------------------------------|--|---------------------------|---------------------------|--------|------|
| I _{OL} | Low Level Output Current | V _{OL(MAX)} | 20 | | | mA |
| SR _I | Input Slew Rate | | TBD | TBD | TBD | V/s |
| 3.3 V MODE ⁽²⁾ | | | | | | |
| V _{IL} | Input Low Voltage | | | 0.3 × VDD ⁽¹⁾ | | V |
| V _{ILSS} | Input Low Voltage Steady State | | | 0.25 × VDD ⁽¹⁾ | | V |
| V _{IH} | Input High Voltage | | 0.7 × VDD ⁽¹⁾ | | | V |
| V _{IHSS} | Input High Voltage Steady State | | 0.7 × VDD ⁽¹⁾ | | | V |
| V _{HYS} | Input Hysteresis Voltage | | 0.05 × VDD ⁽¹⁾ | | TBD | mV |
| I _{IN} | Input Leakage Current. | V _I = 3.3 V or V _I = 0 V | | ±10 | ±10 | μA |
| V _{OL} | Output Low Voltage | | | | 0.4 | V |
| I _{OL} | Low Level Output Current | V _{OL(MAX)} | 20 | | | mA |
| SR _I | Input Slew Rate | | TBD | TBD | 8E + 7 | V/s |

(1) VDD stands for corresponding power supply. For more information on the power supply name and the corresponding ball(s), see POWER column of the *Pin Attributes* table.

(2) I2C HS-mode is not supported when operating the IO in 3.3 V mode.

7.7.2 Fail-Safe Reset (FS RESET) Electrical Characteristics

over recommended operating conditions (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|-------------------|---------------------------------|--|--------------------------|-----|--------------------------|------|
| V _{IL} | Input Low Voltage | | | | 0.3 × VDD _{OSC} | V |
| V _{ILSS} | Input Low Voltage Steady State | | | | 0.3 × VDD _{OSC} | V |
| V _{IH} | Input High Voltage | | 0.7 × VDD _{OSC} | | | V |
| V _{IHSS} | Input High Voltage Steady State | | 0.7 × VDD _{OSC} | | | V |
| V _{HYS} | Input Hysteresis Voltage | | 200 | | | mV |
| I _{IN} | Input Leakage Current. | V _I = 1.8 V or V _I = 0 V | | | ±10 | μA |
| SR _I | Input Slew Rate | | TBD | TBD | TBD | V/s |

7.7.3 High-Frequency Oscillator (HFOSC) Electrical Characteristics

over recommended operating conditions (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|------------------|--------------------------|--|---------------------------|-----|---------------------------|------|
| V _{IL} | Input Low Voltage | | | | 0.35 × VDD _{OSC} | V |
| V _{IH} | Input High Voltage | | 0.65 × VDD _{OSC} | | | V |
| V _{HYS} | Input Hysteresis Voltage | | | 49 | | mV |
| I _{IN} | Input Leakage Current. | V _I = 1.8 V or V _I = 0.0 V | | | ±TBD | μA |

7.7.4 eMMC PHY Electrical Characteristics

over recommended operating conditions (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|-------------------|---------------------------------|-------------------------------|------------------------------|-----|------------------------------|------|
| V _{IL} | Input Low Voltage | | | | 0.35 × V _{DD5_MMC0} | V |
| V _{ILSS} | Input Low Voltage Steady State | | | | 0.20 | V |
| V _{IH} | Input High Voltage | | 0.65 × V _{DD5_MMC0} | | | V |
| V _{IHSS} | Input High Voltage Steady State | | 1.4 | | | V |
| I _{IN} | Input Leakage Current. | V _I = 1.8 V or 0 V | | | ±10 | µA |
| R _{PU} | Pull-up Resistor | | 15 | 20 | 25 | kΩ |
| R _{PD} | Pull-down Resistor | | 15 | 20 | 25 | kΩ |
| V _{OL} | Output Low Voltage | I _{OL} = 2 mA | | | 0.30 | V |
| V _{OH} | Output High Voltage | I _{OH} = -2 mA | V _{DD5_MMC0} - 0.30 | | | V |
| SR _I | Input Slew Rate | | 5E + 8 | | | V/s |

7.7.5 SDIO Electrical Characteristics

over recommended operating conditions (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|-------------------|---------------------------------|--|-----------------------------|-----|----------------------------|------|
| 1.8 V MODE | | | | | | |
| V _{IL} | Input Low Voltage | | | | 0.58 | V |
| V _{ILSS} | Input Low Voltage Steady State | | | | 0.58 | V |
| V _{IH} | Input High Voltage | | 1.27 | | | V |
| V _{IHSS} | Input High Voltage Steady State | | 1.7 | | | V |
| V _{HYS} | Input Hysteresis Voltage | | 150 | | | mV |
| I _{IN} | Input Leakage Current. | V _I = 1.8 V or V _I = 0 V | | | ±10 | µA |
| R _{PU} | Pull-up Resistor | | 40 | 50 | 60 | kΩ |
| R _{PD} | Pull-down Resistor | | 40 | 50 | 60 | kΩ |
| V _{OL} | Output Low Voltage | | | | 0.45 | V |
| V _{OH} | Output High Voltage | | V _{DDSHV5} - 0.45 | | | V |
| I _{OL} | Low Level Output Current | V _{OL(MAX)} | 4 | | | mA |
| I _{OH} | High Level Output Current | V _{OH(MIN)} | 4 | | | mA |
| SR _I | Input Slew Rate | | TBD | | | V/s |
| 3.3 V MODE | | | | | | |
| V _{IL} | Input Low Voltage | | | | 0.25 × V _{DDSHV5} | V |
| V _{ILSS} | Input Low Voltage Steady State | | | | 0.15 × V _{DDSHV5} | V |
| V _{IH} | Input High Voltage | | 0.625 × V _{DDSHV5} | | | V |
| V _{IHSS} | Input High Voltage Steady State | | 0.625 × V _{DDSHV5} | | | V |
| V _{HYS} | Input Hysteresis Voltage | | 150 | | | mV |
| I _{IN} | Input Leakage Current. | V _I = 3.3 V or V _I = 0 V | | | ±10 | µA |
| R _{PU} | Pull-up Resistor | | 40 | 50 | 60 | kΩ |

over recommended operating conditions (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|-----------------|---------------------------|----------------------|----------------|-----|-----------------|------|
| R _{PD} | Pull-down Resistor | | 40 | 50 | 60 | kΩ |
| V _{OL} | Output Low Voltage | | | | 0.125 × VDDSHV5 | V |
| V _{OH} | Output High Voltage | | 0.75 × VDDSHV5 | | | V |
| I _{OL} | Low Level Output Current | V _{OL(MAX)} | 6 | | | mA |
| I _{OH} | High Level Output Current | V _{OH(MIN)} | 10 | | | mA |
| SR _I | Input Slew Rate | | TBD | TBD | TBD | V/s |

7.7.6 LVCMOS Electrical Characteristics

over recommended operating conditions (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|-------------------|---------------------------------|--|---------------------------|---------------------------|------|------|
| 1.8-V MODE | | | | | | |
| V _{IL} | Input Low Voltage | | | 0.35 × VDD ⁽¹⁾ | | V |
| V _{ILSS} | Input Low Voltage Steady State | | | 0.3 × VDD ⁽¹⁾ | | V |
| V _{IH} | Input High Voltage | | 0.65 × VDD ⁽¹⁾ | | | V |
| V _{IHSS} | Input High Voltage Steady State | | 0.85 × VDD ⁽¹⁾ | | | V |
| V _{HYS} | Input Hysteresis Voltage | | 150 | | | mV |
| I _{IN} | Input Leakage Current. | V _I = 1.8 V or V _I = 0.0 V | | | ±10 | μA |
| R _{PU} | Pull-up Resistor | | 15 | 22 | 30 | kΩ |
| R _{PD} | Pull-down Resistor | | 15 | 22 | 30 | kΩ |
| V _{OL} | Output Low Voltage | | | | 0.45 | V |
| V _{OH} | Output High Voltage | | VDD ⁽¹⁾ - 0.45 | | | V |
| I _{OL} | Low Level Output Current | V _{OL(MAX)} | 3 | | | mA |
| I _{OH} | High Level Output Current | V _{OH(MIN)} | 3 | | | mA |
| SR _I | Input Slew Rate | | TBD | TBD | TBD | V/s |
| 3.3-V MODE | | | | | | |
| V _{IL} | Input Low Voltage | | | | 0.8 | V |
| V _{ILSS} | Input Low Voltage Steady State | | | | 0.6 | V |
| V _{IH} | Input High Voltage | | 2.0 | | | V |
| V _{IHSS} | Input High Voltage Steady State | | 2.0 | | | V |
| V _{HYS} | Input Hysteresis Voltage | | 150 | | | mV |
| I _{IN} | Input Leakage Current. | V _I = 3.3 V or V _I = 0.0 V | | | ±10 | μA |
| R _{PD} | Pull-down Resistor | | 15 | 22 | 30 | kΩ |
| R _{PD} | Pull-down Resistor | | 15 | 22 | 30 | kΩ |
| V _{OL} | Output Low Voltage | | | | 0.4 | V |
| V _{OH} | Output High Voltage | | 2.4 | | | V |
| I _{OL} | Low Level Output Current | V _{OL(MAX)} | 5 | | | mA |
| I _{OH} | High Level Output Current | V _{OH(MIN)} | 9 | | | mA |
| SR _I | Input Slew Rate | | TBD | TBD | TBD | V/s |

 (1) VDD stands for corresponding power supply. For more information on the power supply name and the corresponding ball(s), see POWER column of the *Pin Attributes* table.

7.7.7 ADC12B Electrical Characteristics

over recommended operating conditions (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|--|----------------------------------|---|------------------|--|------------------|----------------------|
| V _{ADC_AIN[7:0]} | Full-scale Input Range | | VSS | VDDA_ADC0 | | V |
| DNL | Differential Non-Linearity | | -1 | 0.5 | 2 | LSB |
| INL | Integral Non-Linearity | | | ±1 | ±3 | LSB |
| LSB _{GAIN-ERROR} | Gain Error | | | ±2 | | LSB |
| LSB _{OFFSET-ERROR} | Offset Error | | | ±2 | | LSB |
| C _{IN} | Input Sampling Capacitance | | | 5.5 | | pF |
| SNR | Signal-to-Noise Ratio | Input Signal: 200 kHz sine wave at -0.5 dB Full Scale | | 70 | | dB |
| THD | Total Harmonic Distortion | Input Signal: 200 kHz sine wave at -0.5 dB Full Scale | | 75 | | dB |
| SFDR | Spurious Free Dynamic Range | Input Signal: 200 kHz sine wave at -0.5 dB Full Scale | | 80 | | dB |
| SNR _(PLUS) | Signal-to-Noise Plus Distortion | Input Signal: 200 kHz sine wave at -0.5 dB Full Scale | | 69 | | dB |
| R _{ADC_AIN[0:7]} | Input Impedance of ADC0_AIN[7:0] | f = input frequency | | $[1/((65.97 \times 10^{-12}) \times f)]$ | | Ω |
| I _{IN} | Input Leakage | ADC0_AIN[7:0] = VSS | | | 4 | μA |
| | | ADC0_AIN[7:0] = VDDA_ADC0 | | | 10 | μA |
| Sampling Dynamics | | | | | | |
| F _{SMPL_CLK} | SMPL_CLK Frequency | | | 60 | | MHz |
| t _C | Conversion Time | | | 13 | | ADC0 SMPL_CLK Cycles |
| t _{ACQ} | Acquisition time | | 2 | | 257 | ADC0 SMPL_CLK Cycles |
| T _R | Sampling Rate | ADC0 SMPL_CLK = 60 MHz | | | 4 | MSPS |
| CCISO | Channel to Channel Isolation | | | 100 | | dB |
| General Purpose Input Mode ⁽¹⁾ | | | | | | |
| V _{IL} | Input Low Voltage | | | | 0.35 × VDDA_ADC0 | V |
| V _{ILSS} | Input Low Voltage Steady State | | | | 0.35 × VDDA_ADC0 | V |
| V _{IH} | Input High Voltage | | 0.65 × VDDA_ADC0 | | | V |
| V _{IHSS} | Input High Voltage Steady State | | 0.65 × VDDA_ADC0 | | | V |
| V _{HYS} | Input Hysteresis Voltage | | 200 | | | mV |

over recommended operating conditions (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|-----------|-----------------------|---|-----|-----|-----|---------|
| I_I | Input Leakage Current | ADC0_AIN[7:0] = VDDA_ADC0 or ADC0_AIN[7:0] = VSS | | | 2 | μ A |

- (1) ADC0 can be configured to operate in General Purpose Input mode, where all ADC0_AIN[7:0] inputs are globally enabled to operate as digital inputs via the ADC0_CTRL register (gpi_mode_en = 1).

7.7.8 USB2PHY Electrical Characteristics

Note

USB0 interface is compliant with Universal Serial Bus Revision 2.0 Specification dated April 27, 2000 including ECNs and Errata as applicable.

7.7.9 SERDES Electrical Characteristics

Note

The PCIe interface is compliant with the electrical parameters specified in PCI Express® Base Specification Revision 4.0, February 19, 2014.

Note

USB0 instance is compliant with the USB3.1 SuperSpeed Transmitter and Receiver Normative Electrical Parameters as defined in the Universal Serial Bus 3.1 Specification, Revision 1.0 , July 26, 2013.

7.7.10 DDR Electrical Characteristics

Note

The DDR interface is compatible with DDR4 and LPDDR4 devices

7.8 VPP Specifications for One-Time Programmable (OTP) eFuses

This section specifies the operating conditions required for programming the OTP eFuses..

7.8.1 Recommended Operating Conditions for OTP eFuse Programming

over operating junction temperature range (unless otherwise noted)

| PARAMETER | DESCRIPTION | MIN | NOM | MAX | UNIT |
|---------------------|---|---|-----|------|------|
| VDD_CORE | Supply voltage range for the core domain during OTP operation; OPP NOM (BOOT) | See <i>Recommended Operating Conditions</i> | | | V |
| VPP | Supply voltage range for the eFuse ROM domain during normal operation without hardware support to program eFuse ROM | NC ⁽¹⁾ | | | V |
| | Supply voltage range for the eFuse ROM domain during normal operation with hardware support to program eFuse ROM | 0 | | | V |
| | Supply voltage range for the eFuse ROM domain during OTP programming ⁽²⁾ | 1.71 | 1.8 | 1.89 | V |
| I _(VPP) | VPP current | TBD | | | mA |
| SR _(VPP) | VPP Slew Rate | 6E + 4 | | | V/s |
| Tj | Operating junction temperature range while programming eFuse ROM. | 0 | 25 | 85 | °C |

(1) NC stands for No Connect.

(2) Supply voltage range includes DC errors and peak-to-peak noise.

7.8.2 Hardware Requirements

The following hardware requirements must be met when programming keys in the OTP eFuses:

- The VPP power supply must be disabled when not programming OTP registers.
- The VPP power supply must be ramped up after the proper device power-up sequence (for more details, see [Section 7.10.2, Power Supply Sequencing](#)).

7.8.3 Programming Sequence

Programming sequence for OTP eFuses:

- Power on the board per the power-up sequencing. No voltage should be applied on the VPP terminal during power up and normal operation.
- Load the OTP write software required to program the eFuse (contact your local TI representative for the OTP software package).
- Apply the voltage on the VPP terminal according to the specification in [Section 7.8.1](#).
- Run the software that programs the OTP registers.
- After validating the content of the OTP registers, remove the voltage from the VPP terminal.

7.8.4 Impact to Your Hardware Warranty

You accept that e-Fusing the TI Devices with security keys permanently alters them. You acknowledge that the e-Fuse can fail, for example, due to incorrect or aborted program sequence or if you omit a sequence step. Further the TI Device may fail to secure boot if the error code correction check fails for the Production Keys or if the image is not signed and optionally encrypted with the current active Production Keys. These types of situations will render the TI Device inoperable and TI will be unable to confirm whether the TI Devices conformed to their specifications prior to the attempted e-Fuse. CONSEQUENTLY, TI WILL HAVE NO LIABILITY (WARRANTY OR OTHERWISE) FOR ANY TI DEVICES THAT HAVE BEEN e-FUSED WITH SECURITY KEYS.

7.9 Thermal Resistance Characteristics

This section provides the thermal resistance characteristics used on this device.

For reliability and operability concerns, the maximum junction temperature of the device has to be at or below the T_J value identified in *Recommended Operating Conditions*.

7.9.1 Thermal Resistance Characteristics

Table 7-2. ALV Package Thermal Resistance Characteristics

It is recommended to perform thermal simulations at the system level with the worst case device power consumption.

| NO. | PARAMETER | DESCRIPTION | °C/W ^{(1) (3)} | AIR FLOW (m/s) ⁽²⁾ |
|-------------|----------------|-------------------------|-------------------------|-------------------------------|
| ALV Package | | | | |
| T1 | $R\theta_{JC}$ | Junction-to-case | 0.98 | N/A |
| T2 | $R\theta_{JB}$ | Junction-to-board | 3.87 | N/A |
| T3 | $R\theta_{JA}$ | Junction-to-free air | 12.8 | 0 |
| T4 | $R\theta_{JA}$ | Junction-to-moving air | 9.2 | 1 |
| T5 | | | 8.2 | 2 |
| T6 | | | 7.6 | 3 |
| T7 | Ψ_{JT} | Junction-to-package top | 0.53 | 0 |
| T8 | | | 0.55 | 1 |
| T9 | | | 0.57 | 2 |
| T10 | | | 0.58 | 3 |
| T11 | Ψ_{JB} | Junction-to-board | 3.74 | 0 |
| T12 | | | 3.5 | 1 |
| T13 | | | 3.4 | 2 |
| T14 | | | 3.3 | 3 |

(1) These values are based on a JEDEC defined 2S2P system (with the exception of the Theta JC [$R\theta_{JC}$] value, which is based on a JEDEC defined 1S0P system) and will change based on environment as well as application. For more information, see these EIA/JEDEC standards:

- JESD51-2, *Integrated Circuits Thermal Test Method Environment Conditions - Natural Convection (Still Air)*
- JESD51-3, *Low Effective Thermal Conductivity Test Board for Leaded Surface Mount Packages*
- JESD51-6, *Integrated Circuit Thermal Test Method Environmental Conditions - Forced Convection (Moving Air)*
- JESD51-7, *High Effective Thermal Conductivity Test Board for Leaded Surface Mount Packages*
- JESD51-9, *Test Boards for Area Array Surface Mount Packages*

(2) m/s = meters per second.

(3) °C/W = degrees Celsius per watt.

7.10 Timing and Switching Characteristics

Note

The Timing Requirements and Switching Characteristics values may change following the silicon characterization result.

Note

The default SLEWRATE settings in each pad configuration register must be used to ensure timings, unless specific instructions are given otherwise.

7.10.1 Timing Parameters and Information

The timing parameter symbols used in *Timing and Switching Characteristics* sections are created in accordance with JEDEC Standard 100. To shorten the symbols, some pin names and other related terminologies have been abbreviated in [Table 7-3](#):

Table 7-3. Timing Parameters Subscripts

| SYMBOL | PARAMETER |
|--------|--|
| c | Cycle time (period) |
| d | Delay time |
| dis | Disable time |
| en | Enable time |
| h | Hold time |
| su | Setup time |
| START | Start bit |
| t | Transition time |
| v | Valid time |
| w | Pulse duration (width) |
| X | Unknown, changing, or don't care level |
| F | Fall time |
| H | High |
| L | Low |
| R | Rise time |
| V | Valid |
| IV | Invalid |
| AE | Active Edge |
| FE | First Edge |
| LE | Last Edge |
| Z | High impedance |

7.10.2 Power Supply Sequencing

This section describes power supply sequencing required to ensure proper device operation. The power supply names described in this section comprise a superset of a family of compatible devices. Some members of this family will not include a subset of these power supplies and their associated device modules.


Note

All power sequence timing shown is preliminary and under evaluation. Updates will be provided as details become known during validation testing.

7.10.2.1 Power Supply Slew Rate Requirement

To maintain the safe operating range of the internal ESD protection devices, TI recommends limiting the maximum slew rate of supplies to be less than 18 mV/μs. For instance, as shown in Figure 7-2, TI recommends having the supply ramp slew for a 1.8-V supply of more than 100 μs.

Figure 7-2 describes the Power Supply Slew Rate Requirement in the device.

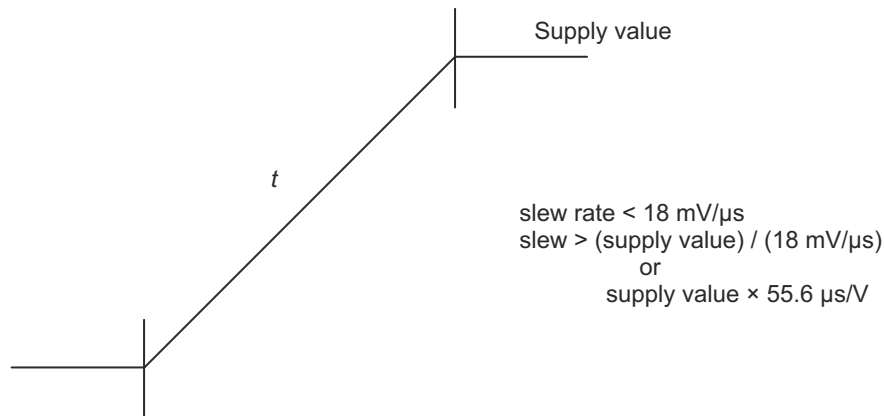

SPRT740_ELCH_06

Figure 7-2. Power Supply Slew and Slew Rate

7.10.2.2 Power-Up Sequencing

Figure 7-3 describes the device power-up sequencing.

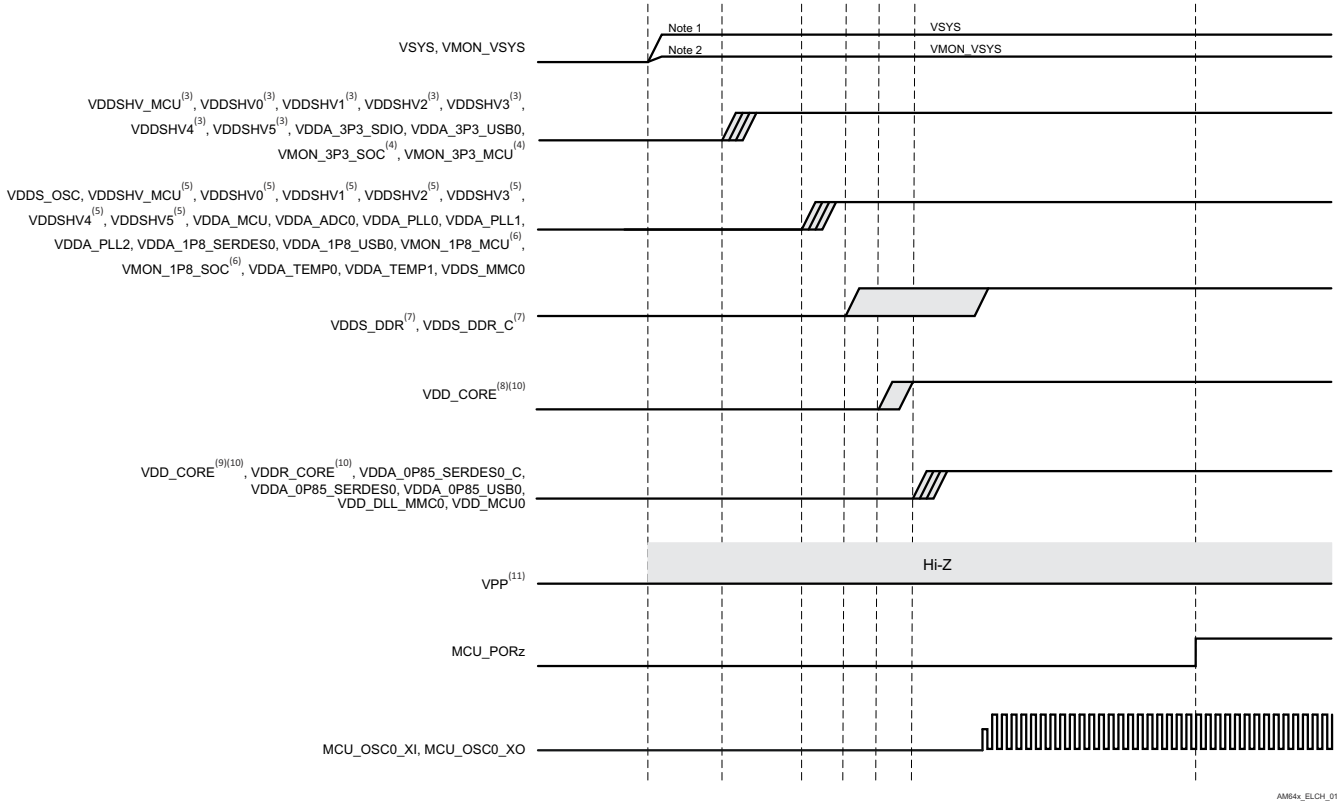


Figure 7-3. Power-Up Sequencing

1. VSYS represents the name of a supply which sources power to the entire system. This supply is expected to be a pre-regulated supply that sources power management devices which source all other supplies.
2. VMON_VSYS input is used to monitor VSYS via an external resistor divider circuit. For more information, see [Section 9.3.4, System Power Supply Monitor Design Guidelines](#).
3. VDDSHV_MCU and VDDSHVx [x=0-5] are dual voltage IO supplies which can be operated at 1.8V or 3.3V depending on the application requirements. When any of the VDDSHV_MCU or VDDSHVx [x=0-5] IO supplies are operating at 3.3V, they shall be ramped up with other 3.3V supplies during the 3.3V ramp period defined by this waveform.
4. The VMON_3P3_MCU and VMON_3P3_SOC inputs are used to monitor supply voltage and shall be connected to the respective 3.3V supply source.
5. VDDSDV_MCU and VDDSDVx [x=0-5] are dual voltage IO supplies which can be operated at 1.8V or 3.3V depending on the application requirements. When any of the VDDSDV_MCU or VDDSDVx [x=0-5] IO supplies are operating at 1.8V, they shall be ramped up with other 1.8V supplies during the 1.8V ramp period defined by this waveform.
6. The VMON_1P8_MCU and VMON_1P8_SOC inputs are used to monitor supply voltage and shall be connected to the respective 1.8V supply source.
7. VDDSDV_DDR and VDDSDV_DDR_C are expected to be powered by the same source such that they ramp together.
8. VDD_CORE can be operated at 0.75V or 0.85V. When VDD_CORE is operating at 0.75V, it shall be ramped up prior to all 0.85V supplies as shown in this waveform.
9. VDD_CORE can be operated at 0.75V or 0.85V. When VDD_CORE is operating at 0.85V, it shall be ramped up with other 0.85V supplies during the 0.85V ramp period defined by this waveform.

10. The potential applied to VDDR_CORE must never be greater than the potential applied to VDD_CORE + 0.18V during power-up or power-down. This requires VDD_CORE to ramp up before and ramp down after VDDR_CORE when VDD_CORE is operating at 0.75V. VDD_CORE does not have any ramp requirements beyond the one defined for VDDR_CORE. VDD_CORE and VDDR_CORE are expected to be powered by the same source so they ramp together when VDD_CORE is operating at 0.85V.
11. VPP is the 1.8V eFuse programming supply, which shall be left floating (HiZ) or grounded during power-up/down sequences and during normal device operation. This supply shall only be sourced while programming eFuse.

7.10.2.3 Power-Down Sequencing

Figure 7-4 describes the device power-down sequencing.

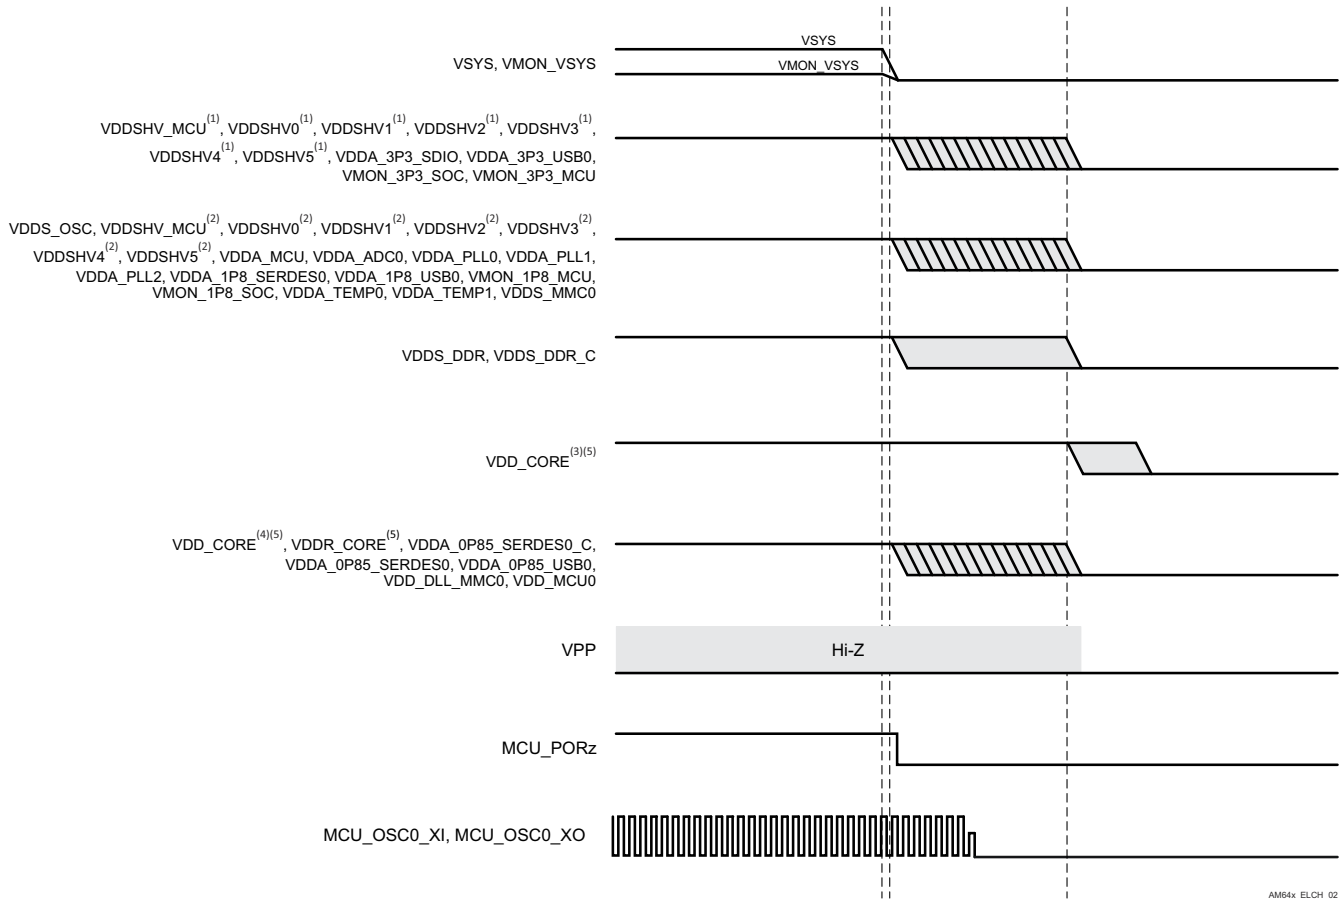


Figure 7-4. Power-Down Sequencing

1. VDDSHV_MCU and VDDSHVx [x=0-5] when operating at 3.3V.
2. VDDSHV_MCU and VDDSHVx [x=0-5] when operating at 1.8V.
3. VDD_CORE when operating at 0.75V.
4. VDD_CORE when operating at 0.85V.
5. The potential applied to VDDR_CORE must never be greater than the potential applied to VDD_CORE + 0.18V during power-up or power-down. This requires VDD_CORE to ramp up before and ramp down after VDDR_CORE when VDD_CORE is operating at 0.75V. VDD_CORE does not have any ramp requirements beyond the one defined for VDDR_CORE. VDD_CORE and VDDR_CORE are expected to be powered by the same source so they ramp together when VDD_CORE is operating at 0.85V.

7.10.3 System Timing

For more details about features and additional description information on the subsystem multiplexing signals, see the corresponding subsections within *Signal Descriptions* and *Detailed Description* sections.

Table 7-4. System Timing Conditions

| PARAMETER | | MIN | MAX | UNIT |
|--------------------------|-------------------------|-----|-----|------|
| INPUT CONDITIONS | | | | |
| SR _I | Input slew rate | 0.5 | | V/ns |
| OUTPUT CONDITIONS | | | | |
| C _L | Output load capacitance | 3 | 30 | pF |

7.10.3.1 Reset Timing

Tables and figures provided in this section define timing requirements and switching characteristics for reset related signals.

Table 7-5. MCU_PORz Timing Requirements

see [Figure 7-5](#)

| NO. | PARAMETER | DESCRIPTION | MIN | MAX | UNIT |
|------|--|--|---------|-----|------|
| RST1 | | Hold time, MCU_PORz active (low) at Power-up after supplies valid (using external crystal) | 9500000 | | ns |
| RST2 | t _h (SUPPLIES_VALID - MCU_PORz) | Hold time, MCU_PORz active (low) at Power-up after supplies valid and external clock stable (using external LVCMOS oscillator) | 1200 | | ns |
| RST3 | t _w (MCU_PORzL) | Pulse Width minimum, MCU_PORz low after Power-up (without removal of Power or system reference clock MCU_OSC0_XI/XO) | 1200 | | ns |

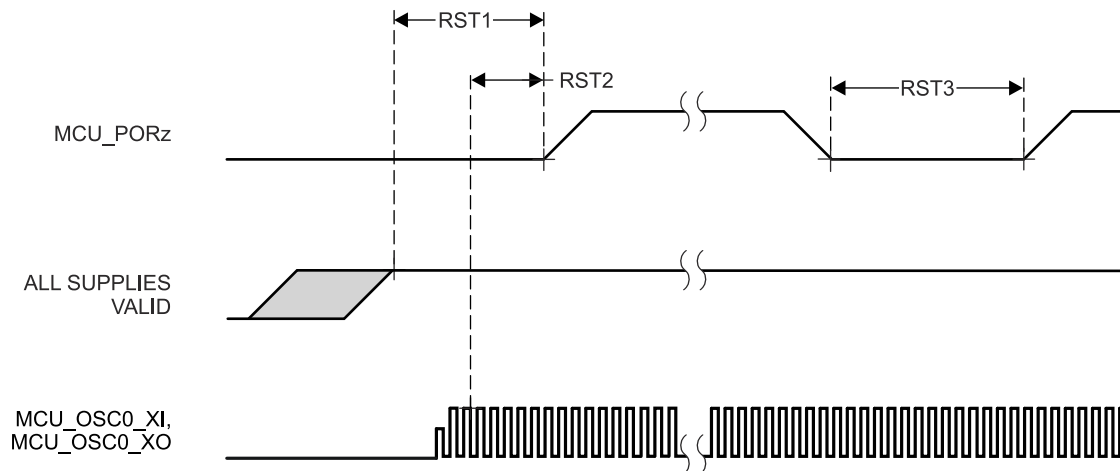


Figure 7-5. MCU_PORz Timing Requirements

Table 7-6. MCU_RESETSTATz, and RESETSTATz Switching Characteristics

see [Figure 7-6](#)

| NO. | PARAMETER | DESCRIPTION | MIN | MAX | UNIT |
|------|--|--|-----------------------|-----|------|
| RST4 | t _d (MCU_PORzL-MCU_RESETSTATzL) | Delay time, MCU_PORz active (low) to MCU_RESETSTATz active (low) | 0 | | ns |
| RST5 | t _d (MCU_PORzH-MCU_RESETSTATzH) | Delay time, MCU_PORz inactive (high) to MCU_RESETSTATz inactive (high) | 6120*S ⁽¹⁾ | | ns |
| RST6 | t _d (MCU_PORzL-RESETSTATzL) | Delay time, MCU_PORz active (low) to RESETSTATz active (low) | 0 | | ns |

Table 7-6. MCU_RESETSTATz, and RESETSTATz Switching Characteristics (continued)

see Figure 7-6

| NO. | PARAMETER | MIN | MAX | UNIT |
|------|---|----------------------|-----|------|
| RST7 | $t_{d(MCU_PORzH-RESETSTATzH)}$ Delay time, MCU_PORz inactive (high) to RESETSTATz inactive (high) | $9195 \cdot S^{(1)}$ | | ns |
| RST8 | $t_{w(MCU_RESETSTATzL)}$ Pulse Width Minimum MCU_RESETSTATz low (SW_MCU_WARMRST) | $4040 \cdot S^{(1)}$ | | ns |
| RST9 | $t_{w(RESETSTATzL)}$ Pulse Width Minimum RESETSTATz low (SW_MCU_WARMRST, SW_MAIN_PORz, or SW_MAIN_WARMRST) | 301200 | | ns |

(1) S = MCU_OSC0_XI/XO clock period

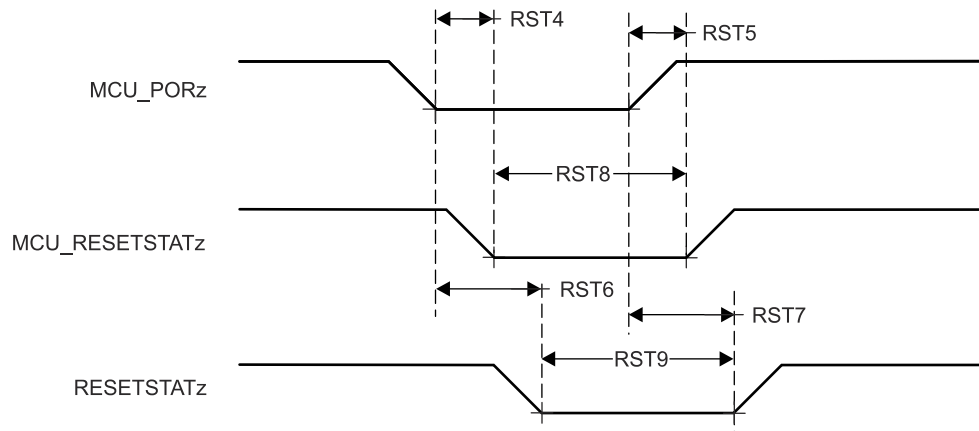


Figure 7-6. MCU_RESETSTATz, and RESETSTATz Switching Characteristics

Table 7-7. MCU_RESETz Timing Requirements

see Figure 7-7

| NO. | PARAMETER | MIN | MAX | UNIT |
|-------|---|------|-----|------|
| RST10 | $t_{w(MCU_RESETzL)}^{(1)}$ Pulse Width minimum, MCU_RESETz active (low) | 1200 | | ns |

(1) This timing parameter is valid only after all supplies are valid and MCU_PORz has been asserted for the specified time.

Table 7-8. MCU_RESETSTATz, and RESETSTATz Switching Characteristics

see Figure 7-7

| NO. | PARAMETER | MIN | MAX | UNIT |
|-------|--|----------------------|-----|------|
| RST11 | $t_{d(MCU_RESETzL-MCU_RESETSTATzL)}$ Delay time, MCU_RESETz active (low) to MCU_RESETSTATz active (low) | 0 | | ns |
| RST12 | $t_{d(MCU_RESETzH-MCU_RESETSTATzH)}$ Delay time, MCU_RESETz inactive (high) to MCU_RESETSTATz inactive (high) | $966 \cdot S^{(1)}$ | | ns |
| RST13 | $t_{d(MCU_RESETzL-RESETSTATzL)}$ Delay time, MCU_RESETz active (low) to RESETSTATz active (low) | 0 | | ns |
| RST14 | $t_{d(MCU_RESETzH-RESETSTATzH)}$ Delay time, MCU_RESETz inactive (high) to RESETSTATz inactive (high) | $4040 \cdot S^{(1)}$ | | ns |

(1) S = MCU_OSC0_XI/XO clock period

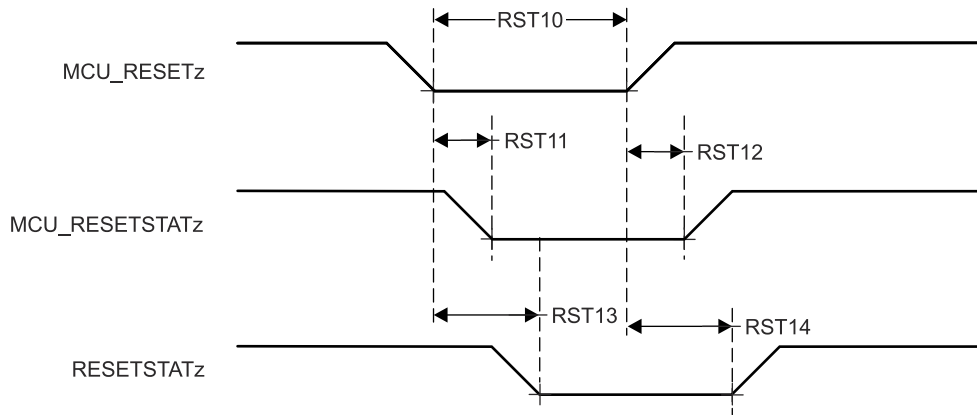


Figure 7-7. MCU_RESEZt, MCU_RESEZSTATz, and RESEZSTATz Timing Requirements and Switching Characteristics

Table 7-9. RESEZ_REQz Timing Requirements

see Figure 7-8

| NO. | PARAMETER | DESCRIPTION | MIN | MAX | UNIT |
|-------|------------------------------------|--|------|-----|------|
| RST15 | $t_{w(RES_REQzL)}$ ⁽¹⁾ | Pulse Width minimum, RESEZ_REQz active (low) | 1200 | | ns |

(1) This timing parameter is valid only after all supplies are valid and MCU_PORz has been asserted for the specified time.

Table 7-10. RESEZSTATz Switching Characteristics

see Figure 7-8

| NO. | PARAMETER | DESCRIPTION | MIN | MAX | UNIT |
|-------|---------------------------------|--|------------------|-----|------|
| RST16 | $t_{d(RES_REQzL-RES_STATzL)}$ | Delay time, RESEZ_REQz active (low) to RESEZSTATz active (low) | T ⁽¹⁾ | | ns |
| RST17 | $t_{d(RES_REQzH-RES_STATzH)}$ | Delay time, RESEZ_REQz inactive (high) to RESEZSTATz inactive (high) | W ⁽²⁾ | | ns |

(1) T = Reset Isolation Time (Software Dependent)

(2) W = Max [300 μ s (Typical) from RESEZt_REQz inactive (high), Reset Isolation Time + 300 μ s (TYP) from RESEZt_REQz active (low)]

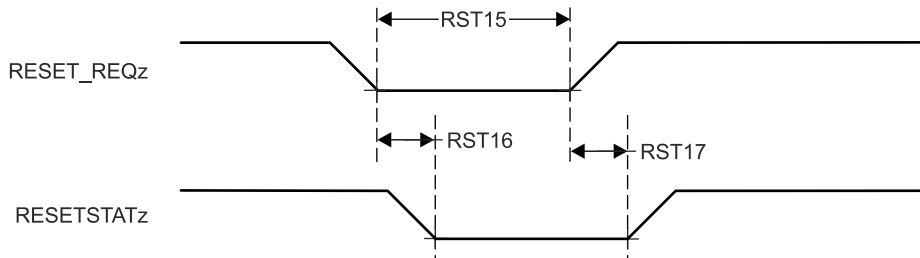


Figure 7-8. RESEZ_REQz and RESEZSTATz Timing Requirements and Switching Characteristics

Table 7-11. EMUx Timing Requirements

see Figure 7-9

| NO. | PARAMETER | DESCRIPTION | MIN | MAX | UNIT |
|-------|---------------------------|--|--------------------|-----|------|
| RST18 | $t_{su(EMUx-MCU_PORz)}$ | Setup time, EMU[1:0] before MCU_PORz inactive (high) | 3*S ⁽¹⁾ | | ns |
| RST19 | $t_{h(MCU_PORz - EMUx)}$ | Hold time, EMU[1:0] after MCU_PORz inactive (high) | 10 | | ns |

(1) S = MCU_OSC0_XI/XO clock period

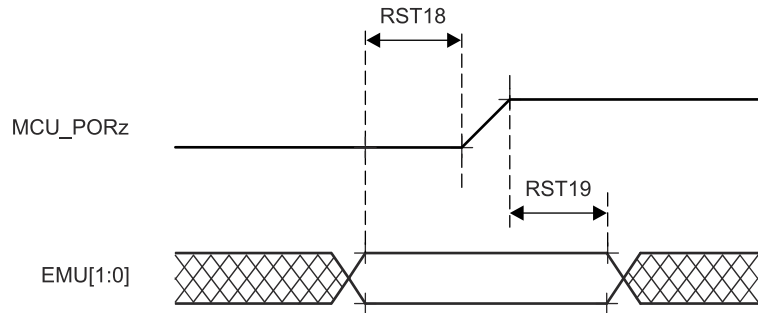


Figure 7-9. EMUx Timing Requirements

Table 7-12. BOOTMODE Timing Requirements

see [Figure 7-10](#)

| NO. | PARAMETER | DESCRIPTION | MIN | MAX | UNIT |
|-------|------------------------------|---|-------------------|-----|------|
| RST23 | $t_{su}(BOOTMODE-PORz_OUT)$ | Setup time, BOOTMODE[15:00] before PORz_OUT high (External MCU PORz event or Software SW_MAIN_PORz) | $3 \cdot S^{(1)}$ | | ns |
| RST24 | $t_h(PORz_OUT - BOOTMODE)$ | Hold time, BOOTMODE[15:00] after PORz_OUT high (External MCU PORz event, Software SW_MAIN_PORz) | 0 | | ns |

(1) $S = MCU_OSC0_XI/XO$ clock period

Table 7-13. PORz_OUT Switching Characteristics

see [Figure 7-10](#)

| NO. | PARAMETER | DESCRIPTION | MIN | MAX | UNIT |
|-------|-----------------------------|--|------|-----|------|
| RST25 | $t_d(MCU_PORzL-PORz_OUT)$ | Delay time, MCU_PORz active (low) to PORz_OUT active (low) | 0 | | ns |
| RST26 | $t_d(MCU_PORzH-PORz_OUT)$ | Delay time, MCU_PORz inactive (high) to PORz_OUT inactive (high) | 0 | | ns |
| RST27 | $t_w(PORz_OUTL)$ | Pulse Width Minimum PORz_OUT low (MCU_PORz, SW_MAIN_PORz) | 1200 | | ns |

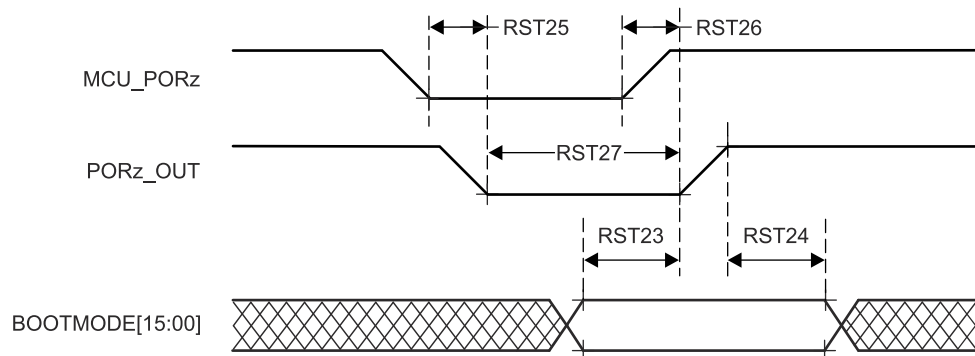


Figure 7-10. BOOTMODE Timing Requirements and PORz_OUT Switching Characteristics

7.10.3.2 Safety Signal Timing

Tables and figures provided in this section define switching characteristics for MCU_SAFETY_ERRORn.

Table 7-14. MCU_SAFETY_ERRORn Switching Characteristics

see [Figure 7-11](#)

| NO. | PARAMETER | DESCRIPTION | MIN | MAX | UNIT |
|-------|----------------------------|--|---|-----|------|
| SFTY1 | $t_c(MCU_SAFETY_ERRORn)$ | Cycle time minimum, MCU_SAFETY_ERRORn (PWM mode enabled) | $(P \cdot H) + (P \cdot L)^{(1) (3) (4)}$ | | ns |

Table 7-14. MCU_SAFETY_ERRORn Switching Characteristics (continued)

see Figure 7-11

| NO. | PARAMETER | MIN | MAX | UNIT |
|-------|---|----------------------|-----|------|
| SFTY2 | $t_{w(MCU_SAFETY_ERRORn)}$ Pulse width minimum, MCU_SAFETY_ERRORn active (PWM mode disabled) ⁽⁵⁾ | $P \cdot R^{(1)(2)}$ | | ns |
| SFTY3 | $t_d (ERROR_CONDITION-MCU_SAFETY_ERRORnL)$ Delay time, ERROR CONDITION to MCU_SAFETY_ERRORn active ⁽⁵⁾ | $50 \cdot P^{(1)}$ | | ns |

- (1) P = ESM functional clock
- (2) R = Error Pin Counter Pre-Load Register count value
- (3) H = Error Pin PWM High Pre-Load Register count value
- (4) L = Error Pin PWM Low Pre-Load Register count value
- (5) When PWM mode is enabled, MCU_SAFETY_ERRORn stops toggling after RST22 and will maintain its value (either high or low) until the error is cleared. When PWM mode is disabled, MCU_SAFETY_ERRORn is active low.

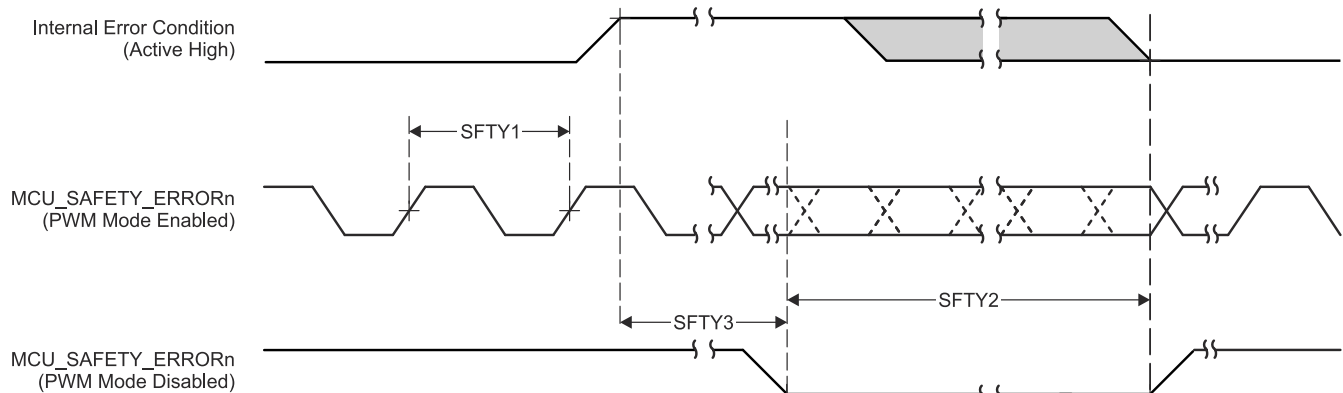


Figure 7-11. MCU_SAFETY_ERRORn Timing Requirements and Switching Characteristics

7.10.3.3 Clock Timing

Tables and figures provided in this section define timing requirements and switching characteristics for clock signals.

Table 7-15. Clock Timing Requirements

see Figure 7-12

| NO. | PARAMETER | MIN | MAX | UNIT |
|-------|---|----------------------|----------------------|------|
| CLK1 | $t_{c(EXT_REFCLK1)}$ Cycle time minimum, EXT_REFCLK1 | 10 | | ns |
| CLK2 | $t_{w(EXT_REFCLK1H)}$ Pulse Duration minimum, EXT_REFCLK1 high | $E \cdot 0.45^{(1)}$ | $E \cdot 0.55^{(1)}$ | ns |
| CLK3 | $t_{w(EXT_REFCLK1L)}$ Pulse Duration minimum, EXT_REFCLK1 low | $E \cdot 0.45^{(1)}$ | $E \cdot 0.55^{(1)}$ | ns |
| CLK19 | $t_{c(MCU_EXT_REFCLK0)}$ Cycle time minimum, MCU_EXT_REFCLK0 | 10 | | ns |
| CLK20 | $t_{w(MCU_EXT_REFCLK0H)}$ Pulse Duration minimum, MCU_EXT_REFCLK0 high | $F \cdot 0.45^{(2)}$ | $F \cdot 0.55^{(2)}$ | ns |
| CLK21 | $t_{w(MCU_EXT_REFCLK0L)}$ Pulse Duration minimum, MCU_EXT_REFCLK0 low | $F \cdot 0.45^{(2)}$ | $F \cdot 0.55^{(2)}$ | ns |

- (1) E = EXT_REFCLK1 cycle time
- (2) F = MCU_EXT_REFCLK0 cycle time

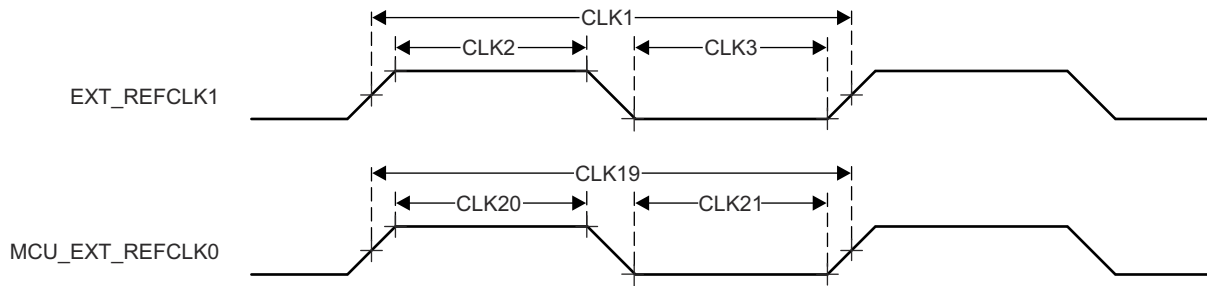


Figure 7-12. Clock Timing Requirements

Table 7-16. Clock Switching Characteristics

see [Figure 7-13](#)

| NO. | PARAMETER | MIN | MAX | UNIT |
|-------|---|----------------|----------------|------|
| CLK4 | $t_{c(SYSCLKOUT0)}$ Cycle time minimum, SYSCLKOUT0 | 8 | | ns |
| CLK5 | $t_{w(SYSCLKOUT0H)}$ Pulse Duration minimum, SYSCLKOUT0 high | $A*0.4^{(1)}$ | $A*0.6^{(1)}$ | ns |
| CLK6 | $t_{w(SYSCLKOUT0L)}$ Pulse Duration minimum, SYSCLKOUT0 low | $A*0.4^{(1)}$ | $A*0.6^{(1)}$ | ns |
| CLK7 | $t_{c(OBSCLK0)}$ Cycle time minimum, OBSCLK0 | 5 | | ns |
| CLK8 | $t_{w(OBSCLK0H)}$ Pulse Duration minimum, OBSCLK0 high | $B*0.45^{(2)}$ | $B*0.55^{(2)}$ | ns |
| CLK9 | $t_{w(OBSCLK0L)}$ Pulse Duration minimum, OBSCLK0 low | $B*0.45^{(2)}$ | $B*0.55^{(2)}$ | ns |
| CLK10 | $t_{c(CLKOUT0)}$ Cycle time minimum, CLKOUT0 | 20 | | ns |
| CLK11 | $t_{w(CLKOUT0H)}$ Pulse Duration minimum, CLKOUT0 high | $C*0.4^{(3)}$ | $C*0.6^{(3)}$ | ns |
| CLK12 | $t_{w(CLKOUT0L)}$ Pulse Duration minimum, CLKOUT0 low | $C*0.4^{(3)}$ | $C*0.6^{(3)}$ | ns |
| CLK13 | $t_{c(MCU_SYSCLKOUT0)}$ Cycle time minimum, MCU_SYSCLKOUT0 | 10 | | ns |
| CLK14 | $t_{w(MCU_SYSCLKOUT0H)}$ Pulse Duration minimum, MCU_SYSCLKOUT0 high | $G*0.4^{(4)}$ | $G*0.6^{(4)}$ | ns |
| CLK15 | $t_{w(MCU_SYSCLKOUT0L)}$ Pulse Duration minimum, MCU_SYSCLKOUT0 low | $G*0.4^{(4)}$ | $G*0.6^{(4)}$ | ns |
| CLK16 | $t_{c(MCU_OBSCLK0)}$ Cycle time minimum, MCU_OBSCLK0 | 5 | | ns |
| CLK17 | $t_{w(MCU_OBSCLK0H)}$ Pulse Duration minimum, MCU_OBSCLK0 high | $H*0.45^{(5)}$ | $H*0.55^{(5)}$ | ns |
| CLK18 | $t_{w(MCU_OBSCLK0L)}$ Pulse Duration minimum, MCU_OBSCLK0 low | $H*0.45^{(5)}$ | $H*0.55^{(5)}$ | ns |

- (1) A = SYSCLKOUT0 cycle time
- (2) B = OBSCLK0 cycle time
- (3) C = CLKOUT0 cycle time
- (4) G = MCU_SYSCLKOUT0 cycle time
- (5) H = MCU_OBSCLK0 cycle time

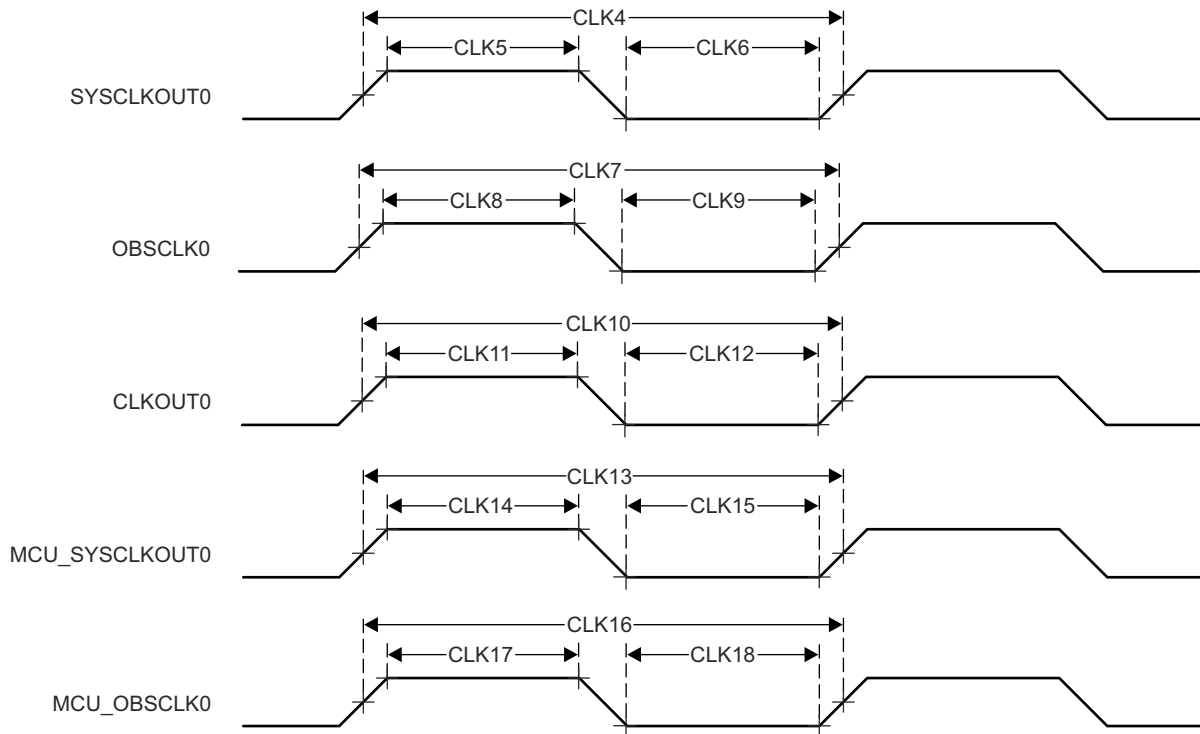


Figure 7-13. Clock Switching Characteristics

7.10.4 Clock Specifications

7.10.4.1 Input Clocks / Oscillators

Various external clock inputs/outputs are needed to drive the device. Summary of these input clock signals is as follows:

- MCU_OSC0_XI/MCU_OSC0_XO — External main crystal interface pins connected to the internal high-frequency oscillator (MCU_HFOSC0), which is the default clock source for internal reference clock MCU_HFOSC0_CLKOUT.
- General purpose clock inputs
 - MCU_EXT_REFCLK0 — Optional external system clock input for MCU domain.
 - EXT_REFCLK1 — Optional external system clock input for MAIN domain.
 - SERDES0_REFCLK0P/N — Optional SERDES0 reference clock input for PCIe.
- External CPTS reference clock inputs
 - CP_GEMAC_CPTS0_RFT_CLK — CPTS reference clock input.
 - CPTS_RFT_CLK — CPTS reference clock input.

Figure 7-14 shows the external input clock sources and the output clocks to peripherals.

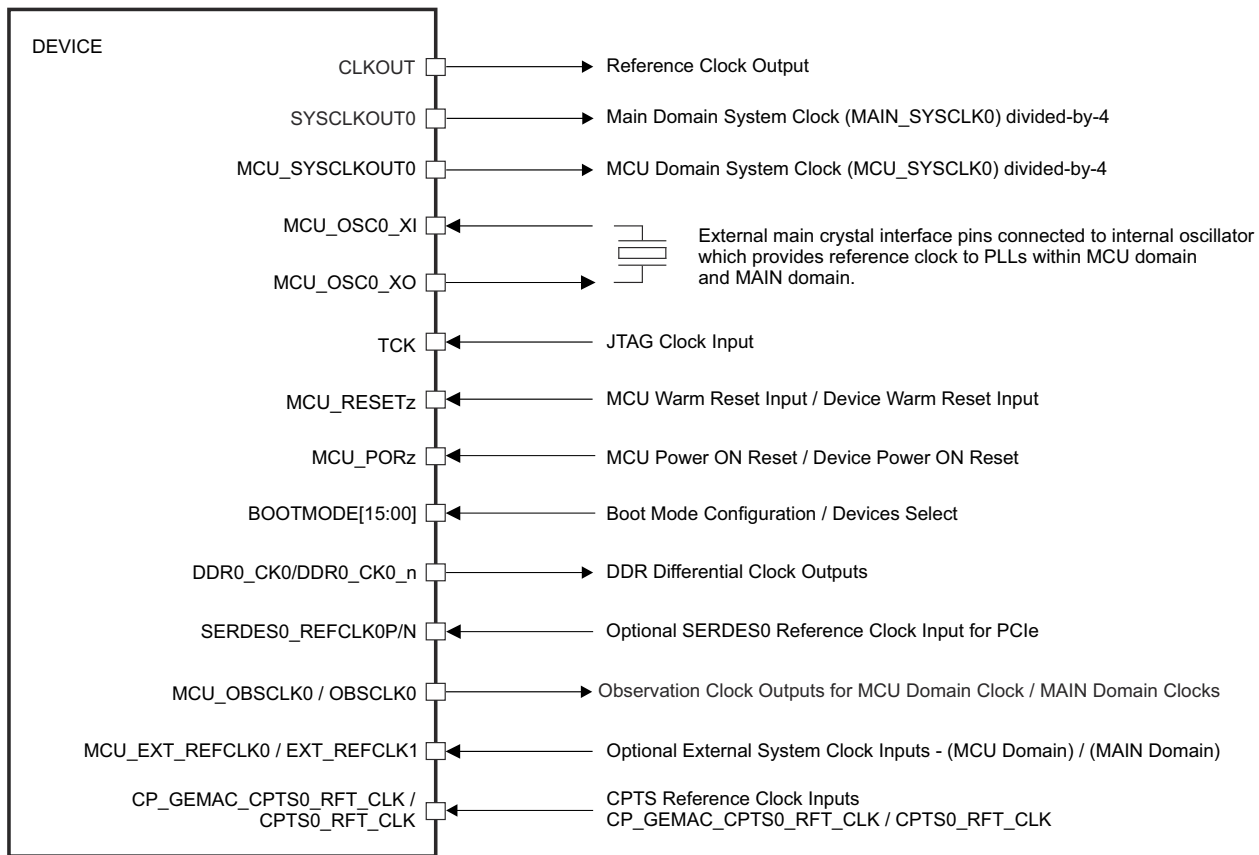


Figure 7-14. Input Clocks Interface

For more information about Input clock interfaces, see *Clocking* section in *Device Configuration* chapter in the device TRM.

7.10.4.1.1 MCU_OSC0 Internal Oscillator Clock Source

Figure 7-15 shows the recommended crystal circuit. All discrete components used to implement the oscillator circuit should be placed as close as possible to the MCU_OSC0_XI and MCU_OSC0_XO pins.

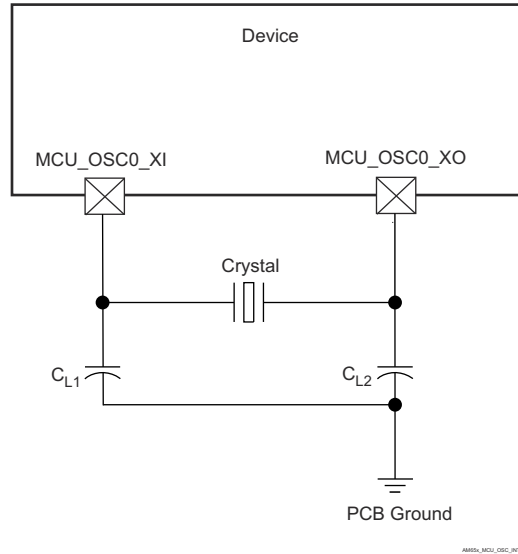


Figure 7-15. MCU_OSC0 Crystal Implementation

The crystal must be in the fundamental mode of operation and parallel resonant. Table 7-17 summarizes the required electrical constraints.

Table 7-17. MCU_OSC0 Crystal Circuit Requirements

| PARAMETER | | MIN | TYP | MAX | UNIT |
|----------------|---|---|--------|------|----------|
| F_{xtal} | Crystal Parallel Resonance Frequency | | 25 | | MHz |
| F_{xtal} | Crystal Frequency Stability and Tolerance | Ethernet RGMII and RMII not used | | ±100 | ppm |
| | | Ethernet RGMII and RMII using derived clock | | ±50 | |
| $C_{L1+PCBXI}$ | Capacitance of $C_{L1} + C_{PCBXI}$ | 12 | | 24 | pF |
| $C_{L2+PCBXO}$ | Capacitance of $C_{L2} + C_{PCBXO}$ | 12 | | 24 | pF |
| C_L | Crystal Load Capacitance | 6 | | 12 | pF |
| C_{shunt} | Crystal Circuit Shunt Capacitance | $ESR_{xtal} = 30 \Omega$ | 25 MHz | | 7 pF |
| | | $ESR_{xtal} = 40 \Omega$ | 25 MHz | | 5 pF |
| | | $ESR_{xtal} = 50 \Omega$ | 25 MHz | | 5 pF |
| ESR_{xtal} | Crystal Effective Series Resistance | | | (1) | Ω |

(1) The maximum ESR of the crystal is a function of the crystal frequency and shunt capacitance. See the C_{shunt} parameter.

When selecting a crystal, the system design must consider temperature and aging characteristics of the crystal based on worst case environment and expected life expectancy of the system.

Table 7-18 details the switching characteristics of the oscillator.

Table 7-18. MCU_OSC0 Switching Characteristics - Crystal Mode

| PARAMETER | | MIN | TYP | MAX | UNIT |
|------------|-----------------------------|-----|-----|------|------|
| C_{XI} | XI Capacitance | | | 1.44 | pF |
| C_{XO} | XO Capacitance | | | 1.52 | pF |
| C_{XIXO} | XI to XO Mutual Capacitance | | | 0.01 | pF |
| t_s | Start-up Time | | 4 | | ms |

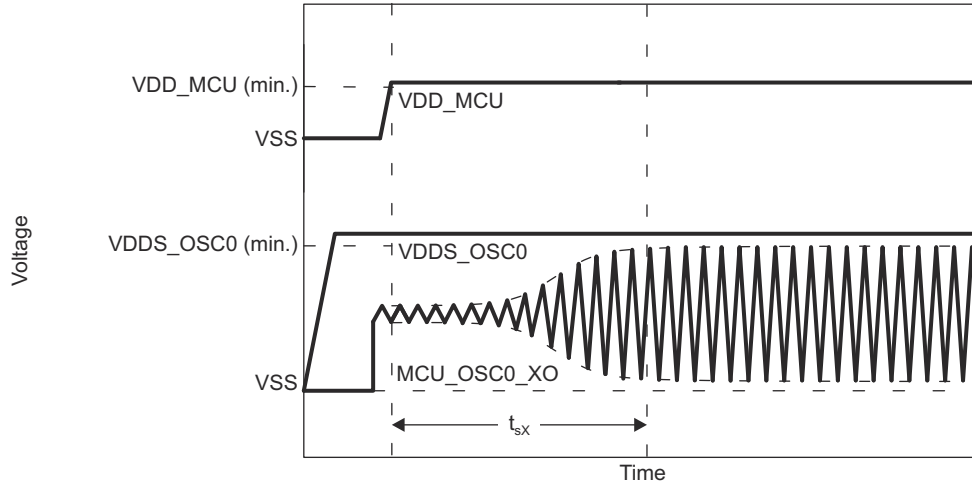


Figure 7-16. MCU_OSC0 Start-up Time

7.10.4.1.1.1 Load Capacitance

The crystal circuit must be designed such that it applies the appropriate capacitive load to the crystal, as defined by the crystal manufacturer. The capacitive load, C_L , of this circuit is a combination of discrete capacitors C_{L1} , C_{L2} , and several parasitic contributions. PCB signal traces which connect crystal circuit components to MCU_OSC0_XI and MCU_OSC0_XO have parasitic capacitance to ground, C_{PCBXI} and C_{PCBXO} , where the PCB designer should be able to extract parasitic capacitance for each signal trace. The MCU_OSC0 circuits and device package have combined parasitic capacitance to ground, C_{PCBXI} and C_{PCBXO} , where these parasitic capacitance values are defined in Table 7-18.

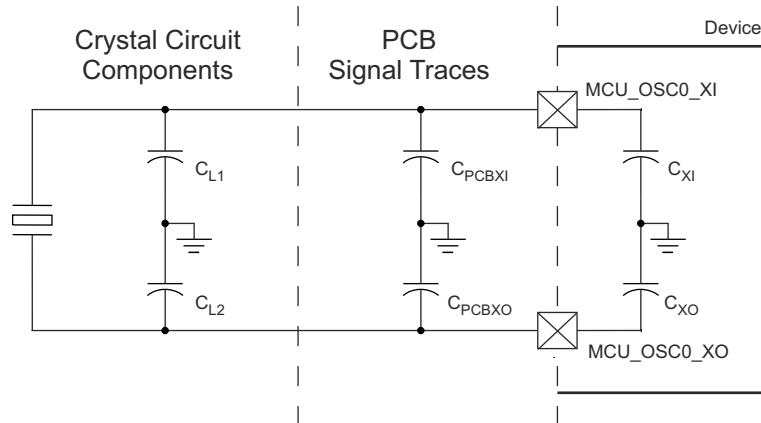


Figure 7-17. Load Capacitance

Load capacitors, C_{L1} and C_{L2} in Figure 7-15, should be chosen such that the below equation is satisfied. C_L in the equation is the load specified by the crystal manufacturer.

$$C_L = [(C_{L1} + C_{PCBXI} + C_{XI}) \times (C_{L2} + C_{PCBXO} + C_{XO})] / [(C_{L1} + C_{PCBXI} + C_{XI}) + (C_{L2} + C_{PCBXO} + C_{XO})]$$

To determine the value of C_{L1} and C_{L2} , multiply the capacitive load value C_L by 2. Using this result, subtract the combined values of $C_{PCBXI} + C_{XI}$ to determine the value of C_{L1} and the combined values of $C_{PCBXO} + C_{XO}$ to determine the value of C_{L2} . For example, if $C_L = 10$ pF, $C_{PCBXI} = 2.9$ pF, $C_{XI} = 0.5$ pF, $C_{PCBXO} = 3.7$ pF, $C_{XO} = 0.5$ pF, the value of $C_{L1} = [(2C_L) - (C_{PCBXI} + C_{XI})] = [(2 \times 10 \text{ pF}) - 2.9 \text{ pF} - 0.5 \text{ pF}] = 16.6$ pF and $C_{L2} = [(2C_L) - (C_{PCBXO} + C_{XO})] = [(2 \times 10 \text{ pF}) - 3.7 \text{ pF} - 0.5 \text{ pF}] = 15.8$ pF

7.10.4.1.1.2 Shunt Capacitance

The crystal circuit must also be designed such that it does not exceed the maximum shunt capacitance for MCU_OSC0 operating conditions defined in Table 7-17. Shunt capacitance, C_{shunt} , of the crystal circuit is a combination of crystal shunt capacitance and parasitic contributions. PCB signal traces which connect crystal circuit components to MCU_OSC0 have mutual parasitic capacitance to each other, $C_{PCBXIXO}$, where the PCB designer should be able to extract mutual parasitic capacitance between these signal traces. The device package also has mutual parasitic capacitance, C_{XIXO} , where this mutual parasitic capacitance value is defined in Table 7-18.

PCB routing should be designed to minimize mutual capacitance between XI and XO signal traces. This is typically done by keeping signal traces short and not routing them in close proximity. Mutual capacitance can also be minimized by placing a ground trace between these signals when the layout requires them to be routed in close proximity. It is important to minimize the mutual capacitance on the PCB to provide as much margin as possible when selecting a crystal.

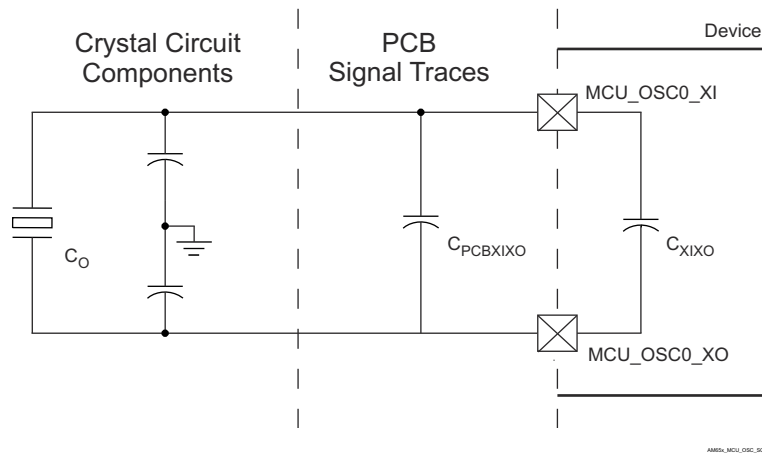


Figure 7-18. Shunt Capacitance

A crystal should be chosen such that the below equation is satisfied. C_O in the equation is the maximum shunt capacitance specified by the crystal manufacturer.

$$C_{shunt} \geq C_O + C_{PCBXIXO} + C_{XIXO}$$

For example, the equation would be satisfied when the crystal being used is 25 MHz with an ESR = 30 Ω , $C_{PCBXIXO} = 0.04$ pF, $C_{XIXO} = 0.01$ pF, and shunt capacitance of the crystal is less than or equal to 6.95 pF.

7.10.4.1.2 MCU_OSC0 LVCMOS Digital Clock Source

Figure 7-19 shows the recommended oscillator connections when MCU_OSC0_XI is connected to a 1.8-V LVCMOS square-wave digital clock source.

Note

A DC steady-state condition is not allowed on MCU_OSC0_XI when the oscillator is powered up. This is not allowed because MCU_OSC0_XI is internally AC coupled to a comparator that may enter a unknown state when DC is applied to the input. Therefore, application software should power down MCU_OSC0 any time MCU_OSC0_XI is not toggling between logic states.

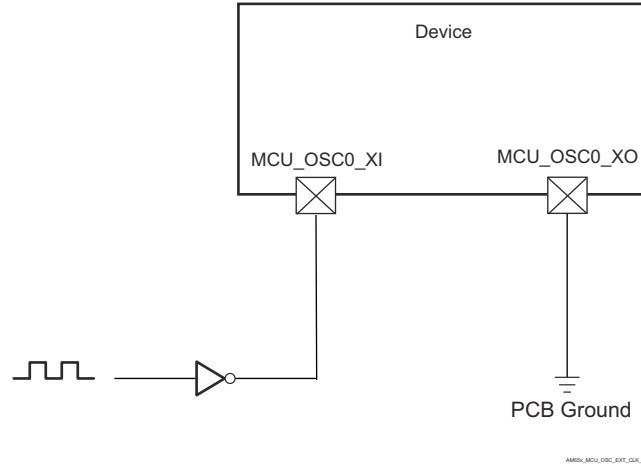


Figure 7-19. 1.8-V LVC MOS-Compatible Clock Input

7.10.4.2 Output Clocks

The device provides several system clock outputs. Summary of these output clocks are as follows:

- **MCU_SYCLKOUT0**
 - MCU_SYCLKOUT0 is the MCU Domain system clock (MCU_SYCLK0) divided-by-4. This clock output is provided for test and debug purposes only.
- **MCU_OBSCLK0**
 - Observation clock output for test and debug purposes only.
- **SYCLKOUT0**
 - SYCLKOUT0 is the Main domain system clock (MAIN_SYCLK0) divided-by-4. This clock output is provided for test and debug purposes only.
- **CLKOUT0**
 - CLKOUT0 is the Ethernet Subsystem clock (MAIN_PLL0_HSDIV4_CLKOUT) divided-by-5 or divided-by-10. This clock output was provided to source to the external PHY. When configured to operate as the RMII Clock source (50 MHz), it must also be routed back to the RMII_REF_CLK pin for proper device operation.
- **OBCLK0**
 - Observation clock output for test and debug purposes only.
- **GPMC_FCLK_MUX**
 - GPMC_FCLK_MUX is the GPMC0 functional clock (GPMC_FCLK). This clock is provided as an alternative GPMC interface clock when attached devices require a continuous running clock.

For more information, see *Clock Outputs* section in *Clocking* chapter and *GPMC Clock Configuration* section in *Peripherals* chapter in the device TRM.

7.10.4.3 PLLs

Power is supplied to the Phase-Locked Loop circuits (PLLs) by internal regulators that derive their power from off-chip power-sources.

There is one PLL in the MCU domain:

- MCU0_PLL

There are six PLLs in the MAIN domain:

- ARM0_PLL
- MAIN_PLL
- PER0_PLL
- PER1_PLL
- DDR PLL
- R5F PLL

Note

For more information, see:

- *Device Configuration / Clocking / PLLs* section in the device TRM.
 - *Programmable Real-Time Unit Subsystem and Industrial Communication Subsystem - Gigabit (PRU_ICSSG)* section in the device TRM.
-

Note

The input reference clock (MCU_OSC0_XI / MCU_OSC0_XO) is specified and the lock time is ensured by the PLL controller, as documented in the *Device Configuration* chapter in the device TRM.

7.10.5 Peripherals

7.10.5.1 CPSW3G

For more details about features and additional description information on the device Gigabit Ethernet MAC, see the corresponding subsections within *Signal Descriptions* and *Detailed Description* sections.

Note

CPSW3G MDIO0, CPSW3G RMII1, CPSW3G RMII2, and CPSW3G RGMII1 have one or more signals which can be multiplexed to more than one pin. Timing requirements and switching characteristics defined in this section are only valid for specific pin combinations known as IOSETs. Valid pin combinations or IOSETs for these interfaces are shown respectively in [Table 7-31](#), [Table 7-32](#), and [Table 7-33](#).

7.10.5.1.1 CPSW3G MDIO Timing

[Table 7-19](#), [Table 7-20](#), [Table 7-21](#), and [Figure 7-20](#) present timing conditions, requirements, and switching characteristics for CPSW3G MDIO.

Table 7-19. CPSW3G MDIO Timing Conditions

| PARAMETER | | MIN | MAX | UNIT |
|--------------------------|-------------------------|-----|-----|------|
| INPUT CONDITIONS | | | | |
| SR _i | Input slew rate | 0.9 | 3.6 | V/ns |
| OUTPUT CONDITIONS | | | | |
| C _L | Output load capacitance | 10 | 470 | pF |

Table 7-20. CPSW3G MDIO Timing Requirements

see [Figure 7-20](#)

| NO. | PARAMETER | | MIN | MAX | UNIT |
|-------|----------------------------|--|-----|-----|------|
| MDIO1 | t _{su} (MDIO_MDC) | Setup time, MDIO[x]_MDIO valid before MDIO[x]_MDC high | 90 | | ns |
| MDIO2 | t _h (MDC_MDIO) | Hold time, MDIO[x]_MDIO valid after MDIO[x]_MDC high | 0 | | ns |

Table 7-21. CPWS3G MDIO Switching Characteristics

see [Figure 7-20](#)

| NO. | PARAMETER | | MIN | MAX | UNIT |
|-------|---------------------------|---|------|-----|------|
| MDIO3 | t _c (MDC) | Cycle time, MDIO[x]_MDC | 400 | | ns |
| MDIO4 | t _w (MDCH) | Pulse Duration, MDIO[x]_MDC high | 160 | | ns |
| MDIO5 | t _w (MDCL) | Pulse Duration, MDIO[x]_MDC low | 160 | | ns |
| MDIO7 | t _d (MDC_MDIO) | Delay time, MDIO[x]_MDC low to MDIO[x]_MDIO valid | -150 | 150 | ns |

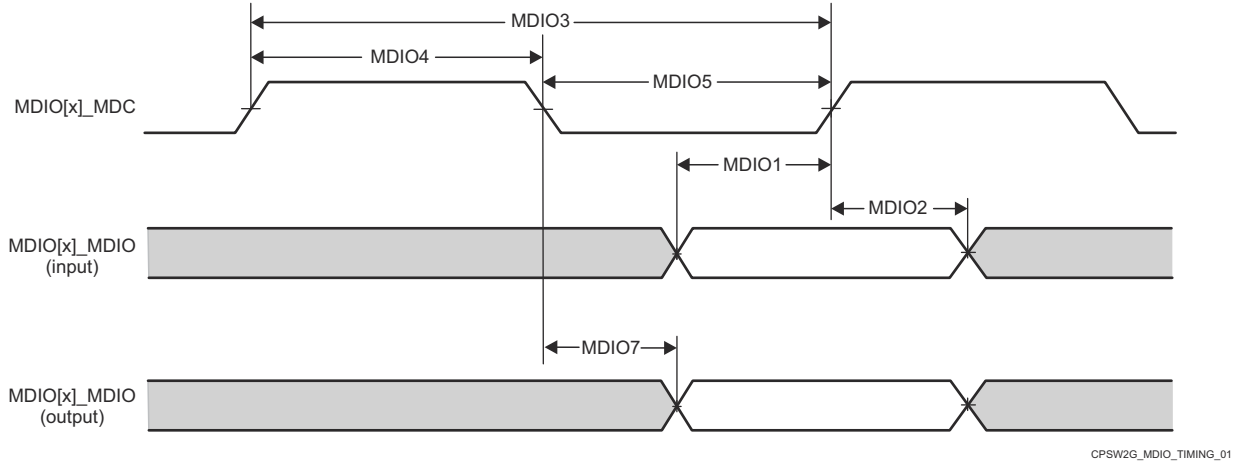


Figure 7-20. CPSW3G MDIO Timing Requirements and Switching Characteristics

7.10.5.1.2 CPSW3G RMII Timing

Table 7-22, Table 7-23, Figure 7-21, Table 7-24, Figure 7-22 Table 7-25, and Figure 7-23 present timing conditions, requirements, and switching characteristics for CPSW3G RMII.

Table 7-22. CPSW3G RMII Timing Conditions

| PARAMETER | | MIN | MAX | UNIT | |
|--------------------------|-------------------------|---------------------------|------|------|------|
| INPUT CONDITIONS | | | | | |
| SR _i | Input slew rate | VDD ⁽¹⁾ = 1.8V | 0.18 | 0.54 | V/ns |
| | | VDD ⁽¹⁾ = 3.3V | 0.4 | 1.2 | V/ns |
| OUTPUT CONDITIONS | | | | | |
| C _L | Output load capacitance | 3 | 25 | pF | |

(1) VDD stands for corresponding power supply. For more information on the power supply name and the corresponding ball(s), see POWER column of the Pin Attributes table.

Table 7-23. RMII[x]_REF_CLK Timing Requirements – RMII Mode

see Figure 7-21

| NO. | PARAMETER | DESCRIPTION | MIN | MAX | UNIT |
|-------|---------------------------|--------------------------------------|--------|--------|------|
| RMII1 | t _c (REF_CLK) | Cycle time, RMII[x]_REF_CLK | 19.999 | 20.001 | ns |
| RMII2 | t _w (REF_CLKH) | Pulse Duration, RMII[x]_REF_CLK High | 7 | 13 | ns |
| RMII3 | t _w (REF_CLKL) | Pulse Duration, RMII[x]_REF_CLK Low | 7 | 13 | ns |

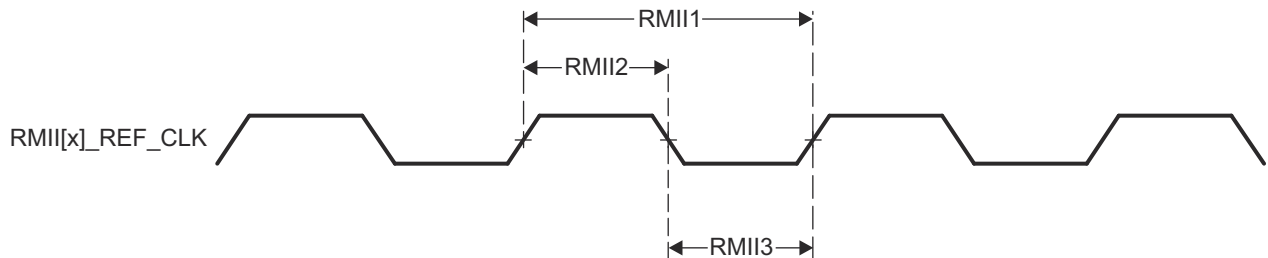


Figure 7-21. CPSW3G RMII[x]_REF_CLK Timing Requirements – RMII Mode

Table 7-24. RMII[x]_RXD[1:0], RMII[x]_CRS_DV, and RMII[x]_RX_ER Timing Requirements – RMII Mode

see [Figure 7-22](#)

| NO. | PARAMETER | DESCRIPTION | MIN | MAX | UNIT |
|-------|-----------------------------|---|-----|-----|------|
| RMII4 | $t_{su}(RXD_REF_CLK)$ | Setup time, RMII[x]_RXD[1:0] valid before RMII[x]_REF_CLK | 4 | | ns |
| | $t_{su}(CRS_DV_REF_CLK)$ | Setup time, RMII[x]_CRS_DV valid before RMII[x]_REF_CLK | 4 | | ns |
| | $t_{su}(RX_ER_REF_CLK)$ | Setup time, RMII[x]_RX_ER valid before RMII[x]_REF_CLK | 4 | | ns |
| RMII5 | $t_h(REF_CLK_RXD)$ | Hold time RMII[x]_RXD[1:0] valid after RMII[x]_REF_CLK | 2 | | ns |
| | $t_h(REF_CLK_CRS_DV)$ | Hold time, RMII[x]_CRS_DV valid after RMII[x]_REF_CLK | 2 | | ns |
| | $t_h(REF_CLK_RX_ER)$ | Hold time, RMII[x]_RX_ER valid after RMII[x]_REF_CLK | 2 | | ns |

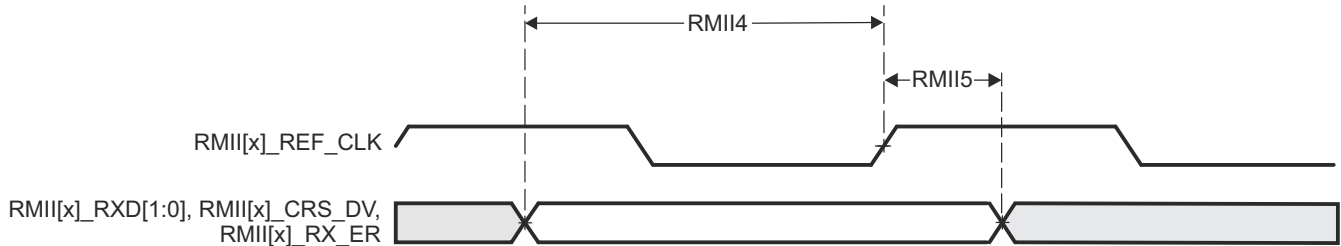


Figure 7-22. CPSW3G RMII[x]_RXD[1:0], RMII[x]_CRS_DV, RMII[x]_RX_ER Timing Requirements – RMII Mode

Table 7-25. RMII[x]_TXD[1:0], and RMII[x]_TX_EN Switching Characteristics – RMII Mode

see [Figure 7-23](#)

| NO. | PARAMETER | DESCRIPTION | MIN | MAX | UNIT |
|-------|-------------------------|--|-----|-----|------|
| RMII6 | $t_d(REF_CLK_TXD)$ | Delay time, RMII[x]_REF_CLK High to RMII[x]_TXD[1:0] valid | 2 | 10 | ns |
| | $t_d(REF_CLK_TX_EN)$ | Delay time, RMII[x]_REF_CLK to RMII[x]_TX_EN valid | 2 | 10 | ns |

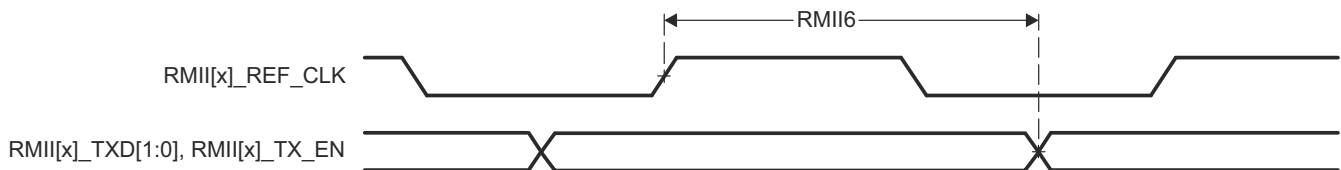


Figure 7-23. RMII[x]_TXD[1:0], and RMII[x]_TX_EN Switching Characteristics – RMII Mode

7.10.5.1.3 CPSW3G RGMII Timing

[Table 7-26](#), [Table 7-27](#), [Table 7-28](#), [Figure 7-24](#), [Table 7-29](#), [Table 7-30](#), and [Figure 7-25](#) present timing conditions, requirements, and switching characteristics for CPSW3G RGMII.

Table 7-26. CPSW3G RGMII Timing Conditions

| PARAMETER | | MIN | MAX | UNIT |
|--------------------------------------|-------------------------|------|-----|------|
| INPUT CONDITIONS | | | | |
| SR_i | Input slew rate | 2.64 | 5 | V/ns |
| OUTPUT CONDITIONS | | | | |
| C_L | Output load capacitance | 2 | 20 | pF |
| PCB CONNECTIVITY REQUIREMENTS | | | | |

Table 7-26. CPSW3G RGMII Timing Conditions (continued)

| PARAMETER | | MIN | MAX | UNIT |
|------------------------------|--|---|-----|------|
| t_d (Trace Mismatch Delay) | Propagation delay mismatch across all traces | RGMII[x]_RXC, RGMII[x]_RD[3:0], RGMII[x]_RX_CTL | 50 | ps |
| | | RGMII[x]_TXC, RGMII[x]_TD[3:0], RGMII[x]_TX_CTL | 50 | ps |

Table 7-27. RGMII[x]_RXC Timing Requirements – RGMII Mode


see [Figure 7-24](#)

| NO. | PARAMETER | DESCRIPTION | MODE | MIN | MAX | UNIT |
|--------|---------------|-----------------------------------|----------|-----|-----|------|
| RGMII1 | $t_{c(RXC)}$ | Cycle time, RGMII[x]_RXC | 10Mbps | 360 | 440 | ns |
| | | | 100Mbps | 36 | 44 | ns |
| | | | 1000Mbps | 7.2 | 8.8 | ns |
| RGMII2 | $t_{w(RXCH)}$ | Pulse duration, RGMII[x]_RXC high | 10Mbps | 160 | 240 | ns |
| | | | 100Mbps | 16 | 24 | ns |
| | | | 1000Mbps | 3.6 | 4.4 | ns |
| RGMII3 | $t_{w(RXCL)}$ | Pulse duration, RGMII[x]_RXC low | 10Mbps | 160 | 240 | ns |
| | | | 100Mbps | 16 | 24 | ns |
| | | | 1000Mbps | 3.6 | 4.4 | ns |

Table 7-28. RGMII[x]_RD[3:0], and RGMII[x]_RX_CTL Timing Requirements – RGMII Mode

see [Figure 7-24](#)

| NO. | PARAMETER | DESCRIPTION | MODE | MIN | MAX | UNIT |
|--------|----------------------|---|----------|-----|-----|------|
| RGMII4 | $t_{su(RD-RXC)}$ | Setup time, RGMII[x]_RD[3:0] valid before RGMII[x]_RXC high/low | 10Mbps | 1 | | ns |
| | | | 100Mbps | 1 | | ns |
| | | | 1000Mbps | 1 | | ns |
| | $t_{su(RX_CTL-RXC)}$ | Setup time, RGMII[x]_RX_CTL valid before RGMII[x]_RXC high/low | 10Mbps | 1 | | ns |
| | | | 100Mbps | 1 | | ns |
| | | | 1000Mbps | 1 | | ns |
| RGMII5 | $t_h(RXC-RD)$ | Hold time, RGMII[x]_RD[3:0] valid after RGMII[x]_RXC high/low | 10Mbps | 1 | | ns |
| | | | 100Mbps | 1 | | ns |
| | | | 1000Mbps | 1 | | ns |
| | $t_h(RXC-RX_CTL)$ | Hold time, RGMII[x]_RX_CTL valid after RGMII[x]_RXC high/low | 10Mbps | 1 | | ns |
| | | | 100Mbps | 1 | | ns |
| | | | 1000Mbps | 1 | | ns |

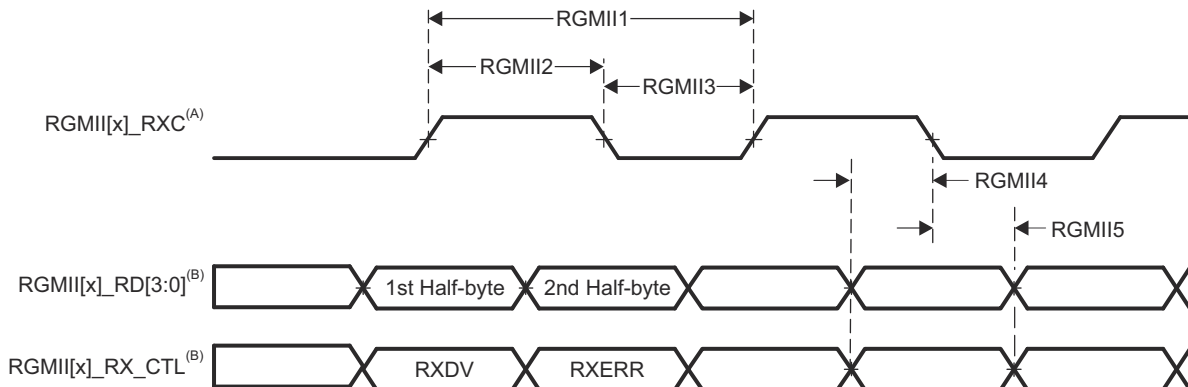

A. RGMII[x]_RXC must be externally delayed relative to the data and control pins.

B. Data and control information is received using both edges of the clocks. RGMII[x]_RD[3:0] carries data bits 3-0 on the rising edge of RGMII[x]_RXC and data bits 7-4 on the falling edge of RGMII[x]_RXC. Similarly, RGMII[x]_RX_CTL carries RXDV on rising edge of RGMII[x]_RXC and RXERR on falling edge of RGMII[x]_RXC.

Figure 7-24. CPSW3G RGMII[x]_RXC, RGMII[x]_RD[3:0], RGMII[x]_RX_CTL Timing Requirements - RGMII Mode

Table 7-29. RGMII[x]_TXC Switching Characteristics – RGMII Mode


see Figure 7-25

| NO. | PARAMETER | DESCRIPTION | MODE | MIN | MAX | UNIT |
|--------|---------------|-----------------------------------|----------|-----|-----|------|
| RGMII6 | $t_{c(TXC)}$ | Cycle time, RGMII[x]_TXC | 10Mbps | 360 | 440 | ns |
| | | | 100Mbps | 36 | 44 | ns |
| | | | 1000Mbps | 7.2 | 8.8 | ns |
| RGMII7 | $t_{w(TXCH)}$ | Pulse duration, RGMII[x]_TXC high | 10Mbps | 160 | 240 | ns |
| | | | 100Mbps | 16 | 24 | ns |
| | | | 1000Mbps | 3.6 | 4.4 | ns |
| RGMII8 | $t_{w(TXCL)}$ | Pulse duration, RGMII[x]_TXC low | 10Mbps | 160 | 240 | ns |
| | | | 100Mbps | 16 | 24 | ns |
| | | | 1000Mbps | 3.6 | 4.4 | ns |

Table 7-30. RGMII[x]_TD[3:0] and RGMII[x]_TX_CTL Switching Characteristics – RGMII Mode

see Figure 7-25

| NO. | PARAMETER | DESCRIPTION | MODE | MIN | MAX | UNIT |
|---------|-----------------------|--|----------|-----|-----|------|
| RGMII9 | $t_{osu(TD-TXC)}$ | Output setup time, RGMII[x]_TD[3:0] valid to RGMII[x]_TXC high/low | 10Mbps | 1.2 | | ns |
| | | | 100Mbps | 1.2 | | ns |
| | | | 1000Mbps | 1.2 | | ns |
| | $t_{osu(TX_CTL-TXC)}$ | Output setup time, RGMII[x]_TX_CTL valid to RGMII[x]_TXC high/low | 10Mbps | 1.2 | | ns |
| | | | 100Mbps | 1.2 | | ns |
| | | | 1000Mbps | 1.2 | | ns |
| RGMII10 | $t_{oh(TXC-TD)}$ | Output hold time, RGMII[x]_TD[3:0] valid after RGMII[x]_TXC high/low | 10Mbps | 1.2 | | ns |
| | | | 100Mbps | 1.2 | | ns |
| | | | 1000Mbps | 1.2 | | ns |
| | $t_{oh(TXC-TX_CTL)}$ | Output hold time, RGMII[x]_TX_CTL valid after RGMII[x]_TXC high/low | 10Mbps | 1.2 | | ns |
| | | | 100Mbps | 1.2 | | ns |
| | | | 1000Mbps | 1.2 | | ns |

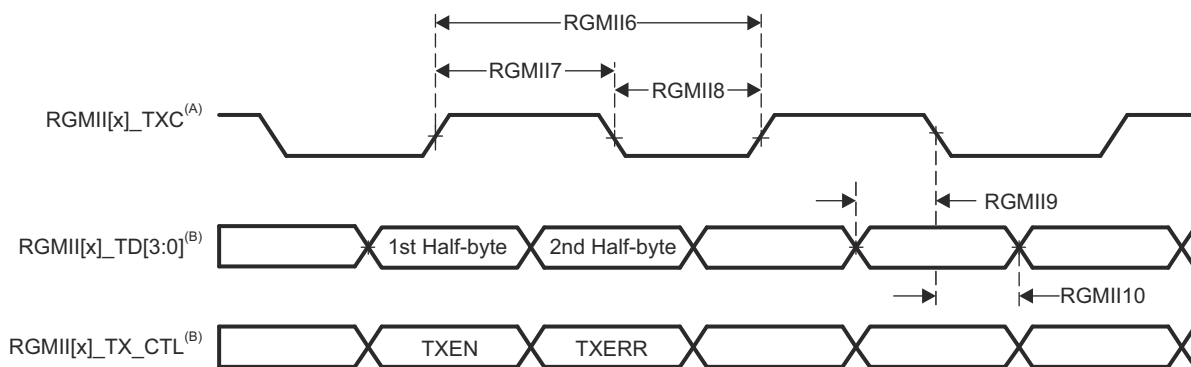

A. TXC is delayed internally before being driven to the RGMII[x]_TXC pin. This internal delay is always enabled.

- B. Data and control information is received using both edges of the clocks. RGMII[x]_TD[3:0] carries data bits 3-0 on the rising edge of RGMII[x]_TXC and data bits 7-4 on the falling edge of RGMII[x]_TXC. Similarly, RGMII[x]_TX_CTL carries TXEN on rising edge of RGMII[x]_TXC and TXERR on falling edge of RGMII[x]_TXC.

Figure 7-25. CPSW3G RGMII[x]_TXC, RGMII[x]_TD[3:0], and RGMII[x]_TX_CTL Switching Characteristics - RGMII Mode

7.10.5.1.4 CPSW3G IOSETS

Table 7-31 defines valid pin combinations of each CPSW3G MDIO0 IOSET.

Table 7-31. CPSW3G MDIO0 IOSETS

| SIGNALS | IOSET1 | | IOSET2 | |
|------------|-----------------|---------|-----------------|---------|
| | BALL NAME | MUXMODE | BALL NAME | MUXMODE |
| MDIO0_MDIO | PRG0_PRU1_GPO18 | 4 | PRG1_MDIO0_MDIO | 4 |
| MDIO0_MDC | PRG0_PRU1_GPO19 | 4 | PRG1_MDIO0_MDC | 4 |

Table 7-32 defines valid pin combinations of each CPSW3G RMII1 and RMII2 IOSET.

Table 7-32. CPSW3G RMII1 and RMII2 IOSETS

| SIGNALS | IOSET1 | | IOSET2 | |
|-----------------------------|-----------------|---------|-----------------|---------|
| | BALL NAME | MUXMODE | BALL NAME | MUXMODE |
| RMII_REF_CLK ⁽¹⁾ | PRG1_PRU0_GPO10 | 5 | PRG0_PRU0_GPO10 | 5 |
| RMII1_CRS_DV | PRG1_PRU1_GPO19 | 5 | PRG0_PRU1_GPO19 | 5 |
| RMII1_RX_ER | PRG1_PRU0_GPO9 | 5 | PRG0_PRU0_GPO9 | 5 |
| RMII1_RXD0 | PRG1_PRU1_GPO7 | 5 | PRG0_PRU1_GPO7 | 5 |
| RMII1_RXD1 | PRG1_PRU1_GPO9 | 5 | PRG0_PRU1_GPO9 | 5 |
| RMII1_TXD0 | PRG1_PRU1_GPO10 | 5 | PRG0_PRU1_GPO10 | 5 |
| RMII1_TXD1 | PRG1_PRU1_GPO17 | 5 | PRG0_PRU1_GPO17 | 5 |
| RMII1_TX_EN | PRG1_PRU1_GPO18 | 5 | PRG0_PRU1_GPO18 | 5 |
| RMII2_CRS_DV | PRG1_PRU1_GPO13 | 5 | PRG1_PRU1_GPO13 | 5 |
| RMII2_RX_ER | PRG1_PRU1_GPO4 | 5 | PRG1_PRU1_GPO4 | 5 |
| RMII2_RXD0 | PRG1_PRU1_GPO0 | 5 | PRG1_PRU1_GPO0 | 5 |
| RMII2_RXD1 | PRG1_PRU1_GPO1 | 5 | PRG1_PRU1_GPO1 | 5 |
| RMII2_TXD0 | PRG1_PRU1_GPO11 | 5 | PRG1_PRU1_GPO11 | 5 |
| RMII2_TXD1 | PRG1_PRU1_GPO12 | 5 | PRG1_PRU1_GPO12 | 5 |
| RMII2_TX_EN | PRG1_PRU1_GPO15 | 5 | PRG1_PRU1_GPO15 | 5 |

- (1) RMII_REF_CLK is common to both RMII1 and RMII2. For proper operation, all pin multiplexed signal assignments must use the same IOSET.

Table 7-33 defines valid pin combinations of each CPSW3G RGMII1 IOSET.

Table 7-33. CPSW3G RGMII1 IOSETS

| SIGNALS | IOSET1 | | IOSET2 | |
|---------------|-----------------|---------|-----------------|---------|
| | BALL NAME | MUXMODE | BALL NAME | MUXMODE |
| RGMII1_TX_CTL | PRG1_PRU0_GPO9 | 4 | PRG1_PRU0_GPO9 | 4 |
| RGMII1_TXC | PRG1_PRU0_GPO10 | 4 | PRG1_PRU0_GPO10 | 4 |
| RGMII1_TD0 | PRG1_PRU1_GPO7 | 4 | PRG1_PRU1_GPO7 | 4 |
| RGMII1_TD1 | PRG1_PRU1_GPO9 | 4 | PRG1_PRU1_GPO9 | 4 |
| RGMII1_TD2 | PRG1_PRU1_GPO10 | 4 | PRG1_PRU1_GPO10 | 4 |
| RGMII1_TD3 | PRG1_PRU1_GPO17 | 4 | PRG1_PRU1_GPO17 | 4 |
| RGMII1_RX_CTL | PRG0_PRU0_GPO9 | 4 | PRG1_PRU0_GPO5 | 4 |
| RGMII1_RXC | PRG0_PRU0_GPO10 | 4 | PRG1_PRU0_GPO8 | 4 |

Table 7-33. CPSW3G RGMII1 IOSETs (continued)

| SIGNALS | IOSET1 | | IOSET2 | |
|------------|-----------------|---------|-----------------|---------|
| | BALL NAME | MUXMODE | BALL NAME | MUXMODE |
| RGMII1_RD0 | PRG0_PRU1_GPO7 | 4 | PRG1_PRU1_GPO5 | 4 |
| RGMII1_RD1 | PRG0_PRU1_GPO9 | 4 | PRG1_PRU1_GPO8 | 4 |
| RGMII1_RD2 | PRG0_PRU1_GPO10 | 4 | PRG1_PRU1_GPO18 | 4 |
| RGMII1_RD3 | PRG0_PRU1_GPO17 | 4 | PRG1_PRU1_GPO19 | 4 |

7.10.5.2 DDRSS

For more details about features and additional description information on the device (LP)DDR4 Memory Interface, see the corresponding subsections within *Signal Descriptions* and *Detailed Description* sections.

Table 7-34 and Figure 7-26 present switching characteristics for DDRSS.

Table 7-34. DDRSS Switching Characteristics

see Figure 7-26

| NO. | PARAMETER | DDR TYPE | MIN | MAX | UNIT |
|-----|---|----------|---------------------|-----|------|
| 1 | $t_{c(DDR_CKP/DDR_CKN)}$ Cycle time, DDR_CKP and DDR_CKN | LPDDR4 | 1.25 ⁽¹⁾ | 20 | ns |
| | | DDR4 | 1.25 ⁽¹⁾ | 1.6 | ns |

- (1) Minimum DDR clock Cycle time will be limited based on the specific memory type (vendor) used in a system and by PCB implementation. Refer to [AM64x\AM243x DDR Board Design and Layout Guidelines](#) for the proper PCB implementation to achieve maximum DDR frequency.

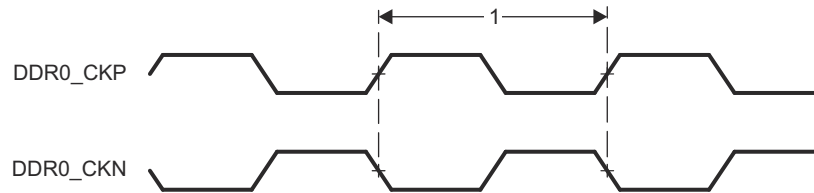


Figure 7-26. DDRSS Switching Characteristics

For more information, see *DDR Subsystem (DDRSS)* section in *Memory Controllers* chapter in the device TRM.

7.10.5.3 ECAP

Table 7-35, Table 7-36, Figure 7-27, Table 7-37, and Figure 7-28 present timing conditions, requirements, and switching characteristics for ECAP.

Table 7-35. ECAP Timing Conditions

| PARAMETER | | MIN | MAX | UNIT |
|--------------------------|-------------------------|-----|-----|------|
| INPUT CONDITIONS | | | | |
| SR _i | Input slew rate | 1 | 4 | V/ns |
| OUTPUT CONDITIONS | | | | |
| C _L | Output load capacitance | 2 | 7 | pF |

Table 7-36. ECAP Timing Requirements

see [Figure 7-27](#)

| NO. | PARAMETER | DESCRIPTION | MIN | MAX | UNIT |
|------|--------------|------------------------------------|----------------|-----|------|
| CAP1 | $t_{w(CAP)}$ | Pulse duration, CAP (asynchronous) | $2 + 2P^{(1)}$ | | ns |

(1) P = sysclk period in ns.

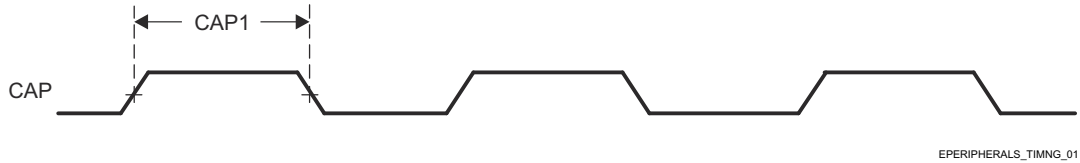


Figure 7-27. ECAP Timings Requirements

Table 7-37. ECAP Switching Characteristics

see [Figure 7-28](#)

| NO. | PARAMETER | DESCRIPTION | MIN | MAX | UNIT |
|------|---------------|--------------------------------|-----------------|-----|------|
| CAP2 | $t_{w(APWM)}$ | Pulse duration, APWMx high/low | $-2 + 2P^{(1)}$ | | ns |

(1) P = sysclk period in ns.

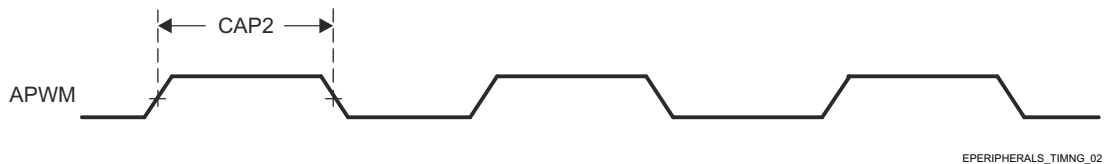


Figure 7-28. ECAP Switching Characteristics

For more information, see *Enhanced Capture (ECAP) Module* section in *Peripherals* chapter in the device TRM.

7.10.5.4 EPWM

Table 7-38, Table 7-39, Figure 7-29, Table 7-40, Figure 7-30, Figure 7-31, and Figure 7-32 present timing conditions, requirements, and switching characteristics for EPWM.

Table 7-38. EPWM Timing Conditions

| PARAMETER | | MIN | MAX | UNIT |
|--------------------------|-------------------------|-----|-----|------|
| INPUT CONDITIONS | | | | |
| SR _I | Input slew rate | 1 | 4 | V/ns |
| OUTPUT CONDITIONS | | | | |
| C _L | Output load capacitance | 2 | 7 | pF |

Table 7-39. EPWM Timing Requirements

see Figure 7-29

| NO. | PARAMETER | DESCRIPTION | MIN | MAX | UNIT |
|------|-------------------------|-----------------------------------|-----------------------|-----|------|
| PWM6 | t _w (SYNCIN) | Pulse duration, EHRPWM_SYNCIN | 2 + 2P ⁽¹⁾ | | ns |
| PWM7 | t _w (TZ) | Pulse duration, EHRPWM_TZn_IN low | 2 + 3P ⁽¹⁾ | | ns |

(1) P = sysclk period in ns.

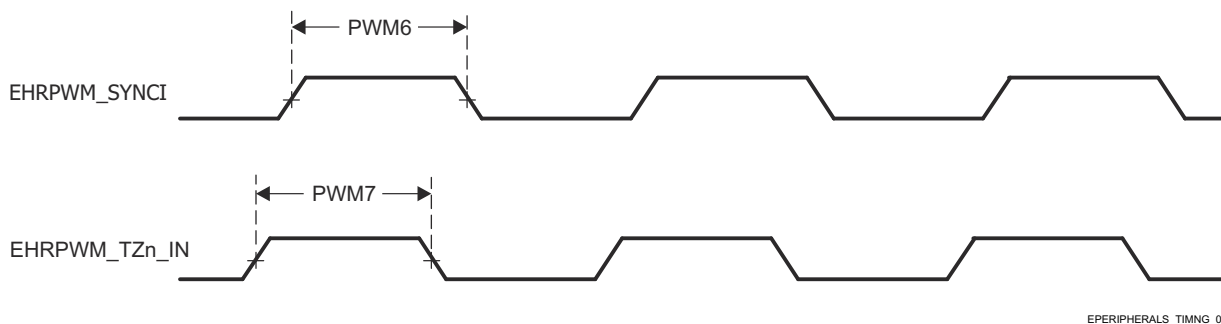


Figure 7-29. EPWM Timing Requirements

Table 7-40. EPWM Switching Characteristics

see Figure 7-30, Figure 7-31, and Figure 7-32

| NO. | PARAMETER | DESCRIPTION | MIN | MAX | UNIT |
|------|--------------------------|--|----------------------|-----|------|
| PWM1 | t _w (PWM) | Pulse duration, EHRPWM_A/B high/low | P - 3 ⁽¹⁾ | | ns |
| PWM2 | t _w (SYNCOUT) | Pulse duration, EHRPWM_SYNCOUT | P - 3 ⁽¹⁾ | | ns |
| PWM3 | t _d (TZ-PWM) | Delay time, EHRPWM_TZn_IN active to EHRPWM_A/B forced high/low | | 11 | ns |
| PWM4 | t _d (TZ-PWMZ) | Delay time, EHRPWM_TZn_IN active to EHRPWM_A/B Hi-Z | | 11 | ns |
| PWM5 | t _w (SOC) | Pulse duration, EHRPWM_SOCA/B output | P - 3 ⁽¹⁾ | | ns |

(1) P = sysclk period in ns.

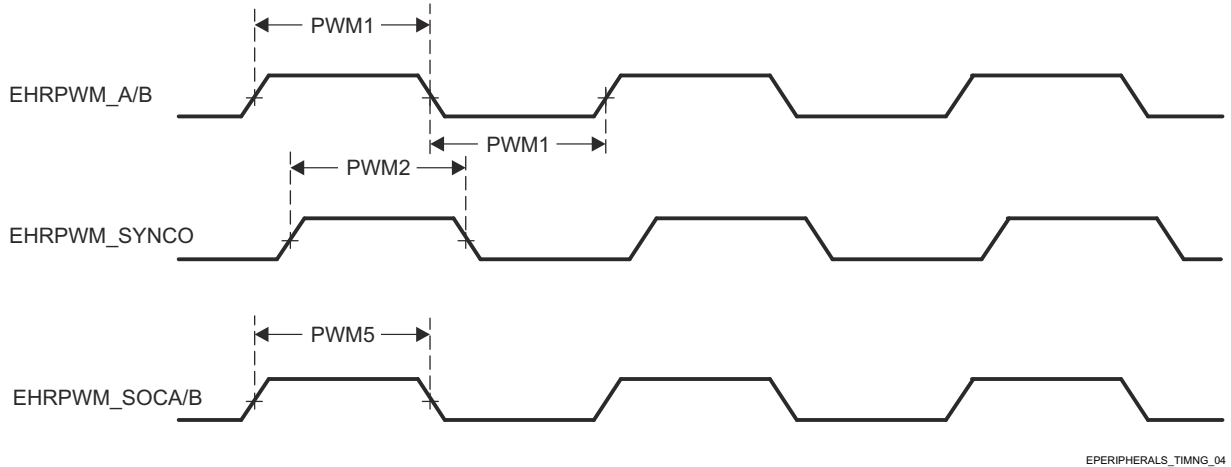


Figure 7-30. EHRPWM Switching Characteristics

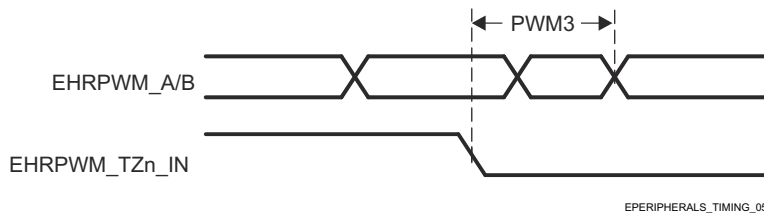


Figure 7-31. EHRPWM_TZn_IN to EHRPWM_A/B Forced Switching Characteristics

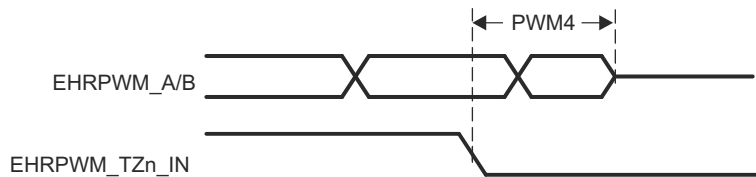


Figure 7-32. EHRPWM_TZn_IN to EHRPWM_A/B Hi-Z Switching Characteristics

For more information, see *Enhanced Pulse Width Modulation (EPWM) Module* section in *Peripherals* chapter in the device TRM.

7.10.5.5 EQEP

Table 7-41, Table 7-42, Figure 7-33, and Table 7-43 present timing conditions, requirements, and switching characteristics for EQEP.

Table 7-41. EQEP Timing Conditions

| PARAMETER | | MIN | MAX | UNIT |
|--------------------------|-------------------------|-----|-----|------|
| INPUT CONDITIONS | | | | |
| SR _i | Input slew rate | 1 | 4 | V/ns |
| OUTPUT CONDITIONS | | | | |
| C _L | Output load capacitance | 2 | 7 | pF |

Table 7-42. EQEP Timing Requirements

see Figure 7-33

| NO. | PARAMETER | DESCRIPTION | MIN | MAX | UNIT |
|------|-----------------------|----------------------------|-----------------------|-----|------|
| QEP1 | t _{w(QEP)} | Pulse duration, QEP_A/B | 2 + 2P ⁽¹⁾ | | ns |
| QEP2 | t _{w(QEPIH)} | Pulse duration, QEP_I high | 2 + 2P ⁽¹⁾ | | ns |

Table 7-42. EQEP Timing Requirements (continued)

see [Figure 7-33](#)

| NO. | PARAMETER | DESCRIPTION | MIN | MAX | UNIT |
|------|-----------------|----------------------------|----------------|-----|------|
| QEP3 | $t_{w(QEPIL)}$ | Pulse duration, QEP_I low | $2 + 2P^{(1)}$ | | ns |
| QEP4 | $t_{w(QEP SH)}$ | Pulse duration, QEP_S high | $2 + 2P^{(1)}$ | | ns |
| QEP5 | $t_{w(QEP SL)}$ | Pulse duration, QEP_S low | $2 + 2P^{(1)}$ | | ns |

(1) P = sysclk period in ns

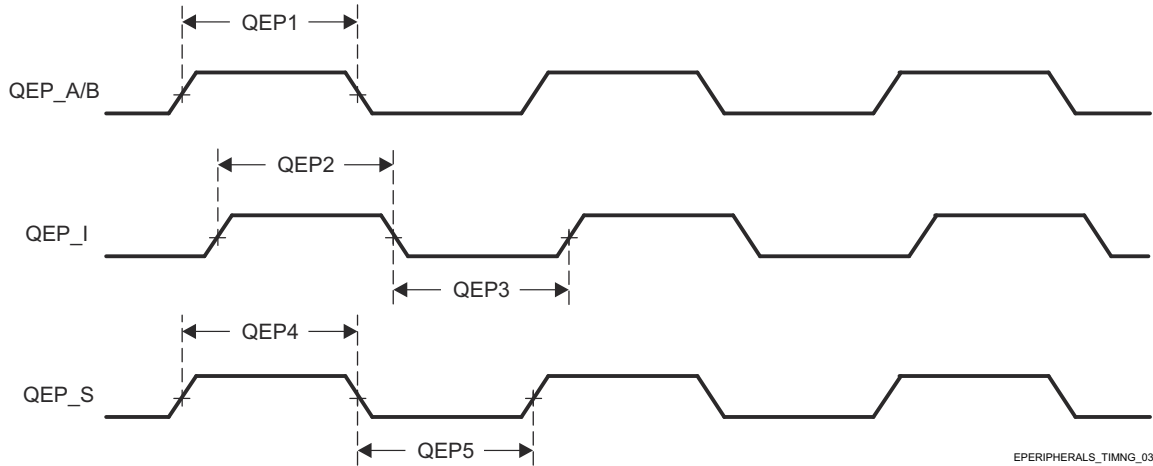


Figure 7-33. EQEP Timing Requirements

Table 7-43. EQEP Switching Characteristics

| NO. | PARAMETER | DESCRIPTION | MIN | MAX | UNIT |
|------|-----------------|---|-----|-----|------|
| QEP6 | $t_d(QEP-CNTR)$ | Delay time, external clock to counter increment | | 24 | ns |

For more information, see *Enhanced Quadrature Encoder Pulse (EQEP) Module* section in *Peripherals* chapter in the device TRM.

7.10.5.6 FSI

[Table 7-44](#), [Table 7-45](#), [Figure 7-34](#), [Table 7-46](#), [Figure 7-35](#), [Table 7-47](#), and [Figure 7-36](#) present timing conditions, requirements, and switching characteristics for FSI.

Table 7-44. FSI Timing Conditions

| PARAMETER | | MIN | MAX | UNIT |
|--------------------------|-------------------------|-----|-----|------|
| INPUT CONDITIONS | | | | |
| SR_i | Input slew rate | 0.8 | 4 | V/ns |
| OUTPUT CONDITIONS | | | | |
| C_L | Output load capacitance | 1 | 7 | pF |

Table 7-45. FSI Timing Requirements

see [Figure 7-34](#)

| NO. | PARAMETER | DESCRIPTION | MIN | MAX | UNIT |
|-------|-------------------------|---|------------------|------------------|------|
| FSIR1 | $t_c(RX_CLK)$ | Cycle time, FSI_RXn_CLK | 20 | | ns |
| FSIR2 | $t_w(RX_CLK)$ | Pulse width, FSI_RXn_CLK low or FSI_RXn_CLK high | $0.5P - 1^{(1)}$ | $0.5P + 1^{(1)}$ | ns |
| FSIR3 | $t_{su}(RX_D-RX_CLK)$ | Setup time, FSI_RXn_D[1:0] valid before FSI_RXn_CLK | 3 | | ns |

Table 7-45. FSI Timing Requirements (continued)

see [Figure 7-34](#)

| NO. | | | MIN | MAX | UNIT |
|-------|------------------------|---|-----|-----|------|
| FSIR4 | $t_{h(RX_CLK-RX_D)}$ | Hold time, FSI_RXn_D[1:0] valid after FSI_RXn_CLK | 2.5 | | ns |

(1) P = FSI_RXn_CLK period in ns.

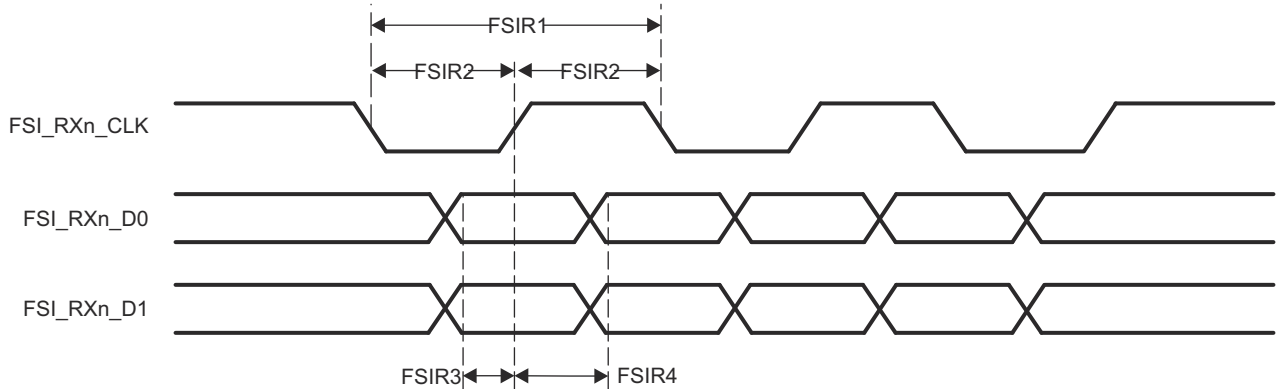


Figure 7-34. FSI Timing Requirements

Table 7-46. FSI Switching Characteristics - FSI Mode

see [Figure 7-35](#)

| NO. | PARAMETER | MODE | MIN | MAX | UNIT |
|-------|------------------------|--|-------------------|---------------------|------|
| FSIT1 | $t_{c(TX_CLK)}$ | Cycle time, FSI_TXn_CLK | 20 | | ns |
| FSIT2 | $t_{w(TX_CLK)}$ | Pulse width, FSI_TXn_CLK low or FSI_TXn_CLK high | $0.5P + 1^{(1)}$ | $0.5P - 1^{(1)}$ | ns |
| FSIT3 | $t_{d(TX_CLK-TX_D)}$ | Delay time, FSI_TXn_D[1:0] valid after FSI_TXn_CLK high or FSI_TXn_CLK low | $0.25P - 2^{(1)}$ | $0.25P + 2.5^{(1)}$ | ns |

(1) P = FSI_TXn_CLK period in ns.

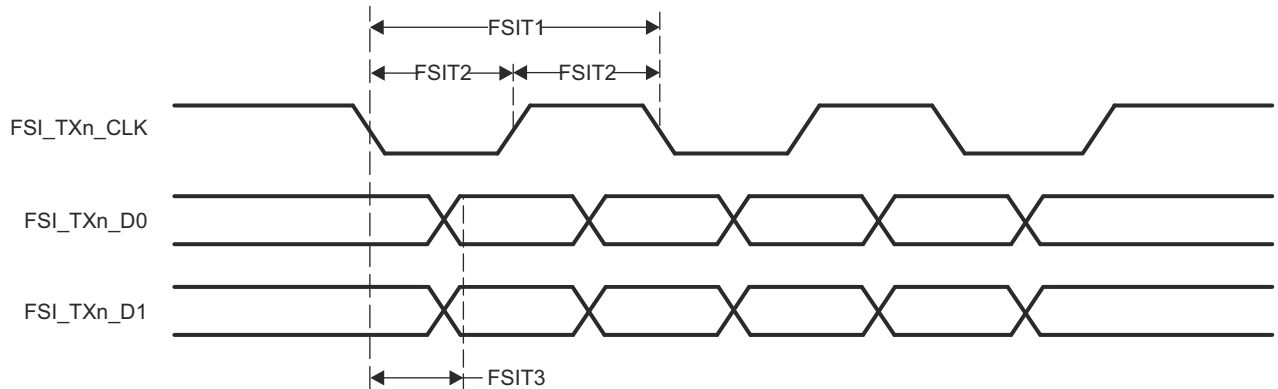


Figure 7-35. FSI Switching Characteristics - FSI Mode

Table 7-47. FSI Switching Characteristics - SPI Mode

see [Figure 7-36](#)

| NO. | PARAMETER | MODE | MIN | MAX | UNIT |
|-------|--------------------------|--|------------------|------------------|------|
| FSIT4 | $t_{c(TX_CLK)}$ | Cycle time, FSI_TXn_CLK | 20 | | ns |
| FSIT5 | $t_{w(TX_CLK)}$ | Pulse width, FSI_TXn_CLK low or FSI_TXn_CLK high | $0.5P + 1^{(1)}$ | $0.5P - 1^{(1)}$ | ns |
| FSIT6 | $t_{d(TX_CLKH-TX_D0)}$ | Delay time, FSI_TXn_CLK high to FSI_TXn_D0 valid | | 3 | ns |
| FSIT7 | $t_{d(TX_D1-TX_CLK)}$ | Delay time, FSI_TXn_D1 low to FSI_TXn_CLK high | $P - 3^{(1)}$ | | ns |

Table 7-47. FSI Switching Characteristics - SPI Mode (continued)

see [Figure 7-36](#)

| NO. | PARAMETER | MODE | MIN | MAX | UNIT |
|-------|--|----------|----------------------|-----|------|
| FSIT8 | $t_{d(TX_CLK-TX_D1)}$ Delay time, FSI_TXn_CLK low to FSI_TXn_D1 high | SPI Mode | P - 2 ⁽¹⁾ | | ns |

(1) P = FSI_TXn_CLK period in ns.

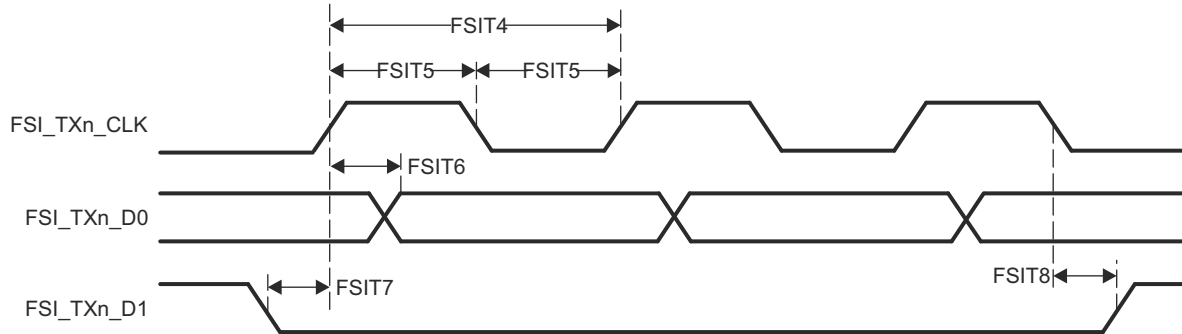


Figure 7-36. FSI Switching Characteristics - SPI Mode

For more information, see *Fast Serial Interface* section in *Peripherals* chapter in the device TRM.

7.10.5.7 GPIO

[Table 7-48](#), [Table 7-49](#), and [Table 7-50](#) present timing conditions, requirements, and switching characteristics for GPIO.

For more details about features and additional description information on the device GPIO, see the corresponding subsections within *Signal Descriptions* and *Detailed Description* sections.

Note

The device has multiple GPIO modules. GPIO_{n_x} is generic name used to describe a GPIO signal, where n represents the specific GPIO module and x represents one of the input/output signals associated with the module.

Table 7-48. GPIO Timing Conditions

| PARAMETER | | BUFFER TYPE | MIN | MAX | UNIT |
|--------------------------|-------------------------|-------------|------|-----|------|
| INPUT CONDITIONS | | | | | |
| SR _i | Input slew rate | LVC MOS | 0.75 | 6.6 | V/ns |
| | | I2C OD FS | TBD | TBD | V/ns |
| OUTPUT CONDITIONS | | | | | |
| C _L | Output load capacitance | LVC MOS | 3 | 10 | pF |
| | | I2C OD FS | 3 | 100 | pF |

Table 7-49. GPIO Timing Requirements

| NO. | PARAMETER | DESCRIPTION | BUFFER TYPE | MIN | MAX | UNIT |
|-------|-------------------|----------------------------------|-------------|-------------------------|-----|------|
| GPIO1 | $t_{w(GPIO_IN)}$ | Pulse width, GPIO _{n_x} | LVC MOS | 2P + 2.6 ⁽¹⁾ | | ns |
| | | | I2C OD FS | 2P + 2.6 ⁽¹⁾ | | ns |

(1) P = functional clock period in ns.

Table 7-50. GPIO Switching Characteristics

| NO. | PARAMETER | DESCRIPTION | BUFFER TYPE | MIN | MAX | UNIT |
|-------|--------------------|-----------------------------------|-------------|--------|-----------------------|------|
| GPIO2 | $t_{w(GPIO_OUT)}$ | Pulse width, GPIO _n _x | LVC MOS | -3.6 + | 0.975P ⁽¹⁾ | ns |
| | | | I2C OD FS | 160 | | ns |

(1) P = functional clock period in ns.

For more information, see *General-Purpose Interface (GPIO)* section in *Peripherals* chapter in the device TRM.

7.10.5.8 GPMC

For more details about features and additional description information on the device General-Purpose Memory Controller, see the corresponding subsections within *Signal Descriptions* and *Detailed Description* sections.

Note

GPMC has one or more signals which can be multiplexed to more than one pin. Timing requirements and switching characteristics defined in this section are only valid for specific pin combinations known as IOSETs. Valid pin combinations or IOSETs for this interface is shown in [Table 7-58](#).

[Table 7-51](#) presents timing conditions for GPMC.

Table 7-51. GPMC Timing Conditions

| PARAMETER | | MIN | MAX | UNIT | |
|--------------------------------------|--|--------------------------|-----|------|----|
| INPUT CONDITIONS | | | | | |
| SR _I | Input slew rate | 1.65 | 4 | V/ns | |
| OUTPUT CONDITIONS | | | | | |
| C _L | Output load capacitance | 5 | 20 | pF | |
| PCB CONNECTIVITY REQUIREMENTS | | | | | |
| t_d (Trace Delay) | Propagation delay of each trace | 133 MHz Synchronous Mode | 140 | 360 | ps |
| | | All other modes | 140 | 720 | ps |
| t_d (Trace Mismatch Delay) | Propagation delay mismatch across all traces | | 200 | ps | |

For more information, see *General-Purpose Memory Controller (GPMC)* section in *Peripherals* chapter in the device TRM.

7.10.5.8.1 GPMC and NOR Flash — Synchronous Mode

[Table 7-52](#) and [Table 7-53](#) present timing requirements and switching characteristics for GPMC and NOR Flash - Synchronous Mode.

Table 7-52. GPMC and NOR Flash Timing Requirements — Synchronous Mode

see [Figure 7-37](#), [Figure 7-38](#), and [Figure 7-41](#)

| NO. | PARAMETER | DESCRIPTION | MODE ⁽⁵⁾ | MIN | MAX | MIN | MAX | UNIT |
|-----|-------------------|--|--|------------------------------------|------------------------------------|------------------------------------|------------------------------------|------|
| | | | | GPMC_FCLK = 100 MHz ⁽²⁾ | GPMC_FCLK = 133 MHz ⁽²⁾ | GPMC_FCLK = 100 MHz ⁽²⁾ | GPMC_FCLK = 133 MHz ⁽²⁾ | |
| F12 | $t_{su}(dV-clkH)$ | Setup time, input data GPMC_AD[n:0] ⁽¹⁾ valid before output clock GPMC_CLK high | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | 1.81 | | 1.11 | | ns |
| | | | not_div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | 1.06 | | 3.50 | | ns |

Table 7-52. GPMC and NOR Flash Timing Requirements — Synchronous Mode (continued)

see [Figure 7-37](#), [Figure 7-38](#), and [Figure 7-41](#)

| NO. | PARAMETER | DESCRIPTION | MODE ⁽⁵⁾ | MIN | MAX | MIN | MAX | UNIT |
|-----|------------------------------|--|--|------------------------------------|-----|------------------------------------|-----|------|
| | | | | GPMC_FCLK = 100 MHz ⁽²⁾ | | GPMC_FCLK = 133 MHz ⁽²⁾ | | |
| F13 | t _h (clkH-dV) | Hold time, input data GPMC_AD[n:0] ⁽¹⁾ valid after output clock GPMC_CLK high | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | 2.28 | | 2.28 | | ns |
| | | | not_div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | 2.28 | | 2.28 | | ns |
| F21 | t _{su} (waitV-clkH) | Setup time, input wait GPMC_WAIT[j] ^{(3) (4)} valid before output clock GPMC_CLK high | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | 1.81 | | 1.11 | | ns |
| | | | not_div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | 1.06 | | 3.50 | | ns |
| F22 | t _h (clkH-waitV) | Hold time, input wait GPMC_WAIT[j] ^{(3) (4)} valid after output clock GPMC_CLK high | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | 2.28 | | 2.28 | | ns |
| | | | not_div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | 2.8 | | 2.28 | | ns |

(1) Synchronous Mode supports 16-bit data bus up to 133 MHz and 32-bit data bus up to 100 MHz

(2) GPMC_FCLK select

- gpmc_fclk_sel[1:0] = 2b01 to select the 100MHz GPMC_FCLK
- gpmc_fclk_sel[1:0] = 2b00 to select the 133MHz GPMC_FCLK

(3) In GPMC_WAIT[j], j is equal to 0 or 1.

(4) Wait monitoring support is limited to a WaitMonitoringTime value > 0. For a full description of wait monitoring feature, see *General-Purpose Memory Controller (GPMC)* section in the device TRM.

(5) For div_by_1_mode:

- GPMC_CONFIG1_i Register: GPMCFCLKDIVIDER = 0h:
 - GPMC_CLK frequency = GPMC_FCLK frequency

For not_div_by_1_mode:

- GPMC_CONFIG1_i Register: GPMCFCLKDIVIDER = 1h to 3h:
 - GPMC_CLK frequency = GPMC_FCLK frequency / (2 to 4)

For GPMC_FCLK_MUX:

- CTRLMMR_GPMC_CLKSEL[1-0] CLK_SEL = 01 = PER1_PLL_CLKOUT / 3 = 300 / 3 = 100MHz

For TIMEPARAGRANULARITY_X1:

- GPMC_CONFIG1_i Register: TIMEPARAGRANULARITY = 0h = x1 latencies (affecting RD/WRCYCLETIME, RD/WRACCESSTIME, PAGEBURSTACCESSTIME, CSONTIME, CSRD/WROFFTIME, ADVONTIME, ADVRD/WROFFTIME, OEONTIME, OEOFFTIME, WEONTIME, WEOFFTIME, CYCLE2CYCLEDELAY, BUSTURNAROUND, TIMEOUTSTARTVALUE, WRDATAONADMUXBUS)

Table 7-53. GPMC and NOR Flash Switching Characteristics – Synchronous Mode

see [Figure 7-37](#), [Figure 7-38](#), [Figure 7-39](#), [Figure 7-40](#), and [Figure 7-41](#)

| NO. (3) | PARAMETER | DESCRIPTION | MODE ⁽¹⁸⁾ | MIN | MAX | MIN | MAX | UNIT |
|------------|-----------------------|--|--|---------------------------------|-----|---------------------------------|-----|------|
| | | | | 100 MHz | | 133 MHz | | |
| F0 | 1 / tc(clk) | Period, output clock GPMC_CLK ⁽¹⁶⁾ | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | 10.00 | | 7.52 | | ns |
| F1 | t _w (clkH) | Typical pulse duration, output clock GPMC_CLK high | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | 0.475P - 0.3 ⁽¹⁵⁾ | | 0.475P - 0.3 ⁽¹⁵⁾ | | ns |

Table 7-53. GPMC and NOR Flash Switching Characteristics – Synchronous Mode (continued)

see [Figure 7-37](#), [Figure 7-38](#), [Figure 7-39](#), [Figure 7-40](#), and [Figure 7-41](#)

| NO. (3) | PARAMETER | DESCRIPTION | MODE ⁽¹⁸⁾ | MIN | MAX | MIN | MAX | UNIT |
|------------|--------------------------------|--|---|---------------------------------|----------|---------------------------------|----------|------|
| | | | | 100 MHz | | 133 MHz | | |
| F1 | t _w (clkL) | Typical pulse duration, output clock GPMC_CLK low | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | 0.475P - 0.3 ⁽¹⁵⁾ | | 0.475P - 0.3 ⁽¹⁵⁾ | | ns |
| | t _{dc} (clk) | Duty cycle error, output clock GPMC_CLK | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | -500.00 | 500.00 | -500.00 | 500.00 | ps |
| | t _J (clk) | Jitter standard deviation, output clock GPMC_CLK ⁽¹⁷⁾ | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | | 33.33 | | 33.33 | ps |
| | t _R (clk) | Rise time, output clock GPMC_CLK | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | | 2.0 | | 2.0 | ns |
| | t _F (clk) | Fall time, output clock GPMC_CLK | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | | 2.0 | | 2.0 | ns |
| | t _R (do) | Rise time, output data GPMC_AD[n:0] ⁽¹⁾ | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | | 2.0 | | 2.0 | ns |
| | t _F (do) | Fall time, output data GPMC_AD[n:0] ⁽¹⁾ | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | | 2.0 | | 2.0 | ns |
| F2 | t _d (clkH-csnV) | Delay time, output clock GPMC_CLK rising edge to output chip select GPMC_CS[n][i] transition ⁽¹⁴⁾ | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1; no extra_delay | F - 2.2 ⁽⁶⁾ | F + 3.75 | F - 2.2 ⁽⁶⁾ | F + 3.75 | ns |
| F3 | t _d (clkH-CSn[i]V) | Delay time, output clock GPMC_CLK rising edge to output chip select GPMC_CS[n][i] invalid ⁽¹⁴⁾ | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1; no extra_delay | E - 2.2 ⁽⁵⁾ | E + 1.31 | E - 2.2 ⁽⁵⁾ | E + 4.5 | ns |
| F4 | t _d (aV-clk) | Delay time, output address GPMC_A[27:1] valid to output clock GPMC_CLK first edge | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | B - 2.3 ⁽³⁾ | B + 4.5 | B - 2.3 ⁽³⁾ | B + 4.5 | ns |
| F5 | t _d (clkH-aIV) | Delay time, output clock GPMC_CLK rising edge to output address GPMC_A[27:1] invalid | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | -2.3 | 4.5 | -2.3 | 4.5 | ns |
| F6 | t _d (be[x]nV-clk) | Delay time, output lower byte enable and command latch enable GPMC_BE0n_CLE, output upper byte enable GPMC_BE1n valid to output clock GPMC_CLK first edge | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | B - 2.3 ⁽³⁾ | B + 1.9 | B - 2.3 ⁽³⁾ | B + 1.9 | ns |
| F7 | t _d (clkH-be[x]nIV) | Delay time, output clock GPMC_CLK rising edge to output lower byte enable and command latch enable GPMC_BE0n_CLE, output upper byte enable GPMC_BE1n invalid ⁽¹¹⁾ | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | D - 2.3 ⁽⁴⁾ | D + 1.9 | D - 2.3 ⁽⁴⁾ | D + 1.9 | ns |
| F7 | t _d (clkL-be[x]nIV) | Delay time, GPMC_CLK falling edge to GPMC_BE0n_CLE, GPMC_BE1n invalid ⁽¹²⁾ | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | D - 2.3 ⁽⁴⁾ | D + 1.9 | D - 2.3 ⁽⁴⁾ | D + 1.9 | ns |
| F7 | t _d (clkL-be[x]nIV) | Delay time, GPMC_CLK falling edge to GPMC_BE0n_CLE, GPMC_BE1n invalid ⁽¹³⁾ | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | D - 2.3 ⁽⁴⁾ | D + 1.9 | D - 2.3 ⁽⁴⁾ | D + 1.9 | ns |
| F8 | t _d (clkH-advn) | Delay time, output clock GPMC_CLK rising edge to output address valid and address latch enable GPMC_ADVn_ALE transition | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1; no extra_delay | G - 2.3 ⁽⁷⁾ | G + 4.5 | G - 2.3 ⁽⁷⁾ | G + 4.5 | ns |

Table 7-53. GPMC and NOR Flash Switching Characteristics – Synchronous Mode (continued)

see Figure 7-37, Figure 7-38, Figure 7-39, Figure 7-40, and Figure 7-41

| NO. (3) | PARAMETER | DESCRIPTION | MODE ⁽¹⁸⁾ | MIN | MAX | MIN | MAX | UNIT |
|------------|------------------------------|---|---|-----------------|---------|-----------------|---------|------|
| | | | | 100 MHz | | 133 MHz | | |
| F9 | t _d (clkH-advnIV) | Delay time, output clock GPMC_CLK rising edge to output address valid and address latch enable GPMC_ADVn_ALE invalid | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1; no extra_delay | D - 2.3 (4) | D + 4.5 | D - 2.3 (4) | D + 4.5 | ns |
| F10 | t _d (clkH-oen) | Delay time, output clock GPMC_CLK rising edge to output enable GPMC_OEn_REn transition | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1; no extra_delay | -2.3H (8) | H + 3.5 | H - 2.3 (8) | H + 3.5 | ns |
| F11 | t _d (clkH-oenIV) | Delay time, output clock GPMC_CLK rising edge to output enable GPMC_OEn_REn invalid | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1; no extra_delay | E - 2.3 (8) | E + 3.5 | E - 2.3 (8) | E + 3.5 | ns |
| F14 | t _d (clkH-wen) | Delay time, output clock GPMC_CLK rising edge to output write enable GPMC_WEn transition | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1; no extra_delay | I - 2.3 (9) | I + 4.5 | I - 2.3 (9) | I + 4.5 | ns |
| F15 | t _d (clkH-do) | Delay time, output clock GPMC_CLK rising edge to output data GPMC_AD[n:0] ⁽¹¹⁾ transition | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | J - 2.3 (10) | J + 2.7 | J - 2.3 (10) | J + 2.7 | ns |
| F15 | t _d (clkL-do) | Delay time, GPMC_CLK falling edge to GPMC_AD[n:0] ⁽¹¹⁾ data bus transition ⁽¹²⁾ | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | J - 2.3 (10) | J + 2.7 | J - 2.3 (10) | J + 2.7 | ns |
| F15 | t _d (clkL-do) | Delay time, GPMC_CLK falling edge to GPMC_AD[n:0] ⁽¹¹⁾ data bus transition ⁽¹³⁾ | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | J - 2.3 (10) | J + 2.7 | J - 2.3 (10) | J + 2.7 | ns |
| F17 | t _d (clkH-be[x]n) | Delay time, output clock GPMC_CLK rising edge to output lower byte enable and command latch enable GPMC_BE0n_CLE transition ⁽¹¹⁾ | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | J - 2.3 (10) | J + 1.9 | J - 2.3 (10) | J + 1.9 | ns |
| F17 | t _d (clkL-be[x]n) | Delay time, GPMC_CLK falling edge to GPMC_BE0n_CLE, GPMC_BE1n transition ⁽¹²⁾ | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | J - 2.3 (10) | J + 1.9 | J - 2.3 (10) | J + 1.9 | ns |
| F17 | t _d (clkL-be[x]n) | Delay time, GPMC_CLK falling edge to GPMC_BE0n_CLE, GPMC_BE1n transition ⁽¹³⁾ | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | J - 2.3 (10) | J + 1.9 | J - 2.3 (10) | J + 1.9 | ns |
| F18 | t _w (csnV) | Pulse duration, output chip select GPMC_CSn[j] ⁽¹⁴⁾ low | Read | A | | A | | ns |
| | | | Write | A | | A | | ns |
| F19 | t _w (be[x]nV) | Pulse duration, output lower byte enable and command latch enable GPMC_BE0n_CLE, output upper byte enable GPMC_BE1n low | Read | C | | C | | ns |
| | | | Write | C | | C | | ns |
| F20 | t _w (advnV) | Pulse duration, output address valid and address latch enable GPMC_ADVn_ALE low | Read | K | | K | | ns |
| | | | Write | K | | K | | ns |

(1) Synchronous Mode supports 16-bit data bus up to 133 MHz and 32-bit data bus up to 100 MHz

 (2) For single read: $A = (CSRdOffTime - CSOnTime) \times (TimeParaGranularity + 1) \times GPMC_FCLK^{(15)}$
 For burst read: $A = (CSRdOffTime - CSOnTime + (n - 1) \times PageBurstAccessTime) \times (TimeParaGranularity + 1) \times GPMC_FCLK^{(15)}$
 For burst write: $A = (CSWrOffTime - CSOnTime + (n - 1) \times PageBurstAccessTime) \times (TimeParaGranularity + 1) \times GPMC_FCLK^{(15)}$
 With n being the page burst access number.

 (3) $B = ClkActivationTime \times GPMC_FCLK^{(15)}$

 (4) For single read: $D = (RdCycleTime - AccessTime) \times (TimeParaGranularity + 1) \times GPMC_FCLK^{(15)}$
 For burst read: $D = (RdCycleTime - AccessTime) \times (TimeParaGranularity + 1) \times GPMC_FCLK^{(15)}$
 For burst write: $D = (WrCycleTime - AccessTime) \times (TimeParaGranularity + 1) \times GPMC_FCLK^{(15)}$

 (5) For single read: $E = (CSRdOffTime - AccessTime) \times (TimeParaGranularity + 1) \times GPMC_FCLK^{(15)}$
 For burst read: $E = (CSRdOffTime - AccessTime) \times (TimeParaGranularity + 1) \times GPMC_FCLK^{(15)}$
 For burst write: $E = (CSWrOffTime - AccessTime) \times (TimeParaGranularity + 1) \times GPMC_FCLK^{(15)}$

- (6) For csn falling edge (CS activated):
- Case GPMCFCLKDIVIDER = 0:
 - $F = 0.5 \times \text{CSEExtraDelay} \times \text{GPMC_FCLK}^{(15)}$
 - Case GPMCFCLKDIVIDER = 1:
 - $F = 0.5 \times \text{CSEExtraDelay} \times \text{GPMC_FCLK}^{(15)}$ if (ClkActivationTime and CSOnTime are odd) or (ClkActivationTime and CSOnTime are even)
 - $F = (1 + 0.5 \times \text{CSEExtraDelay}) \times \text{GPMC_FCLK}^{(15)}$ otherwise
 - Case GPMCFCLKDIVIDER = 2:
 - $F = 0.5 \times \text{CSEExtraDelay} \times \text{GPMC_FCLK}^{(15)}$ if ((CSOnTime - ClkActivationTime) is a multiple of 3)
 - $F = (1 + 0.5 \times \text{CSEExtraDelay}) \times \text{GPMC_FCLK}^{(15)}$ if ((CSOnTime - ClkActivationTime - 1) is a multiple of 3)
 - $F = (2 + 0.5 \times \text{CSEExtraDelay}) \times \text{GPMC_FCLK}^{(15)}$ if ((CSOnTime - ClkActivationTime - 2) is a multiple of 3)

- (7) For ADV falling edge (ADV activated):
- Case GPMCFCLKDIVIDER = 0:
 - $G = 0.5 \times \text{ADVExtraDelay} \times \text{GPMC_FCLK}^{(15)}$
 - Case GPMCFCLKDIVIDER = 1:
 - $G = 0.5 \times \text{ADVExtraDelay} \times \text{GPMC_FCLK}^{(15)}$ if (ClkActivationTime and ADVOnTime are odd) or (ClkActivationTime and ADVOnTime are even)
 - $G = (1 + 0.5 \times \text{ADVExtraDelay}) \times \text{GPMC_FCLK}^{(15)}$ otherwise
 - Case GPMCFCLKDIVIDER = 2:
 - $G = 0.5 \times \text{ADVExtraDelay} \times \text{GPMC_FCLK}^{(15)}$ if ((ADVOnTime - ClkActivationTime) is a multiple of 3)
 - $G = (1 + 0.5 \times \text{ADVExtraDelay}) \times \text{GPMC_FCLK}^{(15)}$ if ((ADVOnTime - ClkActivationTime - 1) is a multiple of 3)
 - $G = (2 + 0.5 \times \text{ADVExtraDelay}) \times \text{GPMC_FCLK}^{(15)}$ if ((ADVOnTime - ClkActivationTime - 2) is a multiple of 3)

For ADV rising edge (ADV deactivated) in Reading mode:

- Case GPMCFCLKDIVIDER = 0:
 - $G = 0.5 \times \text{ADVExtraDelay} \times \text{GPMC_FCLK}^{(15)}$
- Case GPMCFCLKDIVIDER = 1:
 - $G = 0.5 \times \text{ADVExtraDelay} \times \text{GPMC_FCLK}^{(15)}$ if (ClkActivationTime and ADVRdOffTime are odd) or (ClkActivationTime and ADVRdOffTime are even)
 - $G = (1 + 0.5 \times \text{ADVExtraDelay}) \times \text{GPMC_FCLK}^{(15)}$ otherwise
- Case GPMCFCLKDIVIDER = 2:
 - $G = 0.5 \times \text{ADVExtraDelay} \times \text{GPMC_FCLK}^{(15)}$ if ((ADVRdOffTime - ClkActivationTime) is a multiple of 3)
 - $G = (1 + 0.5 \times \text{ADVExtraDelay}) \times \text{GPMC_FCLK}^{(15)}$ if ((ADVRdOffTime - ClkActivationTime - 1) is a multiple of 3)
 - $G = (2 + 0.5 \times \text{ADVExtraDelay}) \times \text{GPMC_FCLK}^{(15)}$ if ((ADVRdOffTime - ClkActivationTime - 2) is a multiple of 3)

For ADV rising edge (ADV deactivated) in Writing mode:

- Case GPMCFCLKDIVIDER = 0:
 - $G = 0.5 \times \text{ADVExtraDelay} \times \text{GPMC_FCLK}^{(15)}$
- Case GPMCFCLKDIVIDER = 1:
 - $G = 0.5 \times \text{ADVExtraDelay} \times \text{GPMC_FCLK}^{(15)}$ if (ClkActivationTime and ADVWrOffTime are odd) or (ClkActivationTime and ADVWrOffTime are even)
 - $G = (1 + 0.5 \times \text{ADVExtraDelay}) \times \text{GPMC_FCLK}^{(15)}$ otherwise
- Case GPMCFCLKDIVIDER = 2:
 - $G = 0.5 \times \text{ADVExtraDelay} \times \text{GPMC_FCLK}^{(15)}$ if ((ADVWrOffTime - ClkActivationTime) is a multiple of 3)
 - $G = (1 + 0.5 \times \text{ADVExtraDelay}) \times \text{GPMC_FCLK}^{(15)}$ if ((ADVWrOffTime - ClkActivationTime - 1) is a multiple of 3)
 - $G = (2 + 0.5 \times \text{ADVExtraDelay}) \times \text{GPMC_FCLK}^{(15)}$ if ((ADVWrOffTime - ClkActivationTime - 2) is a multiple of 3)

- (8) For OE falling edge (OE activated) and IO DIR rising edge (Data Bus input direction):
- Case GPMCFCLKDIVIDER = 0:
 - $H = 0.5 \times \text{OEExtraDelay} \times \text{GPMC_FCLK}^{(15)}$
 - Case GPMCFCLKDIVIDER = 1:
 - $H = 0.5 \times \text{OEExtraDelay} \times \text{GPMC_FCLK}^{(15)}$ if (ClkActivationTime and OEOnTime are odd) or (ClkActivationTime and OEOnTime are even)
 - $H = (1 + 0.5 \times \text{OEExtraDelay}) \times \text{GPMC_FCLK}^{(15)}$ otherwise
 - Case GPMCFCLKDIVIDER = 2:
 - $H = 0.5 \times \text{OEExtraDelay} \times \text{GPMC_FCLK}^{(15)}$ if ((OEOnTime - ClkActivationTime) is a multiple of 3)

- $H = (1 + 0.5 \times \text{OEEExtraDelay}) \times \text{GPMC_FCLK}^{(15)}$ if $((\text{OEOnTime} - \text{ClkActivationTime} - 1)$ is a multiple of 3)
- $H = (2 + 0.5 \times \text{OEEExtraDelay}) \times \text{GPMC_FCLK}^{(15)}$ if $((\text{OEOnTime} - \text{ClkActivationTime} - 2)$ is a multiple of 3)

For OE rising edge (OE deactivated):

- Case GPMCFCLKDIVIDER = 0:
 - $H = 0.5 \times \text{OEEExtraDelay} \times \text{GPMC_FCLK}^{(15)}$
- Case GPMCFCLKDIVIDER = 1:
 - $H = 0.5 \times \text{OEEExtraDelay} \times \text{GPMC_FCLK}^{(15)}$ if $(\text{ClkActivationTime}$ and OEOffTime are odd) or $(\text{ClkActivationTime}$ and OEOffTime are even)
 - $H = (1 + 0.5 \times \text{OEEExtraDelay}) \times \text{GPMC_FCLK}^{(15)}$ otherwise
- Case GPMCFCLKDIVIDER = 2:
 - $H = 0.5 \times \text{OEEExtraDelay} \times \text{GPMC_FCLK}^{(15)}$ if $((\text{OEOffTime} - \text{ClkActivationTime})$ is a multiple of 3)
 - $H = (1 + 0.5 \times \text{OEEExtraDelay}) \times \text{GPMC_FCLK}^{(15)}$ if $((\text{OEOffTime} - \text{ClkActivationTime} - 1)$ is a multiple of 3)
 - $H = (2 + 0.5 \times \text{OEEExtraDelay}) \times \text{GPMC_FCLK}^{(15)}$ if $((\text{OEOffTime} - \text{ClkActivationTime} - 2)$ is a multiple of 3)

(9) For WE falling edge (WE activated):

- Case GPMCFCLKDIVIDER = 0:
 - $I = 0.5 \times \text{WEEExtraDelay} \times \text{GPMC_FCLK}^{(15)}$
- Case GPMCFCLKDIVIDER = 1:
 - $I = 0.5 \times \text{WEEExtraDelay} \times \text{GPMC_FCLK}^{(15)}$ if $(\text{ClkActivationTime}$ and WEOnTime are odd) or $(\text{ClkActivationTime}$ and WEOnTime are even)
 - $I = (1 + 0.5 \times \text{WEEExtraDelay}) \times \text{GPMC_FCLK}^{(15)}$ otherwise
- Case GPMCFCLKDIVIDER = 2:
 - $I = 0.5 \times \text{WEEExtraDelay} \times \text{GPMC_FCLK}^{(15)}$ if $((\text{WEOnTime} - \text{ClkActivationTime})$ is a multiple of 3)
 - $I = (1 + 0.5 \times \text{WEEExtraDelay}) \times \text{GPMC_FCLK}^{(15)}$ if $((\text{WEOnTime} - \text{ClkActivationTime} - 1)$ is a multiple of 3)
 - $I = (2 + 0.5 \times \text{WEEExtraDelay}) \times \text{GPMC_FCLK}^{(15)}$ if $((\text{WEOnTime} - \text{ClkActivationTime} - 2)$ is a multiple of 3)

For WE rising edge (WE deactivated):

- Case GPMCFCLKDIVIDER = 0:
 - $I = 0.5 \times \text{WEEExtraDelay} \times \text{GPMC_FCLK}^{(15)}$
- Case GPMCFCLKDIVIDER = 1:
 - $I = 0.5 \times \text{WEEExtraDelay} \times \text{GPMC_FCLK}^{(15)}$ if $(\text{ClkActivationTime}$ and WEOffTime are odd) or $(\text{ClkActivationTime}$ and WEOffTime are even)
 - $I = (1 + 0.5 \times \text{WEEExtraDelay}) \times \text{GPMC_FCLK}^{(15)}$ otherwise
- Case GPMCFCLKDIVIDER = 2:
 - $I = 0.5 \times \text{WEEExtraDelay} \times \text{GPMC_FCLK}^{(15)}$ if $((\text{WEOffTime} - \text{ClkActivationTime})$ is a multiple of 3)
 - $I = (1 + 0.5 \times \text{WEEExtraDelay}) \times \text{GPMC_FCLK}^{(15)}$ if $((\text{WEOffTime} - \text{ClkActivationTime} - 1)$ is a multiple of 3)
 - $I = (2 + 0.5 \times \text{WEEExtraDelay}) \times \text{GPMC_FCLK}^{(15)}$ if $((\text{WEOffTime} - \text{ClkActivationTime} - 2)$ is a multiple of 3)

(10) $J = \text{GPMC_FCLK}^{(15)}$

(11) First transfer only for CLK DIV 1 mode.

(12) Half cycle; for all data after initial transfer for CLK DIV 1 mode.

(13) Half cycle of GPMC_CLKOUT; for all data for modes other than CLK DIV 1 mode. GPMC_CLKOUT divide down from GPMC_FCLK.

(14) In GPMC_CS*n*[*i*], *i* is equal to 0, 1, 2 or 3. In GPMC_WAIT[*j*], *j* is equal to 0 or 1.

(15) P = GPMC_CLK period in ns

(16) Related to the GPMC_CLK output clock maximum and minimum frequencies programmable in the GPMC module by setting the GPMC_CONFIG1_1 configuration register bit field GPMCFCLKDIVIDER.

(17) The jitter probability density can be approximated by a Gaussian function.

(18) For `div_by_1_mode`:

- GPMC_CONFIG1_1 register: GPMCFCLKDIVIDER = 0h:
 - GPMC_CLK frequency = GPMC_FCLK frequency

For GPMC_FCLK_MUX:


- CTRLMMR_GPMC_CLKSEL[1-0] CLK_SEL = 01 = PER1_PLL_CLKOUT / 3 = 300 / 3 = 100MHz

For TIMEPARAGRANULARITY_X1:

- GPMC_CONFIG1_1 Register: TIMEPARAGRANULARITY = 0h = x1 latencies (affecting RD/WRCYCLETIME, RD/WRACCESSTIME, PAGEBURSTACCESSTIME, CSONTIME, CSRD/WROFFTIME, ADVONTIME, ADVRD/WROFFTIME, OEONTIME, OEOFFTIME, WEONTIME, WEOFFTIME, CYCLE2CYCLEDELAY, BUSTURNAROUND, TIMEOUTSTARTVALUE, WRDATAONADMUXBUS)

For no extra_delay:


- GPMC_CONFIG2_i Register: CSEXTRADelay = 0h = CSn Timing control signal is not delayed
- GPMC_CONFIG4_i Register: WEEXTRADelay = 0h = nWE timing control signal is not delayed
- GPMC_CONFIG4_i Register: OEEXTRADelay = 0h = nOE timing control signal is not delayed
- GPMC_CONFIG3_i Register: ADVEXTRADelay = 0h = nADV timing control signal is not delayed

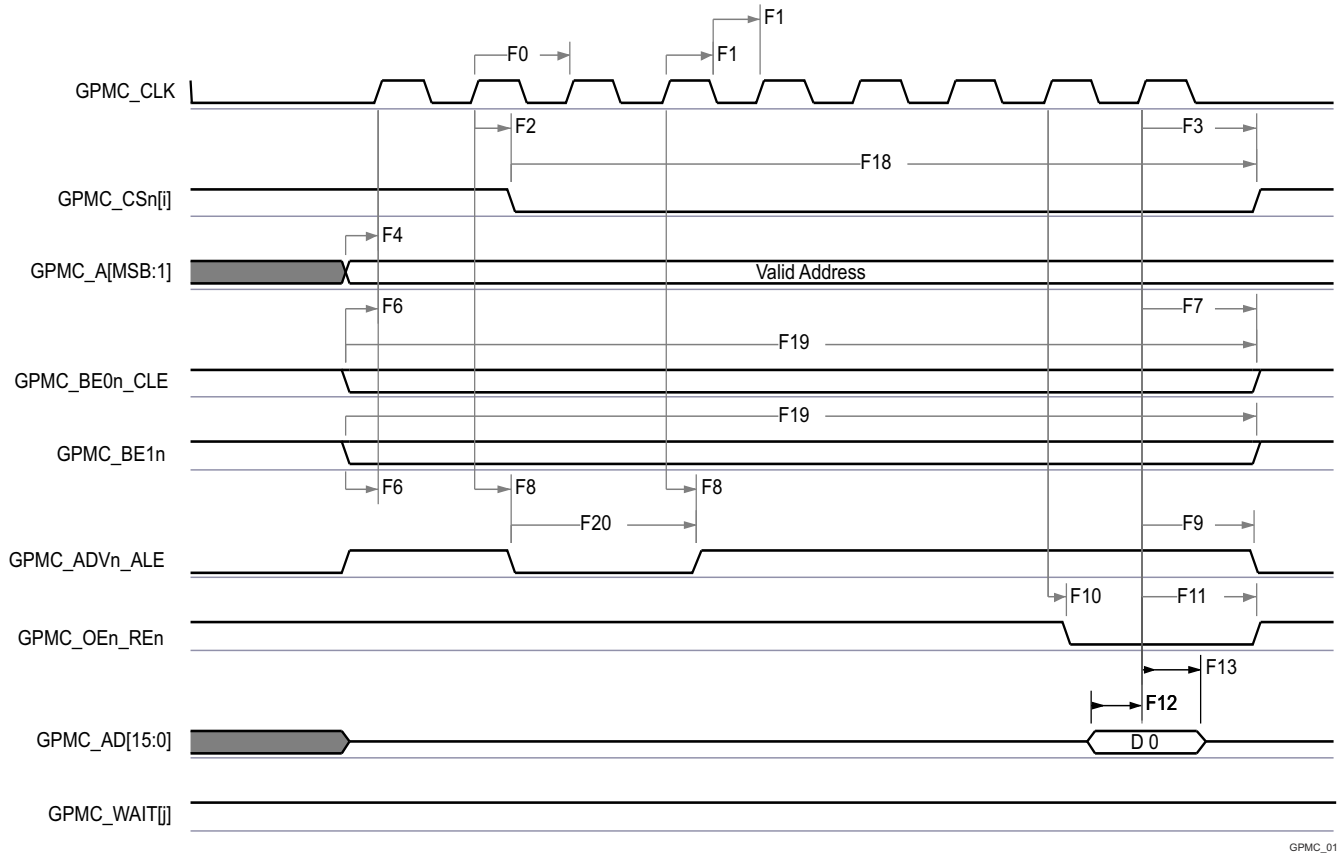

GPMC_01

- A. In GPMC_CS[n], i is equal to 0, 1, 2 or 3.
 B. In GPMC_WAIT[j], j is equal to 0 or 1.


Figure 7-37. GPMC and NOR Flash — Synchronous Single Read (GPMCFCLKDIVIDER = 0)

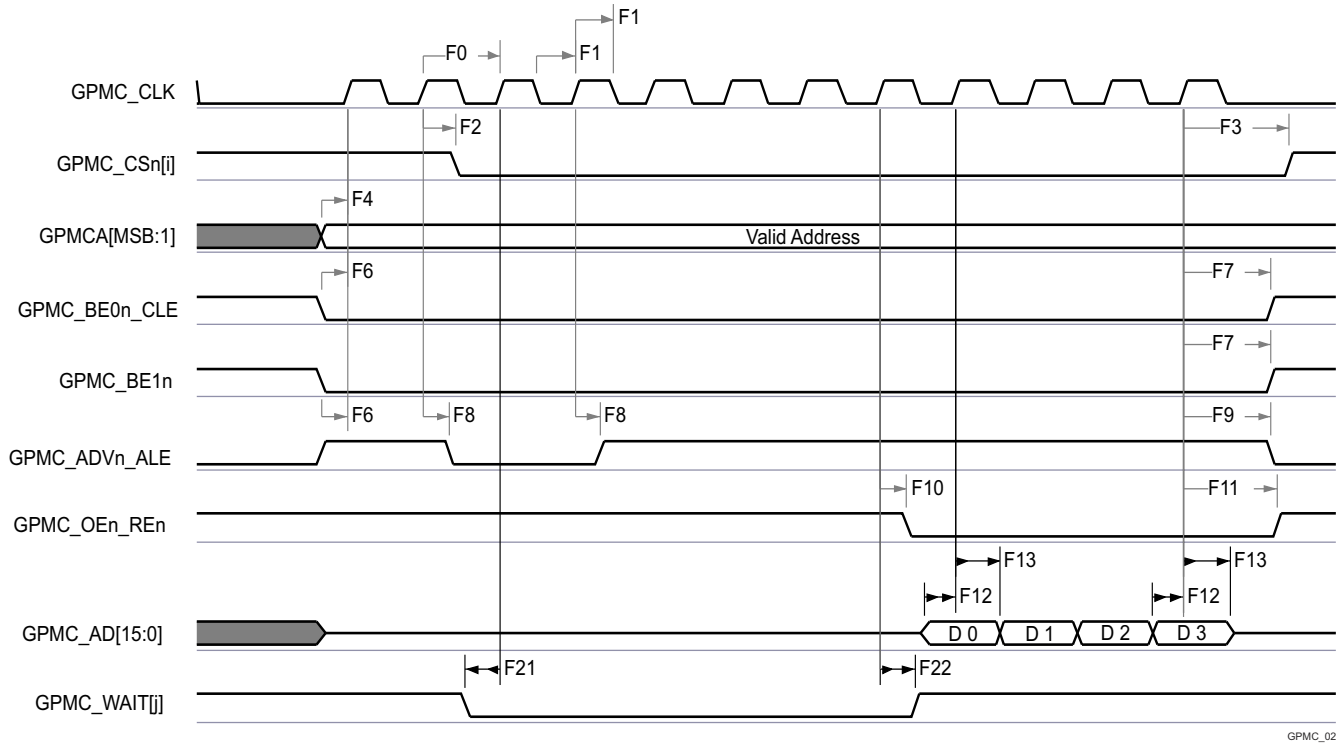

GPMC_02

- A. In GPMC_CS[n][i], i is equal to 0, 1, 2 or 3.
- B. In GPMC_WAIT[j], j is equal to 0 or 1.

Figure 7-38. GPMC and NOR Flash — Synchronous Burst Read — 4x16-bit (GPMCFCLKDIVIDER = 0)

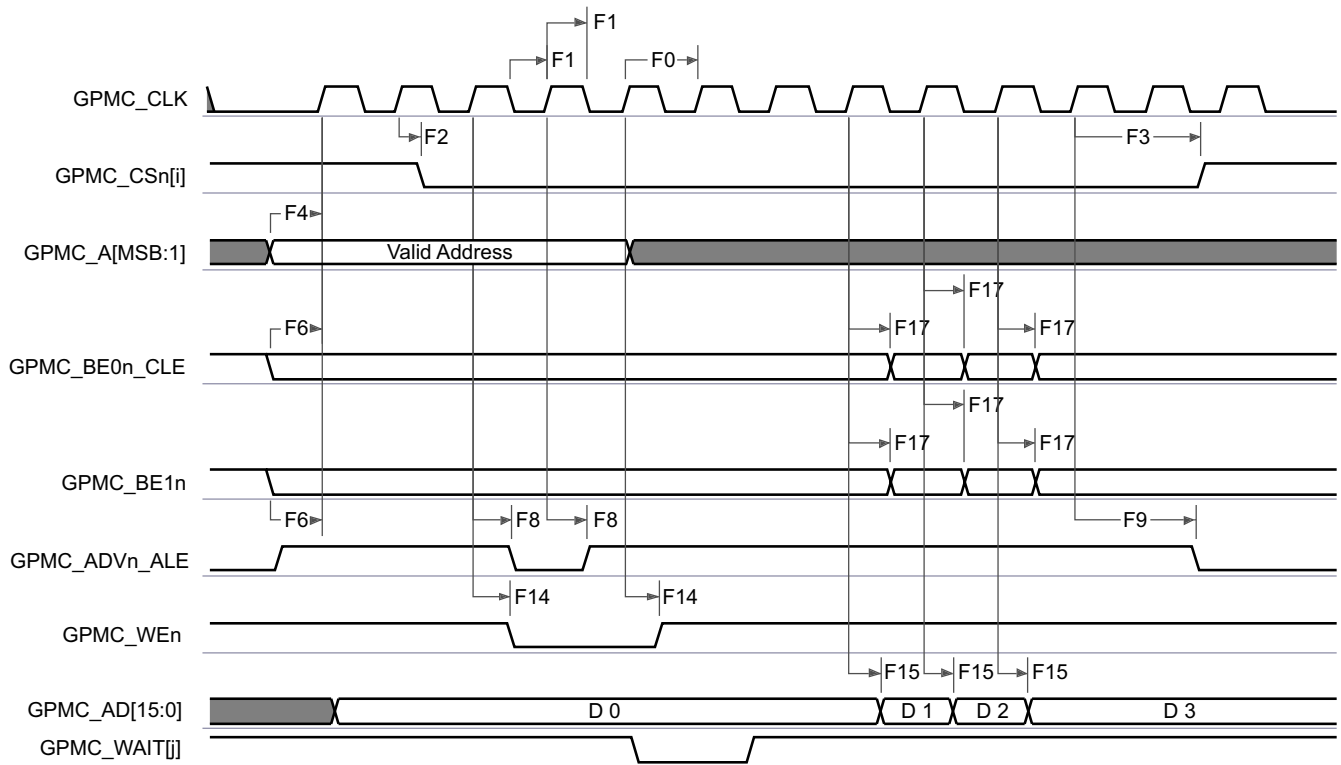


GPMC_03

- A. In GPMC_CS[n][i], i is equal to 0, 1, 2 or 3.

B. In GPMC_WAIT[j], j is equal to 0 or 1.

Figure 7-39. GPMC and NOR Flash—Synchronous Burst Write (GPMCFCLKDIVIDER = 0)

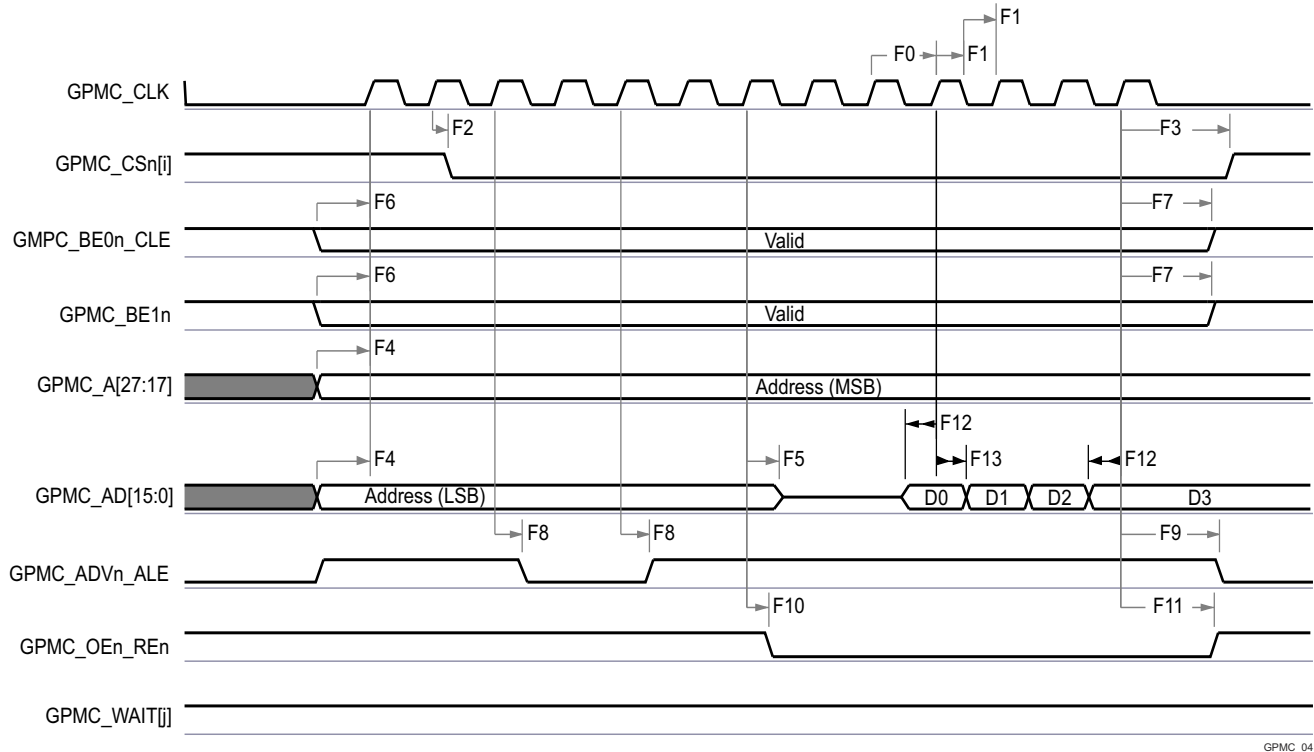


GPMC_04

A. In GPMC_CS[n][i], i is equal to 0, 1, 2 or 3.

B. In GPMC_WAIT[j], j is equal to 0 or 1.

Figure 7-40. GPMC and Multiplexed NOR Flash — Synchronous Burst Read

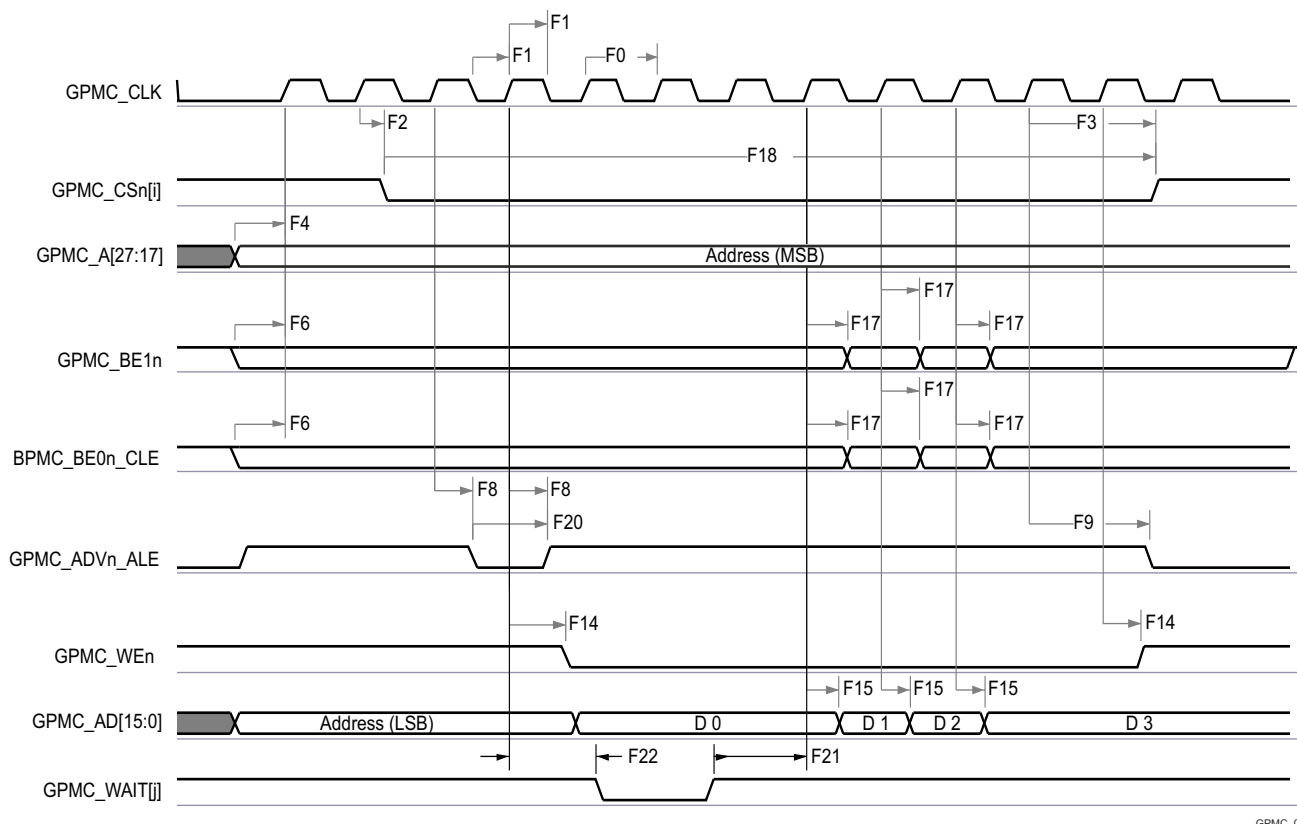

GPMC_05

- A. In GPMC_CSn[i], i is equal to 0, 1, 2 or 3.
 B. In GPMC_WAIT[j], j is equal to 0 or 1.

Figure 7-41. GPMC and Multiplexed NOR Flash — Synchronous Burst Write

7.10.5.8.2 GPMC and NOR Flash — Asynchronous Mode

Table 7-54 and Table 7-55 present timing requirements and switching characteristics for GPMC and NOR Flash — Asynchronous Mode.

Table 7-54. GPMC and NOR Flash Timing Requirements – Asynchronous Mode

see Figure 7-42, Figure 7-43, Figure 7-44, and Figure 7-46

| NO. | PARAMETER | DESCRIPTION | MODE | MIN | MAX | UNIT |
|---------------------------------|----------------------|---------------------------------------|--|-----|------------------|------|
| FA5 ⁽¹⁾ | $t_{acc(d)}$ | Data access time | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | | H ⁽⁴⁾ | ns |
| FA2 ₀ ⁽²⁾ | $t_{acc1-pgmode(d)}$ | Page mode successive data access time | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | | P ⁽³⁾ | ns |
| FA2 ₁ ⁽¹⁾ | $t_{acc2-pgmode(d)}$ | Page mode first data access time | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | | H ⁽⁴⁾ | ns |

- (1) The FA5 parameter illustrates the amount of time required to internally sample input data. It is expressed in number of GPMC functional clock cycles. From start of read cycle and after FA5 functional clock cycles, input data is internally sampled by active functional clock edge. FA5 value must be stored inside the AccessTime register bit field.
- (2) The FA20 parameter illustrates amount of time required to internally sample successive input page data. It is expressed in number of GPMC functional clock cycles. After each access to input page data, next input page data is internally sampled by active functional clock edge after FA20 functional clock cycles. The FA20 value must be stored in the PageBurstAccessTime register bit field.
- (3) $P = \text{PageBurstAccessTime} \times (\text{TimeParaGranularity} + 1) \times \text{GPMC_FCLK}^{(5)}$
- (4) $H = \text{AccessTime} \times (\text{TimeParaGranularity} + 1) \times \text{GPMC_FCLK}^{(5)}$
- (5) GPMC_FCLK is general-purpose memory controller internal functional clock period in ns.

Table 7-55. GPMC and NOR Flash Switching Characteristics – Asynchronous Mode

see [Figure 7-42](#), [Figure 7-43](#), [Figure 7-44](#), [Figure 7-45](#), [Figure 7-46](#), and [Figure 7-47](#)

| NO. | PARAMETER | DESCRIPTION | MODE ⁽¹⁵⁾ | MIN | MAX | UNIT |
|------|-----------------------|---|--|--|--|------|
| | | | | 133 MHz | | |
| | $t_{R(d)}$ | Rise time, output data GPMC_AD[15:0] | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | | 2.0 | ns |
| | $t_{F(d)}$ | Fall time, output data GPMC_AD[15:0] | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | | 2.0 | ns |
| FA0 | $t_{w(be x)nV}$ | Pulse duration, output lower-byte enable and command latch enable GPMC_BE0n_CLE, output upper-byte enable GPMC_BE1n valid time | Read Write | N ⁽¹²⁾ N ⁽¹²⁾ | | ns |
| FA1 | $t_{w(csnV)}$ | Pulse duration, output chip select GPMC_CSn[j] ⁽¹³⁾ low | Read Write | A ⁽¹⁾ A ⁽¹⁾ | | ns |
| FA3 | $t_{d(csnV-advnV)}$ | Delay time, output chip select GPMC_CSn[j] ⁽¹³⁾ valid to output address valid and address latch enable GPMC_ADVn_ALE invalid | Read Write | B - 2.1 ⁽²⁾ B + 2.1 ⁽²⁾ | B + 2.1 ⁽²⁾ B + 2.1 ⁽²⁾ | ns |
| FA4 | $t_{d(csnV-oenV)}$ | Delay time, output chip select GPMC_CSn[j] ⁽¹³⁾ valid to output enable GPMC_OEn_REn invalid (Single read) | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | C - 2.1 ⁽³⁾ | C + 2.1 ⁽³⁾ | ns |
| FA9 | $t_{d(aV-csnV)}$ | Delay time, output address GPMC_A[27:1] valid to output chip select GPMC_CSn[j] ⁽¹³⁾ valid | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | J - 2.1 ⁽⁹⁾ | J + 2.1 ⁽⁹⁾ | ns |
| FA10 | $t_{d(be x)nV-csnV)}$ | Delay time, output lower-byte enable and command latch enable GPMC_BE0n_CLE, output upper-byte enable GPMC_BE1n valid to output chip select GPMC_CSn[j] ⁽¹³⁾ valid | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | J - 2.1 ⁽⁹⁾ | J + 2.1 ⁽⁹⁾ | ns |
| FA12 | $t_{d(csnV-advnV)}$ | Delay time, output chip select GPMC_CSn[j] ⁽¹³⁾ valid to output address valid and address latch enable GPMC_ADVn_ALE valid | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | K - 2.1 ⁽¹⁰⁾ | K + 2.1 ⁽¹⁰⁾ | ns |
| FA13 | $t_{d(csnV-oenV)}$ | Delay time, output chip select GPMC_CSn[j] ⁽¹³⁾ valid to output enable GPMC_OEn_REn valid | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | L - 2.1 ⁽¹¹⁾ | L + 2.1 ⁽¹¹⁾ | ns |
| FA16 | $t_{w(aV)}$ | Pulse duration output address GPMC_A[26:1] invalid between 2 successive read and write accesses | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | G ⁽⁷⁾ | | ns |
| FA18 | $t_{d(csnV-oenV)}$ | Delay time, output chip select GPMC_CSn[j] ⁽¹³⁾ valid to output enable GPMC_OEn_REn invalid (Burst read) | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | I - 2.1 ⁽⁸⁾ | I + 2.1 ⁽⁸⁾ | ns |
| FA20 | $t_{w(aV)}$ | Pulse duration, output address GPMC_A[27:1] valid - 2nd, 3rd, and 4th accesses | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | D ⁽⁴⁾ | | ns |
| FA25 | $t_{d(csnV-wenV)}$ | Delay time, output chip select GPMC_CSn[j] ⁽¹³⁾ valid to output write enable GPMC_WEn valid | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | E - 2.1 ⁽⁵⁾ | E + 2.1 ⁽⁵⁾ | ns |
| FA27 | $t_{d(csnV-wenV)}$ | Delay time, output chip select GPMC_CSn[j] ⁽¹³⁾ valid to output write enable GPMC_WEn invalid | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | F - 2.1 ⁽⁶⁾ | F + 2.1 ⁽⁶⁾ | ns |
| FA28 | $t_{d(wenV-dV)}$ | Delay time, output write enable GPMC_WEn valid to output data GPMC_AD[15:0] valid | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | | 2.1 | ns |
| FA29 | $t_{d(dV-csnV)}$ | Delay time, output data GPMC_AD[15:0] valid to output chip select GPMC_CSn[j] ⁽¹³⁾ valid | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | J - 2.1 ⁽⁹⁾ | J + 2.1 ⁽⁹⁾ | ns |

Table 7-55. GPMC and NOR Flash Switching Characteristics – Asynchronous Mode (continued)

see [Figure 7-42](#), [Figure 7-43](#), [Figure 7-44](#), [Figure 7-45](#), [Figure 7-46](#), and [Figure 7-47](#)

| NO. | PARAMETER | DESCRIPTION | MODE ⁽¹⁵⁾ | MIN | MAX | UNIT |
|------|-------------------|--|--|---------|-----|------|
| | | | | 133 MHz | | |
| FA37 | $t_{d(oenV-alV)}$ | Delay time, output enable GPMC_OEn_REn valid to output address GPMC_AD[15:0] phase end | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | | 2.1 | ns |

- (1) For single read: $A = (CSRdOffTime - CSONTime) \times (TimeParaGranularity + 1) \times GPMC_FCLK^{(14)}$
 For single write: $A = (CSWrOffTime - CSONTime) \times (TimeParaGranularity + 1) \times GPMC_FCLK^{(14)}$
 For burst read: $A = (CSRdOffTime - CSONTime + (n - 1) \times PageBurstAccessTime) \times (TimeParaGranularity + 1) \times GPMC_FCLK^{(14)}$
 For burst write: $A = (CSWrOffTime - CSONTime + (n - 1) \times PageBurstAccessTime) \times (TimeParaGranularity + 1) \times GPMC_FCLK^{(14)}$
 with n being the page burst access number
- (2) For reading: $B = ((ADVrdOffTime - CSONTime) \times (TimeParaGranularity + 1) + 0.5 \times (ADVExtraDelay - CSEExtraDelay)) \times GPMC_FCLK^{(14)}$
 For writing: $B = ((ADVwrOffTime - CSONTime) \times (TimeParaGranularity + 1) + 0.5 \times (ADVExtraDelay - CSEExtraDelay)) \times GPMC_FCLK^{(14)}$
- (3) $C = ((OEOffTime - CSONTime) \times (TimeParaGranularity + 1) + 0.5 \times (OEEExtraDelay - CSEExtraDelay)) \times GPMC_FCLK^{(14)}$
- (4) $D = PageBurstAccessTime \times (TimeParaGranularity + 1) \times GPMC_FCLK^{(14)}$
- (5) $E = ((WEOntime - CSONTime) \times (TimeParaGranularity + 1) + 0.5 \times (WEEExtraDelay - CSEExtraDelay)) \times GPMC_FCLK^{(14)}$
- (6) $F = ((WEOffTime - CSONTime) \times (TimeParaGranularity + 1) + 0.5 \times (WEEExtraDelay - CSEExtraDelay)) \times GPMC_FCLK^{(14)}$
- (7) $G = Cycle2CycleDelay \times GPMC_FCLK^{(14)}$
- (8) $I = ((OEOffTime + (n - 1) \times PageBurstAccessTime - CSONTime) \times (TimeParaGranularity + 1) + 0.5 \times (OEEExtraDelay - CSEExtraDelay)) \times GPMC_FCLK^{(14)}$
- (9) $J = (CSONTime \times (TimeParaGranularity + 1) + 0.5 \times CSEExtraDelay) \times GPMC_FCLK^{(14)}$
- (10) $K = ((ADVOnTime - CSONTime) \times (TimeParaGranularity + 1) + 0.5 \times (ADVExtraDelay - CSEExtraDelay)) \times GPMC_FCLK^{(14)}$
- (11) $L = ((OEOnTime - CSONTime) \times (TimeParaGranularity + 1) + 0.5 \times (OEEExtraDelay - CSEExtraDelay)) \times GPMC_FCLK^{(14)}$
- (12) For single read: $N = RdCycleTime \times (TimeParaGranularity + 1) \times GPMC_FCLK^{(14)}$
 For single write: $N = WrCycleTime \times (TimeParaGranularity + 1) \times GPMC_FCLK^{(14)}$
 For burst read: $N = (RdCycleTime + (n - 1) \times PageBurstAccessTime) \times (TimeParaGranularity + 1) \times GPMC_FCLK^{(14)}$
 For burst write: $N = (WrCycleTime + (n - 1) \times PageBurstAccessTime) \times (TimeParaGranularity + 1) \times GPMC_FCLK^{(14)}$
- (13) In GPMC_CSn[i], i is equal to 0, 1, 2 or 3.
- (14) GPMC_FCLK is general-purpose memory controller internal functional clock period in ns.
- (15) For div_by_1_mode:


- GPMC_CONFIG1_i Register: GPMCFCLKDIVIDER = 0h:
 - GPMC_CLK frequency = GPMC_FCLK frequency

For GPMC_FCLK_MUX:

- CTRLMMR_GPMC_CLKSEL[1-0] CLK_SEL = 00 = CPSWHS DIV_CLKOUT3 = 2000/15 = 133.33 MHz

For TIMEPARAGRANULARITY_X1:


- GPMC_CONFIG1_i Register: TIMEPARAGRANULARITY = 0h = x1 latencies (affecting RD/WRCYCLETIME, RD/WRACCESSTIME, PAGEBURSTACCESSTIME, CSONTIME, CSRd/WROFFTIME, ADVONTIME, ADVRD/WROFFTIME, OEONTIME, OEOFFTIME, WEONTIME, WEOFFTIME, CYCLE2CYCLEDELAY, BUSTURNAROUND, TIMEOUTSTARTVALUE, WRDATAONADMUXBUS)

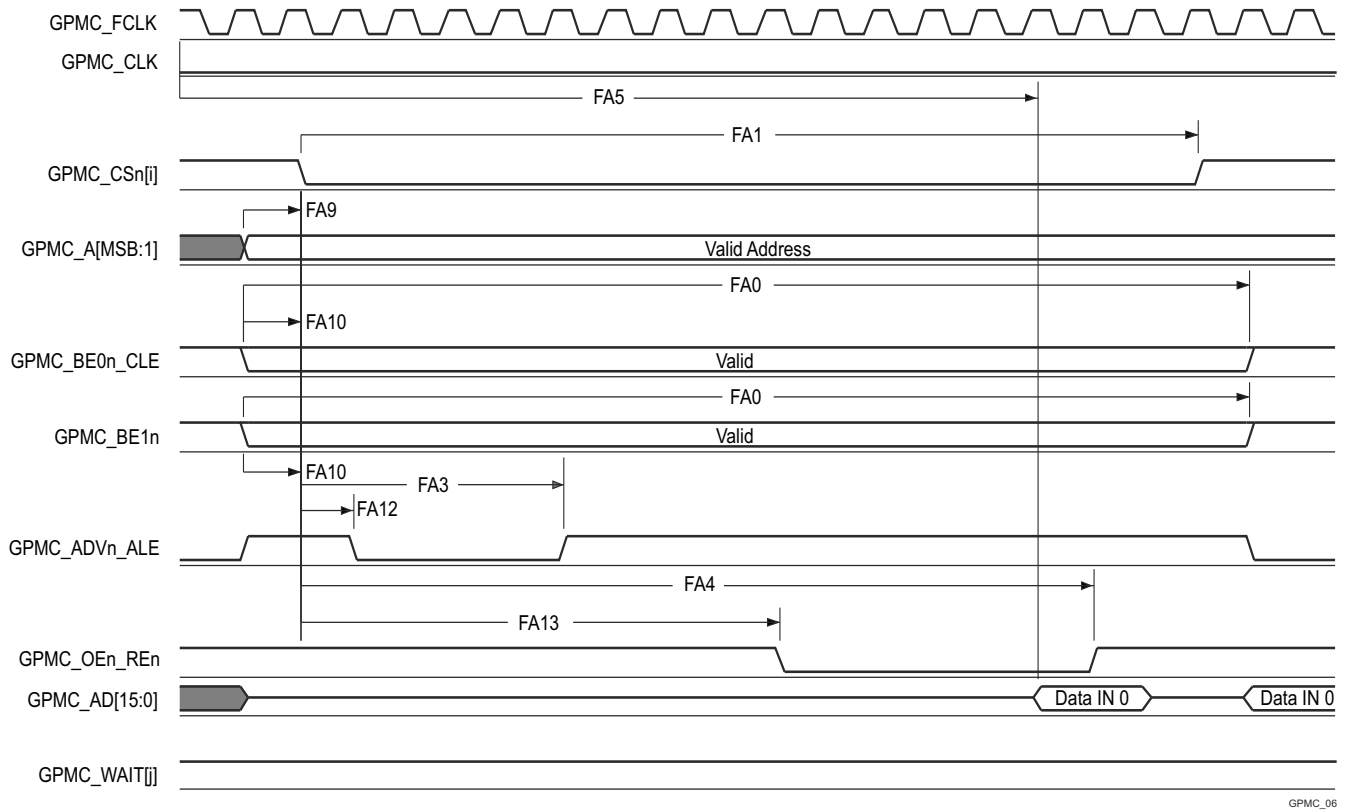

GPMC_06

- A. In GPMC_CS[n], i is equal to 0, 1, 2 or 3. In GPMC_WAIT[j], j is equal to 0 or 1.
- B. FA5 parameter illustrates amount of time required to internally sample input data. It is expressed in number of GPMC functional clock cycles. From start of read cycle and after FA5 functional clock cycles, input data will be internally sampled by active functional clock edge. FA5 value must be stored inside AccessTime register bits field.
- C. GPMC_FCLK is an internal clock (GPMC functional clock) not provided externally.


Figure 7-42. GPMC and NOR Flash — Asynchronous Read — Single Word

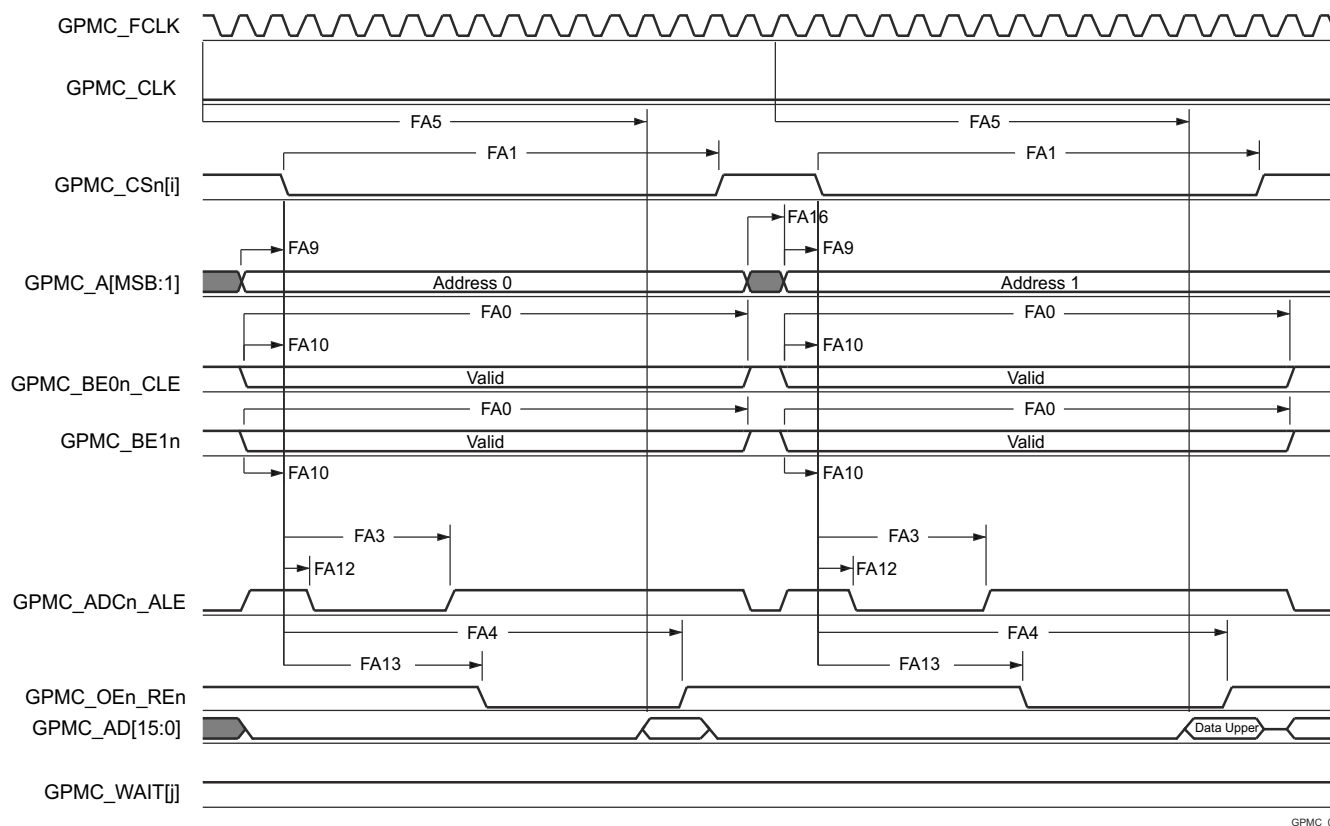

GPMC_07

- A. In GPMC_CS*n*[*i*], *i* is equal to 0, 1, 2 or 3. In GPMC_WAIT[j], *j* is equal to 0 or 1.
- B. FA5 parameter illustrates amount of time required to internally sample input data. It is expressed in number of GPMC functional clock cycles. From start of read cycle and after FA5 functional clock cycles, input data will be internally sampled by active functional clock edge. FA5 value must be stored inside AccessTime register bits field.
- C. GPMC_FCLK is an internal clock (GPMC functional clock) not provided externally.


Figure 7-43. GPMC and NOR Flash — Asynchronous Read — 32-Bit

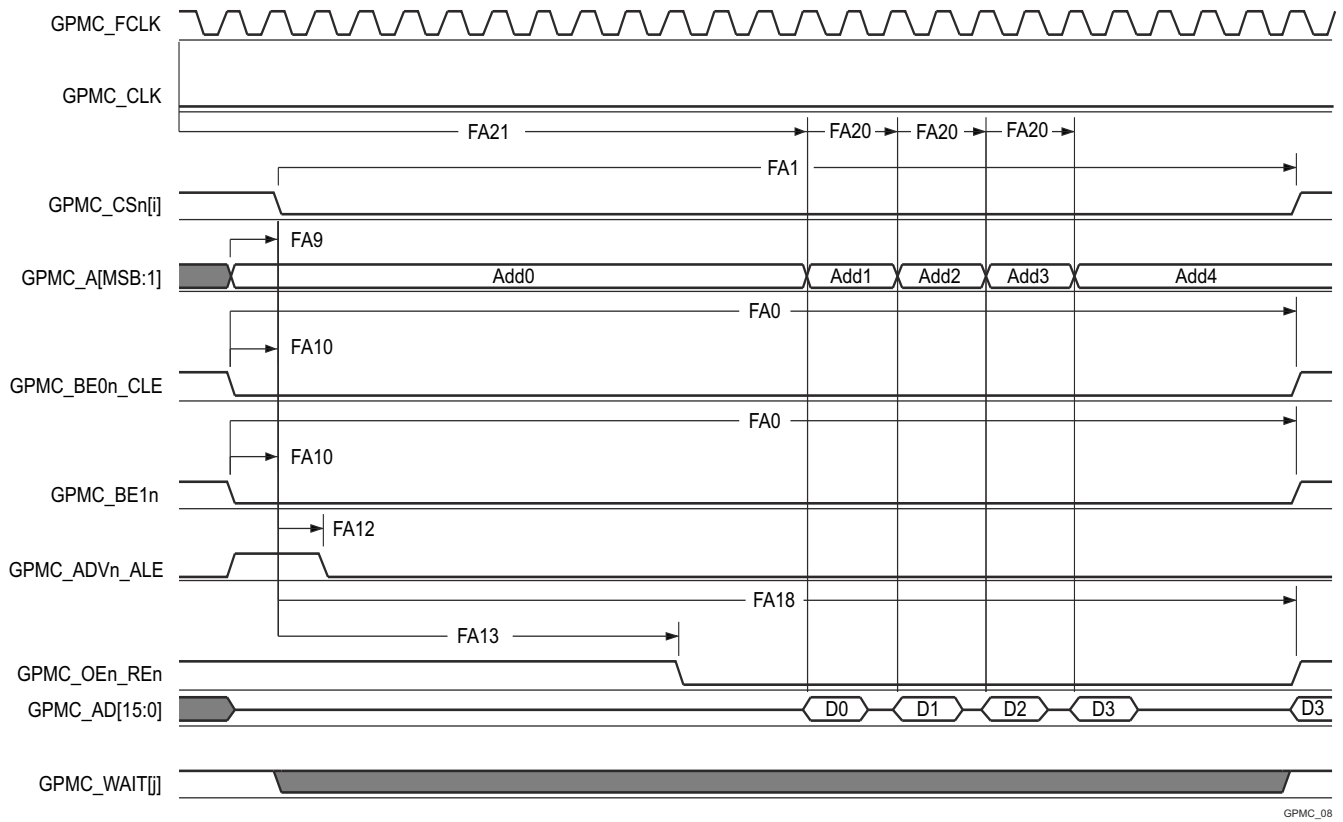

GPMC_08

- In GPMC_CSn[i], i is equal to 0, 1, 2 or 3. In GPMC_WAIT[j], j is equal to 0 or 1.
- FA21 parameter illustrates amount of time required to internally sample first input page data. It is expressed in number of GPMC functional clock cycles. From start of read cycle and after FA21 functional clock cycles, first input page data will be internally sampled by active functional clock edge. FA21 calculation must be stored inside AccessTime register bits field.
- FA20 parameter illustrates amount of time required to internally sample successive input page data. It is expressed in number of GPMC functional clock cycles. After each access to input page data, next input page data will be internally sampled by active functional clock edge after FA20 functional clock cycles. FA20 is also the duration of address phases for successive input page data (excluding first input page data). FA20 value must be stored in PageBurstAccessTime register bits field.
- GPMC_FCLK is an internal clock (GPMC functional clock) not provided externally.


Figure 7-44. GPMC and NOR Flash — Asynchronous Read — Page Mode 4x16-Bit

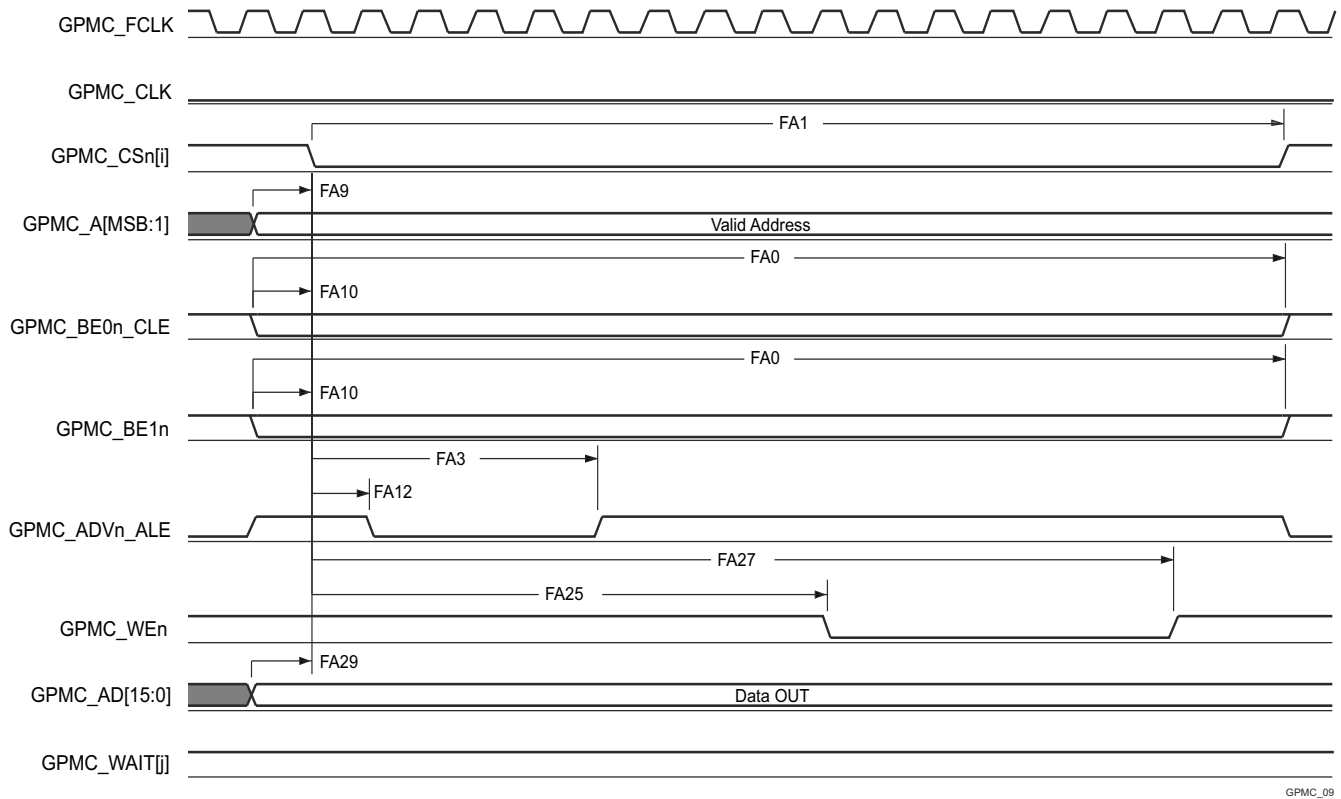

GPMC_09

A. In GPMC_CSn[i], i is equal to 0, 1, 2 or 3. In GPMC_WAIT[j], j is equal to 0 or 1.


Figure 7-45. GPMC and NOR Flash — Asynchronous Write — Single Word

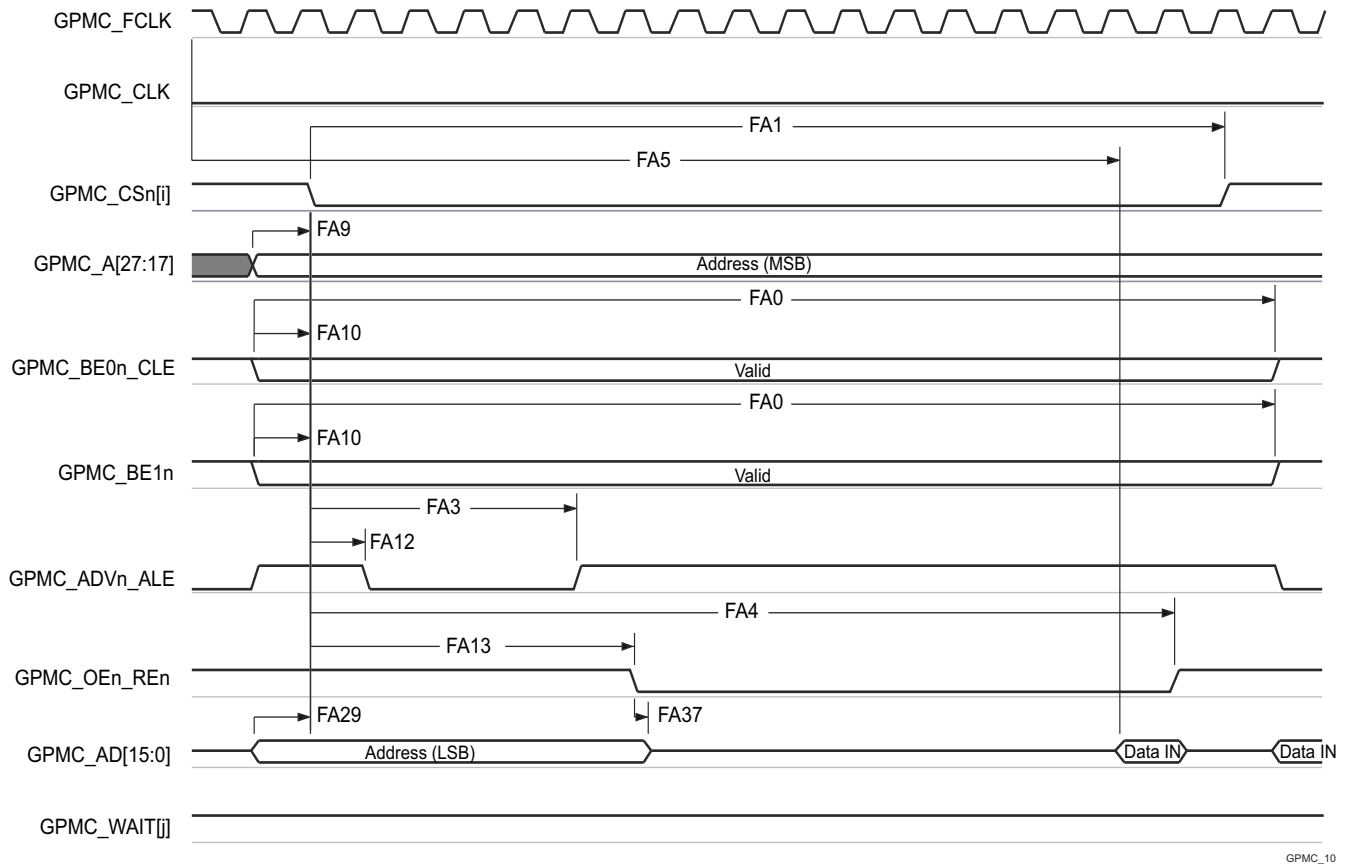

GPMC_10

- A. In GPMC_CSn[i], i is equal to 0, 1, 2 or 3. In GPMC_WAIT[j], j is equal to 0 or 1.
- B. FA5 parameter illustrates amount of time required to internally sample input data. It is expressed in number of GPMC functional clock cycles. From start of read cycle and after FA5 functional clock cycles, input data will be internally sampled by active functional clock edge. FA5 value must be stored inside AccessTime register bits field.
- C. GPMC_FCLK is an internal clock (GPMC functional clock) not provided externally.

Figure 7-46. GPMC and Multiplexed NOR Flash — Asynchronous Read — Single Word

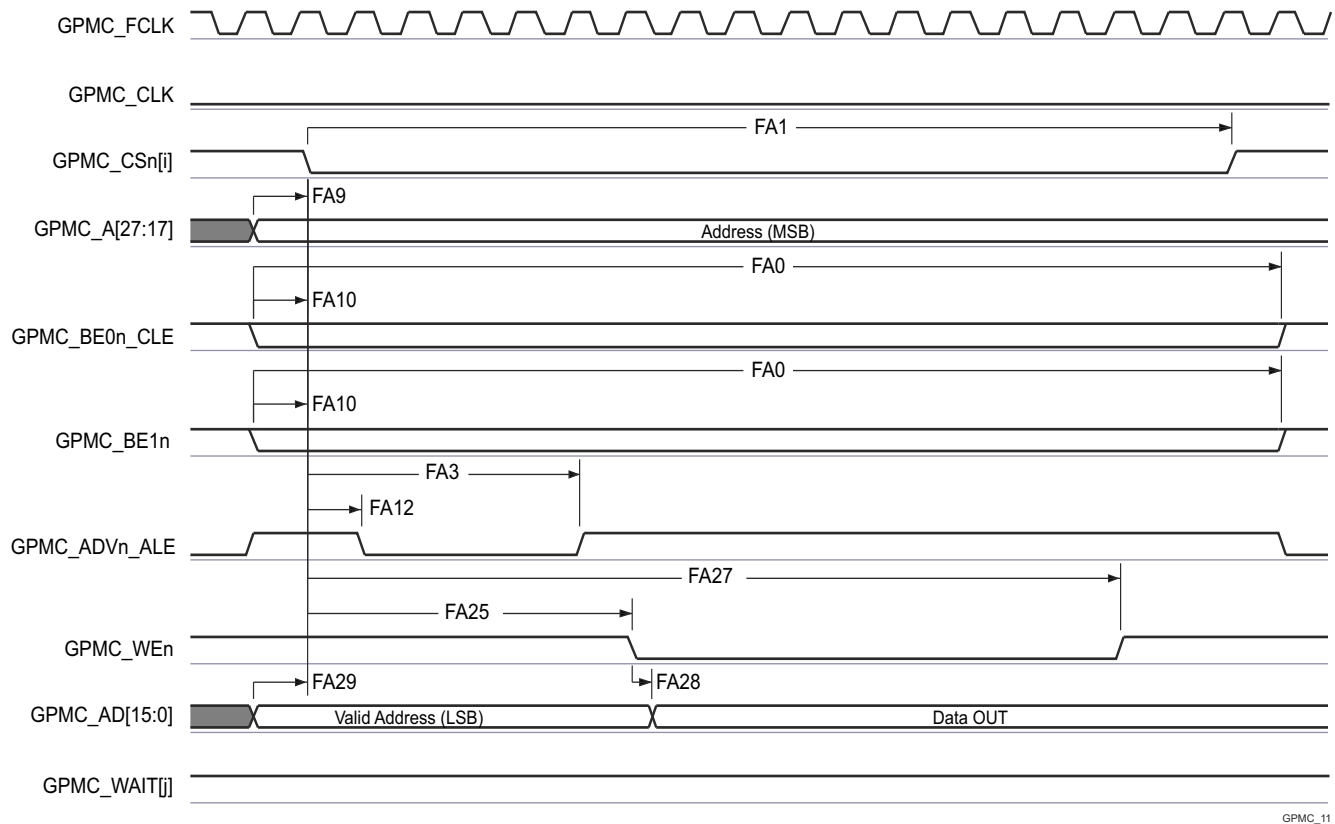

A. In GPMC_CSn[i], i is equal to 0, 1, 2 or 3. In GPMC_WAIT[j], j is equal to 0 or 1.

Figure 7-47. GPMC and Multiplexed NOR Flash — Asynchronous Write — Single Word

7.10.5.8.3 GPMC and NAND Flash — Asynchronous Mode

Table 7-56 and Table 7-57 present timing requirements and switching characteristics for GPMC and NAND Flash — Asynchronous Mode.

Table 7-56. GPMC and NAND Flash Timing Requirements – Asynchronous Mode

see Figure 7-50

| NO. | PARAMETER | DESCRIPTION | MODE ⁽⁴⁾ | MIN | MAX | UNIT |
|----------------------|--------------|--|--|---------|------------------|------|
| | | | | 133 MHz | | |
| GNF12 ⁽¹⁾ | $t_{acc(d)}$ | Access time, input data GPMC_AD[15:0] ⁽³⁾ | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | | J ⁽²⁾ | ns |

(1) The GNF12 parameter illustrates the amount of time required to internally sample input data. It is expressed in number of GPMC functional clock cycles. From start of the read cycle and after GNF12 functional clock cycles, input data is internally sampled by the active functional clock edge. The GNF12 value must be stored inside AccessTime register bit field.

(2) $J = \text{AccessTime} \times (\text{TimeParaGranularity} + 1) \times \text{GPMC_FCLK}^{(3)}$

(3) GPMC_FCLK is general-purpose memory controller internal functional clock period in ns.

(4) For div_by_1_mode:

- GPMC_CONFIG1_i Register: GPMCFCLKDIVIDER = 0h:
 - GPMC_CLK frequency = GPMC_FCLK frequency

For GPMC_FCLK_MUX:

- CTRLMMR_GPMC_CLKSEL[1-0] CLK_SEL = 00 = CPSWHS DIV_CLKOUT3 = 2000/15 = 133.33 MHz

For TIMEPARAGRANULARITY_X1:

- GPMC_CONFIG1_i Register: TIMEPARAGRANULARITY = 0h = x1 latencies (affecting RD/WRCYCLETIME, RD/WRACCESSTIME, PAGEBURSTACCESSTIME, CSONTIME, CSRD/WROFFTIME, ADVONTIME, ADVRD/WROFFTIME, OEONTIME, OEOFFTIME, WEONTIME, WEOFFTIME, CYCLE2CYCLEDELAY, BUSTURNAROUND, TIMEOUTSTARTVALUE, WRDATAONADMUXBUS)

Table 7-57. GPMC and NAND Flash Switching Characteristics – Asynchronous Mode

see Figure 7-48, Figure 7-49, Figure 7-50 and Figure 7-51

| NO. | PARAMETER | DESCRIPTION | MODE ⁽⁴⁾ | MIN | MAX | UNIT |
|------|----------------------|---|--|-------|-------|------|
| | $t_{R(d)}$ | Rise time, output data GPMC_AD[15:0] | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | | 2.0 | ns |
| | $t_{F(d)}$ | Fall time, output data GPMC_AD[15:0] | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | | 2.0 | ns |
| GNF0 | $t_{w(wenV)}$ | Pulse duration, output write enable GPMC_WEn valid | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | A | TBD | ns |
| GNF1 | $t_{d(csnV-wenV)}$ | Delay time, output chip select GPMC_CS <i>n</i> [<i>j</i>] ⁽²⁾ valid to output write enable GPMC_WEn valid | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | B - 2 | B + 2 | ns |
| GNF2 | $t_{w(cleH-wenV)}$ | Delay time, output lower-byte enable and command latch enable GPMC_BE0n_CLE high to output write enable GPMC_WEn valid | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | C - 2 | C + 2 | ns |
| GNF3 | $t_{w(wenV-dV)}$ | Delay time, output data GPMC_AD[15:0] valid to output write enable GPMC_WEn valid | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | D - 2 | D + 2 | ns |
| GNF4 | $t_{w(wenIV-dIV)}$ | Delay time, output write enable GPMC_WEn invalid to output data GPMC_AD[15:0] invalid | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | E - 2 | E + 2 | ns |
| GNF5 | $t_{w(wenIV-cleIV)}$ | Delay time, output write enable GPMC_WEn invalid to output lower-byte enable and command latch enable GPMC_BE0n_CLE invalid | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | F - 2 | F + 2 | ns |

Table 7-57. GPMC and NAND Flash Switching Characteristics – Asynchronous Mode (continued)

see Figure 7-48, Figure 7-49, Figure 7-50 and Figure 7-51

| NO. | PARAMETER | | MODE ⁽⁴⁾ | MIN | MAX | UNIT |
|-------|------------------------|--|--|-------|-------|------|
| GNF6 | $t_{w(wenIV-CSn[i]V)}$ | Delay time, output write enable GPMC_WEn invalid to output chip select GPMC_CS <i>n</i> [<i>i</i>] ⁽²⁾ invalid | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | G - 2 | G + 2 | ns |
| GNF7 | $t_{w(aleH-wenV)}$ | Delay time, output address valid and address latch enable GPMC_ADV <i>n</i> _ALE high to output write enable GPMC_WEn valid | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | C - 2 | C + 2 | ns |
| GNF8 | $t_{w(wenIV-aleV)}$ | Delay time, output write enable GPMC_WEn invalid to output address valid and address latch enable GPMC_ADV <i>n</i> _ALE invalid | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | F - 2 | F + 2 | ns |
| GNF9 | $t_{c(wen)}$ | Cycle time, write | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | | H | ns |
| GNF10 | $t_{d(csnV-oenV)}$ | Delay time, output chip select GPMC_CS <i>n</i> [<i>i</i>] ⁽²⁾ valid to output enable GPMC_OEn_REn valid | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | I - 2 | I + 2 | ns |
| GNF13 | $t_{w(oenV)}$ | Pulse duration, output enable GPMC_OEn_REn valid | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | | K | ns |
| GNF14 | $t_{c(oen)}$ | Cycle time, read | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | L | | ns |
| GNF15 | $t_{w(oenIV-CSn[i]V)}$ | Delay time, output enable GPMC_OEn_REn invalid to output chip select GPMC_CS <i>n</i> [<i>i</i>] ⁽²⁾ invalid | div_by_1_mode; GPMC_FCLK_MUX; TIMEPARAGRANULARITY_X1 | M - 2 | M + 2 | ns |

 (1) $A = (WEOffTime - WEOnTime) \times (TimeParaGranularity + 1) \times GPMC_FCLK^{(3)}$

 (2) In GPMC_CS*n*[*i*], *i* is equal to 0, 1, 2 or 3.

(3) GPMC_FCLK is general-purpose memory controller internal functional clock period in ns.

(4) For div_by_1_mode:

- GPMC_CONFIG1_i Register: GPMCFCLKDIVIDER = 0h:
 - GPMC_CLK frequency = GPMC_FCLK frequency

For GPMC_FCLK_MUX:


- CTRLMMR_GPMC_CLKSEL[1-0] CLK_SEL = 00 = CPSWHS

CLKOUT3

 = 2000/15 = 133.33 MHz

For TIMEPARAGRANULARITY_X1:


- GPMC_CONFIG1_i Register: TIMEPARAGRANULARITY = 0h = x1 latencies (affecting RD/WRCYCLETIME, RD/WRACCESSTIME, PAGEBURSTACCESSTIME, CSONTIME, CSRD/WROFFTIME, ADVONTIME, ADVRD/WROFFTIME, OEONTIME, OEOFFTIME, WEONTIME, WEOFFTIME, CYCLE2CYCLEDELAY, BUSTURNAROUND, TIMEOUTSTARTVALUE, WRDATAONADMUXBUS)

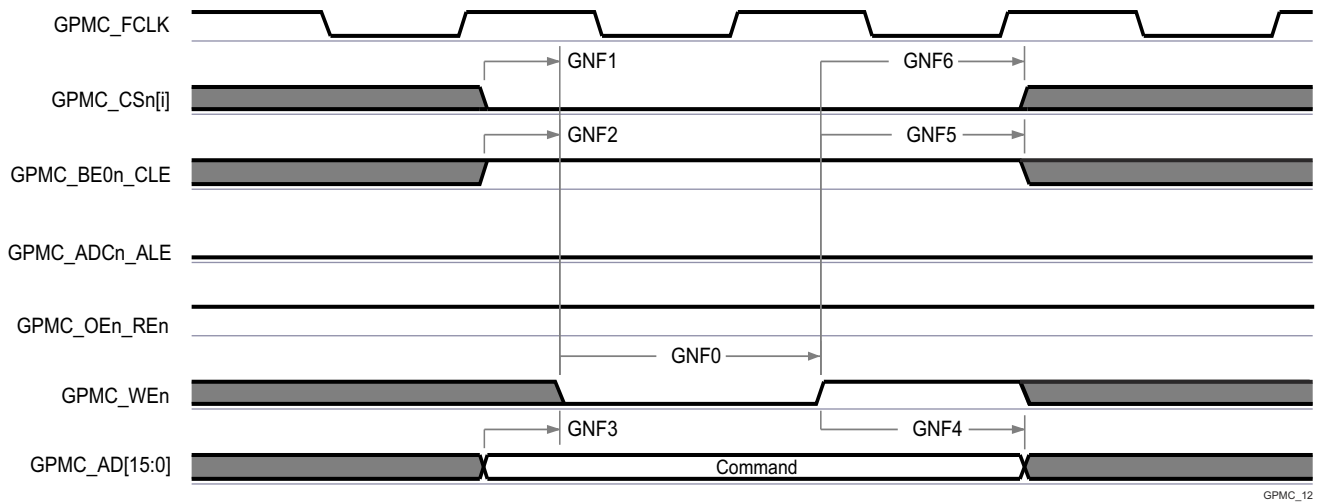

GPMC_12

A. In GPMC_CSn[i], i is equal to 0, 1, 2 or 3.


Figure 7-48. GPMC and NAND Flash — Command Latch Cycle

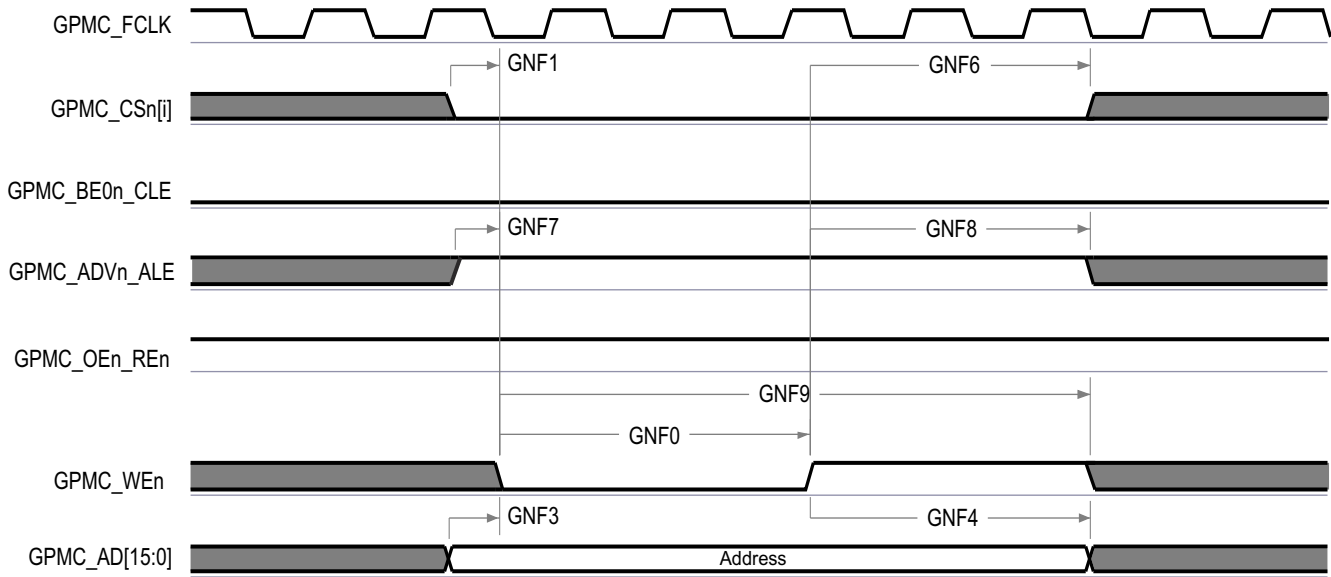

GPMC_13

A. In GPMC_CSn[i], i is equal to 0, 1, 2 or 3.


Figure 7-49. GPMC and NAND Flash — Address Latch Cycle

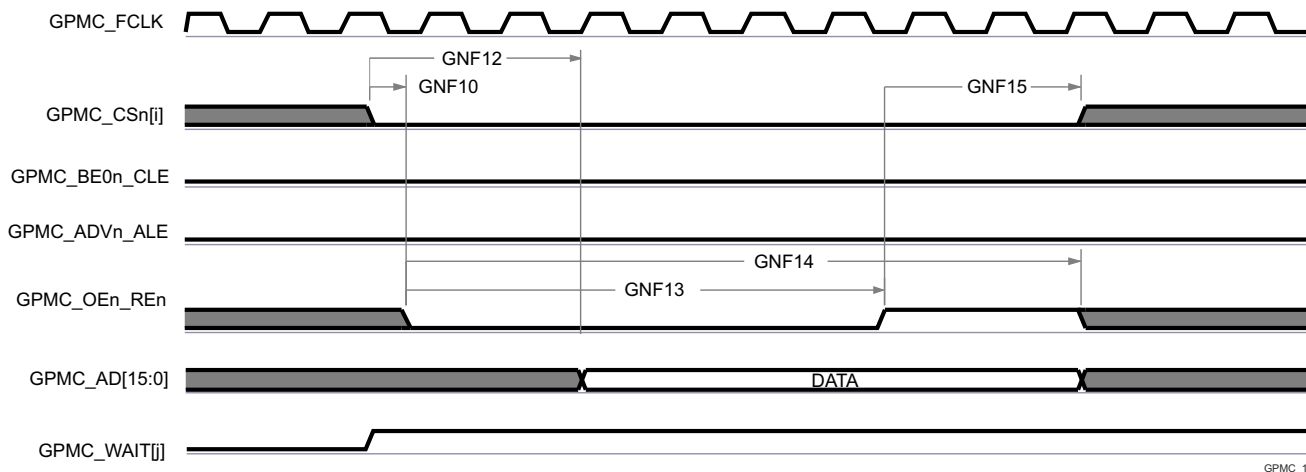

GPMC_14

- A. GNF12 parameter illustrates amount of time required to internally sample input data. It is expressed in number of GPMC functional clock cycles. From start of read cycle and after GNF12 functional clock cycles, input data will be internally sampled by active functional clock edge. GNF12 value must be stored inside AccessTime register bits field.
- B. GPMC_FCLK is an internal clock (GPMC functional clock) not provided externally.
- C. In GPMC_CSn[i], i is equal to 0, 1, 2 or 3. In GPMC_WAIT[j], j is equal to 0 or 1.

Figure 7-50. GPMC and NAND Flash — Data Read Cycle

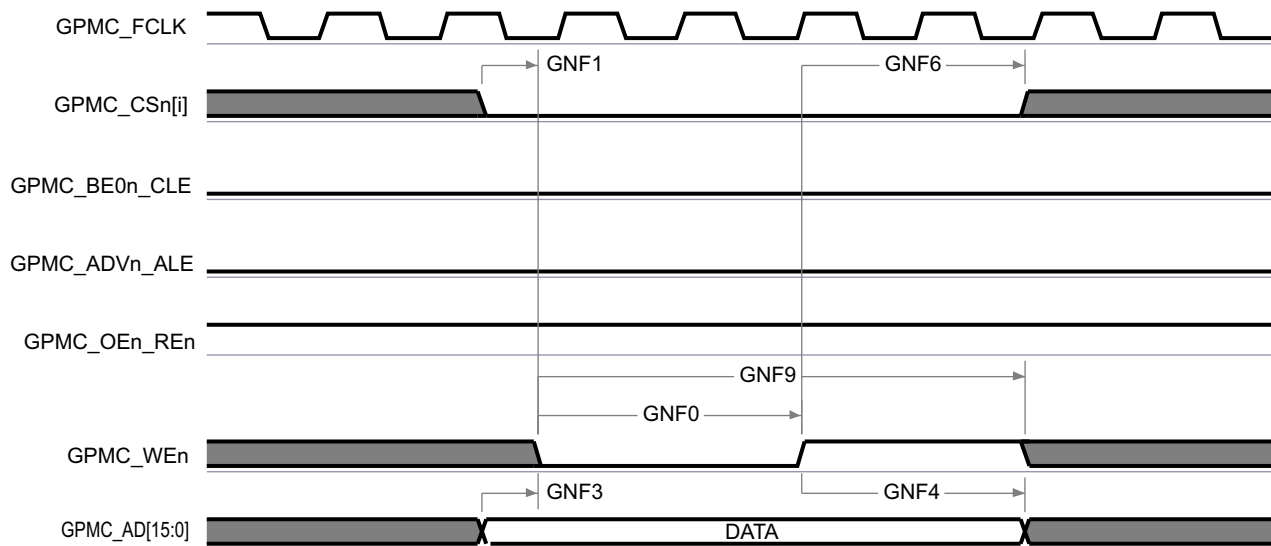

GPMC_15

- A. In GPMC_CSn[i], i is equal to 0, 1, 2 or 3.

Figure 7-51. GPMC and NAND Flash — Data Write Cycle

7.10.5.8.4 GPMC IOSETS

Table 7-58 defines valid pin combinations of each GPMC IOSET.

Table 7-58. GPMC IOSETS

| SIGNALS | IOSET1 | | IOSET2 | |
|----------------|-----------------|---------|-----------------|---------|
| | BALL NAME | MUXMODE | BALL NAME | MUXMODE |
| GPMC0_AD0 | GPMC0_AD0 | 0 | GPMC0_AD0 | 0 |
| GPMC0_AD1 | GPMC0_AD1 | 0 | GPMC0_AD1 | 0 |
| GPMC0_AD2 | GPMC0_AD2 | 0 | GPMC0_AD2 | 0 |
| GPMC0_AD3 | GPMC0_AD3 | 0 | GPMC0_AD3 | 0 |
| GPMC0_AD4 | GPMC0_AD4 | 0 | GPMC0_AD4 | 0 |
| GPMC0_AD5 | GPMC0_AD5 | 0 | GPMC0_AD5 | 0 |
| GPMC0_AD6 | GPMC0_AD6 | 0 | GPMC0_AD6 | 0 |
| GPMC0_AD7 | GPMC0_AD7 | 0 | GPMC0_AD7 | 0 |
| GPMC0_AD8 | GPMC0_AD8 | 0 | GPMC0_AD8 | 0 |
| GPMC0_AD9 | GPMC0_AD9 | 0 | GPMC0_AD9 | 0 |
| GPMC0_AD10 | GPMC0_AD10 | 0 | GPMC0_AD10 | 0 |
| GPMC0_AD11 | GPMC0_AD11 | 0 | GPMC0_AD11 | 0 |
| GPMC0_AD12 | GPMC0_AD12 | 0 | GPMC0_AD12 | 0 |
| GPMC0_AD13 | GPMC0_AD13 | 0 | GPMC0_AD13 | 0 |
| GPMC0_AD14 | GPMC0_AD14 | 0 | GPMC0_AD14 | 0 |
| GPMC0_AD15 | GPMC0_AD15 | 0 | GPMC0_AD15 | 0 |
| GPMC0_CLK | GPMC0_CLK | 0 | GPMC0_CLK | 0 |
| GPMC0_CLKLB | GPMC0_CLKLB | 0 | GPMC0_CLKLB | 0 |
| GPMC0_ADVn_ALE | GPMC0_ADVn_ALE | 0 | GPMC0_ADVn_ALE | 0 |
| GPMC0_OEn_REn | GPMC0_OEn_REn | 0 | GPMC0_OEn_REn | 0 |
| GPMC0_WEn | GPMC0_WEn | 0 | GPMC0_WEn | 0 |
| GPMC0_BE0n_CLE | GPMC0_BE0n_CLE | 0 | GPMC0_BE0n_CLE | 0 |
| GPMC0_BE1n | GPMC0_BE1n | 0 | GPMC0_BE1n | 0 |
| GPMC0_WAIT0 | GPMC0_WAIT0 | 0 | GPMC0_WAIT0 | 0 |
| GPMC0_WAIT1 | GPMC0_WAIT1 | 0 | GPMC0_WAIT1 | 0 |
| GPMC0_WPn | GPMC0_WPn | 0 | GPMC0_WPn | 0 |
| GPMC0_DIR | GPMC0_DIR | 0 | GPMC0_DIR | 0 |
| GPMC0_CSn0 | GPMC0_CSn0 | 0 | GPMC0_CSn0 | 0 |
| GPMC0_CSn1 | GPMC0_CSn1 | 0 | GPMC0_CSn1 | 0 |
| GPMC0_CSn2 | GPMC0_CSn2 | 0 | GPMC0_CSn2 | 0 |
| GPMC0_CSn3 | GPMC0_CSn3 | 0 | GPMC0_CSn3 | 0 |
| GPMC0_AD16 | PRG1_PRU0_GPO0 | 8 | PRG1_PRU0_GPO0 | 8 |
| GPMC0_AD17 | PRG1_PRU0_GPO1 | 8 | PRG1_PRU0_GPO1 | 8 |
| GPMC0_AD18 | PRG1_PRU0_GPO2 | 8 | PRG1_PRU0_GPO2 | 8 |
| GPMC0_AD19 | PRG1_PRU0_GPO3 | 8 | PRG1_PRU0_GPO3 | 8 |
| GPMC0_AD20 | PRG1_PRU0_GPO4 | 8 | PRG1_PRU0_GPO4 | 8 |
| GPMC0_AD21 | PRG1_PRU0_GPO5 | 8 | PRG1_PRU0_GPO5 | 8 |
| GPMC0_AD22 | PRG1_PRU0_GPO6 | 8 | PRG1_PRU0_GPO6 | 8 |
| GPMC0_AD23 | PRG1_PRU0_GPO7 | 8 | PRG1_PRU0_GPO7 | 8 |
| GPMC0_AD24 | PRG1_PRU0_GPO8 | 8 | PRG1_PRU0_GPO8 | 8 |
| GPMC0_AD25 | PRG1_PRU0_GPO9 | 8 | PRG1_PRU0_GPO9 | 8 |
| GPMC0_AD26 | PRG1_PRU0_GPO10 | 8 | PRG1_PRU0_GPO10 | 8 |

Table 7-58. GPMC IOSETs (continued)

| SIGNALS | IOSET1 | | IOSET2 | |
|------------|-----------------|---------|-----------------|---------|
| | BALL NAME | MUXMODE | BALL NAME | MUXMODE |
| GPMC0_AD27 | PRG1_PRU0_GPO11 | 8 | PRG1_PRU0_GPO11 | 8 |
| GPMC0_AD28 | PRG1_PRU0_GPO12 | 8 | PRG1_PRU0_GPO12 | 8 |
| GPMC0_AD29 | PRG1_PRU0_GPO13 | 8 | PRG1_PRU0_GPO13 | 8 |
| GPMC0_AD30 | PRG1_PRU0_GPO14 | 8 | PRG1_PRU0_GPO14 | 8 |
| GPMC0_AD31 | PRG1_PRU0_GPO15 | 8 | PRG1_PRU0_GPO15 | 8 |
| GPMC0_BE2n | PRG1_PRU0_GPO16 | 8 | PRG1_PRU0_GPO16 | 8 |
| GPMC0_A0 | PRG1_PRU0_GPO17 | 8 | PRG0_PRU0_GPO2 | 9 |
| GPMC0_A1 | PRG1_PRU0_GPO18 | 8 | PRG0_PRU0_GPO4 | 9 |
| GPMC0_A2 | PRG1_PRU0_GPO19 | 8 | PRG0_PRU0_GPO8 | 9 |
| GPMC0_A3 | PRG1_PRU1_GPO0 | 8 | PRG0_PRU0_GPO14 | 9 |
| GPMC0_A4 | PRG1_PRU1_GPO1 | 8 | PRG0_PRU0_GPO16 | 9 |
| GPMC0_A5 | PRG1_PRU1_GPO2 | 8 | PRG0_PRU0_GPO18 | 9 |
| GPMC0_A6 | PRG1_PRU1_GPO3 | 8 | PRG0_PRU0_GPO19 | 9 |
| GPMC0_A7 | PRG1_PRU1_GPO4 | 8 | PRG0_PRU1_GPO12 | 9 |
| GPMC0_A8 | PRG1_PRU1_GPO5 | 8 | PRG0_PRU1_GPO13 | 9 |
| GPMC0_A9 | PRG1_PRU1_GPO6 | 8 | PRG0_PRU1_GPO14 | 9 |
| GPMC0_A10 | PRG1_PRU1_GPO7 | 8 | PRG0_PRU1_GPO15 | 9 |
| GPMC0_A11 | PRG1_PRU1_GPO8 | 8 | PRG0_PRU1_GPO16 | 9 |
| GPMC0_A12 | PRG1_PRU1_GPO9 | 8 | PRG0_MDIO0_MDIO | 9 |
| GPMC0_A13 | PRG1_PRU1_GPO10 | 8 | PRG0_MDIO0_MDC | 9 |
| GPMC0_A14 | PRG1_PRU1_GPO11 | 8 | PRG0_PRU0_GPO12 | 9 |
| GPMC0_A15 | PRG1_PRU1_GPO12 | 8 | PRG0_PRU0_GPO13 | 9 |
| GPMC0_A16 | PRG1_PRU1_GPO13 | 8 | PRG0_PRU0_GPO15 | 9 |
| GPMC0_A17 | PRG1_PRU1_GPO14 | 8 | PRG0_PRU0_GPO17 | 9 |
| GPMC0_A18 | PRG1_PRU1_GPO15 | 8 | PRG0_PRU1_GPO3 | 9 |
| GPMC0_A19 | PRG1_PRU1_GPO16 | 8 | PRG0_PRU1_GPO6 | 9 |
| GPMC0_BE3n | PRG1_PRU1_GPO17 | 8 | PRG1_PRU1_GPO17 | 8 |
| GPMC0_A20 | GPMC0_CSn3 | 4 | GPMC0_CSn3 | 4 |
| GPMC0_A21 | GPMC0_WAIT1 | 4 | GPMC0_WAIT1 | 4 |
| GPMC0_A22 | GPMC0_WPn | 4 | GPMC0_WPn | 4 |

ADVANCE INFORMATION

7.10.5.9 I2C

For more details about features and additional description information on the device Inter-Integrated Circuit, see the corresponding subsections within *Signal Descriptions* and *Detailed Description* sections.

Section 7.10.5.9.1, Table 7-59 and Figure 7-52 assume testing over the recommended operating conditions and electrical characteristic conditions.

7.10.5.9.1 Timing Requirements for I2C Input Timings

| NO.(1) (6) | PARAMETER | DESCRIPTION | MODE | MIN | MAX | UNIT |
|------------|---------------------|---|----------|-------|-----|------|
| I1 | $t_{c(SCL)}$ | Cycle time, SCL | Standard | 10000 | | ns |
| | | | Fast | 2500 | | ns |
| I2 | $t_{su(SCLH-SDAL)}$ | Setup time, SCL high before SDA low (for a repeated START condition) | Standard | 4700 | | ns |
| | | | Fast | 600 | | ns |
| I3 | $t_{h(SDAL-SCLL)}$ | Hold time, SCL low after SDA low (for a START and a repeated START condition) | Standard | 4000 | | ns |
| | | | Fast | 900 | | ns |

| NO. (1) (6) | PARAMETER | DESCRIPTION | MODE | MIN | MAX | UNIT |
|-------------|---------------------|--|----------|-----------------------------------|-----------------------|------|
| 14 | $t_{w(SCLL)}$ | Pulse duration, SCL low | Standard | 4700 | | ns |
| | | | Fast | 1300 | | ns |
| 15 | $t_{w(SCLH)}$ | Pulse duration, SCL high | Standard | 4000 | | ns |
| | | | Fast | 600 | | ns |
| 16 | $t_{su(SDAV-SCLH)}$ | Setup time, SDA valid before SCL high | Standard | 250 | | ns |
| | | | Fast | 100 ⁽²⁾ | | ns |
| 17 | $t_h(SCLL-SDAV)$ | Hold time, SDA valid after SCL low | Standard | 0 ⁽³⁾ | 3450 ⁽⁴⁾ | ns |
| | | | Fast | 0 ⁽³⁾ | 900 ⁽⁴⁾ | ns |
| 18 | $t_{w(SDAH)}$ | Pulse duration, SDA high between STOP and START conditions | Standard | 4700 | | ns |
| | | | Fast | 1300 | | ns |
| 19 | $t_r(SDA)$ | Rise time, SDA | Standard | | 1000 | ns |
| | | | Fast | $20 \cdot (V_{dd}/5.5V)^{(5)(7)}$ | 300 ⁽³⁾⁽⁷⁾ | ns |
| 110 | $t_r(SCL)$ | Rise time, SCL | Standard | | 1000 | ns |
| | | | Fast | $20 \cdot (V_{dd}/5.5V)^{(5)(7)}$ | 300 ⁽³⁾⁽⁷⁾ | ns |
| 111 | $t_f(SDA)$ | Fall time, SDA | Standard | | 300 | ns |
| | | | Fast | $20 \cdot (V_{dd}/5.5V)^{(5)(7)}$ | 300 ⁽³⁾⁽⁷⁾ | ns |
| 112 | $t_f(SCL)$ | Fall time, SCL | Standard | | 300 | ns |
| | | | Fast | $20 \cdot (V_{dd}/5.5V)$ | 300 | ns |
| 113 | $t_{su(SCLH-SDAH)}$ | Setup time, SCL high before SDA high (for STOP condition) | Standard | 4000 | | ns |
| | | | Fast | 600 | | ns |
| 114 | $t_{w(SP)}$ | Pulse duration, spike (must be suppressed) | Standard | | | ns |
| | | | Fast | 0 | 50 | ns |
| 115 | t_{skew} | Skew | Standard | | 3 | ns |
| | | | Fast | | 3 | ns |
| 116 | C_b | Capacitive load for each bus line | Standard | | 400 | pF |
| | | | Fast | | 400 | pF |

- (1) The I2C pins SDA and SCL do not feature fail-safe I/O buffers. These pins could potentially draw current when the device is powered down.
- (2) A Fast-mode I2C-bus device can be used in a Standard-mode I2C-bus system, but the requirement $t_{su(SDA-SCLH)} \geq 250$ ns must then be met. This will automatically be the case if the device does not stretch the low period of the SCL signal. If such a device does stretch the low period of the SCL signal, it must output the next data bit to the SDA line $t_{rmax} + t_{su(SDA-SCLH)} = 1000 + 250 = 1250$ ns (according to the Standard-mode I2C-Bus Specification) before the SCL line is released.
- (3) A device must internally provide a hold time of at least 300 ns for the SDA signal (referred to the V_{IHmin} of the SCL signal) to bridge the undefined region of the falling edge of SCL.
- (4) The maximum $t_h(SDA-SCLL)$ has only to be met if the device does not stretch the low period [$t_{w(SCLL)}$] of the SCL signal.
- (5) C_b = total capacitance of one bus line in pF. If mixed with HS-mode devices, faster fall-times are allowed
- (6) Software must properly configure the I2C module registers to achieve the timings shown in this table. See the device TRM for details.
- (7) These timings apply only to I2C0 and MCU_I2C0. I2C[3:1] and MCU_I2C1 use standard LVCMOS buffers to emulate open-drain buffers and their rise/fall times should be referenced in the device IBIS model.


Table 7-59. Timing Requirements for I2C HS-Mode

| NO. | PARAMETER | DESCRIPTION | CAPACITANCE | MIN | MAX | UNIT |
|-----|---------------------|---|-------------|-----|-----|------|
| 11 | $t_c(SCL)$ | Cycle time, SCL | 100 pF Max | 294 | | ns |
| | | | 400 pF Max | 588 | | ns |
| 12 | $t_{su(SCLH-SDAL)}$ | Setup time, SCL high before SDA low (for a repeated START condition) | 100 pF Max | 160 | | ns |
| | | | 400 pF Max | 160 | | ns |
| 13 | $t_h(SDAL-SCLL)$ | Hold time, SCL low after SDA low (for a START and a repeated START condition) | 100 pF Max | 160 | | ns |
| | | | 400 pF Max | 160 | | ns |

Table 7-59. Timing Requirements for I2C HS-Mode (continued)

| NO. | PARAMETER | DESCRIPTION | CAPACITANCE | MIN | MAX | UNIT |
|-----|---------------------|---|-------------|--------------------|-------------------|------|
| 14 | $t_{w(SCLL)}$ | Pulse duration, SCL low | 100 pF Max | 160 | | ns |
| | | | 400 pF Max | 320 | | ns |
| 15 | $t_{w(SCLH)}$ | Pulse duration, SCL high | 100 pF Max | 60 | | ns |
| | | | 400 pF Max | 120 | | ns |
| 16 | $t_{su(SDAV-SCLH)}$ | Setup time, SDA valid before SCL high | 100 pF Max | 10 | | ns |
| | | | 400 pF Max | 10 | | ns |
| 17 | $t_{h(SCLL-SDAV)}$ | Hold time, SDA valid after SCL low | 100 pF Max | 0 | 70 | ns |
| | | | 400 pF Max | 0 | 150 | ns |
| 113 | $t_{w(SDAH)}$ | Setup time, SCL high before SDA high (for STOP condition) | 100 pF Max | 160 | | ns |
| | | | 400 pF Max | 160 ⁽²⁾ | | ns |
| 114 | $t_r(SDA)$ | Pulse duration, spike (must be suppressed) | 100 pF Max | 0 | 10 ⁽²⁾ | ns |
| | | | 400 pF Max | | | ns |
| 115 | t_{skew} | Skew | | | | ns |
| 116 | $C_b^{(1)}$ | Capacitive Load for SDA and SCL Lines | 100 pF Max | | 100 | pF |
| | | | 400 pF Max | | 400 | pF |

- (1) For bus line loads C_b between 100 pF and 400 pF the timing parameters must be linearly interpolated.
 (2) A device must internally provide a Data hold time to bridge the undefined part between V_{IH} and V_{IL} of the falling edge of the SCLH signal. An input circuit with a threshold as low as possible for the falling edge of the SCLH signal minimizes this hold time.

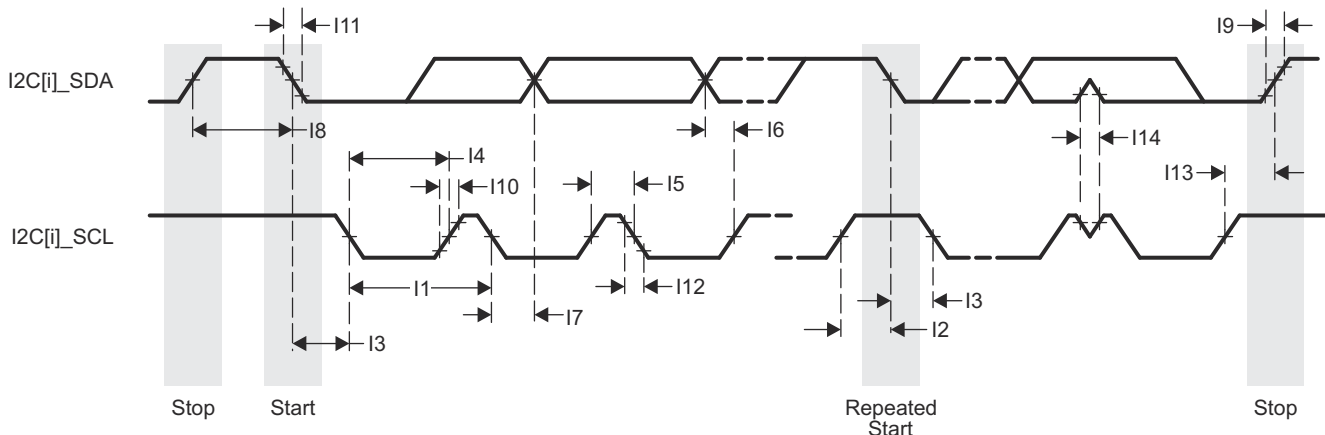

- A. $i = 0$ to 1 for MCU domain
 $i = 0$ to 3 for MAIN domain

Figure 7-52. I2C Receive Timing

7.10.5.10 MCAN

Table 7-60 and Table 7-61 presents timing conditions and switching characteristics for MCAN.

For more details about features and additional description information on the device Controller Area Network Interface, see the corresponding subsections within *Signal Descriptions* and *Detailed Description* sections.

Note

The device has multiple MCAN modules. MCANn is a generic prefix applied to MCAN signal names, where n represents the specific MCAN module.

Table 7-60. MCAN Timing Conditions

| PARAMETER | MIN | MAX | UNIT |
|-------------------------|-----|-----|------|
| INPUT CONDITIONS | | | |

Table 7-60. MCAN Timing Conditions (continued)

| PARAMETER | | MIN | MAX | UNIT |
|--------------------------|-------------------------|-----|-----|------|
| SR _i | Input slew rate | 2 | 15 | V/ns |
| OUTPUT CONDITIONS | | | | |
| C _L | Output load capacitance | 5 | 20 | pF |

Table 7-61. MCAN Switching Characteristics

| NO. | PARAMETER | DESCRIPTION | MIN | MAX | UNIT |
|-------|--------------------------|---|-----|-----|------|
| MCAN1 | t _d (MCAN_TX) | Delay time, transmit shift register to MCANn_TX | | 10 | ns |
| MCAN2 | t _d (MCAN_RX) | Delay time, MCANn_RX to receive shift register | | 10 | ns |

For more information, see *Controller Area Network (MCAN)* section in *Peripherals* chapter in the device TRM.

7.10.5.11 MCSPI

For more details about features and additional description information on the device Serial Port Interface, see the corresponding subsections within *Signal Descriptions* and *Detailed Description* sections.

Table 7-62 presents timing conditions for MCSPI.

For more information, see *Multichannel Serial Peripheral Interface (MCSPI)* section in *Peripherals* chapter in the device TRM.

Table 7-62. MCSPI Timing Conditions

| PARAMETER | | MIN | MAX | UNIT |
|--------------------------|-------------------------|-----|-----|------|
| INPUT CONDITIONS | | | | |
| SR _i | Input slew rate | 2 | 8.5 | V/ns |
| OUTPUT CONDITIONS | | | | |
| C _L | Output load capacitance | 6 | 12 | pF |


7.10.5.11.1 MCSPI — Master Mode

Table 7-63, Figure 7-53, Table 7-64, and Figure 7-54 present timing requirements and switching characteristics for SPI – Master Mode.

Table 7-63. MCSPI Timing Requirements – Master Mode

see Figure 7-53

| NO. | PARAMETER | DESCRIPTION | MIN | MAX | UNIT |
|-----|-------------------------------|---|-----|-----|------|
| SM4 | t _{su} (MISO-SPICLK) | Setup time, SPIn_D[x] valid before SPIn_CLK active edge | 2.8 | | ns |
| SM5 | t _h (SPICLK-MISO) | Hold time, SPIn_D[x] valid after SPIn_CLK active edge | 3 | | ns |

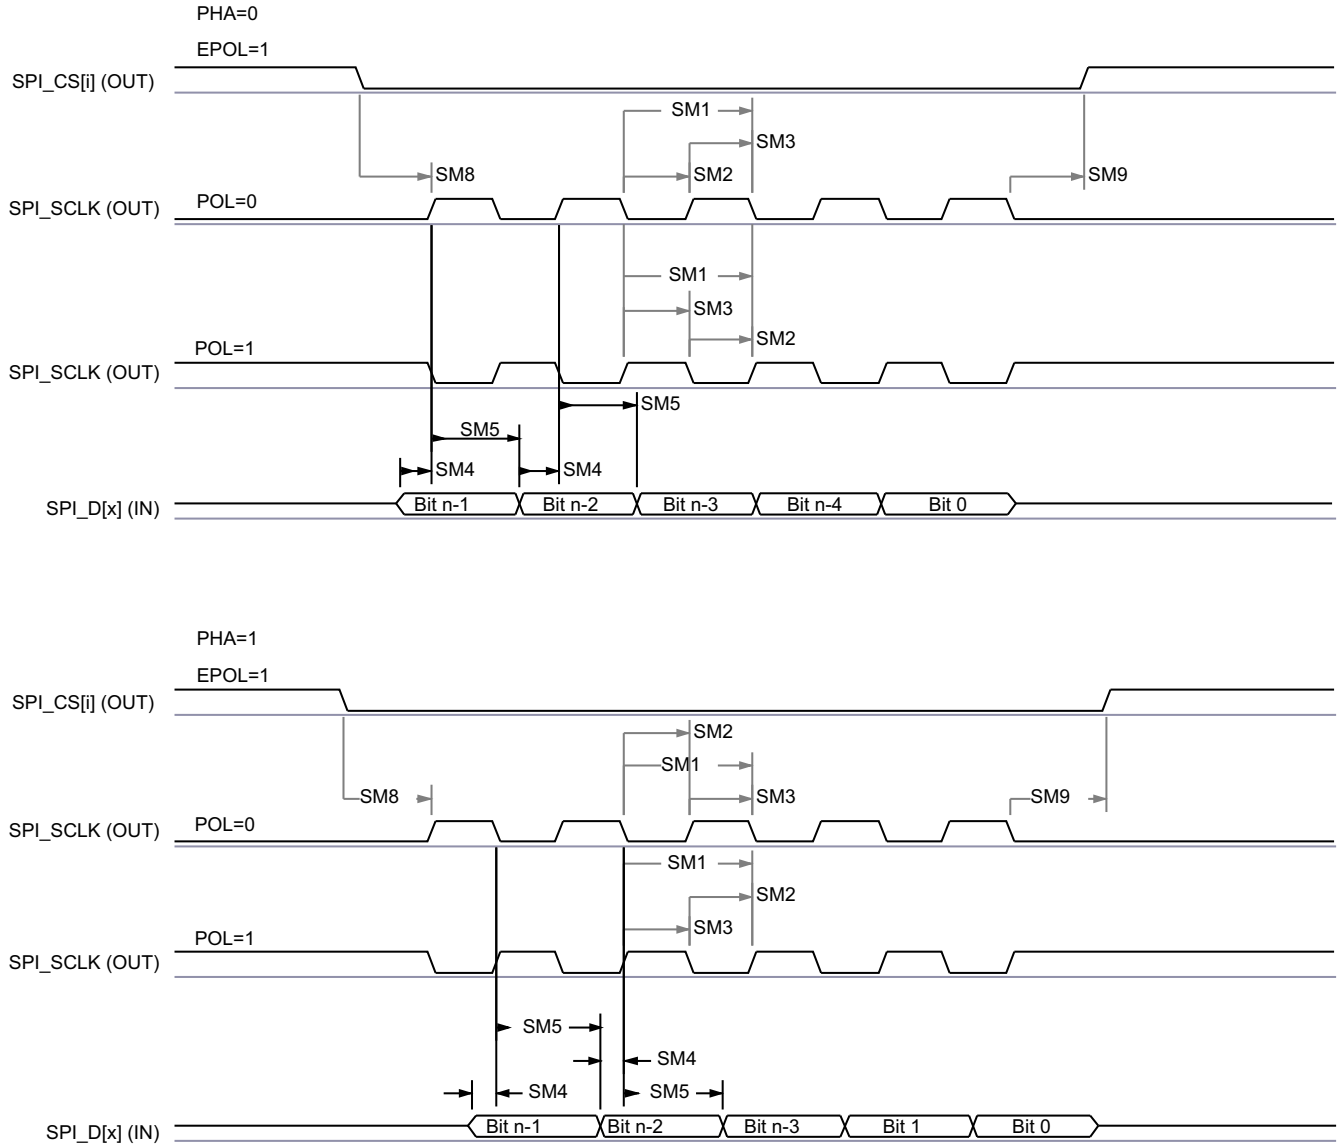

SPRSP08_TIMING_McSPI_02

Figure 7-53. SPI Master Mode Receive Timing
Table 7-64. MCSPI Switching Characteristics - Master Mode

 see [Figure 7-54](#)

| NO. | PARAMETER | | MIN | MAX | UNIT |
|-----|---------------------------|---|------------------|----------------------|------|
| SM1 | $t_c(\text{SPICLK})$ | Cycle time, SPIn_CLK | 20 | | ns |
| SM2 | $t_w(\text{SPICLK}_L)$ | Pulse duration, SPIn_CLK low | $0.5P - 1^{(1)}$ | | ns |
| SM3 | $t_w(\text{SPICLK}_H)$ | Pulse duration, SPIn_CLK high | $0.5P - 1^{(1)}$ | | ns |
| SM6 | $t_d(\text{SPICLK-SIMO})$ | Delay time, SPIn_CLK active edge to SPIn_D[x] | -3 | 2.5 | ns |
| SM7 | $t_d(\text{CS-SIMO})$ | Delay time, SPIn_CSi active edge to SPIn_D[x] | 5 | | ns |
| SM8 | $t_d(\text{CS-SPICLK})$ | Delay time, SPIn_CSi active to SPIn_CLK first edge | PHA = 0 | B - 4 ⁽³⁾ | ns |
| | | | PHA = 1 | A - 4 ⁽²⁾ | ns |
| SM9 | $t_d(\text{SPICLK-CS})$ | Delay time, SPIn_CLK last edge to SPIn_CSi inactive | PHA = 0 | A - 4 ⁽²⁾ | ns |
| | | | PHA = 1 | B - 4 ⁽³⁾ | ns |

(1) P = SPI_CLK period in ns.

(2) When P = 20.8 ns, A = (TCS + 1) * TSPICLKREF, where TCS is a bit field of the SPI_CH(i)CONF register. When P > 20.8 ns, A = (TCS + 0.5) * Fratio * TSPICLKREF, where TCS is a bit field of the SPI_CH(i)CONF register.

(3) $B = (TCS + .5) * TSPICLKREF$, where TCS is a bit field of the SPI_CH(i)CONF register and Fratio = Even >= 2.

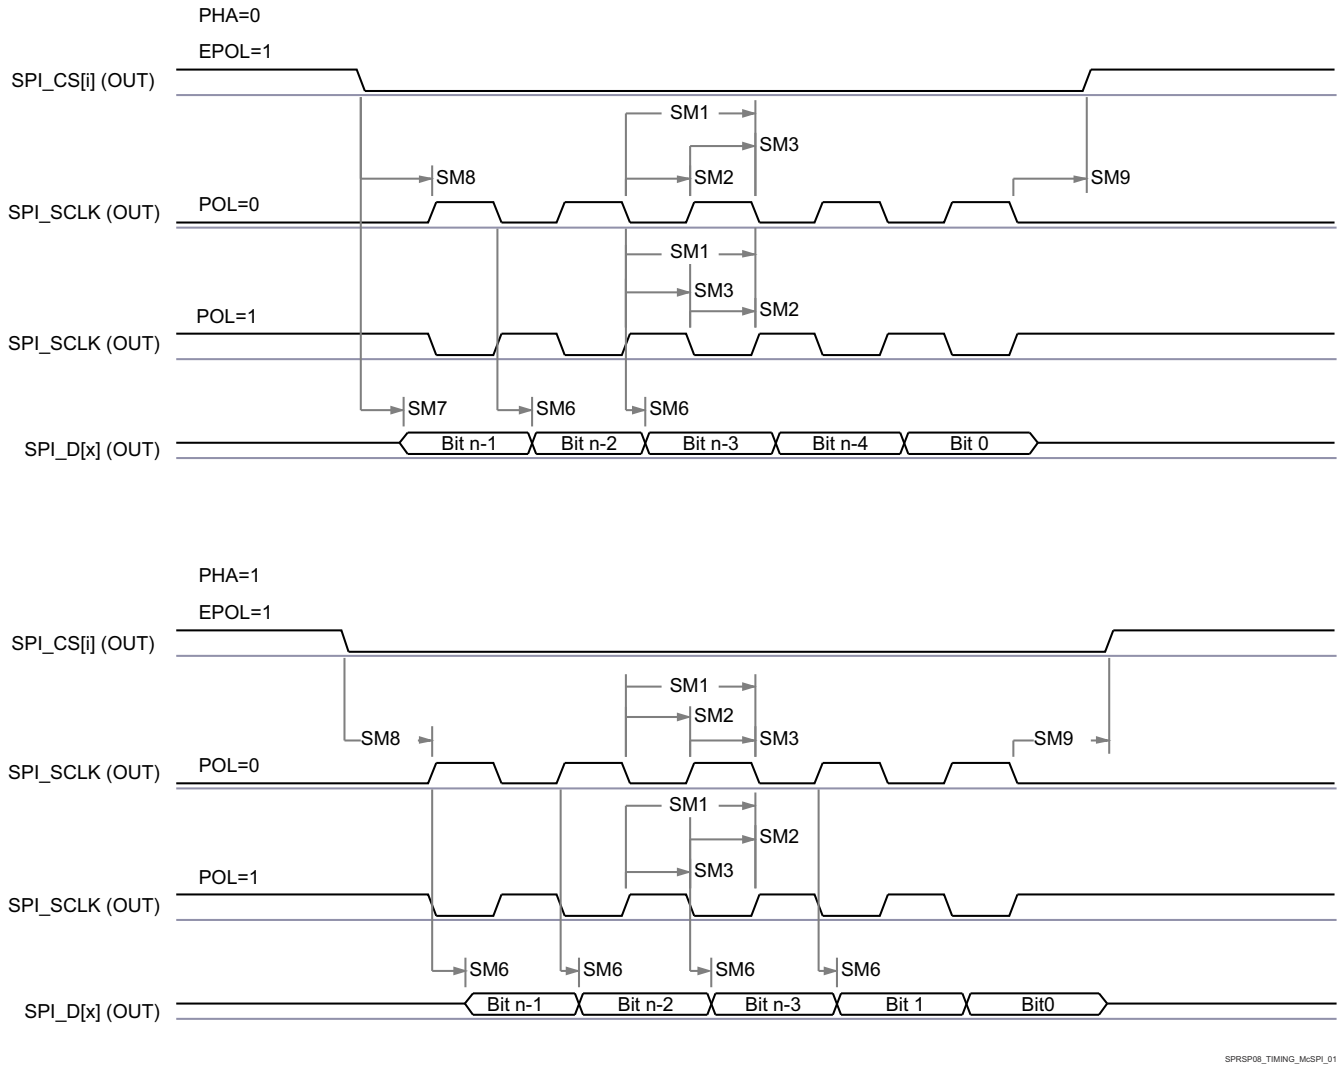


Figure 7-54. SPI Master Mode Transmit Timing

7.10.5.11.2 MCSPI — Slave Mode

Table 7-65, Figure 7-55, Table 7-66, and Figure 7-56 present timing requirements and switching characteristics for SPI – Slave Mode.


Table 7-65. MCSPI Timing Requirements – Slave Mode

see Figure 7-55

| NO. | PARAMETER | DESCRIPTION | MIN | MAX | UNIT |
|-----|------------------------------|---|----------------------|-----|------|
| SS1 | $t_c(\text{SPICLK})$ | Cycle time, SPIn_CLK | 20 | | ns |
| SS2 | $t_w(\text{SPICLK}_L)$ | Pulse duration, SPIn_CLK low | 0.45P ⁽¹⁾ | | ns |
| SS3 | $t_w(\text{SPICLK}_H)$ | Pulse duration, SPIn_CLK high | 0.45P ⁽¹⁾ | | ns |
| SS4 | $t_{su}(\text{SIMO-SPICLK})$ | Setup time, SPIn_D[x] valid before SPIn_CLK active edge | 5 | | ns |
| SS5 | $t_h(\text{SPICLK-SIMO})$ | Hold time, SPIn_D[x] valid after SPIn_CLK active edge | 5 | | ns |
| SS8 | $t_{su}(\text{CS-SPICLK})$ | Setup time, SPIn_CSi valid before SPIn_CLK first edge | 5 | | ns |
| SS9 | $t_h(\text{SPICLK-CS})$ | Hold time, SPIn_CSi valid after SPIn_CLK last edge | 5 | | ns |

(1) P = SPIn_CLK period in ns.

SPRSP08_TIMING_McSPI_01

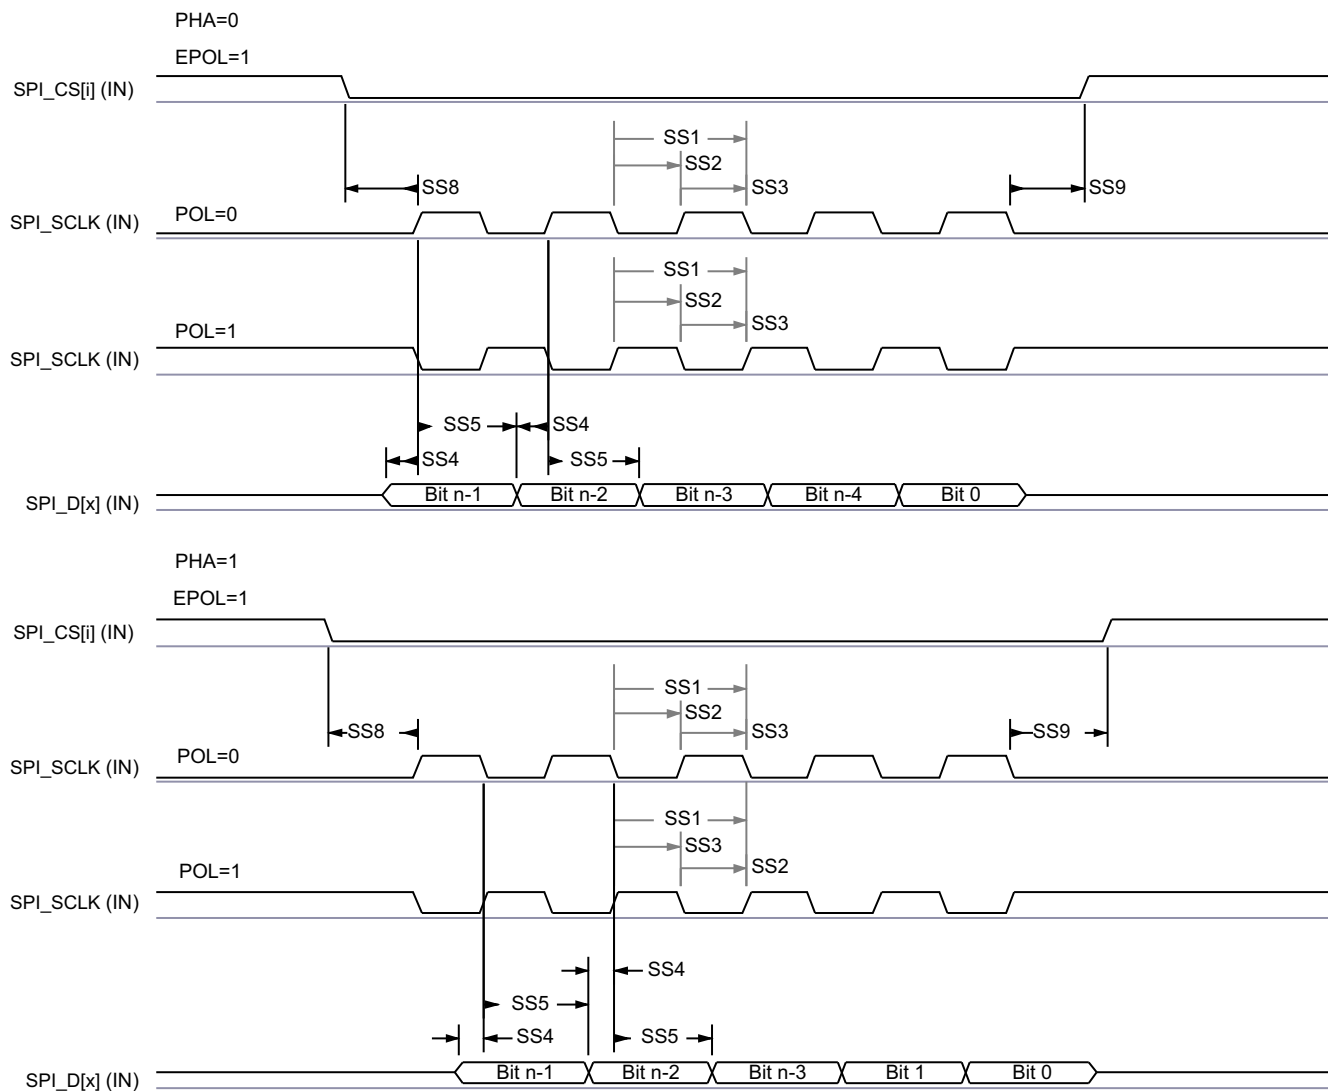

SPRSP08_TIMING_McSPI_04

Figure 7-55. SPI Slave Mode Receive Timing
Table 7-66. MCSPI Switching Characteristics – Slave Mode

 see [Figure 7-56](#)

| NO. | PARAMETER | DESCRIPTION | MIN | MAX | UNIT |
|-----|----------------------|---|-------|-------|------|
| SS6 | $t_{d(SPICLK-SOMI)}$ | Delay time, SPIn_CLK active edge to SPIn_D[x] | 2 | 17.12 | ns |
| SS7 | $t_{sk(CS-SOMI)}$ | Delay time, SPIn_CSi active edge to SPIn_D[x] | 20.95 | | ns |

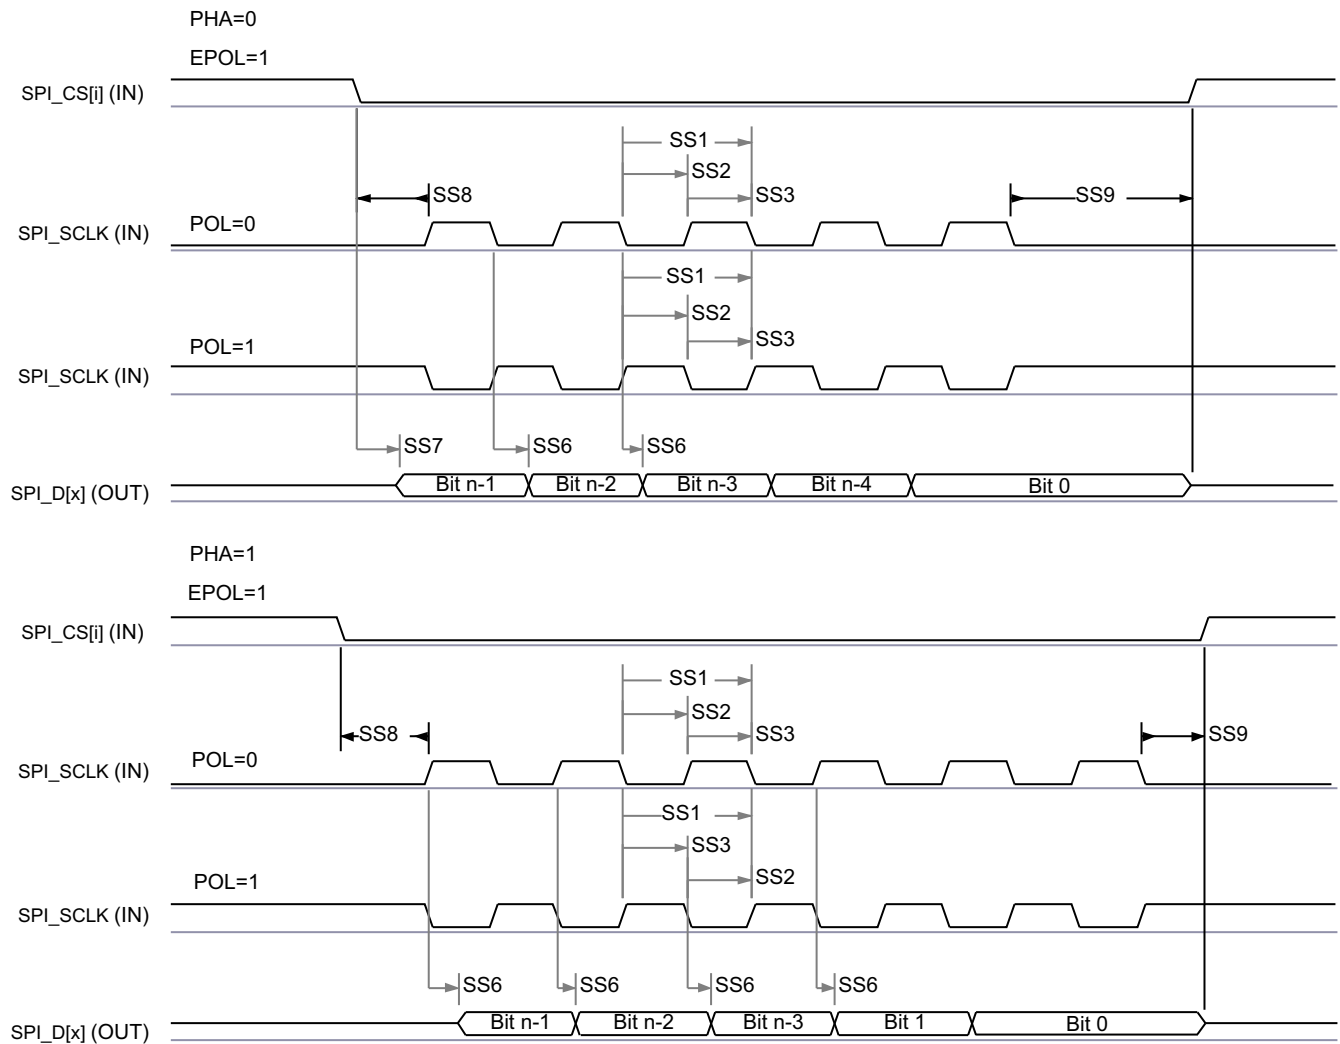


Figure 7-56. SPI Slave Mode Transmit Timing

7.10.5.12 MMCSD

The MMCSD Host Controller provides an interface to embedded Multi-Media Card (MMC), Secure Digital (SD), and Secure Digital IO (SDIO) devices. The MMCSD Host Controller deals with MMC/SD/SDIO protocol at transmission level, data packing, adding cyclic redundancy checks (CRCs), start/end bit insertion, and checking for syntactical correctness.

For more details about MMCSD interfaces, see the corresponding MMC0 and MMC1 subsections within *Signal Descriptions* and *Detailed Description* sections.

Note

Some operating modes require software configuration of the MMC DLL delay settings, as shown in [Table 7-67](#) and [Table 7-76](#).

For more information, see *Multi-Media Card/Secure Digital (MMCSD) Interface* section in *Peripherals* chapter in the device TRM.

7.10.5.12.1 MMC0 - eMMC Interface

MMC0 interface is compliant with the JEDEC eMMC electrical standard v5.1 (JESD84-B51) and it supports the following eMMC applications:

- Legacy speed
- High speed SDR
- High speed DDR
- HS200

Table 7-67 presents the required DLL software configuration settings for MMC0 timing modes.

Table 7-67. MMC0 DLL Delay Mapping for All Timing Modes

| REGISTER NAME | | MMCS0_SS_PHY_CTRL_4_REG | | | | | MMCS0_SS_PHY_CTRL_5_REG | | |
|----------------|------------------------------------|-------------------------|---------------------------|--------------------------|--------------------------|-------------------------|------------------------------|----------------------|-----------------------------|
| BIT FIELD | | [31:24] | [20] | [15:12] | [8] | [4:0] | [17:16] | [10:8] | [2:0] |
| BIT FIELD NAME | | STRBSEL | OTAPDLYENA | OTAPDLYSEL | ITAPDLYENA | ITAPDLYSEL | SELDLYTXCLK SELDLYRXCLK | FRQSEL | CLKBUFSEL |
| MODE | DESCRIPTION | STROBE DELAY | OUTPUT DELAY ENABLE | OUTPUT DELAY VALUE | INPUT DELAY ENABLE | INPUT DELAY VALUE | DLL DELAY CHAIN SELECT | DLL REF FREQUENCY | DELAY BUFFER DURATION |
| Legacy SDR | 8-bit PHY operating 1.8 V, 25 MHz | 0x0 | 0x0 | NA | 0x1 | 0x10 | 0x1 | 0x0 | 0x7 |
| High Speed SDR | 8-bit PHY operating 1.8 V, 50 MHz | 0x0 | 0x0 | NA | 0x1 | 0xA | 0x1 | 0x0 | 0x7 |
| High Speed DDR | 8-bit PHY operating 1.8 V, 50 MHz | 0x0 | 0x1 | 0x6 | 0x1 | 0x3 | 0x0 | 0x4 | 0x7 |
| HS200 | 8-bit PHY operating 1.8 V, 200 MHz | 0x0 | 0x1 | 0x7 | 0x1 | Tuning | 0x0 | 0x0 | 0x7 |

Table 7-68 presents timing conditions for MMC0.

Table 7-68. MMC0 Timing Conditions

| PARAMETER | | MIN | MAX | UNIT | |
|---------------------------------------|--|----------------------------|------|------|------|
| INPUT CONDITIONS | | | | | |
| SR _i | Input slew rate | Legacy SDR | 0.14 | 1.44 | V/ns |
| | | High Speed SDR | 0.3 | 0.9 | V/ns |
| | | High Speed DDR (CMD) | 0.3 | 0.9 | V/ns |
| | | High Speed DDR (DAT[7:0]) | 0.45 | 0.9 | V/ns |
| OUTPUT CONDITIONS | | | | | |
| C _L | Output load capacitance | Legacy SDR | 1 | 12 | pF |
| | | High Speed SDR | 1 | 12 | pF |
| | | High Speed DDR | 1 | 12 | pF |
| | | HS200 | 1 | 6 | pF |
| PCB CONNECTIVITY REQUIREMENTS | | | | | |
| t _d (Trace Delay) | Propagation delay of each trace | All modes | 126 | 756 | ps |
| t _d (Trace Mismatch Delay) | Propagation delay mismatch across all traces | Legacy SDR, High Speed SDR | | 100 | ps |
| | | High Speed DDR, HS200 | | 8 | ps |

7.10.5.12.1.1 Legacy SDR Mode

Table 7-69, Figure 7-57, Table 7-70, and Figure 7-58 present timing requirements and switching characteristics for MMC0 – Legacy SDR Mode.

Table 7-69. MMC0 Timing Requirements – Legacy SDR Mode

see Figure 7-57

| NO. | | | MIN | MAX | UNIT |
|-------|---------------------|---|-------|-----|------|
| LSDR1 | $t_{su}(cmdV-clkH)$ | Setup time, MMC0_CMD valid before MMC0_CLK rising edge | 9.69 | | ns |
| LSDR2 | $t_h(clkH-cmdV)$ | Hold time, MMC0_CMD valid after MMC0_CLK rising edge | 27.97 | | ns |
| LSDR3 | $t_{su}(dV-clkH)$ | Setup time, MMC0_DAT[7:0] valid before MMC0_CLK rising edge | 9.69 | | ns |
| LSDR4 | $t_h(clkH-dV)$ | Hold time, MMC0_DAT[7:0] valid after MMC0_CLK rising edge | 27.97 | | ns |

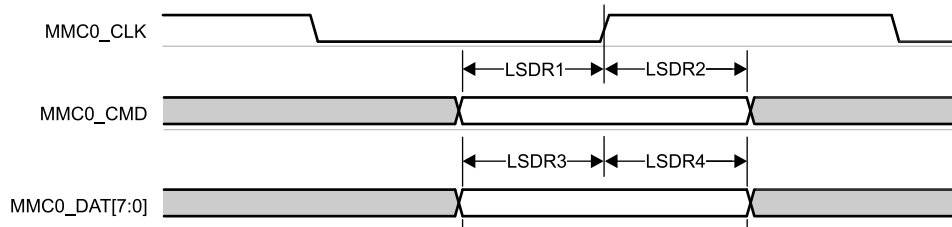


Figure 7-57. MMC0 – Legacy SDR – Receive Mode

Table 7-70. MMC0 Switching Characteristics – Legacy SDR Mode

see Figure 7-58

| NO. | PARAMETER | MIN | MAX | UNIT |
|-------|------------------|-------|------|------|
| | $f_{op}(clk)$ | | 25 | MHz |
| LSDR5 | $t_c(clk)$ | 40 | | ns |
| LSDR6 | $t_w(clkH)$ | 18.7 | | ns |
| LSDR7 | $t_w(clkL)$ | 18.7 | | ns |
| LSDR8 | $t_d(clkL-cmdV)$ | -16.1 | 16.1 | ns |
| LSDR9 | $t_d(clkL-dV)$ | -16.1 | 16.1 | ns |

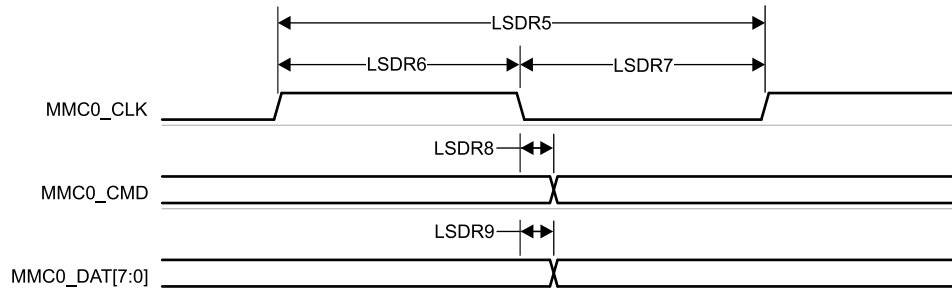


Figure 7-58. MMC0 – Legacy SDR – Transmit Mode

7.10.5.12.1.2 High Speed SDR Mode

Table 7-71, Figure 7-59, Table 7-72, and Figure 7-60 present timing requirements and switching characteristics for MMC0 – High Speed SDR Mode.

Table 7-71. MMC0 Timing Requirements – High Speed SDR Mode

see Figure 7-59

| NO. | | | MIN | MAX | UNIT |
|--------|---------------------|---|------|-----|------|
| HSSDR1 | $t_{su(cmdV-clkH)}$ | Setup time, MMC0_CMD valid before MMC0_CLK rising edge | 2.99 | | ns |
| HSSDR2 | $t_{h(clkH-cmdV)}$ | Hold time, MMC0_CMD valid after MMC0_CLK rising edge | 2.67 | | ns |
| HSSDR3 | $t_{su(dV-clkH)}$ | Setup time, MMC0_DAT[7:0] valid before MMC0_CLK rising edge | 2.99 | | ns |
| HSSDR4 | $t_{h(clkH-dV)}$ | Hold time, MMC0_DAT[7:0] valid after MMC0_CLK rising edge | 2.67 | | ns |

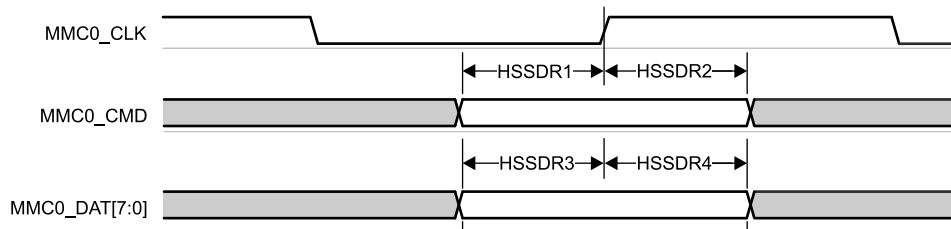


Figure 7-59. MMC0 – High Speed SDR Mode – Receive Mode

Table 7-72. MMC0 Switching Characteristics – High Speed SDR Mode

see Figure 7-60

| NO. | PARAMETER | MIN | MAX | UNIT |
|--------|--------------------|-------|------|------|
| | $f_{op(clk)}$ | | 50 | MHz |
| HSSDR5 | $t_{c(clk)}$ | 20 | | ns |
| HSSDR6 | $t_{w(clkH)}$ | 9.2 | | ns |
| HSSDR7 | $t_{w(clkL)}$ | 9.2 | | ns |
| HSSDR8 | $t_{d(clkL-cmdV)}$ | -6.35 | 6.35 | ns |
| HSSDR9 | $t_{d(clkL-dV)}$ | -6.35 | 6.35 | ns |

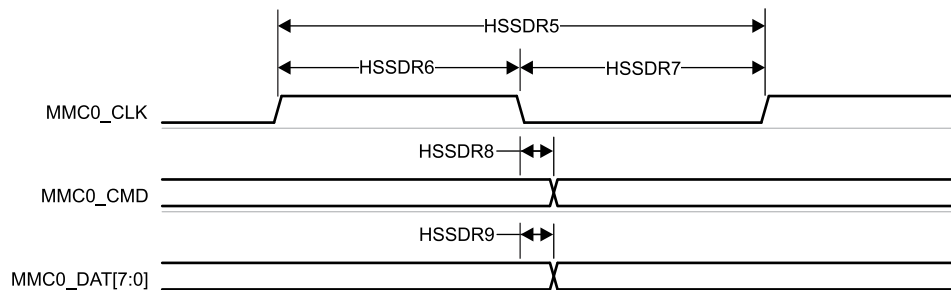


Figure 7-60. MMC0 – High Speed SDR Mode – Transmit Mode

ADVANCE INFORMATION

7.10.5.12.1.3 High Speed DDR Mode

Table 7-73, Figure 7-61, Table 7-74, and Figure 7-62 present timing requirements and switching characteristics for MMC0 – High Speed DDR Mode.

Table 7-73. MMC0 Timing Requirements – High Speed DDR Mode

see Figure 7-61

| NO. | | | MIN | MAX | UNIT |
|--------|--------------------|--|------|-----|------|
| HSDDR1 | $t_{su(cmdV-clk)}$ | Setup time, MMC0_CMD valid before MMC0_CLK rising edge | 3.88 | | ns |
| HSDDR2 | $t_{h(clk-cmdV)}$ | Hold time, MMC0_CMD valid after MMC0_CLK rising edge | 2.67 | | ns |
| HSDDR3 | $t_{su(dV-clk)}$ | Setup time, MMC0_DAT[7:0] valid before MMC0_CLK transition | 0.83 | | ns |
| HSDDR4 | $t_{h(clk-dV)}$ | Hold time, MMC0_DAT[7:0] valid after MMC0_CLK transition | 1.76 | | ns |

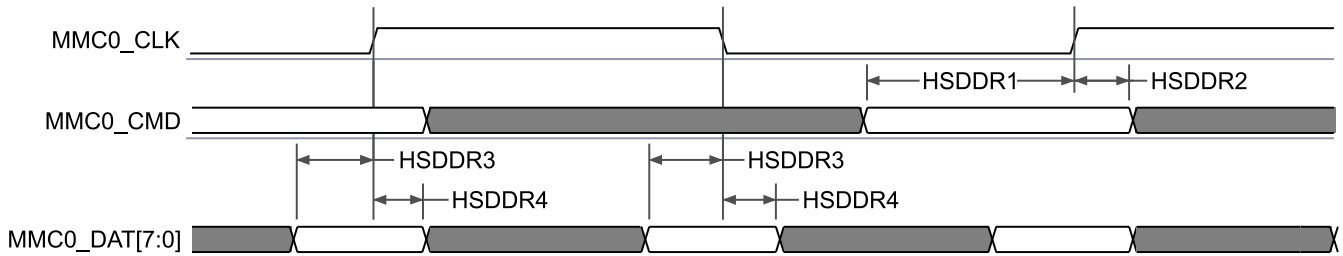


Figure 7-61. MMC0 – High Speed DDR Mode – Receive Mode

Table 7-74. MMC0 Switching Characteristics – High Speed DDR Mode

see Figure 7-62

| NO. | PARAMETER | MIN | MAX | UNIT |
|--------|-------------------|------|-------|------|
| | $f_{op(clk)}$ | | 50 | MHz |
| HSDDR5 | $t_{c(clk)}$ | 20 | | ns |
| HSDDR6 | $t_{w(clkH)}$ | 9.2 | | ns |
| HSDDR7 | $t_{w(clkL)}$ | 9.2 | | ns |
| HSDDR8 | $t_{d(clk-cmdV)}$ | 3.31 | 16.19 | ns |
| HSDDR9 | $t_{d(clk-dV)}$ | 2.81 | 6.94 | ns |

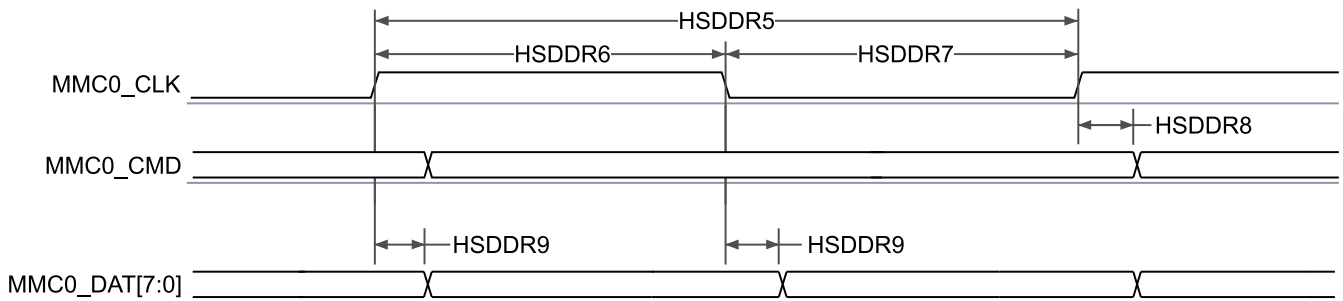


Figure 7-62. MMC0 – High Speed DDR Mode – Transmit Mode

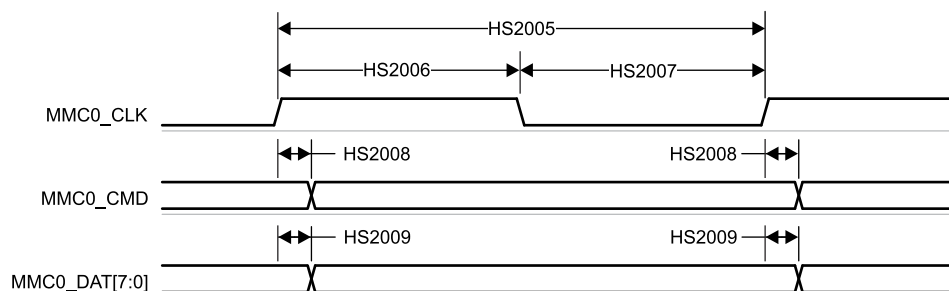
7.10.5.12.1.4 HS200 Mode

Table 7-75 and Figure 7-63 present switching characteristics for MMC0 – HS200 Mode.

Table 7-75. MMC0 Switching Characteristics – HS200 Mode

see Figure 7-63

| NO. | PARAMETER | | MIN | MAX | UNIT |
|--------|--------------------|--|------|------|------|
| | $f_{op}(clk)$ | Operating frequency, MMC0_CLK | | 200 | MHz |
| HS2005 | $t_{c}(clk)$ | Cycle time, MMC0_CLK | 5 | | ns |
| HS2006 | $t_{w}(clkH)$ | Pulse duration, MMC0_CLK high | 2.08 | | ns |
| HS2007 | $t_{w}(clkL)$ | Pulse duration, MMC0_CLK low | 2.08 | | ns |
| HS2008 | $t_{d}(clkL-cmdV)$ | Delay time, MMC0_CLK rising edge to MMC0_CMD transition | 0.99 | 3.28 | ns |
| HS2009 | $t_{d}(clkL-dV)$ | Delay time, MMC0_CLK rising edge to MMC0_DAT[7:0] transition | 0.99 | 3.28 | ns |


Figure 7-63. MMC0 – HS200 Mode – Transmit Mode
7.10.5.12.2 MMC1 - SD/SDIO Interface

MMC1 interface is compliant with the SD Host Controller Standard Specification 4.10 and SD Physical Layer Specification v3.01 as well as SDIO Specification v3.00 and it supports the following SD Card applications:

- Default speed
- High speed
- UHS-I SDR12
- UHS-I SDR25
- UHS-I SDR50
- UHS-I SDR104
- UHS-I DDR50

Table 7-76 presents the required DLL software configuration settings for MMC1 timing modes.

Table 7-76. MMC1 DLL Delay Mapping for All Timing Modes

| REGISTER NAME | | MMCSD1_SS_PHY_CTRL_4_REG | | | | MMCSD1_SS_PHY_CTRL_5_REG |
|----------------|------------------------------------|--------------------------|-------------|--------------------|-------------------|--------------------------|
| BIT FIELD | | [20] | [15:12] | [8] | [4:0] | [2:0] |
| BIT FIELD NAME | | OTAPDLYENA | OTAPDLYSEL | ITAPDLYENA | ITAPDLYSEL | CLKBUFSEL |
| MODE | DESCRIPTION | DELAY ENABLE | DELAY VALUE | INPUT DELAY ENABLE | INPUT DELAY VALUE | DELAY BUFFER DURATION |
| Default Speed | 4-bit PHY operating 3.3 V, 25 MHz | 0x0 | 0x0 | 0x1 | 0x0 | 0x7 |
| High Speed | 4-bit PHY operating 3.3 V, 50 MHz | 0x0 | 0x0 | 0x1 | 0x0 | 0x7 |
| UHS-I SDR12 | 4-bit PHY operating 1.8 V, 25 MHz | 0x1 | 0xF | 0x1 | 0x0 | 0x7 |
| UHS-I SDR25 | 4-bit PHY operating 1.8 V, 50 MHz | 0x1 | 0xF | 0x1 | 0x0 | 0x7 |
| UHS-I SDR50 | 4-bit PHY operating 1.8 V, 100 MHz | 0x1 | 0xC | 0x1 | Tuning | 0x7 |

Table 7-76. MMC1 DLL Delay Mapping for All Timing Modes (continued)

| REGISTER NAME | | MMCS1_SS_PHY_CTRL_4_REG | | | | MMCS1_SS_PHY_CTRL_5_REG |
|----------------|------------------------------------|-------------------------|-------------|--------------------|-------------------|-------------------------|
| BIT FIELD | | [20] | [15:12] | [8] | [4:0] | [2:0] |
| BIT FIELD NAME | | OTAPDLYENA | OTAPDLYSEL | ITAPDLYENA | ITAPDLYSEL | CLKBUFSEL |
| MODE | DESCRIPTION | DELAY ENABLE | DELAY VALUE | INPUT DELAY ENABLE | INPUT DELAY VALUE | DELAY BUFFER DURATION |
| UHS-I DR50 | 4-bit PHY operating 1.8 V, 50 MHz | 0x1 | 0x9 | 0x1 | Tuning | 0x7 |
| UHS-I SDR104 | 4-bit PHY operating 1.8, V 200 MHz | 0x1 | 0x6 | 0x1 | Tuning | 0x7 |

Table 7-77 presents timing conditions for MMC1.

Table 7-77. MMC1 Timing Conditions

| PARAMETER | | | MIN | MAX | UNIT |
|---------------------------------------|--|---------------------------|------|------|------|
| Input Conditions | | | | | |
| SR _i | Input slew rate | Default Speed, High Speed | 0.69 | 2.06 | V/ns |
| | | UHS-I SDR12, UHS-I SDR25 | 0.34 | 1.34 | V/ns |
| | | UHS-I DDR50 | 1 | 2 | V/ns |
| Output Conditions | | | | | |
| C _L | Output load capacitance | UHS-I DDR50 | 3 | 10 | pF |
| | | All other modes | 1 | 10 | pF |
| PCB Connectivity Requirements | | | | | |
| t _d (Trace Delay) | Propagation delay of each trace | UHS-I DDR50 | 240 | 1134 | ps |
| | | All other modes | 126 | 1386 | ps |
| t _d (Trace Mismatch Delay) | Propagation delay mismatch across all traces | UHS-I DDR50, UHS-I SDR104 | | 20 | ps |
| | | All other modes | | 100 | ps |

7.10.5.12.2.1 Default Speed Mode

Table 7-78, Figure 7-64, Table 7-79, and Figure 7-65 present timing requirements and switching characteristics for MMC1 – Default Speed Mode.

Table 7-78. Timing Requirements for MMC1 – Default Speed Mode

see Figure 7-64

| NO. | | | MIN | MAX | UNIT |
|-----|---------------------|---|-------|-----|------|
| DS1 | $t_{su}(cmdV-clkH)$ | Setup time, MMC1_CMD valid before MMCi_CLK rising edge | 2.55 | | ns |
| DS2 | $t_h(clkH-cmdV)$ | Hold time, MMC1_CMD valid after MMC1_CLK rising edge | 19.67 | | ns |
| DS3 | $t_{su}(dV-clkH)$ | Setup time, MMC1_DAT[3:0] valid before MMC1_CLK rising edge | 2.55 | | ns |
| DS4 | $t_h(clkH-dV)$ | Hold time, MMC1_DAT[3:0] valid after MMC1_CLK rising edge | 19.67 | | ns |

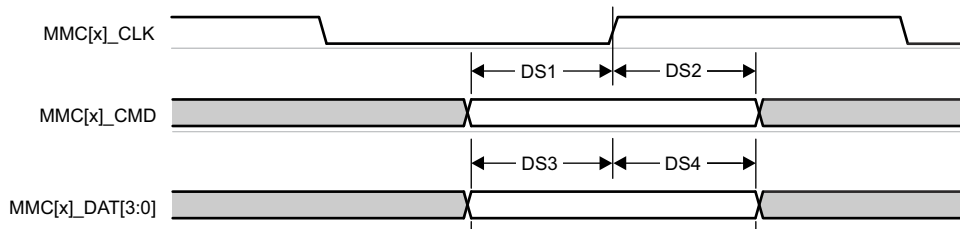


Figure 7-64. MMC1 – Default Speed – Receive Mode

Table 7-79. Switching Characteristics for MMC1 – Default Speed Mode

see Figure 7-65

| NO. | PARAMETER | MIN | MAX | UNIT |
|-----|------------------|--------|------|------|
| | $f_{op}(clk)$ | | 25 | MHz |
| DS5 | $t_c(clk)$ | 40 | | ns |
| DS6 | $t_w(clkH)$ | 18.7 | | ns |
| DS7 | $t_w(clkL)$ | 18.7 | | ns |
| DS8 | $t_d(clkL-cmdV)$ | - 14.1 | 14.1 | ns |
| DS9 | $t_d(clkL-dV)$ | - 14.1 | 14.1 | ns |

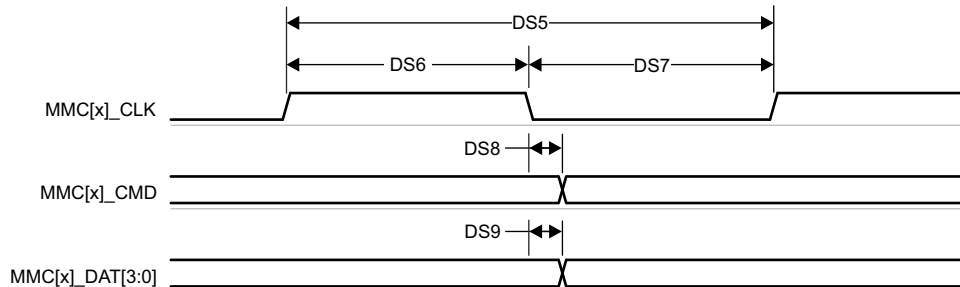


Figure 7-65. MMC1 – Default Speed – Transmit Mode

7.10.5.12.2.2 High Speed Mode

Table 7-80, Figure 7-66, Table 7-81, and Figure 7-67 present timing requirements and switching characteristics for MMC1 – High Speed Mode.

Table 7-80. Timing Requirements for MMC1 – High Speed Mode

see Figure 7-66

| NO. | | | MIN | MAX | UNIT |
|-----|---------------------|---|------|-----|------|
| HS1 | $t_{su(cmdV-clkH)}$ | Setup time, MMC1_CMD valid before MMC1_CLK rising edge | 2.55 | | ns |
| HS2 | $t_h(clkH-cmdV)$ | Hold time, MMC1_CMD valid after MMC1_CLK rising edge | 2.67 | | ns |
| HS3 | $t_{su(dV-clkH)}$ | Setup time, MMC1_DAT[3:0] valid before MMC1_CLK rising edge | 2.55 | | ns |
| HS4 | $t_h(clkH-dV)$ | Hold time, MMC1_DAT[3:0] valid after MMC1_CLK rising edge | 2.67 | | ns |

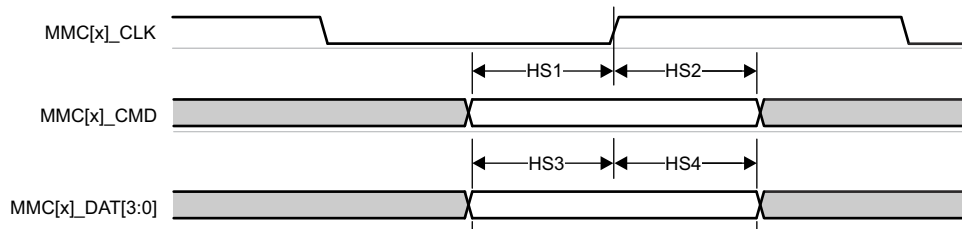


Figure 7-66. MMC1 – High Speed – Receive Mode

Table 7-81. Switching Characteristics for MMC1 – High Speed Mode

see Figure 7-67

| NO. | PARAMETER | MIN | MAX | UNIT |
|-----|------------------|-------|------|------|
| | $f_{op(clk)}$ | | 50 | MHz |
| HS5 | $t_c(clk)$ | 20 | | ns |
| HS6 | $t_w(clkH)$ | 9.2 | | ns |
| HS7 | $t_w(clkL)$ | 9.2 | | ns |
| HS8 | $t_d(clkL-cmdV)$ | -7.35 | 3.35 | ns |
| HS9 | $t_d(clkL-dV)$ | -7.35 | 3.35 | ns |

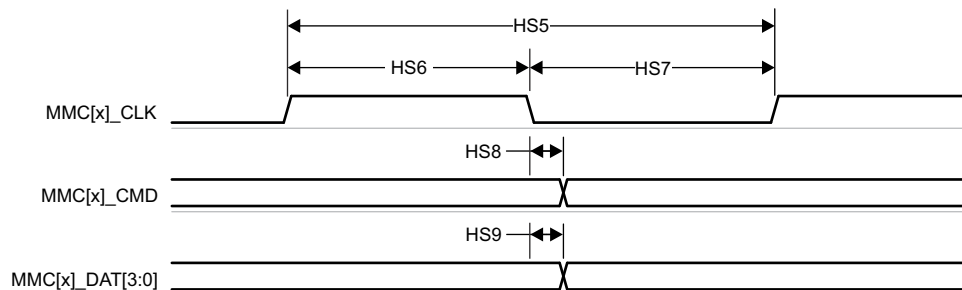


Figure 7-67. MMC1 – High Speed – Transmit Mode

7.10.5.12.2.3 UHS-I SDR12 Mode

Table 7-82, Figure 7-68, Table 7-83, and Figure 7-69 present timing requirements and switching characteristics for MMC1 – UHS-I SDR12 Mode.

Table 7-82. Timing Requirements for MMC1 – UHS-I SDR12 Mode

see Figure 7-68

| NO. | | | MIN | MAX | UNIT |
|--------|---------------------|---|-------|-----|------|
| SDR121 | $t_{su(cmdV-clkH)}$ | Setup time, MMC1_CMD valid before MMC1_CLK rising edge | 21.65 | | ns |
| SDR122 | $t_{h(clkH-cmdV)}$ | Hold time, MMC1_CMD valid after MMC1_CLK rising edge | 1.67 | | ns |
| SDR123 | $t_{su(dV-clkH)}$ | Setup time, MMC1_DAT[3:0] valid before MMC1_CLK rising edge | 21.65 | | ns |
| SDR124 | $t_{h(clkH-dV)}$ | Hold time, MMC1_DAT[3:0] valid after MMC1_CLK rising edge | 1.67 | | ns |

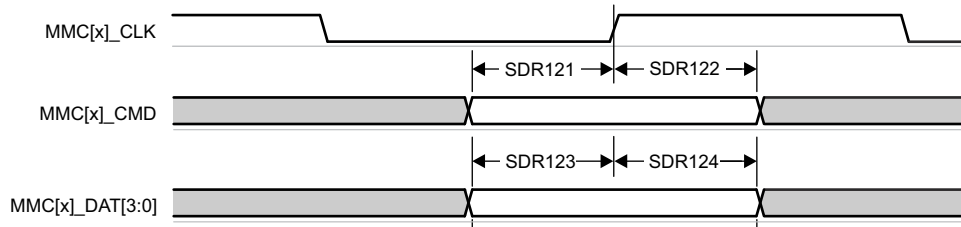


Figure 7-68. MMC1 – UHS-I SDR12 – Receive Mode

Table 7-83. Switching Characteristics for MMC1 – UHS-I SDR12 Mode

see Figure 7-69

| NO. | PARAMETER | MIN | MAX | UNIT |
|--------|--------------------|-------|------|------|
| | $f_{op(clk)}$ | | 25 | MHz |
| SDR125 | $t_{c(clk)}$ | 40 | | ns |
| SDR126 | $t_{w(clkH)}$ | 18.7 | | ns |
| SDR127 | $t_{w(clkL)}$ | 18.7 | | ns |
| SDR128 | $t_{d(clkL-cmdV)}$ | -13.6 | 13.6 | ns |
| SDR129 | $t_{d(clkL-dV)}$ | -13.6 | 13.6 | ns |

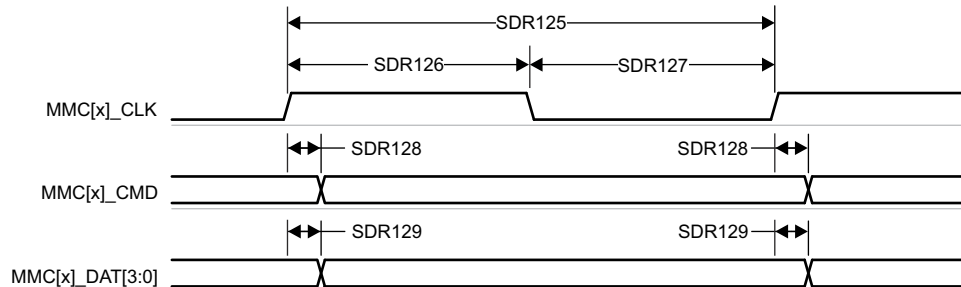


Figure 7-69. MMC1 – UHS-I SDR12 – Transmit Mode

ADVANCE INFORMATION

7.10.5.12.2.4 UHS-I SDR25 Mode

Table 7-84, Figure 7-70, Table 7-85, and Figure 7-71 present timing requirements and switching characteristics for MMC1 – UHS-I SDR25 Mode.

Table 7-84. Timing Requirements for MMC1 – UHS-I SDR25 Mode

see Figure 7-70

| NO. | | | MIN | MAX | UNIT |
|--------|---------------------|---|------|-----|------|
| SDR251 | $t_{su(cmdV-clkH)}$ | Setup time, MMC1_CMD valid before MMC1_CLK rising edge | 2.15 | | ns |
| SDR252 | $t_{h(clkH-cmdV)}$ | Hold time, MMC1_CMD valid after MMC1_CLK rising edge | 1.67 | | ns |
| SDR253 | $t_{su(dV-clkH)}$ | Setup time, MMC1_DAT[3:0] valid before MMC1_CLK rising edge | 2.15 | | ns |
| SDR254 | $t_{h(clkH-dV)}$ | Hold time, MMC1_DAT[3:0] valid after MMC1_CLK rising edge | 1.67 | | ns |

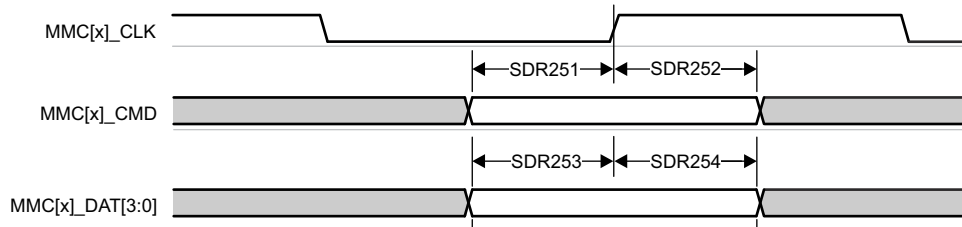


Figure 7-70. MMC1 – UHS-I SDR25 – Receive Mode

Table 7-85. Switching Characteristics for MMC1 – UHS-I SDR25 Mode

see Figure 7-71

| NO. | PARAMETER | MIN | MAX | UNIT |
|--------|--------------------|------|-----|------|
| | $f_{op(clk)}$ | | 50 | MHz |
| SDR255 | $t_{c(clk)}$ | 20 | | ns |
| SDR256 | $t_{w(clkH)}$ | 9.2 | | ns |
| SDR257 | $t_{w(clkL)}$ | 9.2 | | ns |
| SDR258 | $t_{d(clkL-cmdV)}$ | -7.1 | 3.1 | ns |
| SDR259 | $t_{d(clkL-dV)}$ | -7.1 | 3.1 | ns |

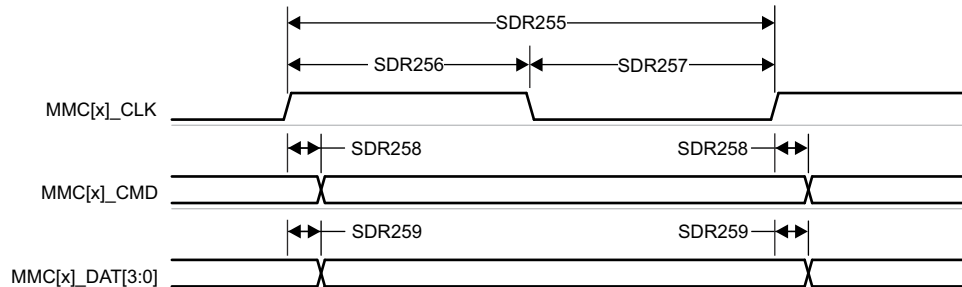


Figure 7-71. MMC1 – UHS-I SDR25 – Transmit Mode

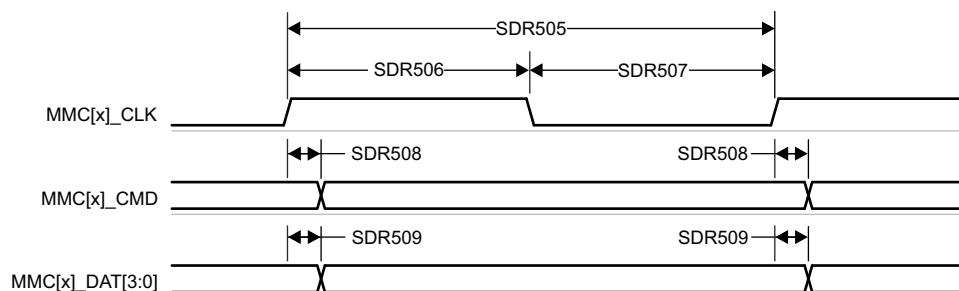
7.10.5.12.2.5 UHS-I SDR50 Mode

Table 7-86, and Figure 7-72 presents switching characteristics for MMC1 – UHS-I SDR50 Mode.

Table 7-86. Switching Characteristics for MMC1 – UHS-I SDR50 Mode

see Figure 7-72

| NO. | PARAMETER | | MIN | MAX | UNIT |
|--------|--------------------|--|------|------|------|
| | $f_{op}(clk)$ | Operating frequency, MMC1_CLK | | 100 | MHz |
| SDR505 | $t_{c}(clk)$ | Cycle time, MMC1_CLK | 10 | | ns |
| SDR506 | $t_{w}(clkH)$ | Pulse duration, MMC1_CLK high | 4.45 | | ns |
| SDR507 | $t_{w}(clkL)$ | Pulse duration, MMC1_CLK low | 4.45 | | ns |
| SDR508 | $t_{d}(clkL-cmdV)$ | Delay time, MMC1_CLK rising edge to MMC1_CMD transition | 1.2 | 6.35 | ns |
| SDR509 | $t_{d}(clkL-dV)$ | Delay time, MMC1_CLK rising edge to MMC1_DAT[3:0] transition | 1.2 | 6.35 | ns |


Figure 7-72. MMC1 – UHS-I SDR50 – Transmit Mode

7.10.5.12.2.6 UHS-I DDR50 Mode

Table 7-87, Figure 7-73, Table 7-88, and Figure 7-74 present timing requirements and switching characteristics for MMC1 – UHS-I DDR50 Mode.

Table 7-87. Timing Requirements for MMC1 – UHS-I DDR50 Mode

see Figure 7-73

| NO. | | | MIN | MAX | UNIT |
|--------|--------------------|--|-------|-----|------|
| DDR501 | $t_{su(cmdV-clk)}$ | Setup time, MMC1_CMD valid before MMC1_CLK rising edge | 2.99 | | ns |
| DDR502 | $t_{h(clk-cmdV)}$ | Hold time, MMC1_CMD valid after MMC1_CLK rising edge | 1.91 | | ns |
| DDR503 | $t_{su(dV-clk)}$ | Setup time, MMC1_DAT[3:0] valid before MMC1_CLK transition | -0.06 | | ns |
| DDR504 | $t_{h(clk-dV)}$ | Hold time, MMC1_DAT[3:0] valid after MMC1_CLK transition | 1.91 | | ns |

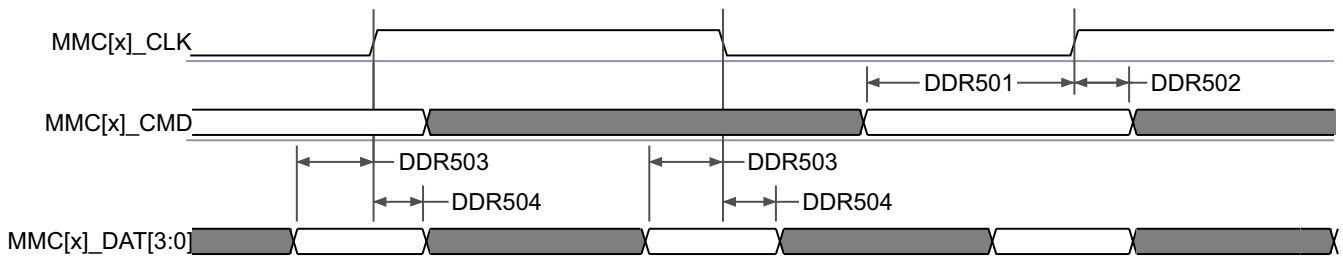


Figure 7-73. MMC1 – UHS-I DDR50 – Receive Mode

Table 7-88. Switching Characteristics for MMC1 – UHS-I DDR50 Mode

see Figure 7-74

| NO. | PARAMETER | MIN | MAX | UNIT |
|--------|-------------------|-----|------|------|
| | $f_{op(clk)}$ | | 50 | MHz |
| DDR505 | $t_{c(clk)}$ | 20 | | ns |
| DDR506 | $t_{w(clkH)}$ | 9.2 | | ns |
| DDR507 | $t_{w(clkL)}$ | 9.2 | | ns |
| DDR508 | $t_{d(clk-cmdV)}$ | 1.2 | 13.1 | ns |
| DDR509 | $t_{d(clk-dV)}$ | 1.2 | 6.35 | ns |

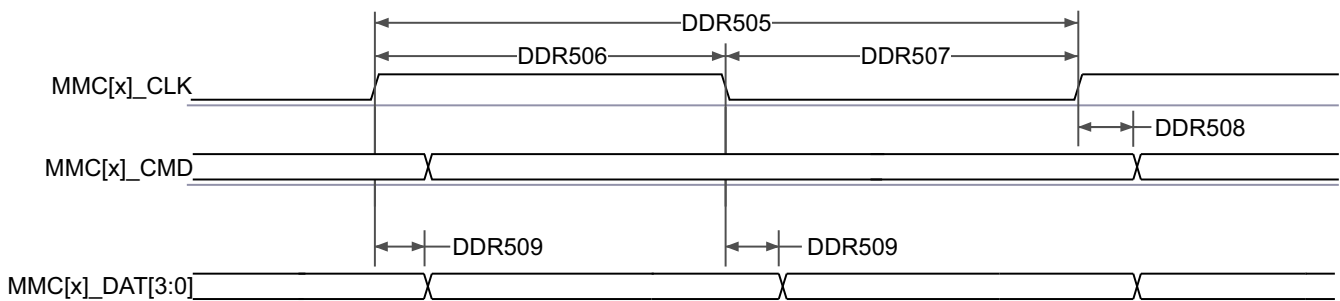


Figure 7-74. MMC1 – UHS-I DDR50 – Transmit Mode

7.10.5.12.2.7 UHS-I SDR104 Mode

Table 7-89, and Figure 7-75 present switching characteristics for MMC1 – UHS-I SDR104 Mode.

Table 7-89. Switching Characteristics for MMC1 – UHS-I SDR104 Mode

see Figure 7-75

| NO. | PARAMETER | | MIN | MAX | UNIT |
|---------|--------------------|--|------|------|------|
| | $f_{op}(clk)$ | Operating frequency, MMC1_CLK | | 200 | MHz |
| SDR1045 | $t_{c}(clk)$ | Cycle time, MMC1_CLK | 5 | | ns |
| SDR1046 | $t_{w}(clkH)$ | Pulse duration, MMC1_CLK high | 2.08 | | ns |
| SDR1047 | $t_{w}(clkL)$ | Pulse duration, MMC1_CLK low | 2.08 | | ns |
| SDR1048 | $t_{d}(clkL-cmdV)$ | Delay time, MMC1_CLK rising edge to MMC1_CMD transition | 1.12 | 3.16 | ns |
| SDR1049 | $t_{d}(clkL-dV)$ | Delay time, MMC1_CLK rising edge to MMC1_DAT[3:0] transition | 1.12 | 3.16 | ns |

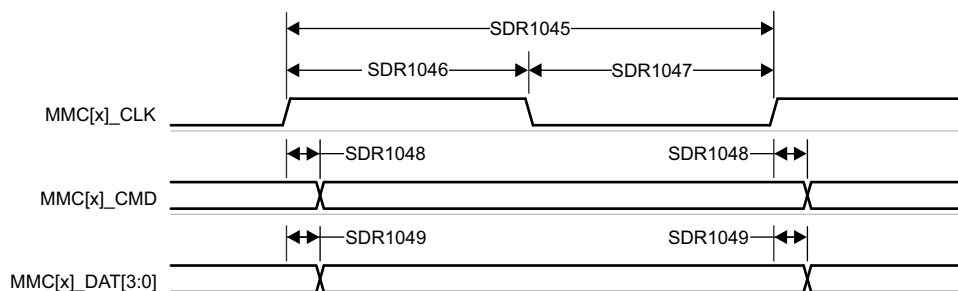

Figure 7-75. MMC1 – UHS-I SDR104 – Transmit Mode
7.10.5.13 CPTS

Table 7-90, Table 7-91, Figure 7-76, Table 7-92, and Figure 7-77 present timing conditions, requirements, and switching characteristics for CPTS.

Table 7-90. CPTS Timing Conditions

| PARAMETER | | MIN | MAX | UNIT |
|--------------------------|-------------------------|-----|-----|------|
| INPUT CONDITIONS | | | | |
| SR_i | Input slew rate | 0.5 | 5 | V/ns |
| OUTPUT CONDITIONS | | | | |
| C_L | Output load capacitance | 2 | 10 | pF |

Table 7-91. CPTS Timing Requirements

see Figure 7-76

| NO. | PARAMETER | DESCRIPTION | MIN | MAX | UNIT |
|-----|--------------------|--------------------------------|-----------------|-----|------|
| T1 | $t_{w}(HWTSPUSHH)$ | Pulse duration, HWnTSPUSH high | $12P^{(1)} + 2$ | | ns |
| T2 | $t_{w}(HWTSPUSHL)$ | Pulse duration, HWnTSPUSH low | $12P^{(1)} + 2$ | | ns |
| T3 | $t_{c}(RFT_CLK)$ | Cycle time, RFT_CLK | 5 | 8 | ns |
| T4 | $t_{w}(RFT_CLKH)$ | Pulse duration, RFT_CLK high | $0.45T^{(2)}$ | | ns |
| T5 | $t_{w}(RFT_CLKL)$ | Pulse duration, RFT_CLK low | $0.45T^{(2)}$ | | ns |

(1) P = functional clock period in ns.

(2) T = RFT_CLK period in ns.

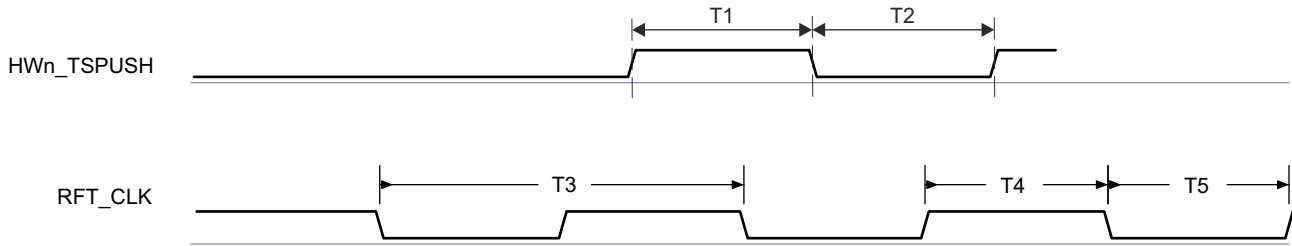


Figure 7-76. CPTS Timing Requirements

Table 7-92. CPTS Switching Characteristics

see Figure 7-77

| NO. | PARAMETER | DESCRIPTION | SOURCE | MIN | MAX | UNIT |
|-----|---------------------------|--------------------------------|---------|-----------------|-----|------|
| T6 | $t_w(\text{TS_COMPH})$ | Pulse duration, TS_COMP high | | $36P^{(1)} - 2$ | | ns |
| T7 | $t_w(\text{TS_COMPL})$ | Pulse duration, TS_COMP low | | $36P^{(1)} - 2$ | | ns |
| T8 | $t_w(\text{TS_SYNCH})$ | Pulse duration, TS_SYNC high | | $36P^{(1)} - 2$ | | ns |
| T9 | $t_w(\text{TS_SYNCL})$ | Pulse duration, TS_SYNC low | | $36P^{(1)} - 2$ | | ns |
| T10 | $t_w(\text{SYNCn_OUTH})$ | Pulse duration, SYNCn_OUT high | TS_SYNC | $36P^{(1)} - 2$ | | ns |
| | | | GENF | $5P^{(1)} - 2$ | | ns |
| T11 | $t_w(\text{SYNCn_OUTL})$ | Pulse duration, SYNCn_OUT low | TS_SYNC | $36P^{(1)} - 2$ | | ns |
| | | | GENF | $5P^{(1)} - 2$ | | ns |

(1) P = functional clock period in ns.

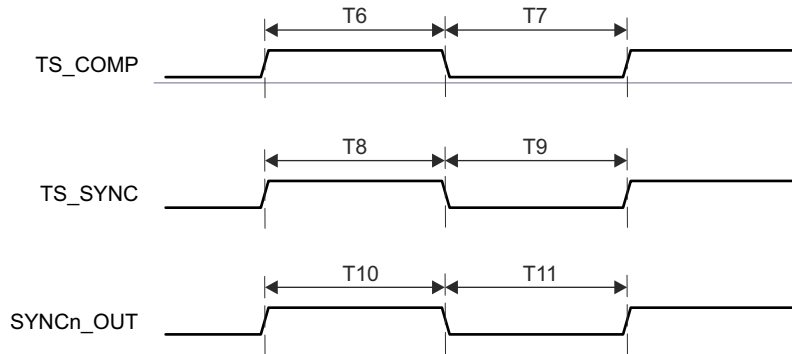


Figure 7-77. CPTS Switching Characteristics

For more information, see *Data Movement Architecture (DMA)* chapter in the device TRM.

7.10.5.14 OSPI

For more details about features and additional description information on the device Octal Serial Peripheral Interface, see the corresponding subsections within *Signal Descriptions* and *Detailed Description* sections.

Table 7-93 presents timing conditions for OSPI.

Table 7-93. OSPI Timing Conditions

| PARAMETER | | MIN | MAX | UNIT |
|--------------------------------------|---------------------------------|-----|-----|------|
| INPUT CONDITIONS | | | | |
| SR _I | Input slew rate | 1 | 6 | V/ns |
| OUTPUT CONDITIONS | | | | |
| C _L | Output load capacitance | 3 | 10 | pF |
| PCB CONNECTIVITY REQUIREMENTS | | | | |
| t _d (Trace Delay) | Propagation delay of each trace | | 450 | ps |

Table 7-93. OSPI Timing Conditions (continued)

| PARAMETER | | MIN | MAX | UNIT |
|------------------------------|--|-----|-----|------|
| t_d (Trace Mismatch Delay) | Propagation delay mismatch across all traces | | 60 | ps |

For more information, see *Octal Serial Peripheral Interface (OSPI)* section in *Peripherals* chapter in the device TRM.

7.10.5.14.1 OSPI With Data Training

7.10.5.14.1.1 OSPI Switching Characteristics – Data Training

Table 7-94 presents switching characteristics for OSPI with Data Training.

Table 7-94. OSPI Switching Characteristics – Data Training

| PARAMETER | | MODE | MIN | MAX | UNIT |
|--------------|-----------------|-----------|------|-----|------|
| $t_{c(CLK)}$ | Cycle time, CLK | 1.8V, SDR | 6.02 | | ns |
| | | 3.3V, SDR | 7.52 | | ns |
| | | 1.8V, DDR | 6.02 | | ns |
| | | 3.3V, DDR | 7.52 | | ns |

7.10.5.14.2 OSPI Without Data Training

Note

The I/O Timings provided in this section are only applicable when data training is not implemented. Additionally, the I/O Timings are valid only for some OSPI usage modes when the corresponding DLL Delays are configured as described in Table 7-95.

Table 7-95. OSPI DLL Delay Mapping for Timing Modes

| MODE | OSPI_PHY_CONFIGURATION_REG BIT FIELD | DELAY VALUE |
|--------------------|---|-------------|
| 1.8V, OSPI0 DDR TX | PHY_CONFIG_TX_DLL_DELAY_FLD | 0x45 |
| 3.3V, OSPI0 DDR TX | PHY_CONFIG_TX_DLL_DELAY_FLD | 0x46 |
| 1.8V, OSPI0 DQS | PHY_CONFIG_RX_DLL_DELAY_FLD | 0x14 |
| 3.3V, OSPI0 DQS | PHY_CONFIG_RX_DLL_DELAY_FLD | 0x3A |
| All other modes | PHY_CONFIG_TX_DLL_DELAY_FLD, PHY_CONFIG_RX_DLL_DELAY_FLD | 0x0 |

7.10.5.14.2.1 OSPI SDR Timing

Table 7-96, Figure 7-78, Figure 7-79, Table 7-97, and Figure 7-80 present timing requirements and switching characteristics for OSPI SDR Mode.

Table 7-96. OSPI Timing Requirements – SDR Mode

see Figure 7-78 and Figure 7-79

| NO. (1) | | | MODE | MIN | MAX | UNIT |
|---------|-------------------|---|-------------------------------|-------|-----|------|
| O19 | $t_{su(D-CLK)}$ | Setup time, D[i:0] valid before active CLK edge | 1.8V, No Loopback | -2.19 | | ns |
| | | | 3.3V, No Loopback | -1.71 | | ns |
| O20 | $t_h(CLK-D)$ | Hold time, D[i:0] valid after active CLK edge | 1.8V, No Loopback | 7.62 | | ns |
| | | | 3.3V, No Loopback | 8.1 | | ns |
| O21 | $t_{su(D-LBCLK)}$ | Setup time, D[i:0] valid before active LBCLK input (DQS) edge | 1.8V, External Board Loopback | -3.1 | | ns |
| | | | 3.3V, External Board Loopback | -3.47 | | ns |

Table 7-96. OSPI Timing Requirements – SDR Mode (continued)

see [Figure 7-78](#) and [Figure 7-79](#)

| NO. (1) | | MODE | MIN | MAX | UNIT |
|------------|------------------|-------------------------------|------|-----|------|
| O22 | $t_{h(LBCLK-D)}$ | 1.8V, External Board Loopback | 3.31 | | ns |
| | | 3.3V, External Board Loopback | 4.33 | | ns |

(1) i in [i:0] = 7 for OSPI0

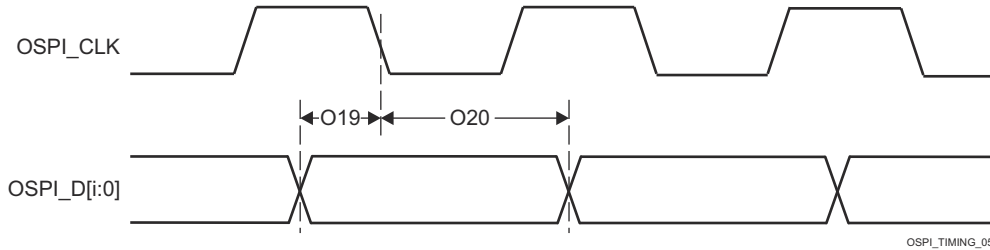


Figure 7-78. OSPI Timing Requirements – SDR, No Loopback Clock and Internal Pad Loopback Clock

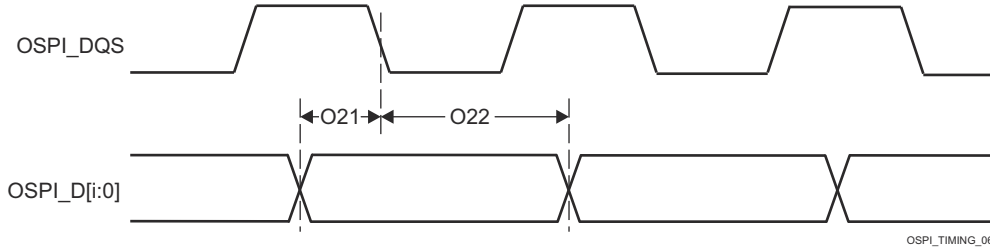


Figure 7-79. OSPI Timing Requirements – SDR, External Loopback Clock

Table 7-97. OSPI Switching Characteristics – SDR Mode

see [Figure 7-80](#)

| NO.(1) | PARAMETER | | MODE | MIN | MAX | UNIT |
|--------|------------------|--|------|--|--|------|
| O7 | $t_{c(CLK)}$ | Cycle time, CLK | 1.8V | 7 | | ns |
| | | | 3.3V | 6.03 | | ns |
| O8 | $t_{w(CLKL)}$ | Pulse duration, CLK low | | 0.475P - 0.3 (2) | | ns |
| O9 | $t_{w(CLKH)}$ | Pulse duration, CLK high | | 0.475P - 0.3 (2) | | ns |
| O10 | $t_{d(CLK-CSn)}$ | Delay time, CLK rising edge to CSn active edge | | - 0.475P - 0.975(N)(R) - 1 (2) (3) (4) | - 0.475P - 0.975(N)(R) + 1 (2) (3) (4) | ns |
| O11 | $t_{d(CLK-CSn)}$ | Delay time, CLK rising edge to CSn inactive edge | | 0.475P + 0.975(N)(R) - 1 (2) (3) (4) | 0.475P + 0.975(N)(R) + 1 (2) (3) (4) | ns |
| O12 | $t_{d(CLK-D)}$ | Delay time, CLK active edge to D[i:0] transition | 1.8V | -1.16 | 1.25 | ns |
| | | | 3.3V | -1.33 | 1.51 | ns |

(1) i in [i:0] = 7 for OSPI0

(2) P = CLK cycle time = SCLK period in ns

(3) N = OSPI_DEV_DELAY_REG[D_INIT_FLD]

(4) R = reflck cycle time in ns

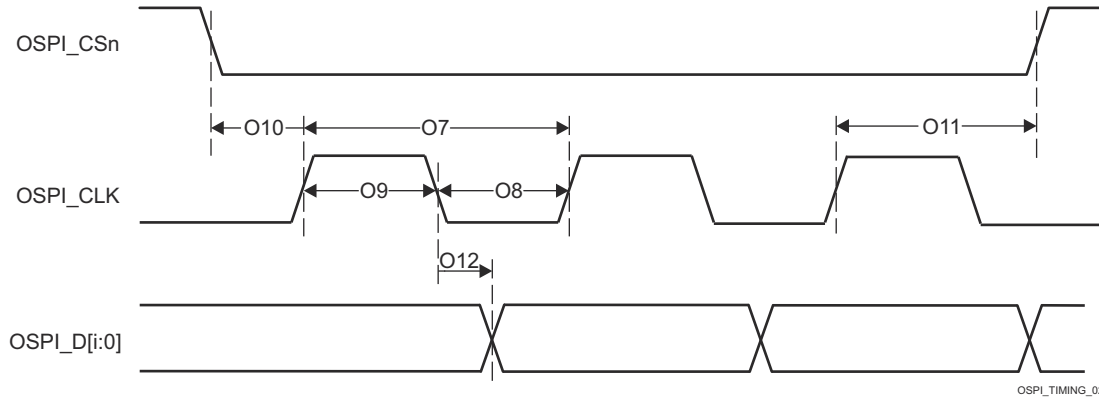


Figure 7-80. OSPI Switching Characteristics – SDR

7.10.5.14.2.2 OSPI DDR Timing

Table 7-98, Figure 7-81, Figure 7-82, Table 7-99, and Figure 7-83 present timing requirements and switching characteristics for OSPI DDR Mode.

Table 7-98. OSPI Timing Requirements – DDR Mode

see Figure 7-81 and Figure 7-82

| NO. (1) | | MODE | MIN | MAX | UNIT |
|------------|-------------------|---|--|---------|------|
| O13 | $t_{su(D-CLK)}$ | Setup time, D[i:0] valid before active CLK edge | 1.8V, No Loopback or Internal Pad Loopback | 5.23 | ns |
| | | | 3.3V, No Loopback or Internal Pad Loopback | 5.44 | ns |
| O14 | $t_{h(CLK-D)}$ | Hold time, D[i:0] valid after active CLK edge | 1.8V, No Loopback or Internal Pad Loopback | 1.34 | ns |
| | | | 3.3V, No Loopback or Internal Pad Loopback | 1.44 | ns |
| O15 | $t_{su(D-LBCLK)}$ | Setup time, D[i:0] valid before active LBCLK (DQS) edge | 1.8V, External Board Loopback | TBD | ns |
| | | | 3.3V, External Board Loopback | TBD | ns |
| O16 | $t_{h(LBCLK-D)}$ | Hold time, D[i:0] valid after active LBCLK (DQS) edge | 1.8V, External Board Loopback | TBD (2) | ns |
| | | | 3.3V, External Board Loopback | TBD (2) | ns |
| O17 | $t_{su(D-DQS)}$ | Setup time, D[i:0] valid before active DQS edge | 1.8V, DQS | -0.46 | ns |
| | | | 3.3V, DQS | -0.66 | ns |
| O18 | $t_{h(DQS-D)}$ | Hold time, D[i:0] valid after active DQS edge | 1.8V, DQS | 3.59 | ns |
| | | | 3.3V, DQS | 7.92 | ns |

- (1) i in [i:0] = 7 for OSPI0
- (2) This Hold time requirement is larger than the Hold time provided by a typical flash device. Therefore, the trace length between the SoC and flash device must be sufficiently long enough to ensure that the Hold time is met at the SoC. The length of the SoC's external loopback clock (OSPI_LBCLKO to OSPI_DQS) may need to be shortened to compensate.

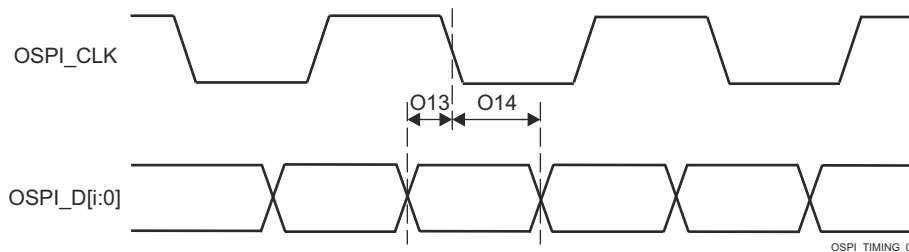


Figure 7-81. OSPI Timing Requirements – DDR, No Loopback Clock and Internal Pad Loopback Clock

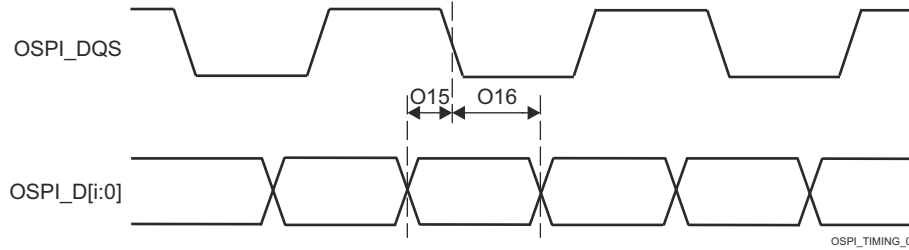


Figure 7-82. OSPI Timing Requirements – DDR, External Loopback Clock and DQS

Table 7-99. OSPI Switching Characteristics – DDR Mode

see Figure 7-83

| NO.(1) | PARAMETER | MODE | MIN | MAX | UNIT |
|--------|-------------------------|--|--|--|------|
| O1 | $t_{c}(\text{CLK})$ | Cycle time, CLK | 19 | | ns |
| O2 | $t_{w}(\text{CLKL})$ | Pulse duration, CLK low | $0.475P - 0.3$ (2) | | ns |
| O3 | $t_{w}(\text{CLKH})$ | Pulse duration, CLK high | $0.475P - 0.3$ (2) | | ns |
| O4 | $t_{d}(\text{CLK-CSn})$ | Delay time, CLK rising edge to CSn active edge | $-0.475P - 0.975(N)(R) - 7$ (2) (3) (4) | $-0.475P - 0.975(N)(R)$ (2) (3) (4) | ns |
| O5 | $t_{d}(\text{CLK-CSn})$ | Delay time, CLK rising edge to CSn inactive edge | $0.475P + 0.975(N)(R)$ (2) (3) (4) | $0.475P + 0.975(N)(R)$ (2) (3) (4) | ns |
| O6 | $t_{d}(\text{CLK-D})$ | 1.8V | -7.71 | -1.56 | ns |
| | | 3.3V | -7.71 | -1.56 | ns |

- (1) i in [i:0] = 7 for OSPI0
- (2) P = CLK cycle time = SCLK period in ns
- (3) N = OSPI_DEV_DELAY_REG[D_INIT_FLD]
- (4) R = refclk cycle time in ns

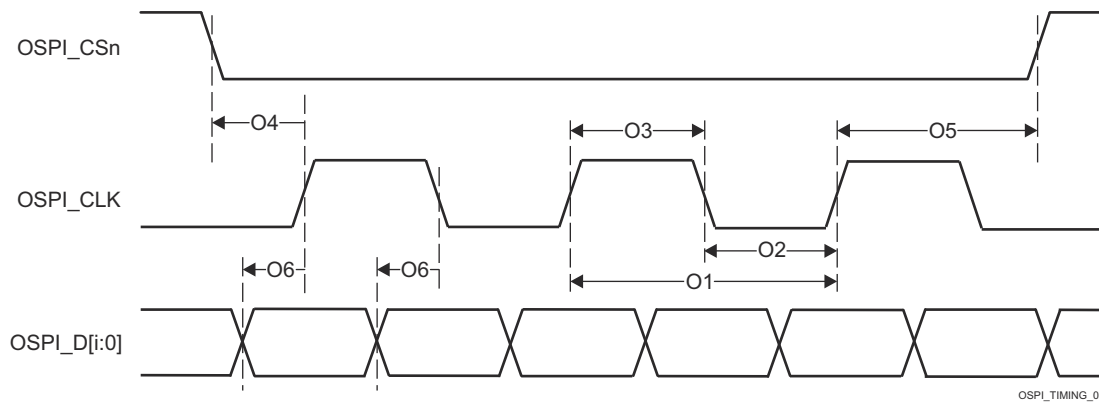


Figure 7-83. OSPI Switching Characteristics – DDR

7.10.5.15 PCIe

The PCI-Express Subsystem is compliant with the PCIe® Base Specification, Revision 4.0. Refer to the specification for timing details.

For more details about features and additional description information on the device Peripheral Component Interconnect Express, see the corresponding subsections within *Signal Descriptions* and *Detailed Description* sections.

For more information, see *Peripheral Component Interconnect Express (PCIe) Subsystem* section in *Peripherals* chapter in the device TRM.

7.10.5.16 PRU_ICSSG

The device has integrated two identical Programmable Real-Time Unit Subsystem and Industrial Communication Subsystems - Gigabit (PRU_ICSSG), PRU_ICSSG0 and PRU_ICSSG1. The programmable nature of the PRU cores, along with their access to pins, events and all device resources, provides flexibility in implementing fast real-time responses, specialized data handling operations, custom peripheral interfaces, and in offloading tasks from the other processor cores in the device.

For more details about features and additional description information on the device PRU_ICSSG, see the corresponding subsections within *Signal Descriptions* and *Detailed Description* sections.

Note

The PRU_ICSSG0 and PRU_ICSSG1 support an internal wrapper multiplexing that expands the device top-level multiplexing.

7.10.5.16.1 PRU_ICSSG Programmable Real-Time Unit (PRU)

Note

The PRU_ICSSG PRU signals have different functionality depending on the mode of operation. The signal naming in this section matches the naming used in the *PRU Module Interface* section in the device TRM.

Table 7-100. PRU_ICSSG PRU Timing Conditions


| PARAMETER | | MIN | MAX | UNIT |
|--------------------------|-------------------------|-----|-----|------|
| INPUT CONDITIONS | | | | |
| SR _i | Input slew rate | 1 | 3 | V/ns |
| OUTPUT CONDITIONS | | | | |
| C _L | Output load capacitance | 2 | 30 | pF |

7.10.5.16.1.1 PRU_ICSSG PRU Direct Output Mode Timing

Table 7-101. PRU_ICSSG PRU Switching Characteristics – Direct Output Mode

see [Figure 7-84](#)

| NO. | PARAMETER | DESCRIPTION | MIN | MAX | UNIT |
|-------|--------------------------|------------------|-----|-----|------|
| PRDO1 | t _{sk(GPO-GPO)} | Skew, GPO to GPO | | 3 | ns |

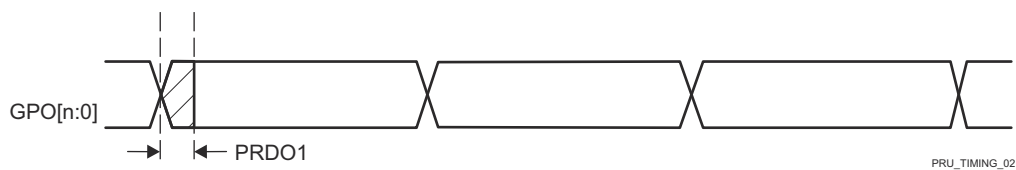

A. n in GPO[n:0] = 19.

Figure 7-84. PRU_ICSSG PRU Direct Output Timing

7.10.5.16.1.2 PRU_ICSSG PRU Parallel Capture Mode Timing

Table 7-102. PRU_ICSSG PRU Timing Requirements – Parallel Capture Mode

see [Figure 7-85](#) and [Figure 7-86](#)

| NO. | PARAMETER | DESCRIPTION | MIN | MAX | UNIT |
|-------|-------------------------------|---|-----|-----|------|
| PRPC1 | t _{c(CLOCK)} | Cycle time, CLOCKIN | 20 | | ns |
| PRPC2 | t _{w(CLOCKL)} | Pulse duration, CLOCKIN low | 10 | | ns |
| PRPC3 | t _{w(CLOCKH)} | Pulse duration, CLOCKIN high | 10 | | ns |
| PRPC4 | t _{su(DATAIN-CLOCK)} | Setup time, DATAIN valid before CLOCKIN active edge | 4 | | ns |

Table 7-102. PRU_ICSSG PRU Timing Requirements – Parallel Capture Mode (continued)

see Figure 7-85 and Figure 7-86

| NO. | PARAMETER | DESCRIPTION | MIN | MAX | UNIT |
|-------|-----------------------|---|-----|-----|------|
| PRPC5 | $t_{h(CLOCK-DATAIN)}$ | Hold time, DATAIN valid after CLOCKIN active edge | 0 | | ns |

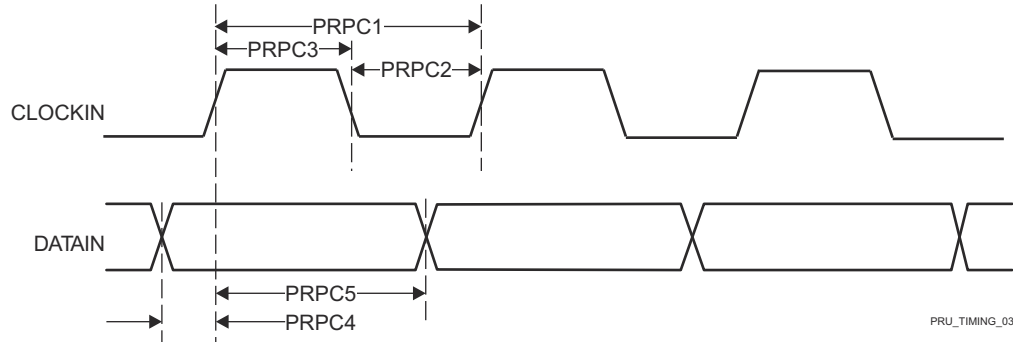


Figure 7-85. PRU_ICSSG PRU Parallel Capture Timing Requirements – Rising Edge Mode

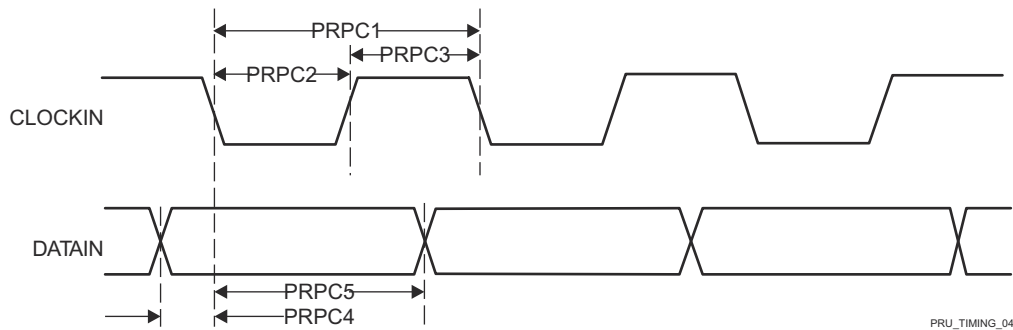


Figure 7-86. PRU_ICSSG PRU Parallel Capture Timing Requirements – Falling Edge Mode

7.10.5.16.1.3 PRU_ICSSG PRU Shift Mode Timing

Table 7-103. PRU_ICSSG PRU Timing Requirements – Shift In Mode

see Figure 7-87

| NO. | PARAMETER | DESCRIPTION | MIN | MAX | UNIT |
|-------|------------------|-----------------------------|---------------|-----|------|
| PRS11 | $t_{w(DATAINH)}$ | Pulse duration, DATAIN high | $2+2*P^{(1)}$ | | ns |
| PRS12 | $t_{w(DATAINL)}$ | Pulse duration, DATAIN low | $2+2*P^{(1)}$ | | ns |

(1) P = Internal shift in clock period, defined by PRUn_GPI_DIV0 and PRUn_GPI_DIV1 bit fields in the ICSSG_GPCFGn_REG register. PRUn represents the respective PRU0 or PRU1 instance.

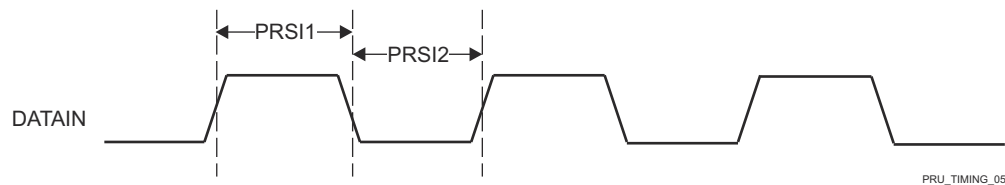


Figure 7-87. PRU_ICSSG PRU Shift In Timing

Table 7-104. PRU_ICSSG PRU Switching Characteristics – Shift Out Mode

see Figure 7-88

| NO. | PARAMETER | DESCRIPTION | MIN | MAX | UNIT |
|-------|-----------------|----------------------|-----|-----|------|
| PRSO1 | $t_c(CLOCKOUT)$ | Cycle time, CLOCKOUT | 10 | | ns |

Table 7-104. PRU_ICSSG PRU Switching Characteristics – Shift Out Mode (continued)

see Figure 7-88

| NO. | PARAMETER | DESCRIPTION | MIN | MAX | UNIT |
|--------|---------------------------|---------------------------------------|------------------------------------|-----|------|
| PRSO2L | $t_{w(CLOCKOUTL)}$ | Pulse duration, CLOCKOUT low | -0.3 + $0.475 * P * Z^{(1)(2)}$ | | ns |
| PRSO2H | $t_{w(CLOCKOUTH)}$ | Pulse duration, CLOCKOUT high | -0.3 + $0.475 * P * Y^{(1)(3)}$ | | ns |
| PRSO3 | $t_{d(CLOCKOUT-DATAOUT)}$ | Delay time, CLOCKOUT to DATAOUT valid | -1 | 4 | ns |

- (1) P = Software programmable shift out clock period, defined by PRUn_GPO_DIV0 and PRUn_GPO_DIV1 bit fields in the ICSSG_GPCFGn_REG register, where PRUn represents the respective PRU0 or PRU1 instance.
- (2) The Z parameter is defined as follows, where PRUn represents the respective PRU0 or PRU1 instance.
 - a. If PRUn_GPI_DIV0 and PRUn_GPI_DIV1 are INTEGERS -or- if PRUn_GPI_DIV0 is a NON-INTEGERS and PRUn_GPI_DIV1 is an EVEN INTEGER then, Z equals $(PRUn_GPI_DIV0 * PRUn_GPI_DIV1)$.
 - b. If PRUn_GPI_DIV0 is a NON-INTEGERS and PRUn_GPI_DIV1 is an ODD INTEGER then, Z equals $(PRUn_GPI_DIV0 * PRUn_GPI_DIV1 + 0.5)$.
 - c. If PRUn_GPI_DIV0 is a NON-INTEGERS and PRUn_GPI_DIV1 is an ODD INTEGER then, Z equals $(PRUn_GPI_DIV0 * PRUn_GPI_DIV1 + 0.5)$.
 - d. If PRUn_GPI_DIV0 is an INTEGER and PRUn_GPI_DIV1 is a NON-INTEGERS then, Z equals $(PRUn_GPI_DIV0 * PRUn_GPI_DIV1 + 0.5 * PRUn_GPI_DIV0)$. If PRUn_GPI_DIV0 and PRUn_GPI_DIV1 are NON-INTEGERS then, Z equals $(PRUn_GPI_DIV0 * PRUn_GPI_DIV1 + 0.25 * PRUn_GPI_DIV0)$.
- (3) The Y parameter is defined as follows, where PRUn represents the respective PRU0 or PRU1 instance.
 - a. If PRUn_GPI_DIV0 and PRUn_GPI_DIV1 are INTEGERS -or- if PRUn_GPI_DIV0 is a NON-INTEGERS and PRUn_GPI_DIV1 is an EVEN INTEGER then, Y equals $(PRUn_GPI_DIV0 * PRUn_GPI_DIV1)$. If PRUn_GPI_DIV0 is a NON-INTEGERS and PRUn_GPI_DIV1 is an ODD INTEGER then, Y equals $(PRUn_GPI_DIV0 * PRUn_GPI_DIV1 - 0.5)$.
 - b. If PRUn_GPI_DIV0 is an INTEGER and PRUn_GPI_DIV1 is a NON-INTEGERS then, Y equals $(PRUn_GPI_DIV0 * PRUn_GPI_DIV1 - 0.5 * PRUn_GPI_DIV0)$.
 - c. If PRUn_GPI_DIV0 and PRUn_GPI_DIV1 are NON-INTEGERS then, Y1 equals $(PRUn_GPI_DIV0 * PRUn_GPI_DIV1 - 0.25 * PRUn_GPI_DIV0)$ and Y2 equals $(PRUn_GPI_DIV0 * PRUn_GPI_DIV1 + 0.25 * PRUn_GPI_DIV0)$, where Y1 is the first high pulse and Y2 is the second high pulse.

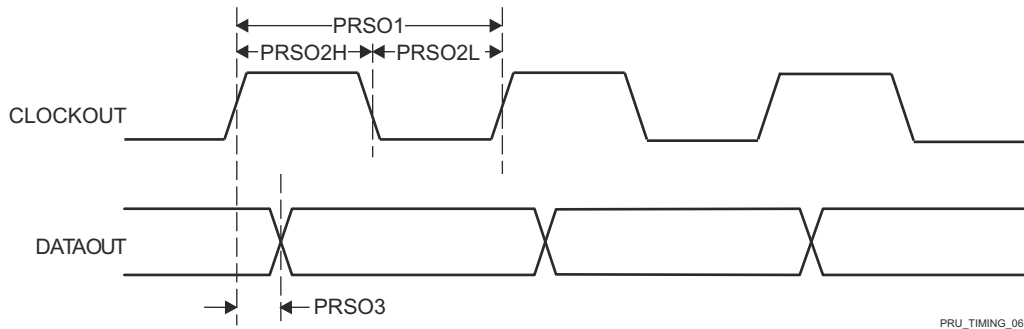


Figure 7-88. PRU_ICSSG PRU Shift Out Timing

7.10.5.16.1.4 PRU_ICSSG PRU Sigma Delta and Peripheral Interface

Table 7-105. PRU_ICSSG PRU Sigma Delta and Peripheral Interface Timing Conditions

| PARAMETER | MIN | MAX | UNIT |
|--|-----|-----|------|
| INPUT CONDITIONS | | | |
| SR _i Input slew rate | 1 | 3 | V/ns |
| OUTPUT CONDITIONS | | | |
| C _L Output load capacitance | 2 | 18 | pF |

ADVANCE INFORMATION

7.10.5.16.1.4.1 PRU_ICSSG PRU Sigma Delta and Peripheral Interface Timing

Table 7-106. PRU_ICSSG PRU Timing Requirements – Sigma Delta Mode

see Figure 7-89 and Figure 7-90

| NO. | PARAMETER | DESCRIPTION | MIN | MAX | UNIT |
|--------|-------------------------|--|-----|-----|------|
| PRSD1 | $t_{c(SD_CLK)}$ | Cycle time, SDx_CLK | 40 | | ns |
| PRSD2L | $t_{w(SD_CLKL)}$ | Pulse duration, SDx_CLK low | 20 | | ns |
| PRSD2H | $t_{w(SD_CLKH)}$ | Pulse duration, SDx_CLK high | 20 | | ns |
| PRSD3 | $t_{su(SD_D-SD_CLK)}$ | Setup time, SDx_D valid before SDx_CLK active edge | 10 | | ns |
| PRSD4 | $t_{h(SD_CLK-SD_D)}$ | Hold time, SDx_D valid before SDx_CLK active edge | 5 | | ns |

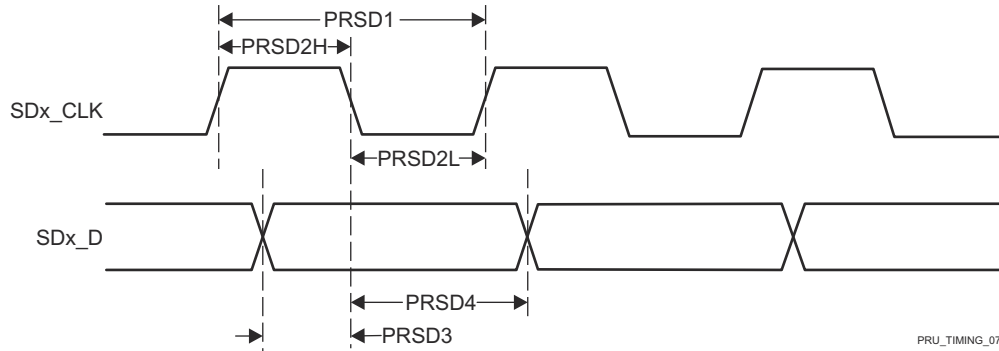


Figure 7-89. PRU_ICSSG PRU SD_CLK Falling Active Edge

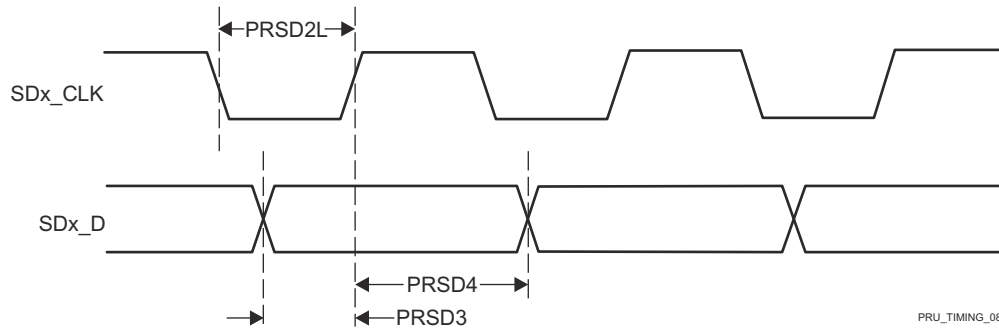


Figure 7-90. PRU_ICSSG PRU SD_CLK Rising Active Edge

Table 7-107. PRU_ICSSG PRU Timing Requirements – Peripheral Interface Mode

see Figure 7-91

| NO. | PARAMETER | DESCRIPTION | MIN | MAX | UNIT |
|--------|-------------------------|----------------------------------|-------------------------------------|-----|------|
| PRPIF1 | $t_{w(PIF_DATA_INH)}$ | Pulse duration, PIF_DATA_IN high | $2 + 0.475 \cdot (4 \cdot P)^{(1)}$ | | ns |
| PRPIF2 | $t_{w(PIF_DATA_INL)}$ | Pulse duration, PIF_DATA_IN low | $2 + 0.475 \cdot (4 \cdot P)^{(1)}$ | | ns |

(1) P = 1x (or TX) clock period in ns, defined by PRUn_ED_TX_DIV_FACTOR and PRUn_ED_TX_DIV_FACTOR_FRAC in the ICSSG_PRUn_ED_TX_CFG_REG register. PRUn represents the respective PRU0 or PRU1 instance.

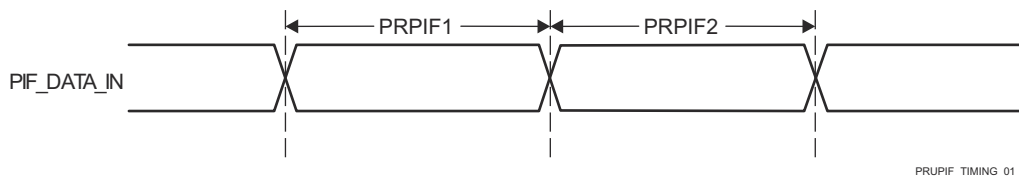


Figure 7-91. PRU_ICSSG PRU Peripheral Interface Timing Requirements

Table 7-108. PRU_ICSSG PRU Switching Characteristics – Peripheral Interface Mode

see [Figure 7-92](#)

| NO. | PARAMETER | DESCRIPTION | MIN | MAX | UNIT |
|--------|---------------------------------------|--|-----------------------|-----|------|
| PRPIF3 | $t_c(\text{PIF_CLK})$ | Cycle time, PIF_CLK | 30 | | ns |
| PRPIF4 | $t_w(\text{PIF_CLKH})$ | Pulse duration, PIF_CLK high | $0.475 \cdot P^{(1)}$ | | ns |
| PRPIF5 | $t_w(\text{PIF_CLKL})$ | Pulse duration, PIF_CLK low | $0.475 \cdot P^{(1)}$ | | ns |
| PRPIF6 | $t_d(\text{PIF_CLK-PIF_DATA_OUT})$ | Delay time, PIF_CLK fall to PIF_DATA_OUT | -5 | 5 | ns |
| PRPIF7 | $t_d(\text{PIF_CLK-PIF_DATA_EN})$ | Delay time, PIF_CLK fall to PIF_DATA_EN | -5 | 5 | ns |

(1) $P = 1x$ (or TX) clock period in ns, defined by PRUn_ED_TX_DIV_FACTOR and PRUn_ED_TX_DIV_FACTOR_FRAC in the ICSSG_PRUn_ED_TX_CFG_REG register. PRUn represents the respective PRU0 or PRU1 instance.

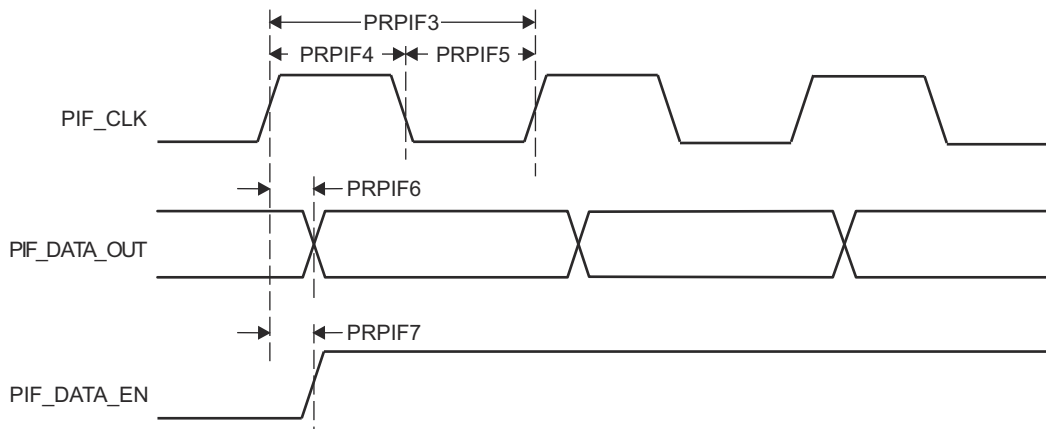


Figure 7-92. PRU_ICSSG PRU Peripheral Interface Switching Characteristics

7.10.5.16.2 PRU_ICSSG Pulse Width Modulation (PWM)

Table 7-109. PRU_ICSSG PWM Timing Conditions

| PARAMETER | | MIN | MAX | UNIT |
|--------------------------|-------------------------|-----|-----|------|
| INPUT CONDITIONS | | | | |
| SR_i | Input slew rate | 1 | 4 | V/ns |
| OUTPUT CONDITIONS | | | | |
| C_L | Output load capacitance | 2 | 7 | pF |

7.10.5.16.2.1 PRU_ICSSG PWM Timing

Table 7-110. PRU_ICSSG PWM Switching Characteristics

see [Figure 7-93](#)

| NO. | PARAMETER | DESCRIPTION | MIN | MAX | UNIT |
|--------|--------------------------------|----------------------|-----|-----|------|
| PRPWM1 | $t_{sk}(\text{PWM_A-PWM_B})$ | Skew, PWM_A to PWM_B | | 5 | ns |

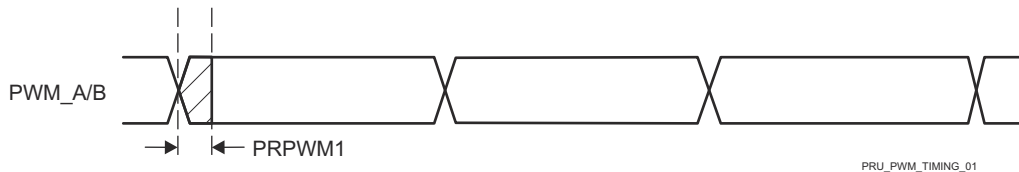


Figure 7-93. PRU_ICSSG PWM Timing

7.10.5.16.3 PRU_ICSSG Industrial Ethernet Peripheral (IEP)

Table 7-111. PRU_ICSSG IEP Timing Conditions

| PARAMETER | | MIN | MAX | UNIT |
|--------------------------|-------------------------|-----|-----|------|
| INPUT CONDITIONS | | | | |
| SR _I | Input slew rate | 1 | 3 | V/ns |
| OUTPUT CONDITIONS | | | | |
| C _L | Output load capacitance | 2 | 7 | pF |


7.10.5.16.3.1 PRU_ICSSG IEP Timing

Table 7-112. PRU_ICSSG IEP Timing Requirements – Input Validated with SYNC

see Figure 7-94

| NO. | PARAMETER | DESCRIPTION | MIN | MAX | UNIT |
|--------|--|---|------------------------|-----|------|
| PRIEP1 | t _w (EDC_SYNC_OUTxL) | Pulse duration, EDC_SYNC_OUTx low | -2+20*P ⁽¹⁾ | | ns |
| PRIEP2 | t _w (EDC_SYNC_OUTxH) | Pulse duration, EDC_SYNC_OUTx high | -2+20*P ⁽¹⁾ | | ns |
| PRIEP3 | t _{su} (EDIO_DATA_IN-EDC_SYNC_OUTx) | Setup time, EDIO_DATA_IN valid before EDC_SYNC_OUTx active edge | 20 | | ns |
| PRIEP4 | t _h (EDC_SYNC_OUTx-EDIO_DATA_IN) | Hold time, EDIO_DATA_IN valid after EDC_SYNC_OUTx active edge | 20 | | ns |

(1) P = PRU_ICSSG IEP clock source period in ns.

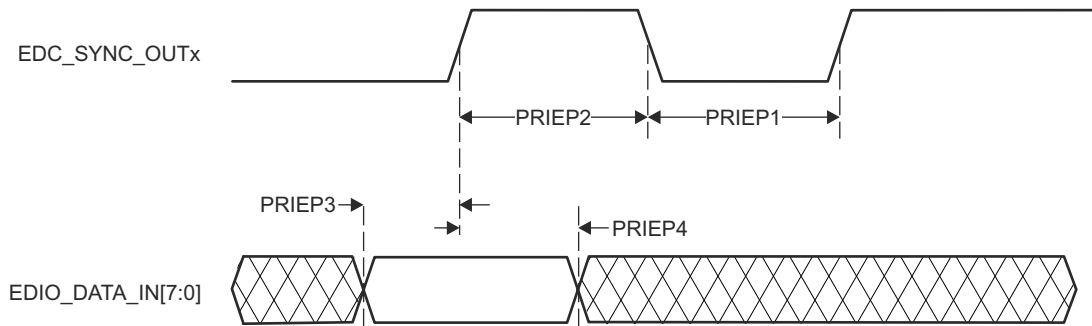

PRU_IEP_TIMING_01

Figure 7-94. PRU_ICSSG IEP SYNC Timing Requirements

Table 7-113. PRU_ICSSG IEP Timing Requirements – Digital IOs

see Figure 7-95

| NO. | PARAMETER | DESCRIPTION | MIN | MAX | UNIT |
|--------|--|--|------------------------|---------------------|------|
| IEPIO1 | t _w (EDIO_OUTVALIDL) | Pulse duration, EDIO_OUTVALID low | -2+14*P ⁽¹⁾ | | ns |
| IEPIO2 | t _w (EDIO_OUTVALIDH) | Pulse duration, EDIO_OUTVALID high | -2+32*P ⁽¹⁾ | | ns |
| IEPIO3 | t _d (EDIO_OUTVALID-EDIO_DATA_OUT) | Delay time, EDIO_OUTVALID to EDIO_DATA_OUT | 0 | 18*P ⁽¹⁾ | ns |
| IEPIO4 | t _{sk} (EDIO_DATA_OUT) | EDIO_DATA_OUT skew | 5 | | ns |

(1) P = PRU_ICSSG IEP clock source period in ns.



PRU_EDIO_DATA_OUT_TIMING_00

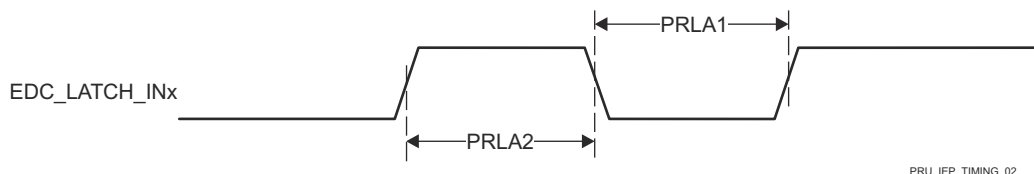
Figure 7-95. PRU_ICSSG IEP Digital IOs Timing Requirements

Table 7-114. PRU_ICSSG IEP Timing Requirements – LATCH_INx

 see [Figure 7-96](#)

| NO. | PARAMETER | DESCRIPTION | MIN | MAX | UNIT |
|-------|---------------------------|------------------------------------|---------------|-----|------|
| PRLA1 | $t_{w(EDC_LATCH_INxL)}$ | Pulse duration, EDC_LATCH_INx low | $2+3*P^{(1)}$ | | ns |
| PRLA2 | $t_{w(EDC_LATCH_INxH)}$ | Pulse duration, EDC_LATCH_INx high | $2+3*P^{(1)}$ | | ns |

(1) P = PRU_ICSSG IEP clock source period in ns.


Figure 7-96. PRU_ICSSG IEP LATCH_INx Timing Requirements

7.10.5.16.4 PRU_ICSSG Universal Asynchronous Receiver Transmitter (UART)

Table 7-115. PRU_ICSSG UART Timing Conditions

| PARAMETER | | MIN | MAX | UNIT |
|--------------------------|-------------------------|------|------|------|
| INPUT CONDITIONS | | | | |
| SR _i | Input slew rate | 0.01 | 0.33 | V/ns |
| OUTPUT CONDITIONS | | | | |
| C _L | Output load capacitance | 1 | 30 | pF |

7.10.5.16.4.1 PRU_ICSSG UART Timing

Table 7-116. PRU_ICSSG UART Timing Requirements

 see [Figure 7-97](#)

| NO. | PARAMETER | DESCRIPTION | MIN | MAX | UNIT |
|--------|--------------|--|---------------------|-----|------|
| PRUR1H | $t_{w(RXH)}$ | Pulse duration, receive start, stop, data bit high | U ⁽¹⁾ | | ns |
| PRUR1L | $t_{w(RXL)}$ | Pulse duration, receive start, stop, data bit low | -2+U ⁽¹⁾ | | ns |

(1) U = UART baud time in ns = 1/programmed baud rate.

Table 7-117. PRU_ICSSG UART Switching Characteristics

 see [Figure 7-97](#)

| NO. | PARAMETER | DESCRIPTION | MIN | MAX | UNIT |
|--------|--------------|---|---------------------|-----|------|
| | f(baud) | Programmed baud rate | | 12 | Mbps |
| PRUR3H | $t_{w(TXH)}$ | Pulse duration, transmit start, stop, data bit high | U ⁽¹⁾ | | ns |
| PRUR3L | $t_{w(TXL)}$ | Pulse duration, transmit start, stop, data bit low | -2+U ⁽¹⁾ | | ns |

(1) U = UART baud time in ns = 1/programmed baud rate.

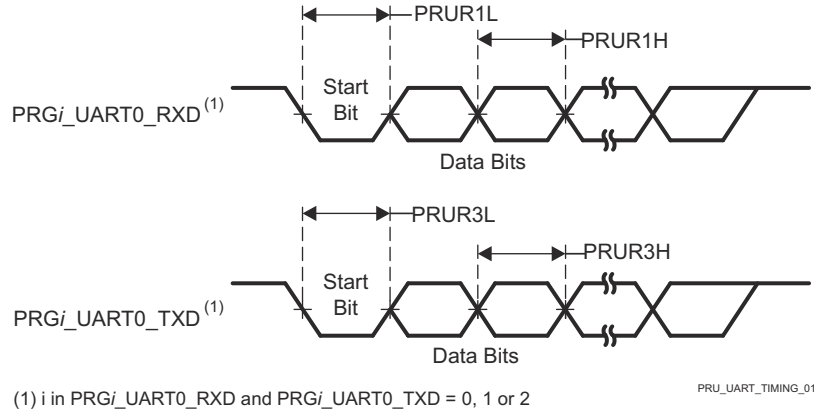


Figure 7-97. PRU_ICSSG UART Timing Requirements and Switching Characteristics

7.10.5.16.5 PRU_ICSSG Enhanced Capture Peripheral (ECAP)

Table 7-118. PRU_ICSSG ECAP Timing Conditions

| PARAMETER | | MIN | MAX | UNIT |
|--------------------------|-------------------------|-----|-----|------|
| INPUT CONDITIONS | | | | |
| SR _i | Input slew rate | 1 | 3 | V/ns |
| OUTPUT CONDITIONS | | | | |
| C _L | Output load capacitance | 2 | 7 | pF |

7.10.5.16.5.1 PRU_ICSSG ECAP Timing

Table 7-119. PRU_ICSSG ECAP Timing Requirements

see Figure 7-98

| NO. | PARAMETER | DESCRIPTION | MIN | MAX | UNIT |
|-------|------------------------|--------------------------------------|----------------------|-----|------|
| PREP1 | t _w (CAP) | Pulse Duration, CAP (asynchronous) | 2+2*P ⁽¹⁾ | | ns |
| PREP2 | t _w (SYNCI) | Pulse Duration, SYNCI (asynchronous) | 2+2*P ⁽¹⁾ | | ns |

(1) P = CORE_CLK period in ns.

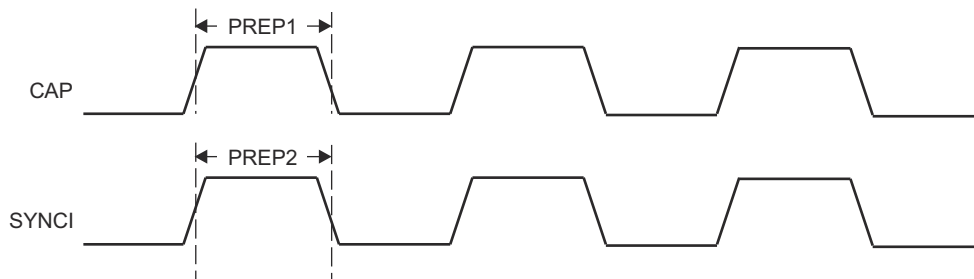


Figure 7-98. PRU_ICSSG ECAP Timing

Table 7-120. PRU_ICSSG ECAP Switching Characteristics

see Figure 7-99

| NO. | PARAMETER | DESCRIPTION | MIN | MAX | UNIT |
|-------|------------------------|--------------------------------------|--------------------|-----|------|
| PREP3 | t _w (APWM) | Pulse Duration, APWM high/low | 2*P ⁽¹⁾ | | ns |
| PREP4 | t _w (SYNCO) | Pulse Duration, SYNCO (asynchronous) | P ⁽¹⁾ | | ns |

(1) P = CORE_CLK period in ns.

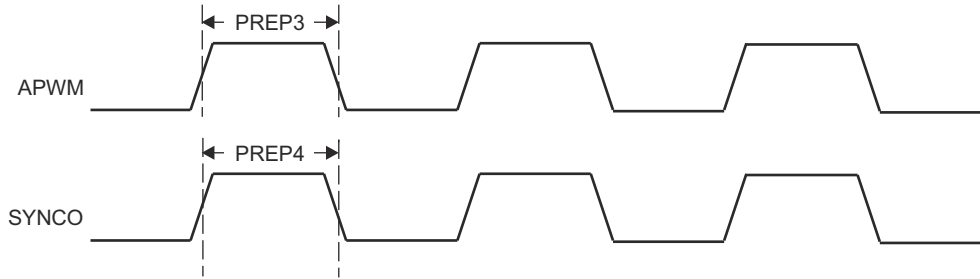


Figure 7-99. PRU_ICSSG ECAP Switching Characteristics

7.10.5.16.6 PRU_ICSSG RGMII, MII_RT, and Switch

For more information, see *Programmable Real-Time Unit Subsystem and Industrial Communication Subsystem - Gigabit (PRU_ICSSG)* section in *Processors and Accelerators* chapter in the device TRM.

7.10.5.16.6.1 PRU_ICSSG MDIO Timing

Table 7-121, Table 7-122, Table 7-123, and Figure 7-100 present timing conditions, requirements, and switching characteristics for PRU_ICSSG MDIO.

Table 7-121. PRU_ICSSG MDIO Timing Conditions

| PARAMETER | | MIN | MAX | UNIT |
|--------------------------|-------------------------|-----|-----|------|
| INPUT CONDITIONS | | | | |
| SR _i | Input slew rate | 0.9 | 3.6 | V/ns |
| OUTPUT CONDITIONS | | | | |
| C _L | Output load capacitance | 10 | 470 | pF |

Table 7-122. PRU_ICSSG MDIO Timing Requirements

see Figure 7-100

| NO. | PARAMETER | | MIN | MAX | UNIT |
|-------|----------------------------|--|-----|-----|------|
| MDIO1 | t _{su} (MDIO_MDC) | Setup time, MDIO[x]_MDIO valid before MDIO[x]_MDC high | 90 | | ns |
| MDIO2 | t _h (MDC_MDIO) | Hold time, MDIO[x]_MDIO valid after MDIO[x]_MDC high | 0 | | ns |

Table 7-123. PRU_ICSSG MDIO Switching Characteristics

see Figure 7-100

| NO. | PARAMETER | | MIN | MAX | UNIT |
|-------|---------------------------|---|------|-----|------|
| MDIO3 | t _c (MDC) | Cycle time, MDIO[x]_MDC | 400 | | ns |
| MDIO4 | t _w (MDCH) | Pulse Duration, MDIO[x]_MDC high | 160 | | ns |
| MDIO5 | t _w (MDCL) | Pulse Duration, MDIO[x]_MDC low | 160 | | ns |
| MDIO7 | t _d (MDC_MDIO) | Delay time, MDIO[x]_MDC low to MDIO[x]_MDIO valid | -150 | 150 | ns |

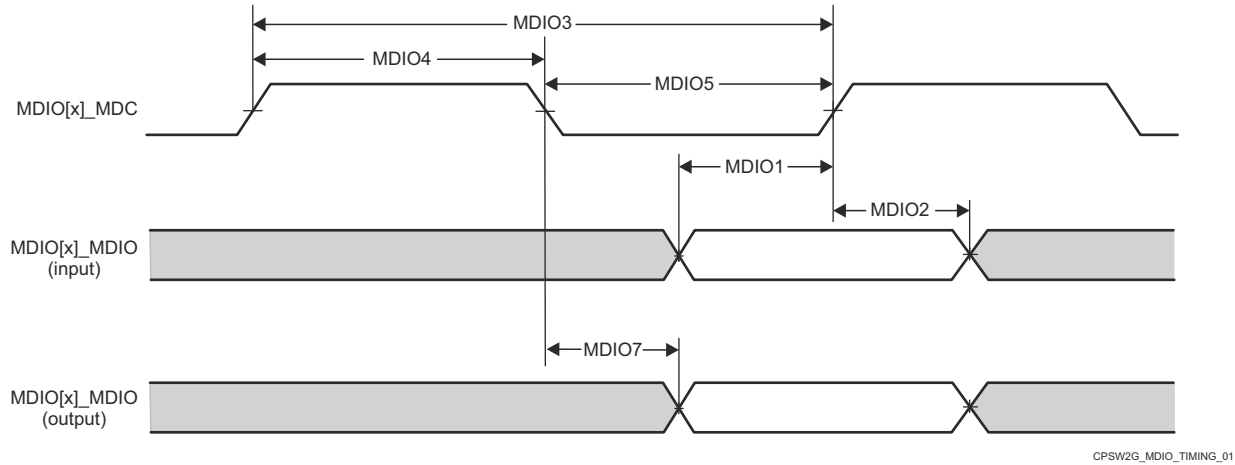


Figure 7-100. PRU_ICSSG MDIO Timing Requirements and Switching Characteristics

7.10.5.16.6.2 PRU_ICSSG MII Timing

Note

In order to ensure the MII_G_RT I/O timing values published in the device data sheet, the PRU_ICSSG ICSSGn_CORE_CLK (where n = 0 to 1) core clock must be configured for 200 MHz, 225 MHz, or 250 MHz and the TX_CLK_DELAYn (where n = 0 or 1) bit field in the ICSSG_TXCFG0/1 register must be set to 0h (default value).

Table 7-124, Table 7-125, Figure 7-101, Table 7-126, Figure 7-102, Table 7-127, Figure 7-103, Table 7-128, and Figure 7-104 present timing conditions, requirements, and switching characteristics for PRU_ICSSG MII.


Table 7-124. PRU_ICSSG MII Timing Conditions

| PARAMETER | | MIN | MAX | UNIT |
|--------------------------|-------------------------|-----|-----|------|
| INPUT CONDITIONS | | | | |
| SR _i | Input slew rate | 0.9 | 3.6 | V/ns |
| OUTPUT CONDITIONS | | | | |
| C _L | Output load capacitance | 2 | 20 | pF |

Table 7-125. PRU_ICSSG MII Timing Requirements – MII[x]_RX_CLK

see Figure 7-101

| NO. | PARAMETER | DESCRIPTION | MODE | MIN | MAX | UNIT |
|-------|-------------------------|------------------------------------|----------|--------|--------|------|
| PMIR1 | t _{c(RX_CLK)} | Cycle time, MII[x]_RX_CLK | 10 Mbps | 399.96 | 400.04 | ns |
| | | | 100 Mbps | 39.996 | 40.004 | ns |
| PMIR2 | t _{w(RX_CLKH)} | Pulse Duration, MII[x]_RX_CLK High | 10 Mbps | 140 | 260 | ns |
| | | | 100 Mbps | 14 | 26 | ns |
| PMIR3 | t _{w(RX_CLKL)} | Pulse Duration, MII[x]_RX_CLK Low | 10 Mbps | 140 | 260 | ns |
| | | | 100 Mbps | 14 | 26 | ns |

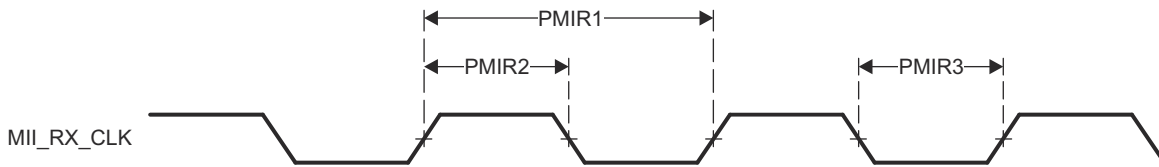

PRU_MII_RT_TIMING_04

Figure 7-101. PRU_ICSSG MII[x]_RX_CLK Timing

Table 7-126. PRU_ICSSG MII Timing Requirements – MII[x]_RXD[3:0], MII[x]_RX_DV, and MII[x]_RX_ER

see Figure 7-102

| NO. | PARAMETER | DESCRIPTION | MODE | MIN | MAX | UNIT | |
|-------|--------------------------|--|--|----------|-----|------|----|
| PMIR4 | $t_{su}(RXD-RX_CLK)$ | Setup time, MII[x]_RXD[3:0] valid before MII[x]_RX_CLK | 10 Mbps | 8 | | ns | |
| | $t_{su}(RX_DV-RX_CLK)$ | Setup time, MII[x]_RX_DV valid before MII[x]_RX_CLK | | 8 | | ns | |
| | $t_{su}(RX_ER-RX_CLK)$ | Setup time, MII[x]_RX_ER valid before MII[x]_RX_CLK | | 8 | | ns | |
| | PMIR5 | $t_{su}(RXD-RX_CLK)$ | Setup time, MII[x]_RXD[3:0] valid before MII[x]_RX_CLK | 100 Mbps | 8 | | ns |
| | | $t_{su}(RX_DV-RX_CLK)$ | Setup time, MII[x]_RX_DV valid before MII[x]_RX_CLK | | 8 | | ns |
| | | $t_{su}(RX_ER-RX_CLK)$ | Setup time, MII[x]_RX_ER valid before MII[x]_RX_CLK | | 8 | | ns |
| PMIR5 | $t_h(RX_CLK-RXD)$ | Hold time, MII[x]_RXD[3:0] valid after MII[x]_RX_CLK | 10 Mbps | 8 | | ns | |
| | $t_h(RX_CLK-RX_DV)$ | Hold time, MII[x]_RX_DV valid after MII[x]_RX_CLK | | 8 | | ns | |
| | $t_h(RX_CLK-RX_ER)$ | Hold time, MII[x]_RX_ER valid after MII[x]_RX_CLK | | 8 | | ns | |
| | PMIR5 | $t_h(RX_CLK-RXD)$ | Hold time, MII[x]_RXD[3:0] valid after MII[x]_RX_CLK | 100 Mbps | 8 | | ns |
| | | $t_h(RX_CLK-RX_DV)$ | Hold time, MII[x]_RX_DV valid after MII[x]_RX_CLK | | 8 | | ns |
| | | $t_h(RX_CLK-RX_ER)$ | Hold time, MII[x]_RX_ER valid after MII[x]_RX_CLK | | 8 | | ns |

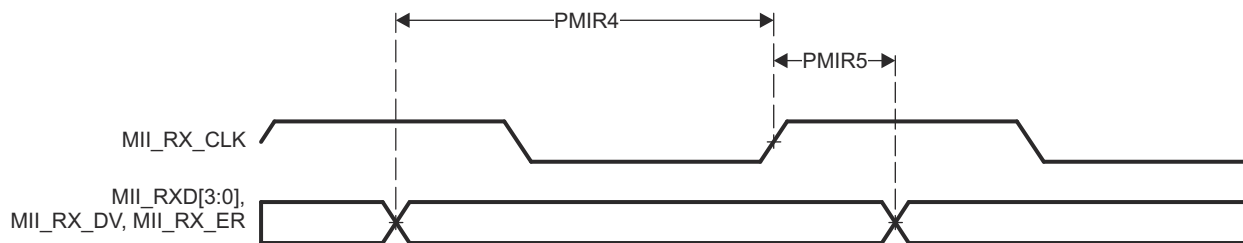


Figure 7-102. PRU_ICSSG MII[x]_RXD[3:0], MII[x]_RX_DV, and MII[x]_RX_ER Timing

Table 7-127. PRU_ICSSG MII Timing Requirements – MII[x]_TX_CLK

see Figure 7-103

| NO. | PARAMETER | DESCRIPTION | MODE | MIN | MAX | UNIT |
|-------|-----------------|------------------------------------|----------|--------|--------|------|
| PMIT1 | $t_c(TX_CLK)$ | Cycle time, MII[x]_TX_CLK | 10 Mbps | 399.96 | 400.04 | ns |
| | | | 100 Mbps | 39.996 | 40.004 | ns |
| PMIT2 | $t_w(TX_CLKH)$ | Pulse Duration, MII[x]_TX_CLK High | 10 Mbps | 140 | 260 | ns |
| | | | 100 Mbps | 14 | 26 | ns |
| PMIT3 | $t_w(TX_CLKL)$ | Pulse Duration, MII[x]_TX_CLK Low | 10 Mbps | 140 | 260 | ns |
| | | | 100 Mbps | 14 | 26 | ns |

ADVANCE INFORMATION

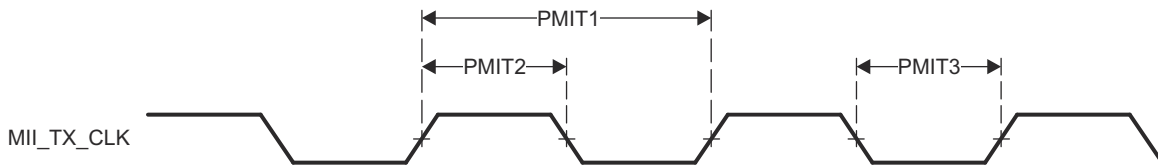


Figure 7-103. PRU_ICSSG MII[x]_TX_CLK Timing

Table 7-128. PRU_ICSSG MII Switching Characteristics – MII[x]_TXD[3:0] and MII[x]_TX_EN

see Figure 7-104

| NO. | PARAMETER | DESCRIPTION | MODE | MIN | MAX | UNIT |
|-------|-------------------------|---|----------|-----|-----|------|
| PMIT4 | $t_{d(TX_CLK-TXD)}$ | Delay time, MII[x]_TX_CLK High to MII[x]_TXD[3:0] valid | 10 Mbps | 0 | 25 | ns |
| | $t_{d(TX_CLK-TX_EN)}$ | Delay time, MII[x]_TX_CLK to MII[x]_TX_EN valid | | 0 | 25 | ns |
| | $t_{d(TX_CLK-TXD)}$ | Delay time, MII[x]_TX_CLK High to MII[x]_TXD[3:0] valid | 100 Mbps | 0 | 25 | ns |
| | $t_{d(TX_CLK-TX_EN)}$ | Delay time, MII[x]_TX_CLK to MII[x]_TX_EN valid | | 0 | 25 | ns |

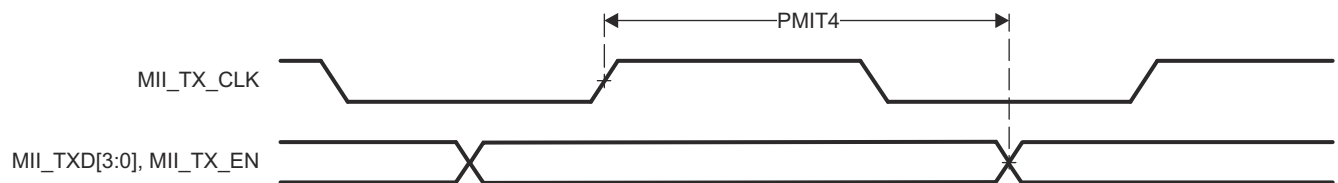


Figure 7-104. PRU_ICSSG MII[x]_TXD[3:0], MII[x]_TX_EN Timing

7.10.5.16.6.3 PRU_ICSSG RGMII Timing

Table 7-129, Table 7-130, Table 7-131, Figure 7-105, Table 7-132, Table 7-133, and Figure 7-106 present timing conditions, requirements, and switching characteristics for PRU_ICSSG RGMII.

Table 7-129. PRU_ICSSG RGMII Timing Conditions

| PARAMETER | | MIN | MAX | UNIT |
|--------------------------|-------------------------|------|-----|------|
| INPUT CONDITIONS | | | | |
| SR_i | Input slew rate | 2.65 | 5 | V/ns |
| OUTPUT CONDITIONS | | | | |
| C_L | Output load capacitance | 2 | 20 | pF |

Table 7-130. PRU_ICSSG RGMII Timing Requirements – RGMII[x]_RXC


see Figure 7-105

| NO. | PARAMETER | DESCRIPTION | MODE | MIN | MAX | UNIT |
|--------|---------------|-----------------------------------|-----------|-----|-----|------|
| RGMII1 | $t_{c(RXC)}$ | Cycle time, RGMII[x]_RXC | 10 Mbps | 360 | 440 | ns |
| | | | 100 Mbps | 36 | 44 | ns |
| | | | 1000 Mbps | 7.2 | 8.8 | ns |
| RGMII2 | $t_{w(RXCH)}$ | Pulse duration, RGMII[x]_RXC high | 10 Mbps | 160 | 240 | ns |
| | | | 100 Mbps | 16 | 24 | ns |
| | | | 1000 Mbps | 3.6 | 4.4 | ns |
| RGMII3 | $t_{w(RXCL)}$ | Pulse duration, RGMII[x]_RXC low | 10 Mbps | 160 | 240 | ns |
| | | | 100 Mbps | 16 | 24 | ns |
| | | | 1000 Mbps | 3.6 | 4.4 | ns |

Table 7-131. PRU_ICSSG RGMII Timing Requirements – RGMII[x]_RD[3:0] and RGMII[x]_RX_CTL

see [Figure 7-105](#)

| NO. | PARAMETER | DESCRIPTION | MODE | MIN | MAX | UNIT |
|--------|-----------------------|--|-----------|-----|-----|------|
| RGMII4 | $t_{su(RD-RXC)}$ | Setup time, RGMII[x]_RD[3:0] valid before RXC high/low | 10 Mbps | 1 | | ns |
| | | | 100 Mbps | 1 | | ns |
| | | | 1000 Mbps | 1 | | ns |
| | $t_{su(RX_CTL-RXC)}$ | Setup time, RGMII[x]_RX_CTL valid before RGMII[x]_RXC high/low | 10 Mbps | 1 | | ns |
| | | | 100 Mbps | 1 | | ns |
| | | | 1000 Mbps | 1 | | ns |
| RGMII5 | $t_{h(RXC-RD)}$ | Hold time, RGMII[x]_RD[3:0] valid after RGMII[x]_RXC high/low | 10 Mbps | 1 | | ns |
| | | | 100 Mbps | 1 | | ns |
| | | | 1000 Mbps | 1 | | ns |
| | $t_{h(RXC-RX_CTL)}$ | Hold time, RGMII[x]_RX_CTL valid after RGMII[x]_RXC high/low | 10 Mbps | 1 | | ns |
| | | | 100 Mbps | 1 | | ns |
| | | | 1000 Mbps | 1 | | ns |

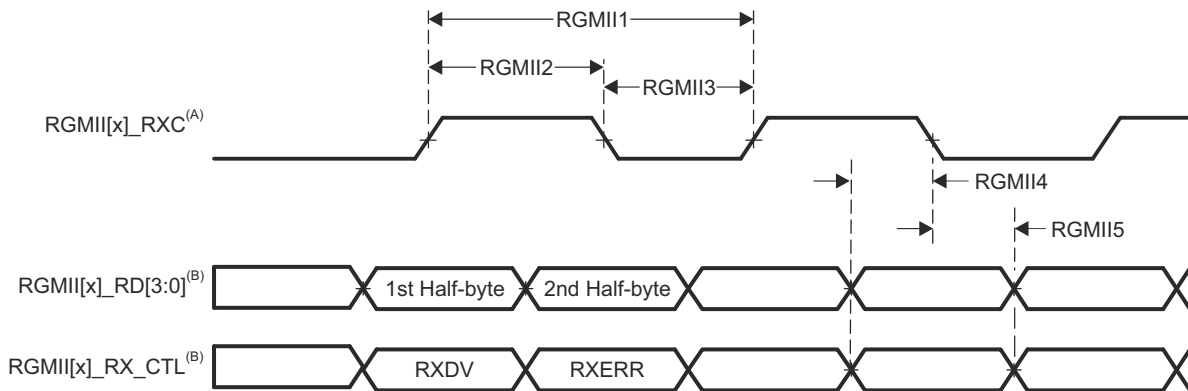

- A. RGMII[x]_RXC must be externally delayed relative to the data and control pins.
 B. Data and control information is received using both edges of the clocks. RGMII[x]_RD[3:0] carries data bits 3-0 on the rising edge of RGMII[x]_RXC and data bits 7-4 on the falling edge of RGMII[x]_RXC. Similarly, RGMII[x]_RX_CTL carries RXDV on rising edge of RGMII[x]_RXC and RXERR on falling edge of RGMII[x]_RXC.

Figure 7-105. PRU_ICSSG RGMII[x]_RXC, RGMII[x]_RD[3:0], RGMII[x]_RX_CTL Timing Requirements - RGMII Mode

Table 7-132. PRU_ICSSG RGMII Switching Characteristics – RGMII[x]_TXC


see [Figure 7-106](#)

| NO. | PARAMETER | DESCRIPTION | MODE | MIN | MAX | UNIT |
|--------|-------------|-----------------------------------|-----------|-----|-----|------|
| RGMII6 | $t_c(TXC)$ | Cycle time, RGMII[x]_TXC | 10 Mbps | 360 | 440 | ns |
| | | | 100 Mbps | 36 | 44 | ns |
| | | | 1000 Mbps | 7.2 | 8.8 | ns |
| RGMII7 | $t_w(TXCH)$ | Pulse duration, RGMII[x]_TXC high | 10 Mbps | 160 | 240 | ns |
| | | | 100 Mbps | 16 | 24 | ns |
| | | | 1000 Mbps | 3.6 | 4.4 | ns |
| RGMII8 | $t_w(TXCL)$ | Pulse duration, RGMII[x]_TXC low | 10 Mbps | 160 | 240 | ns |
| | | | 100 Mbps | 16 | 24 | ns |
| | | | 1000 Mbps | 3.6 | 4.4 | ns |

Table 7-133. PRU_ICSSG RGMII Switching Characteristics – RGMII[x]_TD[3:0] and RGMII[x]_TX_CTL

see [Figure 7-106](#)

| NO. | PARAMETER | DESCRIPTION | MODE | MIN | MAX | UNIT |
|---------|-----------------------|---|-----------|-----|-----|------|
| RGMII9 | $t_{osu(TD-TXC)}$ | Output setup time, RGMII[x]_TD[3:0] valid to RGMII[x]_TXC high/low | 10 Mbps | 1.2 | | ns |
| | | | 100 Mbps | 1.2 | | ns |
| | | | 1000 Mbps | 1.2 | | ns |
| | $t_{osu(TX_CTL-TXC)}$ | Output setup time, RGMII[x]_TX_CTL valid to RGMII[x]_TXC high/low | 10 Mbps | 1.2 | | ns |
| | | | 100 Mbps | 1.2 | | ns |
| | | | 1000 Mbps | 1.2 | | ns |
| RGMII10 | $t_{oh(TXC-TD)}$ | Output setup time, RGMII[x]_TD[3:0] valid after RGMII[x]_TXC high/low | 10 Mbps | 1.2 | | ns |
| | | | 100 Mbps | 1.2 | | ns |
| | | | 1000 Mbps | 1.2 | | ns |
| | $t_{oh(TXC-TX_CTL)}$ | Output setup time, RGMII[x]_TX_CTL valid after RGMII[x]_TXC high/low | 10 Mbps | 1.2 | | ns |
| | | | 100 Mbps | 1.2 | | ns |
| | | | 1000 Mbps | 1.2 | | ns |

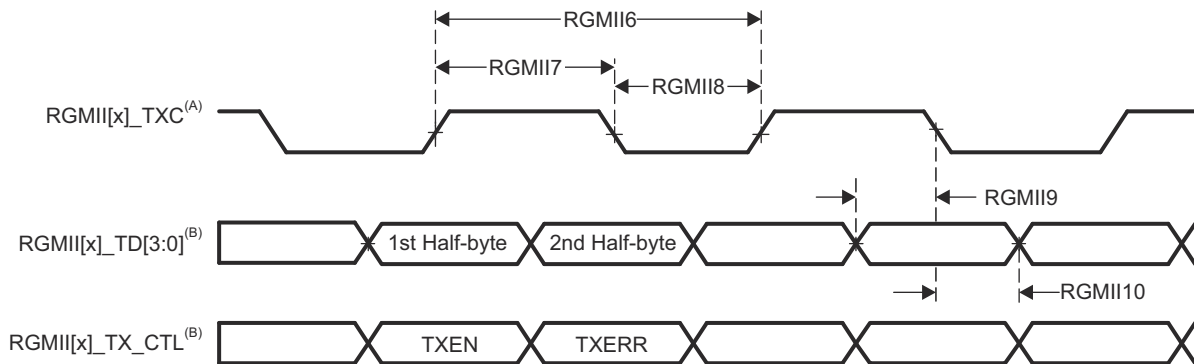

- A. TxC is delayed internally before being driven to the RGMII[x]_TxC pin. This internal delay is always enabled.
- B. Data and control information is received using both edges of the clocks. RGMII[x]_TD[3:0] carries data bits 3-0 on the rising edge of RGMII[x]_TxC and data bits 7-4 on the falling edge of RGMII[x]_TxC. Similarly, RGMII[x]_TX_CTL carries TXEN on rising edge of RGMII[x]_TxC and TXERR on falling edge of RGMII[x]_TxC.

Figure 7-106. PRU_ICSSG RGMII[x]_TxC, RGMII[x]_TD[3:0], and RGMII[x]_TX_CTL Switching Characteristics - RGMII Mode

7.10.5.17 Timers

For more details about features and additional description information on the device Timers, see the corresponding subsections within *Signal Descriptions* and *Detailed Description* sections.

Table 7-134. Timer Timing Conditions

| PARAMETER | | MIN | MAX | UNIT |
|--------------------------|-------------------------|-----|-----|------|
| INPUT CONDITIONS | | | | |
| SR _i | Input slew rate | 0.5 | 5 | V/ns |
| OUTPUT CONDITIONS | | | | |
| C _L | Output load capacitance | 2 | 10 | pF |

Table 7-135. Timer Input Timing Requirements

see [Figure 7-107](#)

| NO. | PARAMETER | DESCRIPTION | MODE | MIN | MAX | UNIT |
|-----|----------------|----------------------|---------|----------------|-----|------|
| T1 | $t_{w(TINPH)}$ | Pulse duration, high | CAPTURE | $2 + 4P^{(1)}$ | | ns |

Table 7-135. Timer Input Timing Requirements (continued)

see [Figure 7-107](#)

| NO. | PARAMETER | DESCRIPTION | MODE | MIN | MAX | UNIT |
|-----|----------------|---------------------|---------|----------------|-----|------|
| T2 | $t_{w(TINPL)}$ | Pulse duration, low | CAPTURE | $2 + 4P^{(1)}$ | | ns |

(1) P = functional clock period in ns.

Table 7-136. Timer Output Switching Characteristics

see [Figure 7-107](#)

| NO. | PARAMETER | DESCRIPTION | MODE | MIN | MAX | UNIT |
|-----|----------------|----------------------|------|-----------------|-----|------|
| T3 | $t_{w(TOUTH)}$ | Pulse duration, high | PWM | $-2 + 4P^{(1)}$ | | ns |
| T4 | $t_{w(TOURL)}$ | Pulse duration, low | PWM | $-2 + 4P^{(1)}$ | | ns |

(1) P = functional clock period in ns.

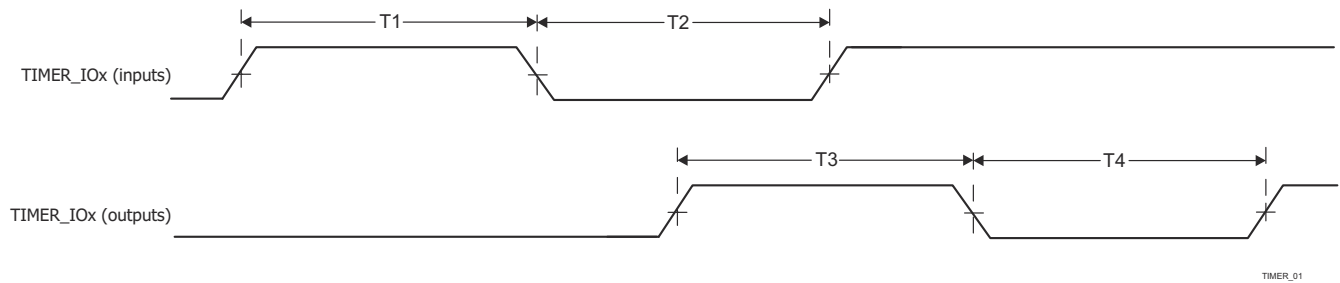


Figure 7-107. Timer Timing Requirements and Switching Characteristics

For more information, see *Timers* section in *Peripherals* chapter in the device TRM.

7.10.5.18 UART

For more details about features and additional description information on the device Universal Asynchronous Receiver Transmitter, see the corresponding subsections within *Signal Descriptions* and *Detailed Description* sections.

Table 7-137. UART Timing Conditions

| PARAMETER | | MIN | MAX | UNIT |
|--------------------------|-------------------------|-----|-----|------|
| INPUT CONDITIONS | | | | |
| SR_I | Input slew rate | 0.5 | 5 | V/ns |
| OUTPUT CONDITIONS | | | | |
| C_L | Output load capacitance | 1 | 30 | pF |

Table 7-138. UART Timing Requirements

see [Figure 7-108](#)

| NO. | PARAMETER | DESCRIPTION | MIN | MAX | UNIT |
|-----|--------------|---|---------------|---------------|------|
| 4 | $t_{w(RX)}$ | Pulse width, receive data bit, high or low | $0.95U^{(1)}$ | $1.05U^{(1)}$ | ns |
| 5 | $t_{w(CTS)}$ | Pulse width, receive start bit, high or low | $0.95U^{(1)}$ | | ns |

(1) U = UART baud time in ns = 1/programmed baud rate.

Table 7-139. UART Switching Characteristics

see [Figure 7-108](#)

| NO. | PARAMETER | DESCRIPTION | MODE | MIN | MAX | UNIT |
|-----|-----------------|---|-------|-----------------|-----------------|------|
| | $f_{(baud)}$ | Programmable baud rate | 15 pF | | TDB | Mbps |
| | | | 30 pF | | 0.115 | Mbps |
| 1 | $t_{d(CTS-TX)}$ | Delay time, CTS bit to transmit data | | 30 | | ns |
| 2 | $t_{w(TX)}$ | Pulse width, transmit data bit, high or low | | $U - 2.2^{(1)}$ | $U + 2.2^{(1)}$ | ns |

Table 7-139. UART Switching Characteristics (continued)

see [Figure 7-108](#)

| NO. | PARAMETER | DESCRIPTION | MODE | MIN | MAX | UNIT |
|-----|--------------|--|------|------------------------|-----|------|
| 3 | $t_{w(RTS)}$ | Pulse width, transmit start bit, high or low | | U - 2.2 ⁽¹⁾ | | ns |

(1) U = UART baud time in ns = 1/programmed baud rate.

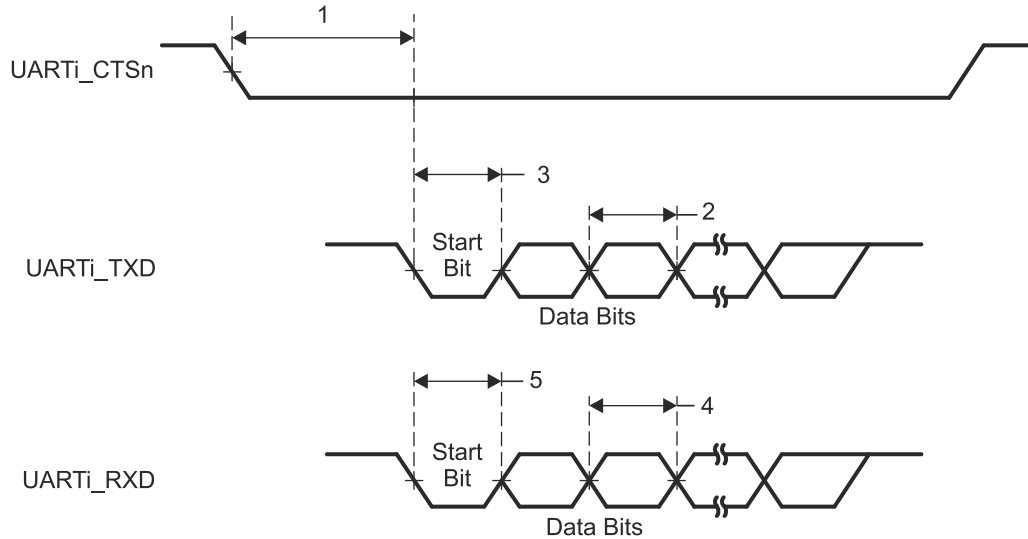


Figure 7-108. UART Timing Requirements and Switching Characteristics

For more information, see *Universal Asynchronous Receiver/Transmitter (UART)* section in *Peripherals* chapter in the device TRM.

7.10.5.19 USB

The USB 2.0 subsystem is compliant with the Universal Serial Bus (USB) Specification, revision 2.0. Refer to the specification for timing details.

The USB 3.1 GEN1 subsystem is compliant with the Universal Serial Bus (USB) 3.1 Specification, revision 1.0. Refer to the specification for timing details.

For more details about features and additional description information on the device Universal Serial Bus Subsystem (USB), see the corresponding subsections within *Signal Descriptions* and *Detailed Description* sections.

7.10.6 Emulation and Debug

For more details about features and additional description information on the device Trace and JTAG interfaces, see the corresponding subsections within *Signal Descriptions* and *Detailed Description* sections.


7.10.6.1 Trace

Table 7-140. Trace Timing Conditions

| PARAMETER | | MIN | MAX | UNIT |
|--------------------------------------|--|----------------|-----|------|
| OUTPUT CONDITIONS | | | | |
| C_L | Output load capacitance | 2 | 5 | pF |
| PCB CONNECTIVITY REQUIREMENTS | | | | |
| $t_d(\text{Trace Mismatch})$ | Propagation delay mismatch across all traces | VDDSHV3 = 1.8V | 200 | ps |
| | | VDDSHV3 = 3.3V | 100 | ps |

Table 7-141. Trace Switching Characteristics

| NO. | PARAMETER | | MIN | MAX | UNIT |
|------------------|--------------------------------|--|------|-----|------|
| 1.8V Mode | | | | | |
| DBTR1 | $t_{c(TRC_CLK)}$ | Cycle time, TRC_CLK | 6.50 | | ns |
| DBTR2 | $t_{w(TRC_CLKH)}$ | Pulse width, TRC_CLK high | 2.50 | | ns |
| DBTR3 | $t_{w(TRC_CLKL)}$ | Pulse width, TRC_CLK low | 2.50 | | ns |
| DBTR4 | $t_{osu(TRC_DATAV-TRC_CLK)}$ | Output setup time, TRC_DATA valid to TRC_CLK edge | 0.81 | | ns |
| DBTR5 | $t_{oh(TRC_CLK-TRC_DATA)}$ | Output hold time, TRC_CLK edge to TRC_DATA invalid | 0.81 | | ns |
| DBTR6 | $t_{osu(TRC_CTLV-TRC_CLK)}$ | Output setup time, TRC_CTL valid to TRC_CLK edge | 0.81 | | ns |
| DBTR7 | $t_{oh(TRC_CLK-TRC_CTL)}$ | Output hold time, TRC_CLK edge to TRC_CTL invalid | 0.81 | | ns |
| 3.3V Mode | | | | | |
| DBTR1 | $t_{c(TRC_CLK)}$ | Cycle time, TRC_CLK | 8.67 | | ns |
| DBTR2 | $t_{w(TRC_CLKH)}$ | Pulse width, TRC_CLK high | 3.58 | | ns |
| DBTR3 | $t_{w(TRC_CLKL)}$ | Pulse width, TRC_CLK low | 3.58 | | ns |
| DBTR4 | $t_{osu(TRC_DATAV-TRC_CLK)}$ | Output setup time, TRC_DATA valid to TRC_CLK edge | 1.08 | | ns |
| DBTR5 | $t_{oh(TRC_CLK-TRC_DATA)}$ | Output hold time, TRC_CLK edge to TRC_DATA invalid | 1.08 | | ns |
| DBTR6 | $t_{osu(TRC_CTLV-TRC_CLK)}$ | Output setup time, TRC_CTL valid to TRC_CLK edge | 1.08 | | ns |
| DBTR7 | $t_{oh(TRC_CLK-TRC_CTL)}$ | Output hold time, TRC_CLK edge to TRC_CTL invalid | 1.08 | | ns |

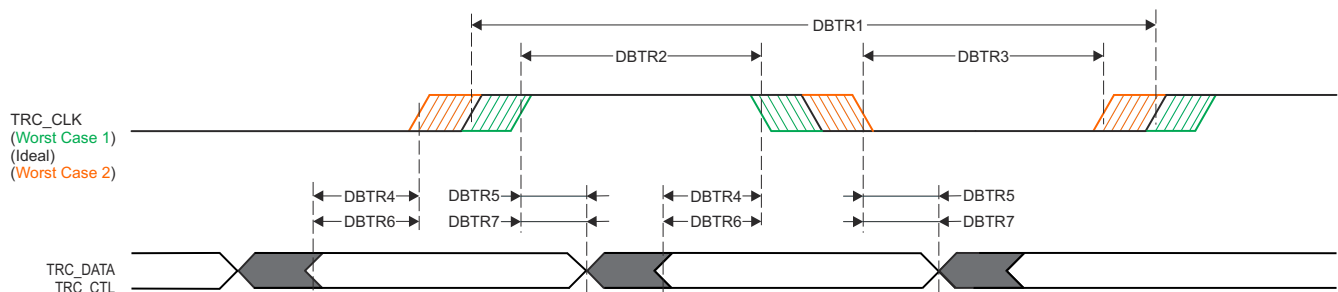

SPRSP08_Debug_01

Figure 7-109. Trace Switching Characteristics

7.10.6.2 JTAG

Table 7-142. JTAG Timing Conditions

| PARAMETER | | MIN | MAX | UNIT |
|--------------------------|-------------------------|-----|-----|------|
| INPUT CONDITIONS | | | | |
| SR_i | Input slew rate | 0.5 | 2.0 | V/ns |
| OUTPUT CONDITIONS | | | | |
| C_L | Output load capacitance | 5 | 15 | pF |

Table 7-143. JTAG Timing Requirements

see [Figure 7-110](#)

| NO. | PARAMETER | | MIN | MAX | UNIT |
|-----|-------------------|---|------|-----|------|
| J1 | $t_{c(TCK)}$ | Cycle time minimum, TCK | 45.5 | | ns |
| J2 | $t_{w(TCKH)}$ | Pulse width minimum, TCK high | 18.2 | | ns |
| J3 | $t_{w(TCKL)}$ | Pulse width minimum, TCK low | 18.2 | | ns |
| J4 | $t_{su(TDI-TCK)}$ | Input setup time minimum, TDI valid to TCK high | 4 | | ns |
| | $t_{su(TMS-TCK)}$ | Input setup time minimum, TMS valid to TCK high | 4 | | ns |

Table 7-143. JTAG Timing Requirements (continued)

see [Figure 7-110](#)

| NO. | | | MIN | MAX | UNIT |
|-----|------------------|--|-----|-----|------|
| J5 | $t_{h(TCK-TDI)}$ | Input hold time minimum, TDI valid from TCK high | 2 | | ns |
| | $t_{h(TCK-TMS)}$ | Input hold time minimum, TMS valid from TCK high | 2 | | ns |

Table 7-144. JTAG Switching Characteristics

see [Figure 7-110](#)

| NO. | PARAMETER | | MIN | MAX | UNIT |
|-----|--------------------|--|-----|-----|------|
| J6 | $t_{d(TCKL-TDOI)}$ | Delay time minimum, TCK low to TDO invalid | 0 | | ns |
| J7 | $t_{d(TCKL-TDOV)}$ | Delay time maximum, TCK low to TDO valid | | 14 | ns |

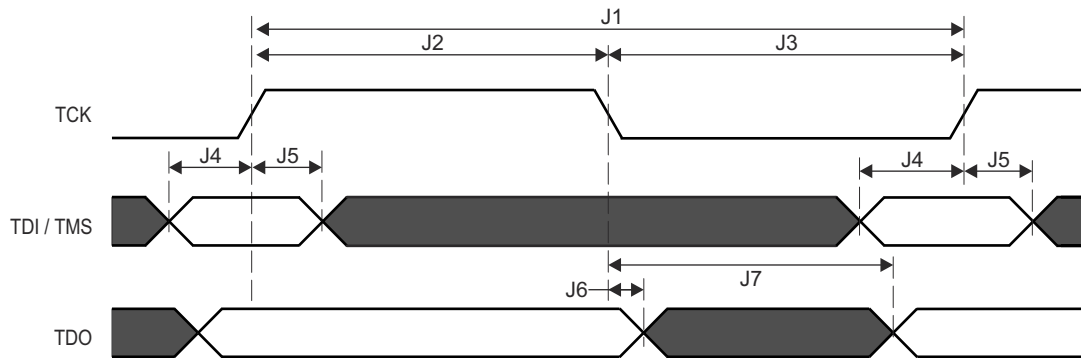


Figure 7-110. JTAG Timing Requirements and Switching Characteristics

8 Detailed Description

8.1 Overview

AM64x is an extension of the Sitara's industrial-grade family of heterogeneous Arm processors. AM64x is built for industrial applications, such as motor drives and programmable logic controllers (PLCs), which require a unique combination of real-time processing and communications with applications processing. AM64x combines two instances of Sitara's gigabit TSN-enabled PRU-ICSSG, up to two Arm Cortex-A53 cores, up to four Cortex-R5F MCUs and a Cortex-M4F MCU.

AM64x is architected to provide real-time performance through the high-performance R5Fs, Tightly-Coupled Memory banks, configurable SRAM partitioning, and low-latency paths to and from peripherals for rapid data movement in and out of the SoC. This deterministic architecture allows for AM64x to handle the tight control loops found in servo drives, while the peripherals like FSI, GPMC, PWMs, sigma delta decimation filters, and absolute encoder interfaces help enable a number of different architectures found in these systems.

The Cortex-A53s provide the powerful computing elements necessary for Linux applications. Linux, and Real-time (RT) Linux, is provided through TI's Processor SDK Linux which stays updated to the latest Long Term Support (LTS) Linux kernel, bootloader and Yocto file system on an annual basis. AM64x helps bridge the Linux world with the real-time world by enabling isolation between Linux applications and real-time streams through configurable memory partitioning. The Cortex-A53s can be assigned to work strictly out of DDR for Linux, and the internal SRAM can be broken up into various sizes for the Cortex-R5Fs to use together or independently.

The PRU-ICSSG in AM64x provides the flexible industrial communications capability necessary to run gigabit TSN, EtherCAT, PROFINET, EtherNet/IP, and various other protocols. In addition, the PRU-ICSSG also enables additional interfaces in the SoC including sigma delta decimation filters and absolute encoder interfaces.

Functional safety features can be enabled through the integrated Cortex-M4F along with its dedicated peripherals which can all be isolated from the rest of the SoC. AM64x also supports secure boot.

Note

For more information on features, subsystems, and architecture of superset device System on Chip (SoC), see the device TRM.

8.2 Processor Subsystems

8.2.1 Arm Cortex-A53 Subsystem

The A53SS module supports the following features:

- Dual Core A53 Cluster
 - Full ARM v8-A Architecture Compliant
- AArch32 and AArch64 Execution States
- All exception levels EL0-3
- A32 Instruction Set (Previously ARM instruction set)
- T32 instruction set (previously Thumb instruction set)
- A64 Instruction Set
 - Advanced SIMD and Floating Point Extensions (NEON)
 - ARMv8 Cryptography Extensions
 - ARMv8 Cryptography Extensions
 - ARM GICv3 architecture
 - In-order pipeline with symmetric dual-issue of most instructions
 - Harvard L1 with system MMU
- 32 KB Instruction Cache
- 32 KB Data Cache
 - 256KB Shared L2 Cache
 - Generic Timer(s)
 - Debug
- 128-Bit VBUSM Master Interfaces (for axi_r and axi_r channels)
- 128-Bit VBUSM Slave Interface (for Accelerator Coherency Port)
- 64-bit Grey-coded system input time
- 48-bit Grey-coded debug input time
- 32-bit VBUSP slave interface for Debug
- Integrated PBIST controller with BISSOR

For more information, see *Dual-A53 MPU Subsystem* section in *Processors and Accelerators* chapter in the device TRM.

8.2.2 Arm Cortex-R5F Subsystem (R5FSS)

The R5FSS is a dual-core implementation of the Arm® Cortex®-R5F processor configured for dual/single-core operation. It also includes accompanying memories (L1 caches and tightly-coupled memories), standard Arm® CoreSight™ debug and trace architecture, integrated Vectored Interrupt Manager (VIM), ECC Aggregators, and various wrappers for protocol conversion and address translation for easy integration into the SoC.

Note

The Cortex®-R5F processor is a Cortex-R5 processor that includes the optional Floating Point Unit (FPU) extension.

For more information, see *Dual-R5F Subsystem (R5FSS)* section in *Processors and Accelerators* chapter in the device TRM.

8.2.3 Arm Cortex-M4F (M4FSS)

The M4FSS module on the AM64x device provides a safety channel (secondary channel - working in conjunction with an external microcontroller)- or- a general purpose MCU.

The M4FSS module supports the following features:

- Cortex M4F With MPU
- ARMv7-M architecture
- Support for Nested Vectored Interrupt Controller (NVIC) with 64 inputs
- Ability to executed code from internal or external memories
- 192 KB of SRAM (I-Code)

- 64 KB of SRAM (D-Code)
- External access to internal memories if allowed
- Debug Support Including:
 - DAP based Debug to the CPU Core
 - Full Debug Features of CPU Core are enabled
 - Standard ITM trace
 - CTM Cross Trigger
 - ETM Trace Support
- Fault Detection and Correction
 - SECEDED ECC protection on I-CODE
 - SECEDED ECC protection on D-CODE
 - Fault Error Interrupt Output

For more information, see *Arm Cortex M4F Subsystem (M4FSS)* section in *Processors and Accelerators* chapter in the device TRM.

8.3 Accelerators and Coprocessors

8.3.1 Programmable Real-Time Unit Subsystem and Industrial Communication Subsystem (PRU_ICSSG)

The PRU_ICSSG module supports the following main features:

- 3x PRUs
 - General-Purpose PRU (PRU)
 - Real-Time PRU(RTU_PRU)
 - Transmit PRU (TX_PRU)
- 2x Ethernet MII_G_RT configurable connection to PRUs
 - Up to 2x RGMII ports
 - Up to 2x MII ports
 - RX Classifier
- 2x Industrial Ethernet Peripheral (IEP) to manage and generate industrial Ethernet functions
- 2x Industrial Ethernet 64-bit timers, each with 10 capture and 16 compare events, along with slow and fast compensation.
- 1x MDIO
- 1x UART, with a dedicated 192-MHz clock input
- Supports up to 4 sets of 3-phased motor control, with 12 primary and 12 complimentary programmable PWM outputs.
- Supports up to 9 safety events with optional external trip I/O per PWM set with hardware glitch filter.
- 1x Enhanced Capture Module (ECAP)
- 1x Interrupt Controller (INTC)
 - 160 input events supported – 96 external, 64 internal
- Flexible power management support
- Integrated switched central resource with programmable priority
- All memories support ECC

For more information, see *Programmable Real-Time Unit Subsystem and Industrial Communication Subsystem - Gigabit (PRU_ICSSG)* section in *Processors and Accelerators* chapter in the device TRM.

8.4 Other Subsystems

8.4.1 PDMA Controller

The Peripheral DMA is a simple DMA which has been architected to specifically meet the data transfer needs of peripherals, which perform data transfers using memory mapped registers accessed via a standard non-coherent bus fabric. The PDMA module is intended to be located close to one or more peripherals which require an external DMA for data movement and is architected to reduce cost by using VBUSP interfaces and supporting only statically configured Transfer Request (TR) operations.

The PDMA is only responsible for performing the data movement transactions which interact with the peripherals themselves. Data which is read from a given peripheral is packed by a PDMA source channel into a PSI-L data stream which is then sent to a remote peer UDMA-P destination channel which then performs the movement of the data into memory. Likewise, a remote UDMA-P source channel fetches data from memory and transfers it to a peer PDMA destination channel over PSI-L which then performs the writes to the peripheral.

The PDMA architecture is intentionally heterogeneous (UDMA-P + PDMA) to right size the data transfer complexity at each point in the system to match the requirements of whatever is being transferred to or from. Peripherals are typically FIFO based and do not require multi-dimensional transfers beyond their FIFO dimensioning requirements, so the PDMA transfer engines are kept simple with only a few dimensions (typically for sample size and FIFO depth), hardcoded address maps, and simple triggering capabilities.

Multiple source and destination channels are provided within the PDMA which allow multiple simultaneous transfer operations to be ongoing. The DMA controller maintains state information for each of the channels and employs round-robin scheduling between channels in order to share the underlying DMA hardware.

There are five PDMA modules in the device.

For more information, see *PDMA Controller* section in *DMA Controllers* chapter in the device TRM.

8.4.2 Peripherals

8.4.2.1 ADC

The analog-to-digital converter (ADC) module is a single-channel general purpose analog-to-digital converter with a 8-input analog multiplexer, which supports 12-bit conversion samples from an analog front end (AFE).

For more information, see *Analog-to-Digital Converter (ADC)* section in *Peripherals* chapter in the device TRM.

8.4.2.2 DCC

The Dual Clock Comparator (DCC) is used to determine the accuracy of a clock signal during the time execution of an application. Specifically, the DCC is designed to detect drifts from the expected clock frequency. The desired accuracy can be programmed based on calculation for each application. The DCC measures the frequency of a selectable clock source using another input clock as a reference.

The device has seven instances of DCC modules.

For more information, see *Dual Clock Comparator (DCC)* section in *Peripherals* chapter in the device TRM.

8.4.2.3 Dual Data Rate (DDR) External Memory Interface (DDRSS)

Integrated in MAIN domain: one instance of DDR Subsystem (DDRSS) is used as an interface to external RAM devices which can be utilized for storing program or data. DDRSS provides the following main features:

- Support of DDR4 / LPDDR4 memory types
- 16-bit memory bus interface with in-line ECC
- System bus interface: little endian only with 128-bit data width
- Configuration bus Interface: little endian only with 32-bit data width
- Support of dual rank configuration
- Support of automatic idle power saving mode when no or low activity is detected
- Class of Service (CoS) - three latency classes supported
- Prioritized refresh scheduling
- Statistical counters for performance management

For more information, see *DDR Subsystem (DDRSS)* section in *Peripherals* chapter in the device TRM.

8.4.2.4 ECAP

This section describes the Enhanced Capture (ECAP) module for the device.

For more information, see *Enhanced Capture (ECAP) Module* section in *Peripherals* chapter in the device TRM.

8.4.2.5 EPWM

An effective PWM peripheral must be able to generate complex pulse width waveforms with minimal CPU overhead or intervention. It needs to be highly programmable and very flexible while being easy to understand and use. The EPWM unit described here addresses these requirements by allocating all needed timing and control resources on a per PWM channel basis. Cross coupling or sharing of resources has been avoided; instead, the EPWM is built up from smaller single channel modules with separate resources and that can operate together as required to form a system. This modular approach results in an orthogonal architecture and provides a more transparent view of the peripheral structure, helping users to understand its operation quickly.

In the further description the letter x within a signal or module name is used to indicate a generic EPWM instance on a device. For example, output signals EPWMxA and EPWMxB refer to the output signals from the EPWM_x instance. Thus, EPWM1A and EPWM1B belong to EPWM1, EPWM2A and EPWM2B belong to EPWM2, and so forth.

Additionally, the EPWM integration allows this synchronization scheme to be extended to the capture peripheral modules (ECAP). The number of modules is device-dependent and based on target application needs. Modules can also operate stand-alone.

The device has six instances of EPWM modules.

For more information, see *Enhanced Pulse Width Modulation (EPWM) Module* section in *Peripherals* chapter in the device TRM.

8.4.2.6 ELM

The Error Location Module (ELM) is used with the GPMC. Syndrome polynomials generated on-the-fly when reading a NAND flash page and stored in GPMC registers are passed to the ELM. A host processor can then correct the data block by flipping the bits to which the ELM error-location outputs point.

When reading from NAND flash memories, some level of error-correction is required. In the case of NAND modules with no internal correction capability, sometimes referred to as *bare NANDs*, the correction process is delegated to the memory controller. ELM can be also used to support parallel NOR flash or NAND flash.

The General-Purpose Memory Controller (GPMC) probes data read from an external NAND flash and uses this to compute checksum-like information, called syndrome polynomials, on a per-block basis. Each syndrome polynomial gives a status of the read operations for a full block, including 512 bytes of data, parity bits, and an optional spare-area data field, with a maximum block size of 1023 bytes. Computation is based on a Bose-Chaudhuri-Hocquenghem (BCH) algorithm. The ELM extracts error addresses from these syndrome polynomials.

For more information, see *Error Location Module (ELM)* section in *Peripherals* chapter in the device TRM.

8.4.2.7 ESM

The Error Signaling Module (ESM) aggregates safety-related events and/or errors from throughout the device into one location. It can signal both low and high priority interrupts to a processor to deal with a safety event and/or manipulate an I/O error pin to signal an external hardware that an error has occurred. Therefore an external controller is able to reset the device or keep the system in safe, known state.

For more information, see *Error Signaling Module (ESM)* section in *Peripherals* chapter in the device TRM.

8.4.2.8 GPIO

The general-purpose input/output (GPIO) peripheral provides dedicated general-purpose pins that can be configured as either inputs or outputs. When configured as an output, user can write to an internal register to control the state driven on the output pin. When configured as an input, user can obtain the state of the input by reading the state of an internal register.

In addition, the GPIO peripheral can produce host CPU interrupts and DMA synchronization events in different interrupt/event generation modes.

For more information, see *General-Purpose Interface (GPIO)* section in *Peripherals* chapter in the device TRM.

8.4.2.9 EQEP

The Enhanced Quadrature Encoder Pulse (EQEP) peripheral is used for direct interface with a linear or rotary incremental encoder to get position, direction and speed information from a rotating machine for use in high performance motion and position control system. The disk of an incremental encoder is patterned with a single track of slots patterns. These slots create an alternating pattern of dark and light lines. The disk count is defined as the number of dark/light line pairs that occur per revolution (lines per revolution). As a rule, a second track is added to generate a signal that occurs once per revolution (index signal: QEPI), which can be used to indicate an absolute position. Encoder manufacturers identify the index pulse using different terms such as index, marker, home position and zero reference.

To derive direction information, the lines on the disk are read out by two different photo-elements that "look" at the disk pattern with a mechanical shift of 1/4 the pitch of a line pair between them. This shift is realized with a reticle or mask that restricts the view of the photo-element to the desired part of the disk lines. As the disk rotates, the two photo-elements generate signals that are shifted 90 degrees out of phase from each other. These are commonly called the quadrature QEPA and QEPB signals. The clockwise direction for most encoders is defined as the QEPA channel going positive before the QEPB channel and vice versa.

The encoder wheel typically makes one revolution for every revolution of the motor or the wheel may be at a geared rotation ratio with respect to the motor. Therefore, the frequency of the digital signal coming from the

QEPA and QEPB outputs varies proportionally with the velocity of the motor. For example, a 2000-line encoder directly coupled to a motor running at 5000 revolutions per minute (rpm) results in a frequency of 166.6 KHz, so by measuring the frequency of either the QEPA or QEPB output, the processor can determine the velocity of the motor.

For more information, see *Enhanced Quadrature Encoder Pulse (EQEP) Module* section in *Peripherals* chapter in the device TRM.

8.4.2.10 GPMC

The GPMC module supports the following features:

- Data path to external memory device can be 32, 16 or 8 bits wide
- Support for the following memory types:
 - Asynchronous or synchronous 8-bit memory or device (non-burst device)
 - Asynchronous or synchronous 16-bit memory or device
 - Asynchronous or synchronous 32-bit memory or device
 - 16-bit non-multiplexed NOR Flash device
 - 16-bit address and 32-bit address and data multiplexed NOR Flash device
 - 8-bit and 16-bit NAND flash device
 - 16-bit and 32bit pSRAM device
- Supports Error Code detection using BCH code (t=4, 8 or 16) or Hamming code for 8-bit or 16-bit NAND-flash, organized with page size of 512 Byte, 1Kbytes, or more. • Supports 1 GByte maximum addressing capability, which can be divided into 8 independent chip-select with programmable bank size and base address on 16 MByte, 32 MByte, 64 MByte, or 128 MByte boundary.
- Fully-pipelined operation for optimal memory bandwidth usage
- Supports external device clock frequency of /1, /2, /3, and /4 divide of interface clock
- Supports programmable auto-clock gating when there is no access
- Supports Mdlereq/SIdleAck protocol
- Supports the following interface protocols when communicating with external memory or external devices:
 - Asynchronous read/write access
 - Asynchronous read page access (4-8-16 Word16), 4-8-16 Word32
 - Synchronous read/write access
 - Synchronous read burst access without wrap capability (4-8-16-32 Word16, 4-8-16 Word32)
 - Synchronous read burst access with wrap capability (4-8-16-32 Word16, 4-8-16 Word32)
- Address and data multiplexed access
- Each chip-select has independent and programmable control signal timing parameters for Setup and Hold time. Parameters are set according to the memory device timing parameters, with one interface clock cycle timing granularity.
- Flexible internal access time control (wait state) and flexible handshake mode using external WAIT pin
- Supports bus keeping
- Supports bus turn around
- Pre-fetch and write posting engine associated with system DMA, to get full performance from NAND device, and with minimum impact on NOR/SRAM concurrent access monitoring (up to 4 WAIT pins)

For more information, see *General-Purpose Memory Controller (GPMC)* section in *Peripherals* chapter in the device TRM.

8.4.2.11 I2C

The Inter-IC Bus (I2C) interface is implemented using the mshsi2c module. This peripheral implements the multi-master I2C bus, which allows serial transfer of 8-bit data to and from other I2C master and slave devices, through a two-wire interface.

The I2C module supports the following main features:

- Compliant with Philips I2C specification version 2.1
- Supports standard mode (up to 100K bits/s), fast mode (up to 400K bits/s), and high-speed mode (up to 3.4Mb/s).
- Multi-master transmitter and slave receiver mode

- Multi-master receiver and slave transmitter mode
- Combined master transmit/receive and receive/transmit modes
- 7-bit and 10-bit device addressing modes
- Built-in FIFO for buffered read or write
 - Parameterizable size of 8 to 64 bytes
- Programmable multi-slave channel (responds to 4 separate addresses)
- Programmable clock generation
- Support for asynchronous wake-up
- One interrupt line

For more information, see *Inter-Integrated Circuit (I2C) Interface* section in *Peripherals* chapter in the device TRM.

8.4.2.12 MCAN

The Controller Area Network (CAN) is a serial communications protocol which efficiently supports distributed real-time control with a high level of security. CAN has high immunity to electrical interference and the ability to self-diagnose and repair data errors. In a CAN network, many short messages are broadcast to the entire network, which provides for data consistency in every node of the system.

The MCAN module supports both classic CAN and CAN FD (CAN with Flexible Data-Rate) specifications. CAN FD feature allows high throughput and increased payload per data frame. The classic CAN and CAN FD devices can coexist on the same network without any conflict.

The device supports 2 MCAN modules

For more information, see *Modular Controller Area Network (MCAN)* section in *Peripherals* chapter in the device TRM.

8.4.2.13 MCRC Controller

VBUSM CRC controller is a module which is used to perform CRC (Cyclic Redundancy Check) to verify the integrity of a memory system. A signature representing the contents of the memory is obtained when the contents of the memory are read into MCRC Controller. The responsibility of MCRC controller is to calculate the signature for a set of data and then compare the calculated signature value against a pre-determined good signature value. MCRC controller provides four channels to perform CRC calculation on multiple memories in parallel and can be used on any memory system. Channel 1 can also be put into data trace mode, where MCRC controller compresses each data being read through CPU read data bus.

For more information, see *MCRC Controller* section in *Interprocessor Communication* chapter in the device TRM.

8.4.2.14 MCSPI

The MCSPI module is a multichannel transmit/receive, master/slave synchronous serial bus.

There are total of seven MCSPI modules in the device.

For more information, see *Multichannel Serial Peripheral Interface (MCSPI)* section in *Peripherals* chapter in the device TRM.

8.4.2.15 MMCSDB

There are two Multi-Media Card/Secure Digital (MMCSDB) modules inside the device - MMCSDB0 and MMCSDB1. Each MMCSDB module includes one MMCSDB Host Controller, where MMCSDB0 is associated with MMC0 and MMCSDB1 is associated with MMC1.

The MMCSDB Host Controller supports:

- One controller with 8-bit wide data bus
- One controller with 4-bit wide data bus
- Support of eMMC5.1 Host Specification (JESD84-B51)
- Support of SD Host Controller Standard Specification - SDIO 3.00
- Integrated DMA controller supporting SD Advanced DMA - ADMA2 and ADMA3

- eMMC Electrical Standard 5.1 (JESD84-B51)
- Multi-Media card features:
 - Backward compatible with earlier eMMC standards
 - Legacy MMC SDR: 1.8 V, 8/4/1-bit bus width, 0-25 MHz, 25/12.5/3.125 MB/s
 - High Speed SDR: 1.8 V, 8/4/1-bit bus width, 0-50 MHz, 50/25/6.25 MB/s
 - High Speed DDR: 1.8 V, 8/4-bit bus width, 0-50 MHz, 100/50 MB/s
 - HS200 SDR: 1.8 V, 0-200 MHz, 8/4-bit bus width, 200/100 MB/s
- SD card support: SDIO, SDR12, SDR25, SDR50, DDR50
- System bus interface: CBA 4.0 VBUSM master port with 64-bit data width and 64-bit address, little endian only
- Configuration bus interface: CBA 4.0 VBUSM with 32-bit data width, 32-bit aligned accesses only, linear incrementing addressing mode, little endian only

For more information, see *Multi-Media Card/Secure Digital (MMCSD) Interface* section in *Peripherals* chapter in the device TRM.

8.4.2.16 OSPI

The Octal Serial Peripheral Interface (OSPI) module is a kind of Serial Peripheral Interface (SPI) module which allows single, dual, quad or octal read and write access to external flash devices. This module has a memory mapped register interface, which provides a direct memory interface for accessing data from external flash devices, simplifying software requirements.

The OSPI module is used to transfer data, either in a memory mapped direct mode (for example a processor wishing to execute code directly from external flash memory), or in an indirect mode where the module is set-up to silently perform some requested operation, signalling its completion via interrupts or status registers. For indirect operations, data is transferred between system memory and external flash memory via an internal SRAM which is loaded for writes and unloaded for reads by a device master at low latency system speeds. Interrupts or status registers are used to identify the specific times at which this SRAM should be accessed using user programmable configuration registers.

For more information, see *Octal Serial Peripheral Interface (OSPI)* section in *Peripherals* chapter in the device TRM.

8.4.2.17 Peripheral Component Interconnect Express (PCIe)

The PCIe subsystem supports the following main features:

- Dual mode – root port (RP) or end point (EP) modes. Selectable through bootstrap pins.
- 62.5/125 MHz operation on PIPE interface for Gen1/Gen2 respectively
- Constant 32-bit PIPE width for Gen1/Gen2 modes
- Maximum outbound payload size of 128 bytes
- Maximum inbound payload size of 128 bytes
- Maximum remote read request size of 4K bytes
- Maximum number of nonposted outstanding transactions: 8 on each VBUSM interface.
- Four virtual channels (4VC)
- Resizable BAR capability
- SRIS support
- Power Management
 - L1 Power Management Substate support
 - D1 support
 - L1 Power Shutoff support
- Legacy, MSI, and MSI-X interrupt support
- 32 outbound address translation regions
- Precision time measurement (PTM)

For more information, see *Peripheral Component Interconnect Express (PCIe) Subsystem* section in *Peripherals* chapter in the device TRM.

8.4.2.18 Serializer/Deserializer (SerDes)

Integrated in the MAIN domain is one instance of high-speed differential interface implemented with Serializer/Deserializer (SERDES) Multi-protocol Multi-link modules with the following main blocks:

- Physical coding sub-block for data translation from/to the parallel interface, as well as data encoding/decoding and symbol alignment
- MUX module for device interface multiplexing into a single SERDES lane (Tx and Rx)
- A wrapper for sending control and reporting status signals from the SerDes and muxes

For more information, see *Serializer/Deserializer (SerDes)* section in *Peripherals* chapter in the device TRM.

8.4.2.19 RTI

This section describes the Real Time Interrupt (RTI) modules with Windowed Watchdog Timer (WWDT) functionality for the device.

For more information, see *Real Time Interrupt (RTI) Module* section in *Peripherals* chapter in the device TRM.

8.4.2.20 DMTIMER

The DMTIMER module supports the following main features:

- Interrupts generated on overflow, compare and capture
- Free running 32-bit upward counter
- Supported modes:
 - Compare and capture modes
 - Auto-reload mode
 - Start-stop mode
- Programmable divider clock source (2^n with $n=[0:8]$)
- Dedicated input trigger for capture mode, and dedicated output trigger/PWM (pulse width modulation) signal
- On the fly read/write register (while counting)
- Generate 1-ms tick with 32768-Hz functional clock

For more information, see *Timers* section in *Peripherals* chapter in the device TRM.

8.4.2.21 UART

The UART module supports the following main features:

- 16C750 compatibility
- Baud rate from 300 bps up to 3.6864 Mbps (subject to functional clock frequency)
- Auto-baud between 1200 bps and 115.2 Kbps
- Software/hardware flow control
 - Programmable Xon/Xoff characters
 - Programmable Auto-RTS and Auto CTS
- Programmable serial interface characteristics
 - 5, 6, 7, or 8-bit characters
 - Even, odd, mark (always 1), space (always 0), or no parity (non-parity bit frame) bit generation and detection
 - 1-, 1.5-, or 2-stop bit generation
- Optional multi-drop transmission
- Configurable time-guard feature
- False start bit detection
- Line break generation and detection
- Modem control functions on UART0 (CTS, RTS, DSR, DTR, RI, and DCD)
- Fully prioritized interrupt system controls
- Internal test and loopback capabilities
- RS-485 External transceiver auto flow control support

For more information, see *Universal Synchronous/Asynchronous Receiver/Transmitter (UART)* section in *Peripherals* chapter in the device TRM.

8.4.2.22 Universal Serial Bus Subsystem(USBSS)

The Universal Serial Bus Subsystem (USBSS) module supports the following main features:

USB interface:

- Compliant with USB 3.1 Gen1 specification
- Compliant with xHCI 1.1 specification
- Limited USB 2.0 on-the-go support
- SuperSpeed Gen1 (5 Gbps), high speed (480 Mbps), and full (12Mbps) Device
- SuperSpeed Gen1 (5 Gbps), high speed (480 Mbps), full (12Mbps), and low speed (1.5 Mbps) Host
- Shared USB3.1/USB2.0 port

Dual mode operation:

- OTG 2.0 host negotiation protocol (HNP) support
- OTG 2.0 session request support (SRP) support

Host mode:

- 64 slots supported
- Up to 96 periodic endpoints supported simultaneously
- 256 primary streams supported
- MSI support
- Root hub functionality

For more information, see *Universal Serial Bus (USB) Subsystem* section in *Peripherals* chapter in the device TRM.

9 Applications, Implementation, and Layout

Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

9.1 Power Supply Mapping

Note

NOTE TO USERS:

The content of this section is UNDER DEVELOPMENT!

9.2 Device Connection and Layout Fundamentals

9.2.1 Power Supply Decoupling and Bulk Capacitors

9.2.1.1 Power Distribution Network Implementation Guidance

The [Sitara Processor Power Distribution Networks: Implementation and Analysis](#) provides guidance for successful implementation of the power distribution network. This includes PCB stackup guidance as well as guidance for optimizing the selection and placement of the decoupling capacitors. TI supports *only* designs that follow the board design guidelines contained in the application report.

9.2.2 External Oscillator

For more information about External Oscillators, see the *Clock Specifications* section.

9.2.3 JTAG and EMU

Texas Instruments supports a variety of eXtended Development System (XDS) JTAG controllers with various debug capabilities beyond only JTAG support. A summary of this information is available in the [XDS Target Connection Guide](#).

For more recommendations on EMU routing, see [Emulation and Trace Headers Technical Reference Manual](#)

9.2.4 Reset

Note

NOTE TO USERS:

The content of this section is UNDER DEVELOPMENT!

9.2.5 Unused Pins

For more information about Unused Pins, see the *Pin Connectivity Requirements* section.

9.2.6 Hardware Design Guide

Note

NOTE TO USERS:

The content of this section is UNDER DEVELOPMENT!

9.3 Peripheral- and Interface-Specific Design Information

9.3.1 DDR Board Design and Layout Guidelines


The goal of the [AM64x\AM243x DDR Board Design and Layout Guidelines](#) is to make the DDR system implementation straightforward for all designers. Requirements have been distilled down to a set of layout and routing rules that allow designers to successfully implement a robust design for the topologies that TI supports. TI only supports board designs using DDR4 or LPDDR4 memories that follow the guidelines in this document.

9.3.2 OSPI and QSPI Board Design and Layout Guidelines

The following section details the routing guidelines that must be observed when routing the OSPI and QSPI interfaces.

9.3.2.1 No Loopback and Internal Pad Loopback

- The MCU_OSPI[x]_CLK output signal must be connected to the CLK pin of the flash device
- The signal propagation delay from the MCU_OSPI[x]_CLK signal to the flash device must be < 450 ps (~ 7 cm as stripline or ~ 8 cm as microstrip)
- $50\ \Omega$ PCB routing is recommended along with series terminations, as shown in [Figure 9-1](#)
- Propagation delays and matching:
 - A to B < 450 ps
 - Matching skew: < 60 ps

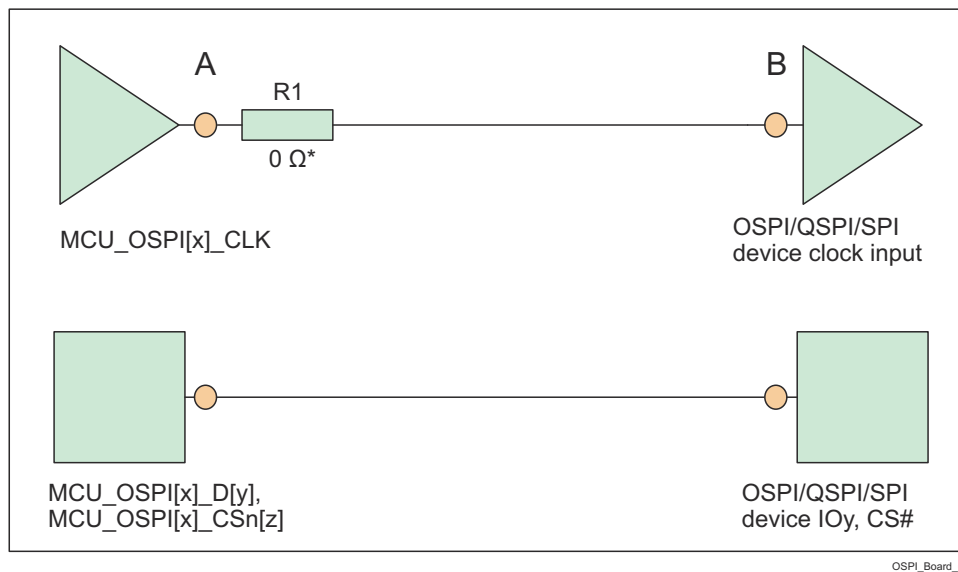

* $0\ \Omega$ resistor (R1), located as close as possible to the MCU_OSPI[x]_CLK pin, is placeholder for fine tuning, if needed.

Figure 9-1. OSPI Interface High Level Schematic

9.3.2.2 External Board Loopback


- The MCU_OSPI[x]_CLK output signal must be connected to the CLK pin of the flash device
- The MCU_OSPI[x]_LBCLKO output signal must be looped back into the MCU_OSPI[x]_DQS input
- The signal propagation delay from the MCU_OSPI[x]_CLK pin to the flash device CLK input pin (A to B) should be approximately equal to half of the signal propagation delay from the MCU_OSPI[x]_LBCLKO pin to the MCU_OSPI[x]_DQS pin ((C to D)/2). See the note below.
- The signal propagation delay from the MCU_OSPI[x]_CLK pin to the flash device CLK input pin (A to B) must be approximately equal to the signal propagation delay of the control and data signals between the flash device and the SoC device (E to F, or F to E)
- $50\ \Omega$ PCB routing is recommended along with series terminations, as shown in [Figure 9-2](#)
- Propagation delays and matching:
 - A to B = E to F = (C to D) / 2

- Matching skew: < 60 ps

Note

The OSPI Board Loopback Hold time requirement (described in [Section 7.10.5.14, OSPI](#)) is larger than the Hold time provided by a typical flash device. Therefore, the length of MCU_OSPI[x]_LBCLKO pin to the MCU_OSPI[x]_DQS pin (C to D) can be shortened to compensate.

ADVANCE INFORMATION

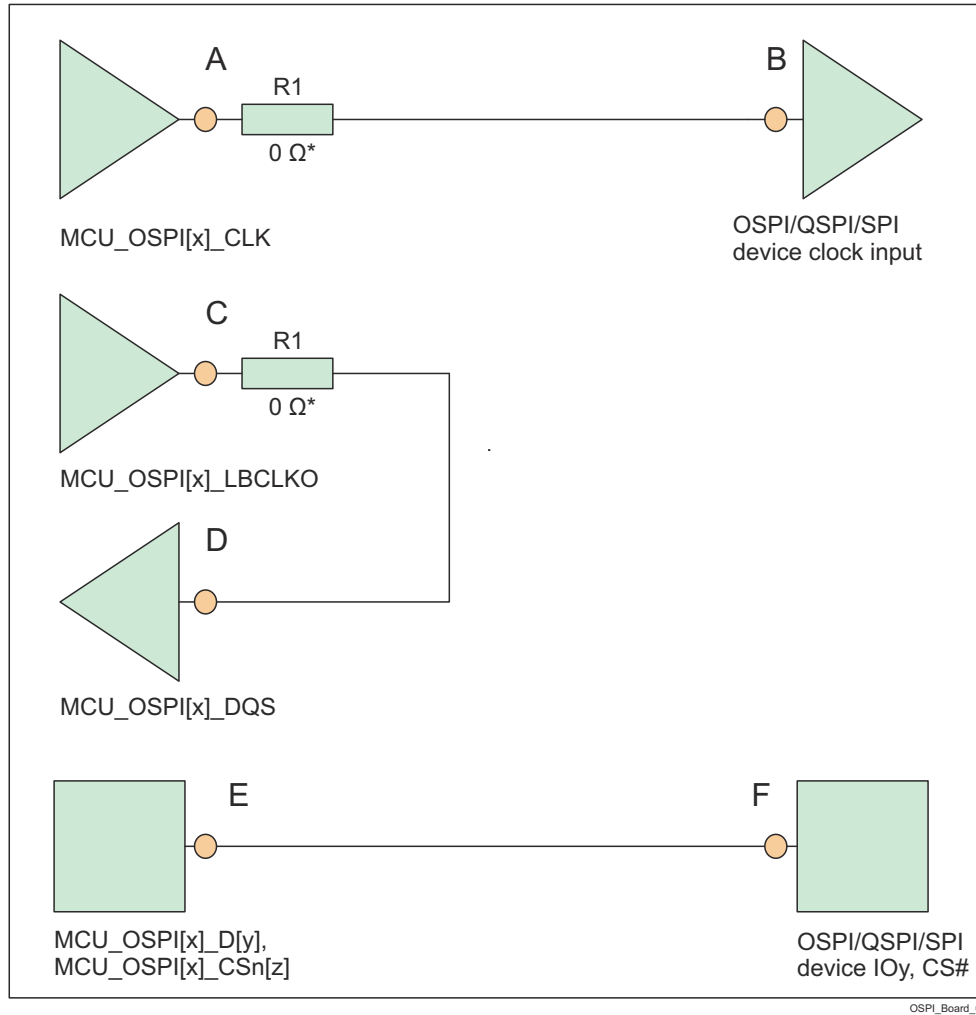


* 0 Ω resistor (R1), located as close as possible to the MCU_OSPI[x]_CLK and MCU_OSPI[x]_LBCLKO pins, is a placeholder for fine tuning, if needed.

Figure 9-2. OSPI Interface High Level Schematic

9.3.2.3 DQS (only available in Octal Flash devices)

- The MCU_OSPI[x]_CLK output signal must be connected to the CLK pin of the flash device
- The DQS pin of the flash devices must be connected to MCU_OSPI[x]_DQS signal
- The signal propagation delay from the MCU_OSPI[x]_CLK pin to the flash device CLK input pin (A to B) should be approximately equal to the signal propagation delay from the MCU_OSPI[x]_DQS pin to the DQS output pin (C to D)
- 50 Ω PCB routing is recommended along with series terminations, as shown in [Figure 9-3](#)
- Propagation delays and matching:
 - A to B = C to D
 - Matching skew: < 60 ps

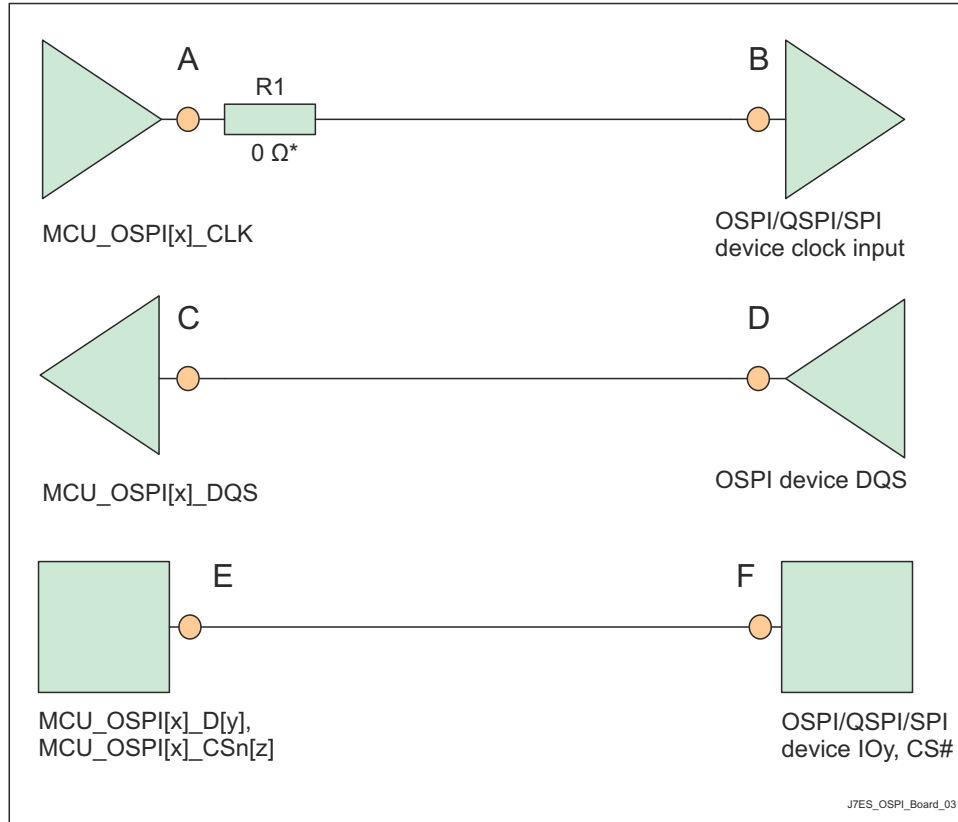

* 0 Ω resistor (R1), located as close as possible to the MCU_OSPI[x]_CLK pin, is a placeholder for fine tuning, if needed.

Figure 9-3. OSPI Interface High Level Schematic

9.3.3 USB VBUS Design Guidelines

The USB 3.1 specification allows the VBUS voltage to be as high as 5.5 V for normal operation, and as high as 20 V when the Power Delivery addendum is supported. Some automotive applications require a max voltage to be 30 V.

The device requires the VBUS signal voltage be scaled down using an external resistor divider (as shown in the Figure 9-4), which limits the voltage applied to the actual device pin (USBn_VBUS). The tolerance of these external resistors should be equal to or less than 1%, and the leakage current of zener diode at 5 V should be less than 100 nA.

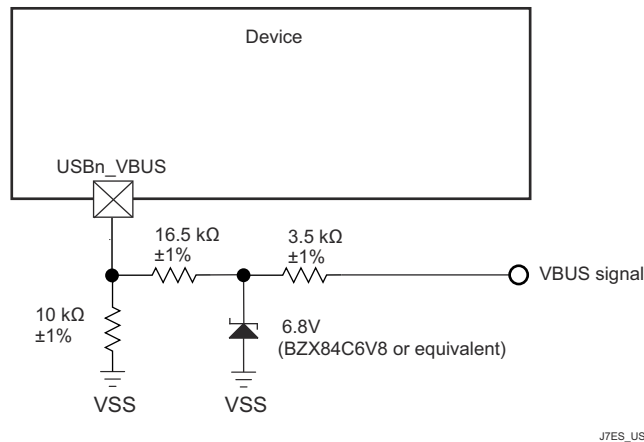


Figure 9-4. USB VBUS Detect Voltage Divider / Clamp Circuit

The USB0_VBUS pin can be considered to be fail-safe because the external circuit in [Figure 9-4](#) limits the input current to the actual device pin in a case where VBUS is applied while the device is powered off.

9.3.4 System Power Supply Monitor Design Guidelines

The VMON_VSYS pin provides a way to monitor a system power supply. This system power supply is typically a single pre-regulated power source for the entire system. This supply is monitored by comparing the output of an external voltage divider circuit sourced by this supply with an internal voltage reference, with a power fail event being triggered when the voltage applied to VMON_VSYS drops below the internal reference voltage. The actual system power supply voltage trip point is determined by the system designer when selecting component values used to implement the external resistor voltage divider circuit.

When designing the resistor divider circuit it is important to understand various factors which contribute to variability in the system power supply monitor trip point. The first thing to consider is the initial accuracy of the VMON_VSYS input threshold which has a nominal value of 0.45 V, with a variation of $\pm 3\%$. Precision 1% resistors with similar thermal coefficient are recommended for implementing the resistor voltage divider. This minimizes variability contributed by resistor value tolerances. Input leakage current associated with VMON_VSYS must also be considered since any current flowing into the pin creates a loading error on the voltage divider output. The VMON_VSYS input leakage current may be in the range of 10 nA to 2.5 μ A when applying 0.45 V.

Note

The resistor voltage divider shall be designed such that its output voltage never exceeds the maximum value defined in the *Recommended Operating Conditions* section, during normal operating conditions.

[Figure 9-5](#) presents an example, where the system power supply is nominally 5 V and the maximum trigger threshold is 5 V - 10%, or 4.5 V.

For this example, it is important to understand which variables effect the maximum trigger threshold when selecting resistor values. It is obvious a device which has a VMON_VSYS input threshold of 0.45 V + 3% needs to be considered when trying to design a voltage divider that doesn't trip until the system supply drops 10%. The effect of resistor tolerance and input leakage also needs to be considered, but how these contributions effect the maximum trigger point may not be obvious. When selecting component values which produce a maximum trigger voltage, the system designer must consider a condition where the value of R1 is 1% low and the value of R2 is 1% high combined with a condition where input leakage current for the VMON_VSYS pin is 2.5 μ A. When implementing a resistor divider where R1 = 4.81 K Ω and R2 = 40.2 K Ω , the result is a maximum trigger threshold of 4.517 V.

Once component values have been selected to satisfy the maximum trigger voltage as described above, the system designer can determine the minimum trigger voltage by calculating the applied voltage that produces an output voltage of 0.45 V - 3% when the value of R1 is 1% high and the value of R2 is 1% low, and the input leakage current is 10 nA, or zero. Using an input leakage of zero with the resistor values given above, the result is a minimum trigger threshold of 4.013 V.

This example demonstrates a system power supply voltage trip point that ranges from 4.013 V to 4.517 V. Approximately 250 mV of this range is introduced by VMON_VSYS input threshold accuracy of $\pm 3\%$, approximately 150 mV of this range is introduced by resistor tolerance of $\pm 1\%$, and approximately 100 mV of this range is introduced by loading error when VMON_VSYS input leakage current is 2.5 μ A.

The resistor values selected in this example produces approximately 100 μ A of bias current through the resistor divider when the system supply is 4.5 V. The 100 mV of loading error mentioned above could be reduced to about 10 mV by increasing the bias current through the resistor divider to approximately 1 mA. So resistor divider bias current vs loading error is something the system designer needs to consider when selecting component values.

The system designer should also consider implementing a noise filter on the voltage divider output since VMON_VSYS has minimum hysteresis and a high-bandwidth response to transients. This could be done by

installing a capacitor across R1 as shown in [Figure 9-5](#). However, the system designer must determine the response time of this filter based on system supply noise and expected response to transient events.

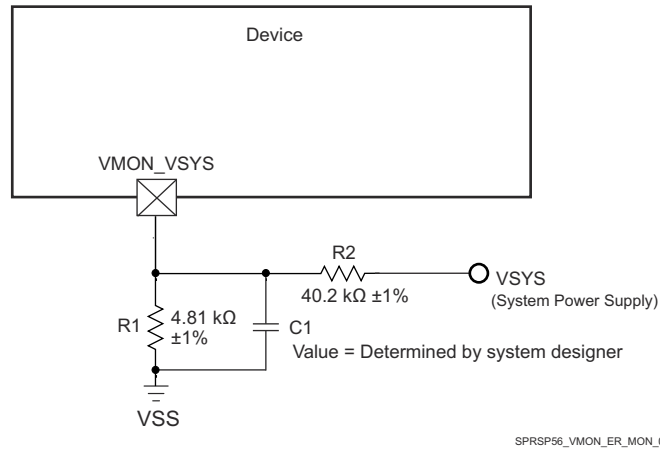


Figure 9-5. System Supply Monitor Voltage Divider Circuit

VMON_1P8_MCU and VMON_1P8_SOC pins provide a way to monitor external 1.8 V power supplies. An internal resistor divider with software control is implemented inside the SoC for each of these pins. Software can program each internal resistor divider to create appropriate under voltage and over voltage interrupts.

VMON_3P3_MCU and VMON_3P3_SOC pins provide a way to monitor external 3.3 V power supplies. An internal resistor divider with software control is implemented inside the SoC for each of these pins. Software can program each internal resistor divider to create appropriate under voltage and over voltage interrupts.

9.3.5 High Speed Differential Signal Routing Guidance

The [High Speed Interface Layout Guidelines](#) provides guidance for successful routing of the high speed differential signals. This includes PCB stackup and materials guidance as well as routing skew, length and spacing limits. TI supports *only* designs that follow the board design guidelines contained in the application report.

9.3.6 External Capacitors

Note

NOTE TO USERS:

The content of this section is UNDER DEVELOPMENT!

9.3.7 Thermal Solution Guidance

The [Thermal Design Guide for DSP and ARM Application Processors](#) provides guidance for successful implementation of a thermal solution for system designs containing this device. This document provides background information on common terms and methods related to thermal solutions. TI only supports designs that follow system design guidelines contained in the application report.

10 Device and Documentation Support

10.1 Device Nomenclature

To designate the stages in the product development cycle, TI assigns prefixes to the part numbers of all microprocessors (MPUs) and support tools. Each device has one of three prefixes: X, P, or null (no prefix) (for example, XAM6442ASFGGAALV). Texas Instruments recommends two of three possible prefix designators for its support tools: TMDX and TMDS. These prefixes represent evolutionary stages of product development from engineering prototypes (TMDX) through fully qualified production devices and tools (TMDS).

Device development evolutionary flow:

- X** Experimental device that is not necessarily representative of the final device's electrical specifications and may not use production assembly flow.
- P** Prototype device that is not necessarily the final silicon die and may not necessarily meet final electrical specifications.
- null** Production version of the silicon die that is fully qualified.

Support tool development evolutionary flow:

- TMDX** Development-support product that has not yet completed Texas Instruments internal qualification testing.
- TMDS** Fully-qualified development-support product.

X and P devices and TMDX development-support tools are shipped against the following disclaimer:

"Developmental product is intended for internal evaluation purposes."

Production devices and TMDS development-support tools have been characterized fully, and the quality and reliability of the device have been demonstrated fully. TI's standard warranty applies.

Predictions show that prototype devices (X or P) have a greater failure rate than the standard production devices. Texas Instruments recommends that these devices not be used in any production system because their expected end-use failure rate still is undefined. Only qualified production devices are to be used.

For orderable part numbers of AM64x devices in the ALV package type, see the Package Option Addendum of this document, the TI website (ti.com), or contact your TI sales representative.

10.1.1 Standard Package Symbolization

Note

Some devices may have a cosmetic circular marking visible on the top of the device package which results from the production test process. In addition, some devices may also show a color variation in the package substrate which results from the substrate manufacturer. These differences are cosmetic only with no reliability impact.

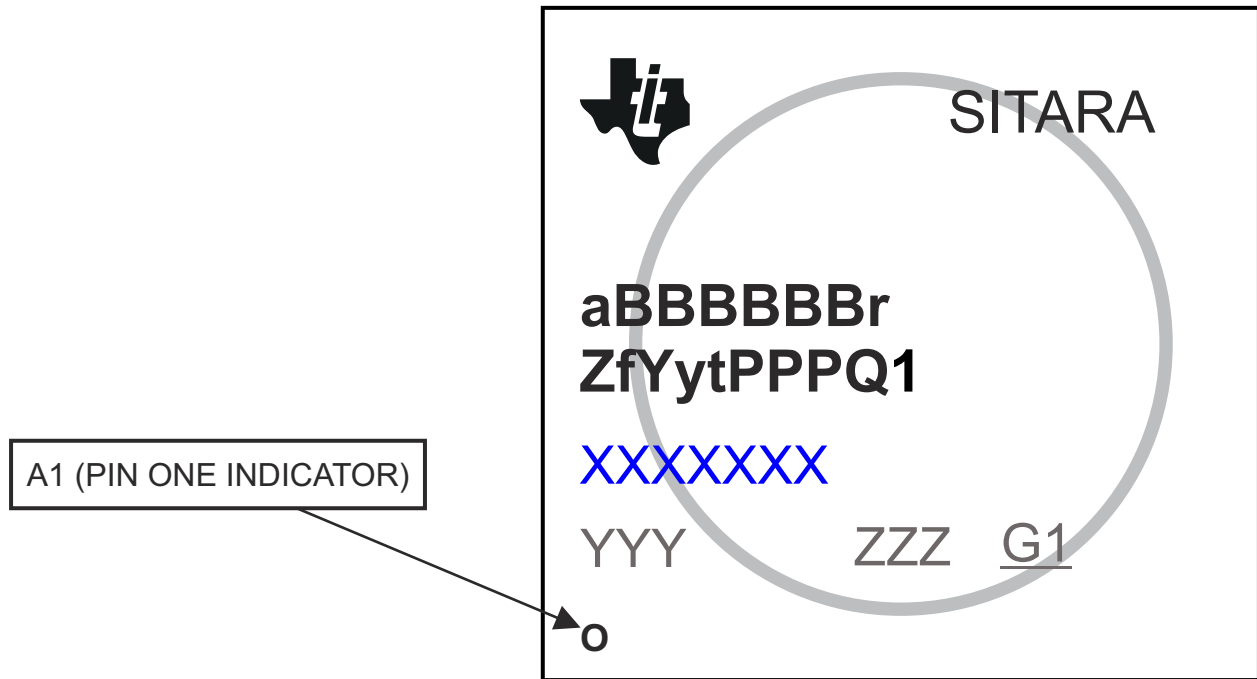


Figure 10-1. Printed Device Reference

10.1.2 Device Naming Convention

Table 10-1. Nomenclature Description

| FIELD PARAMETER | FIELD DESCRIPTION | VALUE | DESCRIPTION |
|-----------------|-----------------------------|--------|--|
| a | Device evolution stage | X | Prototype |
| | | P | Preproduction (production test flow, no reliability data) |
| | | BLANK | Production |
| BBBBBB | Base production part number | AM6442 | See Table 5-1, Device Comparison |
| | | AM6441 | |
| | | AM6422 | |
| | | AM6421 | |
| | | AM6412 | |
| | | AM6411 | |
| r | Device revision | A | SR 1.0 |
| Z | Device Speed Grades | S | See Table 7-1, Speed Grade Maximum Frequency |
| | | K | |

Table 10-1. Nomenclature Description (continued)

| FIELD PARAMETER | FIELD DESCRIPTION | VALUE | DESCRIPTION |
|-----------------|-----------------------------|-------|--|
| f | Features (see Table 5-1) | C | No Additional Features |
| | | D | ICSS Enabled |
| | | E | ICSS + EtherCAT HW Accelerator + CAN-FD Enabled |
| | | F | ICSS + EtherCAT HW Accelerator + CAN-FD + Pre-integrated Stacks Enabled |
| Y | Functional Safety | G | Non-Functional Safety |
| | | F | Functional Safety |
| y | Security | G | Non-Secure |
| | | Other | Secure |
| t | Temperature ⁽¹⁾ | A | -40°C to 105°C - Extended Industrial (see Section 7.4, <i>Recommended Operating Conditions</i>) |
| PPP | Package Designator | ALV | ALV FCBGA-N441 (17.2 mm × 17.2 mm) Package |
| Q1 | Automotive Designator | Q1 | Auto Qualified (Q100) |
| | | BLANK | Standard |
| XXXXXXX | | | Lot Trace Code (LTC) |
| YYY | | | Production Code; For TI use only |
| ZZZ | | | Production Code; For TI use only |
| O | | | Pin one designator |
| G1 | | | ECAT—Green package designator |

(1) Applies to device max junction temperature.

Note

BLANK in the symbol or part number is collapsed so there are no gaps between characters.

ADVANCE INFORMATION

10.2 Tools and Software

The following Development Tools support development for TI's Embedded Processing platforms:

Development Tools

Code Composer Studio™ Integrated Development Environment Code Composer Studio (CCS) Integrated Development Environment (IDE) is a development environment that supports TI's Microcontroller and Embedded Processors portfolio. Code Composer Studio comprises a suite of tools used to develop and debug embedded applications. It includes an optimizing C/C++ compiler, source code editor, project build environment, debugger, profiler, and many other features. The intuitive IDE provides a single user interface taking you through each step of the application development flow. Familiar tools and interfaces allow users to get started faster than ever before. Code Composer Studio combines the advantages of the Eclipse software framework with advanced embedded debug capabilities from TI resulting in a compelling feature-rich development environment for embedded developers.

SysConfig-PinMux Tool The SysConfig-PinMux Tool is a software tool which provides a Graphical User Interface for configuring pin multiplexing settings, resolving conflicts and specifying I/O cell characteristics for TI Embedded Processor devices. The tool can be used to automatically calculate the optimal pinmux configuration to satisfy entered system requirements. The tool will generate output C header/code files that can be imported into software development kits (SDKs) and used to configure customer's software to meet custom hardware requirements. The **Cloud-based SysConfig-PinMux Tool** is also available.

For a complete listing of development-support tools for the processor platform, visit the Texas Instruments website at ti.com. For information on pricing and availability, contact the nearest TI field sales office or authorized distributor.

10.3 Documentation Support

To receive notification of documentation updates, navigate to the device product folder on [ti.com](https://www.ti.com). Click on *Subscribe to updates* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

The following documents describe the AM64x devices.

Technical Reference Manual

AM64x/AM243x Processors Silicon Revision 1.0 Technical Reference Manual Details the integration, the environment, the functional description, and the programming models for each peripheral and subsystem in the AM64x family of devices.

Errata

AM64x/AM243x Processors Silicon Revision 1.0 Silicon Errata Describes the known exceptions to the functional specifications for the device.

10.4 Support Resources

TI E2E™ support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

10.5 Trademarks

Sitara™, Code Composer Studio™, and TI E2E™ are trademarks of Texas Instruments.
CoreSight™ is a trademark of Arm Limited (or its subsidiaries) in the US and/or elsewhere.
Arm®, Cortex®, and TrustZone® are registered trademarks of Arm Limited.
PCI-Express® is a registered trademark of PCI-SIG.
EtherCAT® is a registered trademark of Beckhoff Automation GmbH.
All trademarks are the property of their respective owners.

10.6 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

10.7 Glossary

TI Glossary This glossary lists and explains terms, acronyms, and definitions.

11 Mechanical, Packaging, and Orderable Information

11.1 Packaging Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

PACKAGING INFORMATION

| Orderable Device | Status (1) | Package Type | Package Drawing | Pins | Package Qty | Eco Plan (2) | Lead finish/ Ball material (6) | MSL Peak Temp (3) | Op Temp (°C) | Device Marking (4/5) | Samples |
|------------------|---------------|--------------|-----------------|------|-------------|-----------------|--------------------------------------|----------------------|--------------|---------------------------------|---------|
| AM6411BKCGGAALV | PREVIEW | FCBGA | ALV | 441 | 1 | TBD | Call TI | Call TI | -40 to 105 | | |
| AM6411BSCGGAALV | PREVIEW | FCBGA | ALV | 441 | 84 | TBD | Call TI | Call TI | -40 to 105 | | |
| AM6412BKCGGAALV | PREVIEW | FCBGA | ALV | 441 | 84 | TBD | Call TI | Call TI | -40 to 105 | | |
| AM6412BSCGGAALV | PREVIEW | FCBGA | ALV | 441 | 84 | TBD | Call TI | Call TI | -40 to 105 | | |
| AM6421BSDGGAALV | PREVIEW | FCBGA | ALV | 441 | 84 | TBD | Call TI | Call TI | -40 to 105 | | |
| AM6421BSEFGAALV | PREVIEW | FCBGA | ALV | 441 | 84 | TBD | Call TI | Call TI | -40 to 105 | | |
| AM6441BSDGGAALV | PREVIEW | FCBGA | ALV | 441 | 84 | TBD | Call TI | Call TI | -40 to 105 | | |
| AM6441BSEFGAALV | PREVIEW | FCBGA | ALV | 441 | 84 | TBD | Call TI | Call TI | -40 to 105 | | |
| AM6442BSDGGAALV | PREVIEW | FCBGA | ALV | 441 | 84 | TBD | Call TI | Call TI | -40 to 105 | | |
| AM6442BSEFGAALV | PREVIEW | FCBGA | ALV | 441 | 84 | TBD | Call TI | Call TI | -40 to 105 | | |
| XAM6442ASFGGAALV | ACTIVE | FCBGA | ALV | 441 | 1 | RoHS & Green | SNAGCU | Level-3-250C-168 HR | -40 to 105 | (SFGGAALV, XAM6442 A) 709 | Samples |

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.


(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "-" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer:The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

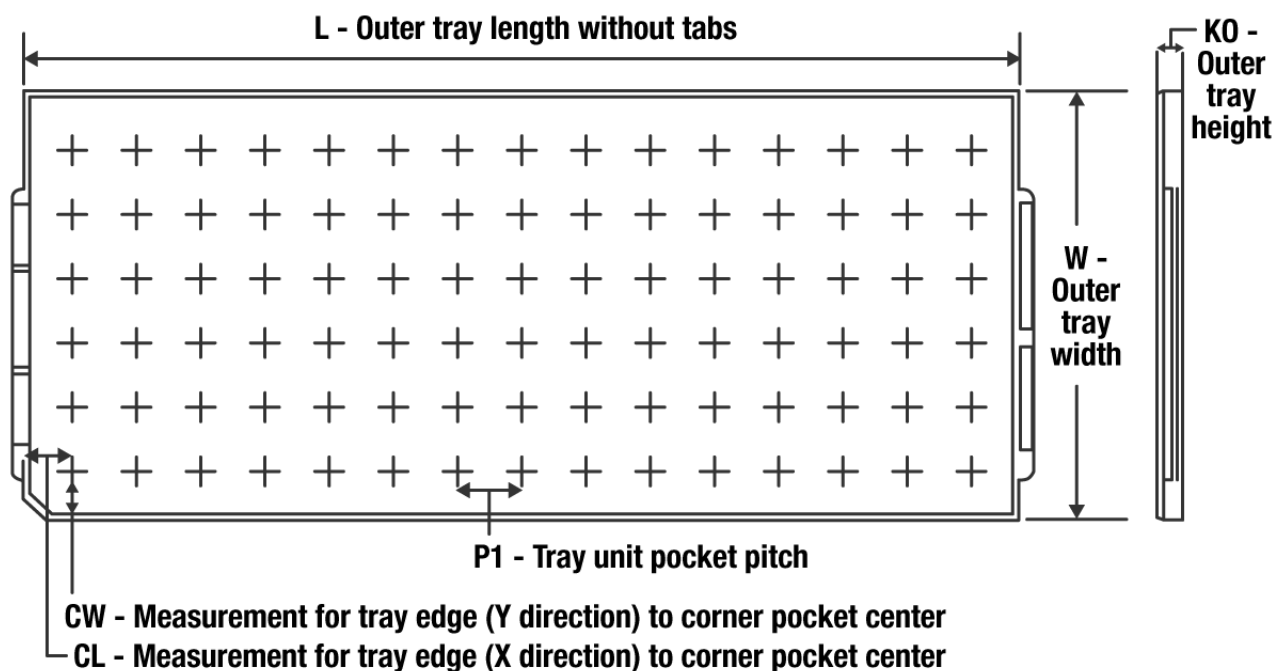
TRAY


Chamfer on Tray corner indicates Pin 1 orientation of packed units.

*All dimensions are nominal

| Device | Package Name | Package Type | Pins | SPQ | Unit array matrix | Max temperature (°C) | L (mm) | W (mm) | K0 (µm) | P1 (mm) | CL (mm) | CW (mm) |
|------------------|--------------|--------------|------|-----|-------------------|----------------------|--------|--------|---------|---------|---------|---------|
| XAM6442ASFGGAALV | ALV | FCBGA | 441 | 1 | 6 x 14 | 150 | 315 | 135.9 | 7620 | 22 | 14.5 | 14.55 |


ALV0441A



PACKAGE OUTLINE

FCBGA - 2.657 mm max height

BALL GRID ARRAY

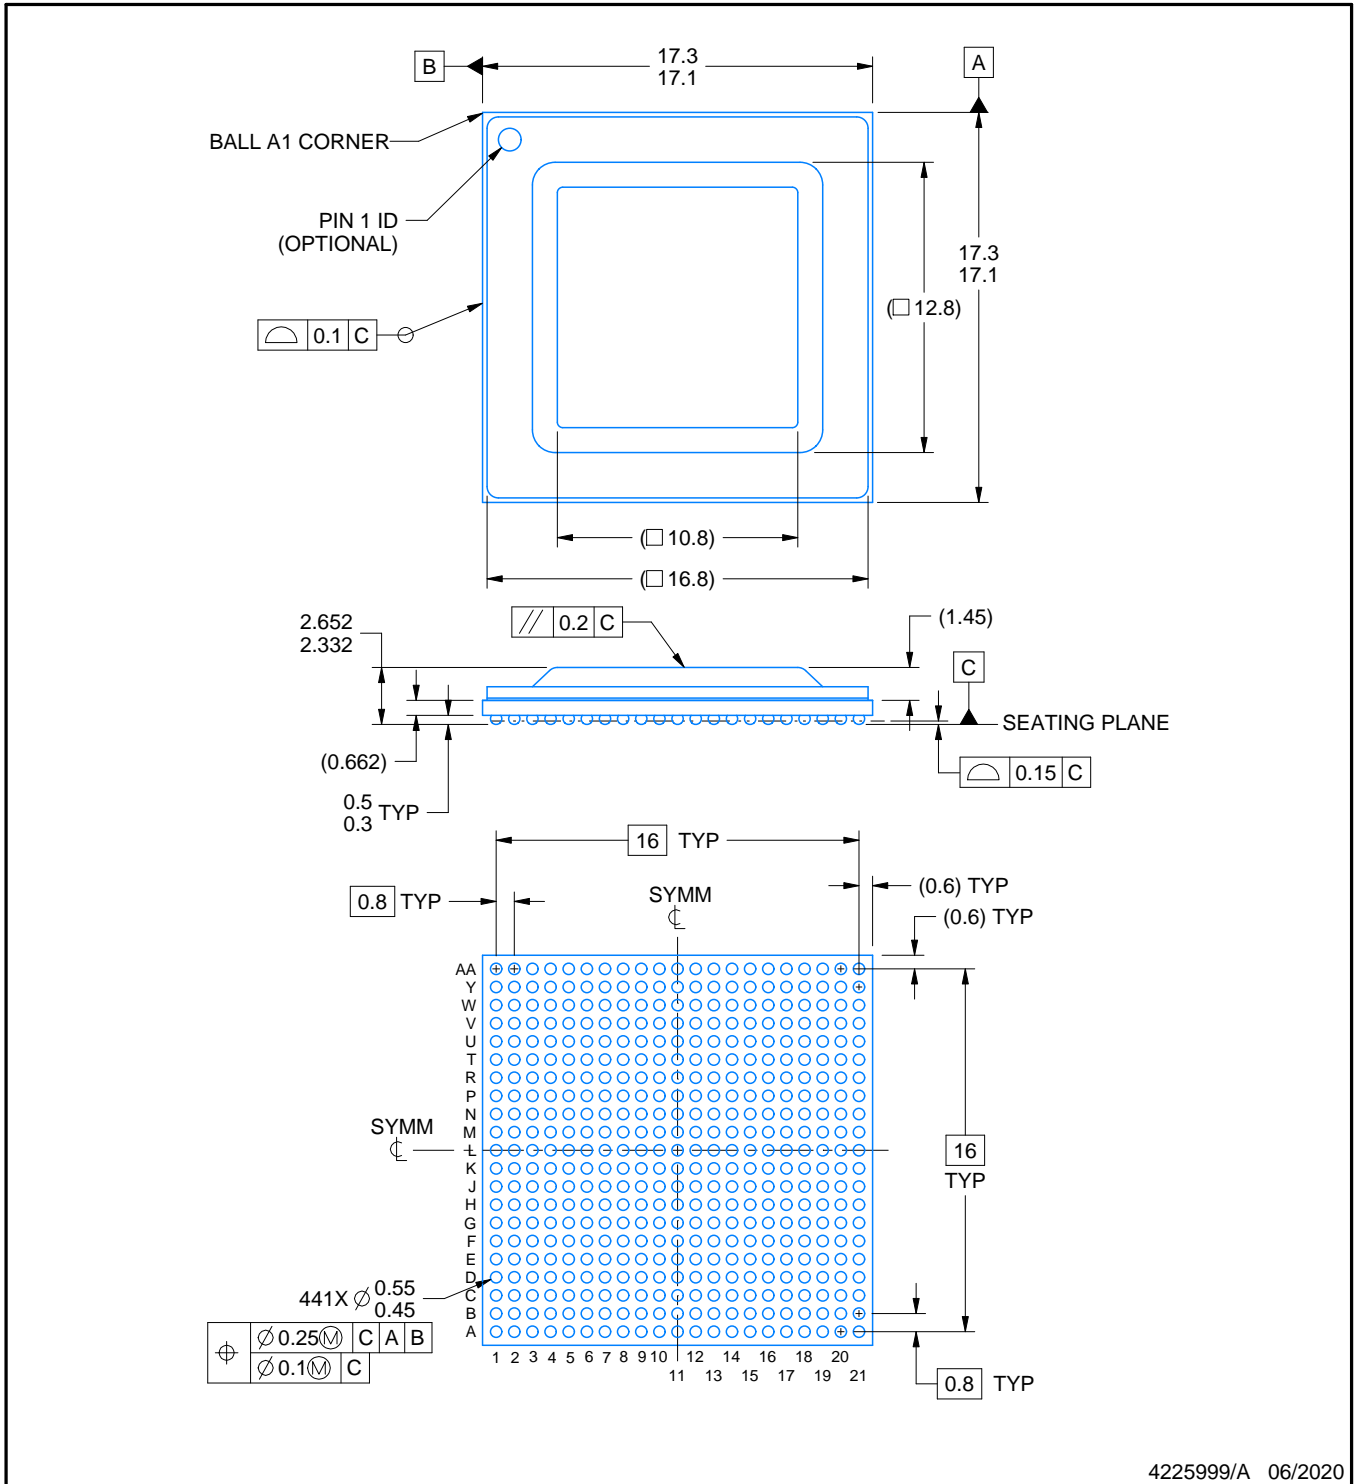

4225999/A 06/2020

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.

EXAMPLE BOARD LAYOUT


ALV0441A

FCBGA - 2.657 mm max height

BALL GRID ARRAY

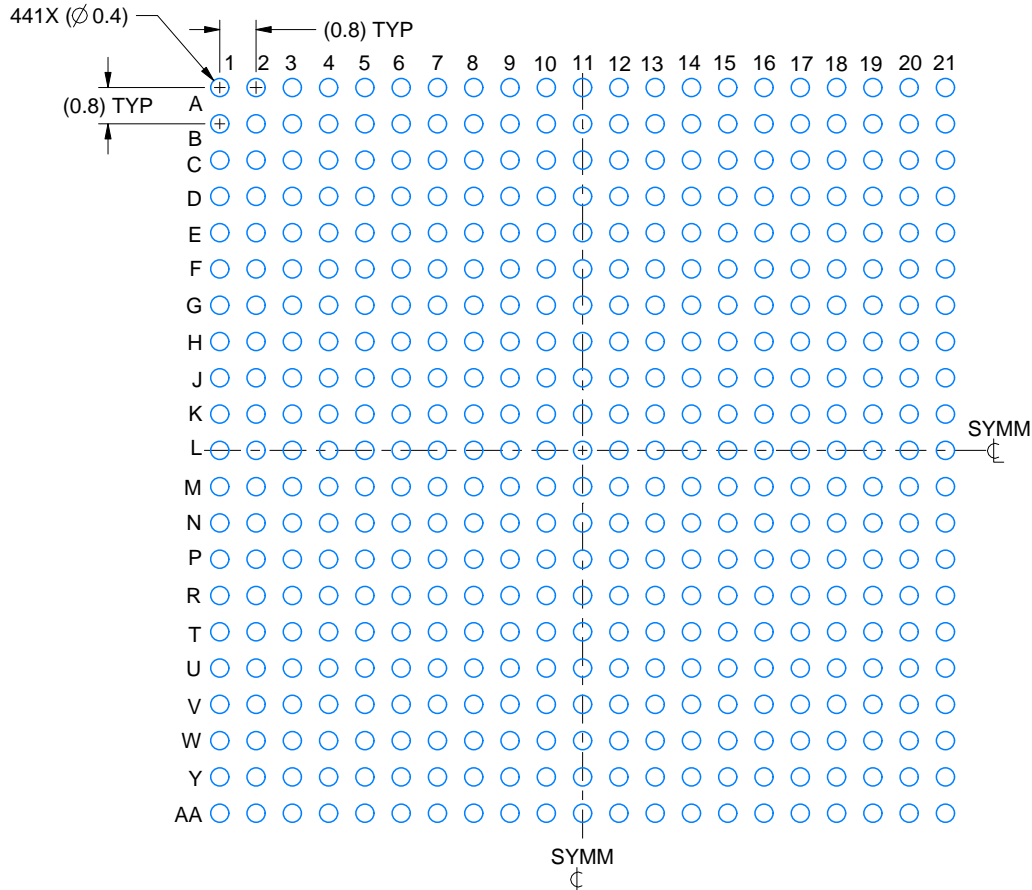

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:6X

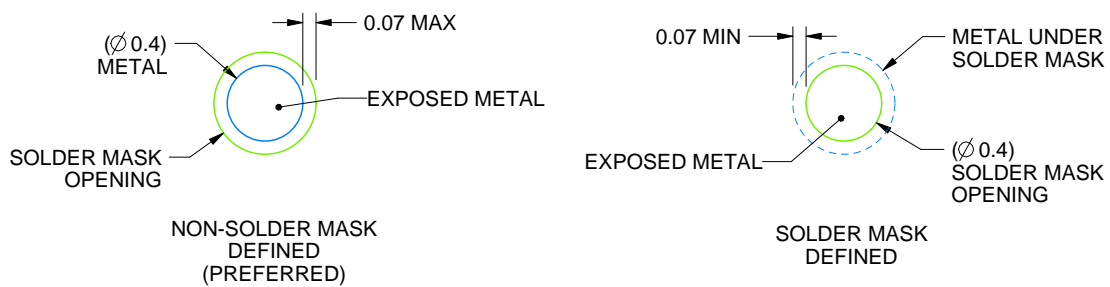

SOLDER MASK DETAILS
NOT TO SCALE

4225999/A 06/2020

NOTES: (continued)


- Final dimensions may vary due to manufacturing tolerance considerations and also routing constraints. For more information, see Texas Instruments literature number SPRU811 (www.ti.com/lit/spru811).

EXAMPLE STENCIL DESIGN

ALV0441A

FCBGA - 2.657 mm max height

BALL GRID ARRAY

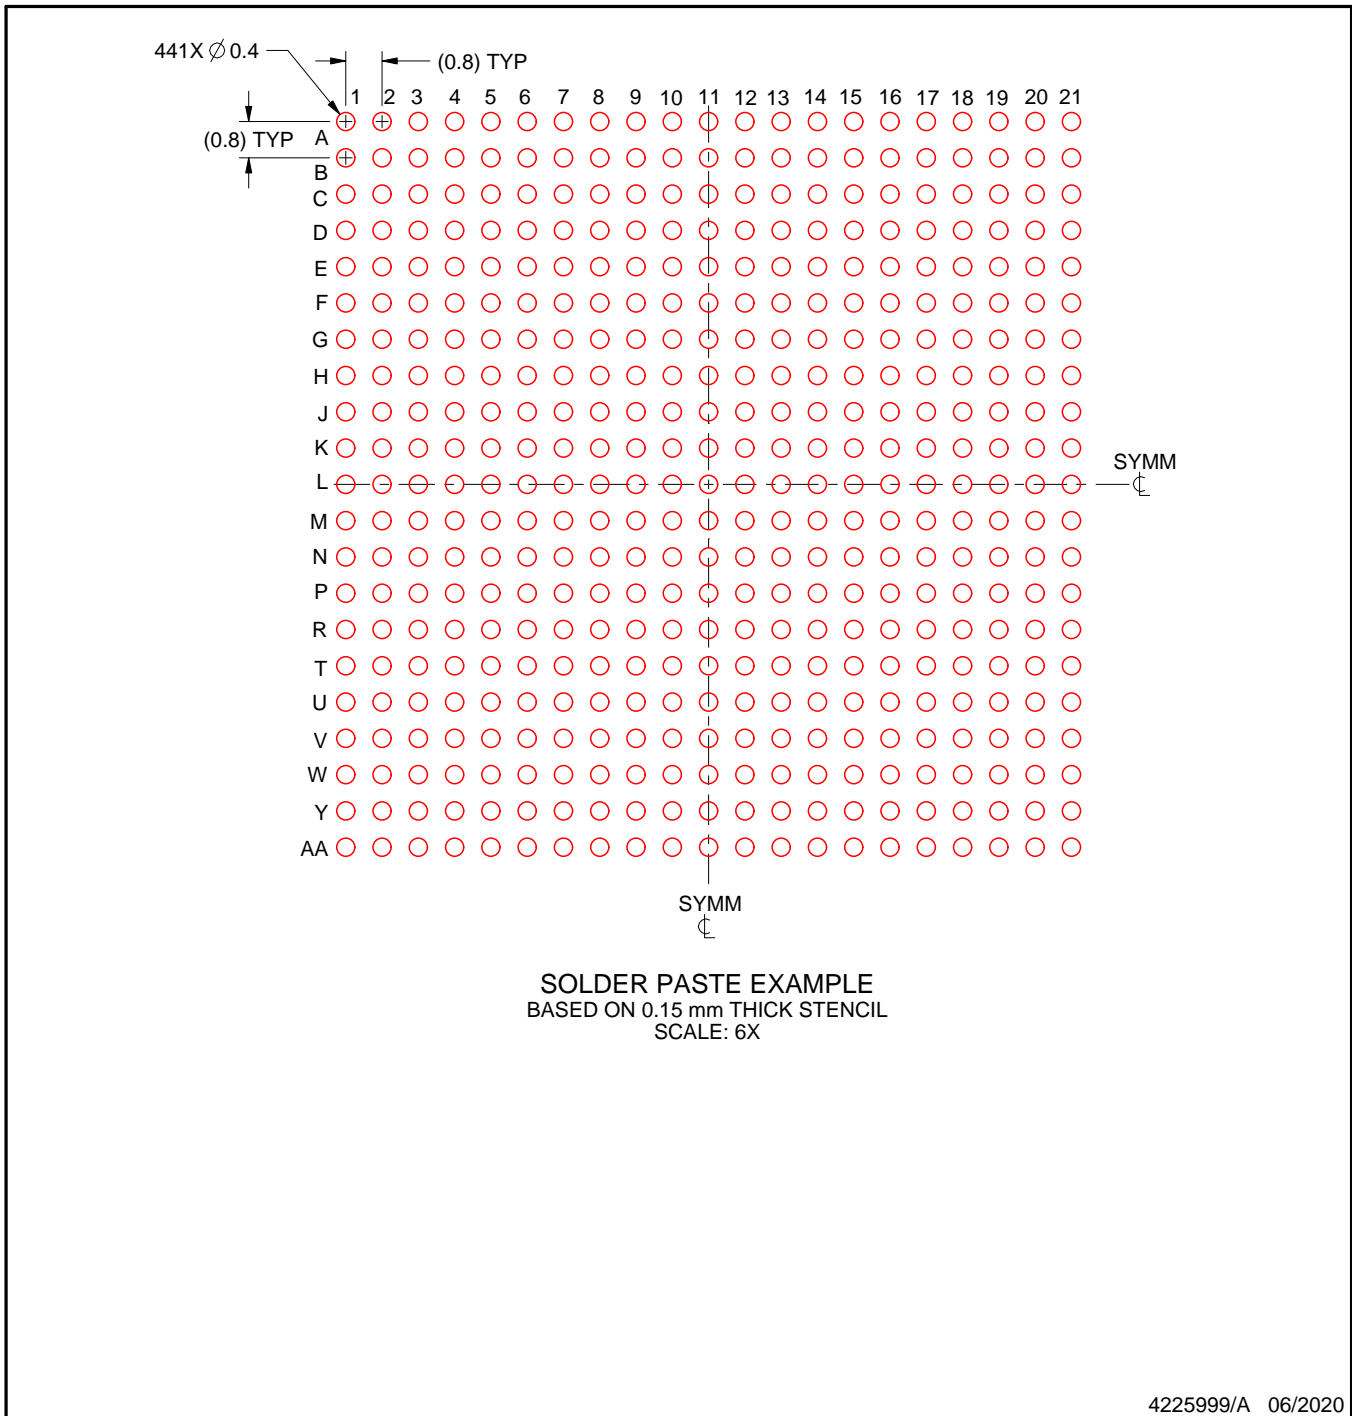

NOTES: (continued)

4. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2022, Texas Instruments Incorporated