System Reset
Monolithic IC PST591~595 Series

Outline

These ICs function in a variety of CPU systems and other logic systems, to detect power supply voltage and reset the system accurately when power is turned on or interrupted, and has a built-in fixed delay time generating circuit. This series has been represented in the past by PST574/PST575, but these new low reset type system reset ICs expand the delay time series with a counter timer using an analog/digital hybrid circuit.

Features

1. Fixed delay time setting by counter timer
   Excellent delay time temperature characteristics ±800ppm/°C
2. Low operating limit voltage 0.65V typ.
3. Hysteresis voltage provided in detection voltage 50mV typ.
4. Current consumption for no-load I_{CCL}=300μA typ. I_{CCH}=200μA typ.
5. 5 delay time products available

PST591	50mS	PST594 400mS
PST592	100mS	PST595 800mS
PST593	200mS	

6. Each product has 9 detection voltage ranks.

C : 4.5V typ.	H : 3.1V typ.
D : 4.2V typ.	I : 2.9V typ.
E : 3.9V typ.	J : 2.7V typ.
F : 3.6V typ.	K : 2.5V typ.
G : 3.3V typ.	


Package

MMP-4A (PST59×□M)
TO-92A (PST59×□)
*□contains detection voltage rank.
(MMP-4A has a manual reset pin, which should be set at GND or NC during normal operation.)

Applications


1. Reset circuits in microcomputers, CPUs and MPUs
2. Logic circuit reset circuits.
3. Battery voltage check circuits.
4. Back-up power supply switching circuits.
5. Level detection circuits.
6. Mechanical reset circuits

Pin Assignment



TO-92A


1	VCC
2	GND
3	VOUT



MMP-4A

1	VOUT
2	Manual Reset
3	VCC
4	GND

Equivalent Circuit Diagram

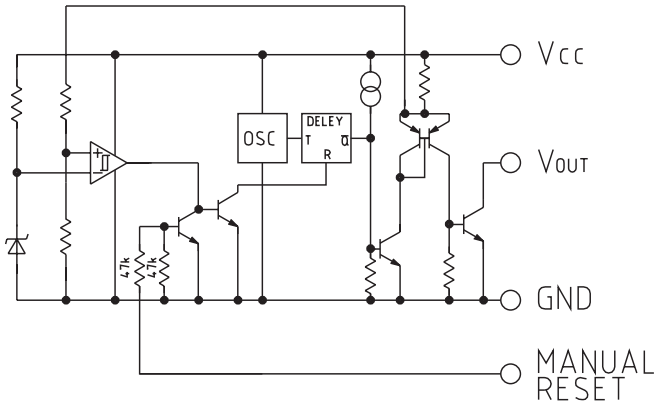

Absolute Maximum Ratings (Ta=25℃)

Item	Symbol	Rating	Units
Storage temperature	TSTG	–40~+125	℃
Operating temperature	TOPR	–20~+75	℃
Power supply voltage	VCC max.	–0.3~10	V
Manual reset input voltage	VRES max.	–0.3~10	V
Allowable loss	Pd	200 (MMP-4P) 300 (TO-92)	mW

Electrical Characteristics (Ta=25℃) (Except where noted otherwise, resistance unit is Ω)

Item		Symbol	Measuring circuit	Measurement conditions		Min.	Typ.	Max.	Unit
Detection voltage		Vs	1	RL=470 VOL ≦ 0.4V VCC=H→L	C	4.3	4.5	4.7	V
					D	4.0	4.2	4.4	
					E	3.7	3.9	4.1	
					F	3.4	3.6	3.8	
					G	3.1	3.3	3.5	
					H	2.9	3.1	3.3	
					I	2.75	2.90	3.05	
					J	2.55	2.70	2.85	
					K	2.35	2.50	2.65	
Hysteresis voltage		⊿Vs	1	RL=470, VCC=L→H→L		30	50	100	mV
Detection voltage temperature coefficient		Vs/⊿T	1	RL=470, Ta=–20℃~+75℃			±0.01		%/℃
Low-level output voltage		VOL	1	VCC=Vs min.–0.05V, RL=470			0.1	0.4	V
Output leakage current		IOH	1	VCC=10V				±0.1	μA
Circuit current while on		ICCL	1	VCC=Vs min.–0.05V, RL=∞			300	600	μA
Circuit current while off		ICCH	1	VCC=Vs typ./0.85V, RL=∞			200	350	μA
"H" transport delay time		tPLH	2	RL=4.7k CL=100PF ✶1	PST591	30	50	75	mS
					PST592	60	100	150	
					PST593	120	200	300	
					PST594	240	400	600	
					PST595	480	800	1200	
"L" transport delay time		tPHL	2	RL=4.7k, CL=100PF ✶1			10		μS
Operating power supply voltage		VOPL	1	RL=4.7k, VOL ≦ 0.4V			0.65	0.85	V
Output current while on 1		IOL1	1	VCC=Vs min.–0.05V, RL=0		8			mA
Output current while on 2		IOL2	1	Ta=–20℃~+75℃, RL=0 ✶2		6			mA
Manual reset pin	Input high voltage	VRESH				2.0			V
	Input high current	VRESH		VRES=2V				80	μA
	Input low voltage	VRESL						0.8	V


✶1 tpLH : VCC= (Vs typ.–0.4V) → (Vs typ.+0.4V), tpHL : VCC= (Vs typ.+0.4V) → (Vs typ.–0.4V)

✶2 VCC=Vs min.–0.15V


Note 3: VOUT pin is low when manual reset pin is high.
VOUT pin is high when manual reset pin is low.

Measuring Circuit

[1]

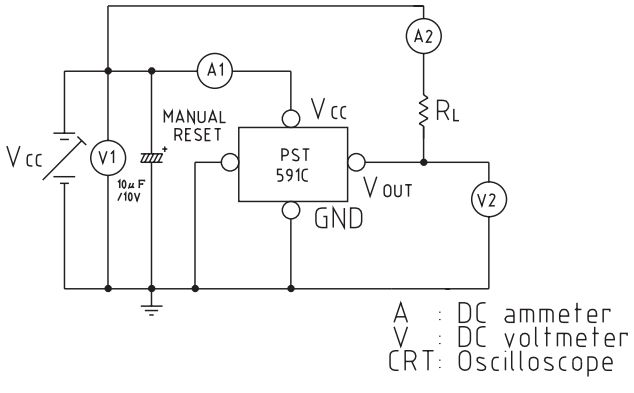


[2]

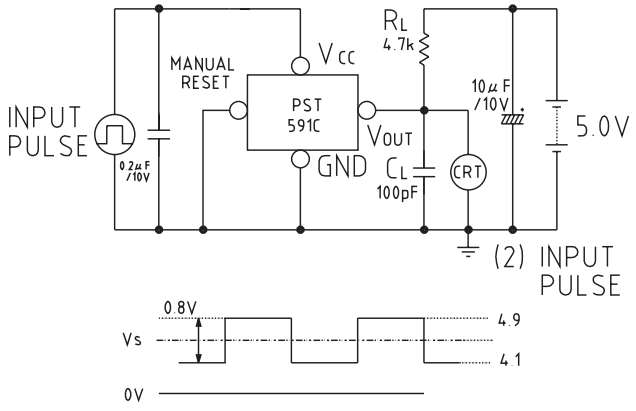


Note: Input model is an example for PST591C.

Characteristics (Example: PST591D)


VCC vs. VOUT

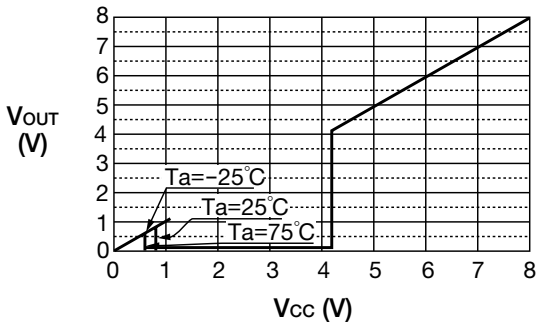


VS vs. Ta

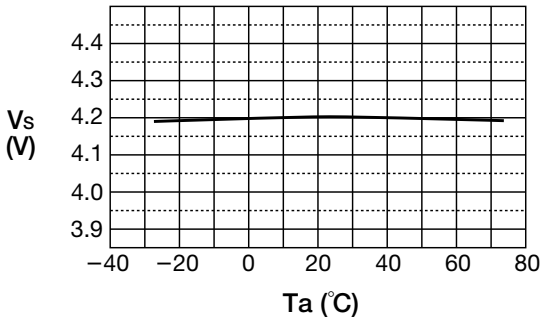


⊿VS vs. Ta

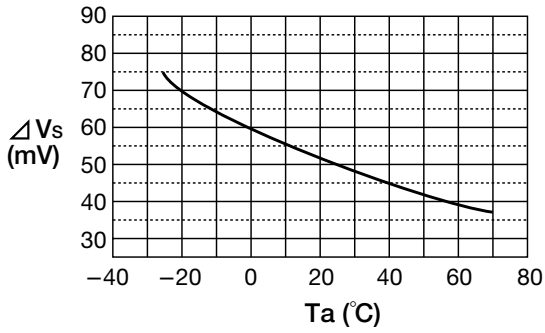


VOL vs. Ta

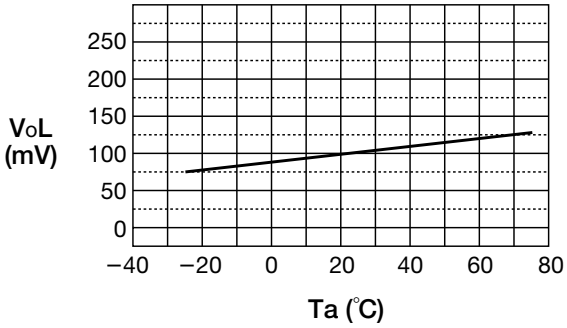


ICCL vs. Ta

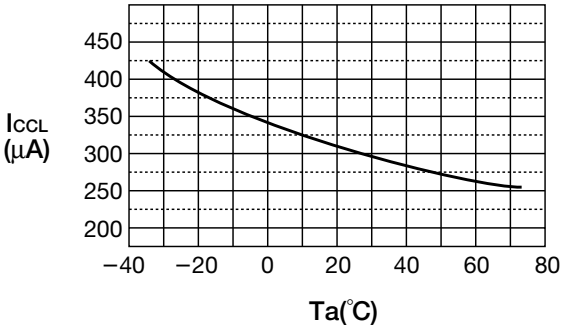


ICCH vs. Ta

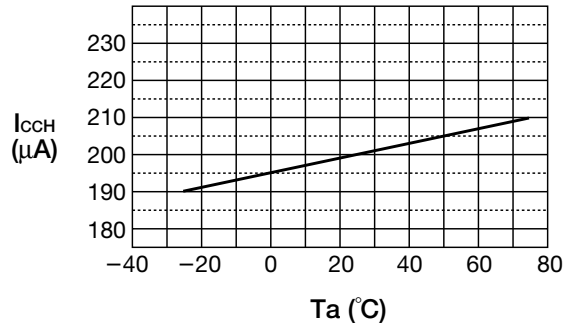


IOL vs. Ta

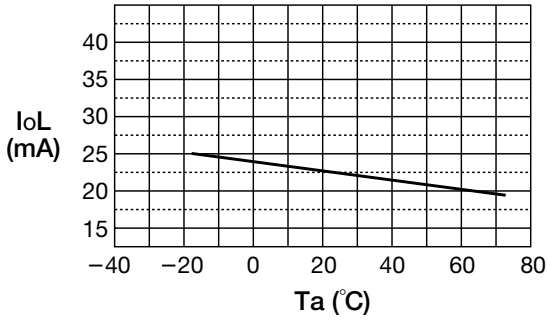


tPLH vs. Ta

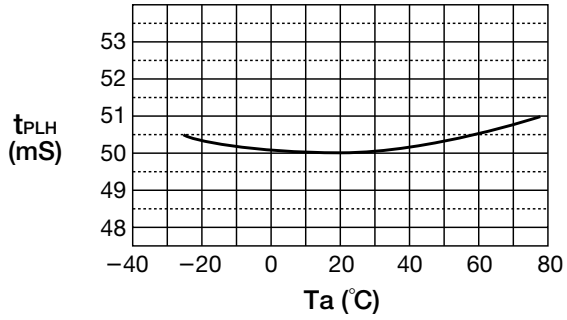


tPHL vs. Ta

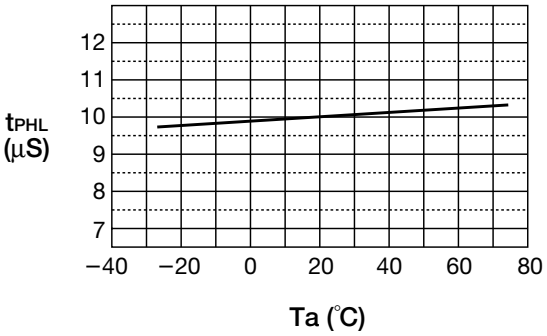

Pd vs. Ta

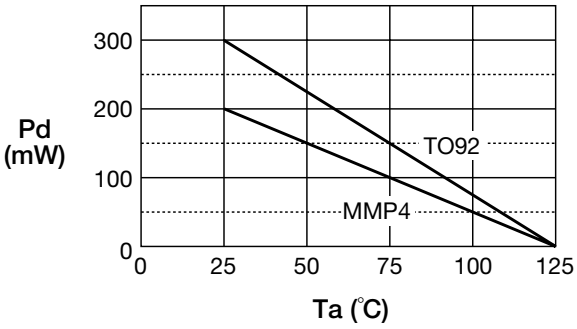


Timing Chart

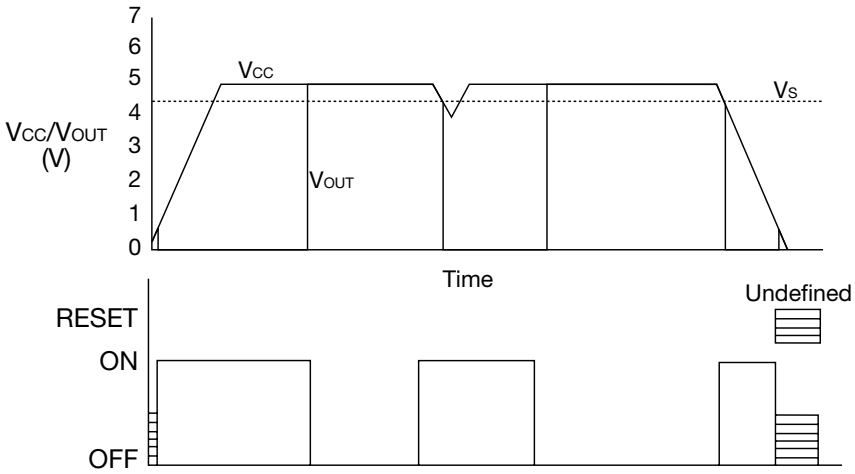


Application circuits

1. Normal hard reset

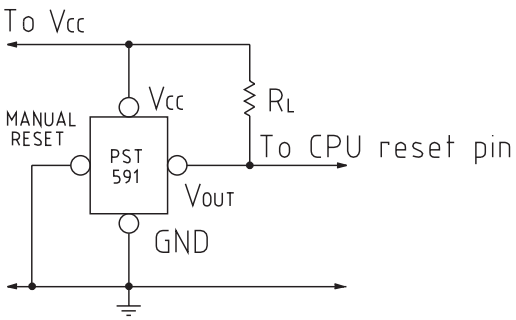

Note: Connect a capacitor between IC Vcc and GND pins if Vcc line impedance is high.


2. Manual reset

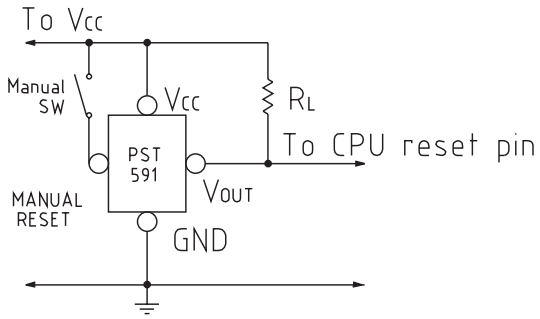

VOUT pin low for manual switch ON.
VOUT pin high for manual switch OFF.

Note: Connect a capacitor between IC Vcc and GND pins if Vcc line impedance is high.

3. Mute circuit

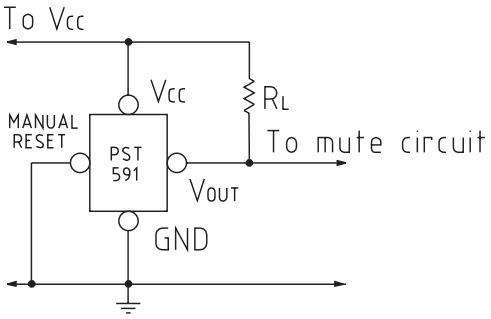

Note: Connect a capacitor between IC Vcc and GND pins if Vcc line impedance is high.