BB304C

Build in Biasing Circuit MOS FET IC
UHF/VHF RF Amplifier

HITACHI


ADE-208-606C (Z)
4th. Edition
August 1998

Features

- Build in Biasing Circuit; To reduce using parts cost & PC board space.
- High gain;
  (PG = 29 dB typ. at f = 200 MHz)
- Low noise characteristics;
  (NF = 1.2 dB typ. at f = 200 MHz)
- Wide supply voltage range;
  Applicable with 5V to 9V supply voltage.
- Withstanding to ESD;
  Build in ESD absorbing diode. Withstand up to 200V at C=200pF, Rs=0 conditions.
- Provide mini mold packages; CMPAK-4(SOT-343mod)

Outline

CMPAK-4



1. Source
2. Gate1
3. Gate2
4. Drain

Notes: 1 Marking is “DW–”.
2. BB304C is individual type number of HITACHI BBFET.

Hitachi semiconductor

Absolute Maximum Ratings (Ta = 25°C)

Item	Symbol	Ratings	Unit
Drain to source voltage	V_{DS}	12	V
Gate1 to source voltage	V_{G1S}	+10 –0	V
Gate2 to source voltage	V_{G2S}	±10	V
Drain current	I_D	25	mA
Channel power dissipation	Pch	100	mW
Channel temperature	Tch	150	°C
Storage temperature	Tstg	–55 to +150	°C

Electrical Characteristics (Ta = 25°C)


Item	Symbol	Min	Typ	Max	Unit	Test Conditions
Drain to source breakdown voltage	$V_{(BR)DSS}$	12	—	—	V	I_D = 200µA, V_{G1S} = V_{G2S} = 0
Gate1 to source breakdown voltage	$V_{(BR)G1SS}$	+10	—	—	V	I_{G1} = +10µA, V_{G2S} = V_{DS} = 0
Gate2 to source breakdown voltage	$V_{(BR)G2SS}$	±10	—	—	V	I_{G2} = +10µA, V_{G1S} = V_{DS} = 0
Gate1 to source cutoff current	I_{G1SS}	—	—	+100	nA	V_{G1S} = +9V, V_{G2S} = V_{DS} = 0
Gate2 to source cutoff current	I_{G2SS}	—	—	±100	nA	V_{G2S} = +9V, V_{G1S} = V_{DS} = 0
Gate1 to source cutoff voltage	$V_{G1S(off)}$	0.4	—	1.0	V	V_{DS} = 5V, V_{G2S} = 4V I_D = 100µA
Gate2 to source cutoff voltage	$V_{G2S(off)}$	0.5	—	1.0	V	V_{DS} = 5V, V_{G1S} = 5V I_D = 100µA

Electrical Characteristics (Ta = 25°C)


Item	Symbol	Min	Typ	Max	Unit	Test Conditions
Input capacitance	c_{iss}	2.3	2.8	3.6	pF	V_{DS} = 5V, V_{G1} = 5V, V_{G2S} =4V
Output capacitance	c_{oss}	0.9	1.3	2.0	pF	R_G = 180kΩ, f = 1MHz
Reverse transfer capacitance	c_{rss}	0.003	0.02	0.05	pF	
Drain current	$I_{D(op)}$ 1	9	14	19	mA	V_{DS} = 5V, V_{G1} = 5V, V_{G2S} = 4V R_G = 180kΩ
	$I_{D(op)}$ 2	—	13	—	mA	V_{DS} = 9V, V_{G1} = 9V, V_{G2S} =6V R_G = 470kΩ
Forward transfer admittance	$|y_{fs}|$1	22	27	34	mS	V_{DS} = 5V, V_{G1} = 5V, V_{G2S} =4V R_G = 180kΩ, f = 1kHz
	$|y_{fs}|$2	—	27	—	mS	V_{DS} = 9V, V_{G1} = 9V, V_{G2S} =6V R_G = 470kΩ, f = 1kHz
Power gain	PG1	24	29	32	dB	V_{DS} = 5V, V_{G1} = 5V, V_{G2S} =4V R_G = 180kΩ, f = 200MHz
	PG2	—	29	—	dB	V_{DS} = 9V, V_{G1} = 9V, V_{G2S} =6V R_G = 470kΩ, f = 200MHz
Noise figure	NF1	—	1.2	1.9	dB	V_{DS} = 5V, V_{G1} = 5V, V_{G2S} =4V R_G = 180kΩ, f = 200MHz
	NF2	—	1.2	—	dB	V_{DS} = 9V, V_{G1} = 9V, V_{G2S} =6V R_G = 470kΩ, f = 200MHz

Main Characteristics

Test Circuit for Operating Items ($I_{D(op)}$, |yfs|, Ciss, Coss, Crss, NF, PG)

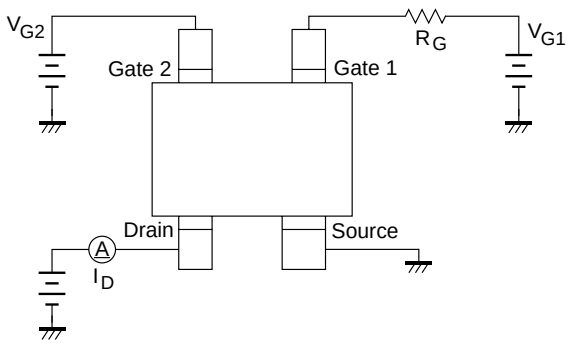


Power Gain, Noise Figure Test Circuit

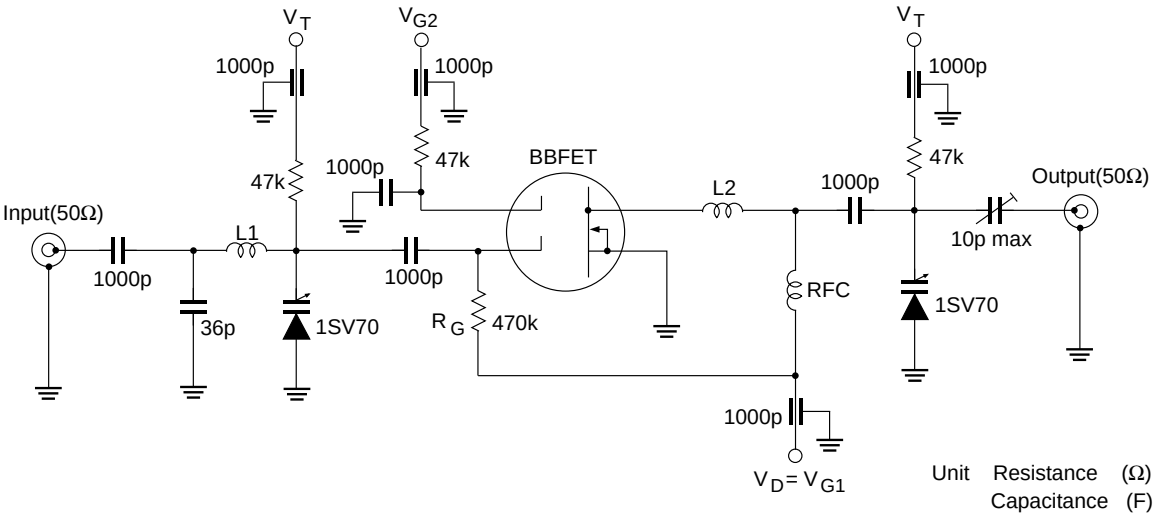


L1 : ϕ1mm Enameled Copper Wire,Inside dia 10mm, 2Turns
L2 : ϕ1mm Enameled Copper Wire,Inside dia 10mm, 2Turns
RFC : ϕ1mm Enameled Copper Wire,Inside dia 5mm, 2Turns


Maximum Channel Power Dissipation Curve

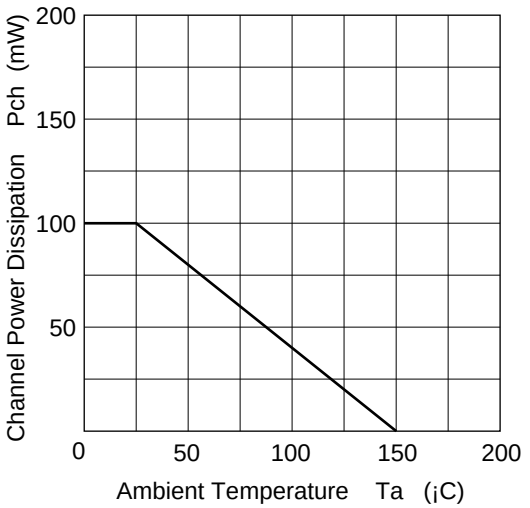


Typical Output Characteristics

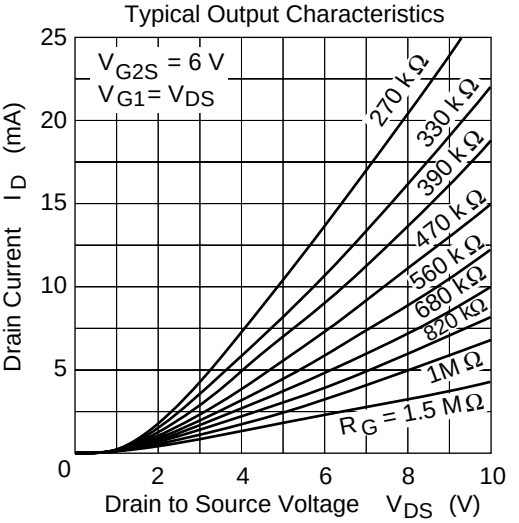


Drain Current vs. Gate2 to Source Voltage

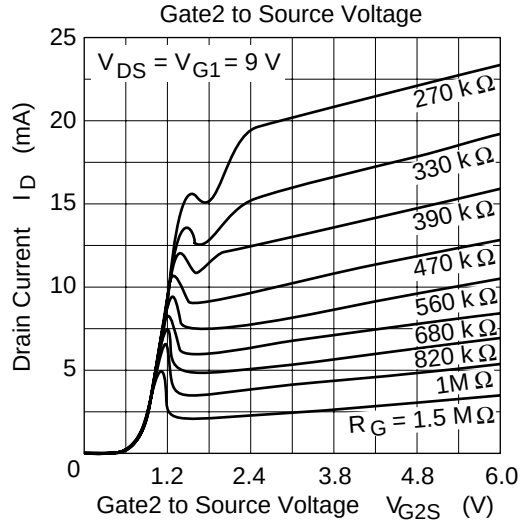


Drain Current vs. Gate1 Voltage

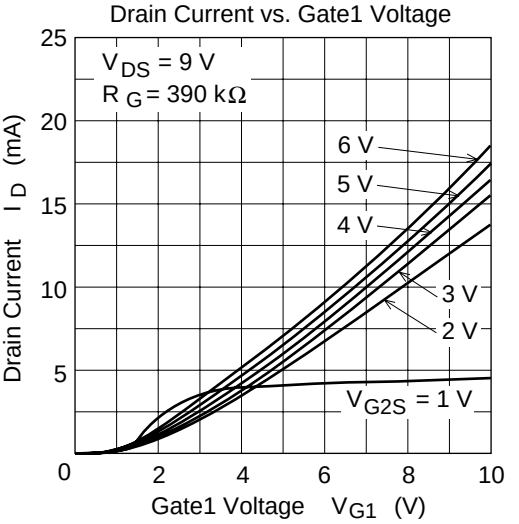


Drain Current vs. Gate1 Voltege

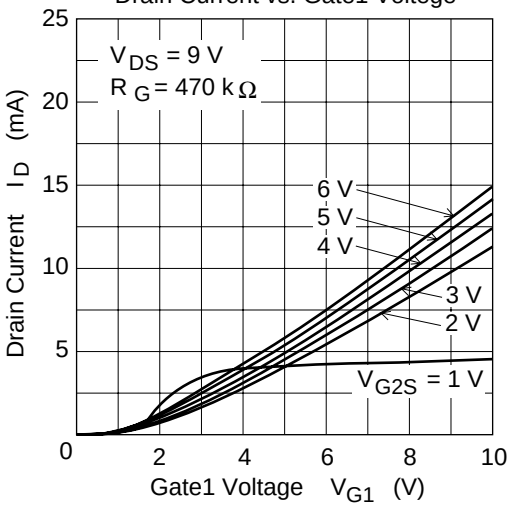


Drain Current vs. Gate1 Voltege

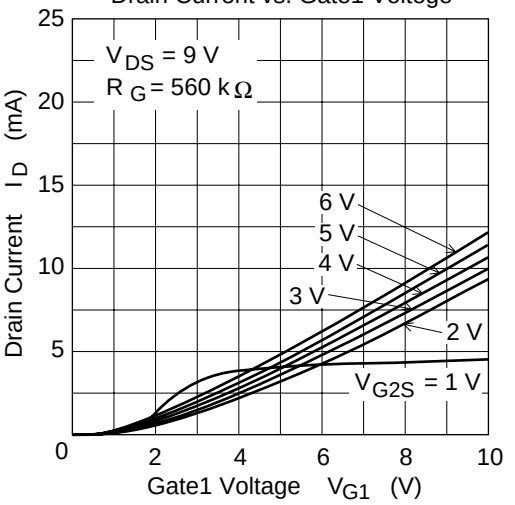


Forward Transfer Admittance vs. Gate1 Voltage

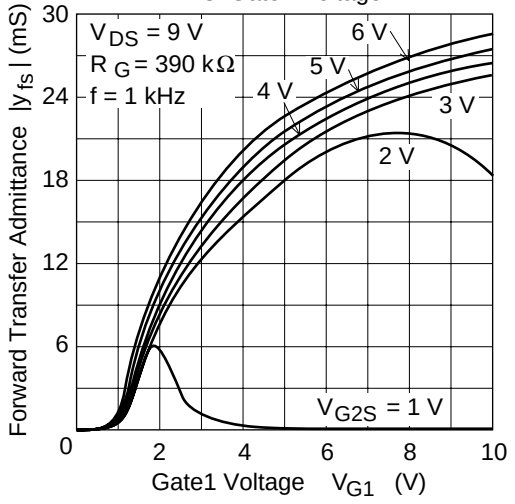


Forward Transfer Admittance vs. Gate1 Voltage

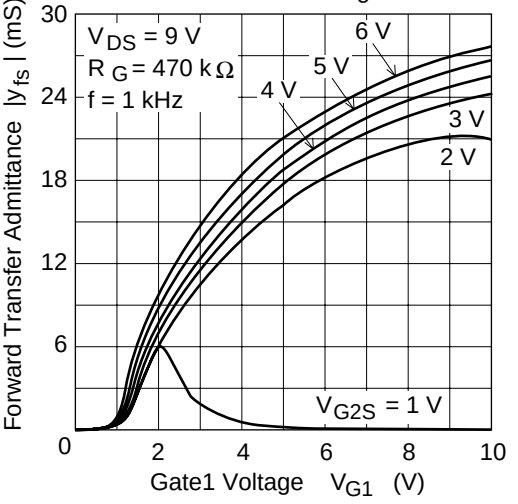


Forward Transfer Admittance vs. Gate1 Voltage

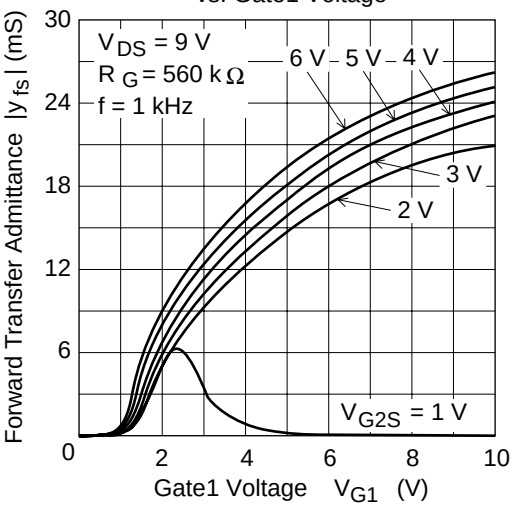


Power Gain vs. Gate Resistance

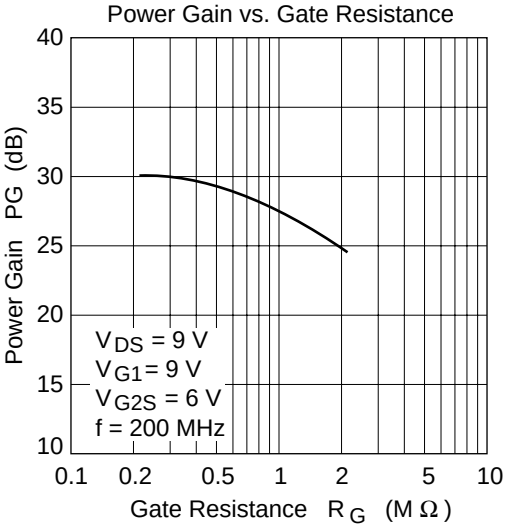


Noise Figure vs. Gate Resistance

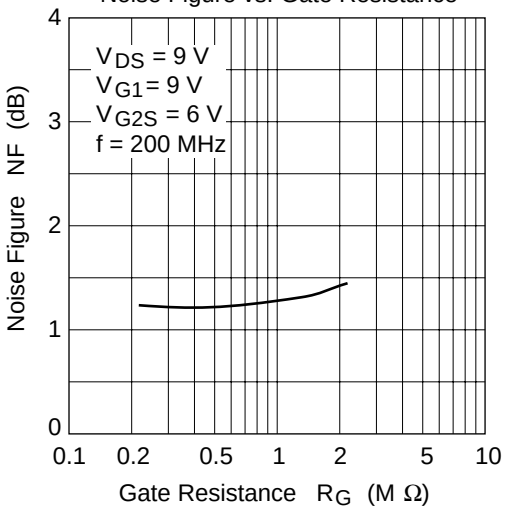


Power Gain vs. Drain Current

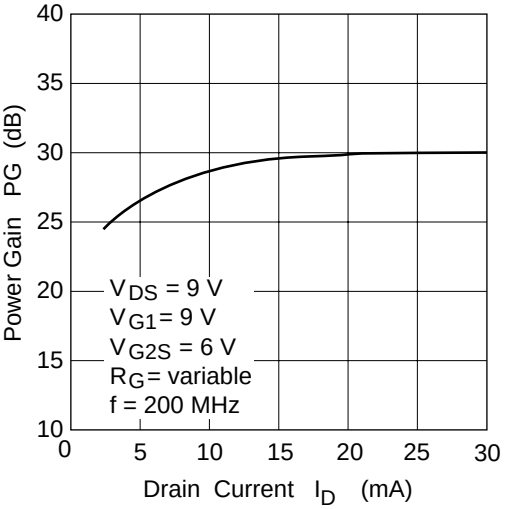


Noise Figure vs. Drain Current

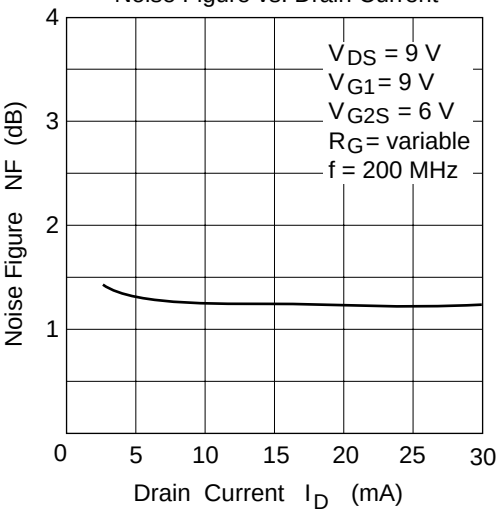


Drain Current vs. Gate Resistance

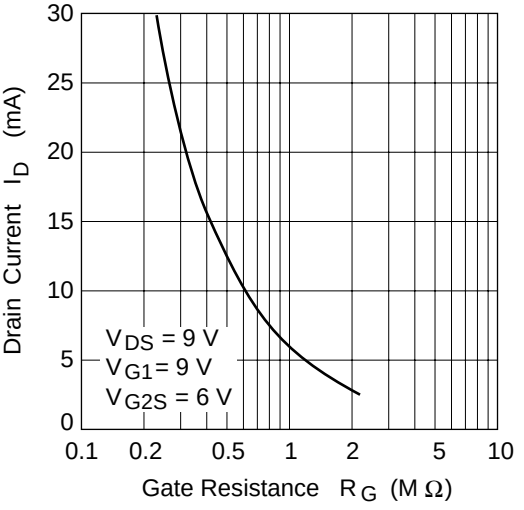


Gain Reduction vs.
Gate2 to Source Voltage

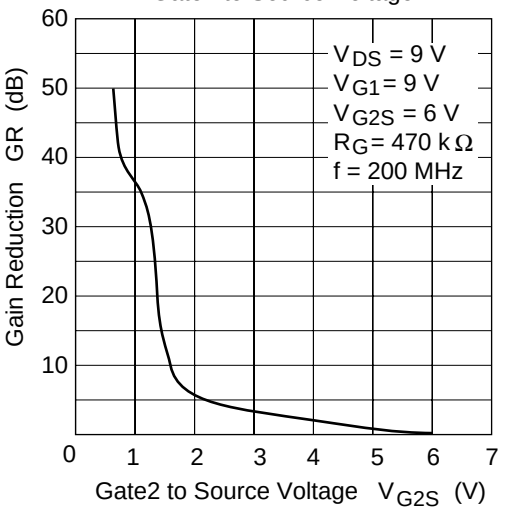

Input Capacitance vs.
Gate2 to Source Voltage

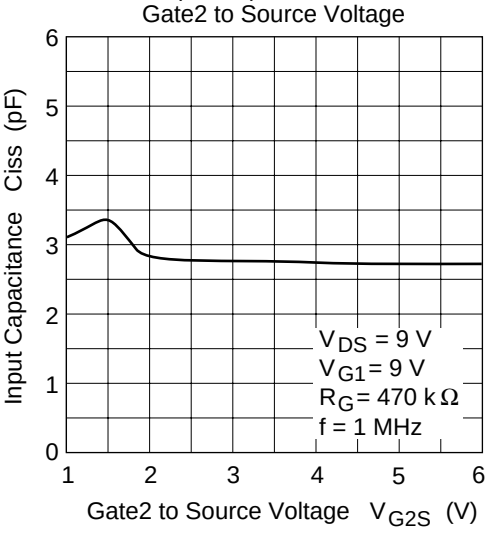


S11 Parameter vs. Frequency

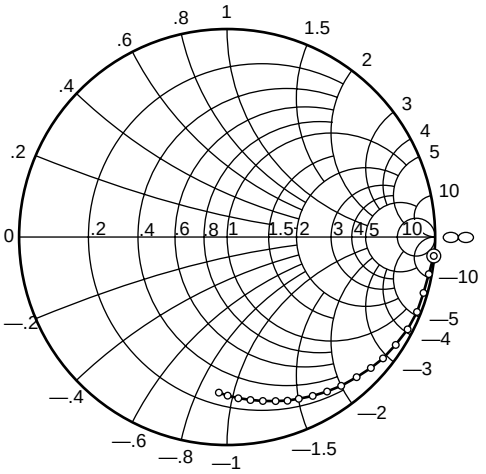


Test Condition : V_{DS}= 9 V , V_{G1}= 9 V
V_{G2S} = 6 V , R_G = 470 kΩ
50 1000 MHz (50 MHz step)

S21 Parameter vs. Frequency

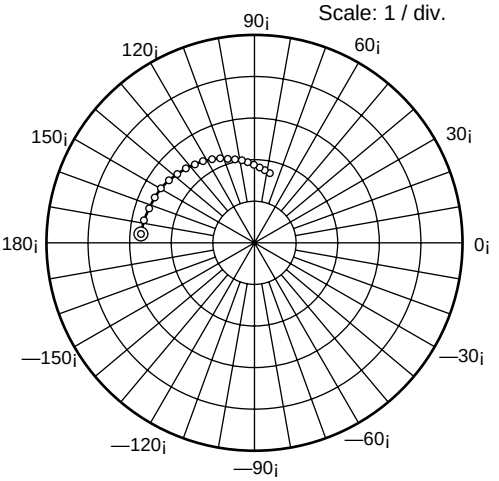


Test Condition : V_{DS}= 9 V , V_{G1}= 9 V
V_{G2S} = 6 V , R_G = 470 kΩ
50 1000 MHz (50 MHz step)

S12 Parameter vs. Frequency

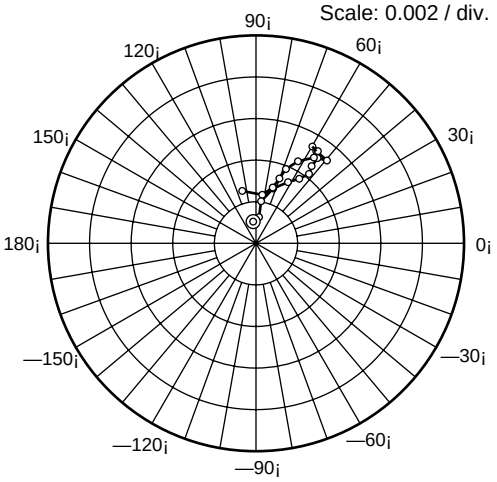

Test Condition : V_{DS}= 9 V , V_{G1}= 9 V
V_{G2S} = 6 V , R_G = 470 kΩ
50 1000 MHz (50 MHz step)

S22 Parameter vs. Frequency

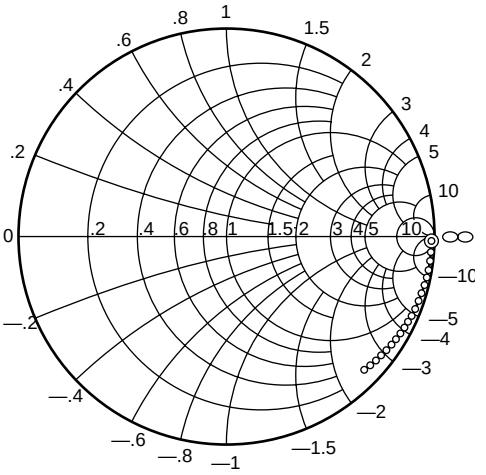


Test Condition : V_{DS}= 9 V , V_{G1}= 9 V
V_{G2S} = 6 V , R_G = 470 kΩ
50 1000 MHz (50 MHz step)

Sparameter (V_{DS} = V_{G1} = 9V, V_{G2S} = 6V, R_G = 470kΩ, Zo = 50Ω)

	S11		S21		S12		S22	
f (MHz)	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
50	0.996	–5.3	2.74	174.0	0.00096	98.6	0.985	–1.9
100	0.993	–10.9	2.73	168.0	0.00130	84.4	0.991	–4.5
150	0.987	–16.6	2.68	162.3	0.00203	83.6	0.990	–6.5
200	0.978	–21.9	2.66	156.3	0.00285	72.3	0.988	–9.4
250	0.972	–27.4	2.63	150.4	0.00335	69.7	0.985	–11.6
300	0.954	–33.2	2.57	144.3	0.00385	68.3	0.982	–14.0
350	0.943	–38.2	2.50	138.7	0.00455	63.2	0.979	–16.2
400	0.925	–43.2	2.43	133.3	0.00488	55.4	0.975	–18.4
450	0.910	–48.0	2.37	128.0	0.00526	59.8	0.971	–21.0
500	0.893	–52.5	2.30	122.6	0.00522	56.1	0.967	–23.0
550	0.880	–57.4	2.24	117.5	0.00498	53.2	0.962	–25.2
600	0.861	–62.1	2.17	112.7	0.00512	49.1	0.957	–27.3
650	0.847	–66.1	2.10	108.1	0.00497	53.4	0.952	–29.4
700	0.829	–69.9	2.02	103.6	0.00455	53.6	0.947	–31.6
750	0.816	–74.1	1.96	99.1	0.00418	51.6	0.943	–33.7
800	0.804	–78.2	1.91	94.8	0.00372	55.7	0.937	–35.8
850	0.791	–82.4	1.85	80.4	0.00329	62.4	0.933	–38.0
900	0.779	–86.1	1.79	86.3	0.00275	73.0	0.928	–40.0
950	0.764	–89.5	1.73	82.2	0.00233	82.4	0.921	–42.1
1000	0.753	–92.4	1.68	78.3	0.00258	105.1	0.918	–44.2

Package Dimensions

Unit: mm

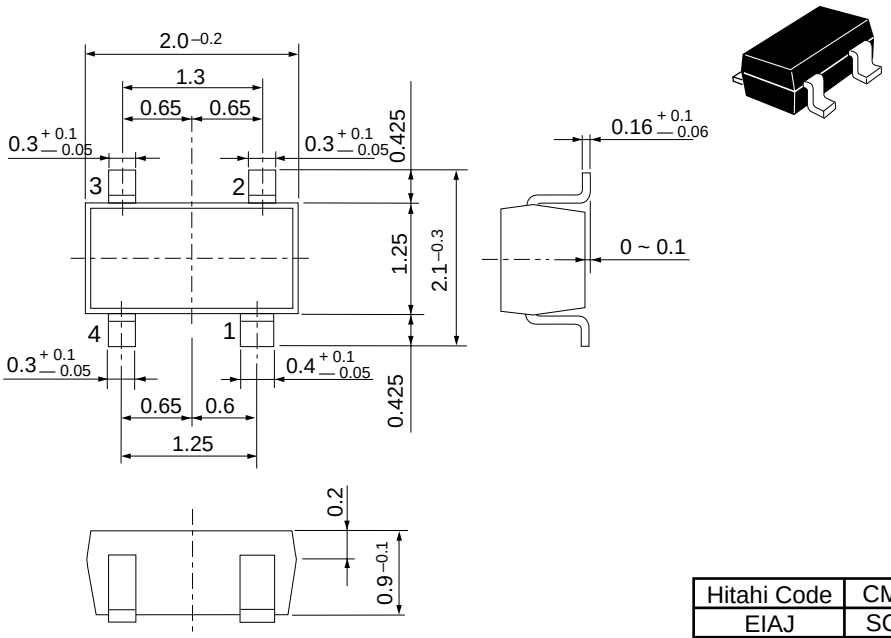

Hitahi Code	CMPAK-4
EIAJ	SC-82AB
JEDEC	

Cautions

1. Hitachi neither warrants nor grants licenses of any rights of Hitachi's or any third party's patent, copyright, trademark, or other intellectual property rights for information contained in this document. Hitachi bears no responsibility for problems that may arise with third party's rights, including intellectual property rights, in connection with use of the information contained in this document.
2. Products and product specifications may be subject to change without notice. Confirm that you have received the latest product standards or specifications before final design, purchase or use.
3. Hitachi makes every attempt to ensure that its products are of high quality and reliability. However, contact Hitachi's sales office before using the product in an application that demands especially high quality and reliability or where its failure or malfunction may directly threaten human life or cause risk of bodily injury, such as aerospace, aeronautics, nuclear power, combustion control, transportation, traffic, safety equipment or medical equipment for life support.
4. Design your application so that the product is used within the ranges guaranteed by Hitachi particularly for maximum rating, operating supply voltage range, heat radiation characteristics, installation conditions and other characteristics. Hitachi bears no responsibility for failure or damage when used beyond the guaranteed ranges. Even within the guaranteed ranges, consider normally foreseeable failure rates or failure modes in semiconductor devices and employ systemic measures such as fail-safes, so that the equipment incorporating Hitachi product does not cause bodily injury, fire or other consequential damage due to operation of the Hitachi product.
5. This product is not designed to be radiation resistant.
6. No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without written approval from Hitachi.
7. Contact Hitachi's sales office for any questions regarding this document or Hitachi semiconductor products.

HITACHI

Hitachi, Ltd.
Semiconductor & Integrated Circuits.
Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan
Tel: Tokyo (03) 3270-2111 Fax: (03) 3270-5109

URL
NorthAmerica : http:semiconductor.hitachi.com/
Europe : http://www.hitachi-eu.com/hel/ecg
Asia (Singapore) : http://www.has.hitachi.com.sg/grp3/sicd/index.htm
Asia (Taiwan) : http://www.hitachi.com.tw/E/Product/SICD_Frame.htm
Asia (HongKong) : http://www.hitachi.com.hk/eng/bo/grp3/index.htm
Japan : http://www.hitachi.co.jp/Sicd/indx.htm

For further information write to:

Hitachi Semiconductor (America) Inc.
179 East Tasman Drive,
San Jose,CA 95134
Tel: <1> (408) 433-1990
Fax: <1>(408) 433-0223

Hitachi Europe GmbH
Electronic components Group
Dornacher Straße 3
D-85622 Feldkirchen, Munich
Germany
Tel: <49> (89) 9 9180-0
Fax: <49> (89) 9 29 30 00

Hitachi Europe Ltd.
Electronic Components Group.
Whitebrook Park
Lower Cookham Road
Maidenhead
Berkshire SL6 8YA, United Kingdom
Tel: <44> (1628) 585000
Fax: <44> (1628) 778322

Hitachi Asia Pte. Ltd.
16 Collyer Quay #20-00
Hitachi Tower
Singapore 049318
Tel: 535-2100
Fax: 535-1533

Hitachi Asia Ltd.
Taipei Branch Office
3F, Hung Kuo Building. No.167,
Tun-Hwa North Road, Taipei (105)
Tel: <886> (2) 2718-3666
Fax: <886> (2) 2718-8180

Hitachi Asia (Hong Kong) Ltd.
Group III (Electronic Components)
7/F., North Tower, World Finance Centre,
Harbour City, Canton Road, Tsim Sha Tsui,
Kowloon, Hong Kong
Tel: <852> (2) 735 9218
Fax: <852> (2) 730 0281
Telex: 40815 HITEC HX

Copyright © Hitachi, Ltd., 1998. All rights reserved. Printed in Japan.