

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0906270160

Status:

Active

Overview:

cgrid_iii

Description:

2.54mm (.100") Pitch C-Grid III™ Header, Single Row, Vertical, with Kinked PC Tail, 40 Circuits, Tin (Sn) Plating


Documents:

3D Model

Drawing (PDF)

RoHS Certificate of Compliance (PDF)

General	
Product Family	PCB Headers
Series	90627
Application	Wire-to-Board
Overview	cgrid_iii
Product Name	C-Grid III™
Physical	
Breakaway	Yes
Circuits (Loaded)	40
Circuits (maximum)	40
Color - Resin	Black
First Mate / Last Break	No
Glow-Wire Compliant	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	None
Material - Metal	Brass
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	Polyester
Number of Rows	1
Orientation	Vertical
PC Tail Length (in)	0.114 In
PC Tail Length (mm)	2.90 mm
PCB Locator	No
PCB Retention	Yes
PCB Thickness Recommended (in)	0.061 In
PCB Thickness Recommended (mm)	1.50 mm
Packaging Type	Bag
Pitch - Mating Interface (in)	0.100 In
Pitch - Mating Interface (mm)	2.54 mm
Plating min: Mating (µin)	120
Plating min: Mating (µm)	3
Plating min: Termination (µin)	120
Plating min: Termination (µm)	3
Polarized to Mating Part	No
Polarized to PCB	No
Shrouded	No
Stackable	No
Temperature Range - Operating	-55°C to +125°C
Termination Interface: Style	Through Hole
Electrical	
Current - Maximum per Contact	3A
Voltage - Maximum	350V

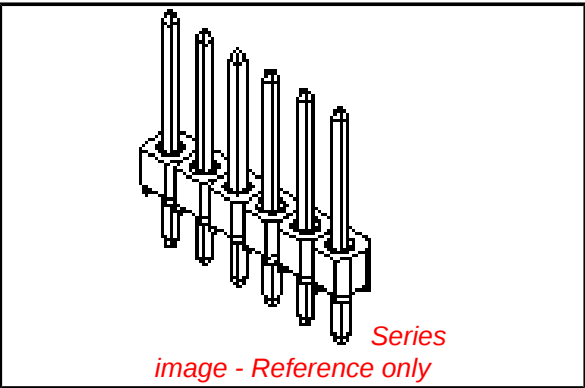

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

China RoHS

Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

90627Series

Material Info

Reference - Drawing Numbers


Sales Drawing

SDA-90627


This document was generated on 05/26/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION



SEE CHART
SDA-90627

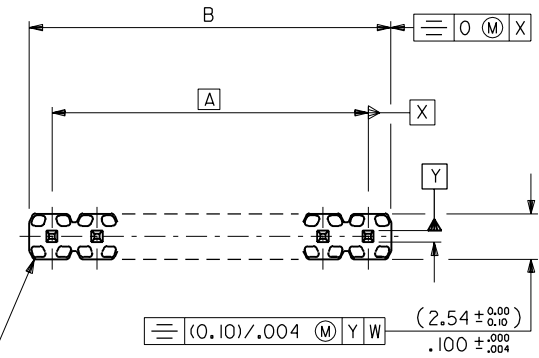

WAFER: 15% G.F. POLYESTER
TO UL 94V-0.
COLOUR : BLACK.

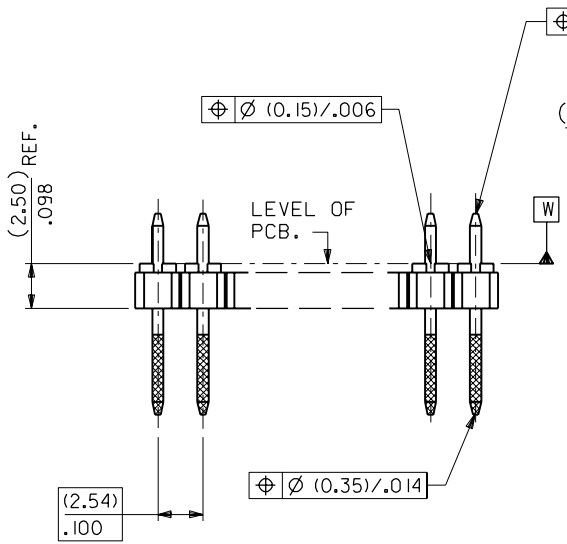

OPPOSING KINKS
VIEW SHOWS 1 X 2 CCT ONLY

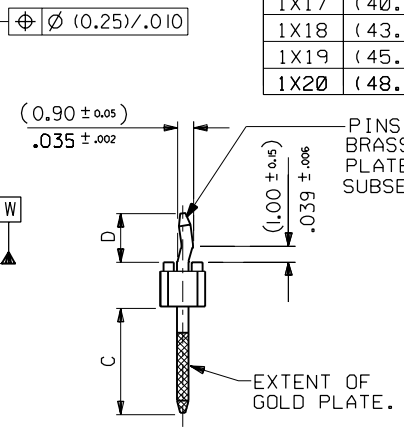


STRAIGHT PINS
OMITTED FROM VIEW

CKT SIZE	DIM. "A"		DIM. "B" ^(+0.20) ±.008		CKT SIZE	DIM. "A"		DIM. "B" ^(+0.20) ±.008	
1X 1			(2.54)		1X21	(50.80)	2.000	(53.34)	2.100
1X 2	(2.54)	.100	(5.08)	.200	1X22	(53.34)	2.100	(55.88)	2.200
1X 3	(5.08)	.200	(7.62)	.300	1X23	(55.88)	2.200	(58.42)	2.300
1X 4	(7.62)	.300	(10.16)	.400	1X24	(58.42)	2.300	(60.96)	2.400
1X 5	(10.16)	.400	(12.70)	.500	1X25	(60.96)	2.400	(63.50)	2.500
1X 6	(12.70)	.500	(15.24)	.600	1X26	(63.50)	2.500	(66.04)	2.600
1X 7	(15.24)	.600	(17.78)	.700	1X27	(66.04)	2.600	(68.58)	2.700
1X 8	(17.78)	.700	(20.32)	.800	1X28	(68.58)	2.700	(71.12)	2.800
1X 9	(20.32)	.800	(22.86)	.900	1X29	(71.12)	2.800	(73.66)	2.900
1X10	(22.86)	.900	(25.40)	1.000	1X30	(73.66)	2.900	(76.20)	3.000
1X11	(25.40)	1.000	(27.94)	1.100	1X31	(76.20)	3.000	(78.74)	3.100
1X12	(27.94)	1.100	(30.48)	1.200	1X32	(78.74)	3.100	(81.28)	3.200
1X13	(30.48)	1.200	(33.02)	1.300	1X33	(81.28)	3.200	(83.82)	3.300
1X14	(33.02)	1.300	(35.56)	1.400	1X34	(83.82)	3.300	(86.36)	3.400
1X15	(35.56)	1.400	(38.10)	1.500	1X35	(86.36)	3.400	(88.90)	3.500
1X16	(38.10)	1.500	(40.64)	1.600	1X36	(88.90)	3.500	(91.44)	3.600
1X17	(40.64)	1.600	(43.18)	1.700	1X37	(91.44)	3.600	(93.98)	3.700
1X18	(43.18)	1.700	(45.72)	1.800	1X38	(93.98)	3.700	(96.52)	3.800
1X19	(45.72)	1.800	(48.26)	1.900	1X39	(96.52)	3.800	(99.06)	3.900
1X20	(48.26)	1.900	(50.80)	2.000	1X40	(99.06)	3.900	(101.60)	4.000

PINS: (0.635)±.025 SQ.
BRASS WIRE.
PLATED AS PER
SUBSEQUENT SHEETS

NOTES
1. FOR ASSY NUMBERS WITH FINISH OPTIONS
AND DIM'S C & D SEE SUBSEQUENT SHEETS.
2. PCB THICKNESS: (1.37-1.80)±.054-.071.

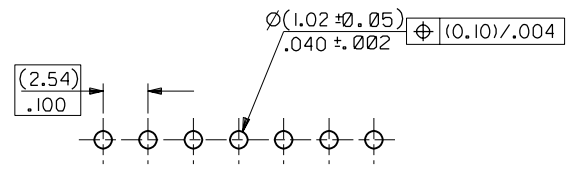

RECOMMENDED P.C. BOARD HOLE PATTERN

FOR PREVIOUS
DRAWING ISSUES
SEE MRI.

NEW RELEASE ECN E00166 10 SEPTEMBER 1990 RD		DIMENSIONS SHOWN (METRIC) INCH UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ± 1° INCH (METRIC) 3 PLACE ± .0004 ± .10 2 PLACE ± .004 ± .10 1 PLACE ± .25 DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRWG BY RD CHK'D BY APP'D BY SCALE 4:1		REVISE ONLY ON CAD SYSTEM CAD/CAM FILENAME SA90627X1 DCN		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. & SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		2 I SHL REV.	B B
TITLE C-GRID III SINGLE ROW KINKED PIN HEADER		DESIGN DIMENSION (PRIMARY) ☒ (MM) ☐ IN. EQUIVALENT DIMENSION (SECONDARY) ☐ (MM) ☒ IN.		SHEET NO. DATE 10F2 90/11/28		PART NO. SEE CHART		DWG NO. SDA-90627		SIZE B	

		10		9		8		7		6		5		4		3		2		1	
F		SEE CHART PART NO. DWG. NO.		SDA-90627		CIRCUIT SIZE		PLATING TYPE A PART NO.		PLATING TYPE E PART NO.		PLATING TYPE F PART NO.		KINKED PIN POSITION							
						1 X 1		90627-0121		90627-0761		90627-0921		嘴							
						1 X 2		90628-0121		90628-0761		90628-0921		SEE NOTE 1							
						1 X 3		90627-0123		90627-0763		90627-0923		嘴							
						1 X 4		-0124		-0764		-0924		嘴							
						1 X 5		-0125		-0765		-0925		嗽							
						1 X 6		-0126		-0766		-0926		嗽							
						1 X 7		-0127		-0767		-0927		嘴							
						1 X 8		-0128		-0768		-0928		嘴							
						1 X 9		-0129		-0769		-0929		嗽							
						1 X 10		-0130		-0770		-0930		嗽							
						1 X 11		-0131		-0771		-0931		1.6 & 11							
						1 X 12		-0132		-0772		-0932		1.6 & 12							
						1 X 13		-0133		-0773		-0933		1.7 & 13							
						1 X 14		-0134		-0774		-0934		1.7 & 14							
						1 X 15		-0135		-0775		-0935		1.8 & 15							
						1 X 16		-0136		-0776		-0936		1.8 & 16							
						1 X 17		-0137		-0777		-0937		1.9 & 17							
						1 X 18		-0138		-0778		-0938		1.9 & 18							
						1 X 19		-0139		-0779		-0939		1.10 & 19							
						1 X 20		-0140		-0780		-0940		1.10 & 20							
						1 X 21		-0141		-0781		-0941		1.11 & 21							
						1 X 22		-0142		-0782		-0942		1.11 & 22							
						1 X 23		-0143		-0783		-0943		1.12 & 23							
						1 X 24		-0144		-0784		-0944		1.12 & 24							
						1 X 25		-0145		-0785		-0945		1.13 & 25							
						1 X 26		-0146		-0786		-0946		1.13 & 26							
						1 X 27		-0147		-0787		-0947		1.14 & 27							
						1 X 28		-0148		-0788		-0948		1.14 & 28							
						1 X 29		-0149		-0789		-0949		1.15 & 29							
						1 X 30		-0150		-0790		-0950		1.15 & 30							
						1 X 31		-0151		-0791		-0951		1.16 & 31							
						1 X 32		-0152		-0792		-0952		1.16 & 32							
						1 X 33		-0153		-0793		-0953		1.17 & 33							
						1 X 34		-0154		-0794		-0954		1.17 & 34							
						1 X 35		-0155		-0795		-0955		1.18 & 35							
						1 X 36		-0156		-0796		-0956		1.18 & 36							
						1 X 37		-0157		-0797		-0957		1.19 & 37							
						1 X 38		-0158		-0798		-0958		1.19 & 38							
						1 X 39		-0159		-0799		-0959		1.20 & 39							
						1 X 40		90627-0160		90627-0800		90627-0960		1.20 & 40							
E		DIM C (±0.25) ±.00 (6.75) .266		DIM D (±0.30) ±.02 (2.90) .114																	
D																					
C																					
B																					
A																					