


Current Transducer LA 125-P

$$I_{PN} = 125 \text{ A}$$

For the electronic measurement of currents : DC, AC, pulsed..., with a galvanic isolation between the primary circuit (high power) and the secondary circuit (electronic circuit).



Electrical data

I_{PN}	Primary nominal r.m.s. current	125	A				
I_P	Primary current, measuring range	0 .. ± 200	A				
R_M	Measuring resistance @	$T_A = 70^\circ\text{C}$		$T_A = 85^\circ\text{C}$			
		R_{Mmin}	R_{Mmax}	R_{Mmin}	R_{Mmax}		
		with $\pm 12 \text{ V}$	@ $\pm 125 \text{ A}_{max}$	5	52	14	50 Ω
			@ $\pm 200 \text{ A}_{max}$	5	20	14	18 Ω
	with $\pm 15 \text{ V}$	@ $\pm 125 \text{ A}_{max}$	25	74	40	72 Ω	
		@ $\pm 200 \text{ A}_{max}$	25	34	40 ¹⁾	40 ¹⁾ Ω	
I_{SN}	Secondary nominal r.m.s. current	125	mA				
K_N	Conversion ratio	1 : 1000					
V_C	Supply voltage ($\pm 5 \%$)	$\pm 12 \dots 15$	V				
I_C	Current consumption	16 (@ $\pm 15 \text{ V}$) + I_S	mA				
V_d	R.m.s. voltage for AC isolation test, 50 Hz, 1 mn	3	kV				

Accuracy - Dynamic performance data

X	Accuracy @ $I_{PN}, T_A = 25^\circ\text{C}$	@ $\pm 15 \text{ V} (\pm 5 \%)$	± 0.60	%
		@ $\pm 12 \dots 15 \text{ V} (\pm 5 \%)$	± 0.80	%
e_L	Linearity		< 0.15	%
I_O	Offset current @ $I_P = 0, T_A = 25^\circ\text{C}$	Typ	Max	
I_{OM}	Residual current ²⁾ @ $I_P = 0$, after an overload of $3 \times I_{PN}$		± 0.40	mA
I_{OT}	Thermal drift of I_O	0°C .. + 70°C	± 0.15	± 0.50 mA
		- 25°C .. + 85°C	± 0.15	± 0.60 mA
t_{ra}	Reaction time @ 10 % of I_{Pmax}		< 500	ns
t_r	Response time ^{3) 4)} @ 90 % of I_{Pmax}		< 1	μs
di/dt	di/dt accurately followed ⁴⁾		> 200	A/ μs
f	Frequency bandwidth ⁴⁾ (- 1 dB)		DC .. 100	kHz

General data

T_A	Ambient operating temperature	- 25 .. + 85	$^\circ\text{C}$
T_S	Ambient storage temperature	- 40 .. + 90	$^\circ\text{C}$
R_S	Secondary coil resistance @	$T_A = 70^\circ\text{C}$	32 Ω
		$T_A = 85^\circ\text{C}$	33.5 Ω
m	Mass	40	g
	Standards ⁵⁾	EN 50178	

- Notes :**
- Measuring range limited to $\pm 180 \text{ A}_{max}$
 - The result of the coercive field of the magnetic circuit
 - With a di/dt of 100 A/ μs
 - The primary conductor is best filling the through-hole and/or the return of the primary conductor is above the top of the transducer
 - A list of corresponding tests is available

Features

- Closed loop (compensated) current transducer using the Hall effect
- Printed circuit board mounting
- Insulated plastic case recognized according to UL 94-V0.


Advantages

- Excellent accuracy
- Very good linearity
- Low temperature drift
- Optimized response time
- Wide frequency bandwidth
- No insertion losses
- High immunity to external interference
- Current overload capability.

Applications

- AC variable speed drives and servo motor drives
- Static converters for DC motor drives
- Battery supplied applications
- Uninterruptible Power Supplies (UPS)
- Switched Mode Power Supplies (SMPS)
- Power supplies for welding applications.

Dimensions LA 125-P (in mm. 1 mm = 0.0394 inch)

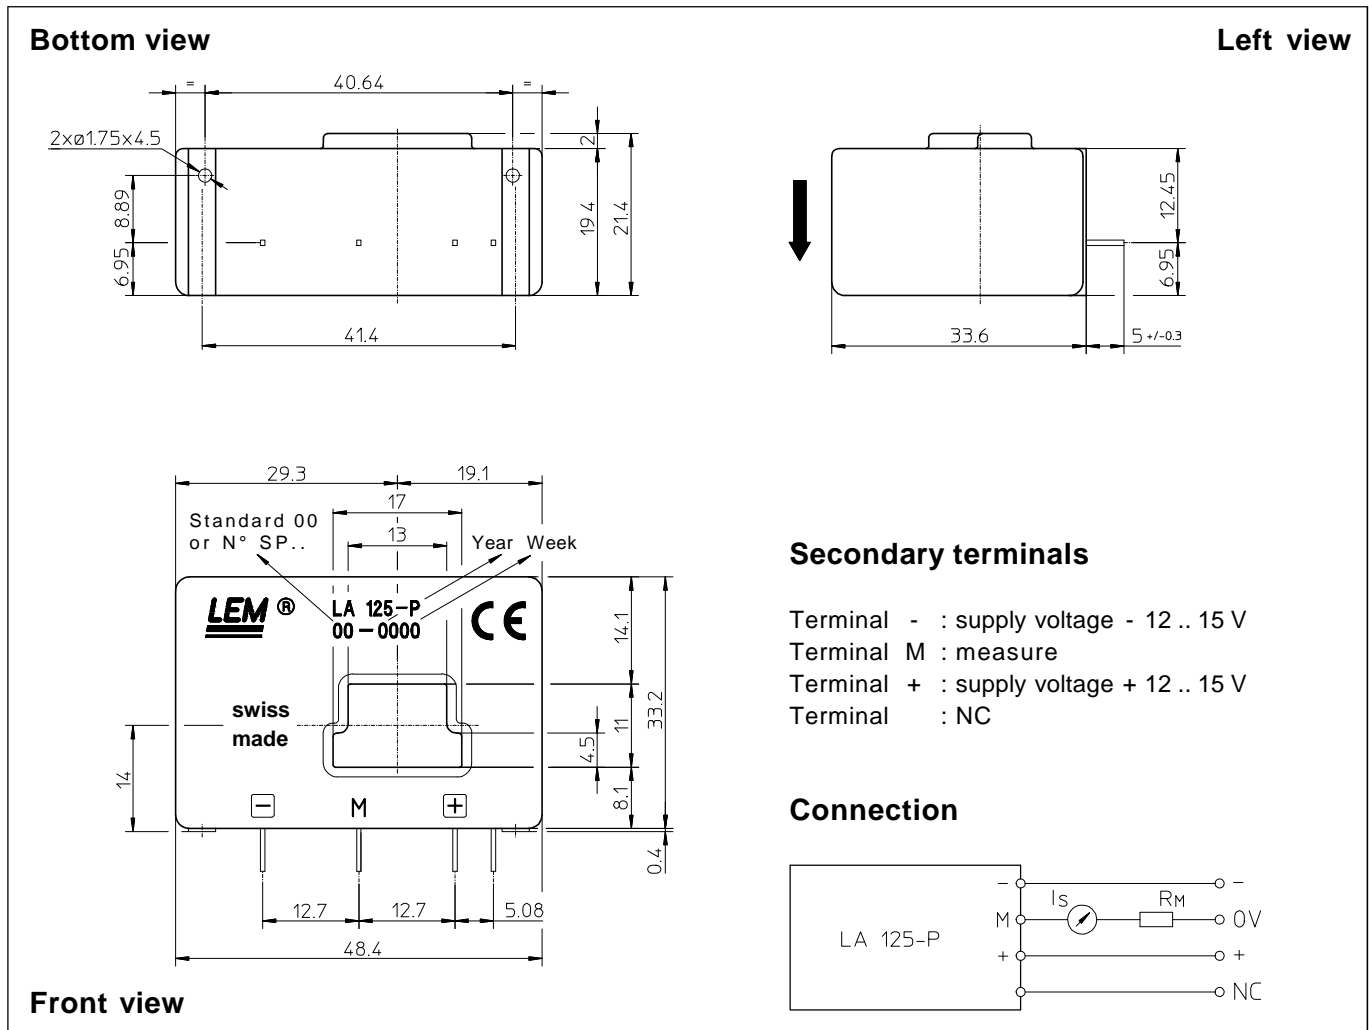

Mechanical characteristics

• General tolerance	± 0.2 mm
• Primary through-hole	17 x 11 mm
• Fastening & connection of secondary	4 pins 0.63 x 0.56 mm
Recommended PCB hole	0.9 mm
• Supplementary fastening	2 holes $\varnothing 1.75$ mm
Recommended PCB hole	2.4 mm
Recommended screws	KA 22 x 6
LEM code	47.30.60.006.0

Remarks

- I_s is positive when I_p flows in the direction of the arrow.
- Temperature of the primary conductor should not exceed 90°C.
- Dynamic performances (di/dt and response time) are best with a primary bar in low position in the through-hole.
- In order to achieve the best magnetic coupling, the primary windings have to be wound over the top edge of the device.
- This is a standard model. For different versions (supply voltages, turns ratios, unidirectional measurements...), please contact us.