HT16512
1/4 to 1/11 Duty VFD Controller

Features

- Logic voltage: 5V
- High-voltage output: V_{DD}–35V max.
- Multiple display (11-segment & 11-digit to 16-segment & 6-digit)
- 6×4 matrix key scanning
- 8 steps dimmer circuit
- 4 LED output ports
- 4-bit general purpose input port
- No external resistors necessary for driver output (provides PMOS open-drain and pull-low resistor output)
- Serial interface with MCU (CLK, $\overline{CS}$, DI, DO)
- 44-pin QFP/LQFP package

Applications


- Consumer products panel function control
- Industrial measuring instrument panel function control
- Other similar application panel function control

General Description


HT16512 is a VFD (Vacuum Fluorescent Display) controller/driver that is driven on a 1/4 to 1/11 duty factor. It consists of 11 segment output lines, 6 grid output lines, 5 segment/grid output drive lines, 4 LED output ports, a control circuit, a display memory, and a key scan circuit.

Serial data inputs to the HT16512 through a three-line serial interface. This VFD controller/driver is ideal as a peripheral device for an MCU.

Block Diagram

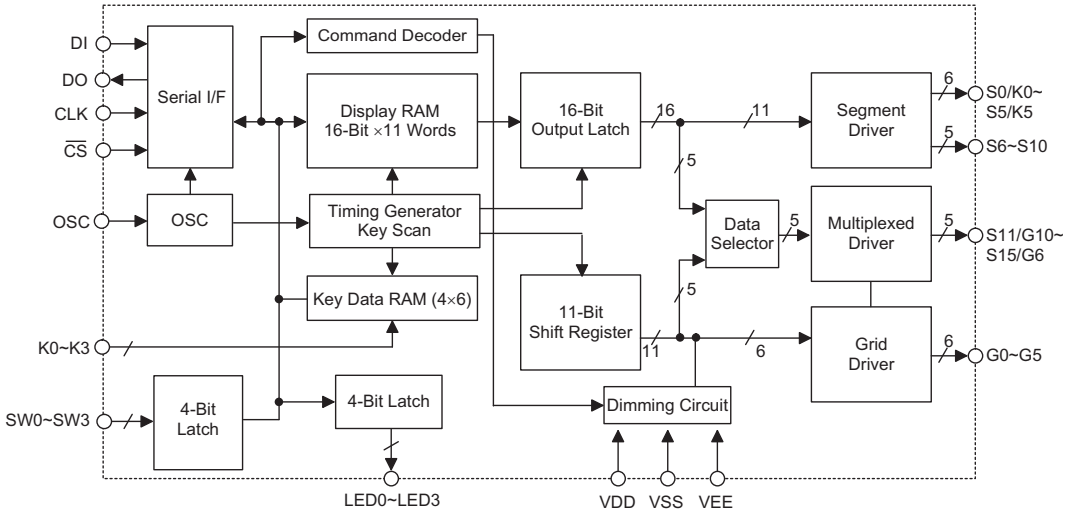


Pin Assignment

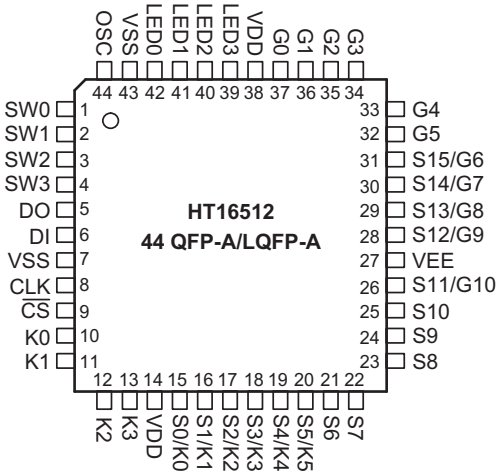

Pin Description

Pin No.	Pin Name	I/O	Description
1~4	SW0~SW3	I	4-bit general purpose input port Whether these pins are used or not, they should be connected to VDD or VSS.
5	DO	O	Output serial data at the falling edge of the shift clock, starting from low order bit. This is an NMOS open-drain output pin.
6	DI	I	Input serial data at the rising edge of the shift clock, starting from the low order bit.
7, 43	VSS	—	Negative power supply, ground Both of the VSS (pin 7 and pin 43) should be connected to ground.
8	CLK	I	Reads serial data at the rising edge, and outputs data at the falling edge.
9	$\overline{CS}$	I	Initializes serial interface at the rising or falling edge of the HT16512. Then it waits to receive a command. Data input after $\overline{CS}$ has fallen is processed as a command. While command data is processed, current processing is stopped, and the serial interface is initialized. While $\overline{CS}$ is high, CLK is ignored.
10~13	K0~K3	I	Keying data input to these pins is latched at the end of the display cycle.
14, 38	VDD	—	Posistive power supply
15~20	S0/K0~S5/K5	O	Segment or key source output pins (dual function). This is PMOS open-drain and pull-low resistor output.
21~25	S6~S10	O	Segment driver output pins (segment only). This is PMOS open-drain and pull-low resistor output.
26, 28~31	S11/G10~S15/G6	O	Segment or Grid driver output pins. These pins are selectable for segment or grid driving. This is PMOS open-drain and pull-low resistor output.
27	VEE	—	VFD power supply
37~32	G0~G5	O	Grid driver output pins (Grid only). This is PMOS open-drain and pull-low resistor output.
42~39	LED0~LED3	O	LED driver output ports. This is a CMOS output pin.
44	OSC	I	Connected to an external resistor or an RC oscillator circuit.

Approximate Internal Connections

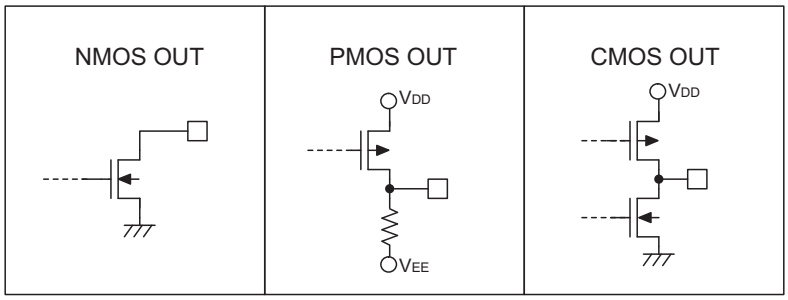

Absolute Maximum Ratings

Supply Voltage ..... V_{SS}–0.3V to V_{SS}+5.5V

Input Voltage ..... V_{SS}–0.3V to V_{DD}+0.3V

Operating Temperature ..... –25°C to 75°C

Storage Temperature ..... –50°C to 125°C

Note: These are stress ratings only. Stresses exceeding the range specified under ″Absolute Maximum Ratings″ may cause substantial damage to the device. Functional operation of this device at other conditions beyond those listed in the specification is not implied and prolonged exposure to extreme conditions may affect device reliability.

D.C. Characteristics

Ta=25°C

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
		V_{DD}	Conditions				
V_{DD}	Logic Supply Voltage	—	—	4.5	5	5.5	V
V_{EE}	VFD Supply Voltage	—	—	0	—	V_{DD}–35	V
f_{OSC}	Oscillation Frequency	5V	R_{OSC}=51kΩ	350	500	650	kHz
R_{PL}	Output Pull-low Resistor	5V	Driver output	50	100	150	kΩ
I_{DD}	Operating Current	5V	No load, VFD display off	—	—	5	mA
I_{OL}	Driver Leakage Current	5V	V_O=V_{DD}–35V, VFD driver off	—	—	–10	μA
I_{OL1}	LED Sink Current	5V	V_{OL}=1V, LED0~LED3	20	—	—	mA
I_{OH1}	LED Source Current	5V	V_{OH}=0.9V_{DD} LED0~LED3	–1	—	—	mA
I_{OH21}	Segment/Key Source Current	5V	V_{OH}=V_{DD}–2V S0/K0~S5/K5, S6~S10	–3	—	—	mA
I_{OH22}	Segment/Grid Source Current	5V	V_{OH}=V_{DD}–2V G0~G5, S11/G10~S15/G6	–15	—	—	mA
I_{OL3}	DO Sink Current	5V	V_{OL}=0.4V	4	—	—	mA
V_{IH}	″H″ Input Voltage	—	—	0.7V_{DD}	—	V_{DD}	V
V_{IL}	″L″ Input Voltage	—	—	0	—	0.3V_{DD}	V
V_{OH1}	High-level Output Voltage	5V	LED0~LED3, I_{OH1}=–1mA	0.9V_{DD}	—	V_{DD}	V
V_{OL1}	Low-level Output Voltage	5V	LED0~LED3, I_{OL1}=20mA	0	—	1	V
V_{OL2}	Low-level Output Voltage	5V	DO, I_{OL2}=4mA	0	—	0.4	V

A.C. Characteristics

Ta=25°C

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
		V_{DD}	Conditions				
t_{PHL}	Propagation Delay Time	5V	CLK→DO	—	—	100	ns
t_{PLH}		5V	C_L=15pF, R_L=10kΩ	—	—	300	ns
t_{r1}	Rise Time	5V	C_L=300pF, S0~S10	—	—	2	μs
t_{r2}		5V	C_L=300pF, G0~G5, S11/G10~S15/G6	—	—	0.5	μs
t_f	Fall Time	5V	C_L=300pF, Sn, Gn	—	—	120	μs
t_{max}	Maximum Clock Frequency	5V	Duty=50%	1	—	—	MHz
C_i	Input Capacitance	5V	—	—	—	15	pF
t_{CW}	Clock Pulse Width	5V	—	400	—	—	ns
t_{SW}	Strobe Pulse Width	5V	—	1	—	—	us
t_{SU}	Data Setup Time	5V	—	100	—	—	ns
t_h	Data Hold Time	5V	—	100	—	—	ns
t_{CS}	Clock-Strobe Time	5V	CLK rising edge to CS rising edge	1	—	—	μs
t_W	Wait Time	5V	CLK rising edge to CLK falling edge	1	—	—	μs

Functional Description

Display RAM and Display Mode

The static display RAM is organized into 22×8 bits and stores the data transmitted from an external device to the HT16512 through a serial interface. The contents of the RAM are directly mapped to the contents of the VFD driver. Data in the RAM can be accessed through the data setting, address setting and display control commands. It is assigned addresses in 8-bit unit as follows:

S0 ~ S3	S4 ~ S7	S8 ~ S11	S12 ~ S15	
Address: 00H		01H		Digit0
02H		03H		Digit1
04H		05H		Digit2
06H		07H		Digit3
08H		09H		Digit4
0AH		0BH		Digit5
0CH		0DH		Digit6
0EH		0FH		Digit7
10H		11H		Digit8
12H		13H		Digit9
14H		15H		Digit10

b0 b1 b2 b3 b4 b5 b6 b7 b0 b1 b2 b3 b4 b5 b6 b7

Dimming Control


HT16512 provides 8-step dimmer function on display by controlling the 3-bit binary command code. The full pulse width of grid signal is divides into 16 uniform sections by PWM (pulse width modulation) technology.

The 16 uniform sections available form 8 steps dimmer via 3-bit binary code. The 8-step dimmer includes 1/16, 2/16, 4/16, 10/16, 11/16, 12/16, 13/16 and 14/16. The 1/16 pulse width indicates minimum lightness. The 14/16 pulse width represents maximum lightness. (Refer to the display control command).


Key Matrix and Key-Input Data Storage RAM

The key matrix scans the series key states at each level of the key strobe signal (S0/K0~S5/K5) output of the HT16512. The key strobe signal outputs are time-multiplexed signals from S0/K0~S5/K5. The states of inputs K0~K3 are sampled by strobe signal S0/K0~S5/K5 and latched into the register.

The key matrix is made up of a 6×4 matrix, as shown below.

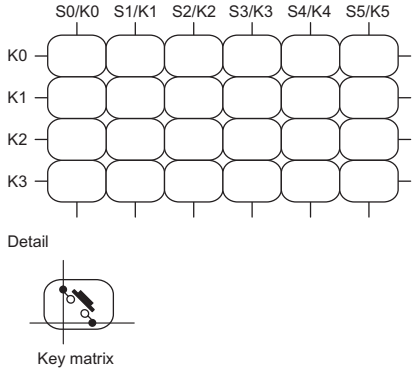


The data of each key is stored as illustrated below, and is read with the read command, starting from the least significant bit.

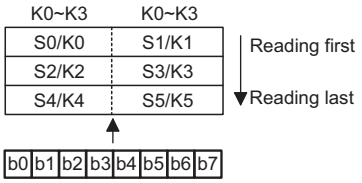

LED Port


The LED port belongs to the CMOS output configuration.

Data is written to the LED port with the write command, starting from the least port's least significant bit. In our application (see application circuits), the user adopts an internal NMOS device to a driver LED component by connecting VDD. When a bit of this port is 0, the corresponding LED lights; when the bit is 1, the LED turns off. The data of bits 5 through 8 are ignored.

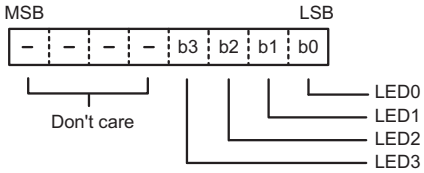

SW Data

HT16512 provides an extra 4-bit general input port. The SW data is provided with available binary code. The SW data is read with the read command, starting from the least significant bit. Bits 5 through 8 of the SW data are 0.

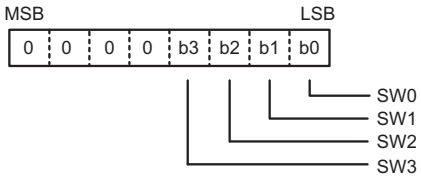

Commands

Commands set the display mode and status of the VFD driver.


The first 1 byte input to the HT16512 through the DI pin after the $\overline{CS}$ pin has fallen, is regarded as a command. If $\overline{CS}$ is set high while commands/data are transmitted, serial communication is initialized, and the commands/data being transmitted are not valid (however, the commands/data previously transmitted remains valid).

- Display mode setting commands

  These commands initialize the HT16512 and select the number of segments and the number of grids (1/4~1/11 duty, 11 segments to 16 segments).


  When these commands are executed, the display is forcibly turned off, and key scanning is also stopped.

  To resume display, the display command "ON" must be executed. If the same mode is selected, nothing happens.

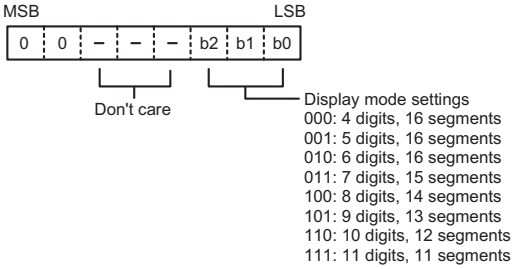


- Data setting commands

  These commands set the data write and data read modes.

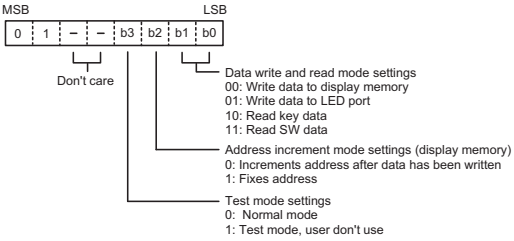


- Address setting commands

  These commands set the address of the display memory.

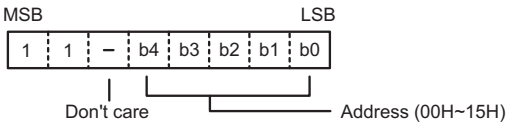


  If address 16H or higher is set, data is ignored until a valid address is set.


- Display control commands

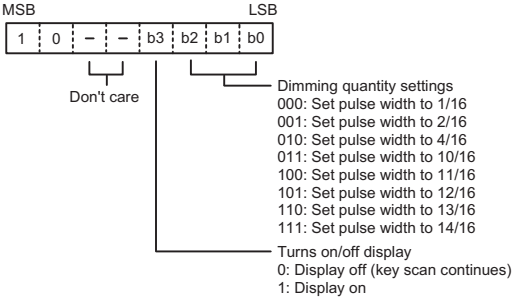

Timing Diagrams

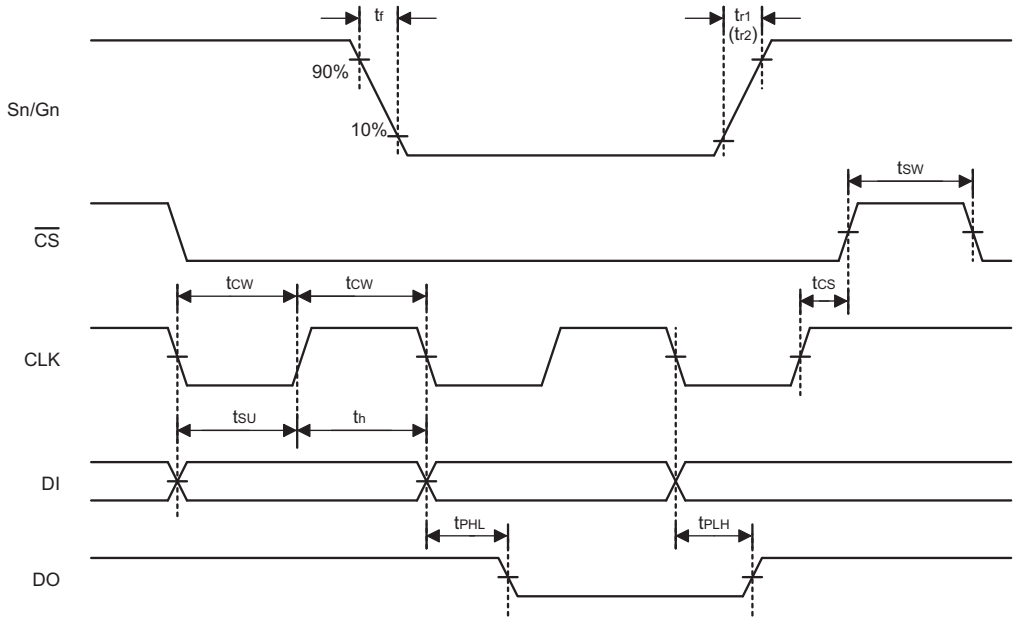


Key Scanning and Display Timing

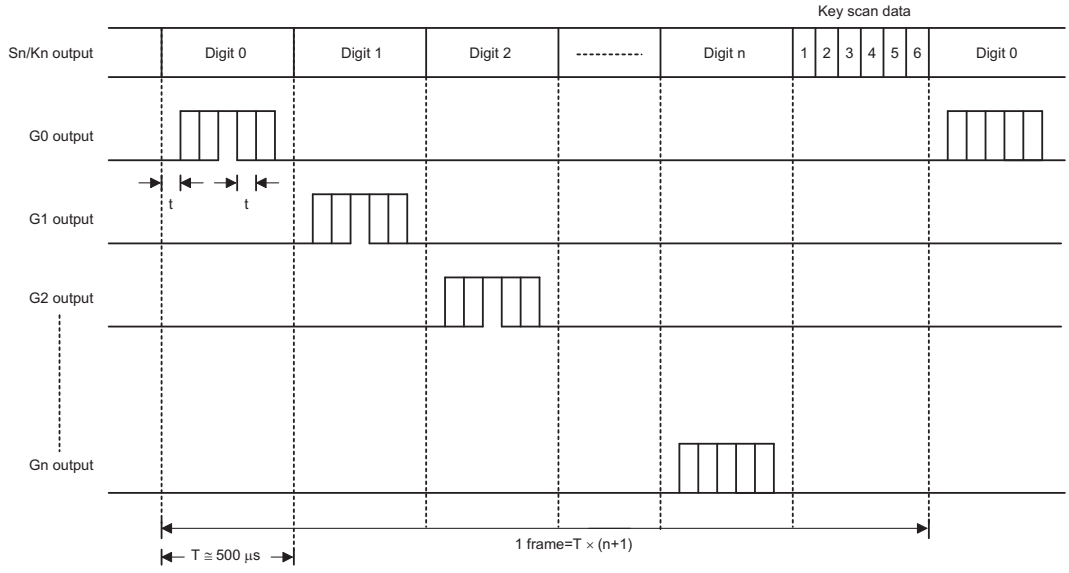


Note: n=0~5
t=1/16T
T: pulse width of segment signal is decided by oscillator frequency
One cycle of key scanning consists of one frame.

Serial Communication Format

- Reception (command/data write)

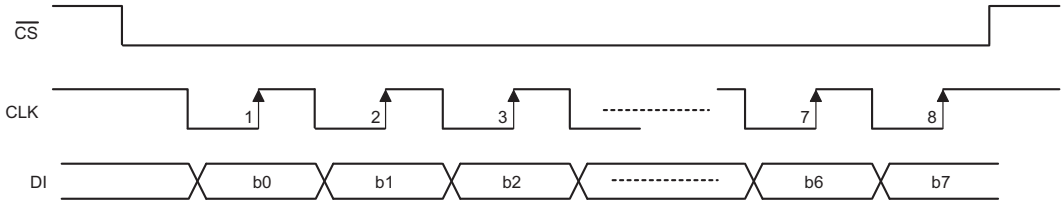


- Transmission (data read)

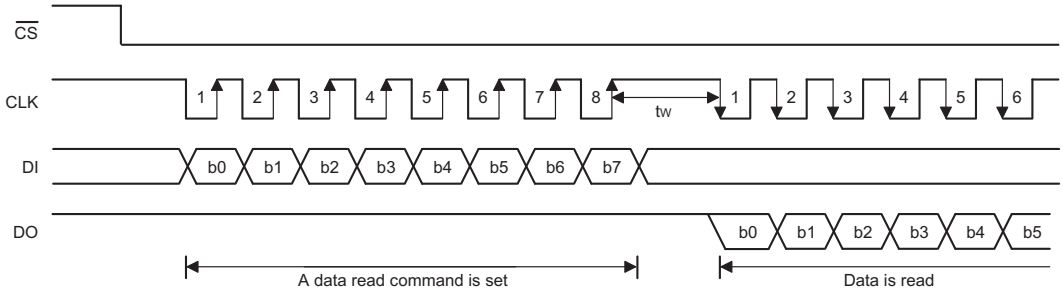


DO must be sure to connect an external pull-high resistor to this pin (1kΩ to 10kΩ).
Note: When data is read, a wait time "t_W" of 1μs is necessary.

- Updating display memory by incrementing address

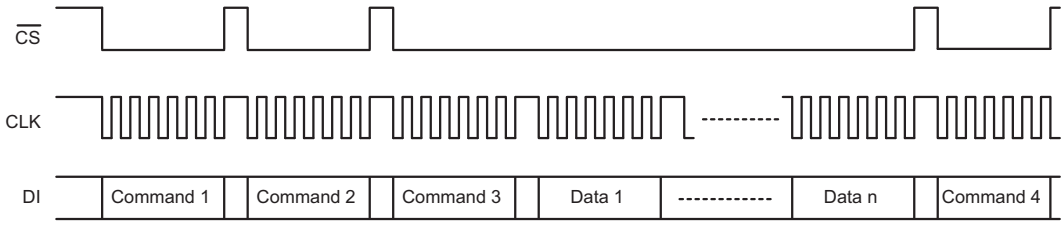


Command 1: sets display mode
Command 2: sets data
Command 3: sets address
Data 1 to n: transfers display data (22 bytes max.)
Command 4: controls diplay

- Updating specific addresses

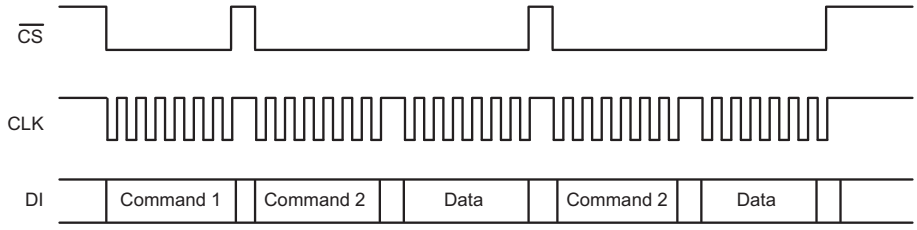

Command 1: sets data
Command 2: sets address
Data: display data


Application Circuits

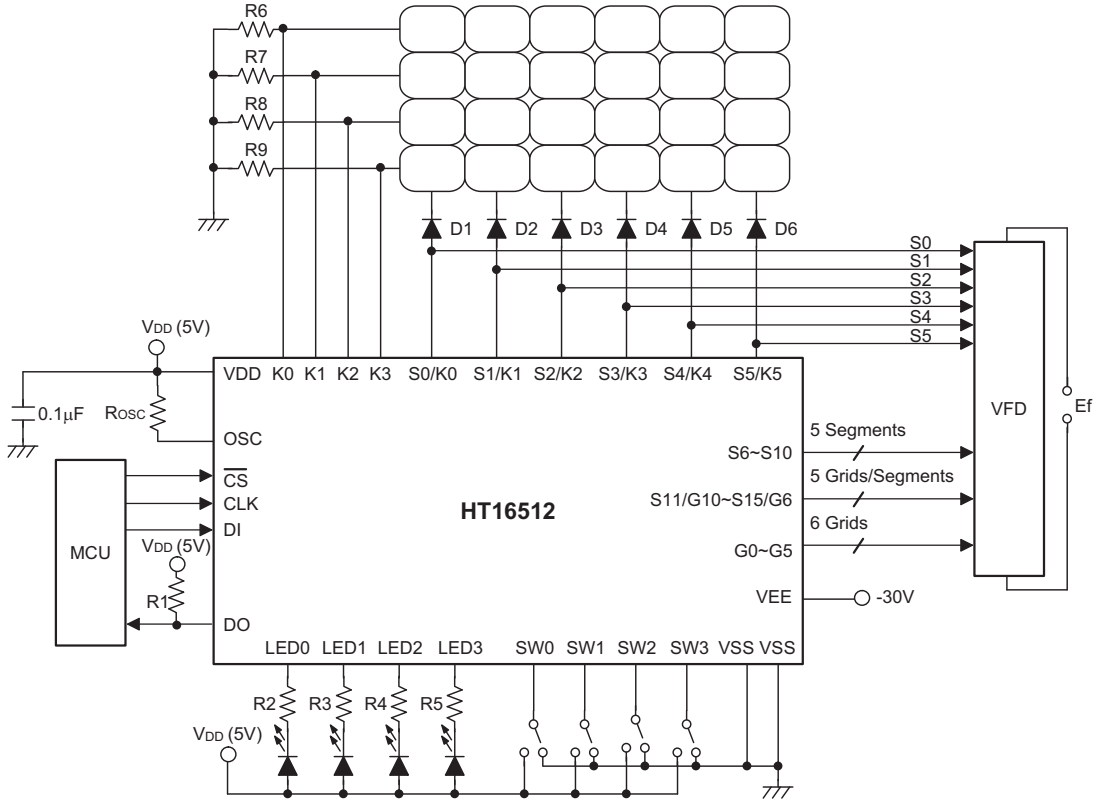

Note: R_{OSC}=51kΩ for oscillator resistor
R1=1~10kΩ for external pull-high resistor
R2~R5=750Ω~1.2kΩ
R6~R9=10kΩ for external pull-low resistor
D1~D6=1N4001
Ef=Filament voltage for VFD
Both of the VSS (pin 7 and pin 43) should be connected to ground.

Package Information


44-pin QFP (10mm×10mm) Outline Dimensions

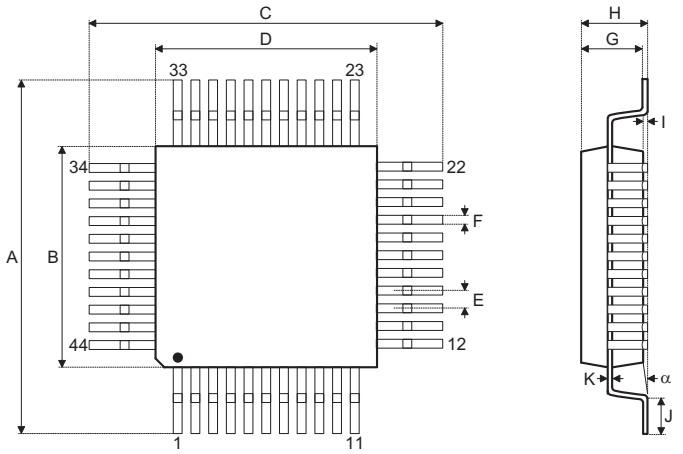

Symbol	Dimensions in inch		
	Min.	Nom.	Max.
A	0.512	—	0.528
B	0.390	—	0.398
C	0.512	—	0.528
D	0.390	—	0.398
E	—	0.031	—
F	—	0.012	—
G	0.075	—	0.087
H	—	—	0.106
I	0.010	—	0.020
J	0.029	—	0.037
K	0.004	—	0.008
L	—	0.004	—
α	0°	—	7°

Symbol	Dimensions in mm		
	Min.	Nom.	Max.
A	13.00	—	13.40
B	9.90	—	10.10
C	13.00	—	13.40
D	9.90	—	10.10
E	—	0.80	—
F	—	0.30	—
G	1.90	—	2.20
H	—	—	2.70
I	0.25	—	0.50
J	0.73	—	0.93
K	0.10	—	0.20
L	—	0.10	—
α	0°	—	7°

44-pin LQFP (10mm×10mm) (FP3.2mm) Outline Dimensions

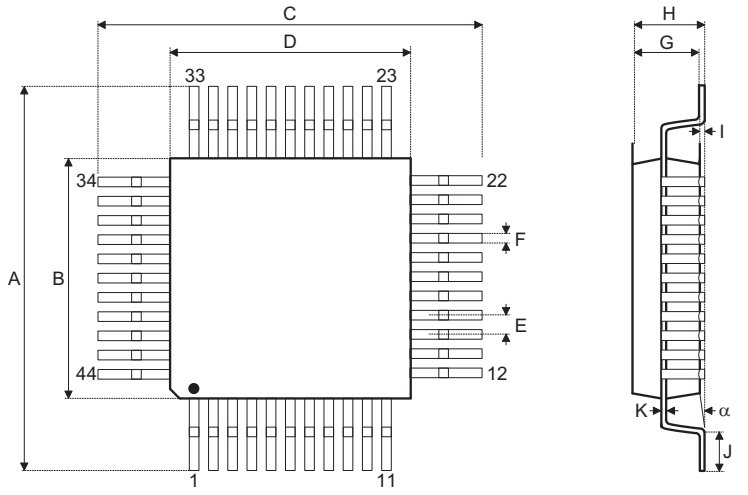

Symbol	Dimensions in inch		
	Min.	Nom.	Max.
A	0.512	0.520	0.528
B	0.390	0.394	0.398
C	0.512	0.520	0.528
D	0.390	0.394	0.398
E	—	0.031	—
F	—	0.012	—
G	0.053	0.055	0.057
H	—	—	0.063
I	0.004	—	0.010
J	0.041	0.047	0.053
K	0.004	—	0.008
α	0°	—	7°

Symbol	Dimensions in mm		
	Min.	Nom.	Max.
A	13.00	13.20	13.40
B	9.90	10.00	10.10
C	13.00	13.20	13.40
D	9.90	10.00	10.10
E	—	0.80	—
F	—	0.30	—
G	1.35	1.40	1.45
H	—	—	1.60
I	0.10	—	0.25
J	1.05	1.20	1.35
K	0.10	—	0.25
α	0°	—	7°

Holtek Semiconductor Inc. (Headquarters)
No.3, Creation Rd. II, Science Park, Hsinchu, Taiwan
Tel: 886-3-563-1999
Fax: 886-3-563-1189
http://www.holtek.com.tw

Holtek Semiconductor Inc. (Taipei Sales Office)
4F-2, No. 3-2, YuanQu St., Nankang Software Park, Taipei 115, Taiwan
Tel: 886-2-2655-7070
Fax: 886-2-2655-7373
Fax: 886-2-2655-7383 (International sales hotline)

Holtek Semiconductor Inc. (Shenzhen Sales Office)
5F, Unit A, Productivity Building, No.5 Gaoxin M 2nd Road, Nanshan District, Shenzhen, China 518057
Tel: 86-755-8616-9908, 86-755-8616-9308
Fax: 86-755-8616-9722

Holtek Semiconductor (USA), Inc. (North America Sales Office)
46729 Fremont Blvd., Fremont, CA 94538
Tel: 1-510-252-9880
Fax: 1-510-252-9885
http://www.holtek.com

Copyright © 2010 by HOLTEK SEMICONDUCTOR INC.

The information appearing in this Data Sheet is believed to be accurate at the time of publication. However, Holtek assumes no responsibility arising from the use of the specifications described. The applications mentioned herein are used solely for the purpose of illustration and Holtek makes no warranty or representation that such applications will be suitable without further modification, nor recommends the use of its products for application that may present a risk to human life due to malfunction or otherwise. Holtek's products are not authorized for use as critical components in life support devices or systems. Holtek reserves the right to alter its products without prior notification. For the most up-to-date information, please visit our web site at http://www.holtek.com.tw.