2.9 nV/sqrt(Hz) Low Noise, Precision, RRIO Amplifier

Check for Samples: LMP7731

FEATURES

(Typical Values, T_A = 25°C, V_S = 5V)

- **Input Voltage Noise**
  - **f = 3 Hz 3.3 nV/√Hz**
  - **f = 1 kHz 2.9 nV/√Hz**
- **CMRR 130 dB**
- **Open Loop Gain 130 dB**
- **GBW 22 MHz**
- **Slew Rate 2.4 V/µs**
- **THD @ f = 10 kHz, A_V = +1, R_L = 2 kΩ 0.001%**
- **Supply Current per Channel 2.2 mA**
- **Supply Voltage Range 1.8V to 5.5V**
- **Operating Temperature Range −40°C to 125°C**
- **Input Bias Current ±1.5 nA**
- **RRIO**

APPLICATIONS

- **Gas Analysis Instruments**
- **Photometric Instrumentation**
- **Medical Instrumentation**

DESCRIPTION

The LMP7731 is a single, low noise, rail-to-rail input and output, low voltage amplifier. The LMP7731 is part of the LMP™ precision amplifier family and is ideal for precision and low noise applications with low voltage requirements.

This operational amplifier offers low voltage noise of 2.9 nV/√Hz with a 1/f corner of only 3 Hz. The LMP7731 has bipolar input stages with a bias current of only 1.5 nA. This low input bias current, complemented by the very low level of voltage noise, makes the LMP7731 an excellent choice for photometry applications.

The LMP7731 provides a wide GBW of 22 MHz while consuming only 2 mA of current. This high gain bandwidth along with the high open loop gain of 130 dB enables accurate signal conditioning in applications with high closed loop gain requirements.

The LMP7731 has a supply voltage range of 1.8V to 5.5V, making it an ideal choice for battery operated portable applications.

The LMP7731 is offered in the space saving 5-Pin SOT-23 and 8-Pin SOIC packages.

Typical Performance Characteristics

Input Voltage Noise vs. Frequency

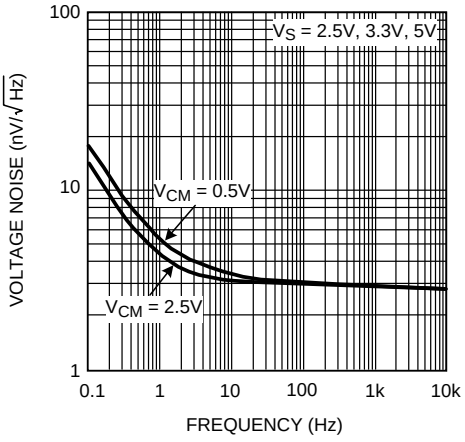

Figure 1.

Input Current Noise vs. Frequency

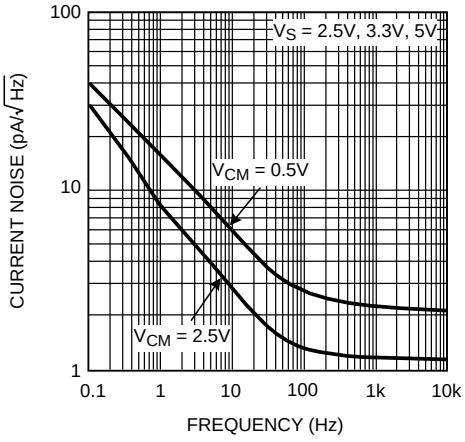

Figure 2.

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

LMP is a trademark of Texas Instruments.
All other trademarks are the property of their respective owners.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of the Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 2007–2013, Texas Instruments Incorporated

These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

Absolute Maximum Ratings (1)(2)

ESD Tolerance (3)	Human Body Model	Inputs pins only	2000V
		All other pins	2000V
	Machine Model		200V
	Charge Device Model		1000V
V_{IN} Differential			±2V
Supply Voltage ($V_S = V^+ – V^–$)			6.0V
Storage Temperature Range			−65°C to 150°C
Junction Temperature (4)			+150°C max
Soldering Information	Infrared or Convection (20 sec)		235°C
	Wave Soldering Lead Temp. (10 sec)		260°C

(1) Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but specific performance is not ensured. For ensured specifications and the test conditions, see the Electrical Characteristics Tables.
(2) If Military/Aerospace specified devices are required, please contact the TI Sales Office/ Distributors for availability and specifications.
(3) Human Body Model, applicable std. MIL-STD-883, Method 3015.7. Machine Model, applicable std. JESD22-A115-A (ESD MM std. of JEDEC)Field-Induced Charge-Device Model, applicable std. JESD22-C101-C (ESD FICDM std. of JEDEC).
(4) The maximum power dissipation is a function of $T_{J(MAX)}$, θ_{JA}. The maximum allowable power dissipation at any ambient temperature is $P_D = (T_{J(MAX)} – T_A)/ \theta_{JA}$. All numbers apply for packages soldered directly onto a PC Board.

Operating Ratings (1)

Temperature Range		−40°C to 125°C
Supply Voltage ($V_S = V^+ – V^–$)		1.8V to 5.5V
Package Thermal Resistance (θ_{JA})	5-Pin SOT-23	265°C/W
	8-Pin SOIC	190°C/W

(1) Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but specific performance is not ensured. For ensured specifications and the test conditions, see the Electrical Characteristics Tables.

2.5V Electrical Characteristics (1)

Unless otherwise specified, all limits are ensured for T_A = 25°C, V^+ = 2.5V, $V^–$ = 0V, $V_{CM} = V^+/2$, R_L >10 kΩ to $V^+/2$. **Boldface** limits apply at the temperature extremes.

Parameter		Test Conditions	Min (2)	Typ (3)	Max (2)	Units
V_{OS}	Input Offset Voltage (4)	V_{CM} = 2.0V		±9	±500 **±600**	µV
		V_{CM} = 0.5V		±9	±500 **±600**	
TCV_{OS}	Input Offset Voltage Temperature Drift	V_{CM} = 2.0V		±0.5	±5.5	µV/°C
		V_{CM} = 0.5V		±0.2	±5.5	
I_B	Input Bias Current	V_{CM} = 2.0V		±1	±30 **±45**	nA
		V_{CM} = 0.5V		±12	±50 **±75**	

(1) Electrical Table values apply only for factory testing conditions at the temperature indicated. Factory testing conditions result in very limited self-heating of the device such that $T_J = T_A$. No specification of parametric performance is indicated in the electrical tables under conditions of internal self-heating where $T_J > T_A$. Absolute maximum Ratings indicate junction temperature limits beyond which the device maybe permanently degraded, either mechanically or electrically.
(2) All limits are specified by testing, statistical analysis or design.
(3) Typical values represent the most likely parametric norm as determined at the time of characterization. Actual typical values may vary over time and will also depend on the application and configuration. The typical values are not tested and are not ensured on shipped production material.
(4) Ambient production test is performed at 25°C with a variance of ±3°C.

Copyright © 2007–2013, Texas Instruments Incorporated

2.5V Electrical Characteristics [1] (continued)

Unless otherwise specified, all limits are ensured for T_A = 25°C, V^+ = 2.5V, V^- = 0V, V_{CM} = V^+/2, R_L >10 kΩ to V^+/2. **Boldface** limits apply at the temperature extremes.

Parameter		Test Conditions	Min [2]	Typ [3]	Max [2]	Units
I_{OS}	Input Offset Current	V_{CM} = 2.0V		±1	±50 **±75**	nA
		V_{CM} = 0.5V		±11	±60 **±80**	
TCI_{OS}	Input Offset Current Drift	V_{CM} = 0.5V and V_{CM} = 2.0V		0.0474		nA/°C
CMRR	Common Mode Rejection Ratio	0.15V ≤ V_{CM} ≤ 0.7V 0.23V ≤ V_{CM} ≤ 0.7V	101 **89**	120		dB
		1.5V ≤ V_{CM} ≤ 2.35V 1.5V ≤ V_{CM} ≤ 2.27V	105 **99**	129		
PSRR	Power Supply Rejection Ratio	2.5V ≤ V^+ ≤ 5V	111 **105**	129		dB
		1.8V ≤ V^+ ≤ 5.5V		117		
CMVR	Common Mode Voltage Range	Large Signal CMRR ≥ 80 dB	0		2.5	V
A_{VOL}	Open Loop Voltage Gain	R_L = 10 kΩ to V^+/2 V_{OUT} = 0.5V to 2.0V	112 **104**	130		dB
		R_L = 2 kΩ to V^+/2 V_{OUT} = 0.5V to 2.0V	109 **90**	119		
V_{OUT}	Output Voltage Swing High	R_L = 10 kΩ to V^+/2		4	50 **75**	mV from either rail
		R_L = 2 kΩ to V^+/2		13	50 **75**	
	Output Voltage Swing Low	R_L = 10 kΩ to V^+/2		6	50 **75**	
		R_L = 2 kΩ to V^+/2		9	50 **75**	
I_{OUT}	Output Current	Sourcing, V_{OUT} = V^+/2 V_{IN} (diff) = 100 mV	22 **12**	31		mA
		Sinking, V_{OUT} = V^+/2 V_{IN} (diff) = −100 mV	15 **10**	44		
I_S	Supply Current (Per Channel)	V_{CM} = 2.0V		2.0	2.7 **3.4**	mA
		V_{CM} = 0.5V		2.3	3.1 **3.9**	
SR	Slew Rate	A_V = +1, C_L = 10 pF, R_L = 10 kΩ to V^+/2, V_O = 2 V_{PP}		2.4		V/µs
GBW	Gain Bandwidth	C_L = 20 pF, R_L = 10 kΩ to V^+/2		21		MHz
G_M	Gain Margin	C_L = 20 pF, R_L = 10 kΩ to V^+/2		14		dB
Φ_M	Phase Margin	C_L = 20 pF, R_L = 10 kΩ to V^+/2		60		deg
R_{IN}	Input Resistance	Differential Mode		38		kΩ
		Common Mode		151		MΩ
THD+N	Total Harmonic Distortion + Noise	A_V = 1, f = 1 kHz, Amplitude = 1V		0.002		%
e_n	Input Referred Voltage Noise Density	f = 1 kHz, V_{CM} = 2.0V		3		nV/√Hz
		f = 1 kHz, V_{CM} = 0.5V		3		
	Input Voltage Noise	0.1 Hz to 10 Hz		75		nV_{PP}
i_n	Input Referred Current Noise Density	f = 1 kHz, V_{CM} = 2.0V		1.1		pA/√Hz
		f = 1 kHz, V_{CM} = 0.5V		2.3		

Copyright © 2007–2013, Texas Instruments Incorporated

3.3V Electrical Characteristics (1)

Unless otherwise specified, all limits are ensured for T_A = 25°C, V^+ = 3.3V, V^- = 0V, V_{CM} = V^+/2, R_L > 10 kΩ to V^+/2. **Boldface** limits apply at the temperature extremes.

Parameter		Test Conditions	Min (2)	Typ (3)	Max (2)	Units
V_{OS}	Input Offset Voltage (4)	V_{CM} = 2.5V		±6	±500 **±600**	µV
		V_{CM} = 0.5V		±6	±500 **±600**	
TCV_{OS}	Input Offset Voltage Temperature Drift	V_{CM} = 2.5V		±0.5	±5.5	µV/°C
		V_{CM} = 0.5V		±0.2	±5.5	
I_B	Input Bias Current	V_{CM} = 2.5V		±1.5	±30 **±45**	nA
		V_{CM} = 0.5V		±13	±50 **±77**	
I_{OS}	Input Offset Current	V_{CM} = 2.5V		±1	±50 **±70**	nA
		V_{CM} = 0.5V		±11	±60 **±80**	
TCI_{OS}	Input Offset Current Drift	V_{CM} = 0.5V and V_{CM} = 2.5V		0.048		nA/°C
CMRR	Common Mode Rejection Ratio	0.15V ≤ V_{CM} ≤ 0.7V 0.23V ≤ V_{CM} ≤ 0.7V	101 **89**	120		dB
		1.5V ≤ V_{CM} ≤ 3.15V 1.5V ≤ V_{CM} ≤ 3.07V	105 **99**	130		
PSRR	Power Supply Rejection Ratio	2.5V ≤ V^+ ≤ 5.0V	111 **105**	129		dB
		1.8V ≤ V^+ ≤ 5.5V		117		
CMVR	Common Mode Voltage Range	Large Signal CMRR ≥ 80 dB	0		3.3	V
A_{VOL}	Open Loop Voltage Gain	R_L = 10 kΩ to V^+/2 V_{OUT} = 0.5V to 2.8V	112 **104**	130		dB
		R_L = 2 kΩ to V^+/2 V_{OUT} = 0.5V to 2.8V	110 **92**	119		
V_{OUT}	Output Voltage Swing High	R_L = 10 kΩ to V^+/2		5	50 **75**	mV from either rail
		R_L = 2 kΩ to V^+/2		14	50 **75**	
	Output Voltage Swing Low	R_L = 10 kΩ to V^+/2		9	50 **75**	
		R_L = 2 kΩ to V^+/2		13	50 **75**	
I_{OUT}	Output Current	Sourcing, V_{OUT} = V+/2 V_{IN} (diff) = 100 mV	28 **22**	45		mA
		Sinking, V_{OUT} = V+/2 V_{IN} (diff) = -100 mV	25 **20**	48		
I_S	Supply Current (Per Channel)	V_{CM} = 2.5V		2.1	2.8 **3.5**	mA
		V_{CM} = 0.5V		2.4	3.2 **4.0**	
SR	Slew Rate	A_V = +1, C_L = 10 pF, R_L = 10 kΩ to V^+/2, V_{OUT} = 2 V_{PP}		2.4		V/µs

(1) Electrical Table values apply only for factory testing conditions at the temperature indicated. Factory testing conditions result in very limited self-heating of the device such that T_J = T_A. No specification of parametric performance is indicated in the electrical tables under conditions of internal self-heating where T_J > T_A. Absolute maximum Ratings indicate junction temperature limits beyond which the device maybe permanently degraded, either mechanically or electrically.

(2) All limits are specified by testing, statistical analysis or design.

(3) Typical values represent the most likely parametric norm as determined at the time of characterization. Actual typical values may vary over time and will also depend on the application and configuration. The typical values are not tested and are not ensured on shipped production material.

(4) Ambient production test is performed at 25°C with a variance of ±3°C.

Copyright © 2007–2013, Texas Instruments Incorporated

3.3V Electrical Characteristics (1) (continued)

Unless otherwise specified, all limits are ensured for T_A = 25°C, V^+ = 3.3V, V^- = 0V, V_{CM} = V^+/2, R_L > 10 kΩ to V^+/2. **Boldface** limits apply at the temperature extremes.

Parameter		Test Conditions	Min (2)	Typ (3)	Max (2)	Units
GBW	Gain Bandwidth	C_L = 20 pF, R_L = 10 kΩ to V^+/2		22		MHz
G_M	Gain Margin	C_L = 20 pF, R_L = 10 kΩ to V^+/2		14		dB
Φ_M	Phase Margin	C_L = 20 pF, R_L = 10 kΩ to V^+/2		62		deg
R_{IN}	Input Resistance	Differential Mode		38		kΩ
		Common Mode		151		MΩ
THD+N	Total Harmonic Distortion + Noise	A_V = 1, f = 1 kHz, Amplitude = 1V,		0.002		%
e_n	Input Referred Voltage Noise Density	f = 1 kHz, V_{CM} = 2.5V		2.9		nV/√Hz
		f = 1 kHz, V_{CM} = 0.5V		2.9		
	Input Voltage Noise	0.1 Hz to 10 Hz		65		nV_{PP}
i_n	Input Referred Current Noise Density	f = 1 kHz, V_{CM} = 2.5V		1.1		pA/√Hz
		f = 1 kHz, V_{CM} = 0.5V		2.1		

5V Electrical Characteristics (1)

Unless otherwise specified, all limits are ensured for T_A = 25°C, V^+ = 5V, V^- = 0V, V_{CM} = V^+/2, R_L > 10 kΩ to V^+/2. **Boldface** limits apply at the temperature extremes.

Parameter		Test Conditions	Min (2)	Typ (3)	Max (2)	Units
V_{OS}	Input Offset Voltage (4)	V_{CM} = 4.5V		±6	±500 **±600**	µV
		V_{CM} = 0.5V		±6	±500 **±600**	
TCV_{OS}	Input Offset Voltage Temperature Drift	V_{CM} = 4.5V		±0.5	±5.5	µV/°C
		V_{CM} = 0.5V		±0.2	±5.5	
I_B	Input Bias Current	V_{CM} = 4.5V		±1.5	±30 **±50**	nA
		V_{CM} = 0.5V		±14	±50 **±85**	
I_{OS}	Input Offset Current	V_{CM} = 4.5V		±1	±50 **±70**	nA
		V_{CM} = 0.5V		±11	±65 **±80**	
TCI_{OS}	Input Offset Current Drift	V_{CM} = 0.5V and V_{CM} = 4.5V		0.0482		nA/°C
CMRR	Common Mode Rejection Ratio	0.15V ≤ V_{CM} ≤ 0.7V 0.23V ≤ V_{CM} ≤ 0.7V	101 **89**	120		dB
		1.5V ≤ V_{CM} ≤ 4.85V 1.5V ≤ V_{CM} ≤ 4.77V	105 **99**	130		
PSRR	Power Supply Rejection Ratio	2.5V ≤ V^+ ≤ 5V	111 **105**	129		dB
		1.8V ≤ V^+ ≤ 5.5V		117		
CMVR	Common Mode Voltage Range	Large Signal CMRR ≥ 80 dB	0		5	V
A_{VOL}	Open Loop Voltage Gain	R_L = 10 kΩ to V^+/2 V_{OUT} = 0.5V to 4.5V	112 **104**	130		dB
		R_L = 2 kΩ to V^+/2 V_{OUT} = 0.5V to 4.5V	110 **94**	119		

(1) Electrical Table values apply only for factory testing conditions at the temperature indicated. Factory testing conditions result in very limited self-heating of the device such that T_J = T_A. No specification of parametric performance is indicated in the electrical tables under conditions of internal self-heating where T_J > T_A. Absolute maximum Ratings indicate junction temperature limits beyond which the device maybe permanently degraded, either mechanically or electrically.
(2) All limits are specified by testing, statistical analysis or design.
(3) Typical values represent the most likely parametric norm as determined at the time of characterization. Actual typical values may vary over time and will also depend on the application and configuration. The typical values are not tested and are not ensured on shipped production material.
(4) Ambient production test is performed at 25°C with a variance of ±3°C.

Copyright © 2007–2013, Texas Instruments Incorporated

5V Electrical Characteristics [1] (continued)

Unless otherwise specified, all limits are ensured for T_A = 25°C, V^+ = 5V, V^- = 0V, V_{CM} = V^+/2, R_L > 10 kΩ to V^+/2. **Boldface** limits apply at the temperature extremes.

Parameter		Test Conditions	Min [2]	Typ [3]	Max [2]	Units
V_{OUT}	Output Voltage Swing High	R_L = 10 kΩ to V^+/2		8	50 **75**	mV from either rail
		R_L = 2 kΩ to V^+/2		24	50 **75**	
	Output Voltage Swing Low	R_L = 10 kΩ to V^+/2		9	50 **75**	
		R_L = 2 kΩ to V^+/2		23	50 **75**	
I_{OUT}	Output Current	Sourcing, V_{OUT} = V+/2 V_{IN} (diff) = 100 mV	33 **27**	47		mA
		Sinking, V_{OUT} = V+/2 V_{IN} (diff) = -100 mV	30 **25**	49		
I_S	Supply Current (Per Channel)	V_{CM} = 4.5V		2.2	3.0 **3.7**	mA
		V_{CM} = 0.5V		2.5	3.4 **4.2**	
SR	Slew Rate	A_V = +1, C_L = 10 pF, R_L = 10 kΩ to V^+/2, V_{OUT} = 2 V_{PP}		2.4		V/µs
GBW	Gain Bandwidth	C_L = 20 pF, R_L = 10 kΩ to V^+/2		22		MHz
G_M	Gain Margin	C_L = 20 pF, R_L = 10 kΩ to V^+/2		12		dB
Φ_M	Phase Margin	C_L = 20 pF, R_L = 10 kΩ to V^+/2		65		deg
R_{IN}	Input Resistance	Differential Mode		38		kΩ
		Common Mode		151		MΩ
THD+N	Total Harmonic Distortion + Noise	A_V = 1, f = 1 kHz, Amplitude = 1V		0.001		%
e_n	Input Referred Voltage Noise Density	f = 1 kHz, V_{CM} = 4.5V		2.9		nV/√Hz
		f = 1 kHz, V_{CM} = 0.5V		2.9		
	Input Voltage Noise	0.1 Hz to 10 Hz		78		nV_{PP}
i_n	Input Referred Current Noise Density	f = 1 kHz, V_{CM} = 4.5V		1.1		pA/√Hz
		f = 1 kHz, V_{CM} = 0.5V		2.2		

Connection Diagrams

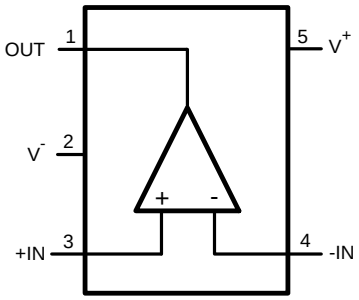

Figure 3. 5-Pin SOT-23
Top View

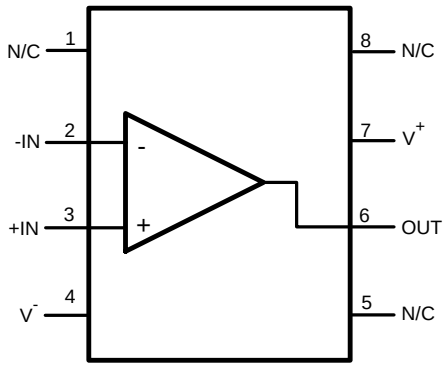

Figure 4. 8-Pin SOIC
Top View

Copyright © 2007–2013, Texas Instruments Incorporated

Typical Performance Characteristics

Unless otherwise noted: T_A = 25°C, R_L > 10 kΩ, V_{CM} = V_S/2.

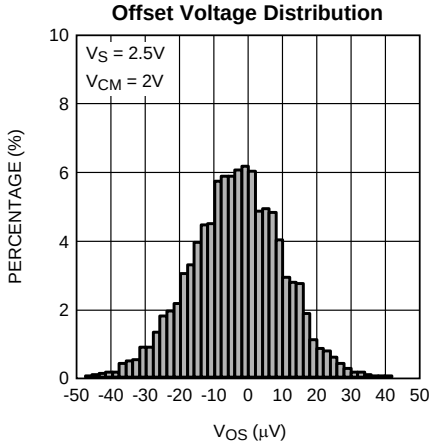

Figure 5.

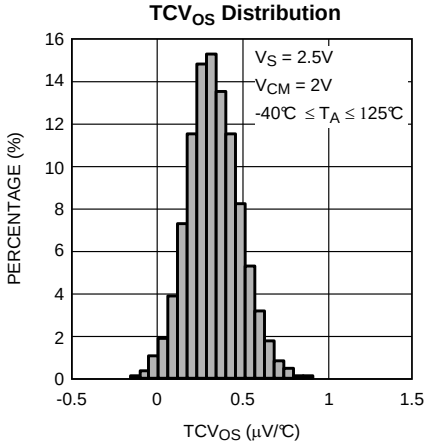

Figure 6.

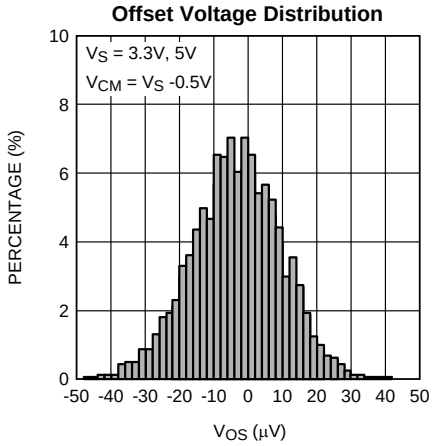

Figure 7.

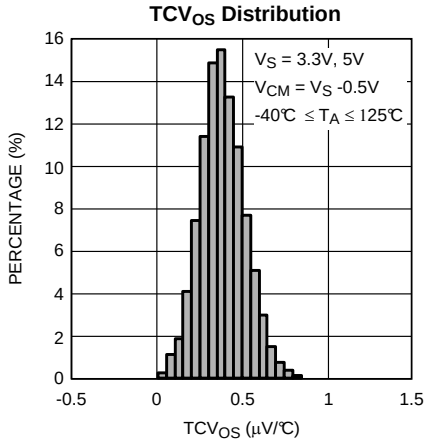

Figure 8.

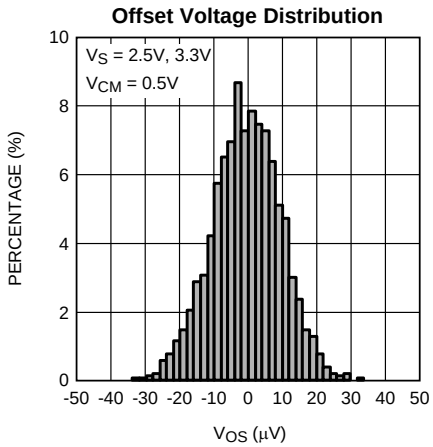

Figure 9.

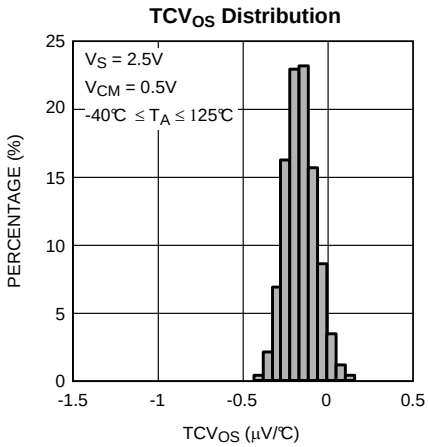

Figure 10.

Typical Performance Characteristics (continued)

Unless otherwise noted: T_A = 25°C, R_L > 10 kΩ, V_{CM} = V_S/2.

Offset Voltage Distribution

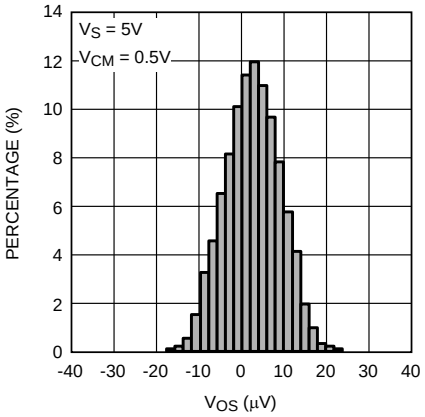

Figure 11.

TCVOS Distribution

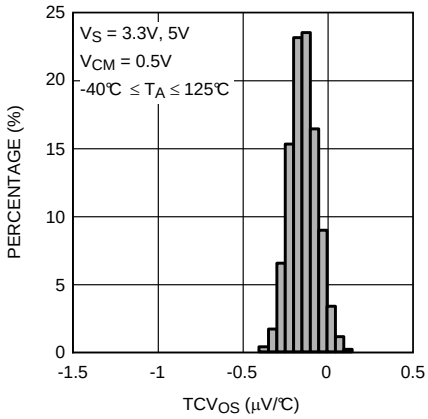

Figure 12.

Offset Voltage vs. Temperature

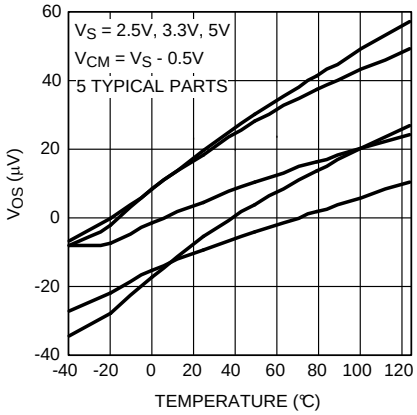

Figure 13.

Offset Voltage vs. Temperature

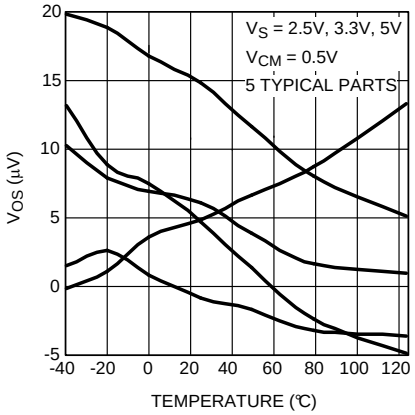

Figure 14.

PSRR vs. Frequency

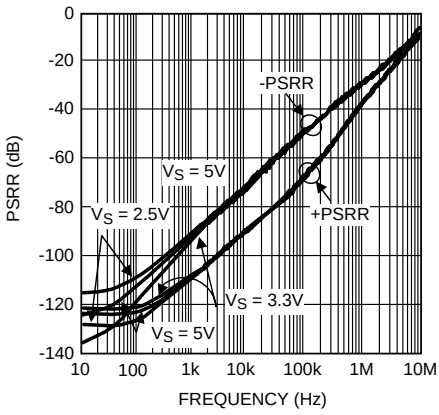

Figure 15.

CMRR vs. Frequency

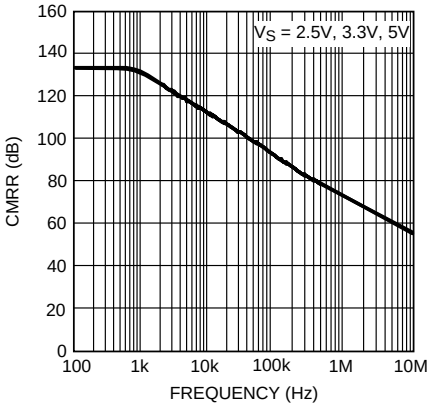

Figure 16.

Copyright © 2007–2013, Texas Instruments Incorporated

Typical Performance Characteristics (continued)

Unless otherwise noted: T_A = 25°C, R_L > 10 kΩ, V_{CM} = V_S/2.

Offset Voltage vs. Supply Voltage

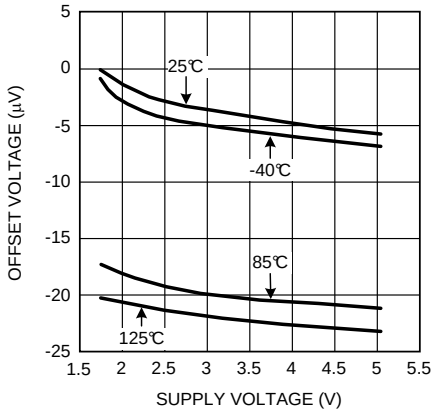

Figure 17.

Offset Voltage vs. V_{CM}

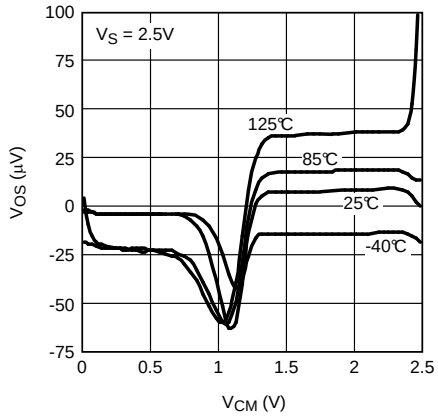

Figure 18.

Offset Voltage vs. V_{CM}

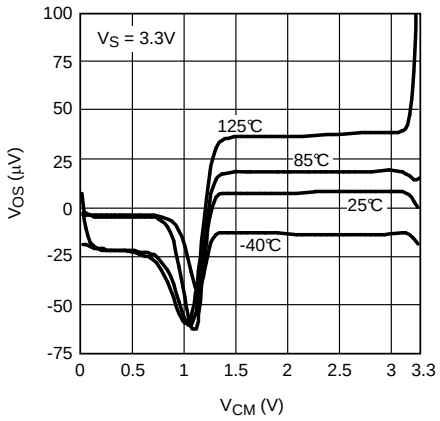

Figure 19.

Offset Voltage vs. V_{CM}

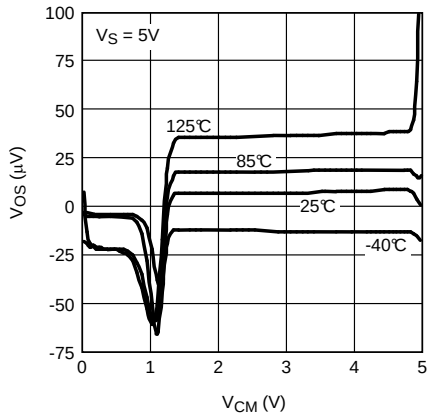

Figure 20.

Input Offset Voltage Time Drift

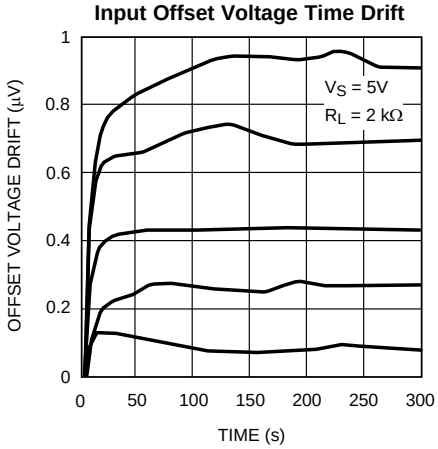

Figure 21.

Slew Rate vs. Supply Voltage

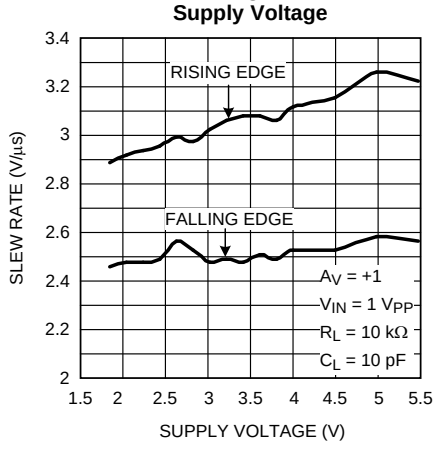

Figure 22.

Copyright © 2007–2013, Texas Instruments Incorporated

Typical Performance Characteristics (continued)

Unless otherwise noted: T_A = 25°C, R_L > 10 kΩ, V_{CM} = V_S/2.

Time Domain Voltage Noise

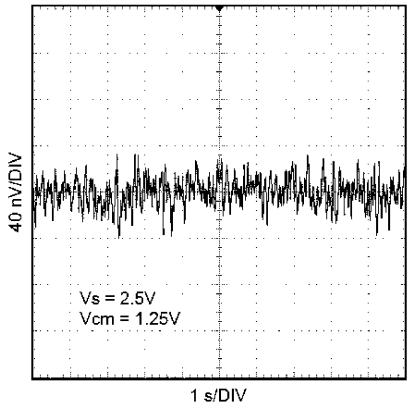

Figure 23.

Time Domain Voltage Noise

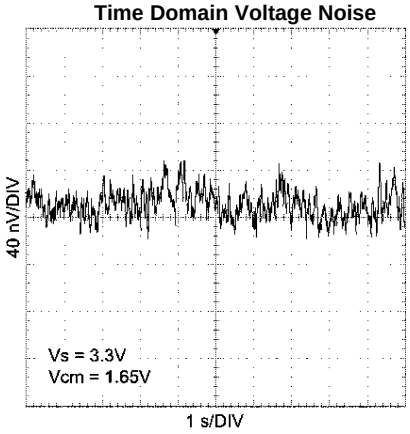

Figure 24.

Time Domain Voltage Noise

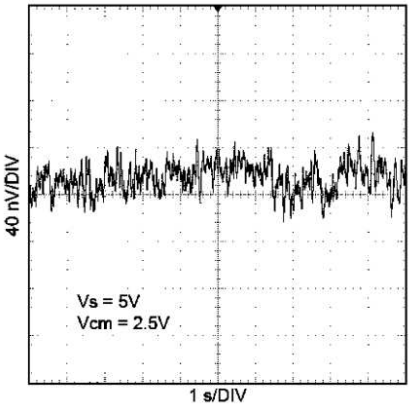

Figure 25.

Output Voltage vs. Output Current

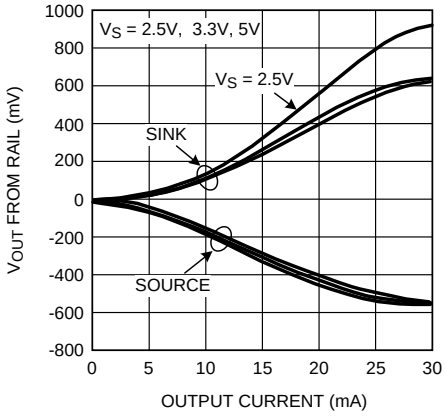

Figure 26.

Input Bias Current vs. V_{CM}

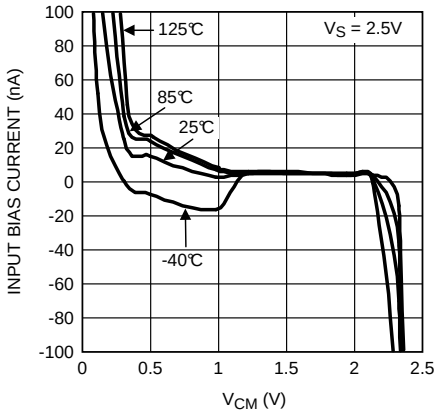

Figure 27.

Input Bias Current vs. V_{CM}

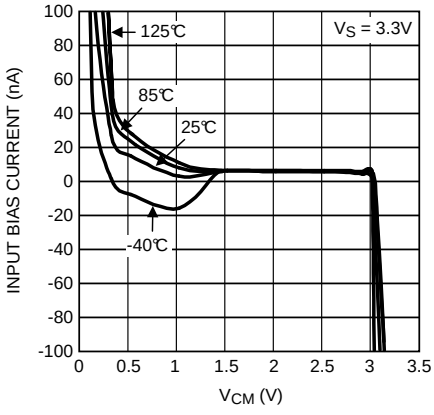

Figure 28.

Copyright © 2007–2013, Texas Instruments Incorporated

Typical Performance Characteristics (continued)

Unless otherwise noted: T_A = 25°C, R_L > 10 kΩ, V_{CM} = V_S/2.

Input Bias Current vs. V_{CM}

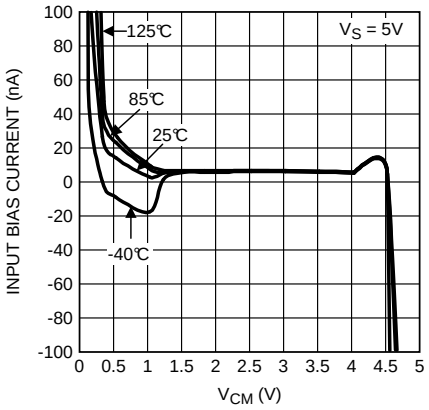

Figure 29.

Open Loop Frequency Response Over Temperature

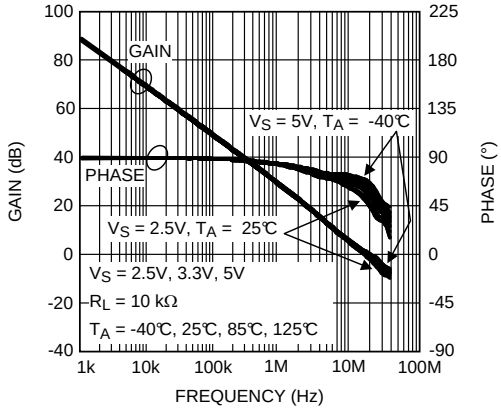

Figure 30.

Open Loop Frequency Response

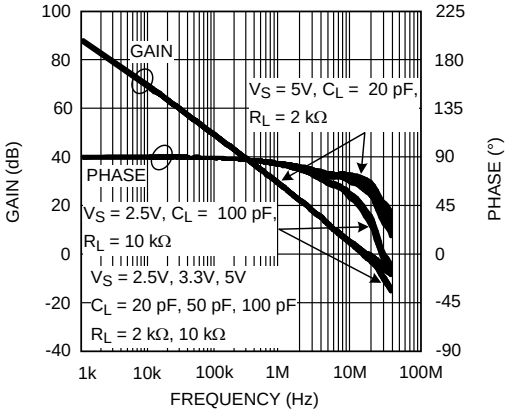

Figure 31.

Open Loop Frequency Response

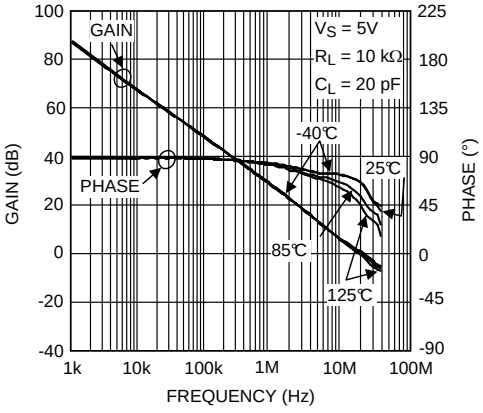

Figure 32.

THD+N vs. Frequency

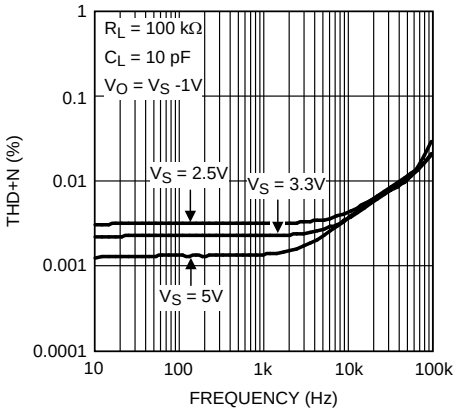

Figure 33.

THD+N vs. Output Voltage

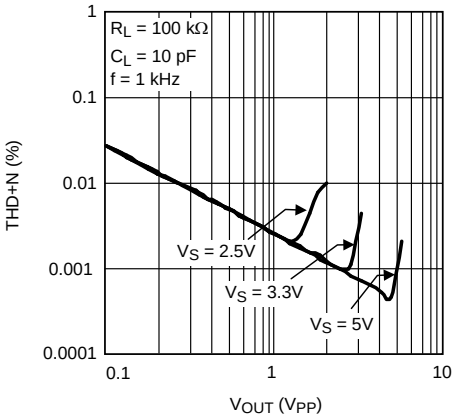

Figure 34.

Typical Performance Characteristics (continued)

Unless otherwise noted: T_A = 25°C, R_L > 10 kΩ, V_{CM} = V_S/2.

Large Signal Step Response

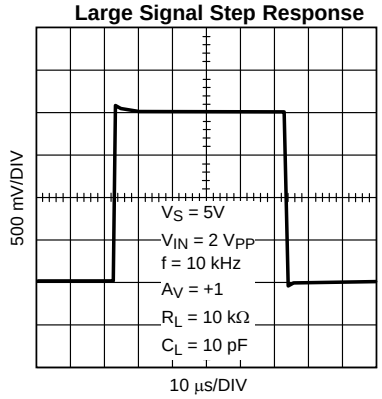

Figure 35.

Small Signal Step Response

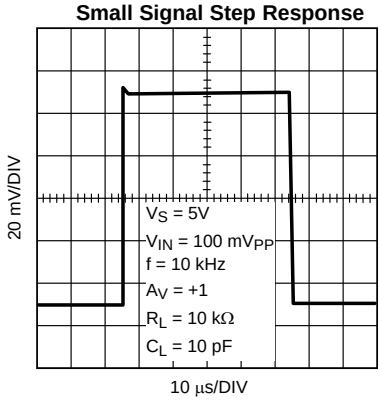

Figure 36.

Large Signal Step Response

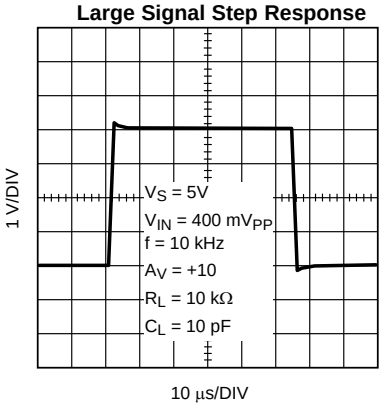

Figure 37.

Small Signal Step Response

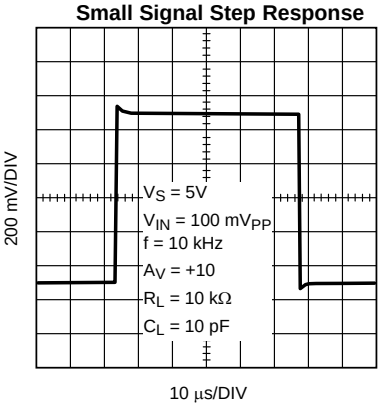

Figure 38.

Supply Current vs. Supply Voltage

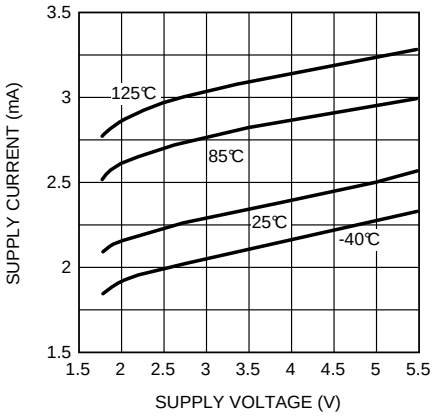

Figure 39.

Output Swing High vs. Supply Voltage

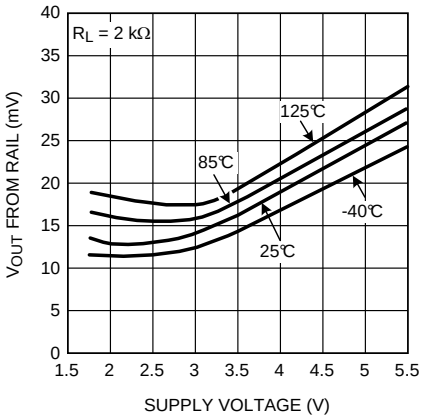

Figure 40.

Copyright © 2007–2013, Texas Instruments Incorporated

Typical Performance Characteristics (continued)

Unless otherwise noted: T_A = 25°C, R_L > 10 kΩ, V_{CM} = V_S/2.

Output Swing Low vs. Supply Voltage

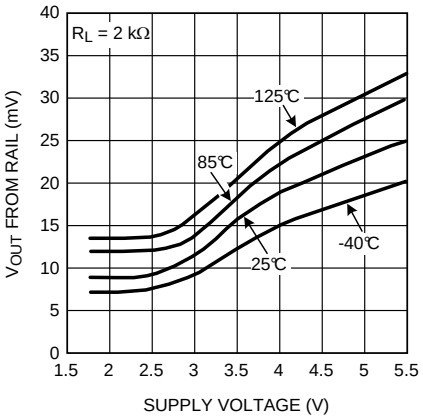

Figure 41.

Sinking Current vs, Supply Voltage

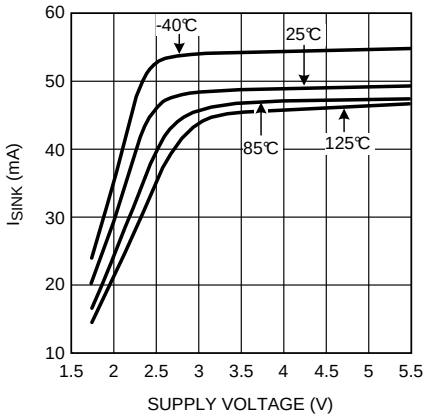

Figure 42.

Sourcing Current vs. Supply Voltage

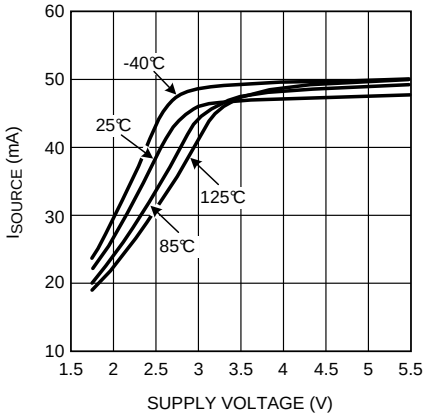

Figure 43.

Copyright © 2007–2013, Texas Instruments Incorporated

APPLICATION INFORMATION

LMP7731

The LMP7731 is a single, low noise, rail-to-rail input and output, and low voltage amplifier.

The low input voltage noise of only 2.9 nV/$\sqrt{Hz}$ with a 1/f corner at 3 Hz makes the LMP7731 ideal for sensor applications where DC accuracy is of importance.

The LMP7731 has a high gain bandwidth of 22 MHz. This wide bandwidth enables use of the amplifier at higher gain settings while retaining usable bandwidth for the application. This is particularly beneficial when system designers need to use sensors with very limited output voltage range as it allows larger gains in one stage which in turn increases the signal to noise ratio.

The LMP7731 has proprietary input bias cancellation circuitry on the input stages. This allows the LMP7731 to have only about 1.5 nA bias current with a bipolar input stage. This low input bias current, paired with the inherent lower input voltage noise of bipolar input stages makes the LMP7731 an excellent choice for precision applications. The combination of low input bias current, and low input voltage noise enables the user to achieve unprecedented accuracy and higher signal integrity.

Texas Instruments is heavily committed to precision amplifiers and the market segment they serve. Technical support and extensive characterization data are available for sensitive applications or applications with a constrained error budget.

The LMP7731 is offered in the space saving 5-Pin SOT-23 and 8-Pin SOIC packages. These small packages are ideal solutions for area constrained PC boards and portable electronics.

INPUT BIAS CURRENT CANCELLATION

The LMP7731 has proprietary input bias current cancellation circuitry on their input stages.

The LMP7731 has rail-to-rail input. This is achieved by having two input stages in parallel. Figure 44 shows only one of the input stages as the circuitry is symmetrical for both stages.

Figure 44 shows that as the common mode voltage gets closer to one of the extreme ends, current I_1 significantly increases. This increased current shows as an increase in voltage drop across resistor R_1 equal to I_1*R_1 on IN^+ of the amplifier. This voltage contributes to the offset voltage of the amplifier. When common mode voltage is in the mid-range, the transistors are operating in the linear region and I_1 is significantly small. The voltage drop due to I_1 across R_1 can be ignored as it is orders of magnitude smaller than the amplifier's input offset voltage.

As the common mode voltage gets closer to one of the rails, the offset voltage generated due to I_1 increases and becomes comparable to the amplifiers offset voltage.

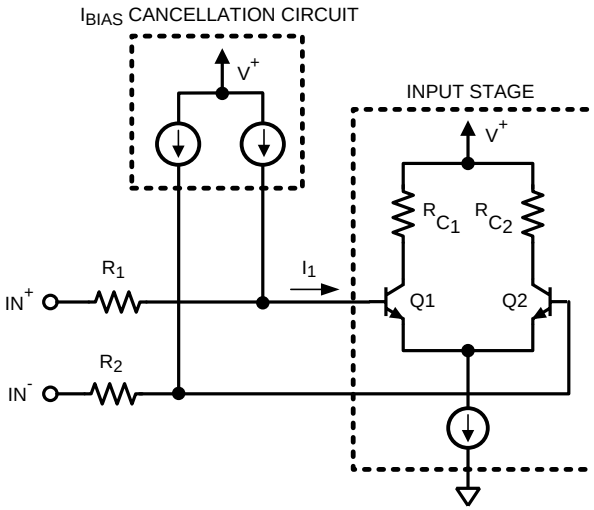

Figure 44. Input Bias Current Cancellation

Copyright © 2007–2013, Texas Instruments Incorporated

INPUT VOLTAGE NOISE MEASUREMENT

The LMP7731 has very low input voltage noise. The peak-to-peak input voltage noise of the LMP7731 can be measured using the test circuit shown in Figure 45

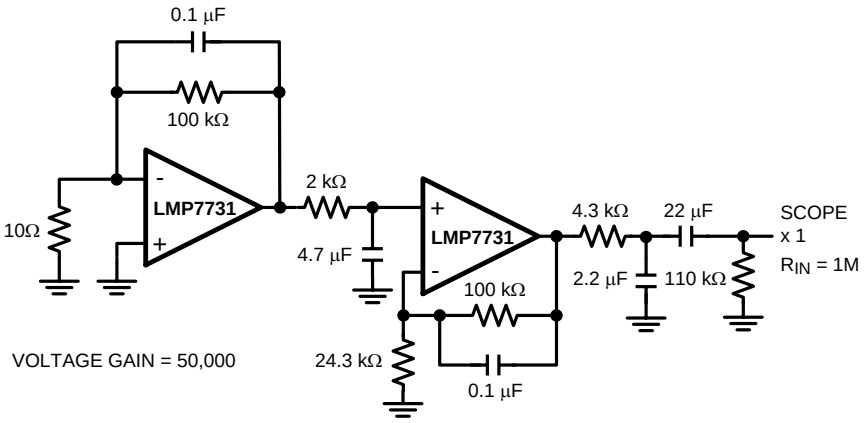

Figure 45. 0.1 Hz to 10 Hz Noise Test Circuit

The frequency response of this noise test circuit at the 0.1 Hz corner is defined by only one zero. The test time for the 0.1 Hz to 10 Hz noise measurement using this configuration should not exceed 10 seconds, as this time limit acts as an additional zero to reduce or eliminate the noise contributions of noise from frequencies below 0.1 Hz.

Figure 46 shows typical peak-to-peak noise for the LMP7731 measured with the circuit in Figure 45 for the LMP7731.

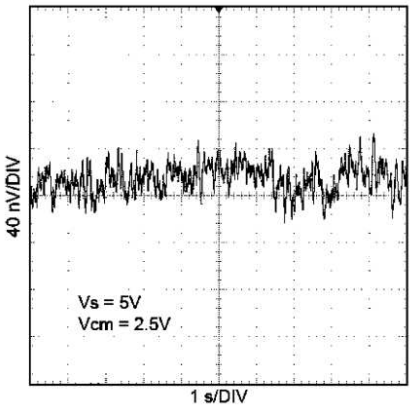

Figure 46. 0.1 Hz to 10 Hz Input Voltage Noise

Measuring the very low peak-to-peak noise performance of the LMP7731, requires special testing attention. In order to achieve accurate results, the device should be warmed up for at least five minutes. This is so that the input offset voltage of the op amp settles to a value. During this warm up period, the offset can typically change by a few µV because the chip temperature increases by about 30°C. If the 10 seconds of the measurement is selected to include this warm up time, some of this temperature change might show up as the measured noise. Figure 47 shows the start-up drift of five typical LMP7731 units.

Copyright © 2007–2013, Texas Instruments Incorporated

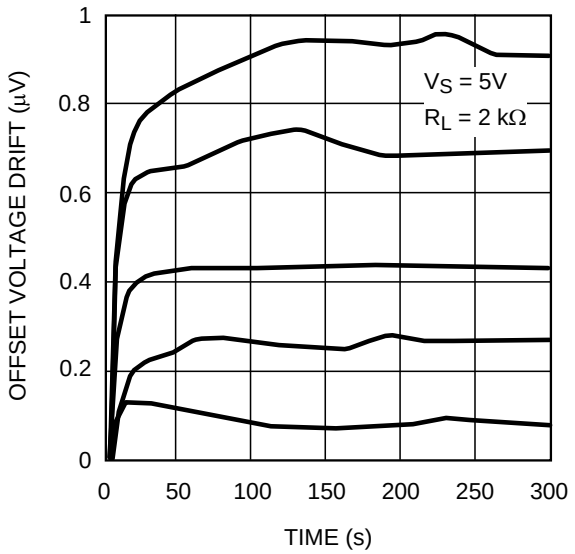

Figure 47. Start-Up Input Offset Voltage Drift

During the peak-to-peak noise measurement, the LMP7731 must be shielded. This prevents offset variations due to airflow. Offset can vary by a few nV due to this airflow and that can invalidate measurements of input voltage noise with a magnitude which is in the same range. For similar reasons, sudden motions must also be restricted in the vicinity of the test area. The feed-through which results from this motion could increase the observed noise value which in turn would invalidate the measurement.

DIODES BETWEEN THE INPUTS

The LMP7731 has a set of anti-parallel diodes between the input pins as shown in Figure 48. These diodes are present to protect the input stage of the amplifier. At the same time, they limit the amount of differential input voltage that is allowed on the input pins. A differential signal larger than the voltage needed to turn on the diodes might cause damage to the diodes. The differential voltage between the input pins should be limited to ±3 diode drops or the input current needs to be limited to ±20 mA.

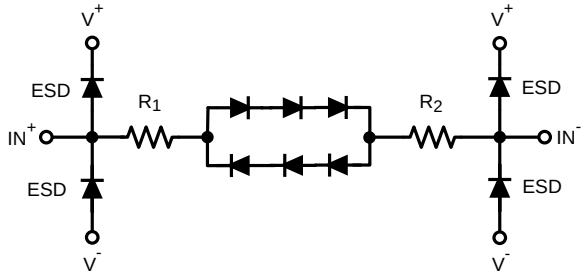

Figure 48. Anti-Parallel Diodes between Inputs

DRIVING AN ADC

Analog to Digital Converters, ADCs, usually have a sampling capacitor on their input. When the ADC's input is directly connected to the output of the amplifier a charging current flows from the amplifier to the ADC. This charging current causes a momentary glitch that can take some time to settle. There are different ways to minimize this effect. One way is to slow down the sampling rate. This method gives the amplifier sufficient time to stabilize its output. Another way to minimize the glitch caused by the switch capacitor is to have an external capacitor connected to the input of the ADC. This capacitor is chosen so that its value is much larger than the internal switching capacitor and it will hence provide the voltage needed to quickly and smoothly charge the

Copyright © 2007–2013, Texas Instruments Incorporated

ADC's sampling capacitor. Since this large capacitor will be loading the output of the amplifier as well, an isolation resistor is needed between the output of the amplifier and this capacitor. The isolation resistor, R_{ISO}, separates the additional load capacitance from the output of the amplifier and will also form a low-pass filter and can be designed to provide noise reduction as well as anti-aliasing. The drawback to having R_{ISO} is that it reduces signal swing since there is some voltage drop across it.

Figure 49 (a) shows the ADC directly connected to the amplifier. To minimize the glitch in this setting, a slower sample rate needs to be used. Figure 49 (b) shows R_{ISO} and an external capacitor used to minimize the glitch.

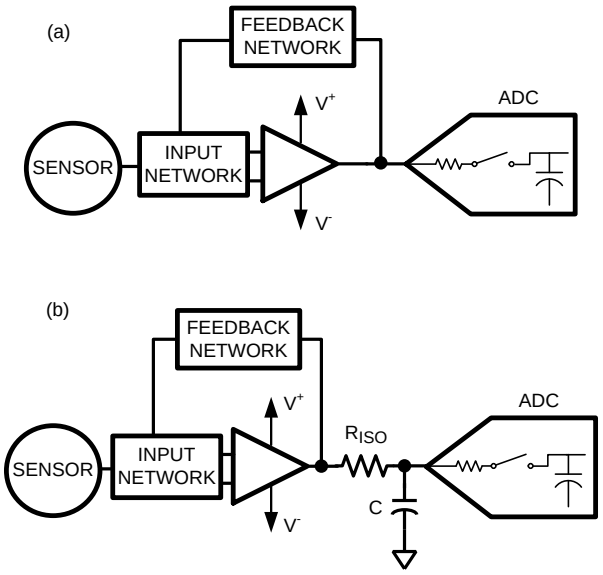

Figure 49. Driving an ADC

REVISION HISTORY

Changes from Revision D (March 2013) to Revision E	Page
• Changed layout of National Data Sheet to TI format	17

Copyright © 2007–2013, Texas Instruments Incorporated

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish	MSL Peak Temp (3)	Op Temp (°C)	Top-Side Markings (4)	Samples
LMP7731MA/NOPB	ACTIVE	SOIC	D	8	95	Green (RoHS & no Sb/Br)	CU SN	Level-1-260C-UNLIM		LMP77 31MA	Samples
LMP7731MAX/NOPB	ACTIVE	SOIC	D	8	2500	Green (RoHS & no Sb/Br)	CU SN	Level-1-260C-UNLIM		LMP77 31MA	Samples
LMP7731MF/NOPB	ACTIVE	SOT-23	DBV	5	1000	Green (RoHS & no Sb/Br)	CU SN	Level-1-260C-UNLIM	-40 to 125	AY3A	Samples
LMP7731MFE/NOPB	ACTIVE	SOT-23	DBV	5	250	Green (RoHS & no Sb/Br)	CU SN	Level-1-260C-UNLIM	-40 to 125	AY3A	Samples
LMP7731MFX/NOPB	ACTIVE	SOT-23	DBV	5	3000	Green (RoHS & no Sb/Br)	CU SN	Level-1-260C-UNLIM	-40 to 125	AY3A	Samples

(1) The marketing status values are defined as follows:
ACTIVE: Product device recommended for new designs.
LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.
NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.
PREVIEW: Device has been announced but is not in production. Samples may or may not be available.
OBSOLETE: TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.
TBD: The Pb-Free/Green conversion plan has not been defined.
Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.
Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.
Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) Multiple Top-Side Markings will be inside parentheses. Only one Top-Side Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Top-Side Marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION

REEL DIMENSIONS

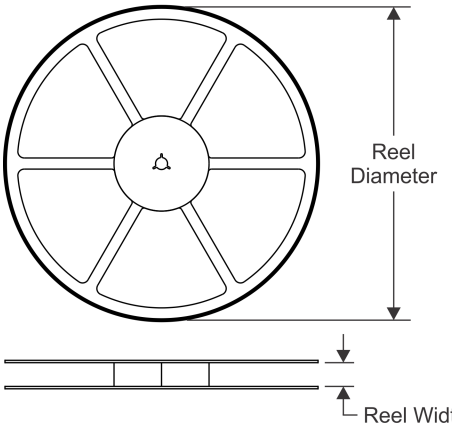

TAPE DIMENSIONS

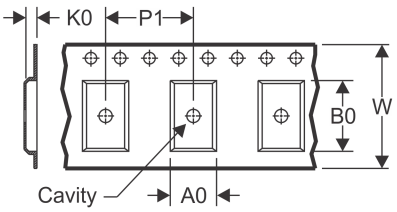

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

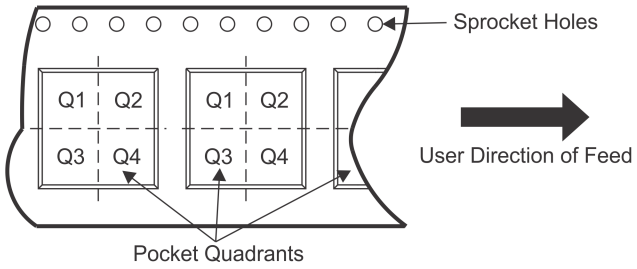

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
LMP7731MAX/NOPB	SOIC	D	8	2500	330.0	12.4	6.5	5.4	2.0	8.0	12.0	Q1
LMP7731MF/NOPB	SOT-23	DBV	5	1000	178.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
LMP7731MFE/NOPB	SOT-23	DBV	5	250	178.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
LMP7731MFX/NOPB	SOT-23	DBV	5	3000	178.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3

TAPE AND REEL BOX DIMENSIONS

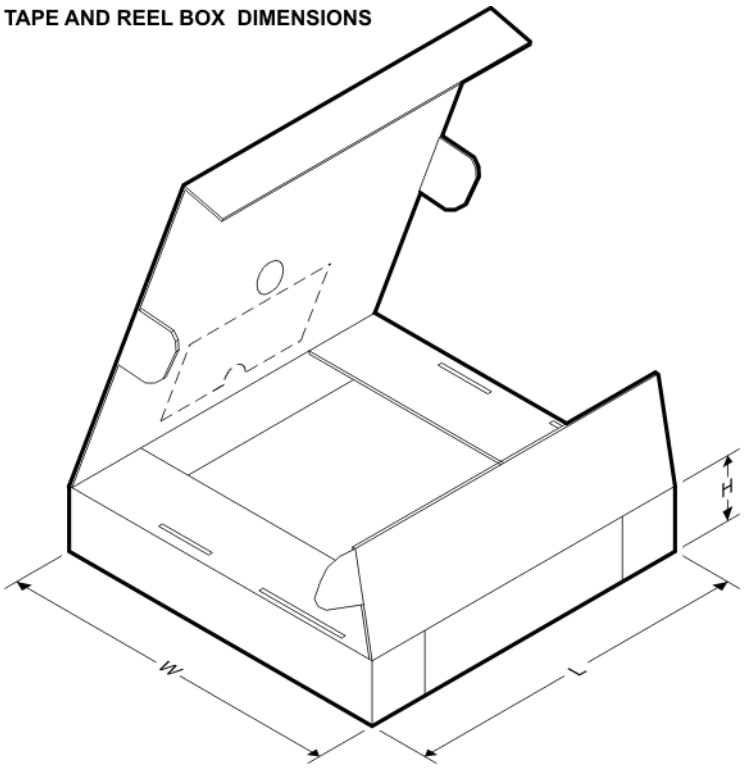

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
LMP7731MAX/NOPB	SOIC	D	8	2500	367.0	367.0	35.0
LMP7731MF/NOPB	SOT-23	DBV	5	1000	210.0	185.0	35.0
LMP7731MFE/NOPB	SOT-23	DBV	5	250	210.0	185.0	35.0
LMP7731MFX/NOPB	SOT-23	DBV	5	3000	210.0	185.0	35.0

DBV (R–PDSO–G5) PLASTIC SMALL–OUTLINE PACKAGE

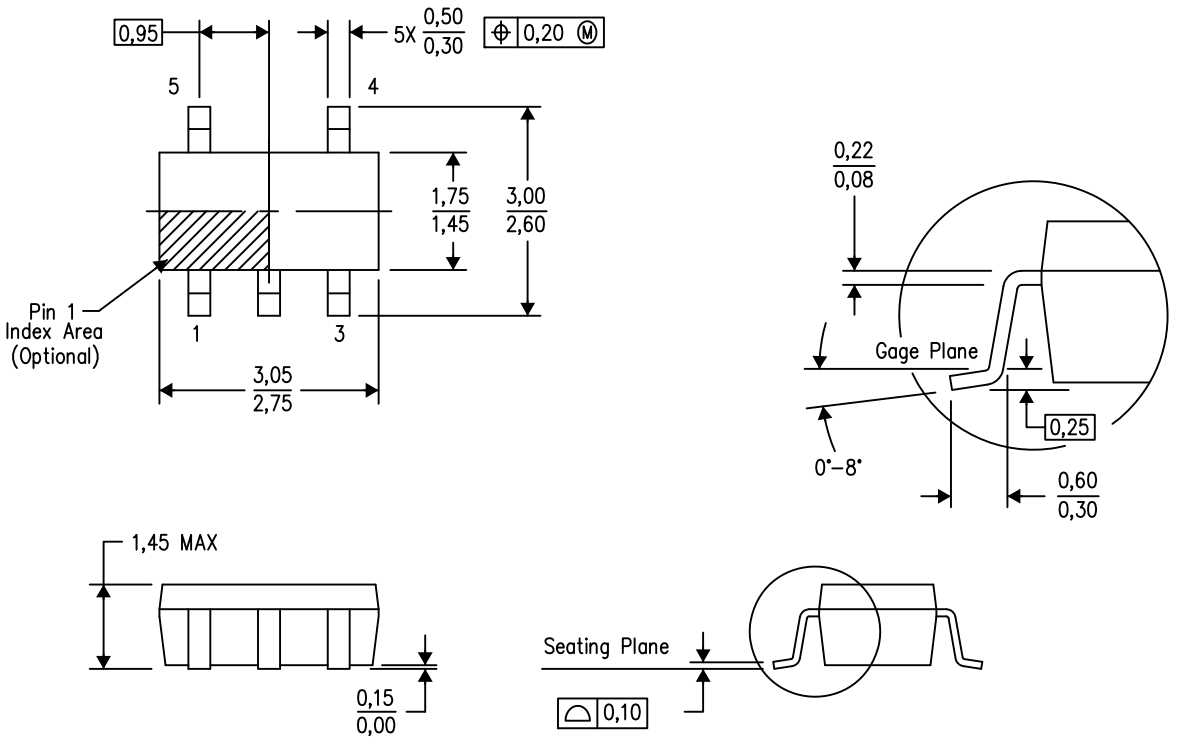

4073253–4/N 12/14

NOTES:
A. All linear dimensions are in millimeters.
B. This drawing is subject to change without notice.
C. Body dimensions do not include mold flash or protrusion. Mold flash and protrusion shall not exceed 0.15 per side.
D. Falls within JEDEC MO–178 Variation AA.

DBV (R–PDSO–G5) PLASTIC SMALL OUTLINE

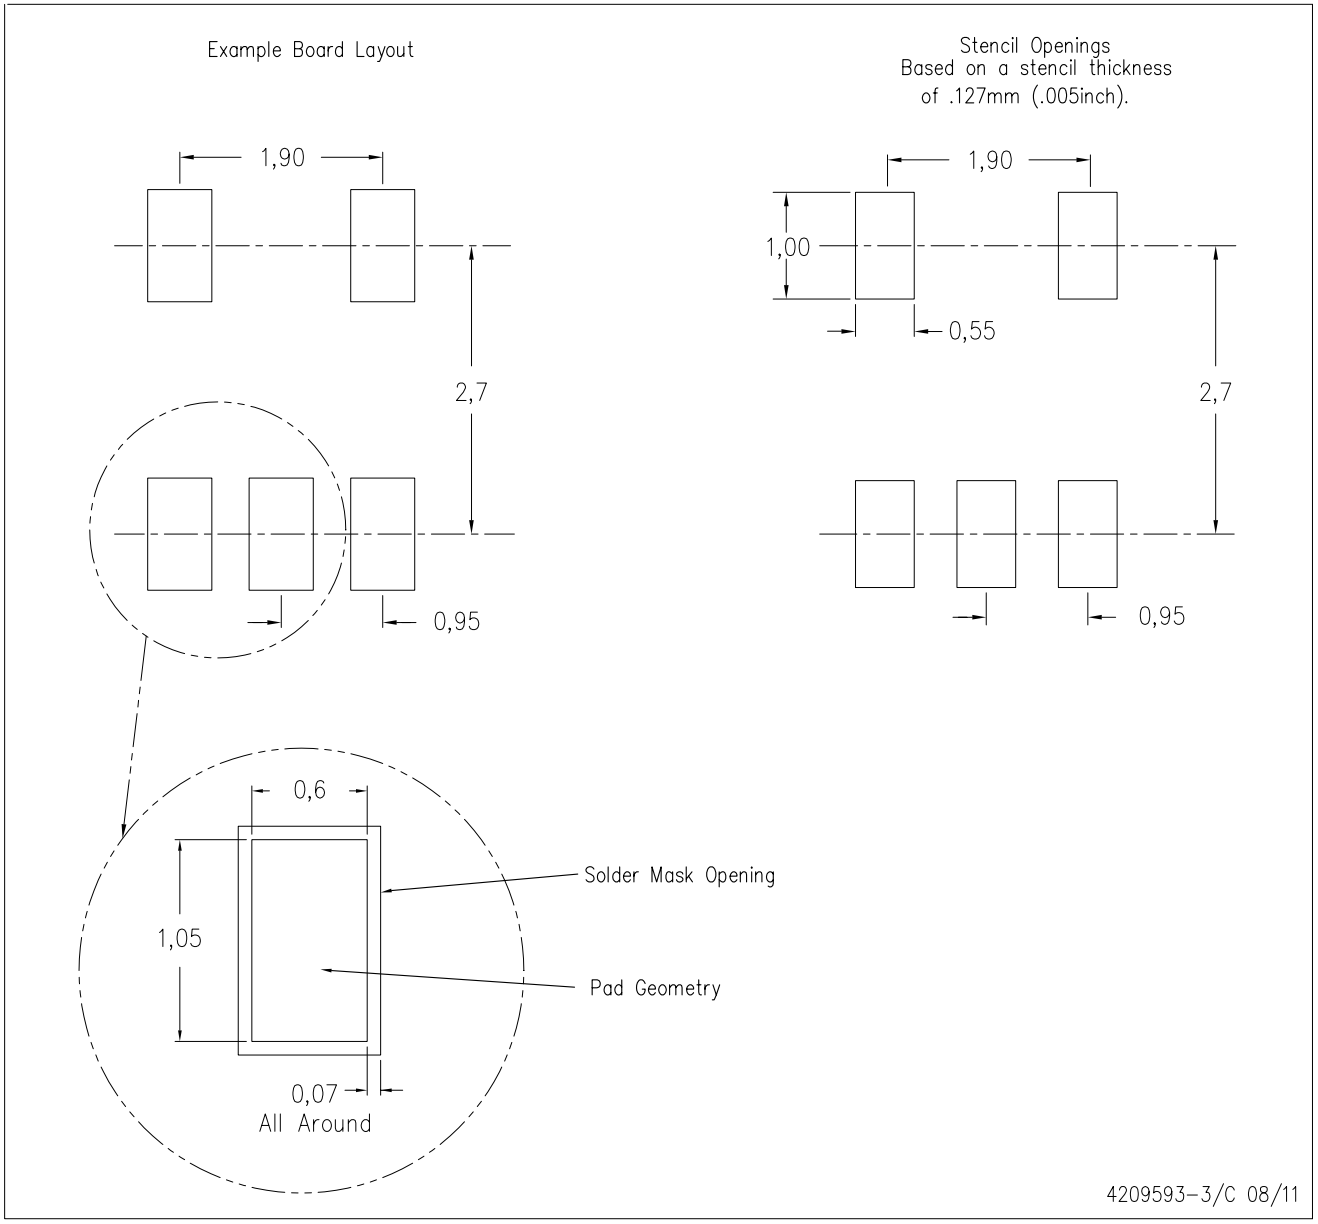

NOTES:
A. All linear dimensions are in millimeters.
B. This drawing is subject to change without notice.
C. Customers should place a note on the circuit board fabrication drawing not to alter the center solder mask defined pad.
D. Publication IPC–7351 is recommended for alternate designs.
E. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Example stencil design based on a 50% volumetric metal load solder paste. Refer to IPC–7525 for other stencil recommendations.

D (R–PDSO–G8) PLASTIC SMALL OUTLINE

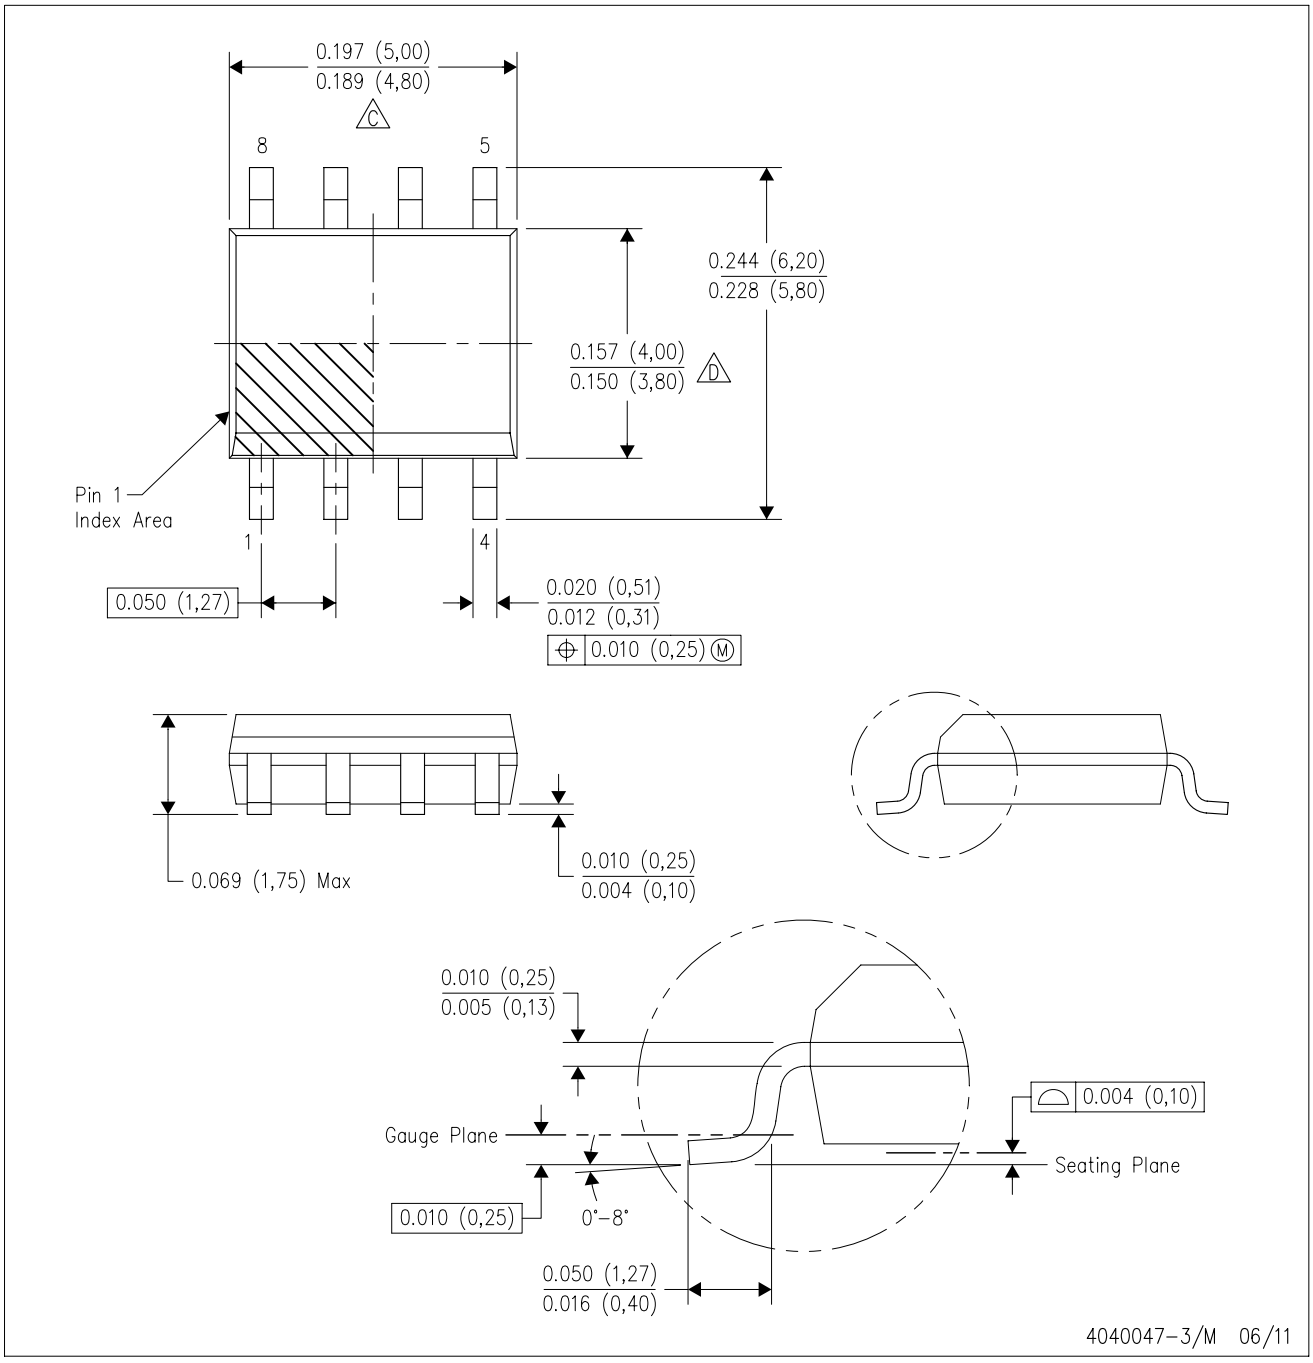

NOTES:
A. All linear dimensions are in inches (millimeters).
B. This drawing is subject to change without notice.
C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
D. Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
E. Reference JEDEC MS–012 variation AA.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as “components”) are sold subject to TI’s terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI’s terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers’ products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers’ products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI’s goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or “enhanced plastic” are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have ***not*** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products		**Applications**	
Audio	www.ti.com/audio	Automotive and Transportation	www.ti.com/automotive
Amplifiers	amplifier.ti.com	Communications and Telecom	www.ti.com/communications
Data Converters	dataconverter.ti.com	Computers and Peripherals	www.ti.com/computers
DLP® Products	www.dlp.com	Consumer Electronics	www.ti.com/consumer-apps
DSP	dsp.ti.com	Energy and Lighting	www.ti.com/energy
Clocks and Timers	www.ti.com/clocks	Industrial	www.ti.com/industrial
Interface	interface.ti.com	Medical	www.ti.com/medical
Logic	logic.ti.com	Security	www.ti.com/security
Power Mgmt	power.ti.com	Space, Avionics and Defense	www.ti.com/space-avionics-defense
Microcontrollers	microcontroller.ti.com	Video and Imaging	www.ti.com/video
RFID	www.ti-rfid.com		
OMAP Applications Processors	www.ti.com/omap	**TI E2E Community**	e2e.ti.com
Wireless Connectivity	www.ti.com/wirelessconnectivity		

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2015, Texas Instruments Incorporated