
TS482


100mW Stereo Headphone Amplifier

- Operating from **Vcc=2V to 5.5V**
- 100mW into 16Ω at 5V
- 38mW into 16Ω at 3.3V
- 11.5mW into 16Ω at 2V
- Switch ON/OFF click reduction circuitry
- High power supply rejection ratio: 85dB at 5V
- High signal-to-noise ratio: 110dB(A) at 5V
- High crosstalk immunity: 100dB (F=1kHz)
- Rail-to-rail input and output
- Unity-gain stable
- Available in **SO-8, MiniSO-8 & DFN8**


TS482ID, TS482IDT - SO-8




TS482IST - MiniSO-8



TS482IQT - DFN8



Typical application schematic

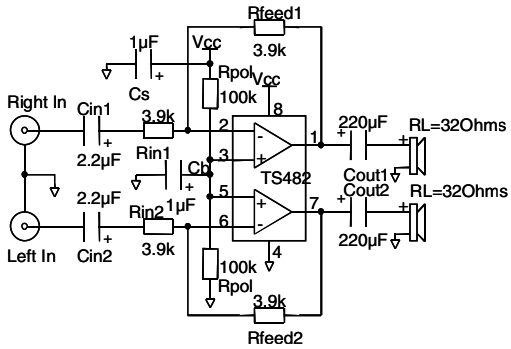

Description

The TS482 is a dual audio power amplifier able to drive a 16 or 32Ω stereo headset down to low voltages.

It is delivering up to 100mW per channel (into 16Ω loads) of continuous average power with 0.1% THD+N from a 5V power supply.

The unity gain stable TS482 can be configured by external gain-setting resistors.

Applications

- Stereo headphone amplifier
- Optical storage
- Computer motherboard
- PDA, organizers & notebook computers
- High-end TV, set-top box, DVD players
- Sound cards

Order Codes

Part Number	Temperature Range	Package	Packing	Marking
TS482ID/IDT	-40, +85°C	SO-8	Tube or Tape & Reel	482I
TS482IST		miniSO-8	Tape & Reel	
TS482IQT		DFN8		

1 Absolute Maximum Ratings

Table 1. Key parameters and their absolute maximum ratings

Symbol	Parameter	Value	Unit
V_{CC}	Supply voltage (1)	6	V
V_i	Input Voltage	-0.3 to V_{CC} +0.3	V
T_{oper}	Operating Free Air Temperature Range	-40 to + 85	°C
T_{stg}	Storage Temperature	-65 to +150	°C
T_j	Maximum Junction Temperature	150	°C
R_{thja}	Thermal Resistance Junction to Ambient SO8 MiniSO8 DFN8	 175 215 70	°C/W
Pd	Power Dissipation (2) SO-8 MiniSO-8 DFN8	 0.71 0.58 1.79	W
ESD	Human Body Model (pin to pin)	2	kV
ESD	Machine Model - 220pF - 240pF (pin to pin)	200	V
Latch-up	Latch-up Immunity (all pins)	200	mA
	Lead Temperature (soldering, 10sec)	250	°C
	Lead Temperature (soldering, 10sec) for lead-free	260	°C
	Output Short-Circuit Duration	see note (3)	

1. All voltages values are measured with respect to the ground pin.
2. Pd has been calculated with Tamb = 25°C, Tjunction = 150°C.
3. Attention must be paid to continuous power dissipation. Exposure of the IC to a short circuit on one or two amplifiers simultaneously can cause excessive heating and the destruction of the device.

Table 2. Operating conditions

Symbol	Parameter	Value	Unit
V_{CC}	Supply Voltage	2 to 5.5	V
R_L	Load Resistor	>= 16	Ω
C_L	Load Capacitor R_L = 16 to 100Ω R_L > 100Ω	 400 100	pF
Vicm	Common Mode Input Voltage Range	G_{ND} to V_{CC}	V
R_{thja}	Thermal Resistance Junction to Ambient SO-8 MiniSO-8 DFN8(1)	 150 190 41	°C/W

1. When mounted on a 4-layer PCB.

2 Electrical Characteristics

Table 3. Electrical characteristics when V_{CC} = +5V, GND = 0V, T_{amb} = 25°C (unless otherwise specified)

Symbol	Parameter	Min.	Typ.	Max.	Unit
I_{CC}	Supply Current No input signal, no load		5.5	7.2	mA
V_{IO}	Input Offset Voltage (V_{ICM} = V_{CC}/2)		1	5	mV
I_{IB}	Input Bias Current (V_{ICM} = V_{CC}/2)		200	500	nA
P_O	Output Power THD+N = 0.1% Max, F = 1kHz, R_L = 32Ω THD+N = 1% Max, F = 1kHz, R_L = 32Ω THD+N = 0.1% Max, F = 1kHz, R_L = 16Ω THD+N = 1% Max, F = 1kHz, R_L = 16Ω	 60 95	 65 67.5 100 107		mW
THD + N	Total Harmonic Distortion + Noise (A_v=-1) (1) R_L = 32Ω, P_{out} = 60mW, 20Hz ≤F ≤20kHz R_L = 16Ω, P_{out} = 90mW, 20Hz ≤F ≤20kHz		 0.03 0.03		%
PSRR	Power Supply Rejection Ratio (A_v=1), inputs floating F = 100Hz, Vripple = 100mVpp		 85		dB
I_O	Max Output Current THD +N < 1%, R_L = 16Ω connected between out and V_{CC}/2	 106	 120		mA
V_O	Output Swing V_{OL}: R_L = 32Ω V_{OH}: R_L = 32Ω V_{OL}: R_L = 16Ω V_{OH}: R_L = 16Ω	 4.45 4.2	 0.4 4.6 0.55 4.4	 0.48 0.65	V
SNR	Signal-to-Noise Ratio (Filter Type A, A_v=-1) R_L = 32Ω, THD +N < 0.2%, 20Hz ≤F ≤20kHz	 95	 110		dB
Crosstalk	Channel Separation, R_L = 32Ω F = 1kHz F = 20Hz to 20kHz Channel Separation, R_L = 16Ω F = 1kHz F = 20Hz to 20kHz		 100 80 100 80		dB
C_I	Input Capacitance		1		pF
GBP	Gain Bandwidth Product (R_L = 32Ω)	1.35	2.2		MHz
SR	Slew Rate, Unity Gain Inverting (R_L = 16Ω)	0.45	0.7		V/µs

1. Fig. 68 to 79 show dispersion of these parameters.

Table 4. Electrical characteristics when V_{CC} = +3.3V, GND = 0V, T_{amb} = 25°C (unless otherwise specified) (1)

Symbol	Parameter	Min.	Typ.	Max.	Unit
I_{CC}	Supply Current No input signal, no load		5.3	7.2	mA
V_{IO}	Input Offset Voltage (V_{ICM} = V_{CC}/2)		1	5	mV
I_{IB}	Input Bias Current (V_{ICM} = V_{CC}/2)		200	500	nA
P_O	Output Power THD+N = 0.1% Max, F = 1kHz, R_L = 32Ω THD+N = 1% Max, F = 1kHz, R_L = 32Ω THD+N = 0.1% Max, F = 1kHz, R_L = 16Ω THD+N = 1% Max, F = 1kHz, R_L = 16Ω	 23 36	 27 28 38 42		mW
THD + N	Total Harmonic Distortion + Noise (A_v=-1) (1) R_L = 32Ω, P_{out} = 16mW, 20Hz ≤F ≤20kHz R_L = 16Ω, P_{out} = 35mW, 20Hz ≤F ≤20kHz		 0.03 0.03		%
PSRR	Power Supply Rejection Ratio (A_v=1), inputs floating F = 100Hz, Vripple = 100mVpp		 80		dB
I_O	Max Output Current THD +N < 1%, R_L = 16Ω connected between out and V_{CC}/2	64	75		mA
V_O	Output Swing V_{OL}: R_L = 32Ω V_{OH}: R_L = 32Ω V_{OL}: R_L = 16Ω V_{OH}: R_L = 16Ω	 2.85 2.68	 0.3 3 0.45 2.85	 0.38 0.52	V
SNR	Signal-to-Noise Ratio (Filter Type A, A_v=-1) R_L = 32Ω, THD +N < 0.2%, 20Hz ≤F ≤20kHz	92	107		dB
Crosstalk	Channel Separation, R_L = 32Ω F = 1kHz F = 20Hz to 20kHz Channel Separation, R_L = 16Ω F = 1kHz F = 20Hz to 20kHz		 100 80 100 80		dB
C_I	Input Capacitance		1		pF
GBP	Gain Bandwidth Product (R_L = 32Ω)	1.2	2		MHz
SR	Slew Rate, Unity Gain Inverting (R_L = 16Ω)	0.45	0.7		V/µs

1. Fig. 68 to 79 show dispersion of these parameters.

1. All electrical values are guaranteed with correlation measurements at 2V and 5V.

Table 5. Electrical characteristics when V_{CC} = +2.5V, GND = 0V, T_{amb} = 25°C (unless otherwise specified)(2)

Symbol	Parameter	Min.	Typ.	Max.	Unit
I_{CC}	Supply Current No input signal, no load		5.1	7.2	mA
V_{IO}	Input Offset Voltage (V_{ICM} = V_{CC}/2)		1	5	mV
I_{IB}	Input Bias Current (V_{ICM} = V_{CC}/2)		200	500	nA
P_O	Output Power THD+N = 0.1% Max, F = 1kHz, R_L = 32Ω THD+N = 1% Max, F = 1kHz, R_L = 32Ω THD+N = 0.1% Max, F = 1kHz, R_L = 16Ω THD+N = 1% Max, F = 1kHz, R_L = 16Ω	 12.5 17.5	 13.5 14.5 20.5 22		mW
THD + N	Total Harmonic Distortion + Noise (A_v=-1) (1) R_L = 32Ω, P_{out} = 10mW, 20Hz ≤F ≤20kHz R_L = 16Ω, P_{out} = 16mW, 20Hz ≤F ≤20kHz		 0.03 0.03		%
PSRR	Power Supply Rejection Ratio (A_v=1), inputs floating F = 100Hz, Vripple = 100mVpp		 75		dB
I_O	Max Output Current THD +N < 1%, R_L = 16Ω connected between out and V_{CC}/2	45	56		mA
V_O	Output Swing V_{OL}: R_L = 32Ω V_{OH}: R_L = 32Ω V_{OL}: R_L = 16Ω V_{OH}: R_L = 16Ω	 2.14 1.97	 0.25 2.25 0.35 2.15	 0.325 0.45	V
SNR	Signal-to-Noise Ratio (Filter Type A, A_v=-1) R_L = 32Ω, THD +N < 0.2%, 20Hz ≤F ≤20kHz	89	102		dB
Crosstalk	Channel Separation, R_L = 32Ω F = 1kHz F = 20Hz to 20kHz Channel Separation, R_L = 16Ω F = 1kHz F = 20Hz to 20kHz		 100 80 100 80		dB
C_I	Input Capacitance		1		pF
GBP	Gain Bandwidth Product (R_L = 32Ω)	1.2	2		MHz
SR	Slew Rate, Unity Gain Inverting (R_L = 16Ω)	0.45	0.7		V/µs

1. Fig. 68 to 79 show dispersion of these parameters.

2. All electrical values are guaranteed with correlation measurements at 2V and 5V.

Table 6. Electrical characteristics when V_{CC} = +2V, GND = 0V, T_{amb} = 25°C (unless otherwise specified)

Symbol	Parameter	Min.	Typ.	Max.	Unit
I_{CC}	Supply Current No input signal, no load		5	7.2	mA
V_{IO}	Input Offset Voltage (V_{ICM} = V_{CC}/2)		1	5	mV
I_{IB}	Input Bias Current (V_{ICM} = V_{CC}/2)		200	500	nA
P_O	Output Power THD+N = 0.1% Max, F = 1kHz, R_L = 32Ω THD+N = 1% Max, F = 1kHz, R_L = 32Ω THD+N = 0.1% Max, F = 1kHz, R_L = 16Ω THD+N = 1% Max, F = 1kHz, R_L = 16Ω	 7 9.5	 8 9 11.5 13		mW
THD + N	Total Harmonic Distortion + Noise (A_v=-1) (1) R_L = 32Ω, P_{out} = 6.5mW, 20Hz ≤F ≤20kHz R_L = 16Ω, P_{out} = 8mW, 20Hz ≤F ≤20kHz		 0.02 0.025		%
PSRR	Power Supply Rejection Ratio (A_v=1), inputs floating F = 100Hz, Vripple = 100mVpp		 75		dB
I_O	Max Output Current THD +N < 1%, R_L = 16Ω connected between out and V_{CC}/2	 33	 41.5		mA
V_O	Output Swing V_{OL}: R_L = 32Ω V_{OH}: R_L = 32Ω V_{OL}: R_L = 16Ω V_{OH}: R_L = 16Ω	 1.67 1.53	 0.24 1.73 0.33 1.63	 0.295 0.41	V
SNR	Signal-to-Noise Ratio (Filter Type A, A_v=-1) R_L = 32Ω, THD +N < 0.2%, 20Hz ≤F ≤20kHz	 88	 101		dB
Crosstalk	Channel Separation, R_L = 32Ω F = 1kHz F = 20Hz to 20kHz Channel Separation, R_L = 16Ω F = 1kHz F = 20Hz to 20kHz		 100 80 100 80		dB
C_I	Input Capacitance		1		pF
GBP	Gain Bandwidth Product (R_L = 32Ω)	1.2	2		MHz
SR	Slew Rate, Unity Gain Inverting (R_L = 16Ω)	0.42	0.65		V/µs

1. Fig. 68 to 79 show dispersion of these parameters.

Table 7. Components description

Components	Functional Description
Rin	Inverting input resistor which sets the closed loop gain in conjunction with Rfeed. This resistor also forms a high pass filter with Cin (fc = 1 / (2 x Pi x Rin x Cin))
Cin	Input coupling capacitor which blocks the DC voltage at the amplifier input terminal
Rfeed	Feed back resistor which sets the closed loop gain in conjunction with Rin
Cs	Supply Bypass capacitor which provides power supply filtering
Cb	Bypass capacitor which provides half supply filtering
Cout	Output coupling capacitor which blocks the DC voltage at the load input terminal This capacitor also forms a high pass filter with RL (fc = 1 / (2 x Pi x RL x Cout))
Rpol	These 2 resistors form a voltage divider which provide a DC biasing voltage (Vcc/2) for the 2 amplifiers.
Av	Closed loop gain = -Rfeed / Rin

Table 8. Index of graphics

Description	Figure	Page
Open loop gain and phase vs. frequency response	*Figure 1* to *10*	*Page 9* to *10*
Phase and Gain Margin vs. Power Supply Voltage	*Figure 11* to *20*	*Page 10* to *12*
Output power vs. power supply voltage	*Figure 21* to *23*	*Page 12*
Output power vs. load resistance	*Figure 24* to *27*	*Page 12* to *13*
Power dissipation vs. output power	*Figure 28* to *31*	*Page 13* to *14*
Power derating vs. ambient temperature	*Figure 32*	*Page 14*
Current consumption vs. power supply voltage	*Figure 33*	*Page 14*
Power supply rejection ratio vs. frequency	*Figure 34*	*Page 14*
THD + N vs. output power	*Figure 35* to *49*	*Page 14* to *17*
THD + N vs. frequency	*Figure 50* to *54*	*Page 17*
Signal to noise ratio	*Figure 55* to *58*	*Page 18*
Equivalent input noise voltage vs. frequency	*Figure 59*	*Page 18*
Output voltage swing vs. power supply	*Figure 60*	*Page 18*
Crosstalk vs. frequency	*Figure 61* to *65*	*Page 19*
Lower cut off frequency vs. output capacitor	*Figure 66*	*Page 19*
Lower cut off frequency vs. input capacitor	*Figure 67*	*Page 20*
Typical distribution of TDH + N	*Figure 68* to *79*	*Page 20* to *22*

Figure 1. Open loop gain and phase vs. frequency response

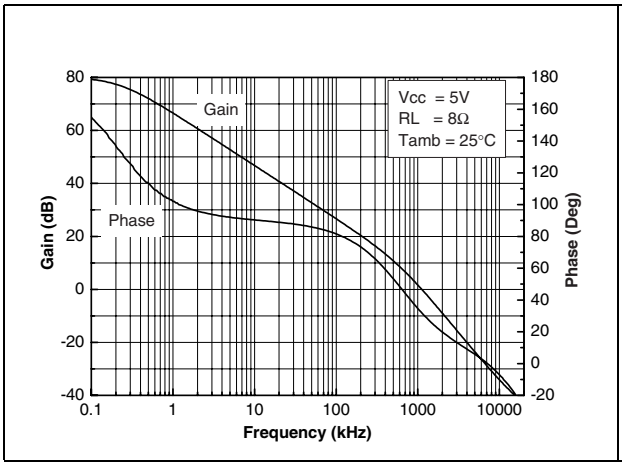


Figure 2. Open loop gain and phase vs. frequency response

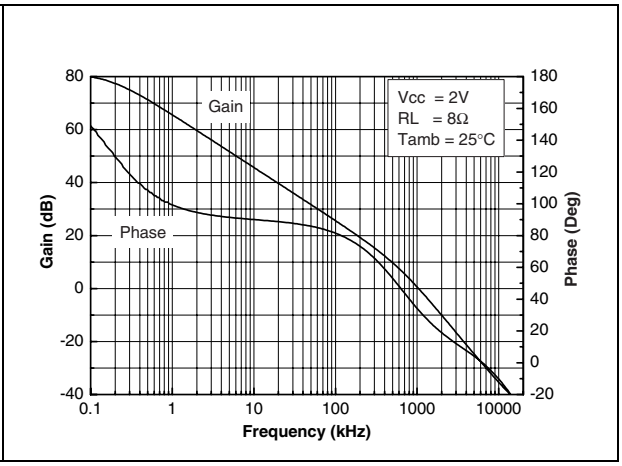


Figure 3. Open loop gain and phase vs. frequency response

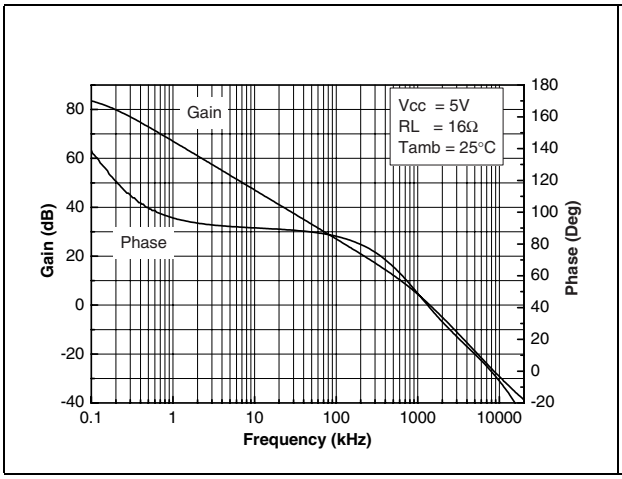


Figure 4. Open loop gain and phase vs. frequency response

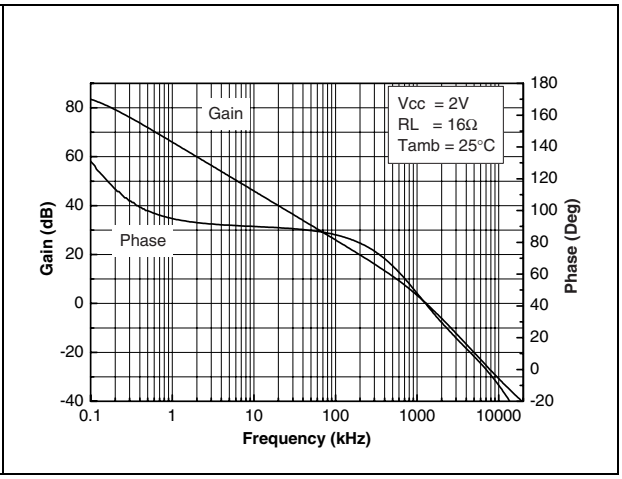


Figure 5. Open loop gain and phase vs. frequency response

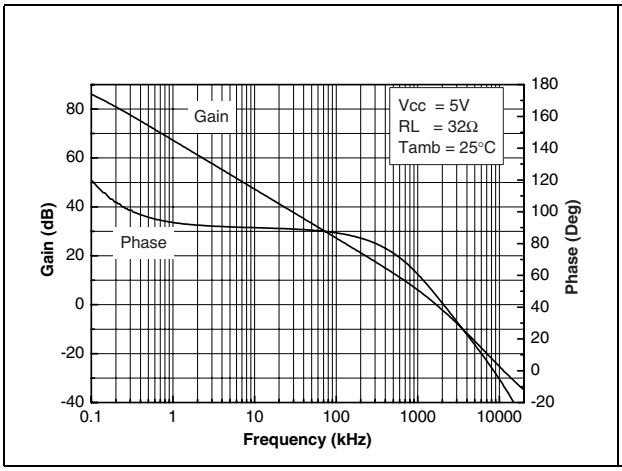


Figure 6. Open loop gain and phase vs. frequency response

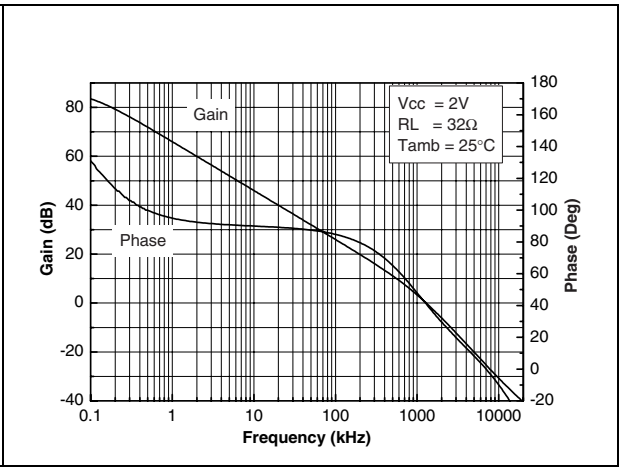


Figure 7. Open loop gain and phase vs. frequency response

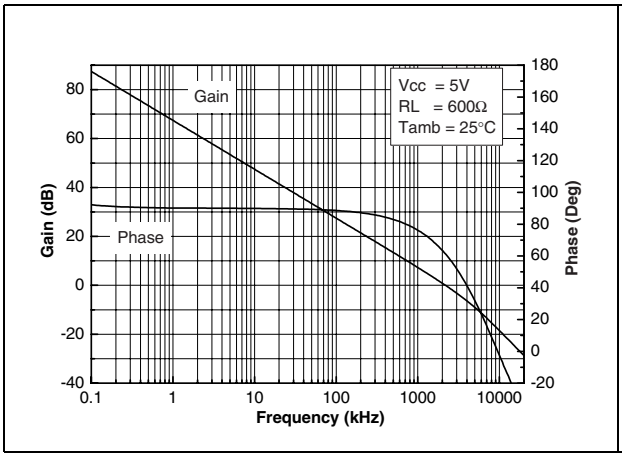


Figure 8. Open loop gain and phase vs. frequency response

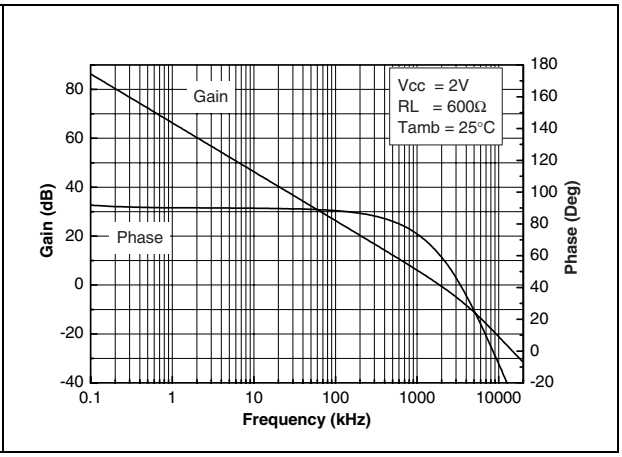


Figure 9. Open loop gain and phase vs. frequency response

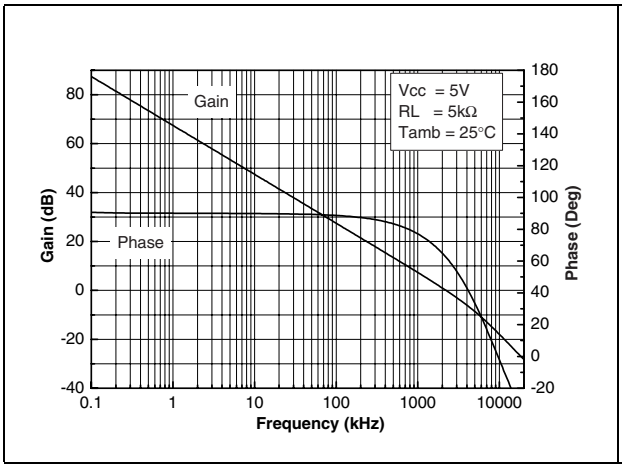


Figure 10. Open loop gain and phase vs. frequency response

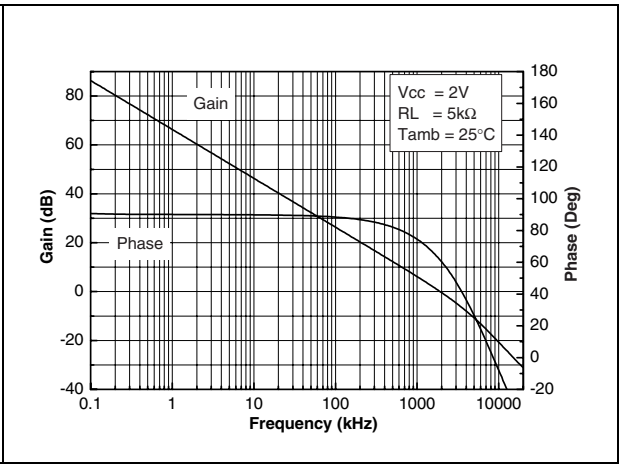


Figure 11. Phase margin vs. power supply voltage

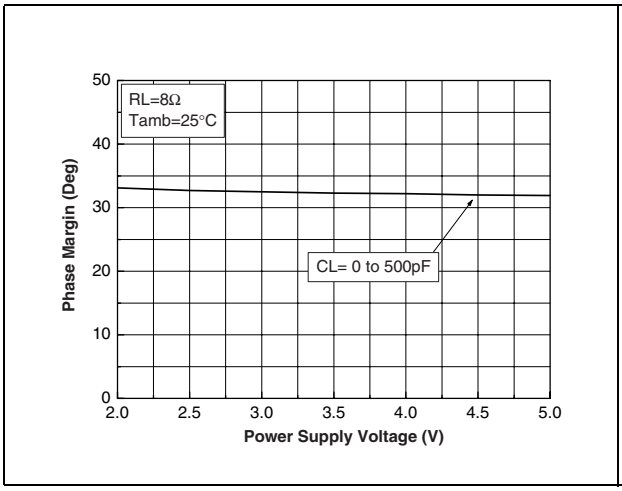


Figure 12. Phase margin vs. power supply voltage

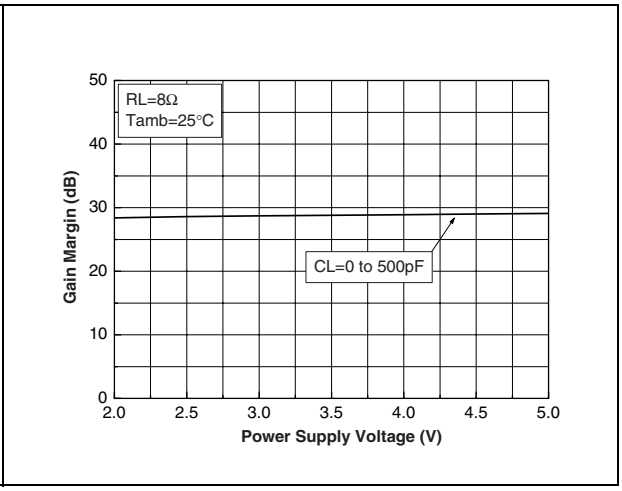


Figure 13. Phase margin vs. power supply voltage

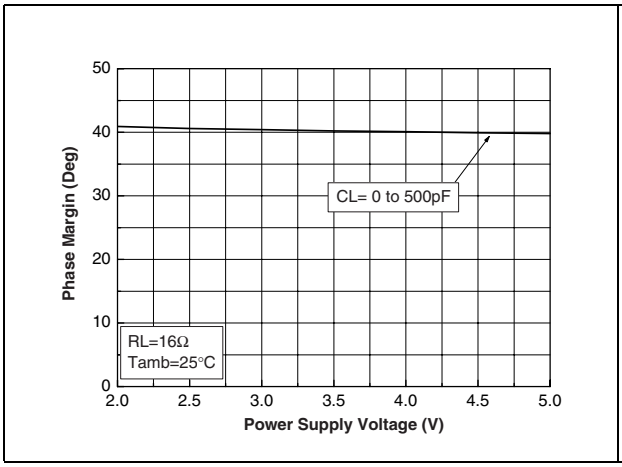


Figure 14. Gain margin vs. power supply voltage

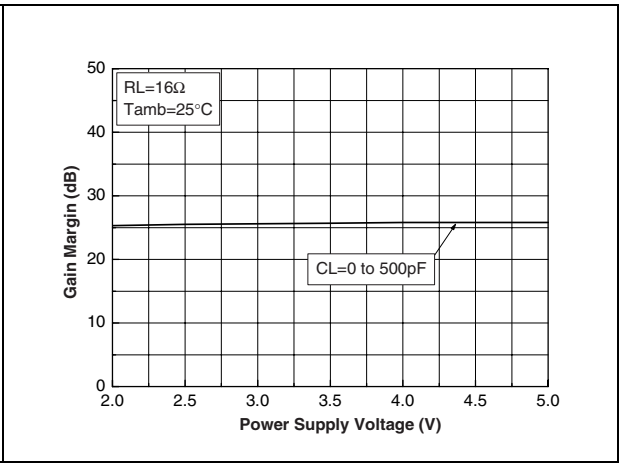


Figure 15. Phase margin vs. power supply voltage

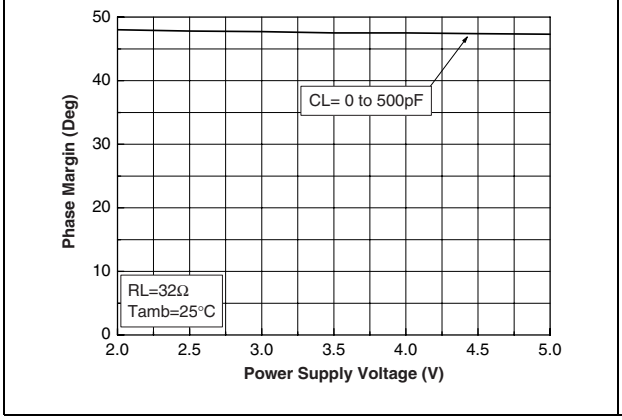


Figure 16. Gain margin vs. power supply voltage

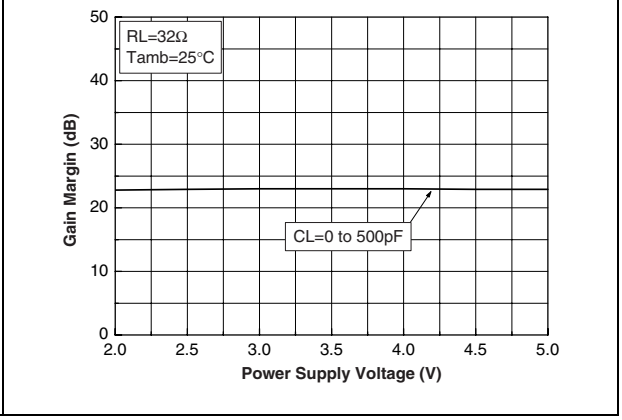


Figure 17. Phase margin vs. power supply voltage

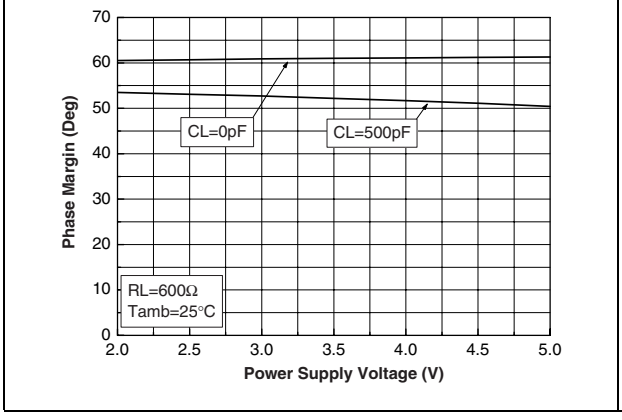


Figure 18. Gain margin vs. power supply voltage

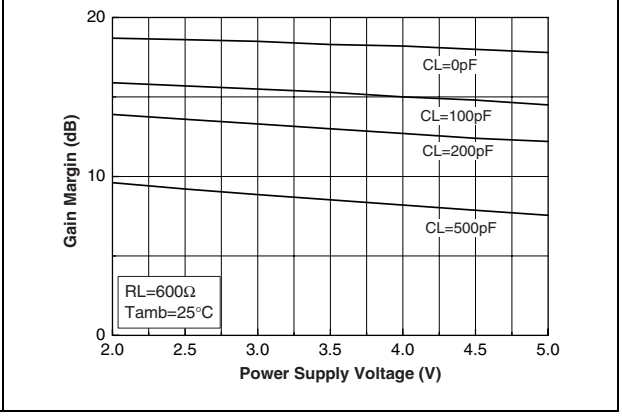


Figure 19. Phase margin vs. power supply voltage

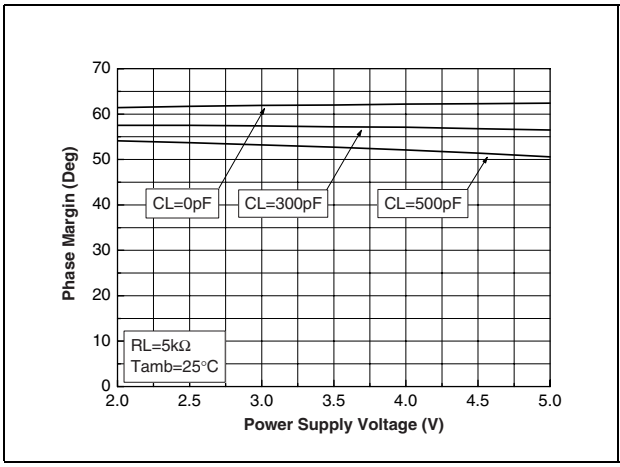


Figure 20. Gain margin vs. power supply voltage

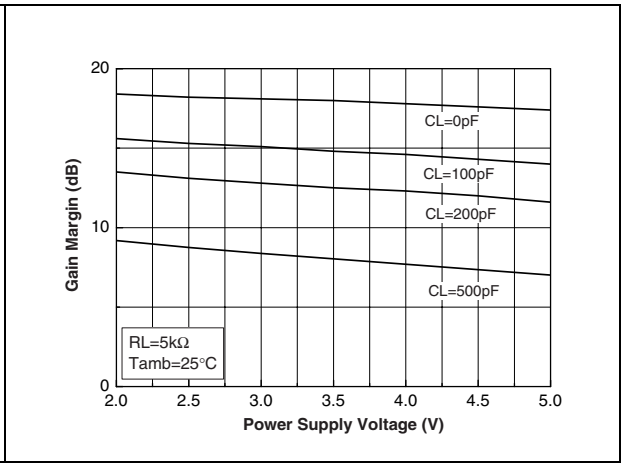


Figure 21. Output power vs. power supply voltage

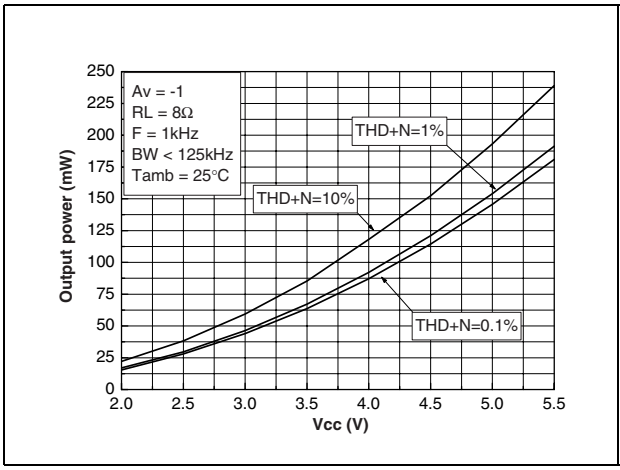


Figure 22. Output power vs. power supply voltage

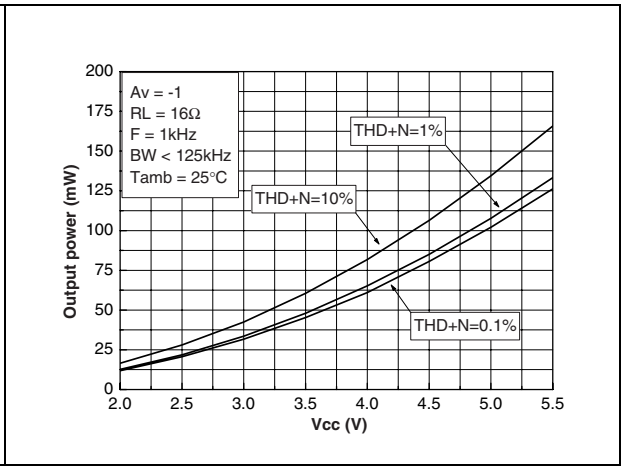


Figure 23. Output power vs. power supply voltage

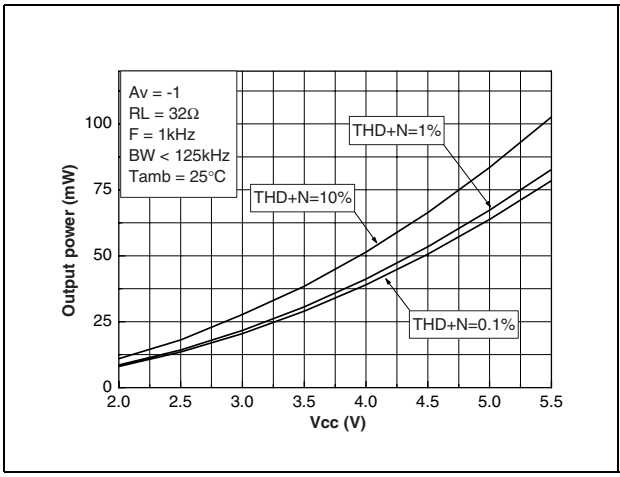


Figure 24. Output power vs. load resistance

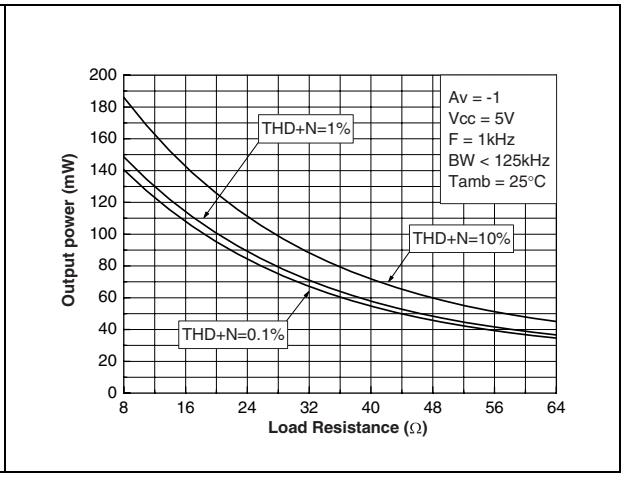


Figure 25. Output power vs. load resistance

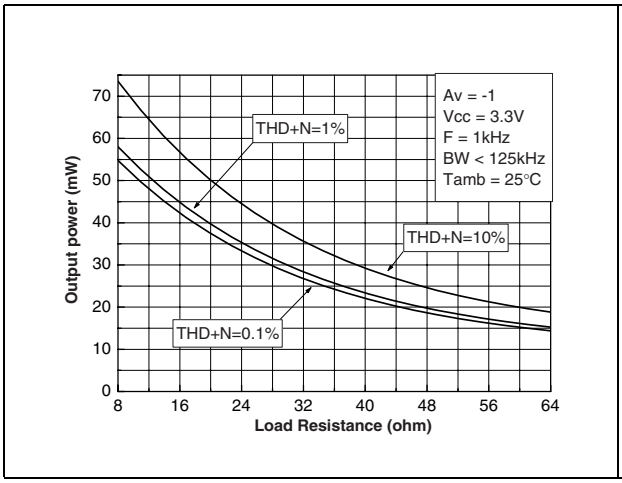


Figure 26. Output power vs. load resistance

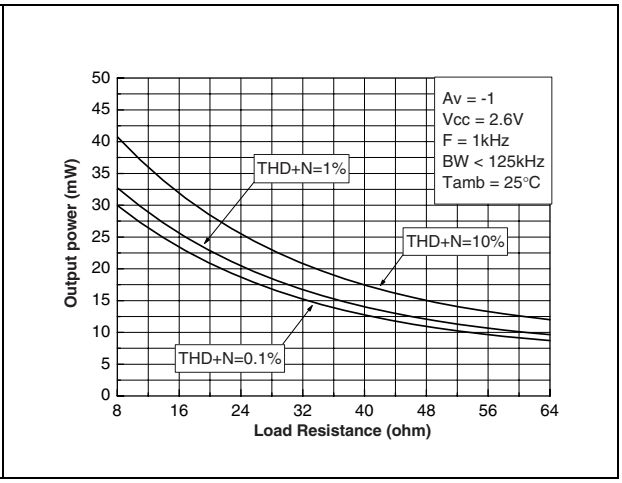


Figure 27. Output power vs. load resistance

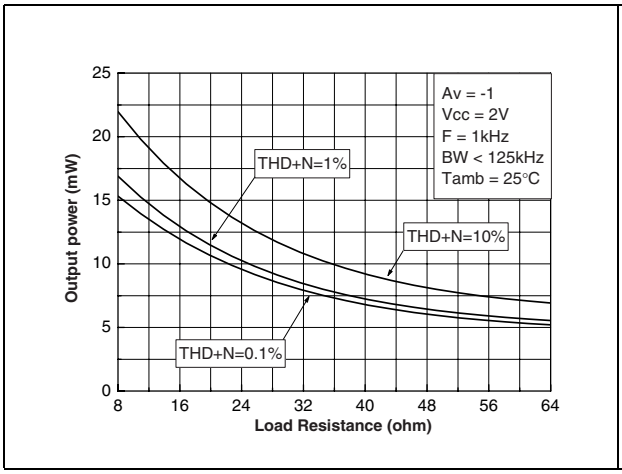


Figure 28. Power dissipation vs. output power

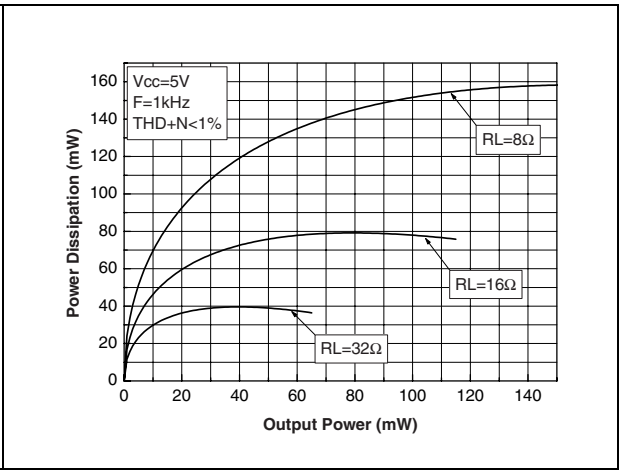


Figure 29. Power dissipation vs. output power

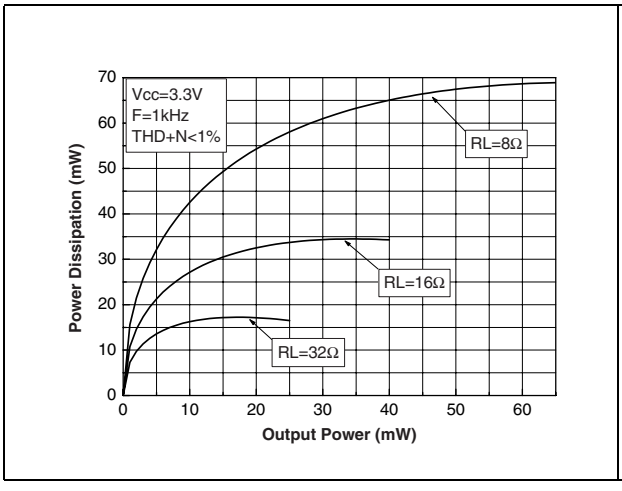


Figure 30. Power dissipation vs. output power

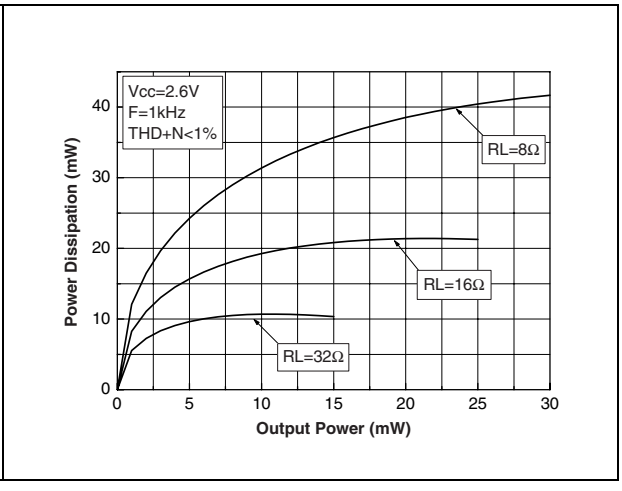


Figure 31. Power dissipation vs. output power

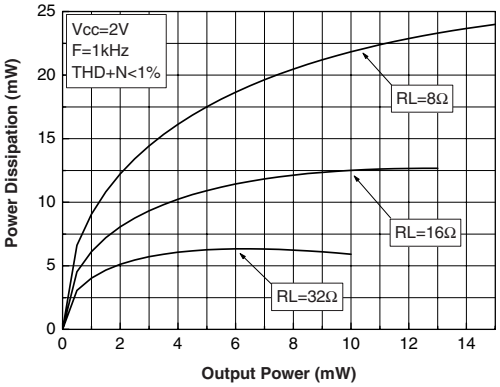


Figure 32. Power derating vs. ambient temperature

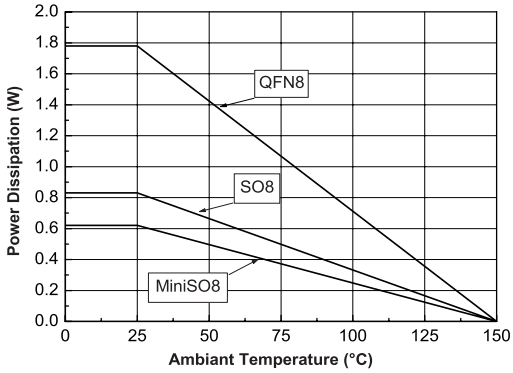


Figure 33. Current consumption vs. power supply voltage

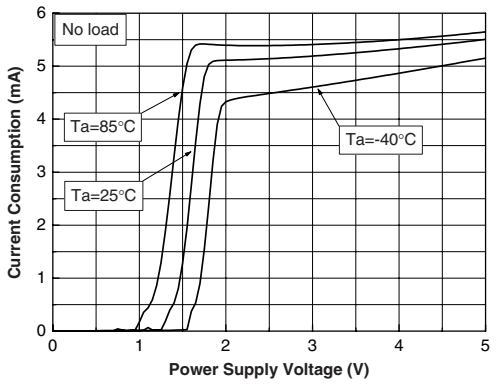


Figure 34. Power supply rejection ratio vs. frequency

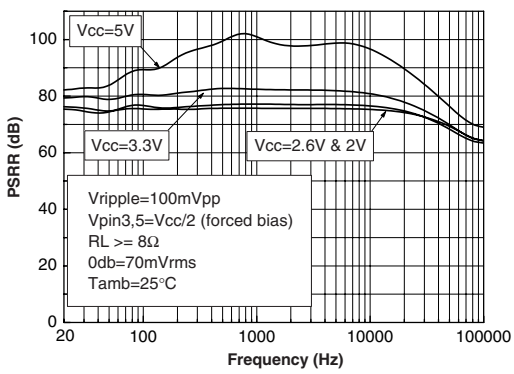


Figure 35. THD + N vs. output power

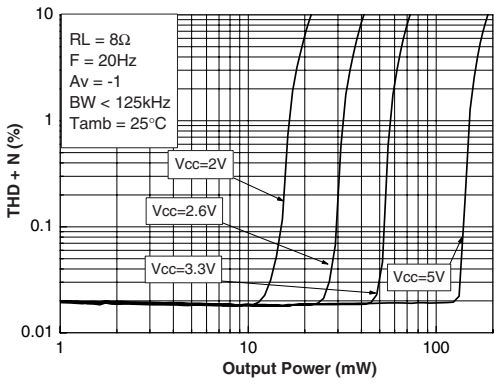


Figure 36. THD + N vs. output power

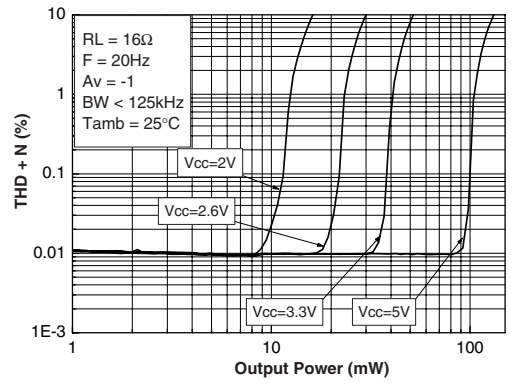


Figure 37. THD + N vs. output power

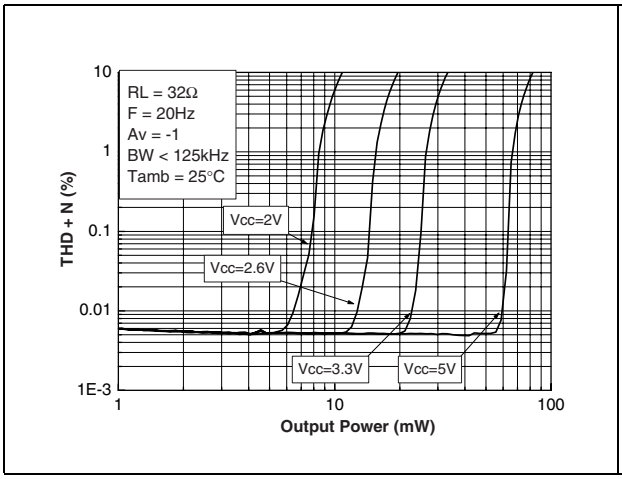


Figure 38. THD + N vs. output power

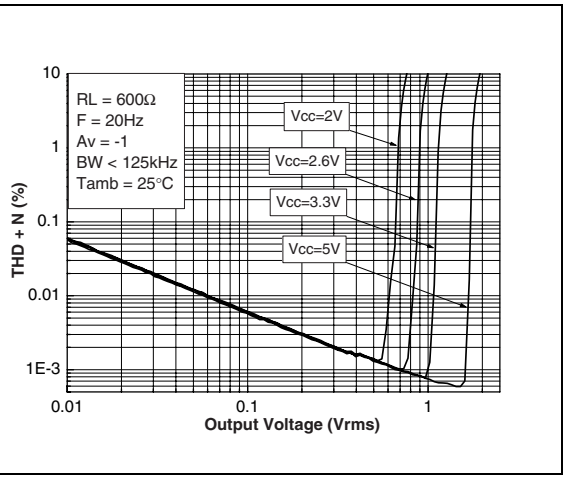


Figure 39. THD + N vs. output power

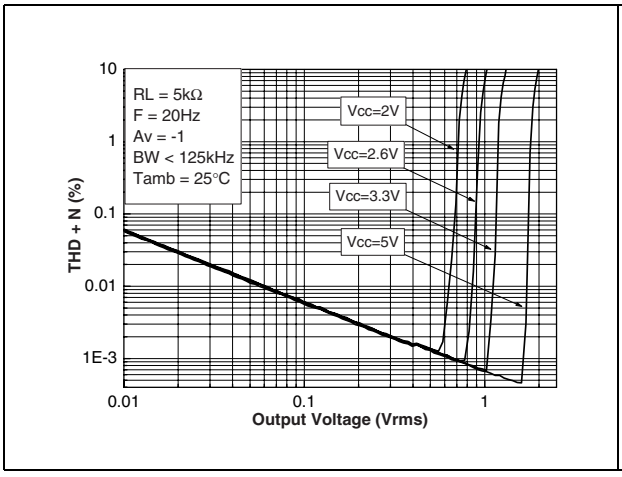


Figure 40. THD + N vs. output power

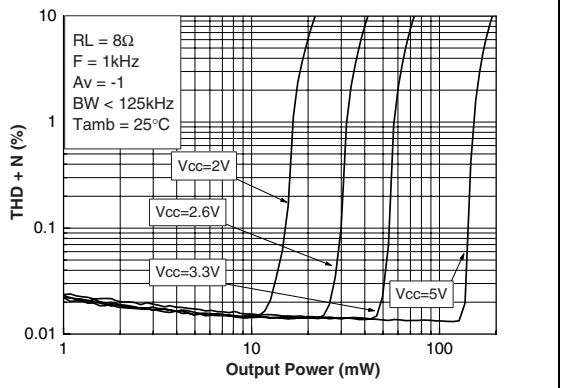


Figure 41. THD + N vs. output power

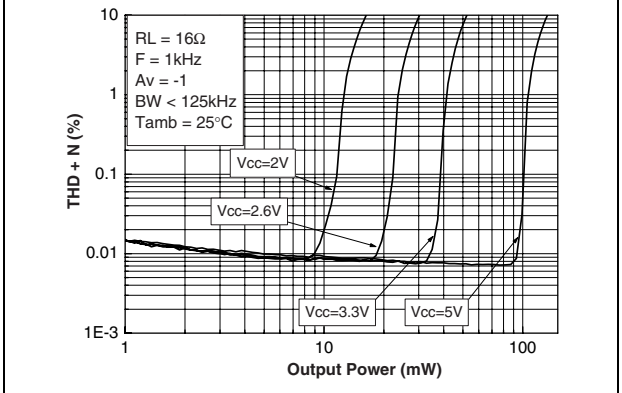


Figure 42. THD + N vs. output power

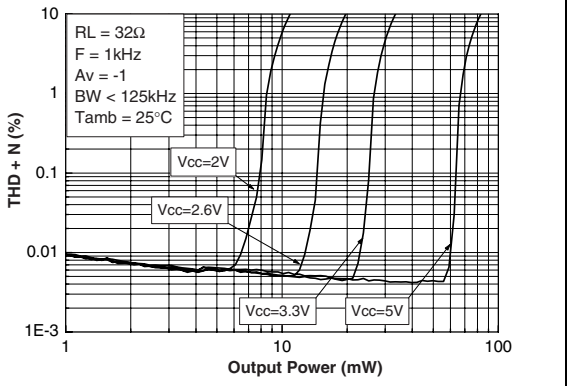


Figure 43. THD + N vs. output power

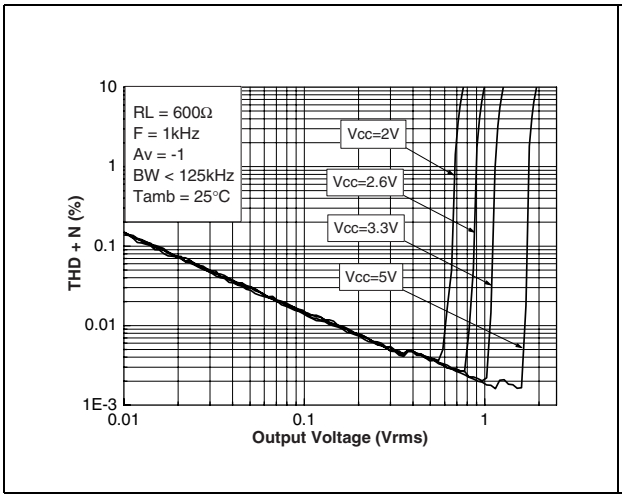


Figure 44. THD + N vs. output power

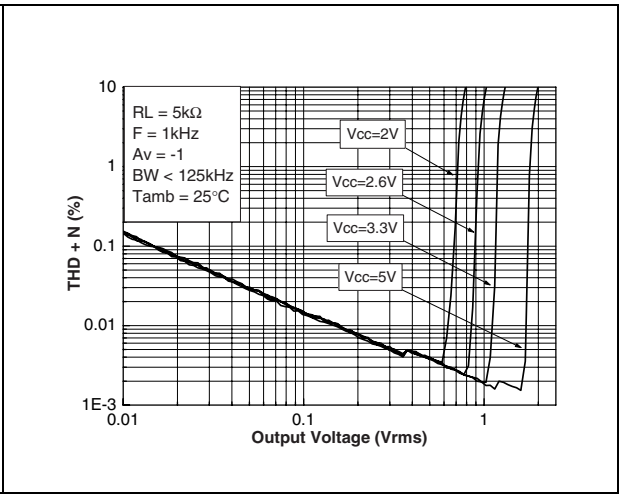


Figure 45. THD + N vs. output power

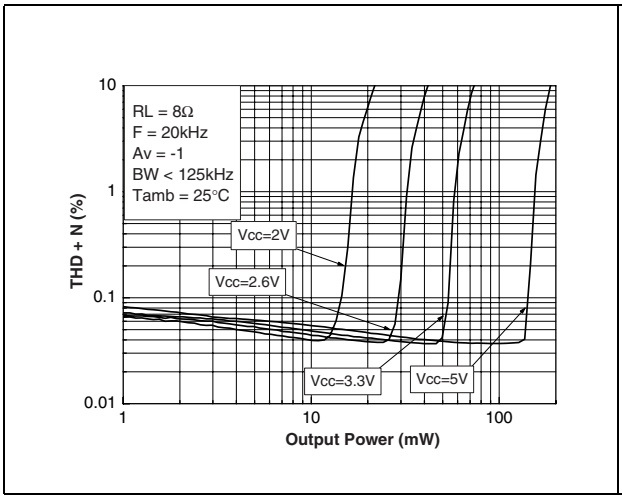


Figure 46. THD + N vs. output power

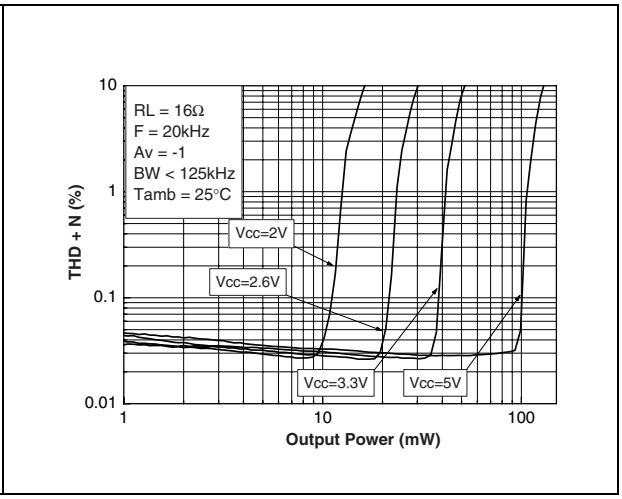


Figure 47. THD + N vs. output power

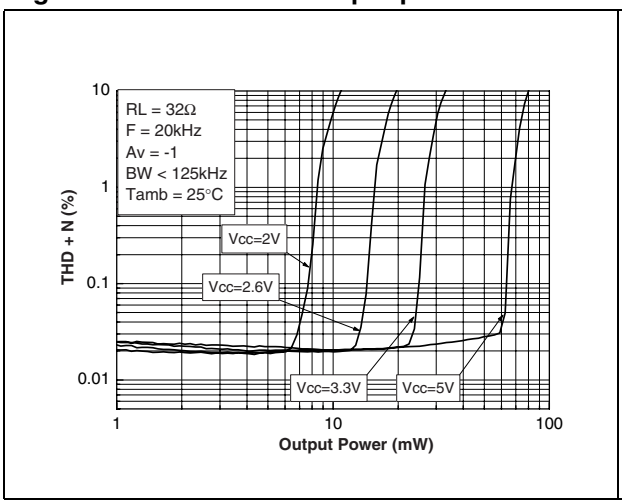


Figure 48. THD + N vs. output power

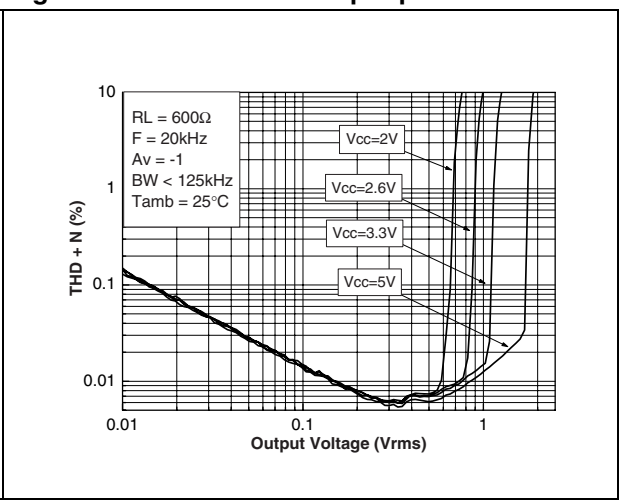


Figure 49. THD + N vs. output power

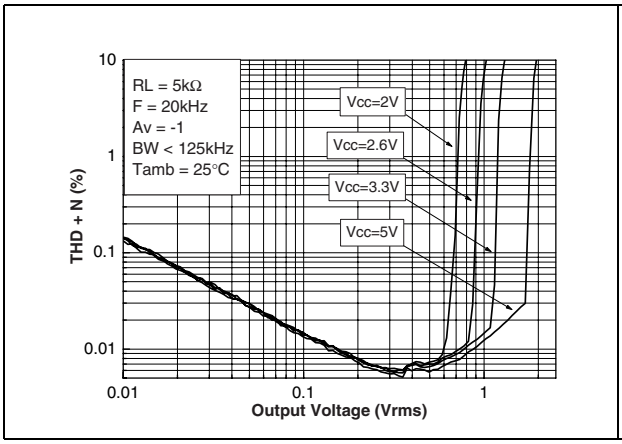


Figure 50. THD + N vs. frequency

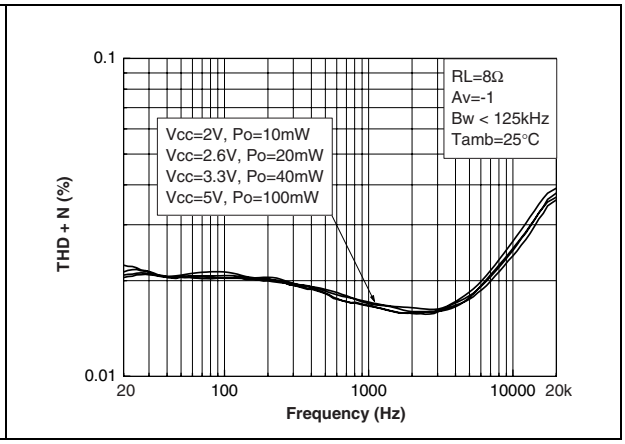


Figure 51. THD + N vs. frequency

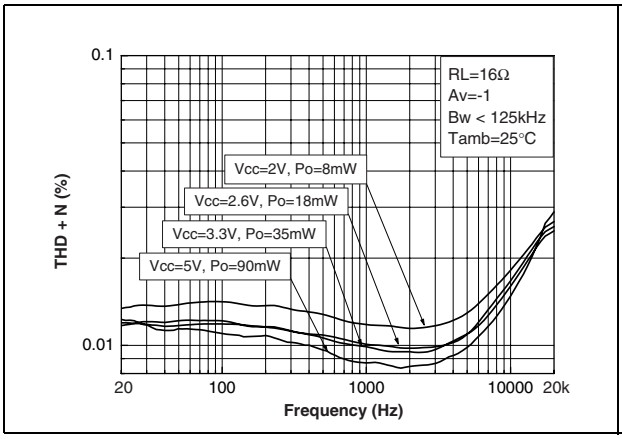


Figure 52. THD + N vs. frequency

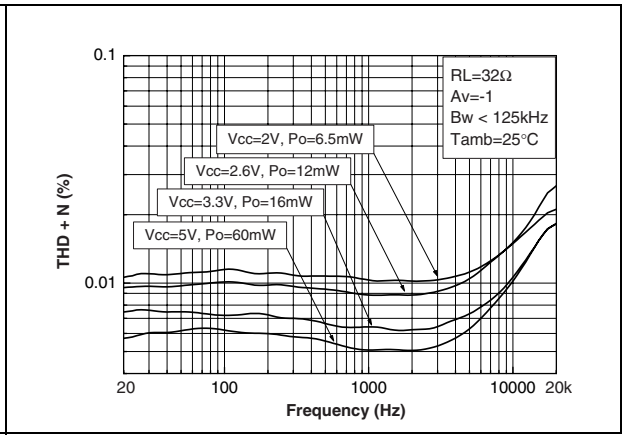


Figure 53. THD + N vs. frequency

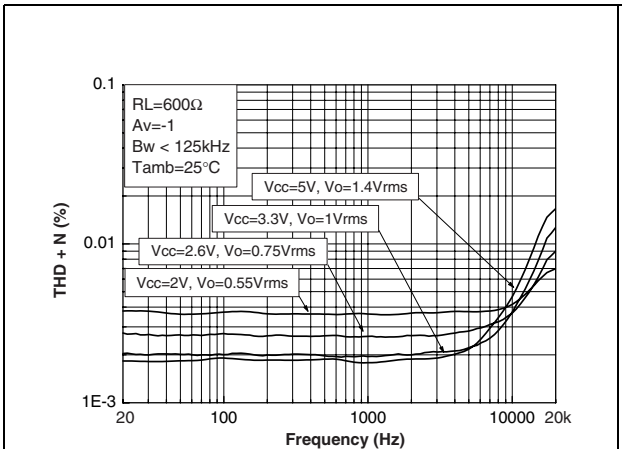


Figure 54. THD + N vs. frequency

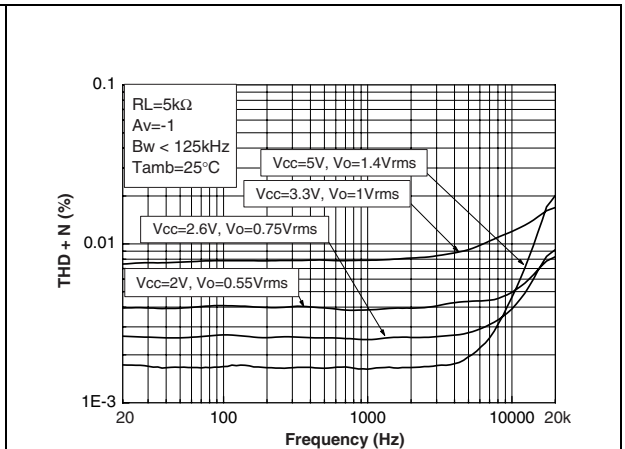


Figure 55. Signal to noise ratio vs. power supply with unweighted filter (20Hz to 20kHz)

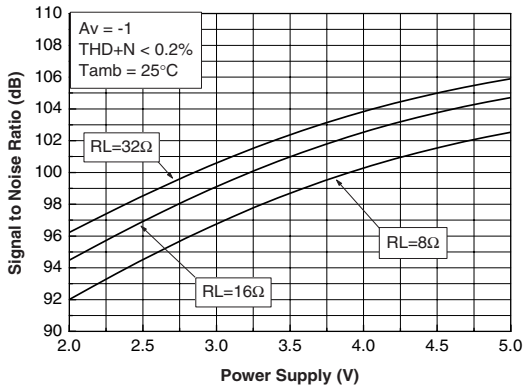


Figure 56. Signal to noise ratio vs. power supply with unweighted filter (20Hz to 20kHz)

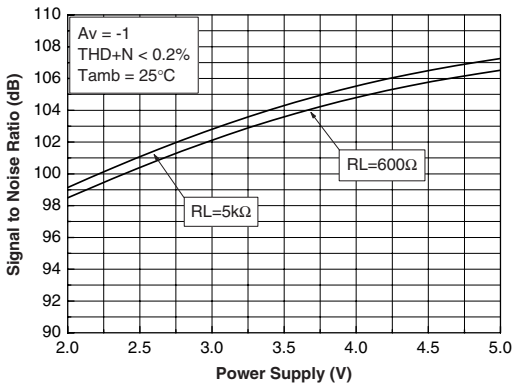


Figure 57. Signal to noise ratio vs. power supply with A weighted filter

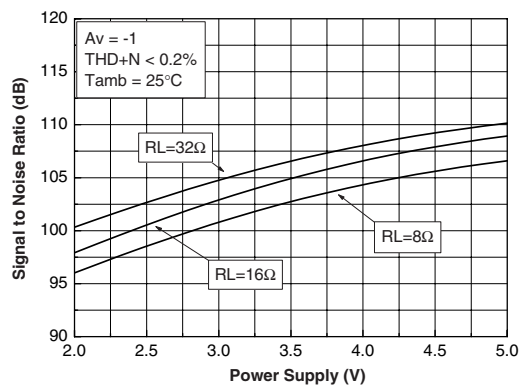


Figure 58. Signal to noise ratio vs. power supply with A weighted filter

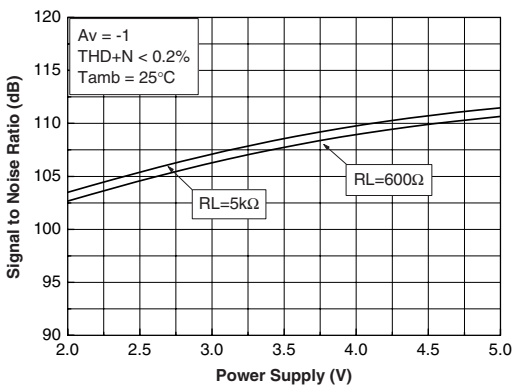


Figure 59. Equivalent input noise voltage vs. frequency

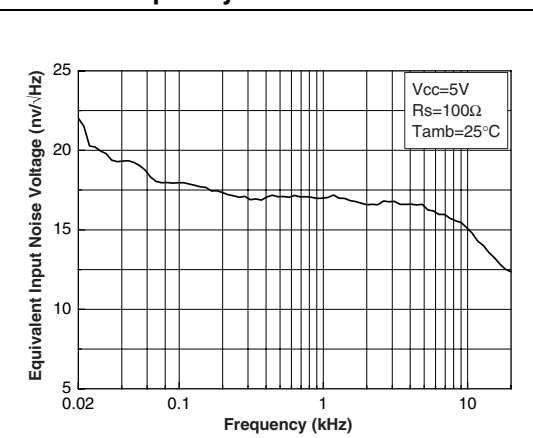


Figure 60. Output voltage swing vs. power supply

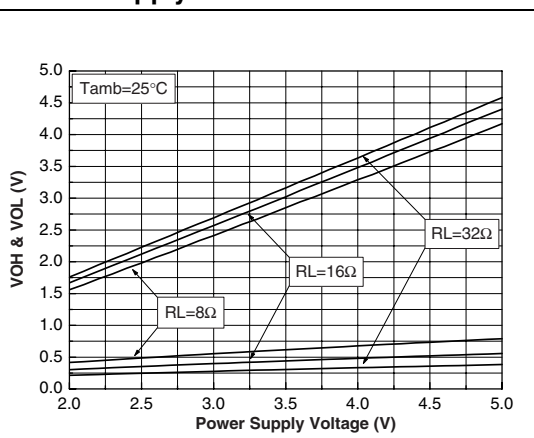


Figure 61. Crosstalk vs. frequency

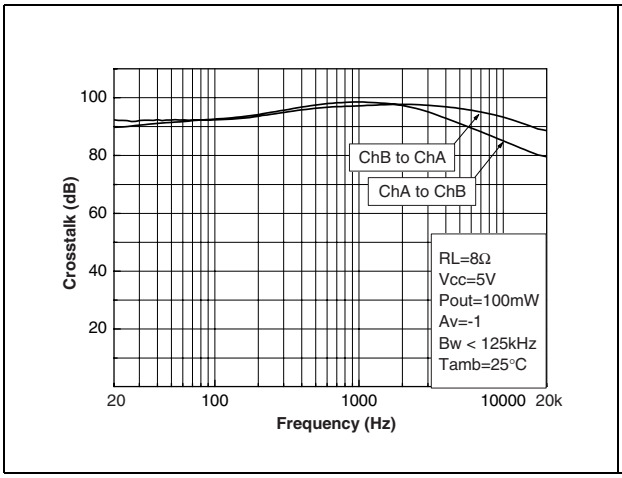


Figure 62. Crosstalk vs. frequency

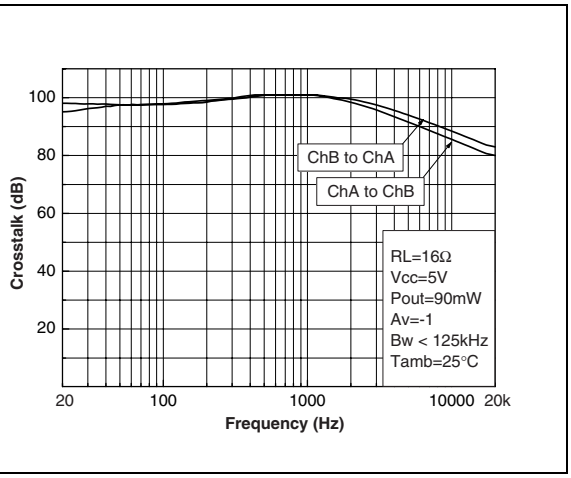


Figure 63. Crosstalk vs. frequency

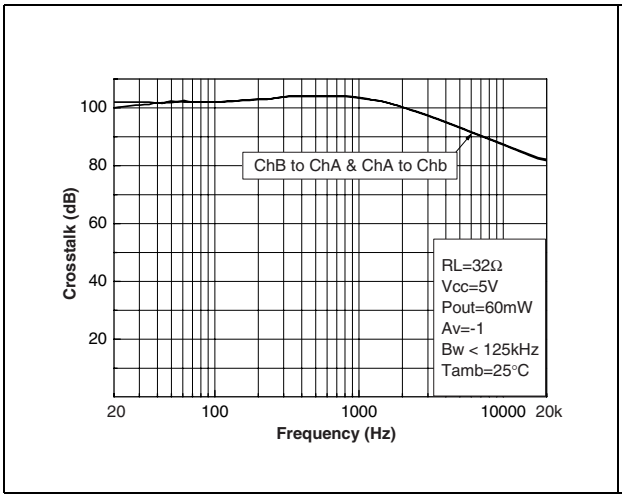


Figure 64. Crosstalk vs. frequency

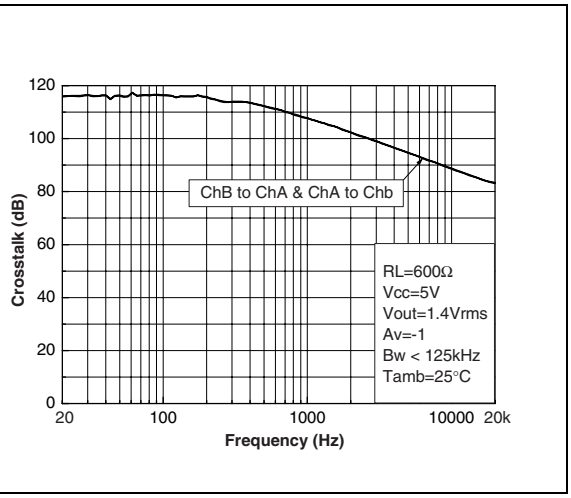


Figure 65. Crosstalk vs. frequency

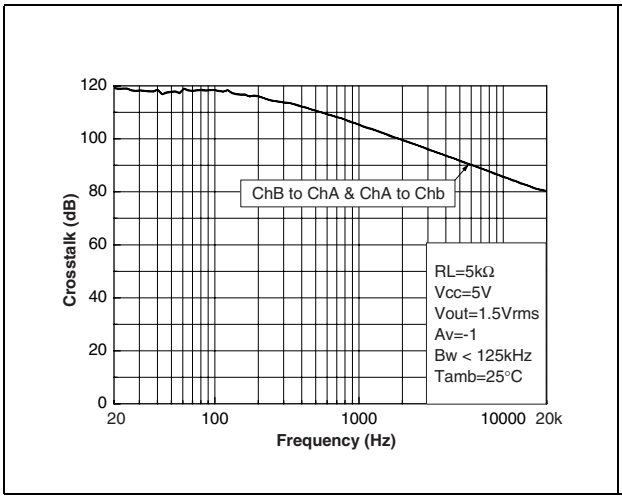


Figure 66. Lower cut off frequency vs. output capacitor

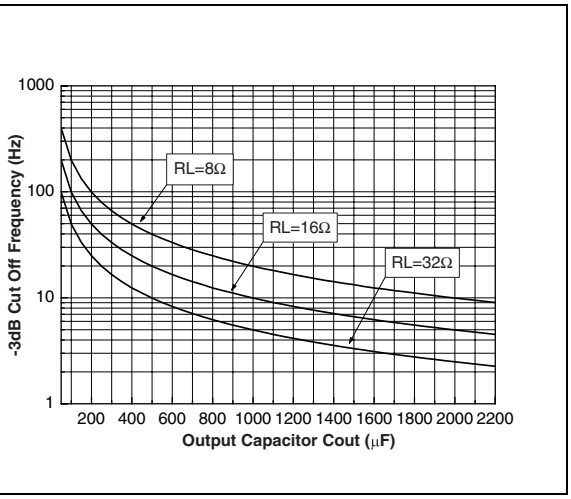


Figure 67. Lower cut off frequency vs. input capacitor

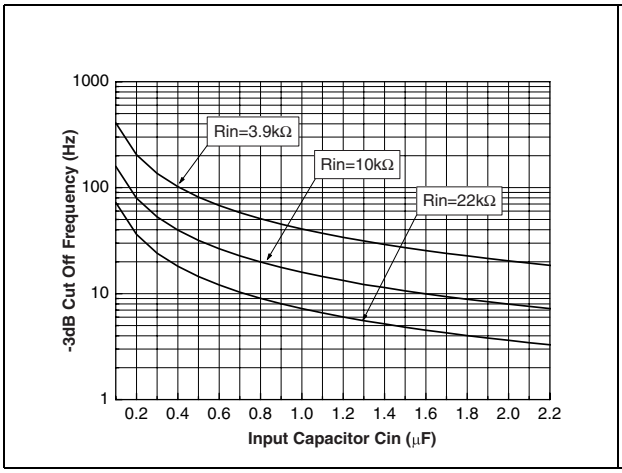


Figure 68. Typical distribution of TDH + N

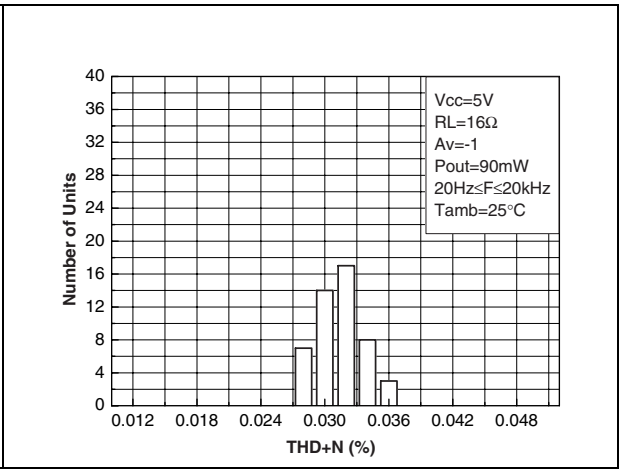


Figure 69. Best case distribution of THD + N

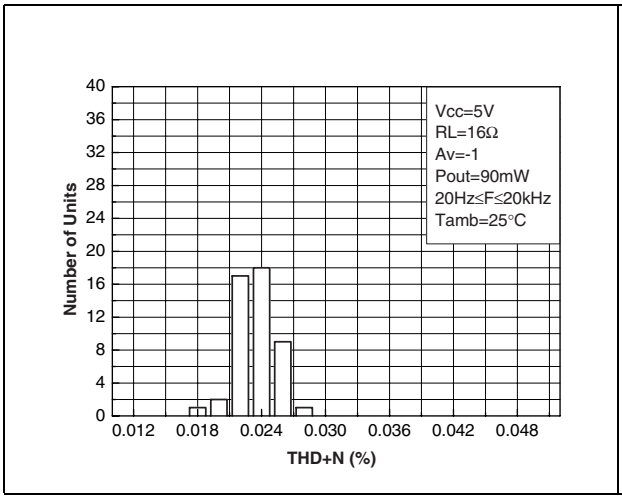


Figure 70. Worst case distribution of THD + N

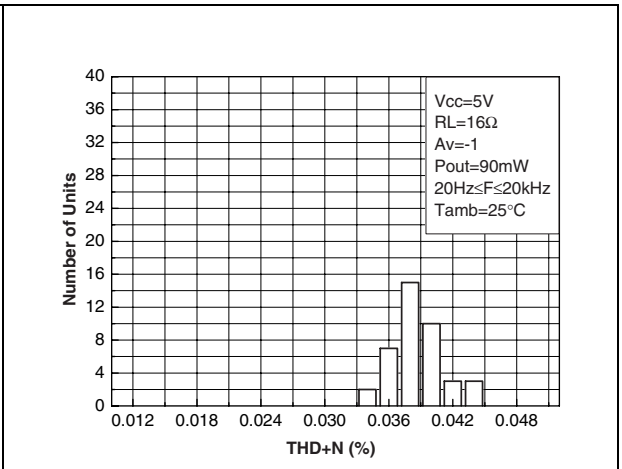


Figure 71. Typical distribution of TDH + N

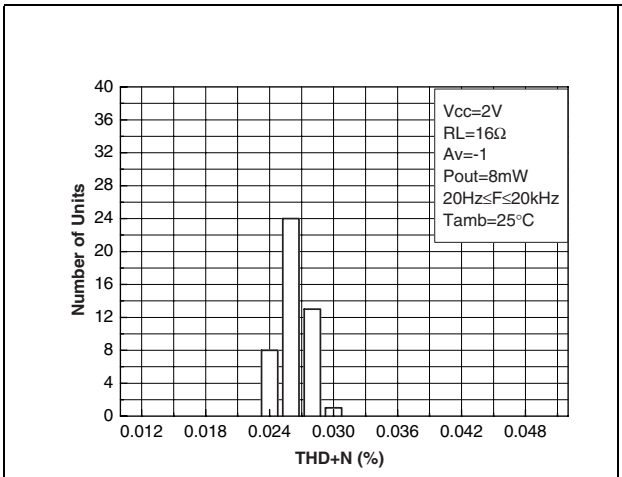


Figure 72. Best case distribution of THD + N

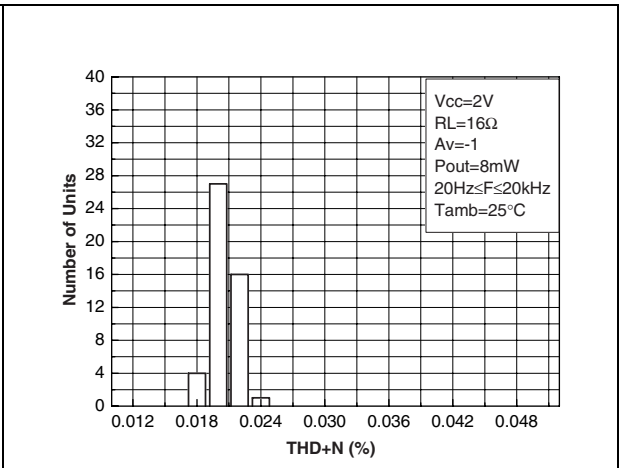


Figure 73. Worst case distribution of THD + N

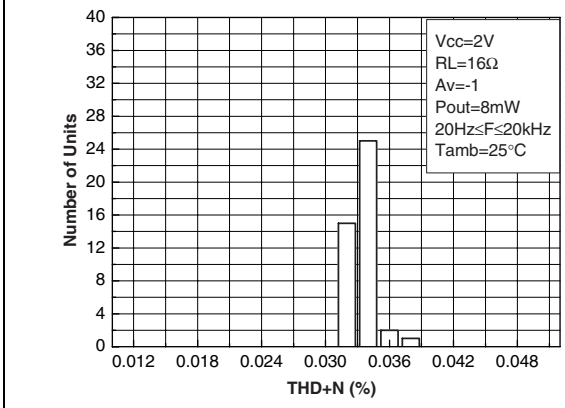


Figure 74. Typical distribution of TDH + N

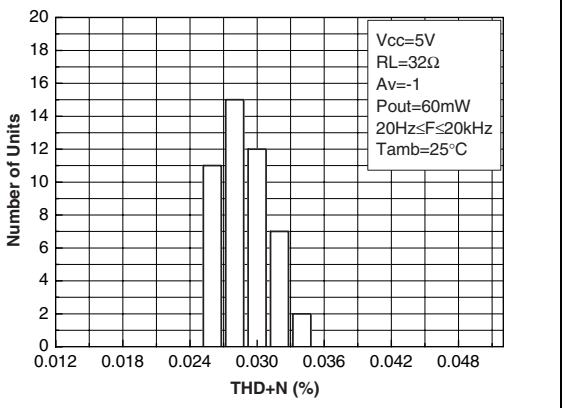


Figure 75. Best case distribution of THD + N

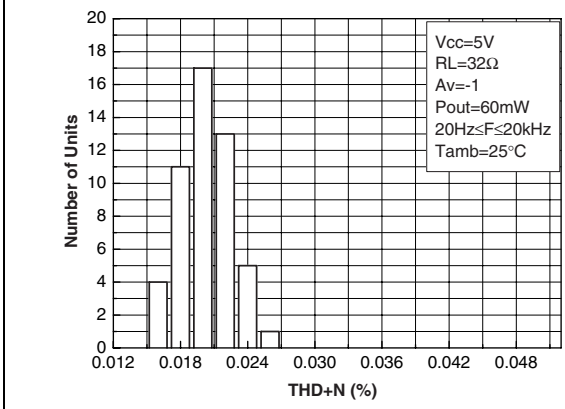


Figure 76. Worst case distribution of THD + N

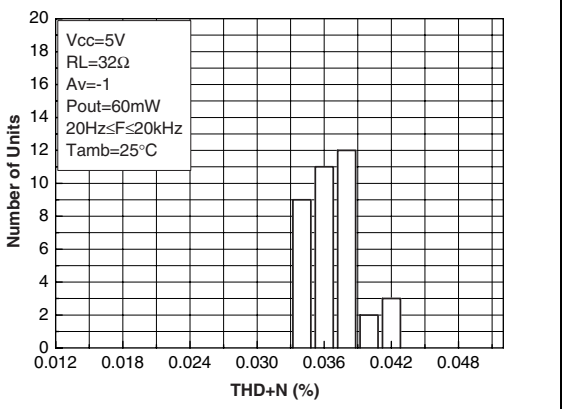


Figure 77. Typical distribution of TDH + N

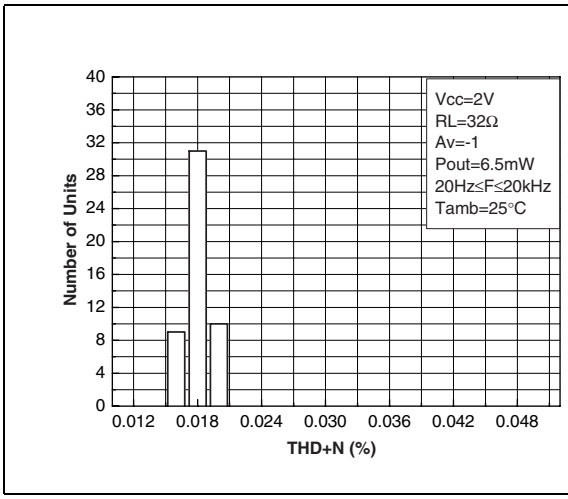


Figure 78. Best case distribution of THD + N


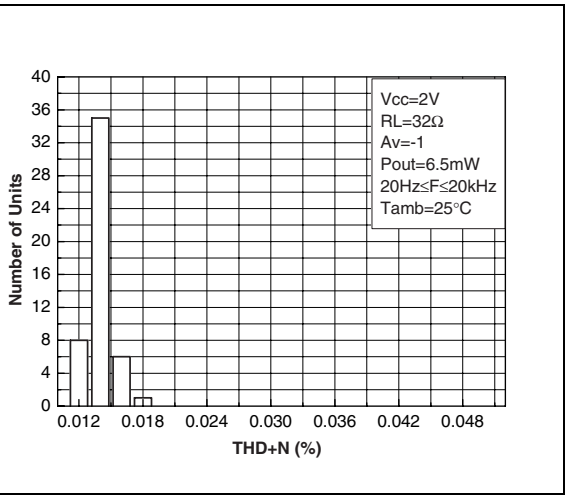


Figure 79. Worst case distribution of THD + N

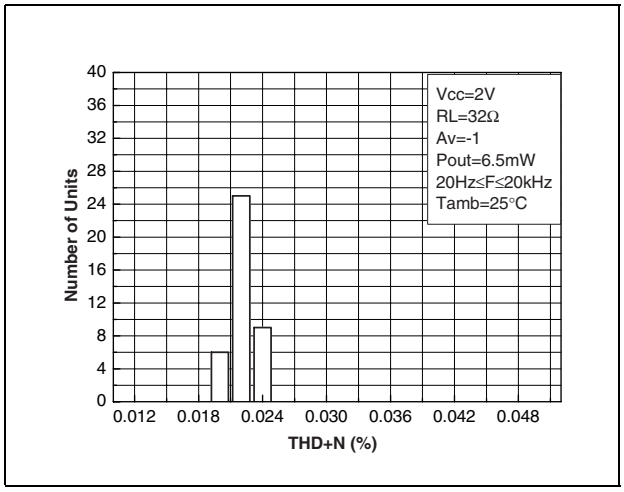


3 Package Mechanical Data

In order to meet environmental requirements, ST offers these devices in ECOPACK® packages. These packages have a Lead-free second level interconnect. The category of second level interconnect is marked on the package and on the inner box label, in compliance with JEDEC Standard JESD97. The maximum ratings related to soldering conditions are also marked on the inner box label. ECOPACK is an ST trademark. ECOPACK specifications are available at: www.st.com.

3.1 SO-8 Package


SO-8 MECHANICAL DATA

DIM.	mm.			inch		
	MIN.	TYP	MAX.	MIN.	TYP.	MAX.
A	1.35		1.75	0.053		0.069
A1	0.10		0.25	0.04		0.010
A2	1.10		1.65	0.043		0.065
B	0.33		0.51	0.013		0.020
C	0.19		0.25	0.007		0.010
D	4.80		5.00	0.189		0.197
E	3.80		4.00	0.150		0.157
e		1.27			0.050	
H	5.80		6.20	0.228		0.244
h	0.25		0.50	0.010		0.020
L	0.40		1.27	0.016		0.050
k	8° (max.)					
ddd			0.1			0.04

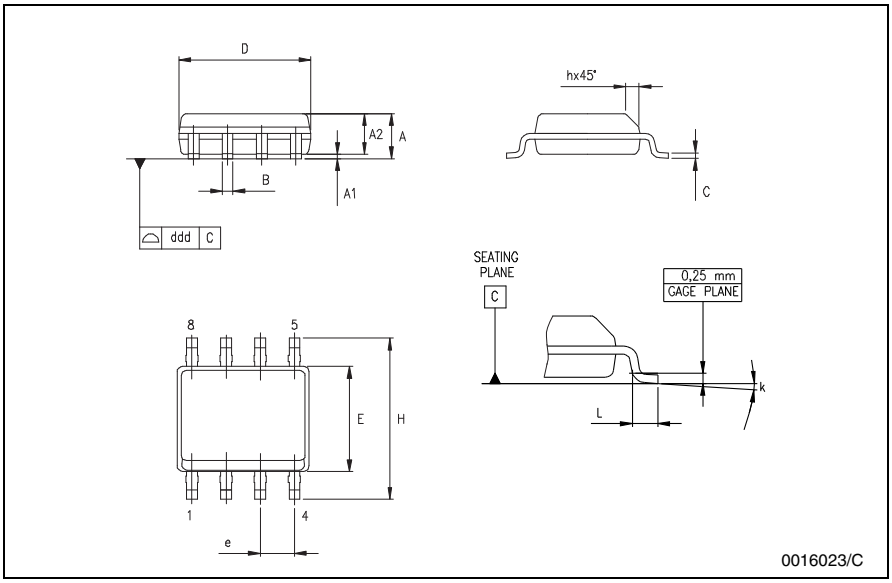


3.2 MiniSO-8 Package

miniSO-8 MECHANICAL DATA						
DIM.	mm.			inch		
	MIN.	TYP	MAX.	MIN.	TYP.	MAX.
A			1.1			0.043
A1	0.05	0.10	0.15	0.002	0.004	0.006
A2	0.78	0.86	0.94	0.031	0.031	0.037
b	0.25	0.33	0.40	0.010	0.13	0.013
c	0.13	0.18	0.23	0.005	0.007	0.009
D	2.90	3.00	3.10	0.114	0.118	0.122
E	4.75	4.90	5.05	0.187	0.193	0.199
E1	2.90	3.00	3.10	.0114	0.118	0.122
e		0.65			0.026	
K	0°		6°	0°		6°
L	0.40	0.55	0.70	0.016	0.022	0.028
L1			0.10			0.004

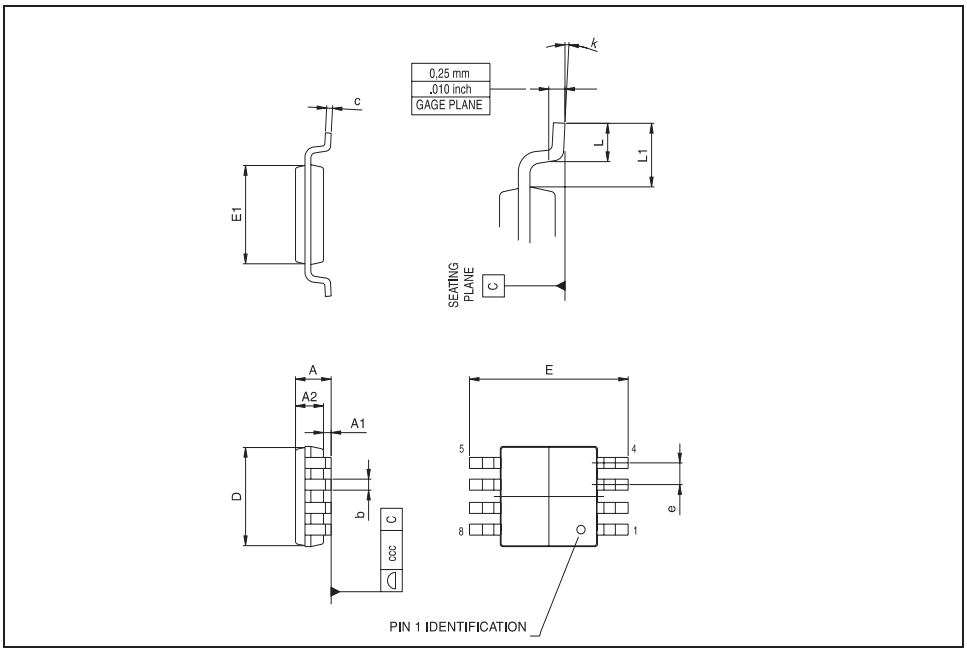

3.3 DFN8 Package

DFN8 (3x3) MECHANICAL DATA						
DIM.	mm.			inch		
	MIN.	TYP	MAX.	MIN.	TYP.	MAX.
A	0.80	0.90	1.00	31.5	35.4	39.4
A1		0.02	0.05		0.8	2.0
A2		0.70			27.6	
A3		0.20			7.9	
b	0.18	0.23	0.30	7.1	9.1	11.8
D	2.875	3.00	3.125		118.1	
D2	2.23	2.38	2.48	87.8	93.7	97.7
E	2.875	3.00	3.125		118.1	
E2	1.49	1.64	1.74	58.7	64.6	68.5
e		0.50			19.7	
L	0.30	0.40	0.50	11.8	15.7	19.7

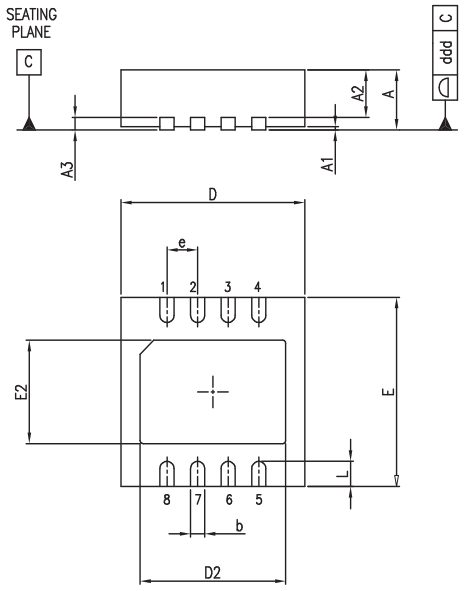

4 Revision history

Date	Revision	Changes
June 2003	1	Initial release.
Nov. 2005	2	The following changes were made in this revision: – Lead temperature for lead-free added see *Table 1: Key parameters and their absolute maximum ratings on page 2*. – Formatting changes throughout.

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics.
All other names are the property of their respective owners

© 2005 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com