19-2874; Rev 1; 7/03

MAXIM

SOT23, Dual, Precision, 1.8V, Nanopower Comparators With/Without Reference

General Description

The single MAX9015/MAX9016 and dual MAX9017–MAX9020 nanopower comparators in space-saving SOT23 packages feature Beyond-the-Rails™ inputs and are guaranteed to operate down to 1.8V. The A-grade packages feature an on-board 1.236V ±1% reference, while the B-grade packages feature a 1.24V ±1.75% reference. An ultra-low supply current of 0.85µA (MAX9019/MAX9020), 1µA (MAX9015/MAX9016), or 1.2µA (MAX9017/MAX9018) makes the MAX9015–MAX9020 family of comparators ideal for all 2-cell battery monitoring/management applications.

The unique design of the MAX9015–MAX9020 output stage limits supply-current surges while switching, which virtually eliminates the supply glitches typical of many other comparators. This design also minimizes overall power consumption under dynamic conditions. The MAX9015/MAX9017/MAX9019 have a push-pull output stage that sinks and sources current. Large internal output drivers allow Rail-to-Rail® output swing with loads up to 6mA. The MAX9016/MAX9018/MAX9020 have an open-drain output stage that makes them suitable for mixed-voltage system design. All devices are available in the ultra-small 8-pin SOT23 package.

Refer to the MAX9117–MAX9120 data sheet for similar single comparators with or without reference in a tiny SC70 package.

Applications

2-Cell Battery Monitoring/Management

Ultra-Low Power Systems

Mobile Communications

Notebooks and PDAs

Threshold Detectors/ Discriminators

Window Detectors

Sensing at Ground or Supply Line

Telemetry and Remote Systems

Medical Instruments

Features

- **Ultra-Low Total Supply Current**
  0.85µA (MAX9019/MAX9020)
  1.0µA (MAX9015A/MAX9016A)
  1.2µA (MAX9017/MAX9018)
- **Guaranteed Operation Down to 1.8V**
- **Precision V_{OS} < 5mV (max)**
- **Internal 1.236V ±1% Reference (A Grade)**
- **Input Voltage Range Extends 200mV Beyond-the-Rails**
- **CMOS Push-Pull Output with ±6mA Drive Capability (MAX9015/MAX9017/MAX9019)**
- **Open-Drain Output Versions Available (MAX9016/MAX9018/MAX9020)**
- **Crowbar-Current-Free Switching**
- **Internal 4mV Hysteresis for Clean Switching**
- **No Phase Reversal for Overdriven Inputs**
- **Dual Versions in Space-Saving 8-Pin SOT23 Package**

Ordering Information

PART	TEMP RANGE	PIN-PACKAGE	TOP MARK
MAX9015AEKA-T	-40°C to +85°C	8 SOT23-8	AEIW
MAX9016AEKA-T	-40°C to +85°C	8 SOT23-8	AEIX
MAX9017AEKA-T	-40°C to +85°C	8 SOT23-8	AEIQ
MAX9017BEKA-T	-40°C to +85°C	8 SOT23-8	AEIS

Ordering Information continued at end of data sheet.

Pin Configurations appear at end of data sheet.

Beyond-the-Rails is a trademark of Maxim Integrated Products, Inc.
Rail-to-Rail is a registered trademark of Nippon Motorola, Ltd.

Selector Guide

PART	COMPARATOR(S)	INTERNAL REFERENCE (V)	OUTPUT TYPE	SUPPLY CURRENT (µA)
MAX9015A	1	1.236 ±1%	Push-pull	1
MAX9016A	1	1.236 ±1%	Open drain	1
MAX9017A	2	1.236 ±1%	Push-pull	1.2
MAX9017B	2	1.240 ±1.75%	Push-pull	1.2
MAX9018A	2	1.236 ±1%	Open drain	1.2
MAX9018B	2	1.240 ±1.75%	Open drain	1.2
MAX9019	2	—	Push-pull	0.85
MAX9020	2	—	Open drain	0.85

For pricing, delivery, and ordering information, please contact Maxim/Dallas Direct! at 1-888-629-4642, or visit Maxim's website at www.maxim-ic.com.

SOT23, Dual, Precision, 1.8V, Nanopower Comparators With/Without Reference

ABSOLUTE MAXIMUM RATINGS

Supply Voltage (V_{CC} to V_{EE}) 6V
IN+, IN-, INA+, INB+, INA-, INB-,
REF/INA-, REF ..... (V_{EE} - 0.3V) to (V_{CC} + 0.3V)
Output Voltage (OUT_)
MAX9015A, MAX9017_, MAX9019 .... (V_{EE} - 0.3V) to (V_{CC} + 0.3V)
MAX9016A, MAX9018_, MAX9020 ..... (V_{EE} - 0.3V) to +6V
Output Current (REF, OUT_, REF/INA-) ..... ±50mA
Output Short-Circuit Duration (REF, OUT_, REF/INA-) 10s
Continuous Power Dissipation (T_A = +70°C)
8-Pin SOT23 (derate 9.1mW/°C above +70°C) 727mW
Operating Temperature Range ..... -40°C to +85°C
Storage Temperature Range ..... -65°C to +150°C
Junction Temperature ..... +150°C
Lead Temperature (soldering, 10s) ..... +300°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS—MAX9015–MAX9018 (Single and Duals with REF)

(V_{CC}= 5V, V_{EE} = 0V, V_{IN-} = V_{REF}, T_A = -40°C to +85°C, unless otherwise noted. Typical values are at T_A = +25°C.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Supply Voltage Range	V_{CC}	Inferred from the PSRR test		1.8		5.5	V
Supply Current	I_{CC}	MAX9015A/ MAX9016A	V_{CC} = 1.8V, T_A = +25°C		1.0	1.5	µA
			V_{CC} = 5.0V, T_A = +25°C		1.1	1.7	
			V_{CC} = 5.0V, T_A = T_{MIN} to T_{MAX}			2.0	
		MAX9017_/ MAX9018_	V_{CC} = 1.8V, T_A = +25°C		1.2	1.9	
			V_{CC} = 5.0V, T_A = +25°C		1.4	2.3	
			V_{CC} = 5.0V, T_A = T_{MIN} to T_{MAX}			2.8	
Input Common-Mode Voltage Range (MAX9015A/MAX9016A)	V_{CM}	Inferred from the output swing test, V_{EE} - 0.2V < V_{CM} < V_{CC} + 0.2V		V_{EE} - 0.2		V_{CC} + 0.2	V
IN+ Voltage Range (MAX9017_/MAX9018_)	V_{IN+}	Inferred from the output swing test		V_{EE} - 0.2		V_{CC} + 0.2	V
Input Offset Voltage	V_{OS}	V_{EE} - 0.2V < V_{CM} < V_{CC} + 0.2V (Note 2)	T_A = +25°C		0.15	5	mV
			T_A = T_{MIN} to T_{MAX}			10	
Input-Referred Hysteresis	V_{HB}	V_{EE} - 0.2V < V_{CM} < V_{CC} + 0.2V (Note 3)			4		mV
Input Bias Current (IN+, IN-, INA+, INB+, INB-)	I_B	T_A = +25°C			±0.15	±1	nA
		T_A = T_{MIN} to T_{MAX}				±2	
Power-Supply Rejection Ratio	PSRR	V_{CC} = 1.8V to 5.5V			0.1	1	mV/V
Output Voltage Swing High (MAX9015A/MAX9017_)	V_{CC} - V_{OH}	V_{CC} = 1.8V, I_{SOURCE} = 1mA	T_A = +25°C		100	200	mV
			T_A = T_{MIN} to T_{MAX}			300	
		V_{CC} = 5.0V, I_{SOURCE} = 6mA	T_A = +25°C		250	350	
			T_A = T_{MIN} to T_{MAX}			450	
Output Voltage Swing Low (MAX9015A/MAX9017_)	V_{OL}	V_{CC} = 1.8V, I_{SINK} = 1mA	T_A = +25°C		105	200	mV
			T_A = T_{MIN} to T_{MAX}			300	
		V_{CC} = 5.0V, I_{SINK} = 6mA	T_A = +25°C		285	350	
			T_A = T_{MIN} to T_{MAX}			450	

ELECTRICAL CHARACTERISTICS—MAX9015–MAX9018 (Single and Duals with REF) (continued)

(V_{CC}= 5V, V_{EE} = 0V, V_{IN-} = V_{REF}, T_A = -40°C to +85°C, unless otherwise noted. Typical values are at T_A = +25°C.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Output Leakage Current (MAX9016A/MAX9018_)	I_{LEAK}	V_{CC} = 5.5V, V_{OUT} = 5.5V			0.001	1	µA
Output Short-Circuit Current	I_{SC}	Sourcing, V_{OUT} = V_{EE} (MAX9015A/ MAX9017_ only)	V_{CC} = 1.8V		3		mA
			V_{CC} = 5.0V		35		
		Sinking, V_{OUT} = V_{CC}	V_{CC} = 1.8V		3		
			V_{CC} = 5.0V		33		
High-to-Low Propagation Delay (Note 4)	t_{PD-}	V_{CC} = 1.8V			7		µs
		V_{CC} = 5.0V			6		
Low-to-High Propagation Delay (Note 4)	t_{PD+}	V_{CC} = 1.8V	MAX9015A/MAX9017_		11		µs
			MAX9016A/MAX9018_, R_{PULLUP} = 100kΩ to V_{CC}		12		
		V_{CC} = 5.0V	MAX9015A/MAX9017_		28		
			MAX9016A/MAX9018_, R_{PULLUP} = 100kΩ to V_{CC}		31		
Rise Time	t_{RISE}	C_L = 15pF (MAX9015A/MAX9017_)			1.6		µs
Fall Time	t_{FALL}	C_L = 15pF			0.2		µs
Power-Up Time	t_{ON}				1.2		ms
Reference Voltage	V_{REF}	MAX901_A	T_A = +25°C, 1.0%	1.224	1.236	1.248	V
			T_A = T_{MIN} to T_{MAX}, 2.5%	1.205		1.267	
		MAX901_B	T_A = +25°C, 1.75%	1.218	1.240	1.262	
			T_A = T_{MIN} to T_{MAX}, 4.5%	1.184		1.296	
Reference Voltage Temperature Coefficient	TC_{REF}				40		ppm/°C
Reference Output Voltage Noise	E_N	BW = 10Hz to 1kHz, C_{REF} = 1nF			29		$µV_{RMS}$
		BW = 10Hz to 6kHz, C_{REF} = 1nF			60		
Reference Line Regulation	$\Delta V_{REF}/\Delta V_{CC}$	1.8V ≤ V_{CC} ≤ 5.5V			0.5		mV/V
Reference Load Regulation	$\Delta V_{REF}/\Delta I_{OUT}$	I_{OUT} = 0 to 100nA			0.03		mV/nA

SOT23, Dual, Precision, 1.8V, Nanopower Comparators With/Without Reference

ELECTRICAL CHARACTERISTICS—MAX9019/MAX9020 (Duals without REF)

(V_{CC} = 5V, V_{EE} = 0V, T_A = -40°C to +85°C, unless otherwise noted. Typical values are at T_A = +25°C.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Supply Voltage Range	V_{CC}	Inferred from the PSRR test		1.8		5.5	V
Supply Current	I_{CC}	MAX9019/ MAX9020	V_{CC} = 1.8V, T_A = +25°C		0.85	1.50	µA
			V_{CC} = 5.0V, T_A = +25°C		1.1	1.70	
			V_{CC} = 5.0V, T_A = T_{MIN} to T_{MAX}			2.0	
Input Common-Mode Voltage Range	V_{CM}	Inferred from the output swing test, V_{EE} - 0.2V < V_{CM} < V_{CC} + 0.2V		V_{EE} - 0.2		V_{CC} + 0.2	V
Input Offset Voltage	V_{OS}	V_{EE} - 0.2V < V_{CM} < V_{CC} + 0.2V (Note 2)	T_A = +25°C		1	5	mV
			T_A = T_{MIN} to T_{MAX}			10	
Input-Referred Hysteresis	V_{HB}	V_{EE} - 0.2V < V_{CM} < V_{CC} + 0.2V (Note 3)			4		mV
Input Bias Current (INA-, INA+, INB+, INB-)	I_B	T_A = +25°C			0.15	1	nA
		T_A = T_{MIN} to T_{MAX}				2	
Power-Supply Rejection Ratio	PSRR	V_{CC} = 1.8V to 5.5V			0.1	1	mV/V
Output Voltage Swing High (MAX9019 Only)	V_{CC} - V_{OH}	V_{CC} = 1.8V, I_{SOURCE} = 1mA	T_A = +25°C		55	200	mV
			T_A = T_{MIN} to T_{MAX}			300	
		V_{CC} = 5.0V, I_{SOURCE} = 6mA	T_A = +25°C		190	350	
			T_A = T_{MIN} to T_{MAX}			450	
Output Voltage Swing Low	V_{OL}	V_{CC} = 1.8V, I_{SINK} = 1mA	T_A = +25°C		55	200	mV
			T_A = T_{MIN} to T_{MAX}			300	
		V_{CC} = 5.0V, I_{SINK} = 6mA	T_A = +25°C		190	350	
			T_A = T_{MIN} to T_{MAX}			450	
Output Leakage Current (MAX9020 Only)	I_{LEAK}	V_{CC} = 5.5V, V_{OUT} = 5.5V			0.001	1	µA
Output Short-Circuit Current	I_{SC}	Sourcing, V_{OUT} = V_{EE} (MAX9019 only)	V_{CC} = 1.8V		3		mA
			V_{CC} = 5.0V		35		
		Sinking, V_{OUT} = V_{CC}	V_{CC} = 1.8V		3		
			V_{CC} = 5.0V		33		
High-to-Low Propagation Delay (Note 4)	t_{PD-}	V_{CC} = 1.8V			7		µs
		V_{CC} = 5.0V			6		
Low-to-High Propagation Delay (Note 4)	t_{PD+}	V_{CC} = 1.8V	MAX9019		11		µs
			MAX9020, R_{PULLUP} = 100kΩ to V_{CC}		12		
		V_{CC} = 5.0V	MAX9019		28		
			MAX9020, R_{PULLUP} = 100kΩ to V_{CC}		31		

ELECTRICAL CHARACTERISTICS—MAX9019/MAX9020 (Duals without REF) (continued)

(V_{CC} = 5V, V_{EE} = 0V, T_A = -40°C to +85°C, unless otherwise noted. Typical values are at T_A = +25°C.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Rise Time	t_{RISE}	C_L = 15pF (MAX9019 only)		1.6		µs
Fall Time	t_{FALL}	C_L = 15pF		0.2		µs
Power-Up Time	t_{ON}			1.2		ms

Note 1: All devices are 100% tested at T_A = +25°C. Specifications over temperature (T_A = T_{MIN} to T_{MAX}) are guaranteed by design, not production tested.

Note 2: V_{OS} is defined as the center of the hysteresis band at the input.


Note 3: The hysteresis-related trip points are defined as the edges of the hysteresis band, measured with respect to the center of the band (i.e., V_{OS}) (Figure 1).

Note 4: Specified with an input overdrive ($V_{OVERDRIVE}$) of 100mV, and a load capacitance of C_L = 15pF. $V_{OVERDRIVE}$ is defined above and beyond the offset voltage and hysteresis of the comparator input.


Typical Operating Characteristics

(V_{CC} = 5V, V_{EE} = 0V, C_L = 15pF, $V_{OVERDRIVE}$ = 100mV, T_A = +25°C, unless otherwise noted.)


MAX9015/MAX9016 SUPPLY CURRENT vs. SUPPLY VOLTAGE AND TEMPERATURE

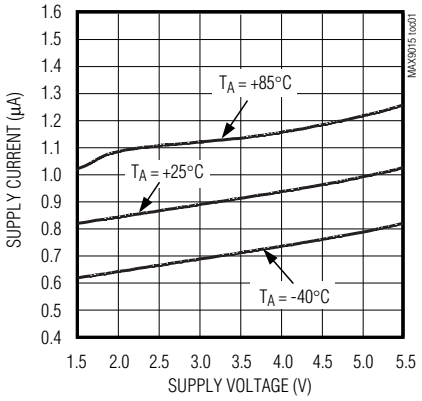


MAX9017/MAX9018 SUPPLY CURRENT vs. SUPPLY VOLTAGE AND TEMPERATURE

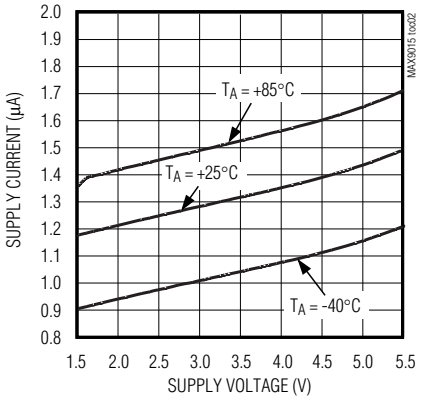


MAX9019/MAX9020 SUPPLY CURRENT vs. SUPPLY VOLTAGE AND TEMPERATURE

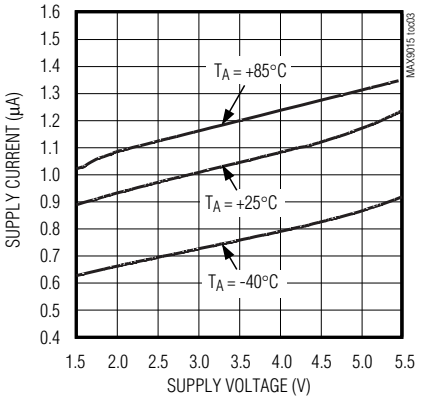


MAX9015/MAX9016 SUPPLY CURRENT vs. TEMPERATURE

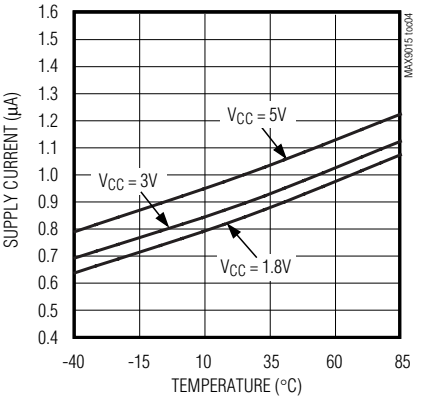

MAX9017/MAX9018 SUPPLY CURRENT vs. TEMPERATURE

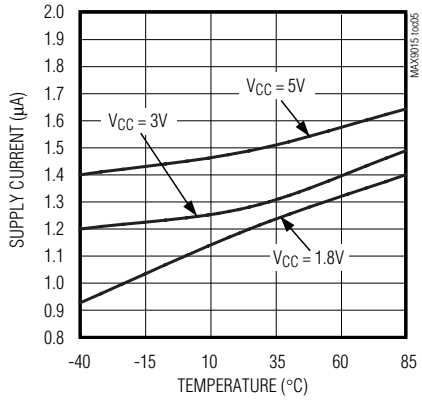

MAX9019/MAX9020 SUPPLY CURRENT vs. TEMPERATURE

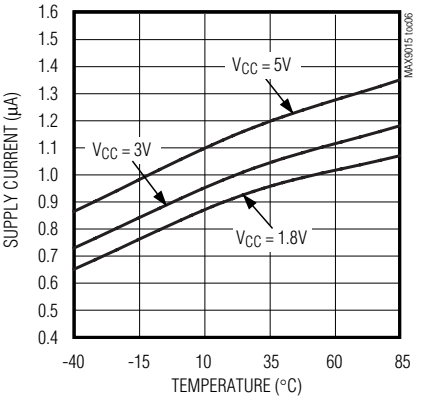


SOT23, Dual, Precision, 1.8V, Nanopower Comparators With/Without Reference


Typical Operating Characteristics (continued)

(V_{CC} = 5V, V_{EE} = 0V, C_L = 15pF, $V_{OVERDRIVE}$ = 100mV, T_A = +25°C, unless otherwise noted.)


MAX9015/MAX9016 SUPPLY CURRENT vs. OUTPUT TRANSITION FREQUENCY

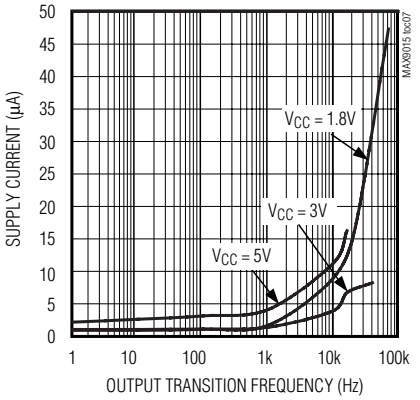


MAX9017/MAX9018 SUPPLY CURRENT vs. OUTPUT TRANSITION FREQUENCY

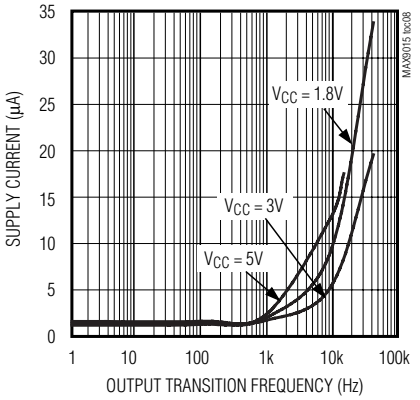


MAX9019/MAX9020 SUPPLY CURRENT vs. OUTPUT TRANSITION FREQUENCY

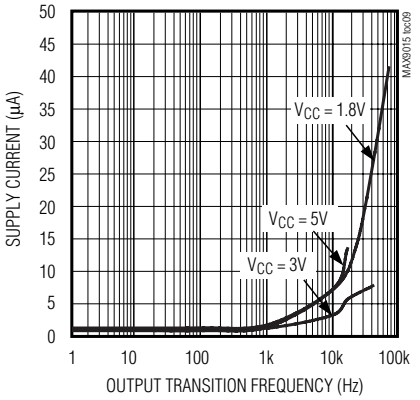


OUTPUT VOLTAGE LOW vs. SINK CURRENT

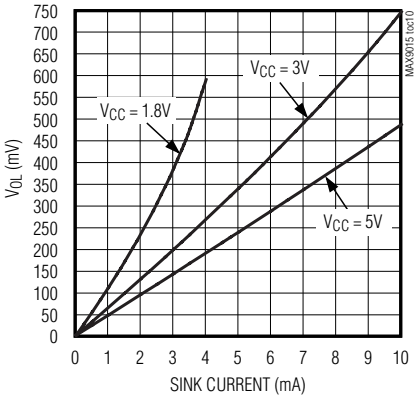


OUTPUT VOLTAGE LOW vs. SINK CURRENT AND TEMPERATURE

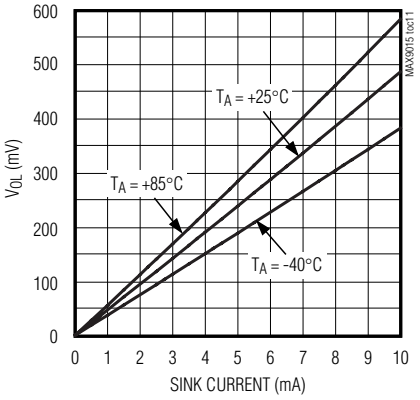


OUTPUT VOLTAGE HIGH vs. SOURCE CURRENT

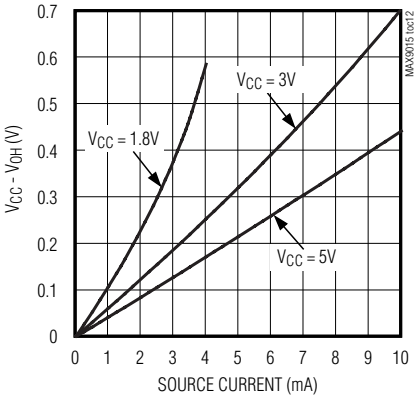


OUTPUT VOLTAGE HIGH vs. SOURCE CURRENT AND TEMPERATURE

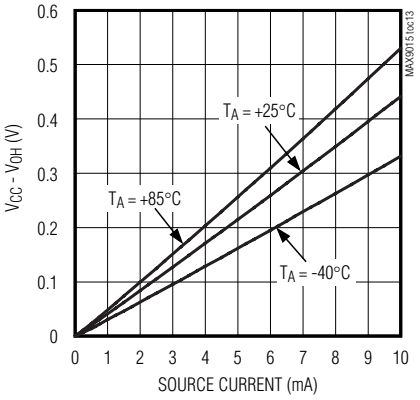

SHORT-CIRCUIT TO V_{CC} (SINK CURRENT) vs. TEMPERATURE

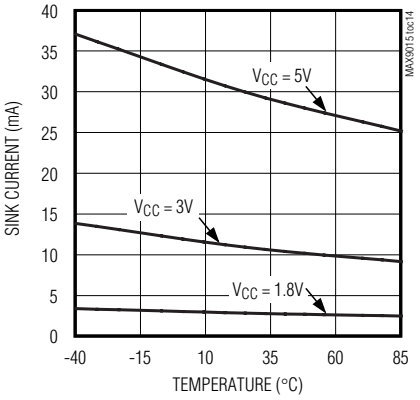


SHORT-CIRCUIT TO GND (SOURCE CURRENT) vs.TEMPERATURE

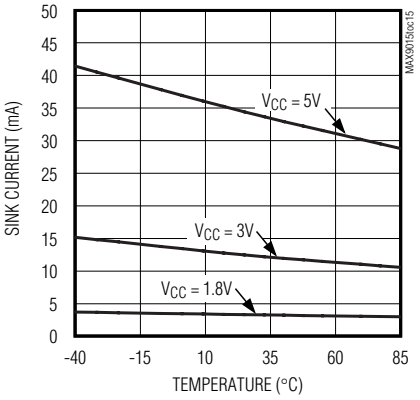


Typical Operating Characteristics (continued)

(V_{CC} = 5V, V_{EE} = 0V, C_L = 15pF, $V_{OVERDRIVE}$ = 100mV, T_A = +25°C, unless otherwise noted.)


INPUT OFFSET VOLTAGE DISTRIBUTION

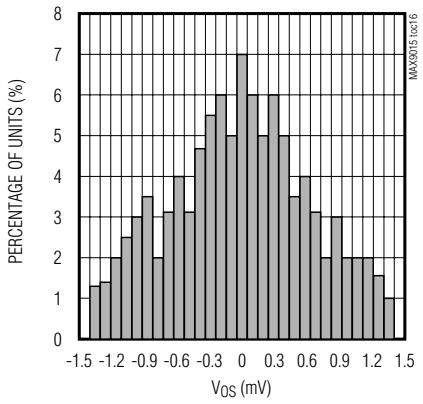


OFFSET VOLTAGE vs. TEMPERATURE

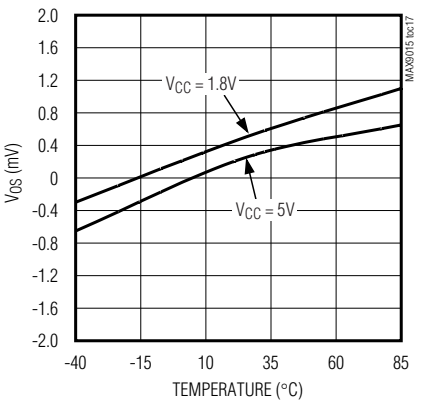


REFERENCE VOLTAGE DISTRIBUTION

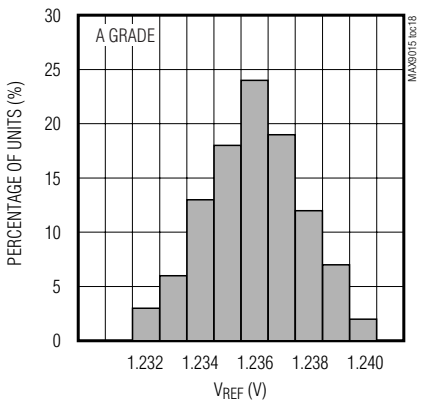


HYSTERESIS VOLTAGE vs. TEMPERATURE

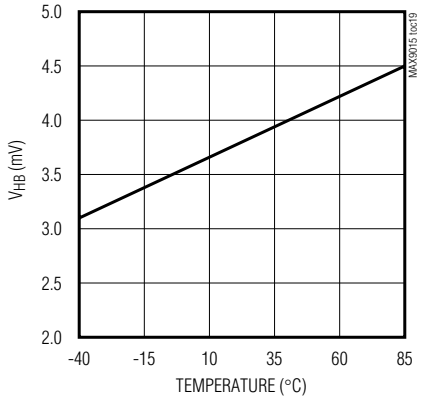


REFERENCE VOLTAGE vs. TEMPERATURE

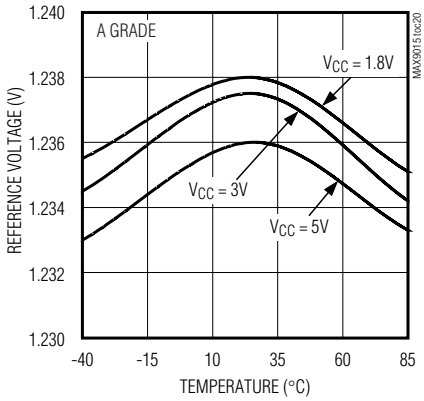


REFERENCE VOLTAGE vs. SUPPLY VOLTAGE

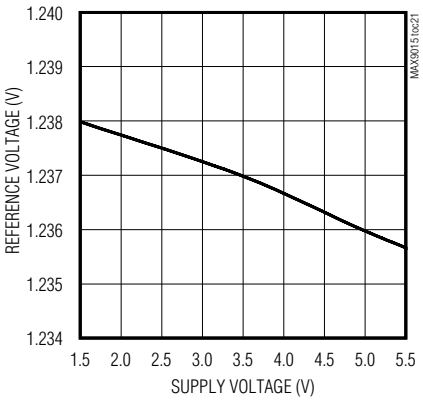


REFERENCE VOLTAGE vs. REFERENCE SOURCE CURRENT

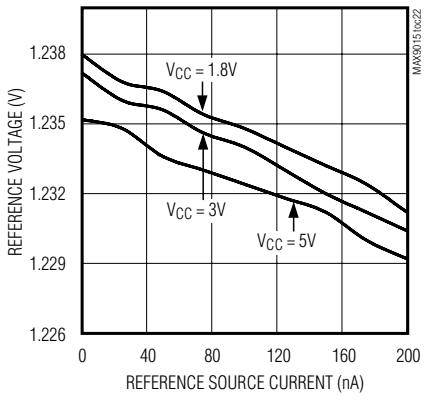

REFERENCE VOLTAGE vs. REFERENCE SINK CURRENT

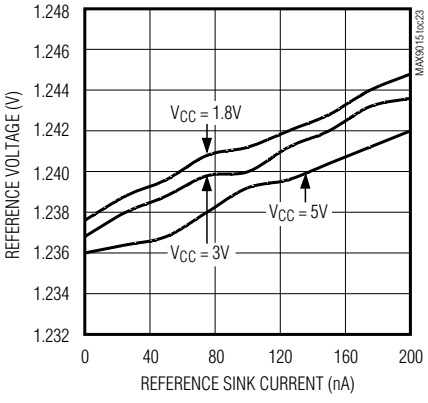

REFERENCE VOLTAGE vs. REFERENCE SINK CURRENT AND TEMPERATURE

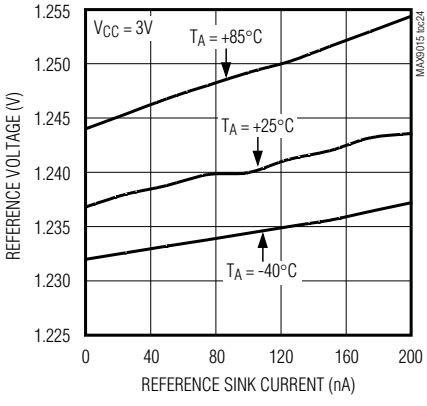


SOT23, Dual, Precision, 1.8V, Nanopower Comparators With/Without Reference


Typical Operating Characteristics (continued)

(V_{CC} = 5V, V_{EE} = 0V, C_L = 15pF, $V_{OVERDRIVE}$ = 100mV, T_A = +25°C, unless otherwise noted.)


INPUT BIAS CURRENT vs. INPUT BIAS VOLTAGE

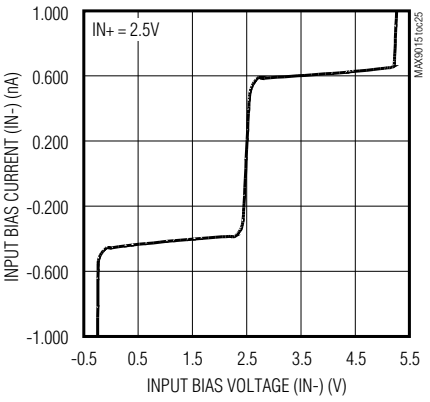


PROPAGATION DELAY (t_{PD-}) vs. TEMPERATURE

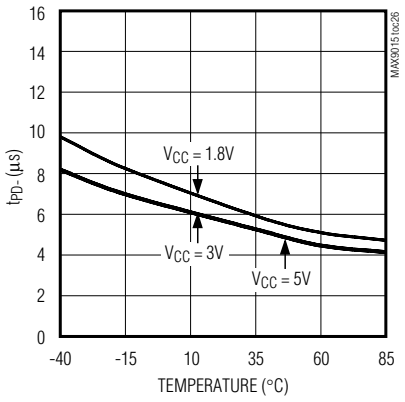


PROPAGATION DELAY (t_{PD+}) vs. TEMPERATURE

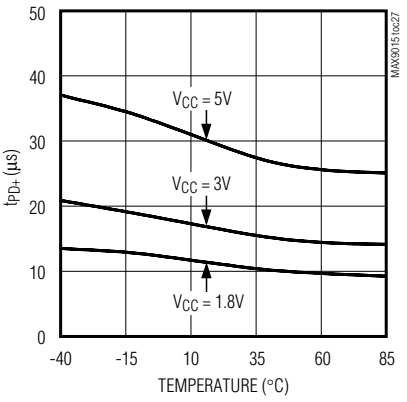


PROPAGATION DELAY (t_{PD-}) vs. CAPACITIVE LOAD

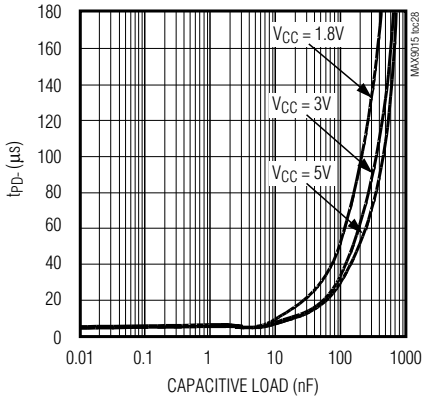


PROPAGATION DELAY (t_{PD+}) vs. CAPACITIVE LOAD

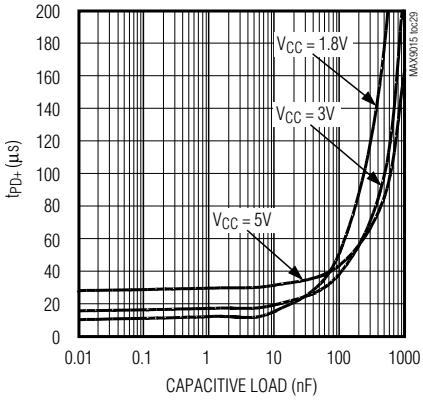


PROPAGATION DELAY (t_{PD-}) vs. INPUT OVERDRIVE

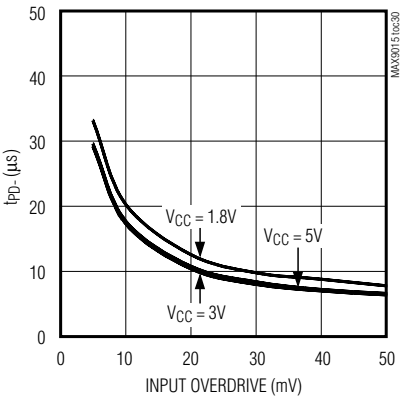


PROPAGATION DELAY (t_{PD+}) vs. INPUT OVERDRIVE

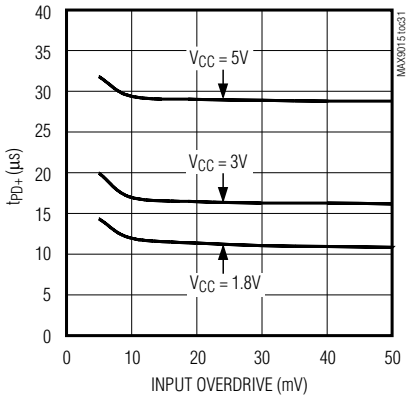

PROPAGATION DELAY (t_{PD-}) vs. PULLUP RESISTANCE

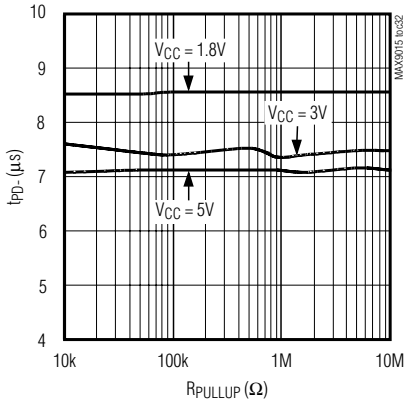


PROPAGATION DELAY (t_{PD+}) vs. PULLUP RESISTANCE

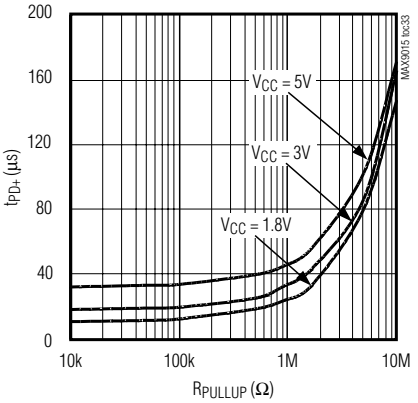


Typical Operating Characteristics (continued)

(V_{CC} = 5V, V_{EE} = 0V, C_L = 15pF, $V_{OVERDRIVE}$ = 100mV, T_A = +25°C, unless otherwise noted.)


PROPAGATION DELAY (t_{PD-}) (V_{CC} = 5V)

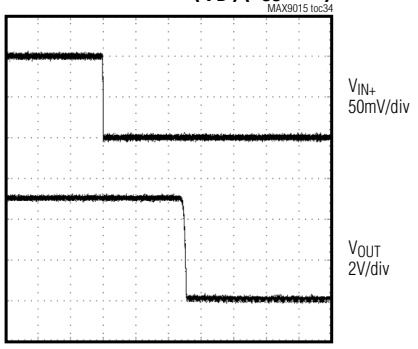


PROPAGATION DELAY (t_{PD+}) (V_{CC} = 5V)

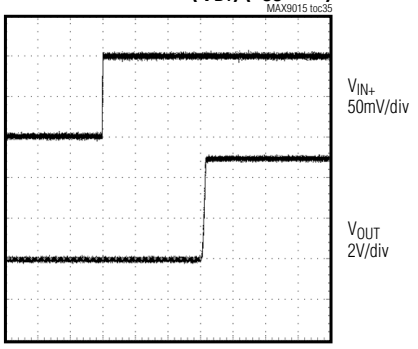


PROPAGATION DELAY (t_{PD-}) (V_{CC} = 3V)

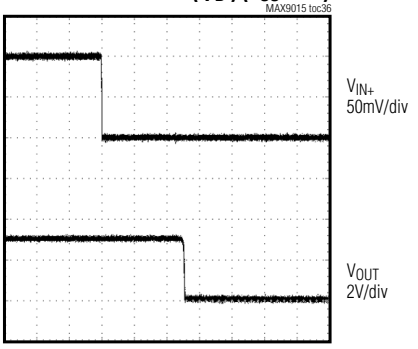


PROPAGATION DELAY (t_{PD+}) (V_{CC} = 3V)

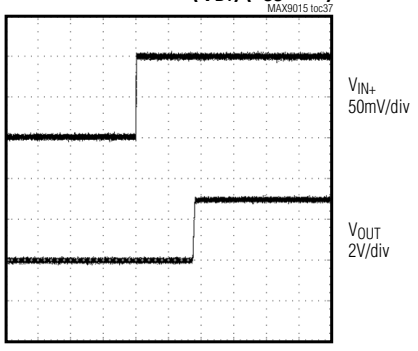


PROPAGATION DELAY (t_{PD-}) (V_{CC} = 1.8V)

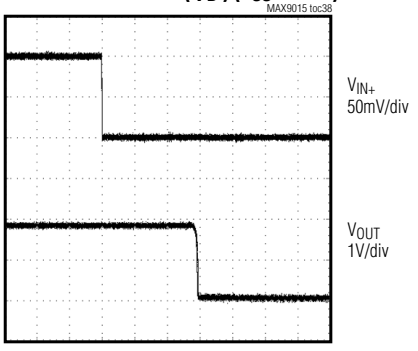


PROPAGATION DELAY (t_{PD+}) (V_{CC} = 1.8V)

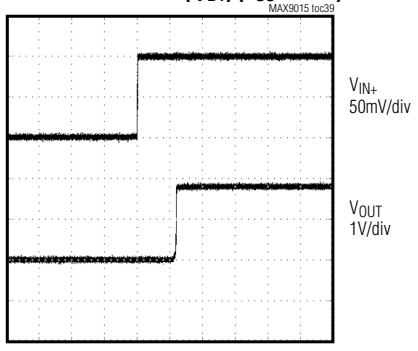


1kHz RESPONSE (V_{CC} = 5V)

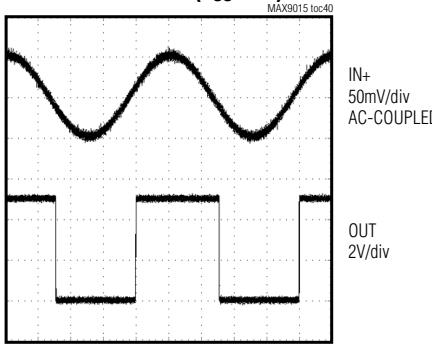

SLOW POWER-UP/DOWN RESPONSE

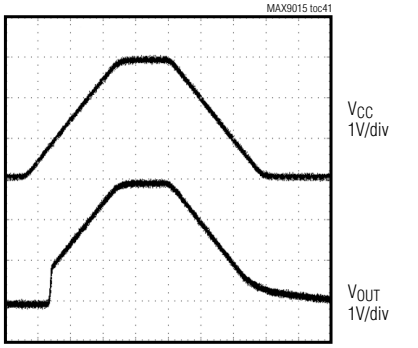

POWER-UP RESPONSE

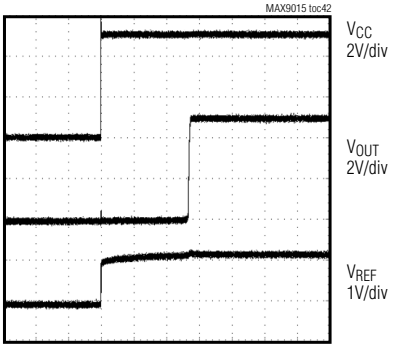


SOT23, Dual, Precision, 1.8V, Nanopower Comparators With/Without Reference

Pin Description

PIN			NAME	FUNCTION
MAX9015/ MAX9016	MAX9017/ MAX9018	MAX9019/ MAX9020		
1	—	—	REF	1.24V Reference Output
2	—	—	IN-	Comparator Inverting Input
3	—	—	IN+	Comparator Noninverting Input
4	4	4	V_{EE}	Negative Supply Voltage
5, 8	—	—	N.C.	No Connection. Not internally connected.
6	—	—	OUT	Comparator Output
7	8	8	V_{CC}	Positive Supply Voltage
—	1	1	OUTA	Comparator A Output
—	3	3	INA+	Comparator A Noninverting Input
—	5	5	INB+	Comparator B Noninverting Input
—	6	6	INB-	Comparator B Inverting Input
—	7	7	OUTB	Comparator B Output
—	—	2	INA-	Comparator A Inverting Input
—	2	—	REF/ INA-	1.24V Reference Output. Internally connected to the inverting input of comparator A (MAX9017/MAX9018 only).

Functional Diagrams

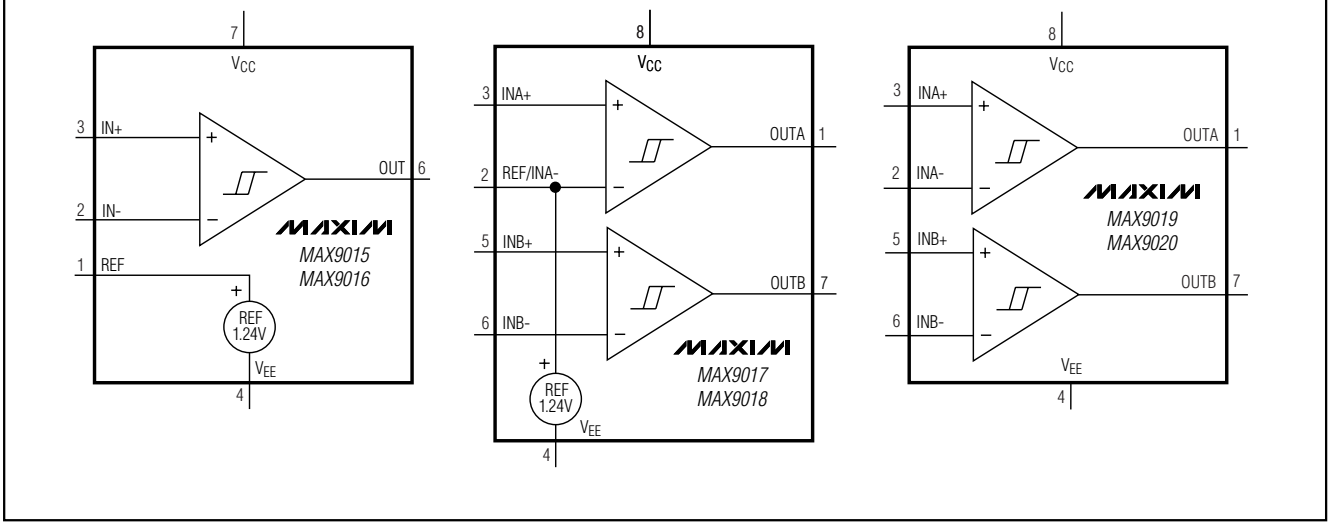

Detailed Description

The MAX9015–MAX9018 feature an on-board 1.24V ±0.5% (±1.45% for the B grade) reference, yet draw an ultra-low supply current. The MAX9019/MAX9020 (duals without reference) consume just 850nA of supply current. All devices are guaranteed to operate down to 1.8V supply. Their common-mode input voltage range extends 200mV beyond-the-rails. An internal 4mV hysteresis ensures clean output switching, even with slow-moving input signals. Large internal output drivers swing rail-to-rail with up to ±6mA loads (MAX9015/MAX9017/MAX9019).

The output stage employs a unique design that minimizes supply-current surges while switching, which virtually eliminates the supply glitches typical of many other comparators. The MAX9015/MAX9017/MAX9019 have a push-pull output stage that sinks as well as sources current. The MAX9016/MAX9018/MAX9020 have an open-drain output stage that can be pulled beyond V_{CC} up to 5.5V above V_{EE}. These open-drain versions are ideal for implementing wire-ORed output logic functions.

Input Stage Circuitry

The input common-mode voltage ranges extend from V_{EE} - 0.2V to V_{CC} + 0.2V. These comparators operate at any differential input voltage within these limits. Input bias current is typically ±150pA at the trip point, if the input voltage is between the supply rails. Comparator inputs are protected from overvoltage by internal ESD protection diodes connected to the supply rails. As the input voltage exceeds the supply rails, these ESD protection diodes become forward biased and begin to conduct increasing input bias current (see the Input Bias Current vs. Input Bias Voltage graph in the *Typical Operating Characteristics*).

Output Stage Circuitry

The MAX9015–MAX9020 feature a unique break-before-make output stage capable of driving ±8mA loads rail-to-rail. Many comparators consume orders of magnitude more current during switching than during steady-state operation. However, with the MAX9015–MAX9020 family of comparators, the supply-current change during an output transition is extremely small. In the *Typical Operating Characteristics*, the Supply Current vs. Output Transition Frequency graphs show the minimal supply-current increase as the output switching frequency approaches 1kHz. This characteristic reduces the need for power-supply filter capacitors to reduce glitches created by comparator switching currents. In battery-powered applications, this characteristic results in a substantial increase in battery life.

Reference (MAX9015–MAX9018)

The MAX9015–MAX9018s' internal +1.24V reference has a typical temperature coefficient of 40ppm/°C over the full -40°C to +85°C temperature range. The reference is a very-low-power bandgap cell, with a typical 35kΩ output impedance. REF can source and sink up to 100nA to external circuitry. For applications needing increased drive, buffer REF with a low input-bias current op amp such as the MAX4162. Most applications require no REF bypass capacitor. For noisy environments or fast transients, connect a 1nF to 10nF ceramic capacitor from REF to GND.

Applications Information

Low-Voltage, Low-Power Operation

The MAX9015–MAX9020 are ideally suited for use with most battery-powered systems. Table 1 lists a variety of battery types, capacities, and approximate operating times for the MAX9015–MAX9020, assuming nominal conditions.

Table 1. Battery Applications Using the MAX9015–MAX9020

BATTERY TYPE	RECHARGEABLE	V_{FRESH} (V)	$V_{END-OF-LIFE}$ (V)	CAPACITY, AA SIZE (mA-hr)	MAX9015A/ MAX9016A OPERATING TIME (hr)	MAX9017/ MAX9018 OPERATING TIME (hr)	MAX9019/ MAX9020 OPERATING TIME (hr)
Alkaline (2 cells)	No	3.0	1.8	2000	2000k	1540k	1333k
Nickel-cadmium (2 cells)	Yes	2.4	1.8	750	750k	570k	500k
Nickel-metal-hydride (2 cells)	Yes	2.4	1.8	1000	1000k	770k	660k
Lithium-ion (1 cell)	Yes	3.6	2.9	1000	1000k	770k	660k

SOT23, Dual, Precision, 1.8V, Nanopower Comparators With/Without Reference

Internal Hysteresis

Many comparators oscillate in the linear region of operation because of noise or undesired parasitic feedback. Oscillations can occur when the voltage on one input is equal or very close to the voltage on the other input. The MAX9015–MAX9020 have internal 4mV hysteresis to counter parasitic effects and noise.

The hysteresis in a comparator creates two trip points: one for the rising input voltage (V_{THR}) and one for the falling input voltage (V_{THF}) (Figure 1). The difference between the trip points is the hysteresis (V_{HB}). When the comparator's input voltages are equal, the hysteresis effectively causes one comparator input to move quickly past the other, thus taking the input out of the region where oscillation occurs. Figure 1 illustrates the case in which the comparator's inverting input has a fixed voltage applied, and the noninverting input is varied. If the inputs were reversed, the figure would be the same, except with an inverted output.

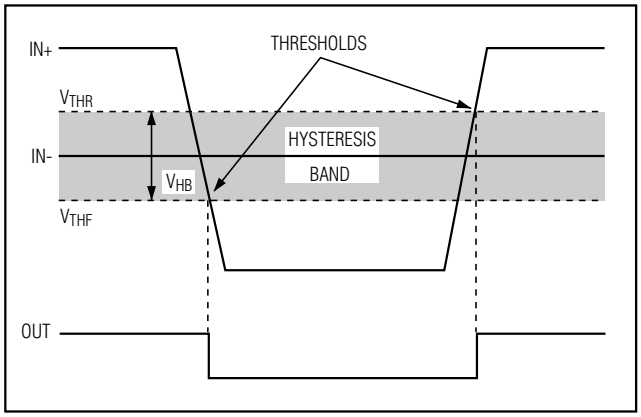


Figure 1. Threshold Hysteresis Band

Additional Hysteresis (MAX9015/MAX9017/MAX9019) (Push-Pull Outputs)

The MAX9015/MAX9017/MAX9019 feature a built-in 4mV hysteresis band (V_{HB}). Additional hysteresis can be generated with three resistors using positive feedback (Figure 2). Use the following procedure to calculate resistor values:

1) Select R3. Input bias current at IN_+ is less than 2nA, so the current through R3 should be at least 0.2µA to minimize errors caused by input bias current. The current through R3 at the trip point is (V_{REF} - V_{OUT})/R3. Considering the two possible output states in solving for R3 yields two formulas: R3 = V_{REF}/IR3 or R3 = (V_{CC} - V_{REF})/I_{R3}. Use the smaller of the two resulting resistor values. For example, when using the MAX9017 (V_{REF} = 1.24V) and V_{CC} = 5V, and if we choose I_{R3} = 0.2µA, then the two resistor values are 6.2MΩ and 19MΩ. Choose a 6.2MΩ standard value for R3.
2) Choose the hysteresis band required (V_{HB}). For this example, choose 50mV.
3) Calculate R1 according to the following equation:

$$R1 = R3\left(\frac{V_{HB}}{V_{CC}}\right)$$

For this example, insert the values:

$$R1 = 6.2M\Omega\left(\frac{50mV}{5V}\right) = 12k\Omega$$

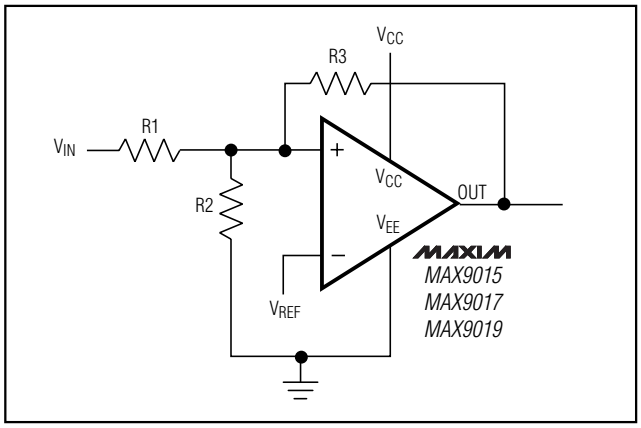


Figure 2. MAX9015/MAX9017/MAX9019 Additional Hysteresis

4) Choose the trip point for V_{IN} rising (V_{THR}) such that:

$$V_{THR} > V_{REF}\left(1 + \frac{V_{HB}}{V_{CC}}\right)$$

where V_{THR} is the trip point for V_{IN} rising. This is the threshold voltage at which the comparator switches its output from low to high as V_{IN} rises above the trip point. For this example, choose 3V.

5) Calculate R2 as follows:

$$R2 = \frac{1}{\left[\left(\frac{V_{THR}}{V_{REF}\ X\ R1}\right) - \left(\frac{1}{R1}\right) - \left(\frac{1}{R3}\right)\right]}$$

$$R2 = \frac{1}{\left[\left(\frac{3.0V}{(1.24V\ X\ 62k\Omega)}\right) - \left(\frac{1}{62k\Omega}\right) - \left(\frac{1}{6.2M\Omega}\right)\right]} = 43.99k\Omega$$

For this example, choose a 44.2kΩ standard value.

6) Verify the trip voltages and hysteresis as follows:

V_{IN} rising: = 2.992V, which is equivalent to REF times R1 divided by the parallel combination of R1, R2:

$$V_{THR} = V_{REF} \times R1 \left[\left(\frac{1}{R1} \right) + \left(\frac{1}{R2} \right) + \left(\frac{1}{R3} \right) \right]$$

and R3.

V_{IN} falling: = 2.942V:

$$V_{THF} = V_{THR} - \left(\frac{R1 \times V_{CC}}{R3} \right)$$

Hysteresis = V_{THR} - V_{THF} = 50mV.

Additional Hysteresis (MAX9016/MAX9018/MAX9020) (Open-Drain Outputs)

The MAX9016/MAX9018/MAX9020 feature a built-in 4mV hysteresis band. These devices have open-drain outputs and require an external pullup resistor (Figure 3). Additional hysteresis can be generated using positive feedback, but the formulas differ slightly from those of the MAX9015/MAX9017/MAX9019. Use the following procedure to calculate resistor values:

1) Select R3. Input bias current at IN_+ is less than 2nA, so the current through R3 should be at least 0.2µA to minimize errors caused by input bias current. The current through R3 at the trip point is (V_{REF} - V_{OUT})/R3. Considering the two possible output states in solving for R3 yields two formulas: R3 = V_{REF}/I_{R3} or R3 = [(V_{CC} - V_{REF})/I_{R3}] - R4. Use the smaller of the two resulting resistor values. For example, when using the MAX9018 (V_{REF} = 1.24V) and V_{CC} = 5V, and if we choose I_{R3} = 0.2µA, and R4 = 1MΩ, then the two resistor values are 6.2MΩ and 18MΩ. Choose a 6.2MΩ standard value for R3.
2) Choose the hysteresis band required (V_{HB}).
3) Calculate R1 according to the following equation. For this example, insert the values:

$$R1 = (R3 + R4) \left(\frac{V_{HB}}{V_{CC}} \right)$$

$$R1 = (6.2M\Omega + 1M\Omega) \left(\frac{50mV}{5V} \right) = 72k\Omega$$

4) Choose the trip point for V_{IN} rising (V_{THR}) such that:

$$V_{THR} > V_{REF} \left(1 + \frac{V_{HB}}{V_{CC}} \right)$$

(V_{THR} is the trip point for V_{IN} rising). This is the threshold voltage at which the comparator switches its output from low to high as V_{IN} rises above the trip point. For this example, choose 3V:

5) Calculate R2 as follows:

$$R2 = \frac{1}{\left[\left(\frac{V_{THR}}{V_{REF} \times R1} \right) - \left(\frac{1}{R1} \right) - \left(\frac{1}{R3} \right) \right]}$$

$$R2 = \frac{1}{\left[\left(\frac{3.0V}{1.24V \times 72k\Omega} \right) - \left(\frac{1}{72k\Omega} \right) - \left(\frac{1}{6.2M\Omega} \right) \right]} = 51.1k\Omega$$

For this example, choose a 49.9kΩ standard value.

6) Verify the trip voltages and hysteresis as follows:

$$V_{IN} \text{ rising: } V_{THR} = V_{REF} \times R1 \left(\left(\frac{1}{R1} \right) + \left(\frac{1}{R2} \right) + \left(\frac{1}{R3} \right) \right) = 3.043V$$

$$V_{IN} \text{ falling: } V_{THF} = V_{REF} \times R1 \left(\left(\frac{1}{R1} \right) + \left(\frac{1}{R2} \right) + \left(\frac{1}{R3} \right) \right) - \frac{R1}{R3 + R4} \times V_{CC} = 2.993V$$

Hysteresis = V_{THR} - V_{THF} = 50mV.

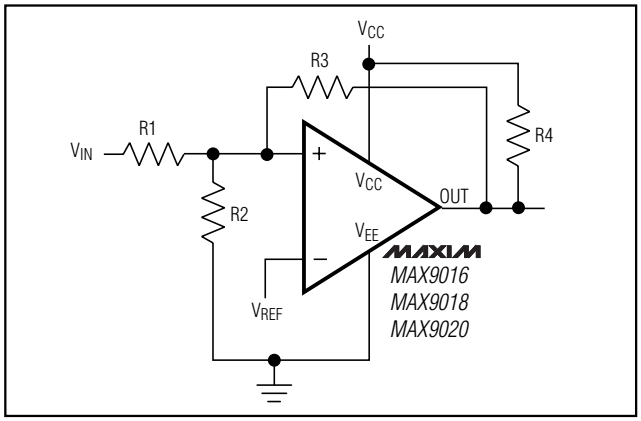


Figure 3. MAX9016/MAX9018/MAX9020 Additional Hysteresis

SOT23, Dual, Precision, 1.8V, Nanopower Comparators With/Without Reference

Board Layout and Bypassing

The MAX9015–MAX9020 ultra-low supply current typically requires no power-supply bypass capacitors. However, when the supply has high output impedance, long lead lengths or excessive noise, or fast transients, bypass V_{CC} to V_{EE} with a 0.1µF capacitor placed as close to the V_{CC} pin as possible. Minimize signal trace lengths to reduce stray capacitance. Use a ground plane and surface-mount components for best performance. If REF is decoupled, use a low-leakage ceramic capacitor.

Window Detector

The MAX9018 is ideal for window detectors (undervoltage/overvoltage detectors). Figure 4 shows a window detector circuit for a single-cell Li+ battery with a 2.9V end-of-life charge, a peak charge of 4.2V, and a nominal value of 3.6V. Choose different thresholds by changing the values of R1, R2, and R3. OUTA provides an active-low undervoltage indication, and OUTB provides an active-low overvoltage indication. ANDing the two open-drain outputs provides an active-high, power-good signal.

The design procedure is as follows:

1) Select R1. The input bias current into INB- is normally less than 2nA, so the current through R1 should exceed 100nA for the thresholds to be accurate. In this example, choose R1 = 1.24MΩ (1.24V/1µA).

2) Calculate R2 + R3. The overvoltage threshold should be 4.2V when V_{IN} is rising. The design equation is as follows:

$$R2 + R3 = R1 \times \left[\left(\frac{V_{OTH}}{V_{REF} + V_{HB}}\right) - 1\right]$$

$$= 1.24M\Omega \times \left[\left(\frac{4.2V}{1.24V + 0.004}\right) - 1\right]$$

$$= 2.95M\Omega$$

3) Calculate R2. The undervoltage threshold should be 2.9V when V_{IN} is falling. The design equation is as follows:

$$R2 = (R1 + R2 + R3) \times \left(\frac{V_{REF} - V_{HB}}{V_{UTH}}\right) - R1$$

$$= (1.24M\Omega + 2.95M\Omega) \times \frac{(1.236)}{2.9} - 1.24M\Omega$$

$$= 546k\Omega$$

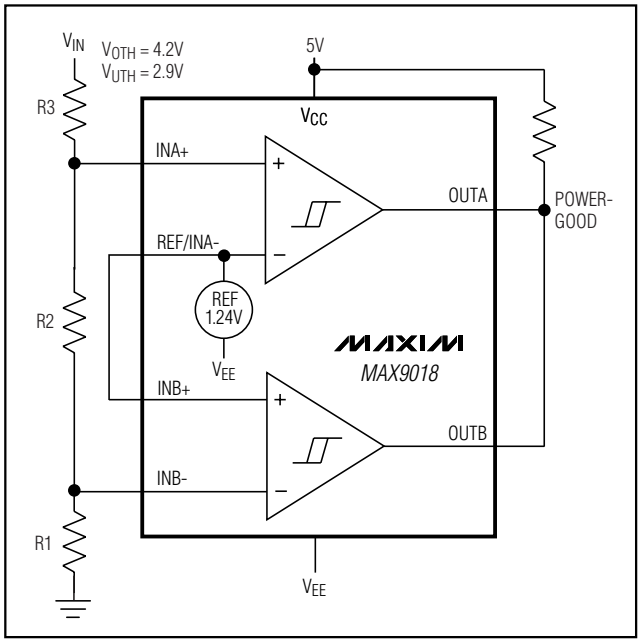


Figure 4. Window Detector Circuit

For this example, choose a 499kΩ standard value 1% resistor.

4) Calculate R3:

$$R3 = (R2 + R3) - R2$$

$$= 2.95M\Omega - 546k\Omega$$

$$= 240M\Omega$$

5) Verify the resistor values. The equations are as follows, evaluated for the above example:

Overvoltage threshold:

$$V_{OTH} = (V_{REF} + V_{HB}) \times \frac{(R1 + R2 + R3)}{R1} = 4.20V$$

Undervoltage threshold:

$$V_{UTH} = (V_{REF} - V_{HB}) \times \frac{(R1 + R2 + R3)}{(R1 + R2)} = 2.97V$$

where the internal hysteresis band, V_{HB}, is 4mV.

Zero-Crossing Detector

Figure 5 shows a zero-crossing detector application. The MAX9015/MAX9016/MAX9019/MAX9020s' inverting input is connected to ground, and its noninverting input is connected to a 100mV_{P-P} signal source. As the signal at the noninverting input crosses zero, the comparator's output changes state.

SOT23, Dual, Precision, 1.8V, Nanopower Comparators With/Without Reference

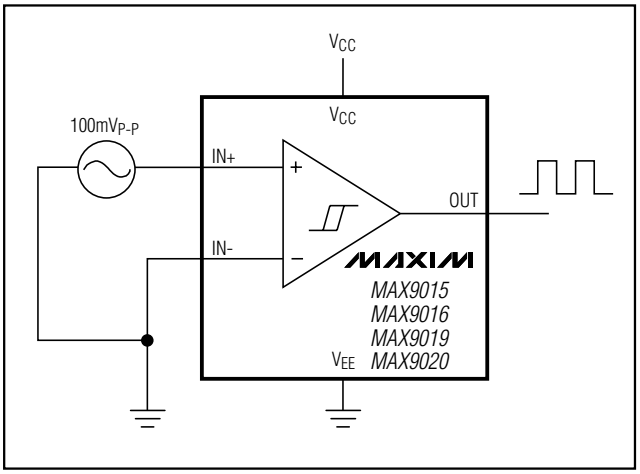


Figure 5. Zero-Crossing Detector

Logic-Level Translator

The open-drain comparators can be used to convert 5V logic to 3V logic levels. The MAX9020 can be powered by the 5V supply voltage, and the pullup resistor for the MAX9020's open-drain output is connected to the 3V supply voltage. This configuration allows the full 5V logic swing without creating overvoltage on the 3V logic inputs. For 3V to 5V logic-level translations, connect the 3V supply voltage to V_{CC} and the 5V supply voltage to the pullup resistor.

Chip Information


TRANSISTOR COUNT: 349

PROCESS: BiCMOS


Ordering Information (continued)

PART	TEMP RANGE	PIN-PACKAGE	TOP MARK
MAX9018AEKA-T	-40°C to +85°C	8 SOT23-8	AEIR
MAX9018BEKA-T	-40°C to +85°C	8 SOT23-8	AEIT
MAX9019EKA-T	-40°C to +85°C	8 SOT23-8	AEIU
MAX9020EKA-T	-40°C to +85°C	8 SOT23-8	AEIV

Typical Application Circuit

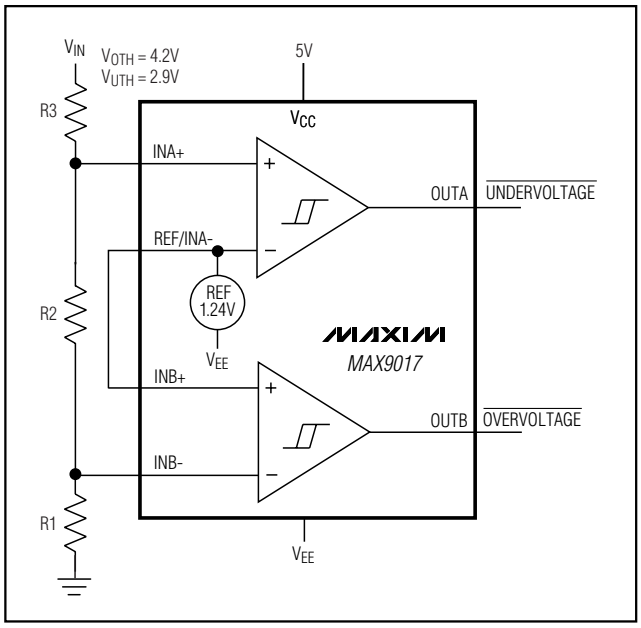


Pin Configurations

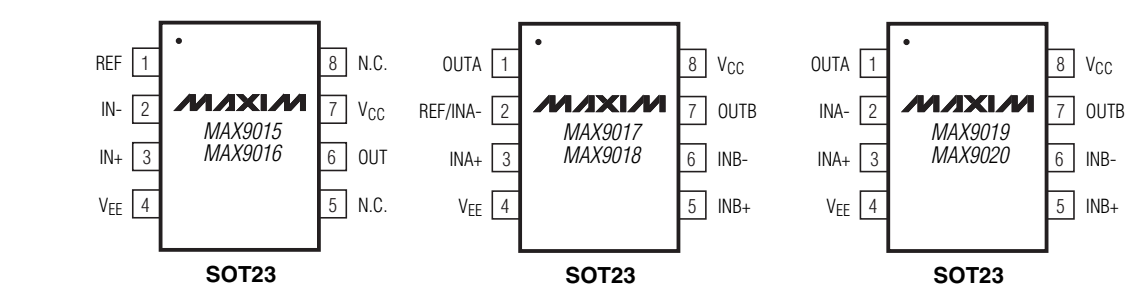

SOT23, Dual, Precision, 1.8V, Nanopower Comparators With/Without Reference

Package Information

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to **www.maxim-ic.com/packages**.

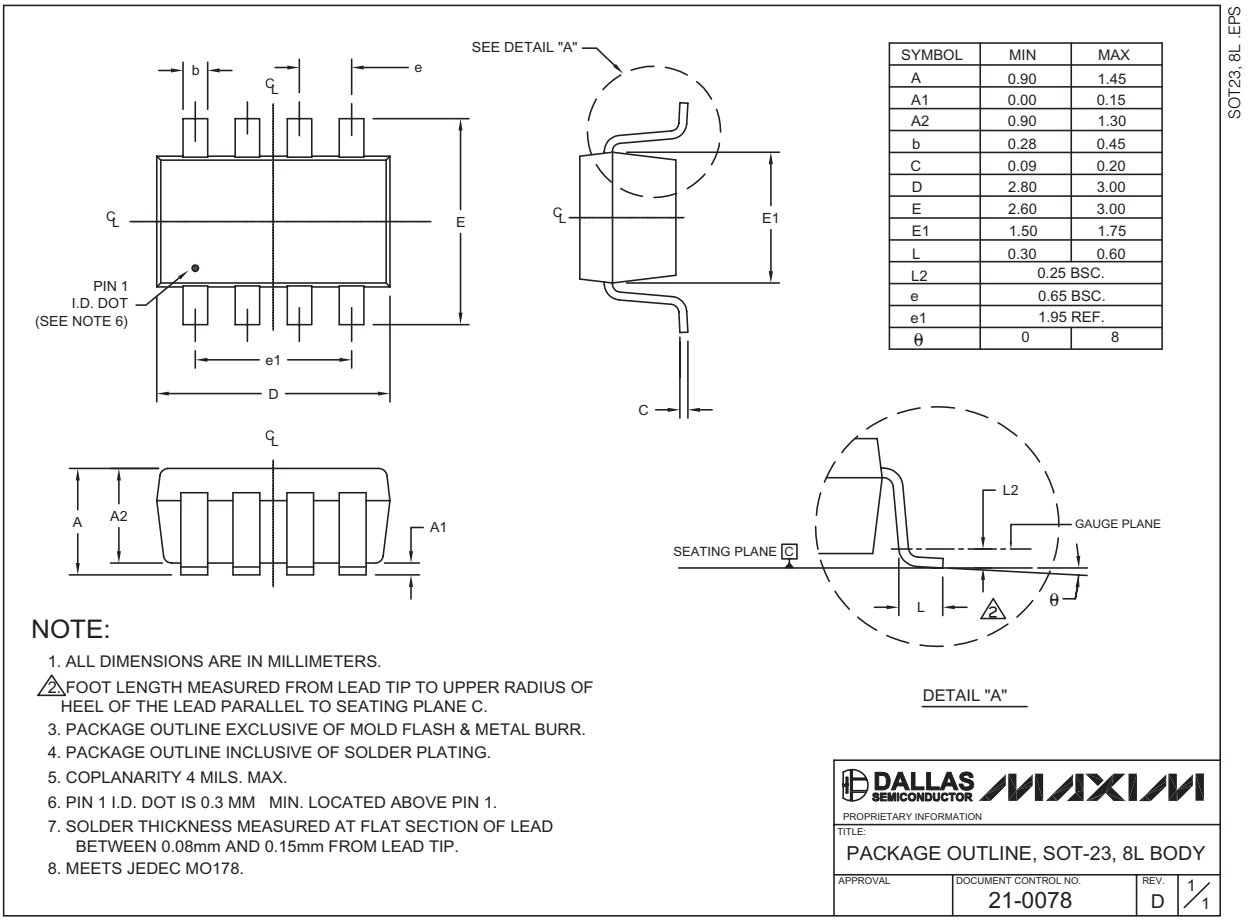

SYMBOL	MIN	MAX
A	0.90	1.45
A1	0.00	0.15
A2	0.90	1.30
b	0.28	0.45
C	0.09	0.20
D	2.80	3.00
E	2.60	3.00
E1	1.50	1.75
L	0.30	0.60
L2	0.25 BSC.	
e	0.65 BSC.	
e1	1.95 REF.	
θ	0	8

NOTE:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. FOOT LENGTH MEASURED FROM LEAD TIP TO UPPER RADIUS OF HEEL OF THE LEAD PARALLEL TO SEATING PLANE C.
3. PACKAGE OUTLINE EXCLUSIVE OF MOLD FLASH & METAL BURR.
4. PACKAGE OUTLINE INCLUSIVE OF SOLDER PLATING.
5. COPLANARITY 4 MILS. MAX.
6. PIN 1 I.D. DOT IS 0.3 MM MIN. LOCATED ABOVE PIN 1.
7. SOLDER THICKNESS MEASURED AT FLAT SECTION OF LEAD BETWEEN 0.08mm AND 0.15mm FROM LEAD TIP.
8. MEETS JEDEC MO178.

DALLAS SEMICONDUCTOR MAXIM

PROPRIETARY INFORMATION

TITLE: PACKAGE OUTLINE, SOT-23, 8L BODY

APPROVAL	DOCUMENT CONTROL NO.	REV.	
	21-0078	D	1/1

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

© 2003 Maxim Integrated Products Printed USA MAXIM is a registered trademark of Maxim Integrated Products.