New Jersey Semi-Conductor Products, Inc.

20 STERN AVE.
SPRINGFIELD, NEW JERSEY 07081
U.S.A.

TELEPHONE: (973) 376-2922
(212) 227-6005
FAX: (973) 376-8960

Silicon NPN Power Transistor — BD799

DESCRIPTION

- Collector-Emitter Sustaining Voltage-
  : $V_{CEO(SUS)}$ = 80V(Min)
- Low Saturation Voltage
- Complement to Type BD800

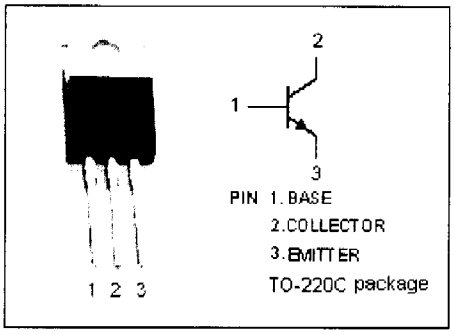

APPLICATIONS

- Designed for a wide variety of medium-power switching and amplifier applications , such as series and shunt regulators and driver and output stages of high-fidelity amplifiers.

ABSOLUTE MAXIMUM RATINGS(T_a=25℃)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	80	V
V_{CEO}	Collector-Emitter Voltage	80	V
V_{EBO}	Emitter-Base Voltage	5	V
I_C	Collector Current-Continuous	8	A
I_B	Base Current-Continuous	3	A
P_C	Collector Power Dissipation T_C=25℃	65	W
T_j	Junction Temperature	150	℃
T_{stg}	Storage Ttemperature Range	-55~150	℃

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j\text{-}c}$	Thermal Resistance,Junction to Case	1.92	℃/W

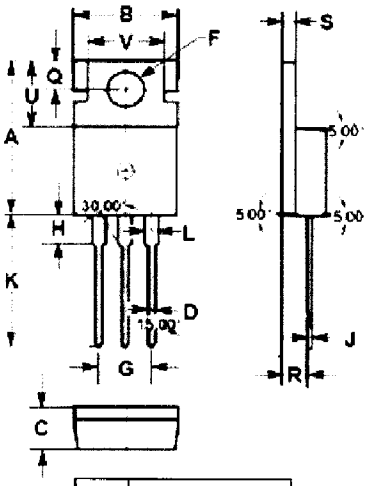

DIM	mm MIN	mm MAX
A	15.70	15.90
B	9.90	10.10
C	4.20	4.40
D	0.70	0.90
F	3.40	3.60
G	4.98	5.18
H	2.70	2.90
J	0.44	0.46
K	13.20	13.40
L	1.10	1.30
Q	2.70	2.90
R	2.50	2.70
S	1.29	1.31
U	6.45	6.65
V	8.66	8.86

NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.

Quality Semi-Conductors

Download from alldatasheet.com

ELECTRICAL CHARACTERISTICS

T_C=25℃ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{CEO(SUS)}$	Collector-Emitter Sustaining Voltage	I_C= 100mA; I_B= 0	80			V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	I_C= 3A; I_B= 0.3A			1	V
$V_{BE(on)}$	Base-Emitter On Voltage	I_C= 3A ; V_{CE}= 2V			1.6	V
I_{CBO}	Collector Cutoff Current	V_{CB}= 80V; I_E= 0			0.1	mA
I_{EBO}	Emitter Cutoff Current	V_{EB}= 5V; I_C= 0			1	mA
h_{FE-1}	DC Current Gain	I_C= 1A ; V_{CE}= 2V	30			
h_{FE-2}	DC Current Gain	I_C= 3A ; V_{CE}= 2V	15			
f_T	Current-Gain—Bandwidth Product	I_C= 0.25A ;V_{CE}= 10V,f_{test}= 1MHz	3			MHz

Download from alldatasheet.com