

DATA SHEET

TEA6886HL

Up-level Car radio Analog Signal
Processor (CASP)

Product specification
File under Integrated Circuits, IC01

2000 Nov 21

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

| | | |
|-----------------|--|--|
| CONTENTS | | |
| 1 | FEATURES | |
| 1.1 | General | 11.1 |
| 1.2 | Stereo decoder and noise blanking | 11.2 |
| 1.3 | Weak signal processing | 11.3 |
| 1.4 | Audio pre-amplifier | 11.4 |
| 2 | GENERAL DESCRIPTION | 11.5 |
| 3 | ORDERING INFORMATION | 11.6 |
| 4 | QUICK REFERENCE DATA | 11.7 |
| 5 | BLOCK DIAGRAM | 11.8 |
| 6 | PINNING | 11.9 |
| 7 | FUNCTIONAL DESCRIPTION | 11.10 |
| 7.1 | Stereo decoder | 11.11 |
| 7.2 | FM noise blanker | 11.12 |
| 7.3 | AM noise blanker | 11.13 |
| 7.4 | Multipath/fading detection and weak signal control | 11.14 |
| 7.5 | Tone/volume control | 11.15 |
| 7.5.1 | Source selector | 11.16 |
| 7.5.2 | Loudness | 12 |
| 7.5.3 | Volume 1 | 13 |
| 7.5.4 | Treble | 14 |
| 7.5.5 | Bass | 15 |
| 7.5.6 | Volume 2 | 15.1 |
| 7.5.7 | RSA selector | 15.2 |
| 7.5.8 | Chime adder | 15.3 |
| 8 | LIMITING VALUES | 15.4 |
| 9 | THERMAL CHARACTERISTICS | 15.5 |
| 10 | CHARACTERISTICS | 16 |
| 11 | I ² C-BUS PROTOCOL | 17 |
| | | 18 |
| | | 19 |
| | | Read mode: 1st data byte |
| | | Read mode: 2nd data byte |
| | | Subaddress byte for write |
| | | Write mode: subaddress 0H |
| | | Write mode: subaddress 1H |
| | | Write mode: subaddress 2H |
| | | Write mode: subaddress 3H |
| | | Write mode: subaddress 4H |
| | | Write mode: subaddress 5H |
| | | Write mode: subaddress 6H |
| | | Write mode: subaddress 7H |
| | | Write mode: subaddress 8H |
| | | Write mode: subaddress 9H |
| | | Write mode: subaddress AH |
| | | Write mode: subaddress BH |
| | | Write mode: subaddress CH |
| | | INTERNAL CIRCUITRY |
| | | TEST CIRCUIT |
| | | PACKAGE OUTLINE |
| | | SOLDERING |
| | | Introduction to soldering surface mount packages |
| | | Reflow soldering |
| | | Wave soldering |
| | | Manual soldering |
| | | Suitability of surface mount IC packages for wave and reflow soldering methods |
| | | DATA SHEET STATUS |
| | | DEFINITIONS |
| | | DISCLAIMERS |
| | | PURCHASE OF PHILIPS I ² C COMPONENTS |

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

1 FEATURES

1.1 General

- I²C-bus compatible
- Digital alignment/adjustment via I²C-bus:
 - FM noise blanker sensitivity
 - FM stereo noise canceller
 - FM High Cut Control (HCC)
 - FM stereo separation.
- FM audio processing hold for RDS updating; holds the detectors for the FM weak signal processing in their present state
- FM bandwidth limiting; limits the bandwidth of the FM audio signal with external capacitors
- AM stereo input; AM stereo audio can be fed in at the pins for the de-emphasis capacitors; this will provide 8 dB of gain to the AM audio.

1.2 Stereo decoder and noise blanking

- FM stereo decoder
- Accepts FM multiplex signals and AM audio at input
- Pilot detector and pilot canceller
- De-emphasis selectable between 75 and 50 μ s
- AM noise blanker: impulse noise detector and an audio hold.

1.3 Weak signal processing

- FM weak signal processing: six signal condition detectors, soft mute, stereo noise canceller (blend), and high cut control (roll-off).

1.4 Audio pre-amplifier

- Source selector for 6 sources: 2 stereo inputs external (channels A and B), 1 symmetrical stereo input (channel C), 1 symmetrical mono input (D), 1 internal stereo input (AM or FM), and 1 chime/diagnostic mono input

3 ORDERING INFORMATION

| TYPE NUMBER | PACKAGE | | |
|-------------|---------|--|----------|
| | NAME | DESCRIPTION | VERSION |
| TEA6886HL | LQFP80 | plastic low profile quad flat package; 80 leads; body 12 × 12 × 1.4 mm | SOT315-1 |



- Volume 1 control from +20 to –56 dB in 1 dB steps; programmable 20 dB loudness control included
- Volume 2 control from 0 to –56 dB in 1 dB steps, –56, –58.5, –62, –68 dB and mute
- Programmable loudness control with bass boost as well as bass and treble boost
- Treble control from –14 to +14 dB in 2 dB steps
- Bass control from –18 to +18 dB in 2 dB steps with selectable characteristic
- Analog Step Interpolation (ASI) minimizes pops by smoothing out the transitions in the audio signal when a switch is made
- Audio Blend Control (ABC) minimizes pops by automatically incrementing the volume and loudness controls through each step between their present settings and the new settings
- Rear Seat Audio (RSA) can select different sources for the front and rear speakers
- Chime input: can be sent to any audio output, at any volume level
- Chime adder circuit: chime input can also be summed with left front and/or right front audio, or be turned off.

2 GENERAL DESCRIPTION

The TEA6886HL is a monolithic bipolar integrated circuit providing the stereo decoder function and ignition noise blanking facility combined with source selector and tone/volume control for AM/FM car radio applications. The device operates with a power supply voltage range from 7.8 to 9.2 V and a typical current consumption of 40 mA.

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

4 QUICK REFERENCE DATA

| SYMBOL | PARAMETER | CONDITIONS | MIN. | TYP. | MAX. | UNIT |
|----------------------------|---|---|------|------|------|------|
| V_{CC} | supply voltage | | 7.8 | 8.5 | 9.2 | V |
| I_{CC} | supply current | | 32 | 40 | 48 | mA |
| Stereo decoder path | | | | | | |
| S/N | signal-to-noise ratio | | – | 78 | – | dB |
| THD | total harmonic distortion | | – | 0.1 | – | % |
| α_{CS} | channel separation | | 40 | – | – | dB |
| $V_{o(rms)}$ | output voltage level at ROPO and LOPO (RMS value) | FM: 91% modulation; AM: 100% modulation; $f_{mod} = 400$ Hz | 840 | 950 | 1060 | mV |
| Tone volume control | | | | | | |
| $V_{o(max)(rms)}$ | maximum output voltage level at LF, LR, RF and RR (RMS value) | $V_{CC} = 8.5$ V; THD $\leq 0.1\%$ | 2000 | – | – | mV |
| G_V | voltage gain | 1 dB steps | –112 | – | +20 | dB |
| $G_{step(vol)}$ | step resolution (volume) | | – | 1 | – | dB |
| G_{bass} | bass control | | –18 | – | +18 | dB |
| G_{treble} | treble control | | –14 | – | +14 | dB |
| $G_{step(treble, bass)}$ | step resolution (bass and treble) | | – | 2 | – | dB |
| (S+N)/N | signal-plus-noise to noise ratio | $V_o = 2.0$ V; $G_V = 0$ dB; unweighted | – | 107 | – | dB |
| THD | total harmonic distortion | $V_{o(rms)} = 1.0$ V; $G_V = 0$ dB | – | 0.01 | – | % |
| RR ₁₀₀ | ripple rejection | $V_{ripple} < 200$ mV (RMS); $f = 100$ Hz; $G_V = 0$ dB | – | 70 | – | dB |
| CMRR | common mode rejection ratio differential stereo input | | 48 | 53 | – | dB |

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

5 BLOCK DIAGRAM

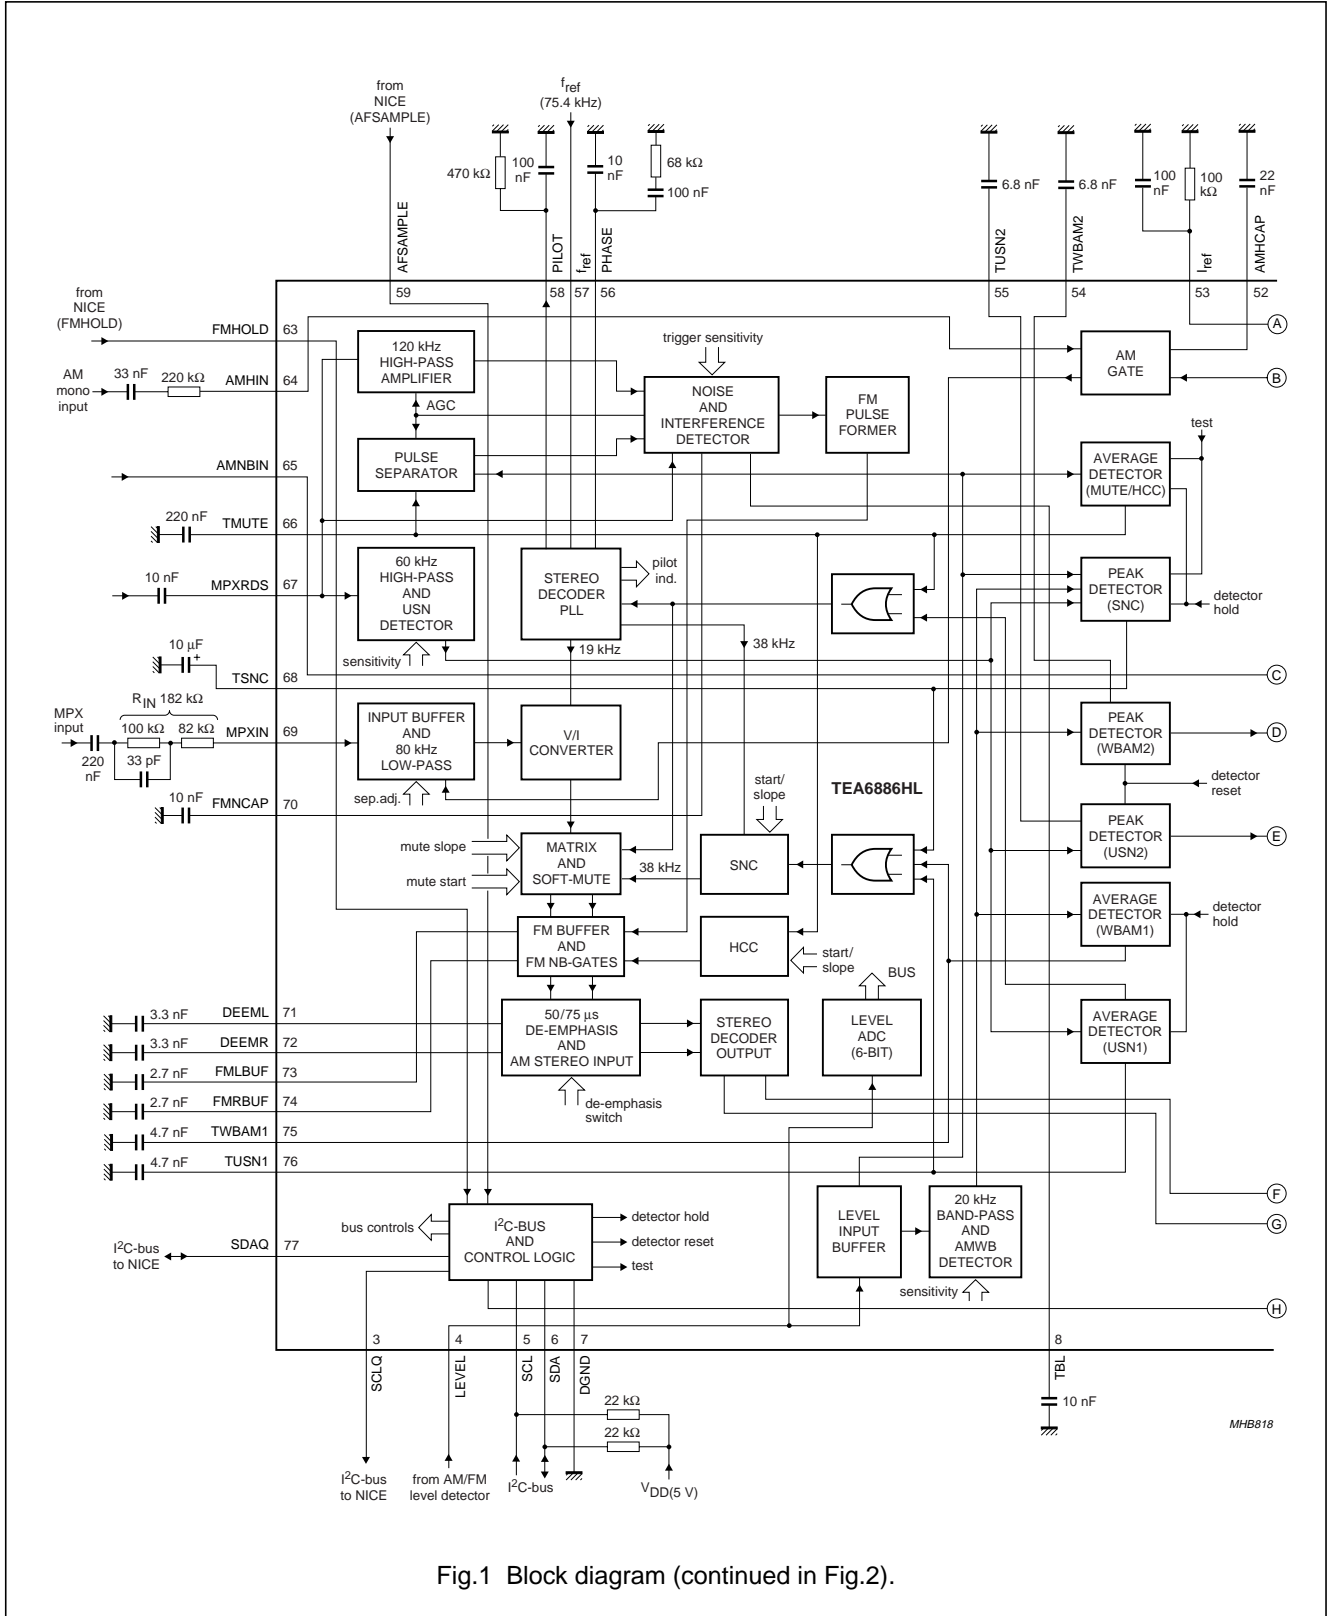


Fig.1 Block diagram (continued in Fig.2).

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

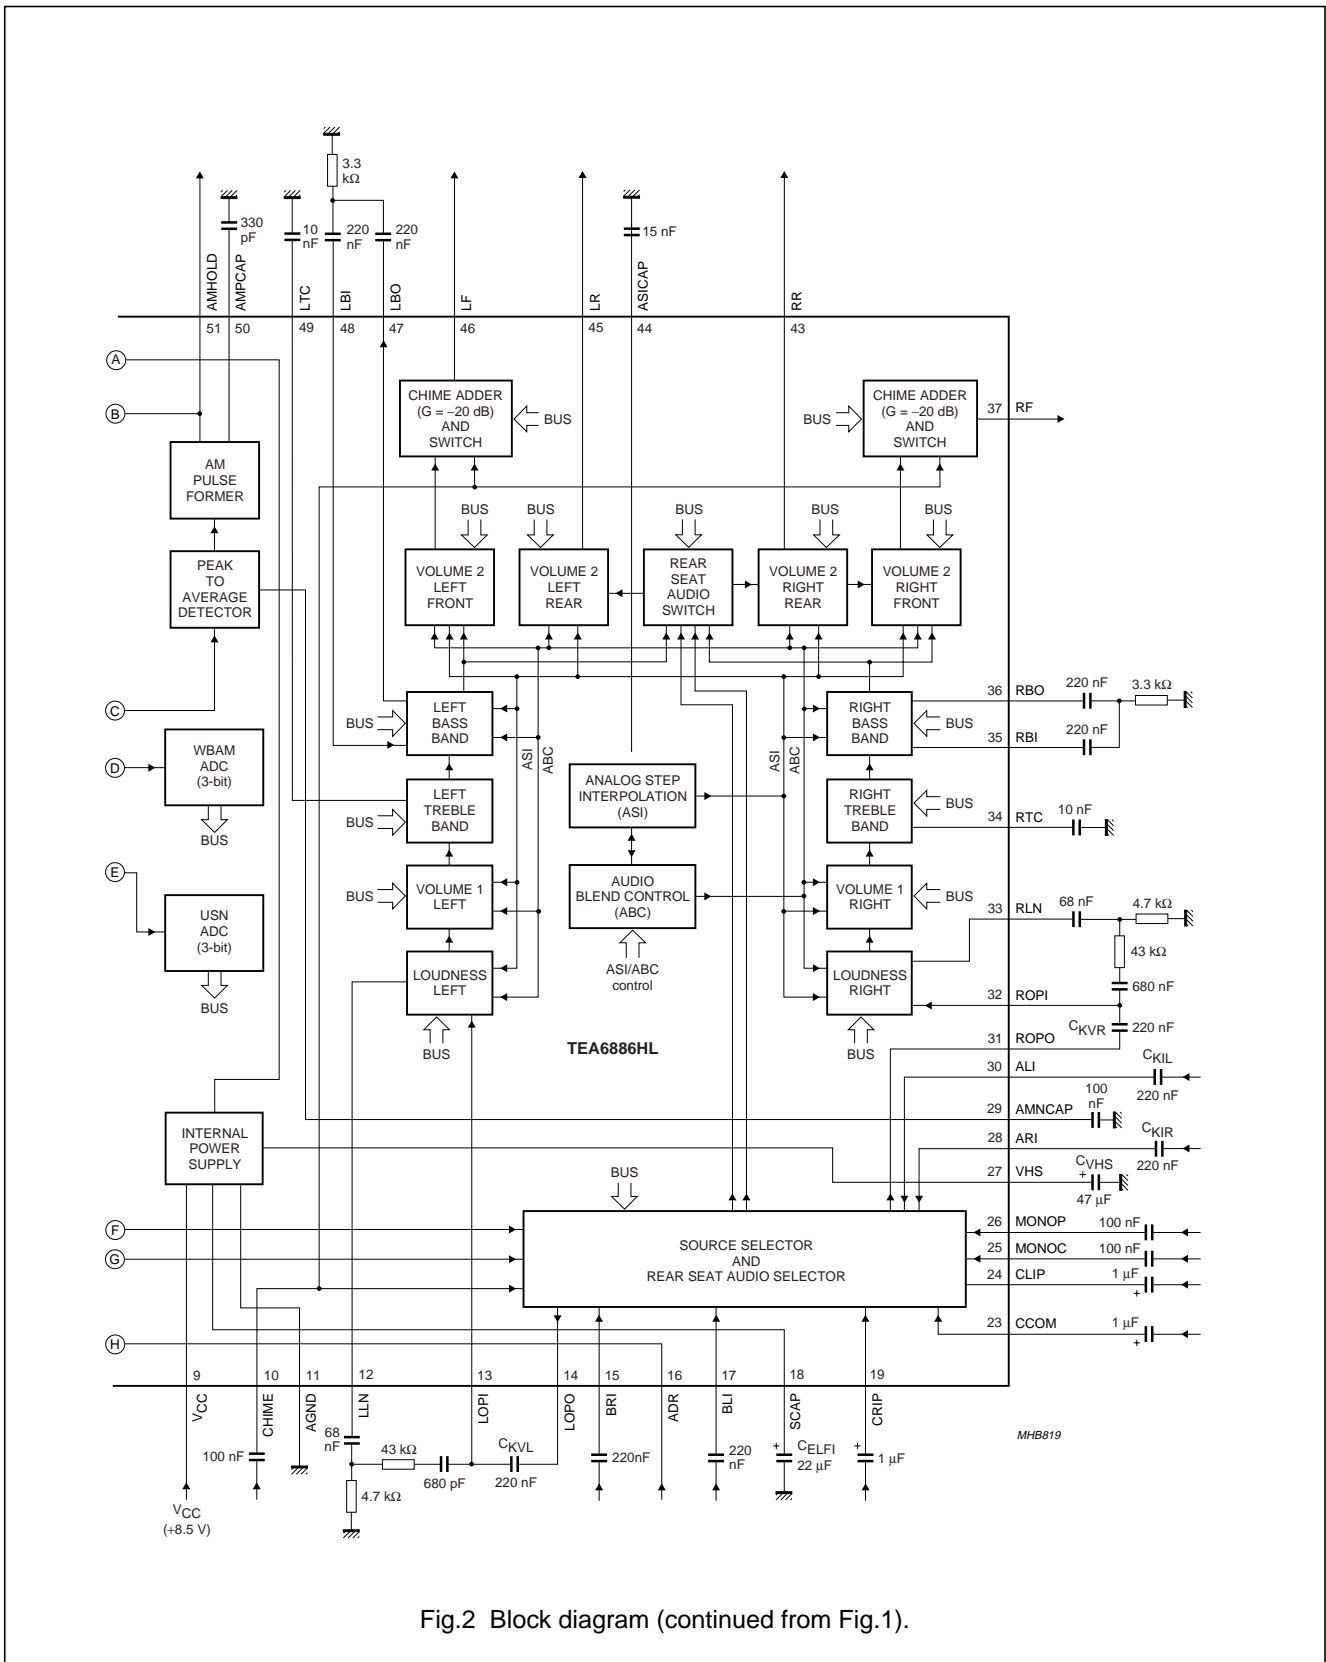


Fig.2 Block diagram (continued from Fig.1).

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

6 PINNING

| SYMBOL | PIN | DESCRIPTION |
|-----------------|-----|--|
| n.c. | 1 | not connected |
| n.c. | 2 | not connected |
| SCLQ | 3 | clock output (to TEA6840H) |
| LEVEL | 4 | FM and AM level input (from TEA6840H) |
| SCL | 5 | I ² C-bus clock input |
| SDA | 6 | I ² C-bus data input/output |
| DGND | 7 | digital ground |
| TBL | 8 | time constant for FM modulation detector |
| V _{CC} | 9 | supply voltage |
| CHIME | 10 | chime tone input |
| AGND | 11 | analog ground |
| LLN | 12 | loudness left network |
| LOPI | 13 | left option port input (terminal impedance typical 100 kΩ) |
| LOPO | 14 | left option port output |
| BRI | 15 | channel B right stereo input (terminal impedance typical 100 kΩ) |
| ADR | 16 | address select input |
| BLI | 17 | channel B left stereo input (terminal impedance typical 100 kΩ) |
| SCAP | 18 | supply filter capacitor |
| CRIP | 19 | channel C right symmetrical input (terminal impedance typical 30 kΩ) |
| n.c. | 20 | not connected |
| n.c. | 21 | not connected |
| n.c. | 22 | not connected |
| CCOM | 23 | channel C common input (terminal impedance typical 30 kΩ) |
| CLIP | 24 | channel C left symmetrical input (terminal impedance typical 30 kΩ) |
| MONOC | 25 | mono common input (terminal impedance typical 30 kΩ) |
| MONOP | 26 | mono symmetrical input (terminal impedance typical 30 kΩ) |
| VHS | 27 | half supply filter capacitor |
| ARI | 28 | channel A right stereo input (terminal impedance typical 100 kΩ) |
| AMNCAP | 29 | peak-to-average detector capacitor for AM noise blanker |
| ALI | 30 | channel A left stereo input (terminal impedance typical 100 kΩ) |
| ROPO | 31 | right option port output |
| ROPI | 32 | right option port input (terminal impedance typical 100 kΩ) |
| RLN | 33 | loudness right network |
| RTC | 34 | right treble capacitor |
| RBI | 35 | right bass network input |
| RBO | 36 | right bass network output |
| RF | 37 | right front output |
| n.c. | 38 | not connected |
| n.c. | 39 | not connected |
| n.c. | 40 | not connected |

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

| SYMBOL | PIN | DESCRIPTION |
|-----------|-----|---|
| n.c. | 41 | not connected |
| n.c. | 42 | not connected |
| RR | 43 | right rear output |
| ASICAP | 44 | analog step interpolate capacitor |
| LR | 45 | left rear output |
| LF | 46 | left front output |
| LBO | 47 | left bass network output |
| LBI | 48 | left bass network input |
| LTC | 49 | left treble capacitor |
| AMPCAP | 50 | AM blanking time capacitor |
| AMHOLD | 51 | AM noise blanker flag |
| AMHCAP | 52 | AM noise blanker hold capacitor |
| I_{ref} | 53 | temperature independent reference current |
| TWBAM2 | 54 | time constant for AM wideband peak detector |
| TUSN2 | 55 | time constant for ultrasonic noise peak detector |
| PHASE | 56 | phase detector |
| f_{ref} | 57 | frequency reference input (75.4 kHz from TEA6840H) |
| PILOT | 58 | pilot on/off output |
| AFSAMPLE | 59 | reset for multipath detector (from TEA6840H for RDS update) |
| n.c. | 60 | not connected |
| n.c. | 61 | not connected |
| n.c. | 62 | not connected |
| FMHOLD | 63 | FM audio processing hold input (from TEA6840H for RDS update) |
| AMHIN | 64 | AM signal input (from TEA6840H) |
| AMNBIN | 65 | AM noise blanker input (from TEA6840H) |
| TMUTE | 66 | time constant for soft mute |
| MPXRDS | 67 | unmuted MPX input (from TEA6840H for RDS update) |
| TSNC | 68 | time constant for stereo noise canceller |
| MPXIN | 69 | MPX input (from TEA6840H) |
| FMNCAP | 70 | FM noise detector capacitor |
| DEEML | 71 | left de-emphasis capacitor |
| DEEMR | 72 | right de-emphasis capacitor |
| FMLBUF | 73 | left AM/FM audio buffer capacitor |
| FMRBUF | 74 | right AM/FM audio buffer capacitor |
| TWBAM1 | 75 | time constant for AM wideband average detector |
| TUSN1 | 76 | time constant for ultrasonic noise average detector |
| SDAQ | 77 | data input/output (to TEA6840H) |
| n.c. | 78 | not connected |
| n.c. | 79 | not connected |
| n.c. | 80 | not connected |

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

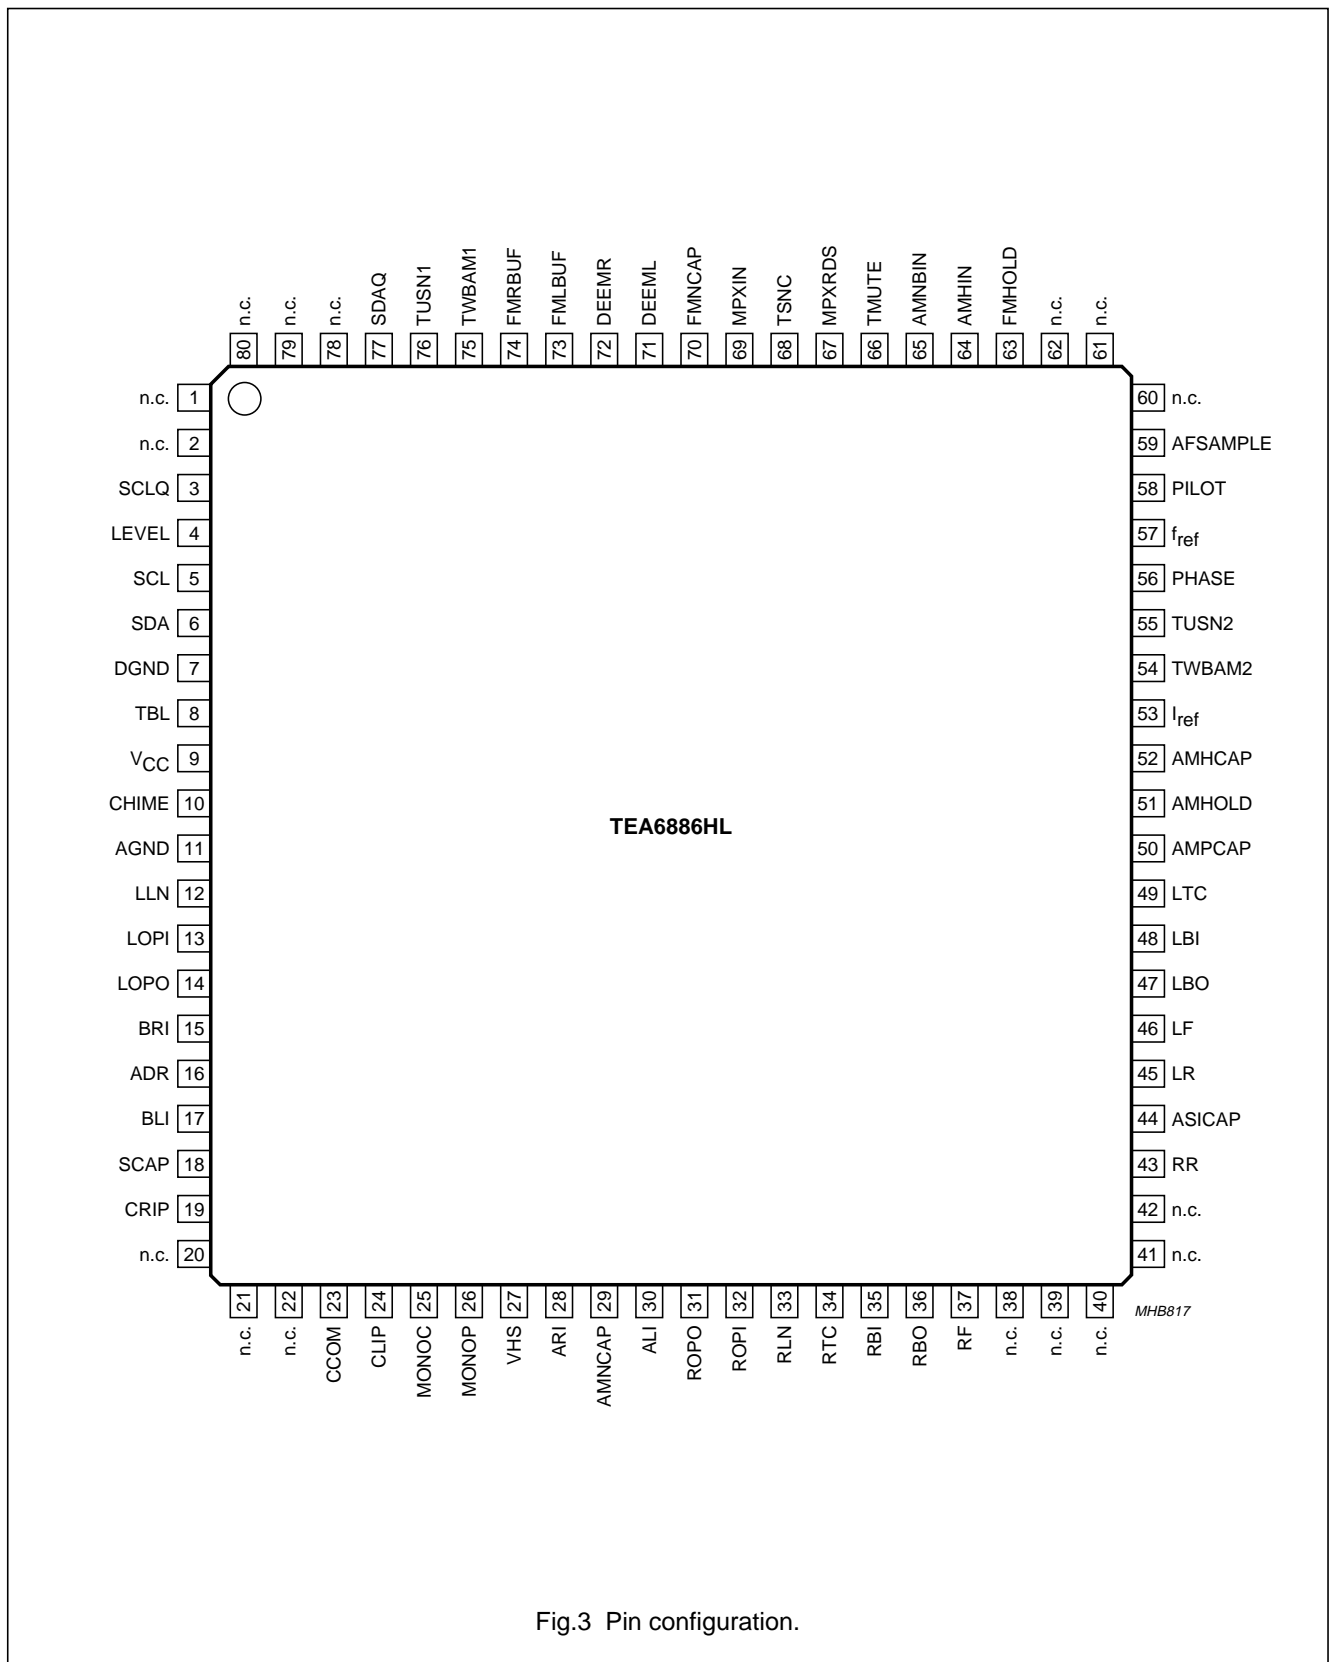


Fig.3 Pin configuration.

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

7 FUNCTIONAL DESCRIPTION

7.1 Stereo decoder

The MPX input is the null-node of an operational amplifier with internal feedback resistor. Adapting the stereo decoder input to the level of the MPX signal, coming from the FM demodulator output, is realized by the value of the input series resistor R_{IN} . To this input a second source (AM detector output) can be fed by current addition.

The input amplifier is followed by an integrated 4th-order Bessel low-pass filter with a cut-off frequency of 80 kHz. It provides the necessary signal delay for FM noise blanking and damping of high frequency interference at the stereo decoder input.

The output signal of this filter is fed to the soft mute control circuitry, the output is voltage-to-current converted and then fed to the phase detector, pilot detector and pilot canceller circuits, contained in the stereo decoder PLL block. A PLL is used for regeneration of the 38 kHz subcarrier. The fully integrated oscillator is adjusted by means of a digital auxiliary PLL into the capture range of the main PLL. The auxiliary PLL needs an external reference frequency (75.4 kHz) which is provided by the TEA6840H. The required 19 and 38 kHz signals are generated by division of the oscillator output signal in a logic circuit. The 19 kHz quadrature phase signal is fed to the 19 kHz phase detector, where it is compared with the incoming pilot tone. The DC output signal of the phase detector controls the oscillator (PLL).

The pilot present detector is driven by an internally generated in-phase 19 kHz signal. Its pilot dependent DC output voltage is fed to a threshold switch, which activates the pilot indicator bit and switches the stereo decoder to stereo operation. The same DC voltage is used to control the amplitude of an anti-phase internally generated 19 kHz signal. The pilot tone is compensated by this anti-phase 19 kHz signal in the pilot canceller.

The pilot cancelled signal is fed to the matrix. There, the side signal is demodulated and combined with the main signal to the left and right audio channels. Compensation for roll-off in the incoming MPX signal caused by the IF filters and the FM demodulator is typically realized by an external compensation network at pin MPXIN, individual alignment is achieved by I²C-bus controlled amplification of the side signal (DAA). A smooth mono-to-stereo takeover is achieved by controlling the efficiency of the matrix with the help of the SNC peak detector.

The matrix is followed by the FM noise suppression gates, which are combined with FM single poles and High Cut Control (HCC).

The single pole is defined by internal resistors and external capacitors. Audio is fed from the gate circuits to the switchable de-emphasis, where the demodulated AM stereo signal can be fed in. After de-emphasis the signal passes to the output buffers and is fed to the radio input of the source selector. For HCC, the time constant of the single pole contained in the output buffer can be changed to higher values. This function is controlled by an average detector contained in the multipath and fading detector.

7.2 FM noise blanker

The input of the ignition noise blanker is coupled to the MPXRDS input signal and to the LEVEL input. Both signals are fed via separate 120 kHz filters and rectifiers to an adder circuit. The output signal of the adder circuit is fed in parallel to the noise detector and the interference detector. The noise detector is a negative peak detector. Its output controls the trigger sensitivity (prevention of false triggering at noisy input signals) and the gain of the MPX high-pass filter. The output of the interference detector, when receiving a steep pulse, fires a single-shot trigger circuit, contained in the pulse former circuitry. The time constant of the single-shot trigger circuit is defined by an internal capacitor, and its output activates the blanking gates in the audio.

7.3 AM noise blanker

The AM noise blanking pulse is derived from the AM audio signal which is fed into pin AMNBIN with the help of a peak-to-average comparator. The blanking time is set by a pulse former with external capacitor. The blanking pulse is fed to the gate in the AM audio path and out at pin AMHOLD to operate the gate built into the external AM stereo processor.

7.4 Multipath/fading detection and weak signal control

For FM signal quality dependent controls there is a built-in combination of six detectors. These detectors are driven by the level information direct, by the AC components on the level via a 20 kHz band-pass filter (AM wideband) or by the high notes present at the FM demodulator output via a 60 kHz high-pass filter (ultrasonic noise). The relationship between the DC level and the AC components is programmable by the I²C-bus (2 bits each). The output of the level buffer, AM wideband detector and ultrasonic noise detector are analog-to-digital converted and readable by the I²C-bus.

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

For the period of fast RDS updating soft mute, SNC and HCC can be put on hold. The AM wideband peak detector and the ultrasonic noise peak detector are reset by a switch signal delivered from the TEA6840H via pin FMHOLD.

The six separate detecting circuits are as follows:

1. The AM wideband noise peak detector is driven from a 20 kHz band-pass filter connected to the level buffer output. The time constant is defined by an external capacitor connected to pin TWBAM2. The output voltage of the detector is analog-to-digital converted by a 3-bit ADC.
2. The AM wideband noise average detector is driven from a 20 kHz band-pass filter connected to the level buffer output. The time constant is defined by an external capacitor connected to pin TWBAM1. The output of the detector is connected to the Stereo Noise Control (SNC) circuit.
3. The ultrasonic noise peak detector is driven from a 60 kHz high-pass filter connected to the MPX signal from pin MPXRDS. The time constant is defined by an external capacitor connected to pin TUSN2. The output voltage of the detector is analog-to-digital converted by a 3-bit ADC.
4. The ultrasonic noise average detector is driven from a 60 kHz high-pass filter connected to the MPX signal from pin MPXRDS. The time constant is defined by an external capacitor connected to pin TUSN1. The output of the detector is connected to soft mute control and stereo noise control circuits.
5. For soft mute and high cut control purposes an average detector with an externally defined time constant (TMUTE) is provided. The detector is driven by level output only. Soft mute and high cut control can be switched off via the I²C-bus.
6. The stereo noise control peak detector with an externally defined time constant (TSNC) is driven by DC level output, AM wideband and ultrasonic noise outputs. It provides the stereo blend facility (SNC). The starting point and slope of the stereo blend can be chosen via the I²C-bus controlled reference voltage.

7.5 Tone/volume control

The tone/volume control part consists of the following functions:

- Source selector
- Loudness
- Volume 1
- Treble
- Bass
- Volume 2
- Rear Seat Audio (RSA) selector
- Chime adder
- Analog step interpolation
- Audio blend control.

The stages loudness, volume 1, bass and volume 2 include the Analog Step Interpolation (ASI) function. This minimizes pops by smoothing out the transitions in the audio signal during switching. The transition time is I²C-bus programmable in a range of 1 : 24 in four steps.

The stages loudness, volume 1 and volume 2 also have the Audio Blend Control (ABC) function. This minimizes pops by automatically incrementing the volume and loudness controls through each step between their present settings and the new settings. The speed of the ABC function is correlated with the transition time of the ASI function.

All stages are controlled via the I²C-bus.

7.5.1 SOURCE SELECTOR

The source selector allows the selection between 6 sources:

- 2 external stereo inputs (ALI, ARI, BLI and BRI)
- 1 external symmetrical stereo input (CLIP, CRIP and CCOM)
- 1 external symmetrical mono input (MONOP and MONON)
- 1 internal stereo input (AM/FM)
- 1 chime/diagnostic mono input (CHIME).

A chime input signal can be sent to any audio output, at any volume level, via the chime/diagnostic mono input.

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

7.5.2 LOUDNESS

The output of the source selector is fed into the loudness circuit via the external capacitor C_{KVL} (between pins LOPO and LOPI) and C_{KVR} (between pins ROPO and ROPI). Depending on the external circuits for the left and the right channel, only a bass boost or bass and treble boost is available. The external circuits illustrated in Figs 13 and 15 will produce the curves illustrated in Figs 14 and 16 (without the influence of C_{KVL} and C_{KVR} respectively).

7.5.3 VOLUME 1

The volume 1 control circuit follows the loudness circuit. The control range of volume 1 is between +20 and -36 dB in steps of 1 dB.

7.5.4 TREBLE

The output signal of the volume 1 control circuit is fed into the treble control stage. The control range is between +14 and -14 dB in steps of 2 dB. Fig.20 shows the control characteristic with external capacitors of 10 nF.

7.5.5 BASS

The bass control is the next stage. The characteristic of the bass curves depends upon the external circuits connected to pins LBO and LBI (left channel) and pins RBO and RBI (right channel) and also upon the setting of bit BSYM (MSB of the bass control byte). When BSYM = 1, an equalizer characteristic is obtained and when BSYM = 0, a shelving characteristic is obtained.

Figures 17 and 18 show the bass curves with an external circuit of 2×220 nF capacitors and a resistor of 3.3 k Ω for each channel with different values for BSYM. Figure 19 shows the bass curves with an external capacitor of 47 nF for each channel and BSYM = 0, for boost and cut.

7.5.6 VOLUME 2

The four volume 2 blocks are located at the end of the tone/volume control. In addition to volume control (same settings as volume 2) the balance and fader functions are also performed by individual attenuation offsets for the four attenuators. The control range of these attenuators is 56 dB in steps of 1 dB and the additional steps of -58.5 dB, -62 dB, -68 dB, and a mute step.

7.5.7 RSA SELECTOR

The RSA selector provides the possibility to select an alternative source for the rear channels. In this event rear channels are only controlled by the volume 2 function.

7.5.8 CHIME ADDER

The chime adder circuit enables the chime input signal to be summed with the left front and/or right front audio, or be turned off.

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

8 LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 60134).

| SYMBOL | PARAMETER | CONDITIONS | MIN. | MAX. | UNIT |
|-----------|---|--------------------|----------------|----------|------|
| V_{CC} | supply voltage | | -0.3 | +10 | V |
| V_i | voltage at all pins (except SCL and SDA) | $V_{CC} \leq 10$ V | $V_{SS} - 0.3$ | V_{CC} | V |
| | voltage at pins SCL and SDA | | $V_{SS} - 0.3$ | 9.7 | V |
| P_{tot} | total power dissipation | | - | 480 | mW |
| T_{stg} | storage temperature | | -65 | +150 | °C |
| T_{amb} | ambient temperature | | -40 | +85 | °C |
| V_{es} | electrostatic handling voltage for all pins | note 1 | -200 | +200 | V |
| | | note 2 | -2000 | +2000 | V |

Notes

- Machine model: $R = 0 \Omega$, $C = 200$ pF.
- Human body model: $R = 1.5$ k Ω , $C = 100$ pF.

9 THERMAL CHARACTERISTICS

| SYMBOL | PARAMETER | CONDITIONS | VALUE | UNIT |
|---------------|---|-------------|-------|------|
| $R_{th(j-a)}$ | thermal resistance from junction to ambient | in free air | 54 | K/W |

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

10 CHARACTERISTICS

FM part: input signal $V_{i(\text{MPX})(\text{p-p})} = 1.89 \text{ V}$; $m = 100\%$ ($\Delta f = \pm 75 \text{ kHz}$, $f_{\text{mod}} = 400 \text{ Hz}$); de-emphasis of $75 \mu\text{s}$ and series resistor at input $R_{\text{IN}} = 182 \text{ k}\Omega$; FM audio measurements are taken at pins LOPO and ROPO. Tone part: $R_{\text{S}} = 600 \Omega$; $R_{\text{L}} = 10 \text{ k}\Omega$, AC-coupled; $C_{\text{L}} = 2.5 \text{ nF}$; CLK = square wave (5 to 0 V) at 100 kHz; stereo source = A channel input; volume 1 attenuator = 0 dB; loudness = 0 dB, off; volume 2 attenuators = 0 dB; bass linear; treble linear; input voltage = 1 V, $f = 1 \text{ kHz}$. Tone part audio measurements are taken at RF and LF. $V_{\text{CC}} = 8.3 \text{ to } 8.7 \text{ V}$; $V_{\text{SS}} = 0 \text{ V}$; $T_{\text{amb}} = 25 \text{ }^\circ\text{C}$; unless otherwise specified. This IC shall not radiate noise in the audio system such that it disturbs any other circuit. This IC shall also not be susceptible to the radiation of any other circuit.

| SYMBOL | PARAMETER | CONDITIONS | MIN. | TYP. | MAX. | UNIT |
|---------------------------------|---|---|------|------|------|---------------|
| V_{CC} | supply voltage | | 7.8 | 8.5 | 9.2 | V |
| I_{CC} | supply current | $V_{\text{CC}} = 8.5 \text{ V}$ | 32 | 40 | 48 | mA |
| V_{HS} | half supply voltage | $V_{\text{CC}} = 8.5 \text{ V}$ | 3.75 | 4.25 | 4.75 | V |
| I_{ref} | reference current | $V_{\text{CC}} = 8.5 \text{ V}$; $R_{\text{ext}} = 100 \text{ k}\Omega$ | 35 | 37 | 39 | μA |
| FM signal path | | | | | | |
| $V_{i(\text{MPX})(\text{p-p})}$ | MPX input signal (peak-to-peak value) | $R_{\text{i}} = 182 \text{ k}\Omega$ | – | 1.89 | – | V |
| $\Delta V_{i(\text{MPX})}$ | overdrive margin of MPX input signal | THD = 1% | 6 | – | – | dB |
| I_{i} | AF input current | | – | 3.66 | – | μA |
| $I_{\text{i(max)}}$ | maximum AF input current | THD = 1% | 7.32 | – | – | μA |
| $V_{\text{O(rms)}}$ | AF mono output signal (RMS value) | 91% modulation without pilot | 890 | 1000 | 1110 | mV |
| ΔV_{out} | AF mono channel balance | without pilot; $V_{\text{LOPO}}/V_{\text{ROPO}}$ | –1 | – | +1 | dB |
| α_{cs} | channel separation | aligned setting of data byte 1, bit 0 to bit 3; $m = 30\%$ modulation plus 9% pilot $L = 1$; $R = 0$ | 40 | 47 | 70 | dB |
| | | $L = 0$; $R = 1$ | 40 | 47 | 70 | dB |
| THD | total harmonic distortion | $V_{i(\text{MPX})(\text{p-p})} = 1.89 \text{ V}$; $f_{\text{mod}} = 1 \text{ kHz}$ without pilot | – | 0.1 | 0.3 | % |
| | | $V_{i(\text{MPX})(\text{p-p})} = 1.89 \text{ V}$; $f_{\text{mod}} = 5 \text{ kHz}$ $L = 1$; $R = 0$ | – | 0.1 | 0.3 | % |
| | | $L = 0$; $R = 1$ | – | 0.1 | 0.3 | % |
| S/N | signal-to-noise ratio | $f = 20 \text{ Hz to } 15 \text{ kHz}$ | 75 | 78 | – | dB |
| α_{19} | pilot signal suppression | $f = 19 \text{ kHz}$ | 40 | 50 | – | dB |
| α_{38} | subcarrier suppression | $f = 38 \text{ kHz}$ | 35 | 50 | – | dB |
| α_{57} | | $f = 57 \text{ kHz}$ | 40 | – | – | dB |
| α_{76} | | $f = 76 \text{ kHz}$ | 50 | 60 | – | dB |
| IM2 | second order intermodulation for $f_{\text{spur}} = 1 \text{ kHz}$ | $f_{\text{mod}} = 10 \text{ kHz}$; note 1 | – | 60 | – | dB |

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

| SYMBOL | PARAMETER | CONDITIONS | MIN. | TYP. | MAX. | UNIT |
|--|--|---|------|------|------|------------------|
| IM3 | third order intermodulation for $f_{\text{spur}} = 1 \text{ kHz}$ | $f_{\text{mod}} = 13 \text{ kHz}$; note 1 | – | 58 | – | dB |
| $\alpha_{57(\text{RDS})}$ | traffic radio (RDS) | $f = 57 \text{ kHz}$; note 2 | – | 70 | – | dB |
| α_{67} | Subsidiary Communication Authorization (SCA) | $f = 67 \text{ kHz}$; note 3 | 70 | – | – | dB |
| α_{114} | Adjacent Channel Interference (ACI) | $f = 114 \text{ kHz}$; note 4 | – | 80 | – | dB |
| α_{190} | | $f = 190 \text{ kHz}$; note 4 | – | 70 | – | dB |
| PSRR | power supply ripple rejection | $f = 100 \text{ Hz}$; $V_{\text{ripple}} = 100 \text{ mV (RMS)}$ | – | 30 | – | dB |
| R_{SDEEML} ; R_{SDEEMR} | de-emphasis output source resistance | data byte 3, bit 5 = 1; $75 \mu\text{s}$ | 20 | 22.7 | 25.4 | $\text{k}\Omega$ |
| | | data byte 3, bit 5 = 0; $50 \mu\text{s}$ | 13.4 | 15.2 | 17 | $\text{k}\Omega$ |
| I_{FMLBUF} ; I_{FMRBUF} | current capacity of FM buffer | $V_{\text{FMLBUF,FMRBUF}} = 5.5 \pm 1 \text{ V}$ | 50 | – | 200 | μA |
| PLL VCO | | | | | | |
| f_{osc} | oscillator frequency | | – | 228 | – | kHz |
| | frequency range of free running oscillator | | 190 | – | 270 | kHz |
| f_{ref} | reference frequency | | – | 75.4 | – | kHz |
| $V_{i(\text{fref})}$ | reference frequency input voltage | | 30 | 100 | 500 | mV |
| $Z_{i(\text{fref})}$ | input impedance | | 100 | – | – | $\text{k}\Omega$ |
| PLL pilot detector | | | | | | |
| $V_{i(\text{pilot})(\text{rms})}$ | pilot threshold voltage for automatic switching by pilot input voltage (RMS value) | stereo on; $\text{STIN} = 1$ | – | 27 | 37 | mV |
| | | stereo off; $\text{STIN} = 0$ | 9 | 22 | – | mV |
| $\text{hys}_{(\text{pilot})}$ | hysteresis of pilot threshold voltage | | – | 2 | – | dB |
| V_{PILOT} | switching voltage for external mono control (PILOT) | | 0.3 | – | 0.7 | V |
| AM signal path | | | | | | |
| V_{LOPO} ; V_{ROPO} | AC output voltage at LOPO and ROPO | $\text{AMON} = 1$ and $\text{AMST} = 0$; $R_i = 220 \text{ k}\Omega$; $V_{i\text{AM}(\text{mono})} = 250 \text{ mV}$ | 195 | 245 | 295 | mV |
| G_v | AM stereo audio buffer voltage gain | subaddress 0H: $\text{AMON} = 1$ and $\text{AMST} = 1$; input signal at pins DEEML or DEEMR; coupled with 220 nF ; $V_{i(\text{DEEML,DEEMR})} = 200 \text{ mV}$; $f_i = 1 \text{ kHz}$; note 5 | 7 | 8 | 9 | dB |
| $R_{i(\text{DEEML,DEEMR})}$ | input resistance for AM stereo left and right | $\text{AMON} = 1$ and $\text{AMST} = 1$; note 6 | 80 | 100 | 120 | $\text{k}\Omega$ |

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

| SYMBOL | PARAMETER | CONDITIONS | MIN. | TYP. | MAX. | UNIT |
|--|---|---|------|-------|------|---------|
| Noise blanker | | | | | | |
| FM PART | | | | | | |
| t_{sup} | interference suppression time | | 20 | 30 | 40 | μ s |
| I_{offset} | gate input offset current at pins during suppression pulse duration | during AF suppression time | – | 20 | 50 | nA |
| $I_{ch(FMNCAP)}$ | charge current | no input signal; $V_{FMNCAP} = V_{FMNCAP(int)} - 0.7$ V | –16 | –12.5 | –9.5 | μ A |
| $I_{dch(FMNCAP)}$ | discharge current | no input signal; $V_{FMNCAP} = V_{FMNCAP(int)} + 0.7$ V | 45 | 70 | 100 | μ A |
| <i>Trigger Threshold Control (TTC), dependency on MPX signal at MPXRDS input</i> | | | | | | |
| V_{FMNCAP} | trigger threshold variation voltage | $V_{i(MPXRDS)} = 0$ V | 4.5 | 5 | 5.5 | V |
| ΔV_{FMNCAP} | trigger threshold voltage | $V_{i(MPXRDS)} = 10$ mV; $f = 120$ kHz | 15 | 40 | 80 | mV |
| | | $V_{i(MPXRDS)} = 100$ mV; $f = 120$ kHz | 75 | 100 | 200 | mV |
| ΔV_{TBL} | trigger threshold variation with audio frequency $f = 15$ kHz | $V_{i(MPXRDS)} = 670$ mV | – | 500 | – | mV |
| <i>Trigger Threshold Control (TTC), dependency on level detector input signal</i> | | | | | | |
| V_{FMNCAP} | trigger threshold voltage | $V_{LEVEL(AC)} = 0$ V | 4.5 | 5 | 5.5 | V |
| ΔV_{FMNCAP} | trigger threshold voltage as a function of $V_{LEVEL(AC)}$ | $V_{LEVEL(AC)} = 10$ mV; $f = 120$ kHz | – | 0 | – | mV |
| | | $V_{LEVEL(AC)} = 200$ mV; $f = 120$ kHz | – | 40 | – | mV |
| <i>Trigger sensitivity measurement with pulse (on MPX signal) at MPXRDS input</i> | | | | | | |
| V_{pulse} | trigger sensitivity | $t_{pulse} = 10$ μ s; write mode; data byte 3, bits 6 and 7: NBS1 = 0; NBS0 = 0 | – | 60 | – | mV |
| | | NBS1 = 0; NBS0 = 1 | – | 100 | – | mV |
| | | NBS1 = 1; NBS0 = 0 | – | 150 | – | mV |
| | | NBS1 = 1; NBS0 = 1 | – | 200 | – | mV |
| <i>Trigger sensitivity measurement with pulse (on level signal) at AM/FM level input</i> | | | | | | |
| V_{pulse} | trigger sensitivity | $t_{pulse} = 10$ μ s; $V_{LEVEL} = 0.5$ V; write mode; data byte 3, bits 6 and 7: NBS1 = 0; NBS0 = 0 | – | 250 | – | mV |
| | | NBS1 = 0; NBS0 = 1 | – | 275 | – | mV |
| | | NBS1 = 1; NBS0 = 0 | – | 300 | – | mV |
| | | NBS1 = 1; NBS0 = 1 | – | 320 | – | mV |

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

| SYMBOL | PARAMETER | CONDITIONS | MIN. | TYP. | MAX. | UNIT |
|---|---|---|------|------|------|---------------|
| AM PART | | | | | | |
| m_{mod} | trigger threshold | | – | 140 | – | % |
| $V_{\text{AMPCAP(AC)}}$ | AF voltage at AMHCAP | $V_{\text{iAM(mono)}} = 50 \text{ mV (RMS)}$; $f = 1 \text{ kHz}$ | 16 | 22 | 30 | mV |
| α_{AMGATE} | attenuation of blanking gate | $V_{\text{iAM(mono)}} = 50 \text{ mV (RMS)}$; gate open: internal voltage; gate closed: $V_{\text{AMHOLD(DC)}} = 4 \text{ V}$; note 7 | –60 | –70 | –80 | dB |
| $t_{\text{sup(AMHOLD)}}$ | suppression time at AMHOLD | $t_{\text{pulse}} = 10 \text{ }\mu\text{s}$; repetition rate = 50 Hz; $V_{\text{pulse}} = 1.7 \text{ V}$ (AMNBIN); $V_{\text{LEVEL}} = 0.5 \text{ V}$ | 400 | 500 | 600 | μs |
| $V_{\text{(AMNCAP)DC}}$ | detector voltage; $V_{\text{ext(AMNBIN)DC}} - 0.7 \text{ V}$ | $V_{\text{AMNBIN(AC)}} = 0 \text{ V}$; $V_{\text{(LEVEL)DC}} = 3.5 \text{ V}$ | 3 | 3.5 | 4 | V |
| f_{AMHOLD} | trigger sensitivity | $t_{\text{pulse}} = 10 \text{ }\mu\text{s}$; repetition rate = 50 Hz; $V_{\text{pulse}} = 1.7 \text{ V}$ (AMNBIN); $V_{\text{LEVEL}} = 4 \text{ V}$ | 45 | 50 | 55 | Hz |
| I_{offset} | gate input offset current at pins during suppression pulse duration | during AF suppression time | –50 | 0 | +50 | nA |
| Muting average detector (TMUTE); see Fig.12 | | | | | | |
| $V_{\text{i(LEVEL)}}$ | input voltage on LEVEL | | 0.5 | – | 4 | V |
| G_{v} | voltage gain LEVEL to TMUTE | | – | 0 | – | dB |
| ΔV_{TMUTE} | offset between TMUTE and LEVEL | | – | 1.5 | – | V |
| $\Delta V_{\text{TMUTE/K}}$ | temperature dependence at TMUTE | | – | 3.3 | – | mV/K |
| MUTING AVERAGE DETECTOR TIME CONSTANT | | | | | | |
| $I_{\text{ch(TMUTE)}}$ | TMUTE charge current | | – | –0.2 | – | μA |
| $I_{\text{dch(TMUTE)}}$ | TMUTE discharge current | | – | 0.2 | – | μA |
| V_{O} | DC output voltage | | 2 | – | 5 | V |
| TEST CONDITION | | | | | | |
| $I_{\text{ch(test)}}$ | capacitor charge current | data byte 6, bit 7 = 1 | – | –12 | – | μA |
| $I_{\text{dch(test)}}$ | capacitor discharge current | data byte 6, bit 7 = 1 | – | 12 | – | μA |
| AM wideband average detector (TWBAM1); see Fig.6 | | | | | | |
| V_{TWBAM1} | DC voltage at TWBAM1 with respect to AGND | $V_{\text{LEVEL(AC)}} = 400 \text{ mV}$; $V_{\text{LEVEL(DC)}} = 3.5 \text{ V}$; $f_{\text{i}} = 24 \text{ kHz}$; write mode; data byte 1, bits 4 and 5: AWS1 = 1; AWS0 = 1 AWS1 = 1; AWS0 = 0 AWS1 = 0; AWS0 = 1 AWS1 = 0; AWS0 = 0 | – | 4.10 | – | V |
| | | | – | 3.60 | – | V |
| | | | – | 3.00 | – | V |
| | | | – | 2.35 | – | V |

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

| SYMBOL | PARAMETER | CONDITIONS | MIN. | TYP. | MAX. | UNIT |
|---|--|---|------------------------------|------------------------------|------------------------------|------------------|
| $V_{C_{TWBAM1}}$ | DC voltage coefficient | $V_{LEVEL(AC)} = 400 \text{ mV}$; $V_{LEVEL(DC)} = 3.5 \text{ V}$; $f_i = 24 \text{ kHz}$; write mode; note 8; data byte 1, bits 4 and 5: AWS1 = 1; AWS0 = 1 AWS1 = 1; AWS0 = 0 AWS1 = 0; AWS0 = 1 AWS1 = 0; AWS0 = 0 | 0.69 0.60 0.50 0.40 | 0.82 0.72 0.60 0.47 | 0.98 0.86 0.71 0.56 | |
| V_O | DC output voltage | | 1.5 | – | 5.5 | V |
| AM WIDEBAND AVERAGE DETECTOR TIME CONSTANT | | | | | | |
| $I_{ch(TWBAM1)}$ | TWBAM1 charge current | | –19.5 | –15 | –11.5 | μA |
| $I_{dch(TWBAM1)}$ | TWBAM1 discharge current | | 11.5 | 15 | 19.5 | μA |
| Ultrasonic noise average detector (TUSN1); see Fig.5 | | | | | | |
| V_{TUSN1} | DC voltage at TUSN1 with respect to AGND | $V_{MPXRDS(AC)} = 350 \text{ mV}$; $V_{LEVEL(DC)} = 3.5 \text{ V}$; $f_i = 80 \text{ kHz}$; write mode; data byte 1, bits 6 and 7: USS1 = 1; USS0 = 1 USS1 = 1; USS0 = 0 USS1 = 0; USS0 = 1 USS1 = 0; USS0 = 0 | – – – – | 4.25 4.00 3.50 2.60 | – – – – | V V V V |
| $V_{C_{TUSN1}}$ | DC voltage coefficient | $V_{MPXRDS(AC)} = 350 \text{ mV}$; $V_{LEVEL(DC)} = 3.5 \text{ V}$; $f_i = 80 \text{ kHz}$; write mode; note 9; data byte 1, bits 6 and 7: USS1 = 1; USS0 = 1 USS1 = 1; USS0 = 0 USS1 = 0; USS0 = 1 USS1 = 0; USS0 = 0 | 0.71 0.67 0.60 0.44 | 0.85 0.80 0.70 0.52 | 1.00 0.95 0.85 0.62 | |
| V_O | DC output voltage | | 1.5 | – | 5.5 | V |
| ULTRASONIC NOISE AVERAGE DETECTOR TIME CONSTANT | | | | | | |
| $I_{ch(TUSN1)}$ | TUSN1 charge current | | –19.5 | –15 | –11.5 | μA |
| $I_{dch(TUSN1)}$ | TUSN1 discharge current | | 11.5 | 15 | 19.5 | μA |

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

| SYMBOL | PARAMETER | CONDITIONS | MIN. | TYP. | MAX. | UNIT |
|--|--|--|------------------------------|------------------------------|------------------------------|------------------|
| Peak detector for stereo noise control (TSNC) | | | | | | |
| DEPENDENCY ON LEVEL VOLTAGE; see Fig.12 | | | | | | |
| V _{LEVEL} | input voltage | | 0.5 | – | 4.75 | V |
| G | gain LEVEL to TSNC | | – | 0 | – | dB |
| V _{TSNC} | DC voltage at TSNC referred to DC level voltage at LEVEL | without MPXRDS and LEVEL (AC) input V _{(LEVEL)DC} = 0.5 V V _{(LEVEL)DC} = 3.5 V | 1.75 4.50 | 2.00 5.00 | 2.25 5.50 | V V |
| ΔV _{TSNC/K} | temperature dependence at TSNC | | – | 3.3 | – | mV/K |
| DEPENDENCY ON ULTRASONIC NOISE; see Fig.5 | | | | | | |
| V _{TSNC} | DC voltage at TSNC w.r.t. AGND | V _{MPXRDS(AC)} = 350 mV; V _{(LEVEL)DC} = 3.5 V; f _i = 80 kHz; write mode; data byte 1, bits 6 and 7: USS1 = 1; USS0 = 1 USS1 = 1; USS0 = 0 USS1 = 0; USS0 = 1 USS1 = 0; USS0 = 0 | – – – – | 4.25 4.00 3.50 2.60 | – – – – | V V V V |
| V _{C_{TSNC}} | DC voltage coefficient | V _{MPXRDS(AC)} = 350 mV; V _{(LEVEL)DC} = 3.5 V; f _i = 80 kHz; write mode; note 10; data byte 1, bits 6 and 7: USS1 = 1; USS0 = 1 USS1 = 1; USS0 = 0 USS1 = 0; USS0 = 1 USS1 = 0; USS0 = 0 | 0.71 0.67 0.60 0.40 | 0.85 0.80 0.70 0.52 | 1.00 0.95 0.85 0.62 | |
| V _O | DC output voltage | | 2 | – | 5 | V |

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

| SYMBOL | PARAMETER | CONDITIONS | MIN. | TYP. | MAX. | UNIT |
|--|-------------------------------|---|------|------|------|------|
| DEPENDENCY ON AM WIDEBAND NOISE; see Fig.6 | | | | | | |
| V _{TSNC} | DC voltage at TSNC | V _{LEVEL(AC)} = 400 mV; V _{LEVEL(DC)} = 3.5 V; f _i = 24 kHz; write mode; data byte 1, bits 4 and 5: AWS1 = 1; AWS0 = 1 | – | 4.10 | – | V |
| | | AWS1 = 1; AWS0 = 0 | – | 3.60 | – | V |
| | | AWS1 = 0; AWS0 = 1 | – | 3.00 | – | V |
| | | AWS1 = 0; AWS0 = 0 | – | 2.35 | – | V |
| V _{C_{TSNC}} | DC voltage coefficient | V _{LEVEL(AC)} = 400 mV; V _{LEVEL(DC)} = 3.5 V; f _i = 24 kHz; write mode; note 11; data byte 1, bits 4 and 5: AWS1 = 1; AWS0 = 1 | 0.69 | 0.82 | 0.98 | – |
| | | AWS1 = 1; AWS0 = 0 | 0.60 | 0.72 | 0.86 | – |
| | | AWS1 = 0; AWS0 = 1 | 0.50 | 0.60 | 0.71 | – |
| | | AWS1 = 0; AWS0 = 0 | 0.40 | 0.47 | 0.56 | – |
| V _O | DC output voltage | | 1.5 | – | 5.5 | V |
| DETECTOR TIME CONSTANT | | | | | | |
| I _{ch(TSNC)} | TSNC charge current | | – | –2.5 | – | μA |
| I _{dch(TSNC)} | TSNC discharge current | | – | 65 | – | μA |
| TEST CONDITION | | | | | | |
| I _{ch(test)} | charge current for testing | data byte 6, bit 7 = 1; V _{(LEVEL)DC} = 2 V; V _{(TSNC)DC} = 2.8 V | – | –1.5 | – | mA |
| I _{dch(test)} | discharge current for testing | data byte 6, bit 7 = 1; V _{(LEVEL)DC} = 2 V; V _{(TSNC)DC} = 4.2 V | – | 200 | – | μA |

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

| SYMBOL | PARAMETER | CONDITIONS | MIN. | TYP. | MAX. | UNIT |
|--|---|--|------|------|------|---------------|
| Ultrasonic noise peak detector (TUSN2); see Fig.5 | | | | | | |
| V_{TUSN2} | DC voltage at TUSN2 w.r.t. AGND | $V_{MPXRDS(AC)} = 350 \text{ mV}$; $V_{(LEVEL)DC} = 3.5 \text{ V}$; $f_i = 80 \text{ kHz}$; write mode; data byte 1, bits 6 and 7: USS1 = 1; USS0 = 1 | – | 4.25 | – | V |
| | | USS1 = 1; USS0 = 0 | – | 4.00 | – | V |
| | | USS1 = 0; USS0 = 1 | – | 3.50 | – | V |
| | | USS1 = 0; USS0 = 0 | – | 2.60 | – | V |
| VC_{TUSN2} | DC voltage coefficient | $V_{MPXRDS(AC)} = 350 \text{ mV}$; $V_{(LEVEL)DC} = 3.5 \text{ V}$; $f_i = 80 \text{ kHz}$; write mode; note 12; data byte 1, bits 6 and 7: USS1 = 1; USS0 = 1 | 0.71 | 0.85 | 1.00 | |
| | | USS1 = 1; USS0 = 0 | 0.67 | 0.80 | 0.95 | |
| | | USS1 = 0; USS0 = 1 | 0.60 | 0.70 | 0.85 | |
| | | USS1 = 0; USS0 = 0 | 0.40 | 0.52 | 0.62 | |
| V_O | DC output voltage | | 1.5 | – | 5.5 | V |
| DETECTOR TIME CONSTANT | | | | | | |
| $I_{ch(TUSN2)}$ | TUSN2 charge current | | – | –1.6 | – | μA |
| $I_{dch(TUSN2)}$ | TUSN2 discharge current | | – | 21 | – | μA |
| AM wideband peak detector (TWBAM2); see Fig.6 | | | | | | |
| V_{TWBAM2} | DC voltage at TWBAM2 with respect to AGND | $V_{LEVEL(AC)} = 400 \text{ mV}$; $V_{LEVEL(DC)} = 3.5 \text{ V}$; $f_i = 24 \text{ kHz}$; write mode; data byte 1, bits 4 and 5: AWS1 = 1; AWS0 = 1 | – | 4.10 | – | V |
| | | AWS1 = 1; AWS0 = 0 | – | 3.60 | – | V |
| | | AWS1 = 0; AWS0 = 1 | – | 3.00 | – | V |
| | | AWS1 = 0; AWS0 = 0 | – | 2.35 | – | V |
| VC_{TWBAM2} | DC voltage coefficient | $V_{LEVEL(AC)} = 400 \text{ mV}$; $V_{LEVEL(DC)} = 3.5 \text{ V}$; $f_i = 24 \text{ kHz}$; write mode; note 13; data byte 1, bits 4 and 5: AWS1 = 1; AWS0 = 1 | 0.69 | 0.82 | 0.98 | |
| | | AWS1 = 1; AWS0 = 0 | 0.60 | 0.72 | 0.86 | |
| | | AWS1 = 0; AWS0 = 1 | 0.50 | 0.60 | 0.71 | |
| | | AWS1 = 0; AWS0 = 0 | 0.40 | 0.47 | 0.56 | |
| V_O | DC output voltage | | 2 | – | 5 | V |

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

| SYMBOL | PARAMETER | CONDITIONS | MIN. | TYP. | MAX. | UNIT |
|------------------------------------|---|---|------|------|------|---------------|
| DETECTOR TIME CONSTANT | | | | | | |
| $I_{ch(TWBAM2)}$ | TWBAM2 charge current | | – | –1.6 | – | μA |
| $I_{dch(TWBAM2)}$ | TWBAM2 discharge current | | – | 21 | – | μA |
| Soft mute; see Figs 7 and 4 | | | | | | |
| $\alpha_{0\text{dB}}$ | attenuation at LOPO and ROPO | $V_{\text{TMUTE}} = 3.5 \text{ V}; V_{\text{TUSN1}} = 3.5 \text{ V}$ | –0.5 | 0 | +0.5 | dB |
| $\alpha_{6\text{dB}}$ | start of muting; AC attenuation at LOPO and ROPO | see Fig.4; write mode; data byte 0, bits 0 and 1; MSL0 = 1; MSL1 = 1 | | | | |
| | | MST1 = 0; MST0 = 0; $V_{\text{TMUTE}} = 0.42V_{\text{TUSN1}}$ without AC | 3 | 6 | 9 | dB |
| | | MST1 = 0; MST0 = 1; $V_{\text{TMUTE}} = 0.45V_{\text{TUSN1}}$ without AC | 3 | 6 | 9 | dB |
| | | MST1 = 1; MST0 = 0; $V_{\text{TMUTE}} = 0.47V_{\text{TUSN1}}$ without AC | 3 | 6 | 9 | dB |
| | | MST1 = 1; MST0 = 1; $V_{\text{TMUTE}} = 0.49V_{\text{TUSN1}}$ without AC | 3 | 6 | 9 | dB |
| $\alpha_{10\text{dB}}$ | AC attenuation for setting of mute slope at LOPO and ROPO | MST1 = 0; MST0 = 0; see Fig.7 | | | | |
| | | MSL1 = 0; MSL0 = 0; $V_{\text{TMUTE(DC)}} = 0.35V_{\text{TUSN1}}$ without AC | 7 | 10 | 13 | dB |
| | | MSL1 = 0; MSL0 = 1; $V_{\text{TMUTE(DC)}} = 0.38V_{\text{TUSN1}}$ without AC | 7 | 10 | 13 | dB |
| | | MSL1 = 1; MSL0 = 0; $V_{\text{TMUTE(DC)}} = 0.39V_{\text{TUSN1}}$ without AC | 7 | 10 | 13 | dB |
| | | MSL1 = 1; MSL0 = 1; $V_{\text{TMUTE(DC)}} = 0.395V_{\text{TUSN1}}$ without AC | 7 | 10 | 13 | dB |

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

| SYMBOL | PARAMETER | CONDITIONS | MIN. | TYP. | MAX. | UNIT |
|-----------------------------------|-----------------------------|--|------|------|------|------|
| Stereo Noise Control (SNC) | | | | | | |
| $\alpha_{cs(start)}$ | start of channel separation | aligned at L = 1 and R = 0; data byte 2, SST[3:0] = 1111; V_{TSNC} or V_{TUSN1} or $V_{TWBAM1} = 0.63V_{TUSN1}$ without AC; see note 14 and Fig.9 | 4.5 | 6 | 7.5 | dB |
| | | aligned at L = 1 and R = 0; data byte 2, SST[3:0] = 1000; V_{TSNC} or V_{TUSN1} or $V_{TWBAM1} = 0.70V_{TUSN1}$ without AC; see note 14 and Fig.9 | 4.5 | 6 | 7.5 | dB |
| | | aligned at L = 1 and R = 0; data byte 2, SST[3:0] = 0000; V_{TSNC} or V_{TUSN1} or $V_{TWBAM1} = 0.74V_{TUSN1}$ without AC; see note 14 and Fig.9 | 4.5 | 6 | 7.5 | dB |
| $\alpha_{cs(slope)}$ | slope of channel separation | aligned at L = 1 and R = 0; data byte 2, SST[3:0] = 1000; $V_{TSNC} = 0.72V_{TUSN1}$ without AC; see note 15 and Fig.8; data byte 2, bits 4 and 5: | | | | |
| | | SSL1 = 0; SSL0 = 0 | 3 | 5 | 7 | dB |
| | | SSL1 = 0; SSL0 = 1 | 5 | 7 | 9 | dB |
| | | SSL1 = 1; SSL0 = 0 | 11 | 13 | 15 | dB |
| | | SSL1 = 1; SSL0 = 1 (not defined) | | | | |

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

| SYMBOL | PARAMETER | CONDITIONS | MIN. | TYP. | MAX. | UNIT |
|-------------------------------|---------------------------------|---|------|------|------|------|
| High Cut Control (HCC) | | | | | | |
| $\alpha_{\text{HCC(start)}}$ | AC attenuation for start of HCC | AF = 10 kHz; $V_{\text{MPXIN}} = 200$ mV; HSL1 = 1; HSL0 = 0; data byte 0, SMUT = 0 and MONO = 1; write mode; see note 16 and Fig.10; data byte 3, bits 2 and 3: HST1 = 1; HST0 = 1; $V_{(\text{LEVEL})\text{DC}} = 1.00$ V HST1 = 1; HST0 = 0; $V_{(\text{LEVEL})\text{DC}} = 1.25$ V HST1 = 0; HST0 = 1; $V_{(\text{LEVEL})\text{DC}} = 1.50$ V HST1 = 0; HST0 = 0; $V_{(\text{LEVEL})\text{DC}} = 1.75$ V | 1.5 | 3 | 4.5 | dB |
| | | | 1.5 | 3 | 4.5 | dB |
| | | | 1.5 | 3 | 4.5 | dB |
| | | | 1.5 | 3 | 4.5 | dB |
| $\alpha_{\text{HCC(slope)}}$ | AC attenuation for slope of HCC | AF = 10 kHz; $V_{\text{MPXIN}} = 200$ mV; $C_{\text{FMLBUF}}, C_{\text{FMRBUF}} = 2.7$ nF; HST1 = 1; HST0 = 1; data byte 0, SMUT = 0 and MONO = 1; see note 16 and Fig.11; data byte 3, bits 0 and 1: HSL1 = 1; HSL0 = 1 HSL1 = 1; HSL0 = 0 HSL1 = 0; HSL0 = 1 HSL1 = 0; HSL0 = 0 | 5.5 | 7.5 | 9.5 | dB |
| | | | 4 | 6 | 8 | dB |
| | | | 2 | 4 | 6 | dB |
| | | | 1 | 3 | 5 | dB |
| $\alpha_{\text{HCC(max)}}$ | maximum HCC attenuation | AF = 10 kHz; $V_{\text{TMUTE}} = 2$ V; data byte 0, SMUT = 0 and MONO = 1; data byte 3, bit 1 = bit 0 = 1 $C_{\text{FMLBUF}}, C_{\text{FMRBUF}} = 2.7$ nF; data byte 3, bit 4 = 1 $C_{\text{FMLBUF}}, C_{\text{FMRBUF}} = 680$ pF; data byte 3, bit 4 = 0 | 8 | 10 | 14.5 | dB |
| | | | 8 | 10 | 14.5 | dB |

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

| SYMBOL | PARAMETER | CONDITIONS | MIN. | TYP. | MAX. | UNIT |
|---|---------------------------------|--|-------|------|-------|------|
| Analog-to-digital converters | | | | | | |
| LEVEL ANALOG-TO-DIGITAL CONVERTER (6-BIT) | | | | | | |
| $V_{LEVEL(min)}$ | lower limit of conversion range | | – | 740 | – | mV |
| $V_{LEVEL(max)}$ | upper limit of conversion range | | – | 3.4 | – | V |
| ΔV_{LEVEL} | bit resolution | | – | 42.5 | – | mV |
| ULTRASONIC NOISE ANALOG-TO-DIGITAL CONVERTER (3-BIT) | | | | | | |
| $V_{TUSN(min)}$ | lower limit of conversion range | | – | 2.1 | – | V |
| $V_{TUSN(max)}$ | upper limit of conversion range | | – | 4 | – | V |
| ΔV_{TUSN} | bit resolution | | – | 320 | – | mV |
| AM WIDEBAND NOISE ANALOG-TO-DIGITAL CONVERTER (3-BIT) | | | | | | |
| $V_{TWBAM(min)}$ | lower limit of conversion range | | – | 2.1 | – | V |
| $V_{TWBAM(max)}$ | upper limit of conversion range | | – | 4 | – | V |
| ΔV_{TWBAM} | bit resolution | | – | 320 | – | mV |
| Tone/volume control | | | | | | |
| $G_{v(max)}$ | maximum voltage gain | $R_S \leq 10 \Omega$; $R_L \geq 10 M\Omega$ | 19 | 20 | 21 | dB |
| $G_{v(signal)}$ | signal voltage gain | $T_{amb} = 25 \text{ }^\circ\text{C}$ | –0.75 | 0 | +0.75 | dB |
| | | $T_{amb} = -40 \text{ to } +85 \text{ }^\circ\text{C}$ | –1 | 0 | +1 | dB |
| $V_{o(rms)}$ | output voltage level | THD $\leq 0.5\%$ | – | 2000 | – | mV |
| | | THD = 1%; $G_v = 3 \text{ dB}$ | 2300 | – | – | mV |
| | | $R_L = 2 \text{ k}\Omega$; $C_L = 10 \text{ nF}$; THD = 1% | 2000 | – | – | mV |
| $V_{i(rms)}$ | input sensitivity | $V_o = 500 \text{ mV}$; $G_v = 20 \text{ dB}$ | – | 50 | – | mV |
| f_{ro} | roll-off frequency | high frequency (–1 dB) | 20000 | – | – | Hz |
| | | input A; $C_{KIL} = C_{KIR} = 100 \text{ nF}$; $C_{KVL} = C_{KVR} = 220 \text{ nF}$ | | | | |
| | | low frequency (–1 dB) | – | 35 | 45 | Hz |
| | | low frequency (–3 dB) | – | 20 | 25 | Hz |
| | | input C; $C_{KICL} = C_{KICR} = 1 \text{ }\mu\text{F}$; $C_{KVL} = C_{KVR} = 220 \text{ nF}$ | | | | |
| low frequency (–1 dB) | – | 18 | 23 | Hz | | |
| low frequency (–3 dB) | – | 10 | 13 | Hz | | |
| α_{cs} | channel separation | $V_i = 1 \text{ V}$; frequency range 250 Hz to 20 kHz | 74 | 80 | – | dB |

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

| SYMBOL | PARAMETER | CONDITIONS | MIN. | TYP. | MAX. | UNIT |
|--------|---|--|--|------|------|------|
| THD | total harmonic distortion | valid for input channel A, B or C; same for all 4 outputs refer to inputs | | | | |
| | | $V_{i(rms)} = 1\text{ V}$; $f = 1\text{ kHz}$; volume 1 attenuator: -6 dB ; equalizer bands flat | – | 0.05 | 0.1 | % |
| | | $V_{i(rms)} = 2\text{ V}$; $f = 1\text{ kHz}$; $V_{CC} = 8.3\text{ V}$; volume 1 attenuator: -13 dB ; equalizer bands flat | – | 0.1 | 0.3 | % |
| | | $V_{i(rms)} = 2\text{ V}$; $f = 1\text{ kHz}$; $V_{CC} = 8.5\text{ V}$; volume 1 attenuator: 0 dB ; equalizer bands flat | – | 0.05 | 0.1 | % |
| | | $V_{i(rms)} = 1\text{ V}$; $f = 1\text{ kHz}$; $V_{CC} = 8.3\text{ V}$; volume 1 attenuator: 0 dB ; equalizer bands flat | – | 0.01 | 0.1 | % |
| | | $V_{i(rms)} = 2.3\text{ V}$; $f = 1\text{ kHz}$; $V_{CC} = 9\text{ V}$; volume 1 attenuator: -13 dB ; equalizer bands flat | – | 0.13 | 0.3 | % |
| | | $V_{i(rms)} = 1\text{ V}$; $f = 20\text{ Hz to }20\text{ kHz}$; volume 1 attenuator: -6 dB ; equalizer bands flat | – | 0.05 | 0.2 | % |
| | | $V_{i(rms)} = 2\text{ V}$; $f = 20\text{ Hz to }20\text{ kHz}$; $V_{CC} = 8.3\text{ V}$; volume 1 attenuator: -13 dB ; equalizer bands flat | – | 0.1 | 0.3 | % |
| | | $V_{i(rms)} = 2.3\text{ V}$; $f = 20\text{ Hz to }20\text{ kHz}$; $V_{CC} = 9\text{ V}$; volume 1 attenuator: -13 dB ; equalizer bands flat | – | 0.1 | 0.3 | % |
| | | $V_{i(rms)} = 0.5\text{ V}$; $f = 25\text{ Hz}$; volume 1 attenuator: 0 dB ; equalizer bass boost: $+8\text{ dB}$ | – | 0.1 | 0.2 | % |
| | | $V_{i(rms)} = 0.5\text{ V}$; $f = 4\text{ kHz}$; volume 1 attenuator: 0 dB ; equalizer treble boost: $+8\text{ dB}$ | – | 0.15 | 0.3 | % |
| | | chime adder total harmonic distortion | $V_{i(rms)} = 0.5\text{ V}$; $f = 1\text{ kHz}$; $V_{CC} = 8.5\text{ V}$; no input signal at input A | – | 0.04 | 0.1 |
| PSRR | power supply ripple rejection $C_{VHS} = 47\text{ }\mu\text{F}$; $C_{SCAP} = 22\text{ }\mu\text{F}$ | stereo source: A, B, C or mono; $V_{CC} = 8.5\text{ V} + 0.2\text{ V (RMS)}$ | | | | |
| | | $f = 20\text{ to }100\text{ Hz}$ | 35 | 46 | – | dB |
| | | $f = 1\text{ to }20\text{ kHz}$ | 50 | 65 | – | dB |
| | | $f = 1\text{ kHz}$ | 50 | 75 | – | dB |

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

| SYMBOL | PARAMETER | CONDITIONS | MIN. | TYP. | MAX. | UNIT |
|-----------------------------|--|---|------|------|------|---------------|
| $V_{\text{noise(rms)}}$ | noise voltage CCIR-ARM weighted (RMS value) without input signal and shorted AF inputs | volume 1 attenuator: +20 dB | – | 65 | 100 | μV |
| | | volume 1 attenuator: +20 dB; symmetrical input | – | 100 | 140 | μV |
| | | volume 1 attenuator: 0 dB | – | 10 | 14 | μV |
| | | volume 1 attenuator: 0 dB; symmetrical input | – | 12.5 | 18 | μV |
| | | volume 1 attenuator: 0 dB; bass and treble boost: 6 dB | – | 16 | 25 | μV |
| | | volume 1 attenuator: 0 dB; bass and treble boost: 6 dB; symmetrical input | – | 22 | 32 | μV |
| | | volume 1 attenuator: –9 dB | – | 9 | 14 | μV |
| | | minimum volume; volume 1 attenuator: –18 dB; loudness: –20 dB; volume 2 attenuator: –22 dB | – | 5 | 8 | μV |
| | | mute selected: data byte 8, AMUT = 1 | – | 3.5 | 5 | μV |
| | | volume setting: –20 dB; volume 1 attenuator: –10 dB; loudness: –10 dB; A-weighted | – | 5.7 | 8 | μV |
| CMRR | input common mode rejection | C channel input; $V_{i(\text{rms})} = 1 \text{ V}$; $f = 20 \text{ Hz to } 20 \text{ kHz}$ on CLIP, CRIP and CCOM | 48 | 53 | – | dB |
| | | C channel input; $V_{i(\text{rms})} = 1 \text{ V}$; $f = 1 \text{ kHz}$ on CLIP, CRIP and CCOM | 48 | 53 | – | dB |
| | | C channel input; $V_{i(\text{rms})} = 1 \text{ V}$; $f = 20 \text{ Hz to } 20 \text{ kHz}$ on CLIP, CRIP and CCOM; volume attenuator: –15 dB | 63 | 68 | – | dB |
| $\text{CMRR}_{\text{mono}}$ | mono input common mode rejection | source = mono input | 40 | 45 | – | dB |
| α_{ct} | crosstalk between bus inputs and signal outputs | clock frequency = 50 kHz; repetition burst rate = 300 Hz; total initialization; note 17 | – | 110 | – | dB |
| t_{ABC} | Audio Blend Control (ABC) step time | $C_{\text{ASICAP}} = 22 \text{ nF}$; write mode; data byte 4, bits 6 and 7: | | | | |
| | | ASI1 = 0; ASI0 = 0 | – | 0.83 | – | ms |
| | | ASI1 = 0; ASI0 = 1 | – | 3.33 | – | ms |
| | | ASI1 = 1; ASI0 = 0 | – | 8.33 | – | ms |
| | | ASI1 = 1; ASI0 = 1 | – | 20 | – | ms |

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

| SYMBOL | PARAMETER | CONDITIONS | MIN. | TYP. | MAX. | UNIT |
|---|--|---|-------|------|-------|------------|
| Source selector | | | | | | |
| $Z_{i(\text{stereo})}$ | stereo input impedance (A and B input) | | 80 | 100 | 120 | k Ω |
| $Z_{i(\text{sym})}$ | symmetrical input impedance (C and mono input) | | 24 | 30 | 36 | k Ω |
| $Z_{i(\text{CHIME})}$ | CHIME input impedance (chime input) | | 80 | 100 | 120 | k Ω |
| Z_o | output impedance at ROPO and LOPO | | – | 80 | 100 | Ω |
| R_L | output load resistance at ROPO and LOPO | | 10 | – | – | k Ω |
| C_L | output load capacitance at ROPO and LOPO | | 0 | – | 2500 | pF |
| G_V | source selector voltage gain | | –0.2 | 0 | +0.2 | dB |
| α_S | input isolation of one selected source to any other input | f = 1 kHz | 90 | 105 | – | dB |
| | | f = 12.5 kHz | 80 | 95 | – | dB |
| | | f = 20 Hz to 20 kHz | 75 | 90 | – | dB |
| $V_{i(\text{rms})}$ | maximum input voltage (RMS value) | THD < 0.5%; $V_{CC} = 8.5$ V | 2.0 | 2.15 | – | V |
| | | THD < 0.5%; $V_{CC} = 7.8$ V | 1.8 | 1.9 | – | V |
| Loudness control | | | | | | |
| Z_i | input impedance at ROPI and LOPI | | 80 | 100 | 120 | k Ω |
| G_{loudness} | loudness control, maximum gain | f = 1 kHz; loudness on/off | –0.2 | 0 | +0.2 | dB |
| | loudness control, minimum gain | f = 1 kHz; loudness on/off | –18.5 | –20 | –21.5 | dB |
| $\Delta G_{\text{loudness}}$ | gain, loudness on referred to loudness off | f = 1 kHz; $G_{\text{loudness}} = -20$ dB | –1.5 | 0 | +1.5 | dB |
| G_{step} | step resolution gain | f = 1 kHz | – | 1 | – | dB |
| | step error between any adjoining step | f = 1 kHz | – | – | 0.5 | dB |
| $L_{B\text{max}}$ | maximum loudness boost; without influence of coupling capacitors | compared to 1 kHz; loudness on | | | | |
| | | f = 30 Hz | 17 | 18.5 | 19 | dB |
| | | f = 10 kHz | 4 | 5 | 6 | dB |
| | | compared to 1 kHz; loudness off | | | | |
| | | f = 30 Hz | –1 | – | 0 | dB |
| | | f = 10 kHz | –1 | – | 0 | dB |
| $f_{\text{ref}} = 30$ Hz; $f_{\text{meas}} = 300$ Hz; bass boost only | 12.5 | 14 | 15.5 | dB | | |
| $f_{\text{ref}} = 30$ Hz; $f_{\text{meas}} = 300$ Hz; bass and treble boost | 12 | 13.5 | 15 | dB | | |

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

| SYMBOL | PARAMETER | CONDITIONS | MIN. | TYP. | MAX. | UNIT |
|---------------------------|---------------------------------------|--|------|-------|------|------|
| Volume 1 control | | | | | | |
| G_v | voltage gain | | -36 | - | +20 | dB |
| G_{step} | step resolution gain | | - | 1 | - | dB |
| | step error between any adjoining step | | - | - | 0.5 | dB |
| ΔG_a | attenuator gain set error | $G_v = +20$ to -36 dB | -1 | 0 | +1 | dB |
| ΔG_{track} | gain tracking error | $G_v = +20$ to -36 dB | - | 0 | 1 | dB |
| Treble control | | | | | | |
| G_{treble} | treble gain control, maximum boost | $f = 10$ kHz; $V_{i(\text{rms})} = 200$ mV | 13 | 14 | 15 | dB |
| | maximum attenuation | $f = 10$ kHz | 13 | 14 | 15 | dB |
| G_{step} | step resolution gain | $f = 10$ kHz | - | 2 | - | dB |
| | step error between any adjoining step | $f = 10$ kHz | - | - | 0.5 | dB |
| Bass control | | | | | | |
| G_{bass} | bass gain control, maximum boost | external T-filter; $f = 60$ Hz; BSYB = 1; $V_{i(\text{rms})} = 200$ mV | 16 | 18 | 20 | dB |
| | maximum attenuation | external T-filter; $f = 60$ Hz; BSYC = 0 | 16 | 18 | 20 | dB |
| | | external T-filter; $f = 60$ Hz; BSYC = 1 | 13 | 14.4 | 15.5 | dB |
| G_{step} | step resolution gain | $f = 60$ Hz; boost; BSYB = 1 | - | 2 | - | dB |
| | | $f = 60$ Hz; cut; BSYC = 0 | - | 2 | - | dB |
| | | $f = 60$ Hz; cut; BSYC = 1 | 1.2 | 1.6 | 1.9 | dB |
| | step error between any adjoining step | $f = 60$ Hz | - | - | 0.5 | dB |
| f_c | centre frequency | $C_{\text{bass}} = 2 \times 220$ nF; $R_{\text{bass}} = 3.3$ k Ω | 50 | 60 | 70 | Hz |
| Q_e | equalizer quality factor | $V_{i(\text{rms})} = 200$ mV; boost = 12 dB | 0.8 | 0.9 | 1.1 | |
| EQ_{bow} | equalizer bowing | $V_{i(\text{rms})} = 200$ mV; bass and treble boost = 12 dB; reference flat frequency response | - | 2.1 | 3.3 | dB |
| Volume 2 control | | | | | | |
| G_v | voltage gain | | -68 | - | 0 | dB |
| G_{step} | step resolution | $G_v = 0$ to -56 dB | - | 1 | - | dB |
| | step error between any adjoining step | $G_v = 0$ to -56 dB | - | - | 0.5 | dB |
| | additional steps | | - | -58.5 | - | dB |
| | | | - | -62 | - | dB |
| | | - | -68 | - | dB | |

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

| SYMBOL | PARAMETER | CONDITIONS | MIN. | TYP. | MAX. | UNIT |
|---|---|---|------|------|----------|------------------|
| α_{mute} | mute attenuation | | 100 | 110 | – | dB |
| | | $f = 20 \text{ Hz to } 20 \text{ kHz}$ | 75 | 85 | – | dB |
| ΔG_a | attenuator gain set error | $G_v = 0 \text{ to } -32 \text{ dB}$ | –1 | – | +1 | dB |
| | | $G_v = -32 \text{ to } -68 \text{ dB}$ | –2 | – | +2 | dB |
| ΔG_{track} | gain tracking error | $G_v = 0 \text{ to } -56 \text{ dB}$ | – | 0 | 1 | dB |
| Z_o | output impedance | | – | 80 | 120 | Ω |
| R_L | output load resistance | | 2 | – | – | $\text{k}\Omega$ |
| $C_{o(L)}$ | output load capacitance | | 0 | – | 10 | nF |
| $R_{o(L)}$ | DC load resistance at output to ground | | 4.7 | – | – | $\text{k}\Omega$ |
| Chime adder | | | | | | |
| $G_{v(\text{CHIME})}$ | chime adder voltage gain | $V_{i(\text{rms})} = 1 \text{ V}$; chime input; chime adder on | –21 | –20 | –19 | dB |
| $V_{i(\text{CHIME})(\text{rms})}$ | maximum chime input voltage (sine wave) | main output voltage $V_{o(\text{rms})} < 1.5 \text{ V}$; chime input; chime adder on | 2.0 | – | – | V |
| k | factor for $V_{i(\text{CHIME})}$ to avoid internal clipping | $k \times V_{i(\text{CHIME})(\text{p-p})} < 5.7 \text{ V} - V_{o(\text{p-p})}$ | 0.22 | 0.25 | 0.28 | |
| Digital part (SDA, SDAQ, SCL, SCLQ, FMHOLD, AFSAMPLE); note 18 | | | | | | |
| V_{IH} | HIGH-level input voltage | | 3 | 5 | 9.7 | V |
| V_{IL} | LOW-level input voltage | | –0.3 | +0.3 | +1.5 | V |
| I_{IH} | HIGH-level input current | $V_{CC} = 0 \text{ to } 9.5 \text{ V}$ | –10 | – | +10 | μA |
| I_{IL} | LOW-level input current | | –10 | – | +10 | μA |
| V_{OL} | LOW-level output voltage SDA | $I_L = 3 \text{ mA}$ | – | – | 0.4 | V |
| Digital part (SDAQ and SCLQ); note 18 | | | | | | |
| $I_{o(\text{sink})}$ | output sink current | | – | – | 600 | μA |
| R_{pu} | pull-up resistance | | – | – | 22 | $\text{k}\Omega$ |
| C_L | load capacitance | | – | – | 20 | pF |
| Digital part (ADR); note 18 | | | | | | |
| V_{IH} | HIGH-level input voltage | | 3 | – | V_{CC} | V |
| V_{IL} | LOW-level input voltage | | –0.3 | – | +1.5 | V |
| I_{IH} | HIGH-level input current | | – | – | 150 | μA |
| I_{IL} | LOW-level input current | | –80 | – | – | μA |

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

Notes to the characteristics

1. Intermodulation suppression; Beat Frequency Components (BFC):

$$a) \text{ IM2} = \frac{V_{o(\text{signal})}(\text{at } 1 \text{ kHz})}{V_{o(\text{spurious})}(\text{at } 1 \text{ kHz})}; f_s = (2 \times 10 \text{ kHz}) - 19 \text{ kHz}$$

$$b) \text{ IM3} = \frac{V_{o(\text{signal})}(\text{at } 1 \text{ kHz})}{V_{o(\text{spurious})}(\text{at } 1 \text{ kHz})}; f_s = (3 \times 13 \text{ kHz}) - 38 \text{ kHz}$$

c) measured with 91% mono signal; $f_{\text{mod}} = 10 \text{ kHz}$ or 13 kHz ; 9% pilot signal.

2. RDS suppression:

$$\alpha_{57(\text{RDS})} = \frac{V_{o(\text{signal})}(\text{at } 1 \text{ kHz})}{V_{o(\text{spurious})}(\text{at } 1 \text{ kHz} \pm 23 \text{ Hz})}$$

a) measured with 91% stereo signal; $f_{\text{mod}} = 1 \text{ kHz}$; 9% pilot signal; 5% RDS subcarrier ($f_s = 57 \text{ kHz}$; $f_{\text{mod}} = 23 \text{ Hz}$; AM $m = 0.6$).

3. Subsidiary Communication Authorization (SCA):

$$\alpha_{67} = \frac{V_{o(\text{signal})}(\text{at } 1 \text{ kHz})}{V_{o(\text{spurious})}(\text{at } 9 \text{ kHz})}; f_s = (2 \times 38 \text{ kHz}) - 67 \text{ kHz}$$

a) measured with 81% mono signal; $f_{\text{mod}} = 1 \text{ kHz}$; 9% pilot signal; 10% SCA subcarrier ($f_s = 67 \text{ kHz}$, unmodulated).

4. Adjacent Channel Interference (ACI):

$$\alpha_{114} = \frac{V_{o(\text{signal})}(\text{at } 1 \text{ kHz})}{V_{o(\text{spurious})}(\text{at } 4 \text{ kHz})}; f_s = 110 \text{ kHz} - (3 \times 38 \text{ kHz})$$

$$a) \alpha_{190} = \frac{V_{o(\text{signal})}(\text{at } 1 \text{ kHz})}{V_{o(\text{spurious})}(\text{at } 4 \text{ kHz})}; f_s = 186 \text{ kHz} - (5 \times 38 \text{ kHz})$$

b) measured with 90% mono signal; $f_{\text{mod}} = 1 \text{ kHz}$; 9% pilot signal; 1% spurious signal ($f_s = 110 \text{ kHz}$ or 186 kHz , unmodulated).

5. AM stereo audio buffer gain:

$$G = 20 \log \frac{V_{\text{LOPO}}}{V_{\text{DEEML}}}; G = 20 \log \frac{V_{\text{ROPO}}}{V_{\text{DEEMR}}}$$

6. Input resistance for AM stereo left and right:

$$R_{i(\text{DEEML, DEEMR})} = \frac{\Delta V_{\text{DEEML, DEEMR}}}{\Delta I_{i(\text{DEEML, DEEMR})}}$$

7. Attenuation of blanking gate:

$$\alpha_{\text{AMGATE}} = 20 \log \frac{V_{\text{AMPCAP}} \text{ at gate open}}{V_{\text{AMPCAP}} \text{ at gate close}}$$

8. TWBAM1 DC voltage coefficient:

$$VC_{\text{TWBAM1}} = \frac{V_{\text{TWBAM1}} \text{ with AC voltage at LEVEL}}{V_{\text{TWBAM1}} \text{ without AC voltage}}$$

9. TUSN1 DC voltage coefficient:

$$VC_{\text{TUSN1}} = \frac{V_{\text{TUSN1}} \text{ with AC voltage at MPXRDS}}{V_{\text{TUSN1}} \text{ without AC voltage}}$$

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

10. TSNC DC voltage coefficient:

$$VC_{TSNC} = \frac{V_{TSNC} \text{ with AC voltage at MPXRDS}}{V_{TSNC} \text{ without AC voltage}}$$

11. TSNC DC voltage coefficient:

$$VC_{TSNC} = \frac{V_{TSNC} \text{ with AC voltage at LEVEL}}{V_{TSNC} \text{ without AC voltage}}$$

12. TUSN2 DC voltage coefficient:

$$VC_{TUSN2} = \frac{V_{TUSN2} \text{ with AC voltage at MPXRDS}}{V_{TUSN2} \text{ without AC voltage}}$$

13. TWBAM2 DC voltage coefficient:

$$VC_{TWBAM2} = \frac{V_{TWBAM2} \text{ with AC voltage at LEVEL}}{V_{TWBAM2} \text{ without AC voltage}}$$

14. Start of channel separation:

$$\alpha_{cs(start)} = \left| 20 \log \frac{V_{LOPO(AC)}}{V_{ROPO(AC)}} \right|$$

15. Slope of channel separation:

$$\alpha_{cs(slope)} = \left| 20 \log \frac{V_{LOPO(AC)}}{V_{ROPO(AC)}} \right|$$

16. AC attenuation for start and slope of HCC:

$$\alpha_{HCC(10 \text{ kHz})} = 20 \log \frac{V_{LOPO,ROPO}}{V_{LOPO,ROPO} \text{ without High Cut active}}$$

17. Crosstalk between bus inputs and signal outputs:

$$\alpha_{ct} = 20 \log \frac{V_{bus(p-p)}}{V_{o(rms)}}$$

18. The characteristics are in accordance with the I²C-bus specification. This specification, "The I²C-bus and how to use it", can be ordered using the code 9398 393 40011.

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

11 I²C-BUS PROTOCOL

Table 1 Write mode

| | | | | | | | |
|------------------|----------------------|------------------|------------|------------------|--------------|------------------|------------------|
| S ⁽¹⁾ | CHIP ADDRESS (write) | A ⁽²⁾ | SUBADDRESS | A ⁽²⁾ | DATA BYTE(S) | A ⁽²⁾ | P ⁽³⁾ |
|------------------|----------------------|------------------|------------|------------------|--------------|------------------|------------------|

Table 2 Read mode

| | | | | | | | |
|------------------|---------------------|------------------|-------------|------------------|-------------|------------------|------------------|
| S ⁽¹⁾ | CHIP ADDRESS (read) | A ⁽²⁾ | DATA BYTE 1 | A ⁽²⁾ | DATA BYTE 2 | A ⁽²⁾ | P ⁽³⁾ |
|------------------|---------------------|------------------|-------------|------------------|-------------|------------------|------------------|

Notes

1. S = START condition.
2. A = acknowledge.
3. P = STOP condition.

Table 3 Chip address byte

| CHIP ADDRESS | | | | | | | READ/WRITE |
|--------------|---|---|---|---|---|--------------------|-----------------------------|
| 0 | 0 | 1 | 1 | 0 | 0 | 0/1 ⁽¹⁾ | R/ \bar{W} ⁽²⁾ |

Notes

1. Defined by address pin ADR.
2. 0 = receiver and 1 = transmitter.

11.1 Read mode: 1st data byte

Table 4 Format of 1st data byte

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|------|------|------|------|------|------|------|------|
| STIN | RDSU | LVL5 | LVL4 | LVL3 | LVL2 | LVL1 | LVL0 |

Table 5 Description of 1st data byte bits

| BIT | SYMBOL | DESCRIPTION |
|--------|----------|---|
| 7 | STIN | Stereo indicator. This bit indicates if a pilot signal has been detected. If STIN = 0, then no pilot signal has been detected. If STIN = 1, then a pilot signal has been detected. |
| 6 | RDSU | Measure mode. This bit selects the measure mode for the RDS flags. If RDSU = 0, then continuous mode is selected. If RDSU = 1, then RDS update mode is selected. |
| 5 to 0 | LVL[5:0] | ADC voltage level. These 6 bits determine the ADC voltage level; see Table 6. |

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

Table 6 Level setting ADC

| V _{LEVEL} (V) | LVL5 | LVL4 | LVL3 | LVL2 | LVL1 | LVL0 |
|------------------------|------|------|------|------|------|------|
| 3.600 | 1 | 1 | 1 | 1 | 1 | 1 |
| 3.553 | 1 | 1 | 1 | 1 | 1 | 0 |
| 3.506 | 1 | 1 | 1 | 1 | 0 | 1 |
| 3.460 | 1 | 1 | 1 | 1 | 0 | 0 |
| 3.413 | 1 | 1 | 1 | 0 | 1 | 1 |
| 3.366 | 1 | 1 | 1 | 0 | 1 | 0 |
| 3.319 | 1 | 1 | 1 | 0 | 0 | 1 |
| 3.272 | 1 | 1 | 1 | 0 | 0 | 0 |
| 3.225 | 1 | 1 | 0 | 1 | 1 | 1 |
| 3.179 | 1 | 1 | 0 | 1 | 1 | 0 |
| 3.132 | 1 | 1 | 0 | 1 | 0 | 1 |
| 3.085 | 1 | 1 | 0 | 1 | 0 | 0 |
| 3.038 | 1 | 1 | 0 | 0 | 1 | 1 |
| 2.991 | 1 | 1 | 0 | 0 | 1 | 0 |
| 2.944 | 1 | 1 | 0 | 0 | 0 | 1 |
| 2.898 | 1 | 1 | 0 | 0 | 0 | 0 |
| 2.851 | 1 | 0 | 1 | 1 | 1 | 1 |
| 2.804 | 1 | 0 | 1 | 1 | 1 | 0 |
| 2.757 | 1 | 0 | 1 | 1 | 0 | 1 |
| 2.710 | 1 | 0 | 1 | 1 | 0 | 0 |
| 2.663 | 1 | 0 | 1 | 0 | 1 | 1 |
| 2.617 | 1 | 0 | 1 | 0 | 1 | 0 |
| 2.570 | 1 | 0 | 1 | 0 | 0 | 1 |
| 2.523 | 1 | 0 | 1 | 0 | 0 | 0 |
| 2.476 | 1 | 0 | 0 | 1 | 1 | 1 |
| 2.429 | 1 | 0 | 0 | 1 | 1 | 0 |
| 2.383 | 1 | 0 | 0 | 1 | 0 | 1 |
| 2.336 | 1 | 0 | 0 | 1 | 0 | 0 |
| 2.289 | 1 | 0 | 0 | 0 | 1 | 1 |
| 2.242 | 1 | 0 | 0 | 0 | 1 | 0 |
| 2.195 | 1 | 0 | 0 | 0 | 0 | 1 |
| 2.148 | 1 | 0 | 0 | 0 | 0 | 0 |
| 2.102 | 0 | 1 | 1 | 1 | 1 | 1 |
| 2.055 | 0 | 1 | 1 | 1 | 1 | 0 |
| 2.008 | 0 | 1 | 1 | 1 | 0 | 1 |
| 1.961 | 0 | 1 | 1 | 1 | 0 | 0 |
| 1.914 | 0 | 1 | 1 | 0 | 1 | 1 |
| 1.867 | 0 | 1 | 1 | 0 | 1 | 0 |
| 1.821 | 0 | 1 | 1 | 0 | 0 | 1 |
| 1.774 | 0 | 1 | 1 | 0 | 0 | 0 |

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

| V _{LEVEL} (V) | LVL5 | LVL4 | LVL3 | LVL2 | LVL1 | LVL0 |
|------------------------|------|------|------|------|------|------|
| 1.727 | 0 | 1 | 0 | 1 | 1 | 1 |
| 1.680 | 0 | 1 | 0 | 1 | 1 | 0 |
| 1.633 | 0 | 1 | 0 | 1 | 0 | 1 |
| 1.587 | 0 | 1 | 0 | 1 | 0 | 0 |
| 1.540 | 0 | 1 | 0 | 0 | 1 | 1 |
| 1.493 | 0 | 1 | 0 | 0 | 1 | 0 |
| 1.446 | 0 | 1 | 0 | 0 | 0 | 1 |
| 1.399 | 0 | 1 | 0 | 0 | 0 | 0 |
| 1.352 | 0 | 0 | 1 | 1 | 1 | 1 |
| 1.306 | 0 | 0 | 1 | 1 | 1 | 0 |
| 1.259 | 0 | 0 | 1 | 1 | 0 | 1 |
| 1.212 | 0 | 0 | 1 | 1 | 0 | 0 |
| 1.165 | 0 | 0 | 1 | 0 | 1 | 1 |
| 1.118 | 0 | 0 | 1 | 0 | 1 | 0 |
| 1.071 | 0 | 0 | 1 | 0 | 0 | 1 |
| 1.025 | 0 | 0 | 1 | 0 | 0 | 0 |
| 0.978 | 0 | 0 | 0 | 1 | 1 | 1 |
| 0.931 | 0 | 0 | 0 | 1 | 1 | 0 |
| 0.884 | 0 | 0 | 0 | 1 | 0 | 1 |
| 0.837 | 0 | 0 | 0 | 1 | 0 | 0 |
| 0.790 | 0 | 0 | 0 | 0 | 1 | 1 |
| 0.744 | 0 | 0 | 0 | 0 | 1 | 0 |
| 0.697 | 0 | 0 | 0 | 0 | 0 | 1 |
| 0.650 | 0 | 0 | 0 | 0 | 0 | 0 |

11.2 Read mode: 2nd data byte

Table 7 Format of 2nd data byte

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---|------|------|------|---|------|------|------|
| – | USN2 | USN1 | USN0 | – | WBA2 | WBA1 | WBA0 |

Table 8 Description of 2nd data byte

| BIT | SYMBOL | DESCRIPTION |
|-----|--------|---|
| 7 | – | This bit is not used and must be set to logic 1. |
| 6 | USN2 | Ultrasonic noise ADC. These 3 bits select the voltage level for the ultrasonic noise ADC; see Table 9. |
| 5 | USN1 | |
| 4 | USN0 | |
| 3 | – | This bit is not used and must be set to logic 1. |
| 2 | WBA2 | AM wideband noise ADC. These 3 bits select the voltage level for the AM wideband ADC; see Table 10. |
| 1 | WBA1 | |
| 0 | WBA0 | |

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

Table 9 Ultrasonic noise ADC

| V_{TUSN2} (V) | USN2 | USN1 | USN0 |
|-----------------|------|------|------|
| 4.500 | 1 | 1 | 1 |
| 4.157 | 1 | 1 | 0 |
| 3.814 | 1 | 0 | 1 |
| 3.471 | 1 | 0 | 0 |
| 3.129 | 0 | 1 | 1 |
| 2.786 | 0 | 1 | 0 |
| 2.443 | 0 | 0 | 1 |
| 2.100 | 0 | 0 | 0 |

Table 10 AM wideband noise ADC

| V_{TWBAM2} (V) | WBA2 | WBA1 | WBA0 |
|------------------|------|------|------|
| 4.500 | 1 | 1 | 1 |
| 4.157 | 1 | 1 | 0 |
| 3.814 | 1 | 0 | 1 |
| 3.471 | 1 | 0 | 0 |
| 3.129 | 0 | 1 | 1 |
| 2.786 | 0 | 1 | 0 |
| 2.443 | 0 | 0 | 1 |
| 2.100 | 0 | 0 | 0 |

11.3 Subaddress byte for write**Table 11** Format for subaddress byte

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|------|------|---|---|------|------|------|------|
| AIOF | BOUT | – | – | SAD3 | SAD2 | SAD1 | SAD0 |

Table 12 Description of subaddress byte

| BIT | SYMBOL | DESCRIPTION |
|-----|--------|---|
| 7 | AIOF | Auto-increment control. This bit controls the auto-increment function. If AIOF = 0, then the auto-increment is on. If AIOF = 1, then auto-increment is off. |
| 6 | BOUT | I²C-bus output control. This bit enables/disables the I ² C-bus output SDAQ and SCLQ to the TEA6840H. If BOUT = 0, then the I ² C-bus output is disabled. If BOUT = 1, then the I ² C-bus output is enabled. |
| 5 | – | These 2 bits are not used; both must be set to logic 0. |
| 4 | – | |
| 3 | SAD3 | Data byte select. These 4 bits select which data byte is to be addressed; see Table 13. |
| 2 | SAD2 | |
| 1 | SAD1 | |
| 0 | SAD0 | |

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

Table 13 Selection of data byte

| ADDRESSED DATA BYTE | MNEMONIC | SAD3 | SAD2 | SAD1 | SAD0 |
|--------------------------|----------|------|------|------|------|
| Alignment 0 | ALGN0 | 0 | 0 | 0 | 0 |
| Alignment 1 | ALGN1 | 0 | 0 | 0 | 1 |
| Alignment 2 | ALGN2 | 0 | 0 | 1 | 0 |
| Alignment 3 | ALGN3 | 0 | 0 | 1 | 1 |
| ASI time source selector | SSEL | 0 | 1 | 0 | 0 |
| Bass control | BASS | 0 | 1 | 0 | 1 |
| Treble control | TRBL | 0 | 1 | 1 | 0 |
| Loudness control | LOUD | 0 | 1 | 1 | 1 |
| Volume 1 | VOLU1 | 1 | 0 | 0 | 0 |
| Volume 2, left front | VOL2_LF | 1 | 0 | 0 | 1 |
| Volume 2, right front | VOL2_RF | 1 | 0 | 1 | 0 |
| Volume 2, left rear | VOL2_LR | 1 | 0 | 1 | 1 |
| Volume 2, right rear | VOL2_RR | 1 | 1 | 0 | 0 |
| Not used ⁽¹⁾ | – | 1 | 1 | 0 | 1 |
| Not used ⁽¹⁾ | – | 1 | 1 | 1 | 0 |
| Not used ⁽¹⁾ | – | 1 | 1 | 1 | 1 |

Note

1. Not tested; function not guaranteed.

11.4 Write mode: subaddress 0H**Table 14** Format of data byte Alignment 0 (ALGN0)

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|------|------|------|------|------|------|------|------|
| AMON | AMST | SEAR | SMUT | MMUT | MONO | MST1 | MST0 |

Table 15 Description of ALGN0 bits

| BIT | SYMBOL | DESCRIPTION |
|-----|--------|---|
| 7 | AMON | AM/FM mode selection. These 2 bits select the AM/FM mode and source; see Table 16. |
| 6 | AMST | |
| 5 | SEAR | Search mode selection. If SEAR = 0, then mute and SNC detectors normal. If SEAR = 1, then mute and SNC detectors fast. |
| 4 | SMUT | Soft mute enable. If SMUT = 0, then soft mute off. If SMUT = 1, then soft mute enabled. |
| 3 | MMUT | Muting of MPX output. If MMUT = 0, then MPX output not muted. If MMUT = 1, then MPX output muted. |
| 2 | MONO | Stereo decoder mode selection. If MONO = 0, then Stereo mode selected. If MONO = 1, then Mono mode selected. |
| 1 | MST1 | Start of muting. These 2 bits determine the value of V_{TMUTE} ; see Table 17 and Fig.4. |
| 0 | MST0 | |

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

Table 16 Setting of AM/FM mode

| SELECTED MODE | AMON | AMST |
|-----------------------------|------|------|
| AM stereo mode, note 1 | 1 | 1 |
| AM mode, active input AMHIN | 1 | 0 |
| Not allowed | 0 | 1 |
| FM mode, active input MPXIN | 0 | 0 |

Note

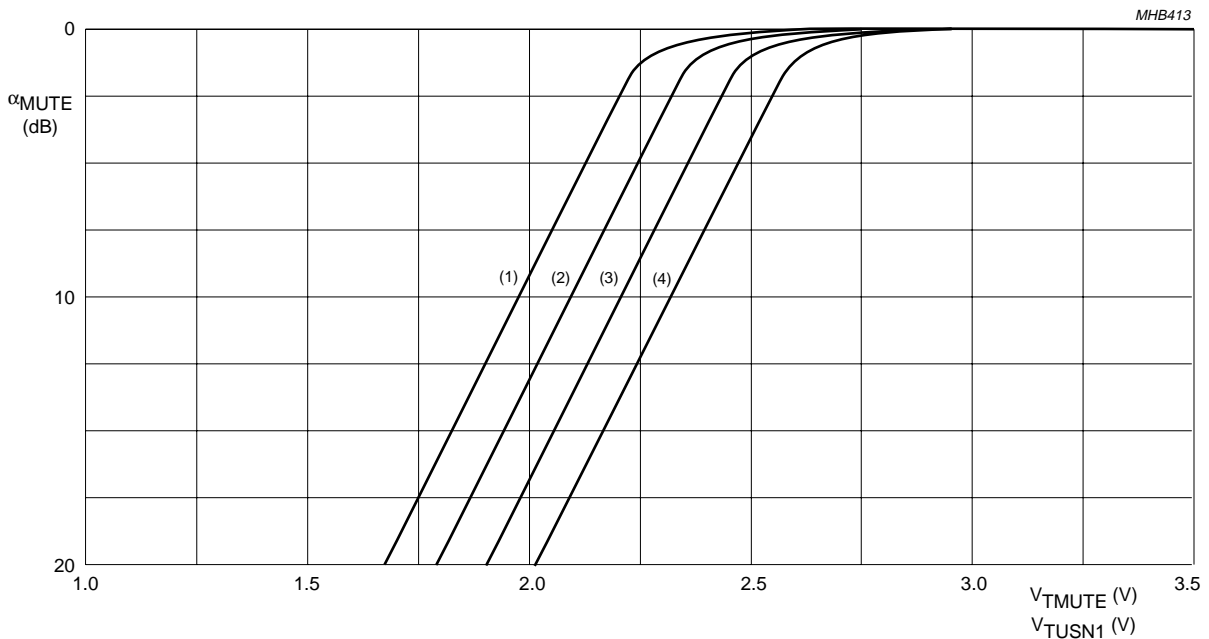
1. MPX input (MPXIN) and AM input (AMHIN) muted, stereo decoder in mono mode and de-emphasis terminals (DEEML and DEEMR) are audio signal inputs.

Table 17 Setting of start of muting ($\alpha_{\text{MUTE}} = 6 \text{ dB}$)

| $V_{\text{TMUTE}} \text{ (V)}$ | MST1 | MST0 |
|--------------------------------|------|------|
| 2.45 | 1 | 1 |
| 2.30 | 1 | 0 |
| 2.15 | 0 | 1 |
| 2.00 | 0 | 0 |

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL



Data byte ALGN2: MSL0 = 1, MSL1 = 1

Data byte ALGN0

| CURVE | MST1 | MST0 |
|-------|------|------|
| (1) | 0 | 0 |
| (2) | 0 | 1 |
| (3) | 1 | 0 |
| (4) | 1 | 1 |

Fig.4 Soft mute attenuation as a function of V_{TMUTE} and V_{TUSN1} input voltage (fixed slope).

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

11.5 Write mode: subaddress 1H

Table 18 Format of data byte Alignment 1 (ALGN1)

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|------|------|------|------|------|------|------|------|
| USS1 | USS0 | AWS1 | AWS0 | CHS3 | CHS2 | CHS1 | CHS0 |

Table 19 Description of ALGN1 bits

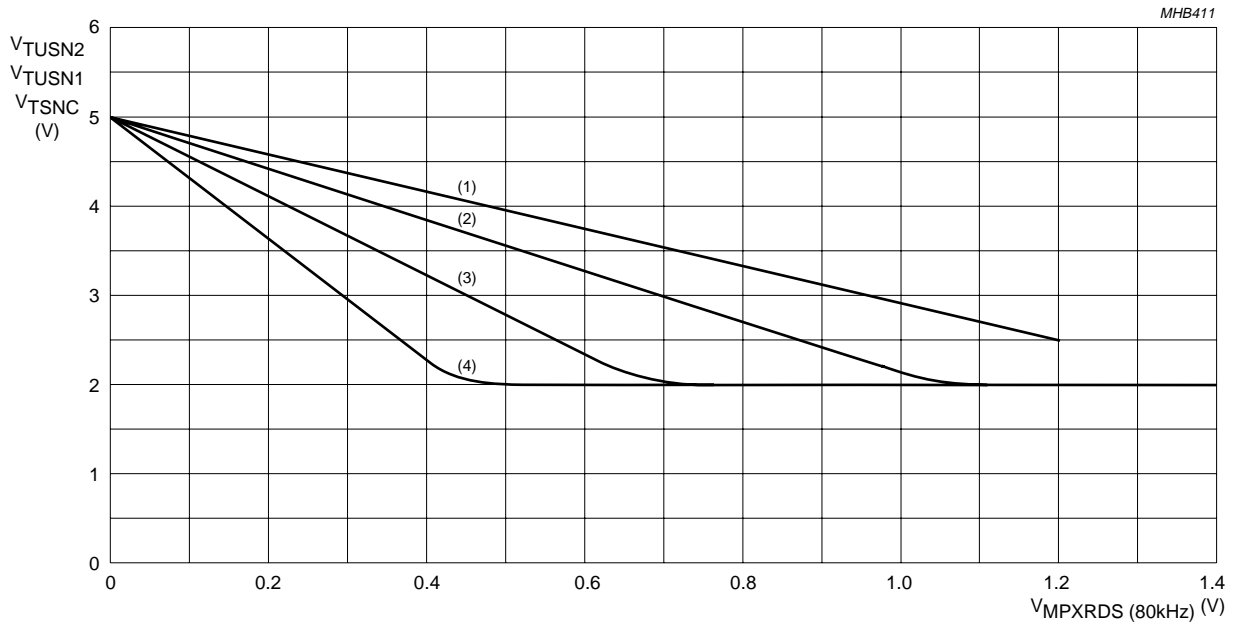
| BIT | SYMBOL | DESCRIPTION |
|-----|--------|--|
| 7 | USS1 | Ultrasonic noise sensitivity. These 2 bits determine the ultrasonic noise sensitivity levels; see Table 20 and Fig.5. |
| 6 | USS0 | |
| 5 | AWS1 | AM wideband sensitivity. These 2 bits determine the AM wideband sensitivity levels; see Table 21 and Fig.6. |
| 4 | AWS0 | |
| 3 | CHS3 | Channel separation alignment. These 4 bits select the channel separation alignment; see Table 22. |
| 2 | CHS2 | |
| 1 | CHS1 | |
| 0 | CHS0 | |

Table 20 Setting of ultrasonic noise sensitivity ($V_{MPXRDS(AC)} = 350$ mV)

| SLOPE (V/V) | USS1 | USS0 |
|-------------|------|------|
| -2.1 | 1 | 1 |
| -2.9 | 1 | 0 |
| -4.4 | 0 | 1 |
| -6.8 | 0 | 0 |

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL



Data byte ALGN1

| CURVE | USS1 | USS0 |
|-------|------|------|
| (1) | 1 | 1 |
| (2) | 1 | 0 |
| (3) | 0 | 1 |
| (4) | 0 | 0 |

Fig.5 Ultrasonic noise peak and average detector output voltage as a function of MPX signal input, and stereo noise control peak detector output voltage as a function of MPX signal input.

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

Table 21 Setting of AM wideband sensitivity ($V_{LEVEL(AC)} = 400 \text{ mV}$)

| SLOPE (V/V) | AWS1 | AWS0 |
|-------------|------|------|
| -2.2 | 1 | 1 |
| -3.3 | 1 | 0 |
| -4.9 | 0 | 1 |
| -6.5 | 0 | 0 |

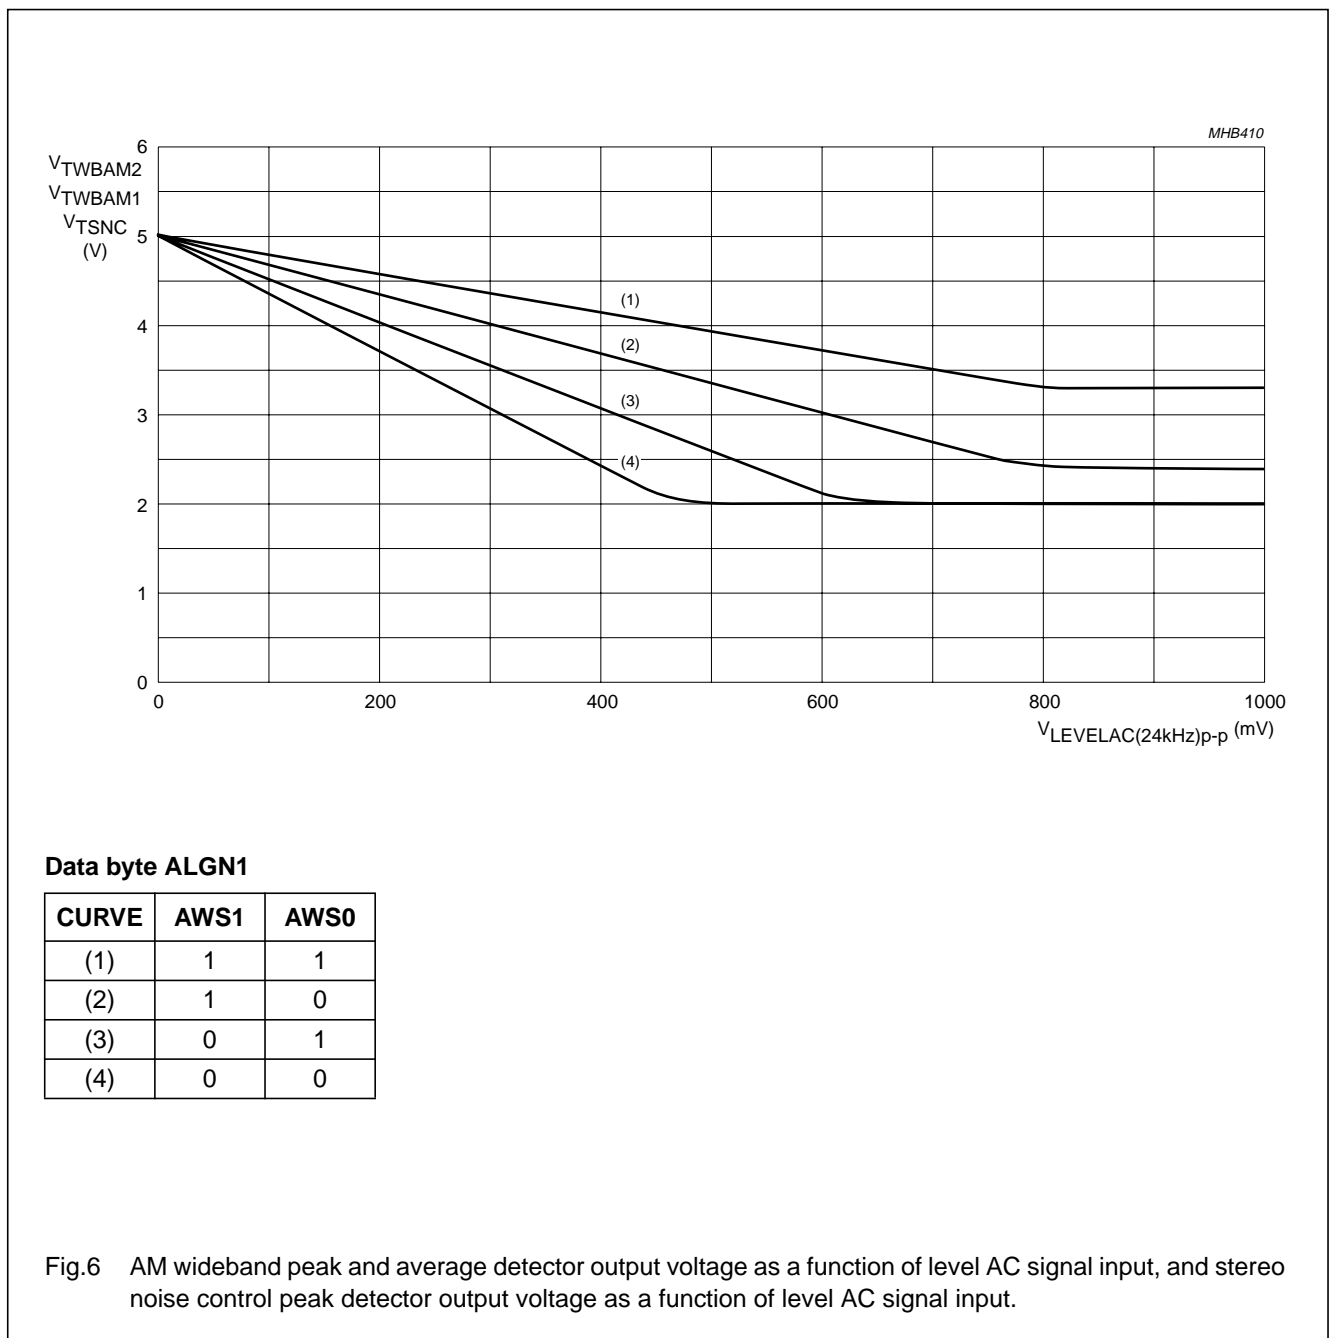


Fig. 6 AM wideband peak and average detector output voltage as a function of level AC signal input, and stereo noise control peak detector output voltage as a function of level AC signal input.

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

Table 22 Setting of channel separation alignment

| CHANNEL SEPARATION ALIGNMENT | CHS3 | CHS2 | CHS1 | CHS0 |
|--|------|------|------|------|
| Not used ⁽¹⁾ | 1 | 1 | 1 | 1 |
| Not used ⁽¹⁾ | 1 | 1 | 1 | 0 |
| Not used ⁽¹⁾ | 1 | 1 | 0 | 1 |
| Not used ⁽¹⁾ | 1 | 1 | 0 | 0 |
| Not used ⁽¹⁾ | 1 | 0 | 1 | 1 |
| Not used ⁽¹⁾ | 1 | 0 | 1 | 0 |
| Setting 9, minimum gain of side signal | 1 | 0 | 0 | 1 |
| Setting 8 | 1 | 0 | 0 | 0 |
| Setting 7 | 0 | 1 | 1 | 1 |
| Setting 6 | 0 | 1 | 1 | 0 |
| Setting 5 | 0 | 1 | 0 | 1 |
| Setting 4 | 0 | 1 | 0 | 0 |
| Setting 3 | 0 | 0 | 1 | 1 |
| Setting 2 | 0 | 0 | 1 | 0 |
| Setting 1 | 0 | 0 | 0 | 1 |
| Setting 0, maximum gain of side signal | 0 | 0 | 0 | 0 |

Note

1. Not tested; function not guaranteed.

11.6 Write mode: subaddress 2H**Table 23** Format of data byte Alignment 2 (ALGN2)

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|------|------|------|------|------|------|------|------|
| MSL1 | MSL0 | SSL1 | SSL0 | SST3 | SST2 | SST1 | SST0 |

Table 24 Description of ALGN2 bits

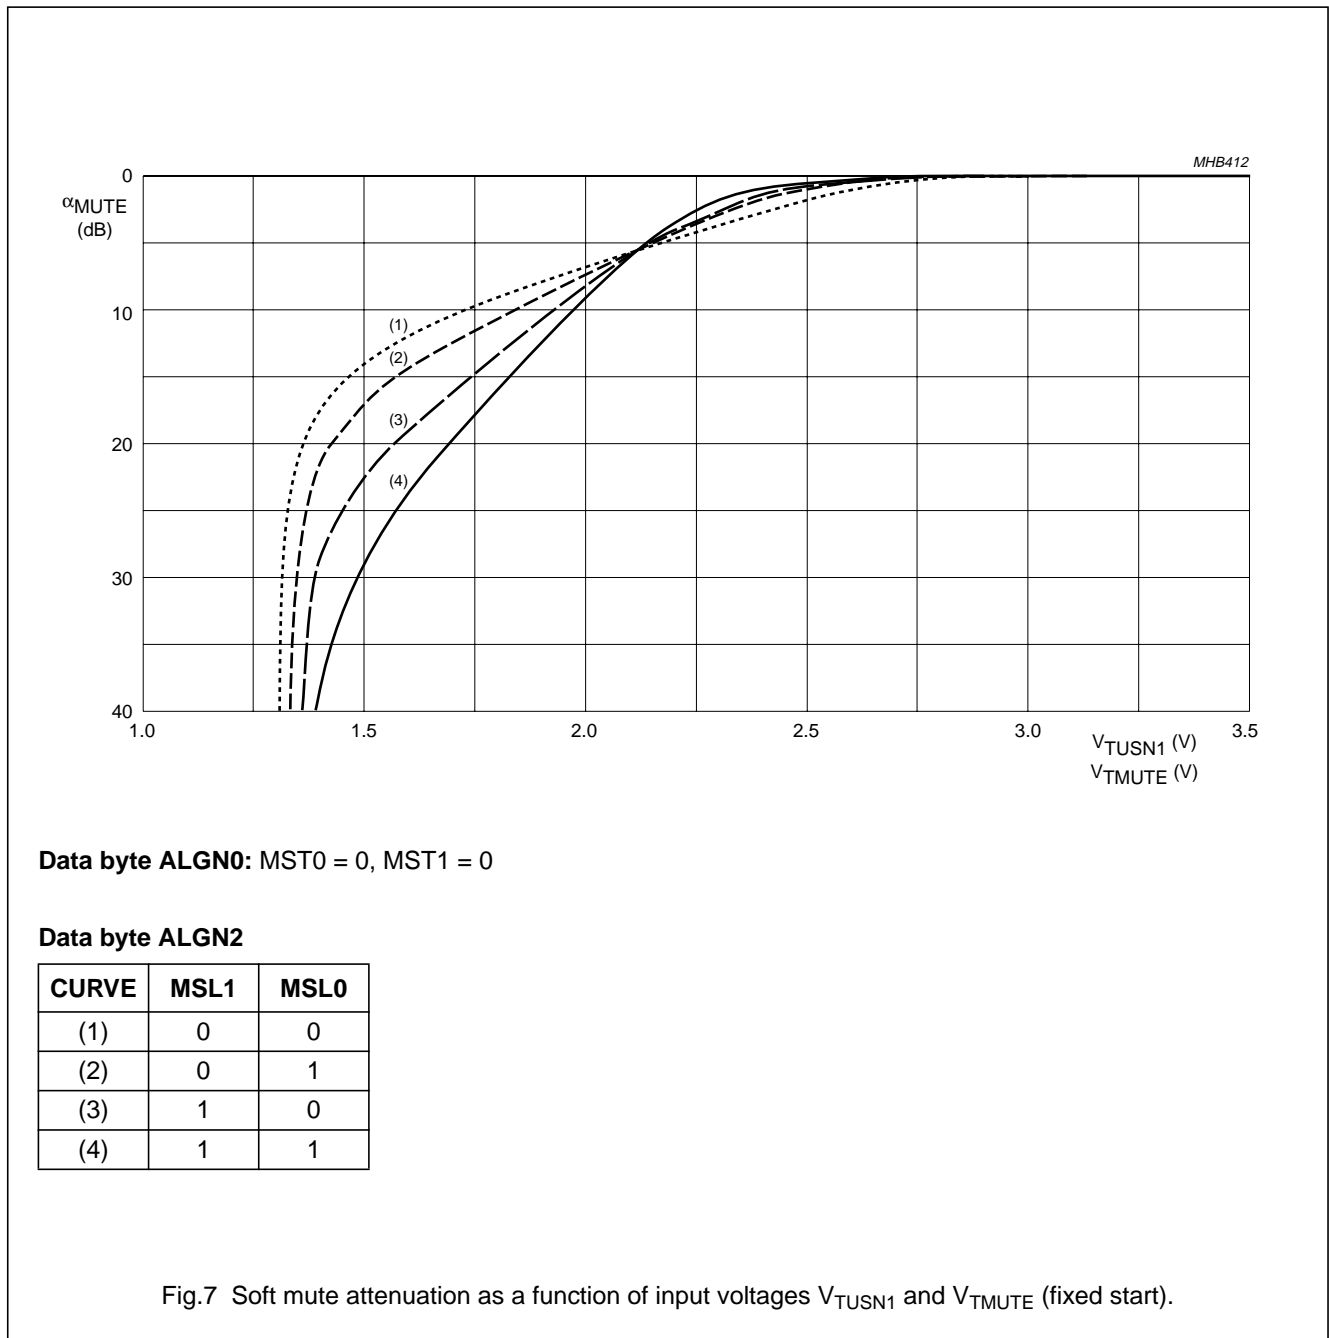
| BIT | SYMBOL | DESCRIPTION |
|-----|--------|---|
| 7 | MSL1 | Soft mute slope alignment. These 2 bits determine the value of $V_{TMUTE(DC)}$; see Table 25 and Fig.7. |
| 6 | MSL0 | |
| 5 | SSL1 | Stereo noise control slope alignment. These 2 bits determine the value of α_{CS} ; see Table 26 and Fig.8. |
| 4 | SSL0 | |
| 3 | SST3 | Stereo noise control start alignment. These 4 bits determine the stereo noise control start alignment; see Table 27 and Fig.9. |
| 2 | SST2 | |
| 1 | SST1 | |
| 0 | SST0 | |

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

Table 25 Setting of soft mute slope alignment

| $V_{TMUTE(DC)}$ | MSL1 | MSL0 |
|-----------------------------|------|------|
| $0.395V_{TUSN1}$ without AC | 1 | 1 |
| $0.390V_{TUSN1}$ without AC | 1 | 0 |
| $0.380V_{TUSN1}$ without AC | 0 | 1 |
| $0.350V_{TUSN1}$ without AC | 0 | 0 |

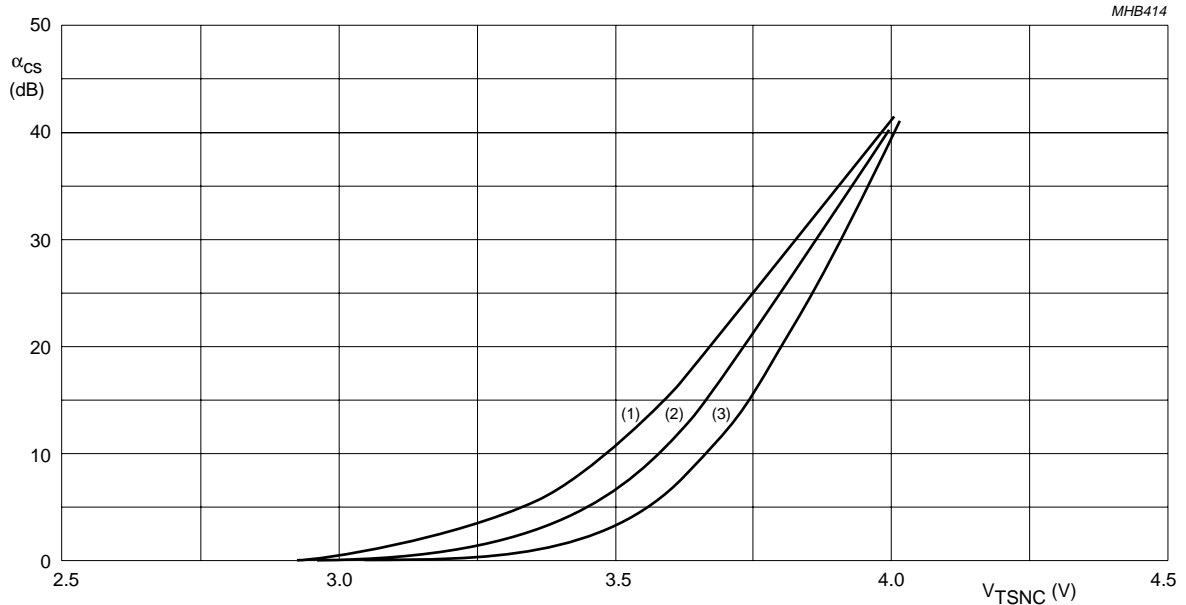


Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

Table 26 Setting of stereo noise control slope alignment ($V_{TSNC} = 0.72V_{TUSN1}$ without AC)

| α_{cs} (dB) | SSL1 | SSL0 |
|--------------------|------|------|
| Not defined | 1 | 1 |
| 13 | 1 | 0 |
| 7 | 0 | 1 |
| 5 | 0 | 0 |



Data byte ALGN2: SST = 1000

Data byte ALGN2

| CURVE | SSL0 | SSL1 |
|-------|------|------|
| (1) | 0 | 1 |
| (2) | 1 | 0 |
| (3) | 0 | 0 |

Fig.8 Channel separation as a function of voltage at pins TSNC, TWBAM1 and TUSN1 (fixed start).

Up-level Car radio Analog Signal Processor (CASP)

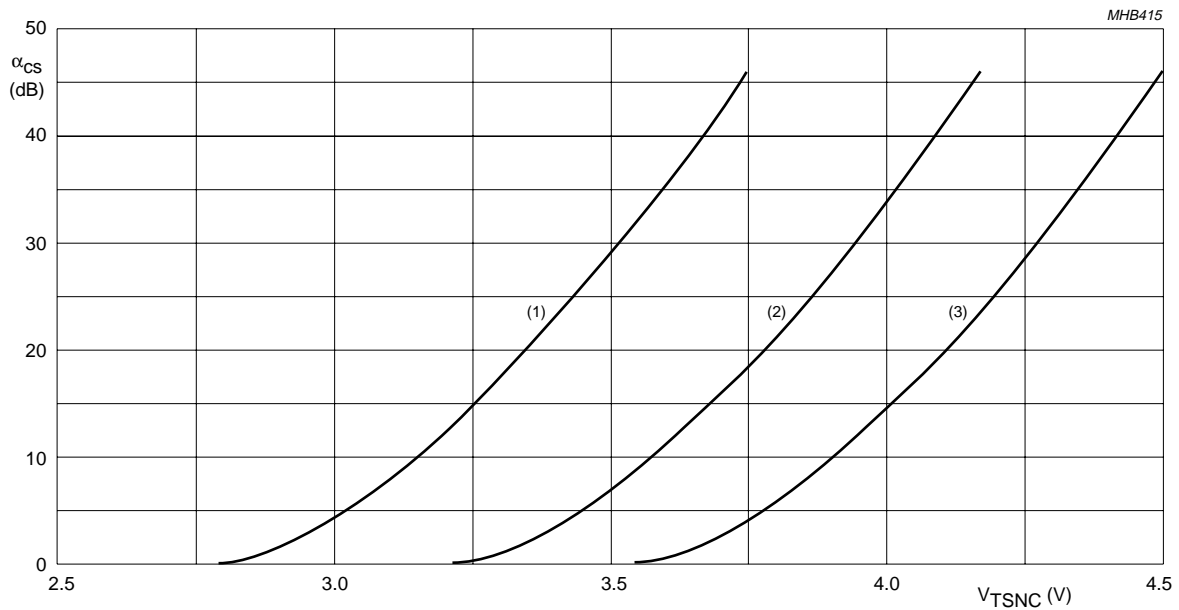
TEA6886HL

Table 27 Setting of stereo noise control start alignment ($\alpha_{cs} = 6$ dB)

| START ALIGNMENT | SST3 | SST2 | SST1 | SST0 |
|---------------------------------------|------|------|------|------|
| $V_{TSNC} = 0.63V_{TUSN1}$ without AC | 1 | 1 | 1 | 1 |
| V_{TSNC} | 1 | 1 | 1 | 0 |
| V_{TSNC} | 1 | 1 | 0 | 1 |
| V_{TSNC} | 1 | 1 | 0 | 0 |
| V_{TSNC} | 1 | 0 | 1 | 1 |
| V_{TSNC} | 1 | 0 | 1 | 0 |
| V_{TSNC} | 1 | 0 | 0 | 1 |
| $V_{TSNC} = 0.70V_{TUSN1}$ without AC | 1 | 0 | 0 | 0 |
| V_{TSNC} | 0 | 1 | 1 | 1 |
| V_{TSNC} | 0 | 1 | 1 | 0 |
| V_{TSNC} | 0 | 1 | 0 | 1 |
| V_{TSNC} | 0 | 1 | 0 | 0 |
| V_{TSNC} | 0 | 0 | 1 | 1 |
| V_{TSNC} | 0 | 0 | 1 | 0 |
| V_{TSNC} | 0 | 0 | 0 | 1 |
| $V_{TSNC} = 0.74V_{TUSN1}$ without AC | 0 | 0 | 0 | 0 |

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL



Data byte ALGN2: SSL1 = 0, SSL0 = 1

Data byte ALGN2

| CURVE | SST3 | SST2 | SST1 | SST0 |
|-------|------|------|------|------|
| (1) | 0 | 0 | 0 | 0 |
| (2) | 1 | 0 | 0 | 0 |
| (3) | 1 | 1 | 1 | 1 |

Fig.9 Channel separation as a function of voltage at pins TSNC, TWBAM1 and TUSN1 (fixed slope).

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

11.7 Write mode: subaddress 3H

Table 28 Format of data byte Alignment 3 (ALGN3)

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|------|------|------|------|------|------|------|------|
| NBS1 | NBS0 | DE75 | HCCS | HST1 | HST0 | HSL1 | HSL0 |

Table 29 Description of ALGN3 bits

| BIT | SYMBOL | DESCRIPTION |
|-----|--------|---|
| 7 | NBS1 | Noise blanker sensitivity. These 2 bits determine the noise blanker sensitivity levels; see Table 30. |
| 6 | NBS0 | |
| 5 | DE75 | De-emphasis. If DE75 = 1, then de-emphasis is 75 μ s. If DE75 = 0, then de-emphasis is 50 μ s. |
| 4 | HCCS | HCC control switch. With static roll-off: HCCS = 1, $C_{FMLBUF} = C_{FMRBUF} = 2.7$ nF. Without static roll-off: HCCS = 0, $C_{FMLBUF} = C_{FMRBUF} = 680$ pF. |
| 3 | HST1 | HCC start alignment. These 2 bits determine the alignment for the start of high cut control; see Table 31 and Fig.10. |
| 2 | HST0 | |
| 1 | HSL1 | HCC slope alignment. These 2 bits determine the alignment for the slope of high cut control; see Table 32 and Fig.11. |
| 0 | HSL0 | |

Table 30 Setting of noise blanker sensitivity

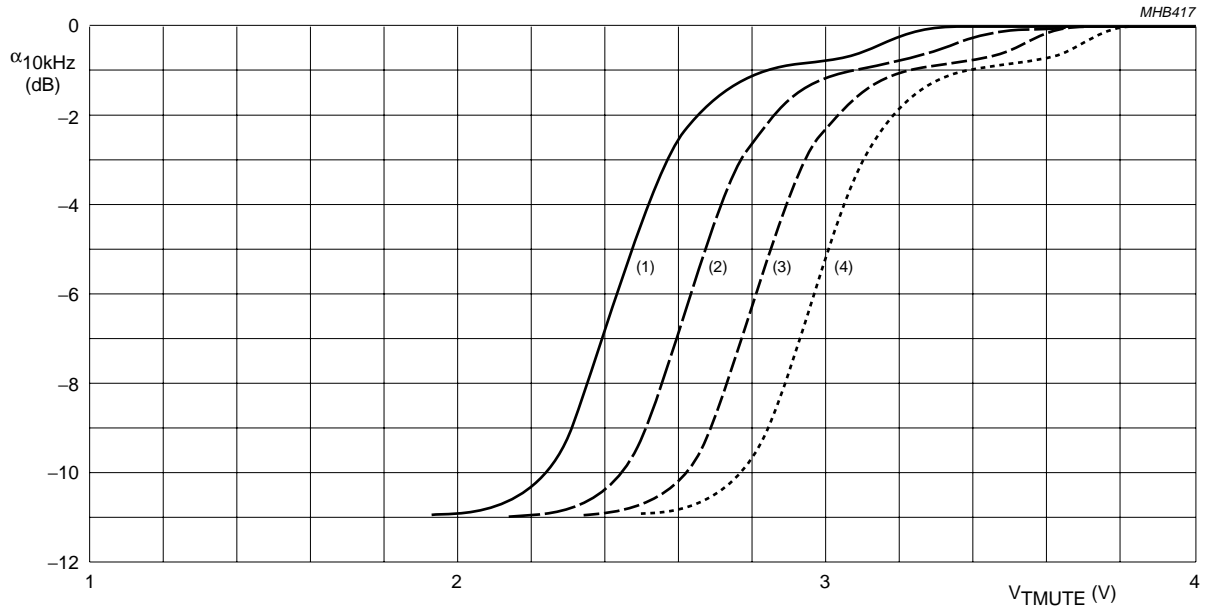
| $V_{\text{pulse(p)}(\text{MPX})}$ (mV) | $V_{\text{pulse(p)}(\text{level})}$ (mV) | NBS1 | NBS0 |
|--|--|------|------|
| 12 | 110 | 1 | 1 |
| 24 | 120 | 1 | 0 |
| 60 | 150 | 0 | 1 |
| 120 | 200 | 0 | 0 |

Table 31 Setting of alignment for start of high cut control ($\alpha_{10\text{kHz}} = 3$ dB)

| $V_{(3-10)\text{DC}}$ (V) | HST1 | HST0 |
|---------------------------|------|------|
| 1.30 | 1 | 1 |
| 1.45 | 1 | 0 |
| 1.90 | 0 | 1 |
| 2.10 | 0 | 0 |

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL



Data byte ALGN3: HSL1 = 1, HSL0 = 0

Data byte ALGN3

| CURVE | HST1 | HST0 |
|-------|------|------|
| (1) | 1 | 1 |
| (2) | 1 | 0 |
| (3) | 0 | 1 |
| (4) | 0 | 0 |

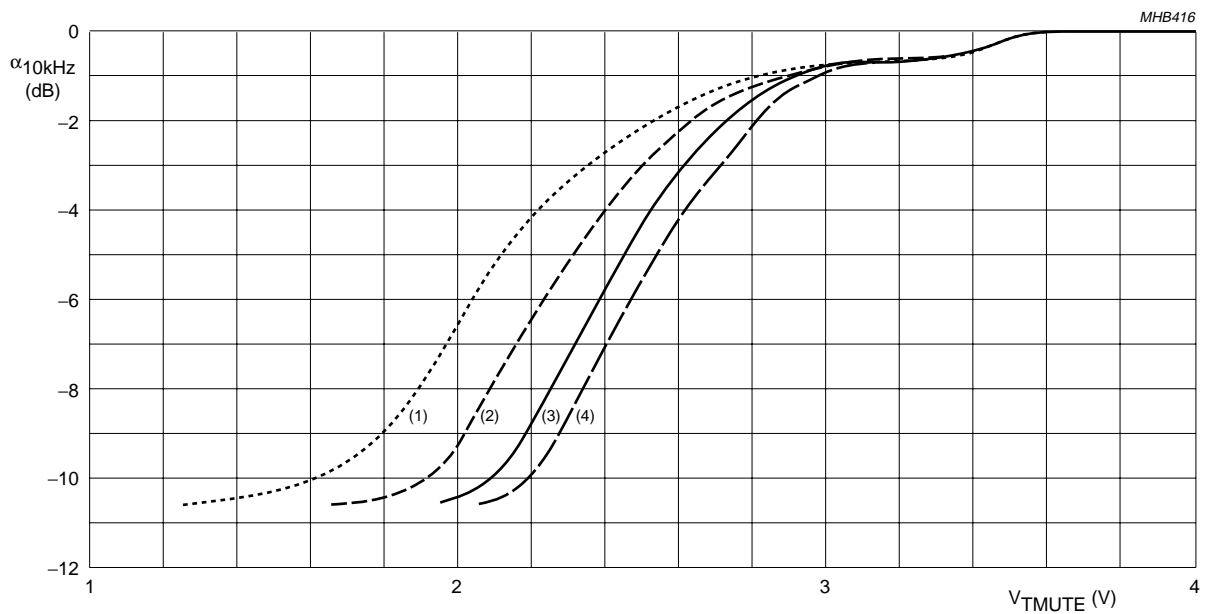
Fig.10 High cut control as a function of V_{TMUTE} (fixed slope).

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

Table 32 Setting of alignment for slope of high cut control ($V_{TMUTE} = 2.4\text{ V}$)

| $\alpha_{10\text{kHz}}$ (dB) | HSL1 | HSL0 |
|------------------------------|------|------|
| 7.5 | 1 | 1 |
| 6.0 | 1 | 0 |
| 4.0 | 0 | 1 |
| 3.0 | 0 | 0 |



Data byte ALGN3: HST1 = 1, HST0 = 1

Data byte ALGN3

| CURVE | HSL1 | HSL0 |
|-------|------|------|
| (1) | 0 | 0 |
| (2) | 0 | 1 |
| (3) | 1 | 0 |
| (4) | 1 | 1 |

Fig.11 High cut control as a function of V_{TMUTE} (fixed start).

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

11.8 Write mode: subaddress 4H

Table 33 Format of data byte Source Selector (SSEL)

| | | | | | | | |
|----------|----------|----------|----------|----------|----------|----------|----------|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| ASI1 | ASI0 | RSA2 | RSA1 | RSA0 | MSS2 | MSS1 | MSS0 |

Table 34 Description of SSEL bits

| BIT | SYMBOL | DESCRIPTION |
|-----|--------|--|
| 7 | ASI1 | ASI/ABC speed selection. These 2 bits select the ASI/ABC speed (time per step); see Table 35. |
| 6 | ASI0 | |
| 5 | RSA2 | Rear seat audio selector. These 3 bits select the source for the rear outputs; see Table 36. |
| 4 | RSA1 | |
| 3 | RSA0 | |
| 2 | MSS2 | Main source selector. These 3 bits select the source for the main control part; see Table 37. |
| 1 | MSS1 | |
| 0 | MSS0 | |

Table 35 ASI/ABC speed selection ($C_{ASICAP} = 15 \text{ nF}$)

| ASI/ABC SPEED (ms) | ASI1 | ASI0 |
|--------------------|------|------|
| 20 | 1 | 1 |
| 8.33 | 1 | 0 |
| 3.33 | 0 | 1 |
| 0.83 | 0 | 0 |

Table 36 Selected source for rear outputs

| SELECTED SOURCE | RSA2 | RSA1 | RSA0 |
|---------------------------------------|------|------|------|
| Internal, main channel ⁽¹⁾ | 1 | 1 | 1 |
| Internal, main channel ⁽¹⁾ | 1 | 1 | 0 |
| Internal, main channel ⁽¹⁾ | 1 | 0 | 1 |
| Internal, main channel | 1 | 0 | 0 |
| AM/FM (internal) | 0 | 1 | 1 |
| Input A (stereo) | 0 | 1 | 0 |
| Input B (stereo) | 0 | 0 | 1 |
| Input C (stereo, symmetrical) | 0 | 0 | 0 |

Note

1. Not tested; function not guaranteed.

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

Table 37 Selected source for main control part

| SELECTED SOURCE | MSS2 | MSS1 | MSS0 |
|-------------------------------|------|------|------|
| Chime input ⁽¹⁾ | 1 | 1 | 1 |
| Chime input ⁽¹⁾ | 1 | 1 | 0 |
| Chime input | 1 | 0 | 1 |
| Input D (mono, symmetrical) | 1 | 0 | 0 |
| AM/FM (internal) | 0 | 1 | 1 |
| Input A (stereo) | 0 | 1 | 0 |
| Input B (stereo) | 0 | 0 | 1 |
| Input C (stereo, symmetrical) | 0 | 0 | 0 |

Note

1. Not tested; function not guaranteed.

11.9 Write mode: subaddress 5H**Table 38** Format of data byte Bass control (BASS)

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|------|---|------|------|------|------|------|------|
| BSYC | – | BSYB | BAS4 | BAS3 | BAS2 | BAS1 | BAS0 |

Table 39 Description of BASS bits

| BIT | SYMBOL | DESCRIPTION |
|-----|--------|--|
| 7 | BSYC | Bass filter mode for cut. If BSYC = 0, then shelving characteristic selected. If BSYC = 1, then band-pass filter characteristic selected. |
| 6 | – | This bit is not used and must be set to logic 0. |
| 5 | BSYB | Bass filter mode for boost. If BSYB = 0, then shelving characteristic selected. If BSYB = 1, then band-pass filter characteristic selected. |
| 4 | BAS4 | Bass control. These 5 bits determine the bass control level; see Table 40. |
| 3 | BAS3 | |
| 2 | BAS2 | |
| 1 | BAS1 | |
| 0 | BAS0 | |

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

Table 40 Setting of bass control level

| BASS CONTROL (dB) | BAS4 | BAS3 | BAS2 | BAS1 | BAS0 |
|----------------------------|------|------|------|------|------|
| +18 ⁽¹⁾ | 1 | 1 | 1 | 1 | 1 |
| +18 ⁽¹⁾ | 1 | 1 | 1 | 1 | 0 |
| +18 ⁽¹⁾ | 1 | 1 | 1 | 0 | 1 |
| +18 ⁽¹⁾ | 1 | 1 | 1 | 0 | 0 |
| +18 ⁽¹⁾ | 1 | 1 | 0 | 1 | 1 |
| +18 | 1 | 1 | 0 | 1 | 0 |
| +16 | 1 | 1 | 0 | 0 | 1 |
| +14 | 1 | 1 | 0 | 0 | 0 |
| +12 | 1 | 0 | 1 | 1 | 1 |
| +10 | 1 | 0 | 1 | 1 | 0 |
| +8 | 1 | 0 | 1 | 0 | 1 |
| +6 | 1 | 0 | 1 | 0 | 0 |
| +4 | 1 | 0 | 0 | 1 | 1 |
| +2 | 1 | 0 | 0 | 1 | 0 |
| +0 | 1 | 0 | 0 | 0 | 1 |
| -0 | 1 | 0 | 0 | 0 | 0 |
| -2 (-1.8) | 0 | 1 | 1 | 1 | 1 |
| -4 (-3.6) | 0 | 1 | 1 | 1 | 0 |
| -6 (-5.4) | 0 | 1 | 1 | 0 | 1 |
| -8 (-7.1) | 0 | 1 | 1 | 0 | 0 |
| -10 (-8.7) | 0 | 1 | 0 | 1 | 1 |
| -12 (-10.3) | 0 | 1 | 0 | 1 | 0 |
| -14 (-11.7) | 0 | 1 | 0 | 0 | 1 |
| -16 (-13.1) | 0 | 1 | 0 | 0 | 0 |
| -18 (-14.4) | 0 | 0 | 1 | 1 | 1 |
| -18 (-14.4) ⁽¹⁾ | 0 | 0 | 1 | 1 | 0 |
| -18 (-14.4) ⁽¹⁾ | 0 | 0 | 1 | 0 | 1 |
| -18 (-14.4) ⁽¹⁾ | 0 | 0 | 1 | 0 | 0 |
| -18 (-14.4) ⁽¹⁾ | 0 | 0 | 0 | 1 | 1 |
| -18 (-14.4) ⁽¹⁾ | 0 | 0 | 0 | 1 | 0 |
| -18 (-14.4) ⁽¹⁾ | 0 | 0 | 0 | 0 | 1 |
| -18 (-14.4) ⁽¹⁾ | 0 | 0 | 0 | 0 | 0 |

Note

1. Not tested; function not guaranteed.

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

11.10 Write mode: subaddress 6H

Table 41 Format of data byte Treble control (TRBL)

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|------|---|---|---|------|------|------|------|
| HSTM | – | – | – | TRE3 | TRE2 | TRE1 | TRE0 |

Table 42 Description of TRBL bits

| BIT | SYMBOL | DESCRIPTION |
|-----|--------|---|
| 7 | HSTM | Test mode muting average and SNC peak detector. If HSTM = 0, then normal operation. If HSTM = 1, then increased detector currents. |
| 6 | – | These 3 bits are not used; each must be set to logic 0. |
| 5 | – | |
| 4 | – | |
| 3 | TRE3 | Treble control. These 4 bits determine the treble control level; see Table 43. |
| 2 | TRE2 | |
| 1 | TRE1 | |
| 0 | TRE0 | |

Table 43 Setting of treble control level

| TREBLE CONTROL (dB) | TRE3 | TRE2 | TRE1 | TRE0 |
|---------------------|------|------|------|------|
| +14 | 1 | 1 | 1 | 1 |
| +12 | 1 | 1 | 1 | 0 |
| +10 | 1 | 1 | 0 | 1 |
| +8 | 1 | 1 | 0 | 0 |
| +6 | 1 | 0 | 1 | 1 |
| +4 | 1 | 0 | 1 | 0 |
| +2 | 1 | 0 | 0 | 1 |
| +0 | 1 | 0 | 0 | 0 |
| –0 | 0 | 1 | 1 | 1 |
| –2 | 0 | 1 | 1 | 0 |
| –4 | 0 | 1 | 0 | 1 |
| –6 | 0 | 1 | 0 | 0 |
| –8 | 0 | 0 | 1 | 1 |
| –10 | 0 | 0 | 1 | 0 |
| –12 | 0 | 0 | 0 | 1 |
| –14 | 0 | 0 | 0 | 0 |

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

11.11 Write mode: subaddress 7H

Table 44 Format of data byte Loudness control (LOUD)

| | | | | | | | |
|------|---|---|------|------|------|------|------|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| LOFF | – | – | LSN4 | LSN3 | LSN2 | LSN1 | LSN0 |

Table 45 Description of LOUD bits

| BIT | SYMBOL | DESCRIPTION |
|-----|--------|--|
| 7 | LOFF | Loudness switch control. If LOFF = 0, then the loudness switch is on. If LOFF = 1, then loudness switch is off. |
| 6 | – | These 2 bits are not used, each must be set to logic 0. |
| 5 | – | |
| 4 | LSN4 | Loudness control. These 5 bits determine the attenuation of the loudness block; see Table 46. |
| 3 | LSN3 | |
| 2 | LSN2 | |
| 1 | LSN1 | |
| 0 | LSN0 | |

Table 46 Attenuation of loudness block

| ATTENUATION (dB) | LSN4 | LSN3 | LSN2 | LSN1 | LSN0 |
|--------------------|------|------|------|------|------|
| 0 | 1 | 1 | 1 | 1 | 1 |
| -1 | 1 | 1 | 1 | 1 | 0 |
| -2 | 1 | 1 | 1 | 0 | 1 |
| -3 | 1 | 1 | 1 | 0 | 0 |
| -4 | 1 | 1 | 0 | 1 | 1 |
| -5 | 1 | 1 | 0 | 1 | 0 |
| -6 | 1 | 1 | 0 | 0 | 1 |
| -7 | 1 | 1 | 0 | 0 | 0 |
| -8 | 1 | 0 | 1 | 1 | 1 |
| -9 | 1 | 0 | 1 | 1 | 0 |
| -10 | 1 | 0 | 1 | 0 | 1 |
| -11 | 1 | 0 | 1 | 0 | 0 |
| -12 | 1 | 0 | 0 | 1 | 1 |
| -13 | 1 | 0 | 0 | 1 | 0 |
| -14 | 1 | 0 | 0 | 0 | 1 |
| -15 | 1 | 0 | 0 | 0 | 0 |
| -16 | 0 | 1 | 1 | 1 | 1 |
| -17 | 0 | 1 | 1 | 1 | 0 |
| -18 | 0 | 1 | 1 | 0 | 1 |
| -19 | 0 | 1 | 1 | 0 | 0 |
| -20 | 0 | 1 | 0 | 1 | 1 |
| -20 ⁽¹⁾ | 0 | 1 | 0 | 1 | 0 |
| -20 ⁽¹⁾ | 0 | 1 | 0 | 0 | 1 |

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

| ATTENUATION (dB) | LSN4 | LSN3 | LSN2 | LSN1 | LSN0 |
|--------------------|------|------|------|------|------|
| -20 ⁽¹⁾ | 0 | 1 | 0 | 0 | 0 |
| -20 ⁽¹⁾ | 0 | 0 | 1 | 1 | 1 |
| -20 ⁽¹⁾ | 0 | 0 | 1 | 1 | 0 |
| -20 ⁽¹⁾ | 0 | 0 | 1 | 0 | 1 |
| -20 ⁽¹⁾ | 0 | 0 | 1 | 0 | 0 |
| -20 ⁽¹⁾ | 0 | 0 | 0 | 1 | 1 |
| -20 ⁽¹⁾ | 0 | 0 | 0 | 1 | 0 |
| -20 ⁽¹⁾ | 0 | 0 | 0 | 0 | 1 |
| -20 ⁽¹⁾ | 0 | 0 | 0 | 0 | 0 |

Note

1. Not tested; function not guaranteed.

11.12 Write mode: subaddress 8H**Table 47** Format of data byte Volume 1 control (VOLUME1)

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|------|---|------|------|------|------|------|------|
| AMUT | – | VOL5 | VOL4 | VOL3 | VOL2 | VOL1 | VOL0 |

Table 48 Description of VOLUME1 bits

| BIT | SYMBOL | DESCRIPTION |
|--------|----------|--|
| 7 | AMUT | Audio mute switch. If AMUT = 0, then there is no audio mute. If AMUT = 1, then audio mute on. |
| 6 | – | This bit is not used and must be set to logic 0. |
| 5 to 0 | VOL[5:0] | Volume 1 control. These 6 bits determine the attenuation of volume 1 block; see Table 49. |

Table 49 Attenuation of volume 1 block

| ATTENUATION (dB) | VOL5 | VOL4 | VOL3 | VOL2 | VOL1 | VOL0 |
|--------------------|------|------|------|------|------|------|
| +20 ⁽¹⁾ | 1 | 1 | 1 | 1 | 1 | 1 |
| +20 ⁽¹⁾ | 1 | 1 | 1 | 1 | 1 | 0 |
| +20 ⁽¹⁾ | 1 | 1 | 1 | 1 | 0 | 1 |
| +20 | 1 | 1 | 1 | 1 | 0 | 0 |
| +19 | 1 | 1 | 1 | 0 | 1 | 1 |
| +18 | 1 | 1 | 1 | 0 | 1 | 0 |
| +17 | 1 | 1 | 1 | 0 | 0 | 1 |
| +16 | 1 | 1 | 1 | 0 | 0 | 0 |
| +15 | 1 | 1 | 0 | 1 | 1 | 1 |
| +14 | 1 | 1 | 0 | 1 | 1 | 0 |
| +13 | 1 | 1 | 0 | 1 | 0 | 1 |
| +12 | 1 | 1 | 0 | 1 | 0 | 0 |
| +11 | 1 | 1 | 0 | 0 | 1 | 1 |

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

| ATTENUATION (dB) | VOL5 | VOL4 | VOL3 | VOL2 | VOL1 | VOL0 |
|------------------|------|------|------|------|------|------|
| +10 | 1 | 1 | 0 | 0 | 1 | 0 |
| +9 | 1 | 1 | 0 | 0 | 0 | 1 |
| +8 | 1 | 1 | 0 | 0 | 0 | 0 |
| +7 | 1 | 0 | 1 | 1 | 1 | 1 |
| +6 | 1 | 0 | 1 | 1 | 1 | 0 |
| +5 | 1 | 0 | 1 | 1 | 0 | 1 |
| +4 | 1 | 0 | 1 | 1 | 0 | 0 |
| +3 | 1 | 0 | 1 | 0 | 1 | 1 |
| +2 | 1 | 0 | 1 | 0 | 1 | 0 |
| +1 | 1 | 0 | 1 | 0 | 0 | 1 |
| 0 | 1 | 0 | 1 | 0 | 0 | 0 |
| -1 | 1 | 0 | 0 | 1 | 1 | 1 |
| -2 | 1 | 0 | 0 | 1 | 1 | 0 |
| -3 | 1 | 0 | 0 | 1 | 0 | 1 |
| -4 | 1 | 0 | 0 | 1 | 0 | 0 |
| -5 | 1 | 0 | 0 | 0 | 1 | 1 |
| -6 | 1 | 0 | 0 | 0 | 1 | 0 |
| -7 | 1 | 0 | 0 | 0 | 0 | 1 |
| -8 | 1 | 0 | 0 | 0 | 0 | 0 |
| -9 | 0 | 1 | 1 | 1 | 1 | 1 |
| -10 | 0 | 1 | 1 | 1 | 1 | 0 |
| -11 | 0 | 1 | 1 | 1 | 0 | 1 |
| -12 | 0 | 1 | 1 | 1 | 0 | 0 |
| -13 | 0 | 1 | 1 | 0 | 1 | 1 |
| -14 | 0 | 1 | 1 | 0 | 1 | 0 |
| -15 | 0 | 1 | 1 | 0 | 0 | 1 |
| -16 | 0 | 1 | 1 | 0 | 0 | 0 |
| -17 | 0 | 1 | 0 | 1 | 1 | 1 |
| -18 | 0 | 1 | 0 | 1 | 1 | 0 |
| -19 | 0 | 1 | 0 | 1 | 0 | 1 |
| -20 | 0 | 1 | 0 | 1 | 0 | 0 |
| -21 | 0 | 1 | 0 | 0 | 1 | 1 |
| -22 | 0 | 1 | 0 | 0 | 1 | 0 |
| -23 | 0 | 1 | 0 | 0 | 0 | 1 |
| -24 | 0 | 1 | 0 | 0 | 0 | 0 |
| -25 | 0 | 0 | 1 | 1 | 1 | 1 |
| -26 | 0 | 0 | 1 | 1 | 1 | 0 |
| -27 | 0 | 0 | 1 | 1 | 0 | 1 |
| -28 | 0 | 0 | 1 | 1 | 0 | 0 |
| -29 | 0 | 0 | 1 | 0 | 1 | 1 |
| -30 | 0 | 0 | 1 | 0 | 1 | 0 |

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

| ATTENUATION (dB) | VOL5 | VOL4 | VOL3 | VOL2 | VOL1 | VOL0 |
|--------------------|------|------|------|------|------|------|
| -31 | 0 | 0 | 1 | 0 | 0 | 1 |
| -32 | 0 | 0 | 1 | 0 | 0 | 0 |
| -33 | 0 | 0 | 0 | 1 | 1 | 1 |
| -34 | 0 | 0 | 0 | 1 | 1 | 0 |
| -35 | 0 | 0 | 0 | 1 | 0 | 1 |
| -36 | 0 | 0 | 0 | 1 | 0 | 0 |
| -36 ⁽¹⁾ | 0 | 0 | 0 | 0 | 1 | 1 |
| -36 ⁽¹⁾ | 0 | 0 | 0 | 0 | 1 | 0 |
| -36 ⁽¹⁾ | 0 | 0 | 0 | 0 | 0 | 1 |
| -36 ⁽¹⁾ | 0 | 0 | 0 | 0 | 0 | 0 |

Note

- 1. Not tested; function not guaranteed.

11.13 Write mode: subaddress 9H

Table 50 Format of data byte Volume 2, left front (VOL2_LF)

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|------|---|------|------|------|------|------|------|
| CHML | – | VLF5 | VLF4 | VLF3 | VLF2 | VLF1 | VLF0 |

Table 51 Description of VOL2_LF bits

| BIT | SYMBOL | DESCRIPTION |
|--------|----------|---|
| 7 | CHML | Chime adder left front select. If CHML = 1, then chime on. If CHML = 0, then chime off. |
| 6 | – | This bit is not used and must be set to logic 0. |
| 5 to 0 | VLF[5:0] | Left front volume 2, balance and fader control. These 6 bits determine the attenuation of volume 2 left front; see Table 52. |

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

Table 52 Attenuation of volume 2 left front

| ATTENUATION (dB) | VLF5 | VLF4 | VLF3 | VLF2 | VLF1 | VLF0 |
|------------------|------|------|------|------|------|------|
| 0 | 1 | 1 | 1 | 1 | 1 | 1 |
| -1 | 1 | 1 | 1 | 1 | 1 | 0 |
| -2 | 1 | 1 | 1 | 1 | 0 | 1 |
| -3 | 1 | 1 | 1 | 1 | 0 | 0 |
| -4 | 1 | 1 | 1 | 0 | 1 | 1 |
| -5 | 1 | 1 | 1 | 0 | 1 | 0 |
| -6 | 1 | 1 | 1 | 0 | 0 | 1 |
| -7 | 1 | 1 | 1 | 0 | 0 | 0 |
| -8 | 1 | 1 | 0 | 1 | 1 | 1 |
| -9 | 1 | 1 | 0 | 1 | 1 | 0 |
| -10 | 1 | 1 | 0 | 1 | 0 | 1 |
| -11 | 1 | 1 | 0 | 1 | 0 | 0 |
| -12 | 1 | 1 | 0 | 0 | 1 | 1 |
| -13 | 1 | 1 | 0 | 0 | 1 | 0 |
| -14 | 1 | 1 | 0 | 0 | 0 | 1 |
| -15 | 1 | 1 | 0 | 0 | 0 | 0 |
| -16 | 1 | 0 | 1 | 1 | 1 | 1 |
| -17 | 1 | 0 | 1 | 1 | 1 | 0 |
| -18 | 1 | 0 | 1 | 1 | 0 | 1 |
| -19 | 1 | 0 | 1 | 1 | 0 | 0 |
| -20 | 1 | 0 | 1 | 0 | 1 | 1 |
| -21 | 1 | 0 | 1 | 0 | 1 | 0 |
| -22 | 1 | 0 | 1 | 0 | 0 | 1 |
| -23 | 1 | 0 | 1 | 0 | 0 | 0 |
| -24 | 1 | 0 | 0 | 1 | 1 | 1 |
| -25 | 1 | 0 | 0 | 1 | 1 | 0 |
| -26 | 1 | 0 | 0 | 1 | 0 | 1 |
| -27 | 1 | 0 | 0 | 1 | 0 | 0 |
| -28 | 1 | 0 | 0 | 0 | 1 | 1 |
| -29 | 1 | 0 | 0 | 0 | 1 | 0 |
| -30 | 1 | 0 | 0 | 0 | 0 | 1 |
| -31 | 1 | 0 | 0 | 0 | 0 | 0 |
| -32 | 0 | 1 | 1 | 1 | 1 | 1 |
| -33 | 0 | 1 | 1 | 1 | 1 | 0 |
| -34 | 0 | 1 | 1 | 1 | 0 | 1 |
| -35 | 0 | 1 | 1 | 1 | 0 | 0 |
| -36 | 0 | 1 | 1 | 0 | 1 | 1 |
| -37 | 0 | 1 | 1 | 0 | 1 | 0 |
| -38 | 0 | 1 | 1 | 0 | 0 | 1 |
| -39 | 0 | 1 | 1 | 0 | 0 | 0 |

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

| ATTENUATION (dB) | VLF5 | VLF4 | VLF3 | VLF2 | VLF1 | VLF0 |
|--------------------------------|------|------|------|------|------|------|
| -40 | 0 | 1 | 0 | 1 | 1 | 1 |
| -41 | 0 | 1 | 0 | 1 | 1 | 0 |
| -42 | 0 | 1 | 0 | 1 | 0 | 1 |
| -43 | 0 | 1 | 0 | 1 | 0 | 0 |
| -44 | 0 | 1 | 0 | 0 | 1 | 1 |
| -45 | 0 | 1 | 0 | 0 | 1 | 0 |
| -46 | 0 | 1 | 0 | 0 | 0 | 1 |
| -47 | 0 | 1 | 0 | 0 | 0 | 0 |
| -48 | 0 | 0 | 1 | 1 | 1 | 1 |
| -49 | 0 | 0 | 1 | 1 | 1 | 0 |
| -50 | 0 | 0 | 1 | 1 | 0 | 1 |
| -51 | 0 | 0 | 1 | 1 | 0 | 0 |
| -52 | 0 | 0 | 1 | 0 | 1 | 1 |
| -53 | 0 | 0 | 1 | 0 | 1 | 0 |
| -54 | 0 | 0 | 1 | 0 | 0 | 1 |
| -55 | 0 | 0 | 1 | 0 | 0 | 0 |
| -56 | 0 | 0 | 0 | 1 | 1 | 1 |
| -58.5 | 0 | 0 | 0 | 1 | 1 | 0 |
| -62 | 0 | 0 | 0 | 1 | 0 | 1 |
| -68 | 0 | 0 | 0 | 1 | 0 | 0 |
| Mute left front | 0 | 0 | 0 | 0 | 1 | 1 |
| Mute left front ⁽¹⁾ | 0 | 0 | 0 | 0 | 1 | 0 |
| Mute left front ⁽¹⁾ | 0 | 0 | 0 | 0 | 0 | 1 |
| Mute left front ⁽¹⁾ | 0 | 0 | 0 | 0 | 0 | 0 |

Note

1. Not tested; function not guaranteed.

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

11.14 Write mode: subaddress AH

Table 53 Format of data byte Volume 2, right front (VOL2_RF)

| | | | | | | | |
|----------|----------|----------|----------|----------|----------|----------|----------|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| CHMR | – | VRF5 | VRF4 | VRF3 | VRF2 | VRF1 | VRF0 |

Table 54 Description of VOL2_RF bits

| BIT | SYMBOL | DESCRIPTION |
|--------|----------|---|
| 7 | CHMR | Chime adder right front select. If CHMR = 1, then chime on. If CHMR = 0, then chime off. |
| 6 | – | This bit is not used and must be set to logic 0. |
| 5 to 0 | VRF[5:0] | Right front volume 2, balance and fader control. These 6 bits determine the attenuation of volume 2 right front; see Table 55. |

Table 55 Attenuation of volume 2 right front

| ATTENUATION (dB) | VRF5 | VRF4 | VRF3 | VRF2 | VRF1 | VRF0 |
|------------------|------|------|------|------|------|------|
| 0 | 1 | 1 | 1 | 1 | 1 | 1 |
| –1 | 1 | 1 | 1 | 1 | 1 | 0 |
| –2 | 1 | 1 | 1 | 1 | 0 | 1 |
| –3 | 1 | 1 | 1 | 1 | 0 | 0 |
| –4 | 1 | 1 | 1 | 0 | 1 | 1 |
| –5 | 1 | 1 | 1 | 0 | 1 | 0 |
| –6 | 1 | 1 | 1 | 0 | 0 | 1 |
| –7 | 1 | 1 | 1 | 0 | 0 | 0 |
| –8 | 1 | 1 | 0 | 1 | 1 | 1 |
| –9 | 1 | 1 | 0 | 1 | 1 | 0 |
| –10 | 1 | 1 | 0 | 1 | 0 | 1 |
| –11 | 1 | 1 | 0 | 1 | 0 | 0 |
| –12 | 1 | 1 | 0 | 0 | 1 | 1 |
| –13 | 1 | 1 | 0 | 0 | 1 | 0 |
| –14 | 1 | 1 | 0 | 0 | 0 | 1 |
| –15 | 1 | 1 | 0 | 0 | 0 | 0 |
| –16 | 1 | 0 | 1 | 1 | 1 | 1 |
| –17 | 1 | 0 | 1 | 1 | 1 | 0 |
| –18 | 1 | 0 | 1 | 1 | 0 | 1 |
| –19 | 1 | 0 | 1 | 1 | 0 | 0 |
| –20 | 1 | 0 | 1 | 0 | 1 | 1 |
| –21 | 1 | 0 | 1 | 0 | 1 | 0 |
| –22 | 1 | 0 | 1 | 0 | 0 | 1 |
| –23 | 1 | 0 | 1 | 0 | 0 | 0 |
| –24 | 1 | 0 | 0 | 1 | 1 | 1 |
| –25 | 1 | 0 | 0 | 1 | 1 | 0 |
| –26 | 1 | 0 | 0 | 1 | 0 | 1 |

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

| ATTENUATION (dB) | VRF5 | VRF4 | VRF3 | VRF2 | VRF1 | VRF0 |
|---------------------------------|------|------|------|------|------|------|
| -27 | 1 | 0 | 0 | 1 | 0 | 0 |
| -28 | 1 | 0 | 0 | 0 | 1 | 1 |
| -29 | 1 | 0 | 0 | 0 | 1 | 0 |
| -30 | 1 | 0 | 0 | 0 | 0 | 1 |
| -31 | 1 | 0 | 0 | 0 | 0 | 0 |
| -32 | 0 | 1 | 1 | 1 | 1 | 1 |
| -33 | 0 | 1 | 1 | 1 | 1 | 0 |
| -34 | 0 | 1 | 1 | 1 | 0 | 1 |
| -35 | 0 | 1 | 1 | 1 | 0 | 0 |
| -36 | 0 | 1 | 1 | 0 | 1 | 1 |
| -37 | 0 | 1 | 1 | 0 | 1 | 0 |
| -38 | 0 | 1 | 1 | 0 | 0 | 1 |
| -39 | 0 | 1 | 1 | 0 | 0 | 0 |
| -40 | 0 | 1 | 0 | 1 | 1 | 1 |
| -41 | 0 | 1 | 0 | 1 | 1 | 0 |
| -42 | 0 | 1 | 0 | 1 | 0 | 1 |
| -43 | 0 | 1 | 0 | 1 | 0 | 0 |
| -44 | 0 | 1 | 0 | 0 | 1 | 1 |
| -45 | 0 | 1 | 0 | 0 | 1 | 0 |
| -46 | 0 | 1 | 0 | 0 | 0 | 1 |
| -47 | 0 | 1 | 0 | 0 | 0 | 0 |
| -48 | 0 | 0 | 1 | 1 | 1 | 1 |
| -49 | 0 | 0 | 1 | 1 | 1 | 0 |
| -50 | 0 | 0 | 1 | 1 | 0 | 1 |
| -51 | 0 | 0 | 1 | 1 | 0 | 0 |
| -52 | 0 | 0 | 1 | 0 | 1 | 1 |
| -53 | 0 | 0 | 1 | 0 | 1 | 0 |
| -54 | 0 | 0 | 1 | 0 | 0 | 1 |
| -55 | 0 | 0 | 1 | 0 | 0 | 0 |
| -56 | 0 | 0 | 0 | 1 | 1 | 1 |
| -58.5 | 0 | 0 | 0 | 1 | 1 | 0 |
| -62 | 0 | 0 | 0 | 1 | 0 | 1 |
| -68 | 0 | 0 | 0 | 1 | 0 | 0 |
| Mute right front | 0 | 0 | 0 | 0 | 1 | 1 |
| Mute right front ⁽¹⁾ | 0 | 0 | 0 | 0 | 1 | 0 |
| Mute right front ⁽¹⁾ | 0 | 0 | 0 | 0 | 0 | 1 |
| Mute right front ⁽¹⁾ | 0 | 0 | 0 | 0 | 0 | 0 |

Note

1. Not tested; function not guaranteed.

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

11.15 Write mode: subaddress BH

Table 56 Format of data byte Volume 2, left rear (VOL2_LR)

| | | | | | | | |
|---|---|------|------|------|------|------|------|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| – | – | VLR5 | VLR4 | VLR3 | VLR2 | VLR1 | VLR0 |

Table 57 Description of VOL2_LR bits

| BIT | SYMBOL | DESCRIPTION |
|--------|----------|---|
| 7 | – | These 2 bits are not used, each must be set to logic 0. |
| 6 | – | |
| 5 to 0 | VLR[5:0] | Left rear volume 2, balance and fader control. These 6 bits determine the attenuation of volume 2 left rear; see Table 58. |

Table 58 Attenuation of volume 2 left rear

| ATTENUATION (dB) | VLR5 | VLR4 | VLR3 | VLR2 | VLR1 | VLR0 |
|------------------|------|------|------|------|------|------|
| 0 | 1 | 1 | 1 | 1 | 1 | 1 |
| -1 | 1 | 1 | 1 | 1 | 1 | 0 |
| -2 | 1 | 1 | 1 | 1 | 0 | 1 |
| -3 | 1 | 1 | 1 | 1 | 0 | 0 |
| -4 | 1 | 1 | 1 | 0 | 1 | 1 |
| -5 | 1 | 1 | 1 | 0 | 1 | 0 |
| -6 | 1 | 1 | 1 | 0 | 0 | 1 |
| -7 | 1 | 1 | 1 | 0 | 0 | 0 |
| -8 | 1 | 1 | 0 | 1 | 1 | 1 |
| -9 | 1 | 1 | 0 | 1 | 1 | 0 |
| -10 | 1 | 1 | 0 | 1 | 0 | 1 |
| -11 | 1 | 1 | 0 | 1 | 0 | 0 |
| -12 | 1 | 1 | 0 | 0 | 1 | 1 |
| -13 | 1 | 1 | 0 | 0 | 1 | 0 |
| -14 | 1 | 1 | 0 | 0 | 0 | 1 |
| -15 | 1 | 1 | 0 | 0 | 0 | 0 |
| -16 | 1 | 0 | 1 | 1 | 1 | 1 |
| -17 | 1 | 0 | 1 | 1 | 1 | 0 |
| -18 | 1 | 0 | 1 | 1 | 0 | 1 |
| -19 | 1 | 0 | 1 | 1 | 0 | 0 |
| -20 | 1 | 0 | 1 | 0 | 1 | 1 |
| -21 | 1 | 0 | 1 | 0 | 1 | 0 |
| -22 | 1 | 0 | 1 | 0 | 0 | 1 |
| -23 | 1 | 0 | 1 | 0 | 0 | 0 |
| -24 | 1 | 0 | 0 | 1 | 1 | 1 |
| -25 | 1 | 0 | 0 | 1 | 1 | 0 |
| -26 | 1 | 0 | 0 | 1 | 0 | 1 |
| -27 | 1 | 0 | 0 | 1 | 0 | 0 |

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

| ATTENUATION (dB) | VLR5 | VLR4 | VLR3 | VLR2 | VLR1 | VLR0 |
|-------------------------------|------|------|------|------|------|------|
| -28 | 1 | 0 | 0 | 0 | 1 | 1 |
| -29 | 1 | 0 | 0 | 0 | 1 | 0 |
| -30 | 1 | 0 | 0 | 0 | 0 | 1 |
| -31 | 1 | 0 | 0 | 0 | 0 | 0 |
| -32 | 0 | 1 | 1 | 1 | 1 | 1 |
| -33 | 0 | 1 | 1 | 1 | 1 | 0 |
| -34 | 0 | 1 | 1 | 1 | 0 | 1 |
| -35 | 0 | 1 | 1 | 1 | 0 | 0 |
| -36 | 0 | 1 | 1 | 0 | 1 | 1 |
| -37 | 0 | 1 | 1 | 0 | 1 | 0 |
| -38 | 0 | 1 | 1 | 0 | 0 | 1 |
| -39 | 0 | 1 | 1 | 0 | 0 | 0 |
| -40 | 0 | 1 | 0 | 1 | 1 | 1 |
| -41 | 0 | 1 | 0 | 1 | 1 | 0 |
| -42 | 0 | 1 | 0 | 1 | 0 | 1 |
| -43 | 0 | 1 | 0 | 1 | 0 | 0 |
| -44 | 0 | 1 | 0 | 0 | 1 | 1 |
| -45 | 0 | 1 | 0 | 0 | 1 | 0 |
| -46 | 0 | 1 | 0 | 0 | 0 | 1 |
| -47 | 0 | 1 | 0 | 0 | 0 | 0 |
| -48 | 0 | 0 | 1 | 1 | 1 | 1 |
| -49 | 0 | 0 | 1 | 1 | 1 | 0 |
| -50 | 0 | 0 | 1 | 1 | 0 | 1 |
| -51 | 0 | 0 | 1 | 1 | 0 | 0 |
| -52 | 0 | 0 | 1 | 0 | 1 | 1 |
| -53 | 0 | 0 | 1 | 0 | 1 | 0 |
| -54 | 0 | 0 | 1 | 0 | 0 | 1 |
| -55 | 0 | 0 | 1 | 0 | 0 | 0 |
| -56 | 0 | 0 | 0 | 1 | 1 | 1 |
| -58.5 | 0 | 0 | 0 | 1 | 1 | 0 |
| -62 | 0 | 0 | 0 | 1 | 0 | 1 |
| -68 | 0 | 0 | 0 | 1 | 0 | 0 |
| Mute left rear | 0 | 0 | 0 | 0 | 1 | 1 |
| Mute left rear ⁽¹⁾ | 0 | 0 | 0 | 0 | 1 | 0 |
| Mute left rear ⁽¹⁾ | 0 | 0 | 0 | 0 | 0 | 1 |
| Mute left rear ⁽¹⁾ | 0 | 0 | 0 | 0 | 0 | 0 |

Note

1. Not tested; function not guaranteed.

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

11.16 Write mode: subaddress CH

Table 59 Format of data byte Volume 2, right rear (VOL2_RR)

| | | | | | | | |
|----------|----------|----------|----------|----------|----------|----------|----------|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| – | – | VRR5 | VRR4 | VRR3 | VRR2 | VRR1 | VRR0 |

Table 60 Description of VOL2_RR bits

| BIT | SYMBOL | DESCRIPTION |
|--------|----------|---|
| 7 | – | These 2 bits are not used, each must be set to logic 0. |
| 6 | – | |
| 5 to 0 | VRR[5:0] | Right rear volume 2, balance and fader control. These 6 bits determine the attenuation of volume 2 right rear, see Table 61. |

Table 61 Attenuation of volume 2 right rear

| ATTENUATION (dB) | VRR5 | VRR4 | VRR3 | VRR2 | VRR1 | VRR0 |
|------------------|------|------|------|------|------|------|
| 0 | 1 | 1 | 1 | 1 | 1 | 1 |
| –1 | 1 | 1 | 1 | 1 | 1 | 0 |
| –2 | 1 | 1 | 1 | 1 | 0 | 1 |
| –3 | 1 | 1 | 1 | 1 | 0 | 0 |
| –4 | 1 | 1 | 1 | 0 | 1 | 1 |
| –5 | 1 | 1 | 1 | 0 | 1 | 0 |
| –6 | 1 | 1 | 1 | 0 | 0 | 1 |
| –7 | 1 | 1 | 1 | 0 | 0 | 0 |
| –8 | 1 | 1 | 0 | 1 | 1 | 1 |
| –9 | 1 | 1 | 0 | 1 | 1 | 0 |
| –10 | 1 | 1 | 0 | 1 | 0 | 1 |
| –11 | 1 | 1 | 0 | 1 | 0 | 0 |
| –12 | 1 | 1 | 0 | 0 | 1 | 1 |
| –13 | 1 | 1 | 0 | 0 | 1 | 0 |
| –14 | 1 | 1 | 0 | 0 | 0 | 1 |
| –15 | 1 | 1 | 0 | 0 | 0 | 0 |
| –16 | 1 | 0 | 1 | 1 | 1 | 1 |
| –17 | 1 | 0 | 1 | 1 | 1 | 0 |
| –18 | 1 | 0 | 1 | 1 | 0 | 1 |
| –19 | 1 | 0 | 1 | 1 | 0 | 0 |
| –20 | 1 | 0 | 1 | 0 | 1 | 1 |
| –21 | 1 | 0 | 1 | 0 | 1 | 0 |
| –22 | 1 | 0 | 1 | 0 | 0 | 1 |
| –23 | 1 | 0 | 1 | 0 | 0 | 0 |
| –24 | 1 | 0 | 0 | 1 | 1 | 1 |
| –25 | 1 | 0 | 0 | 1 | 1 | 0 |
| –26 | 1 | 0 | 0 | 1 | 0 | 1 |
| –27 | 1 | 0 | 0 | 1 | 0 | 0 |

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

| ATTENUATION (dB) | VRR5 | VRR4 | VRR3 | VRR2 | VRR1 | VRR0 |
|--------------------------------|------|------|------|------|------|------|
| -28 | 1 | 0 | 0 | 0 | 1 | 1 |
| -29 | 1 | 0 | 0 | 0 | 1 | 0 |
| -30 | 1 | 0 | 0 | 0 | 0 | 1 |
| -31 | 1 | 0 | 0 | 0 | 0 | 0 |
| -32 | 0 | 1 | 1 | 1 | 1 | 1 |
| -33 | 0 | 1 | 1 | 1 | 1 | 0 |
| -34 | 0 | 1 | 1 | 1 | 0 | 1 |
| -35 | 0 | 1 | 1 | 1 | 0 | 0 |
| -36 | 0 | 1 | 1 | 0 | 1 | 1 |
| -37 | 0 | 1 | 1 | 0 | 1 | 0 |
| -38 | 0 | 1 | 1 | 0 | 0 | 1 |
| -39 | 0 | 1 | 1 | 0 | 0 | 0 |
| -40 | 0 | 1 | 0 | 1 | 1 | 1 |
| -41 | 0 | 1 | 0 | 1 | 1 | 0 |
| -42 | 0 | 1 | 0 | 1 | 0 | 1 |
| -43 | 0 | 1 | 0 | 1 | 0 | 0 |
| -44 | 0 | 1 | 0 | 0 | 1 | 1 |
| -45 | 0 | 1 | 0 | 0 | 1 | 0 |
| -46 | 0 | 1 | 0 | 0 | 0 | 1 |
| -47 | 0 | 1 | 0 | 0 | 0 | 0 |
| -48 | 0 | 0 | 1 | 1 | 1 | 1 |
| -49 | 0 | 0 | 1 | 1 | 1 | 0 |
| -50 | 0 | 0 | 1 | 1 | 0 | 1 |
| -51 | 0 | 0 | 1 | 1 | 0 | 0 |
| -52 | 0 | 0 | 1 | 0 | 1 | 1 |
| -53 | 0 | 0 | 1 | 0 | 1 | 0 |
| -54 | 0 | 0 | 1 | 0 | 0 | 1 |
| -55 | 0 | 0 | 1 | 0 | 0 | 0 |
| -56 | 0 | 0 | 0 | 1 | 1 | 1 |
| -58.5 | 0 | 0 | 0 | 1 | 1 | 0 |
| -62 | 0 | 0 | 0 | 1 | 0 | 1 |
| -68 | 0 | 0 | 0 | 1 | 0 | 0 |
| Mute right rear | 0 | 0 | 0 | 0 | 1 | 1 |
| Mute right rear ⁽¹⁾ | 0 | 0 | 0 | 0 | 1 | 0 |
| Mute right rear ⁽¹⁾ | 0 | 0 | 0 | 0 | 0 | 1 |
| Mute right rear ⁽¹⁾ | 0 | 0 | 0 | 0 | 0 | 0 |

Note

1. Not tested; function not guaranteed.

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

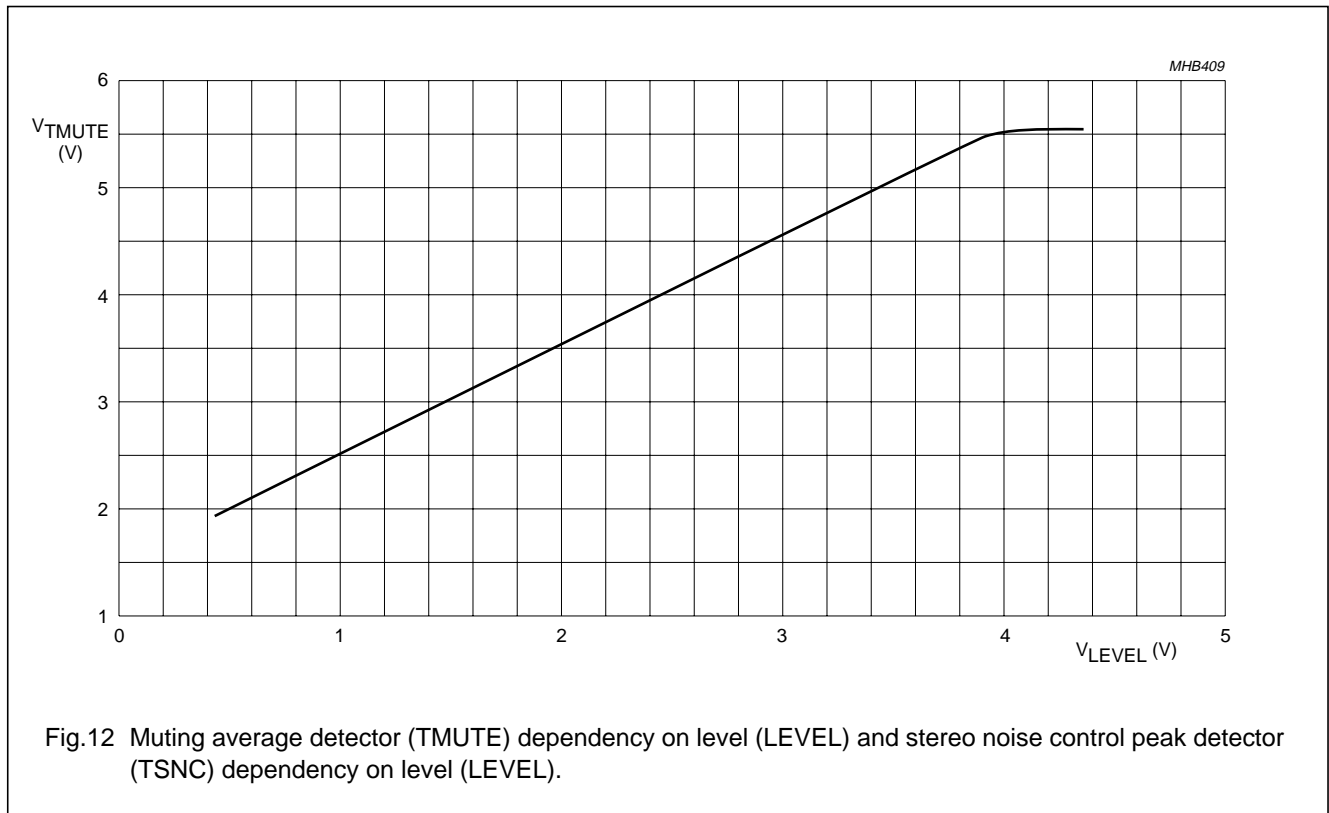


Fig.12 Muting average detector (TMUTE) dependency on level (LEVEL) and stereo noise control peak detector (TSNC) dependency on level (LEVEL).

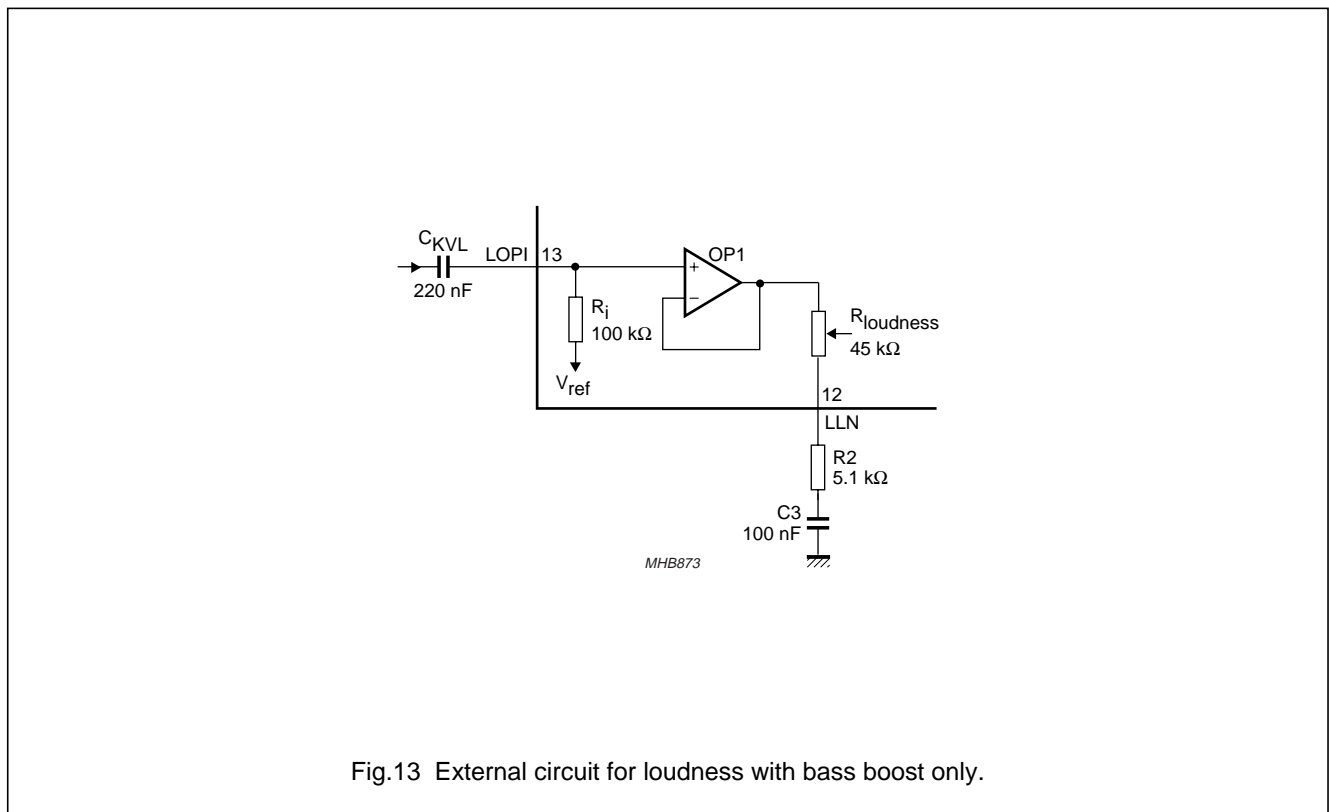


Fig.13 External circuit for loudness with bass boost only.

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

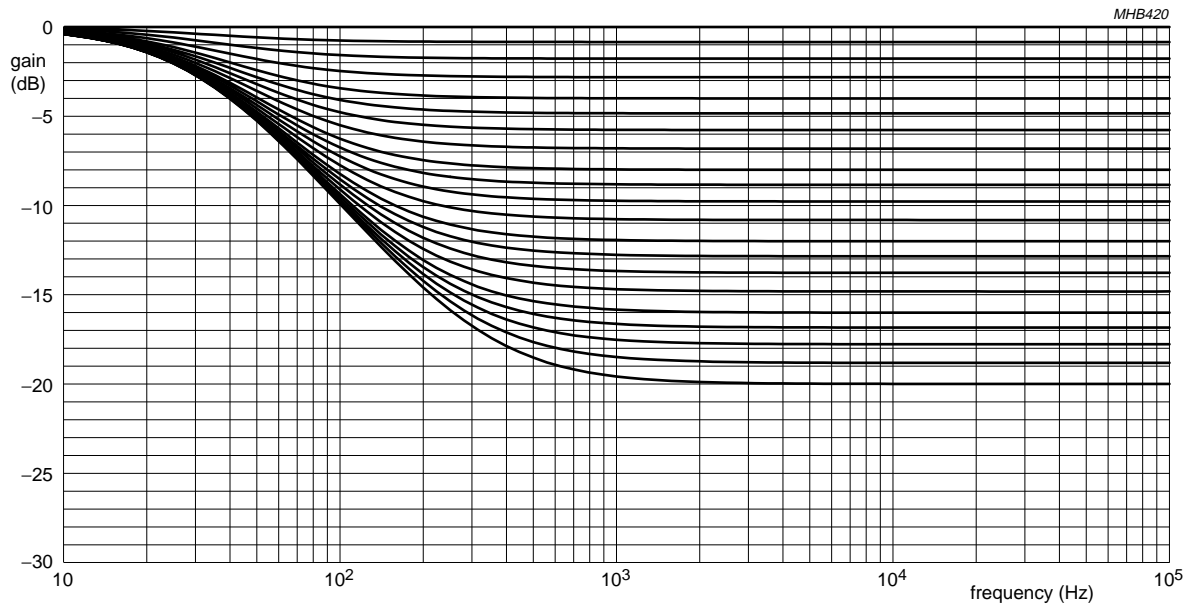


Fig.14 Loudness with bass boost only without influence of coupling capacitors C_{KVL} and C_{KVR} .

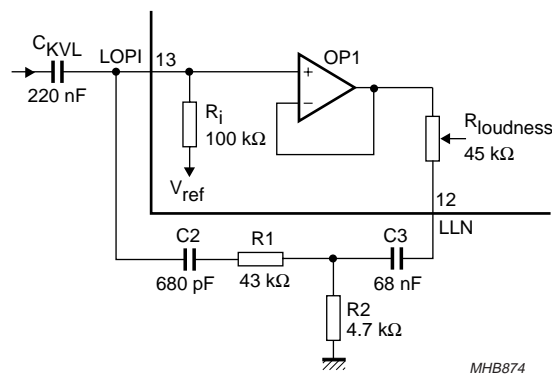


Fig.15 External circuit for loudness with bass and treble boost.

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

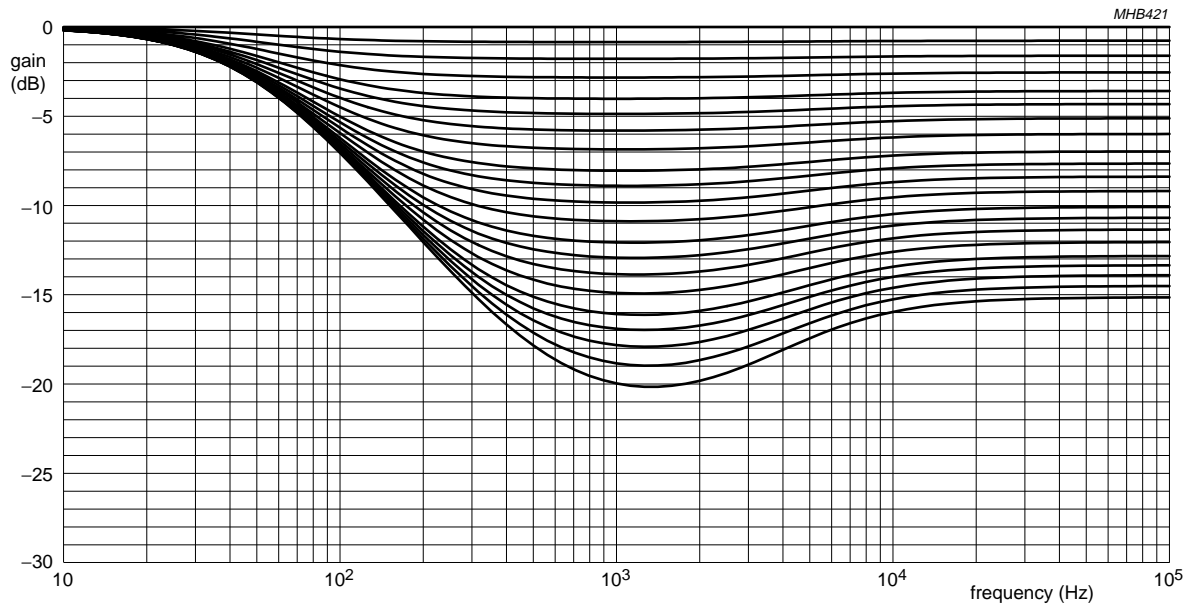


Fig.16 Loudness with bass and treble boost without influence of coupling capacitors C_{KVL} and C_{KVR} .

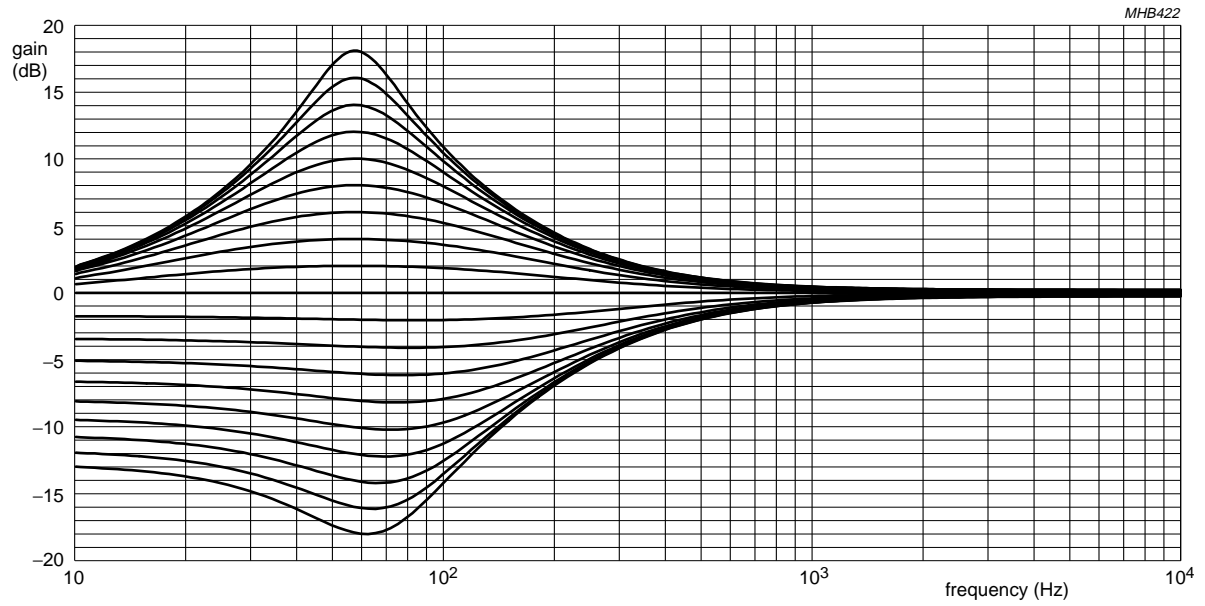


Fig.17 Bass curve with 2×220 nF and $R = 3.3$ k Ω external, BSYB = 1 for gain and BSYC = 0 for cut.

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

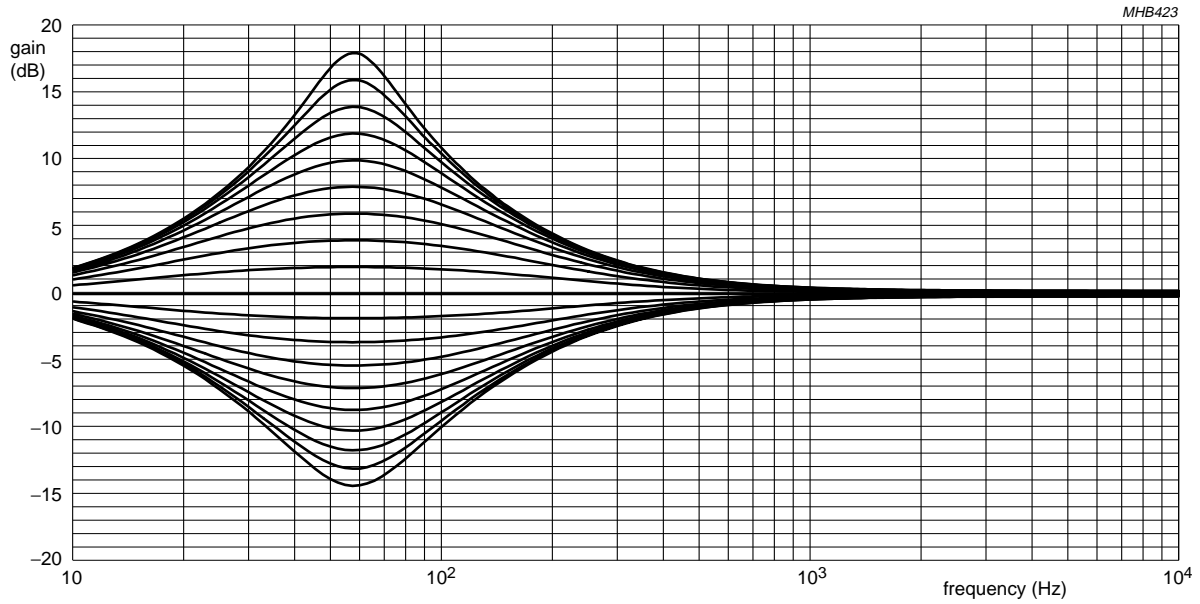


Fig.18 Bass curve with 2×220 nF and $R = 3.3$ k Ω external, BSYB = 1 and BSYC = 1.

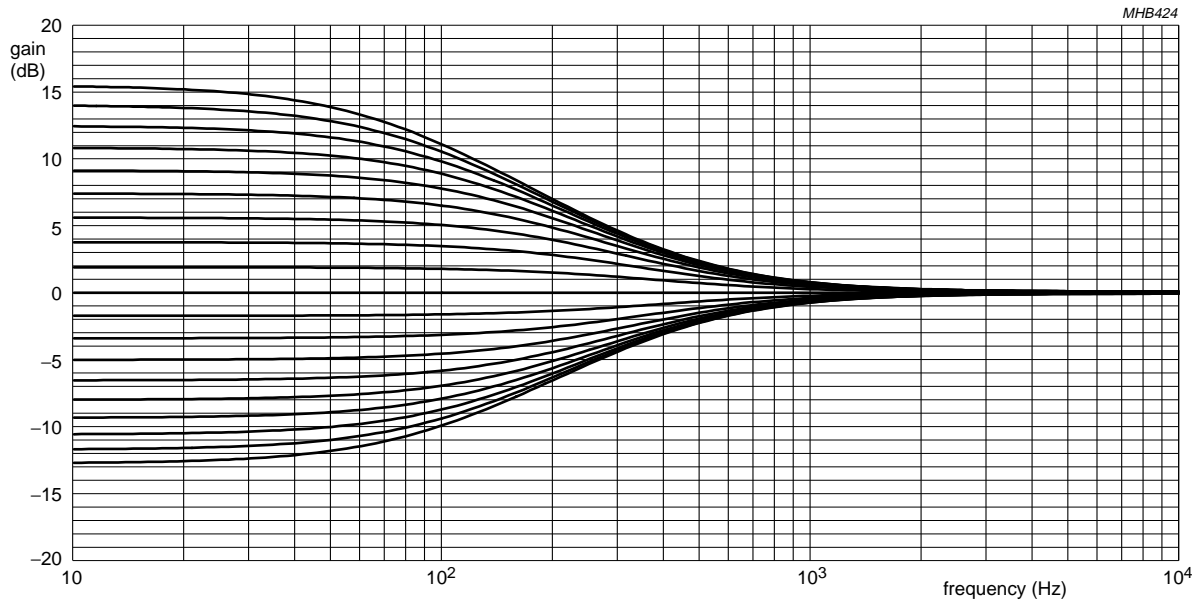


Fig.19 Bass curve with 1×47 nF external, between RBI and RBO, BSYB = 0 and BSYC = 0.

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

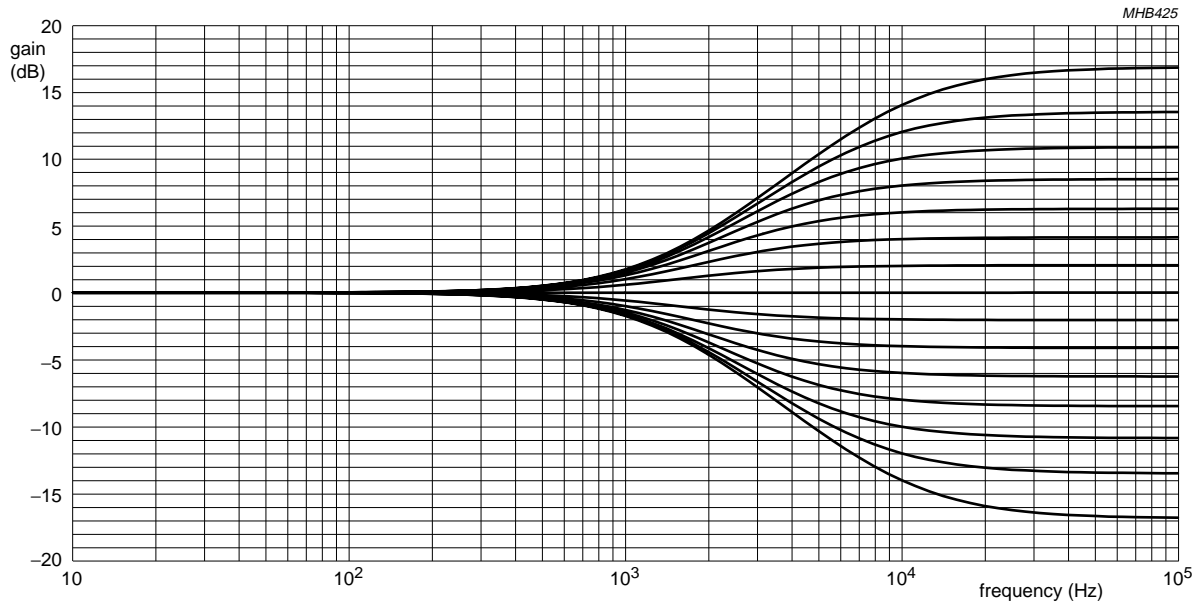






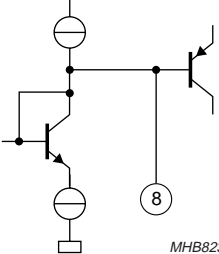
Fig.20 Treble control characteristic.

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL






12 INTERNAL CIRCUITRY

Table 62 Equivalent pin circuits

| PIN | SYMBOL | EQUIVALENT CIRCUIT |
|-----|-----------------|--|
| 1 | n.c. | |
| 2 | n.c. | |
| 3 | SCLQ |  |
| 4 | LEVEL |  |
| 5 | SCL |  |
| 6 | SDA |  |
| 7 | DGND | |
| 8 | TBL |  |
| 9 | V _{CC} | |

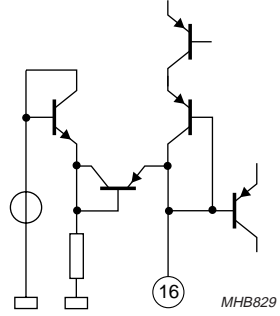

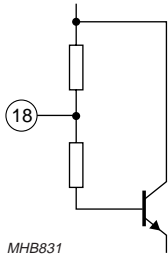


Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

| PIN | SYMBOL | EQUIVALENT CIRCUIT |
|-----|--------|--|
| 10 | CHIME |  <p>MHB824</p> |
| 11 | AGND | |
| 12 | LLN |  <p>MHB825</p> |
| 13 | LOPI |  <p>MHB826</p> |
| 14 | LOPO |  <p>MHB827</p> |
| 15 | BRI |  <p>MHB828</p> |




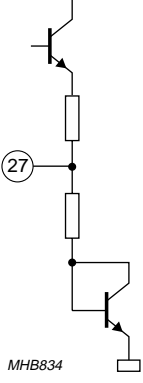

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

| PIN | SYMBOL | EQUIVALENT CIRCUIT |
|-----|--------|--|
| 16 | ADR |  |
| 17 | BLI |  |
| 18 | SCAP |  |
| 19 | CRIP |  |
| 20 | n.c. | |
| 21 | n.c. | |
| 22 | n.c. | |
| 23 | CCOM |  |







Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

| PIN | SYMBOL | EQUIVALENT CIRCUIT |
|-----|--------|--|
| 24 | CLIP |  <p>MHB358</p> |
| 25 | MONOC |  <p>MHB833</p> |
| 26 | MONOP |  <p>MHB359</p> |
| 27 | VHS |  <p>MHB834</p> |
| 28 | ARI |  <p>MHB360</p> |

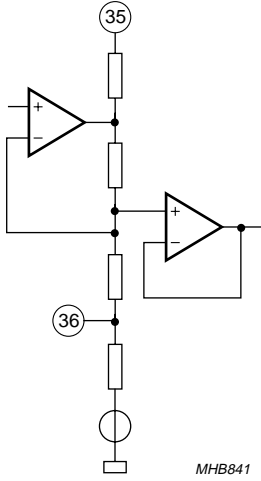


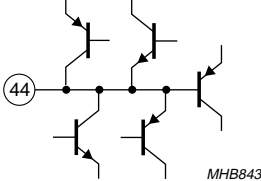

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

| PIN | SYMBOL | EQUIVALENT CIRCUIT |
|-----|--------|--|
| 29 | AMNCAP |  <p>MHB835</p> |
| 30 | ALI |  <p>MHB836</p> |
| 31 | ROPO |  <p>MHB837</p> |
| 32 | ROPI |  <p>MHB838</p> |
| 33 | RLN |  <p>MHB839</p> |
| 34 | RTC |  <p>MHB840</p> |


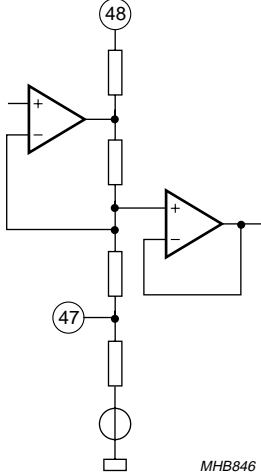



Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

| PIN | SYMBOL | EQUIVALENT CIRCUIT |
|-----|--------|--|
| 35 | RBI |  |
| 36 | RBO | |
| 37 | RF |  |
| 38 | n.c. | |
| 39 | n.c. | |
| 40 | n.c. | |
| 41 | n.c. | |
| 42 | n.c. | |
| 43 | RR |  |
| 44 | ASICAP |  |
| 45 | LR |  |

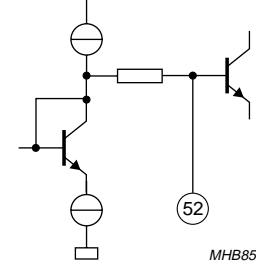
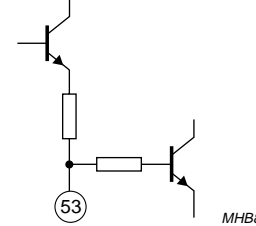
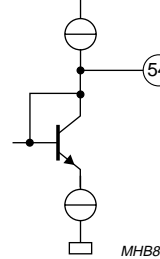
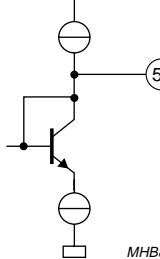
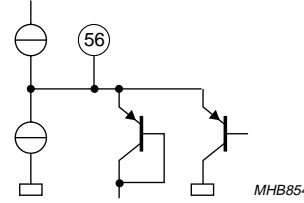
Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

| PIN | SYMBOL | EQUIVALENT CIRCUIT |
|-----|--------|--|
| 46 | LF |  <p>MHB845</p> |
| 47 | LBO |  <p>MHB846</p> |
| 48 | LBI | |
| 49 | LTC |  <p>MHB847</p> |
| 50 | AMPCAP |  <p>MHB848</p> |
| 51 | AMHOLD |  <p>MHB849</p> |






Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

| PIN | SYMBOL | EQUIVALENT CIRCUIT |
|-----|-----------|--|
| 52 | AMHCAP |  |
| 53 | I_{ref} |  |
| 54 | TWBAM2 |  |
| 55 | TUSN2 |  |
| 56 | PHASE |  |


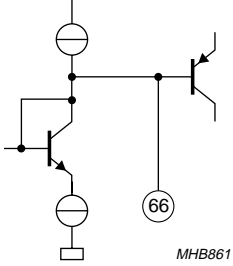

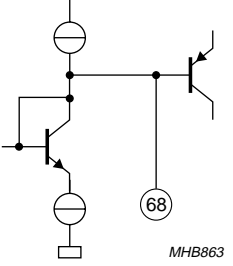

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

| PIN | SYMBOL | EQUIVALENT CIRCUIT |
|-----|-----------|--|
| 57 | f_{ref} |  |
| 58 | PILOT |  |
| 59 | AFSAMPLE |  |
| 60 | n.c. | |
| 61 | n.c. | |
| 62 | n.c. | |
| 63 | FMHOLD |  |
| 64 | AMHIN |  |

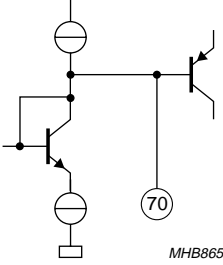




Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

| PIN | SYMBOL | EQUIVALENT CIRCUIT |
|-----|--------|--|
| 65 | AMNBIN |  <p>MHB860</p> |
| 66 | TMUTE |  <p>MHB861</p> |
| 67 | MPXRDS |  <p>MHB862</p> |
| 68 | TSNC |  <p>MHB863</p> |
| 69 | MPXIN |  <p>MHB864</p> |

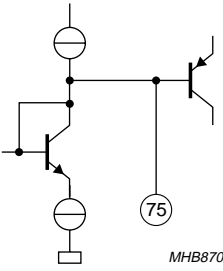
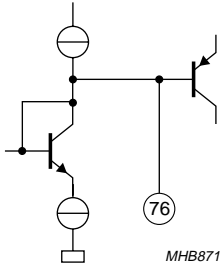

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

| PIN | SYMBOL | EQUIVALENT CIRCUIT |
|-----|--------|--|
| 70 | FMNCAP |  |
| 71 | DEEML |  |
| 72 | DEEMR |  |
| 73 | FMLBUF |  |
| 74 | FMRBUF |  |

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

| PIN | SYMBOL | EQUIVALENT CIRCUIT |
|-----|--------|--|
| 75 | TWBAM1 |  <p style="text-align: right; margin-right: 50px;"><i>MHB870</i></p> |
| 76 | TUSN1 |  <p style="text-align: right; margin-right: 50px;"><i>MHB871</i></p> |
| 77 | SDAQ |  <p style="text-align: right; margin-right: 50px;"><i>MHB872</i></p> |
| 78 | n.c. | |
| 79 | n.c. | |
| 80 | n.c. | |

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

13 TEST CIRCUIT

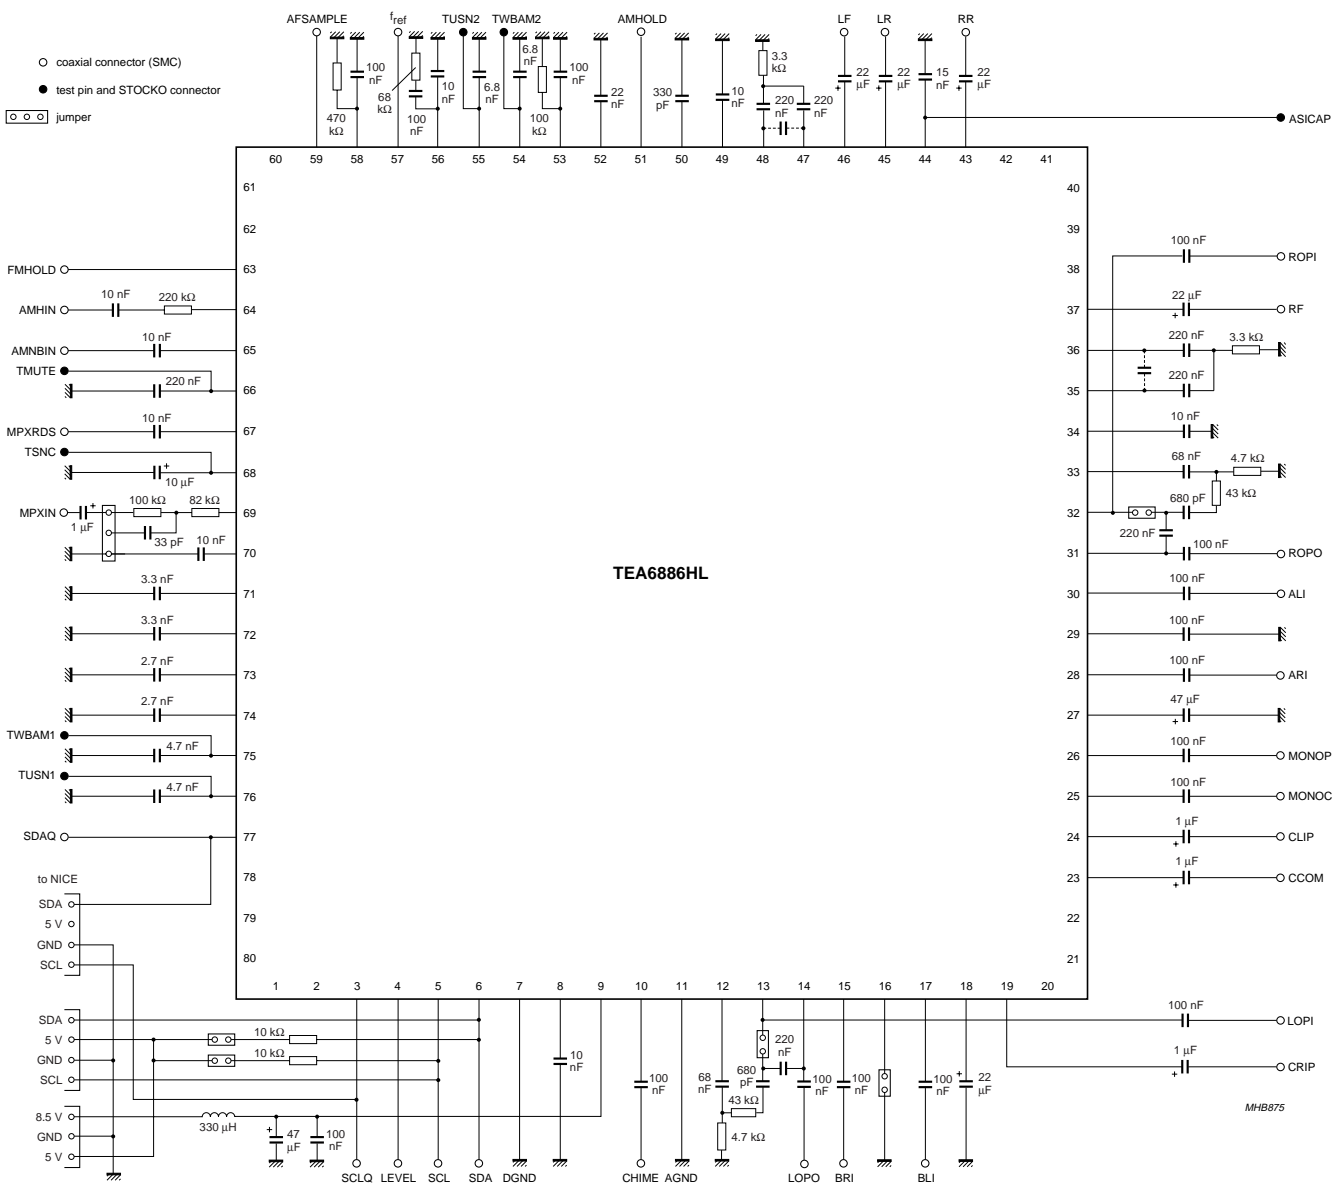


Fig.21 Test circuit.

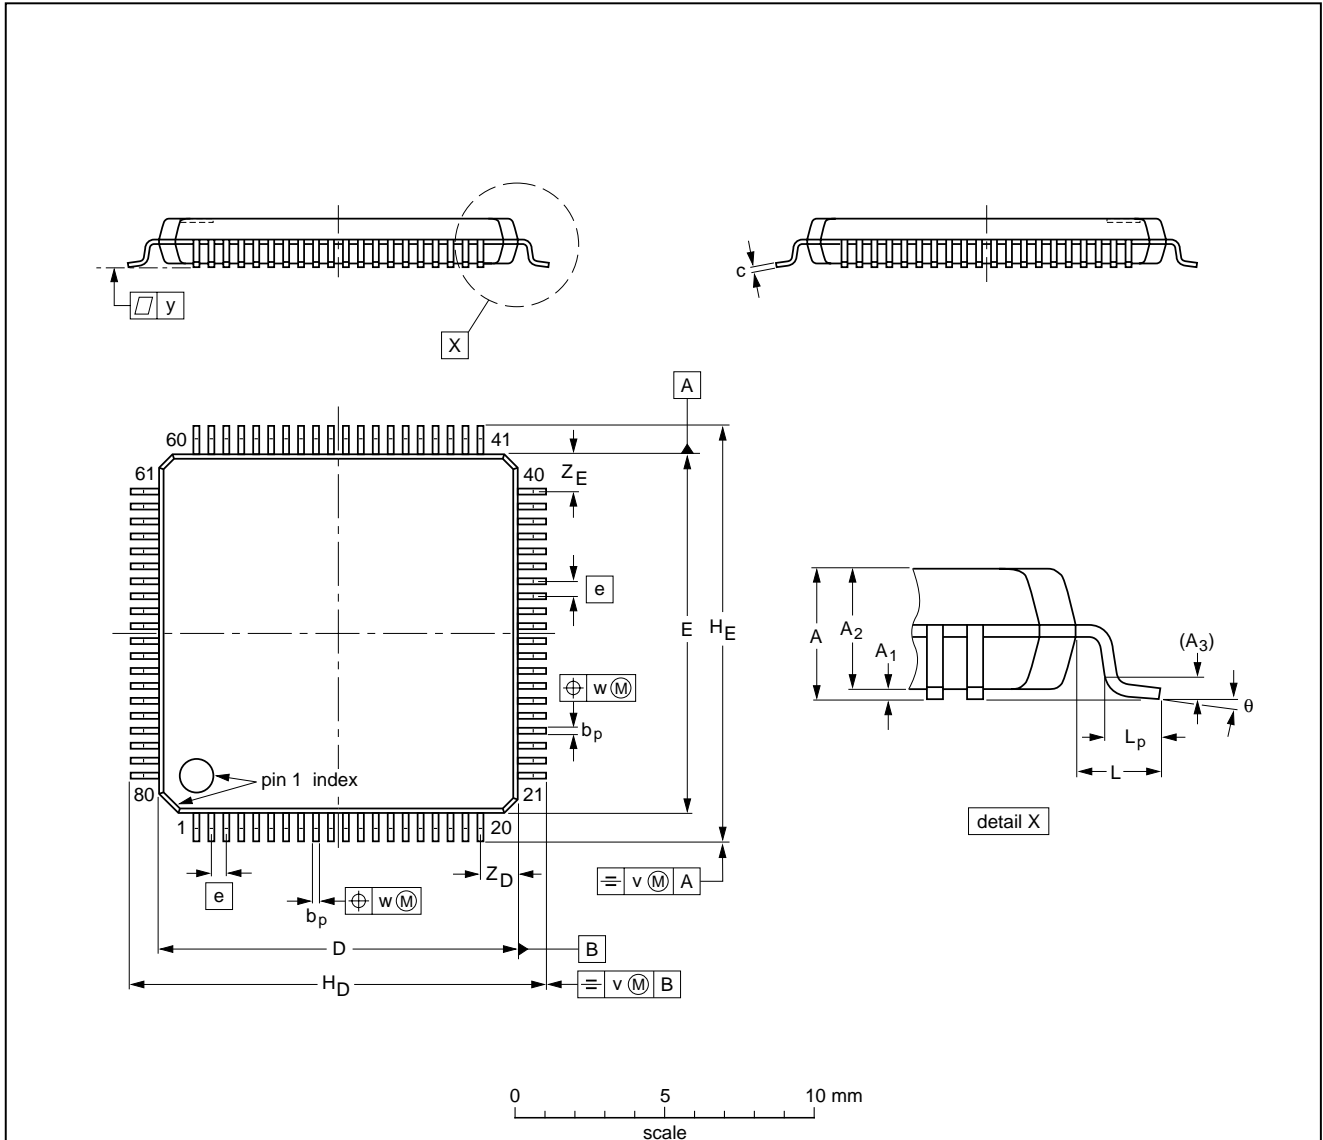
Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

14 PACKAGE OUTLINE

LQFP80: plastic low profile quad flat package; 80 leads; body 12 x 12 x 1.4 mm

SOT315-1



DIMENSIONS (mm are the original dimensions)

| UNIT | A max. | A ₁ | A ₂ | A ₃ | b _p | c | D ⁽¹⁾ | E ⁽¹⁾ | e | H _D | H _E | L | L _p | v | w | y | Z _D ⁽¹⁾ | Z _E ⁽¹⁾ | θ |
|------|--------|----------------|----------------|----------------|----------------|--------------|------------------|------------------|-----|----------------|----------------|-----|----------------|-----|------|-----|-------------------------------|-------------------------------|----------|
| mm | 1.6 | 0.16 0.04 | 1.5 1.3 | 0.25 | 0.27 0.13 | 0.18 0.12 | 12.1 11.9 | 12.1 11.9 | 0.5 | 14.15 13.85 | 14.15 13.85 | 1.0 | 0.75 0.30 | 0.2 | 0.15 | 0.1 | 1.45 1.05 | 1.45 1.05 | 7° 0° |

Note

1. Plastic or metal protrusions of 0.25 mm maximum per side are not included.

| OUTLINE VERSION | REFERENCES | | | | EUROPEAN PROJECTION | ISSUE DATE |
|-----------------|------------|--------|------|--|---------------------|----------------------|
| | IEC | JEDEC | EIAJ | | | |
| SOT315-1 | 136E15 | MS-026 | | | | 99-12-27 00-01-19 |

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

15 SOLDERING

15.1 Introduction to soldering surface mount packages

This text gives a very brief insight to a complex technology. A more in-depth account of soldering ICs can be found in our *"Data Handbook IC26; Integrated Circuit Packages"* (document order number 9398 652 90011).

There is no soldering method that is ideal for all surface mount IC packages. Wave soldering is not always suitable for surface mount ICs, or for printed-circuit boards with high population densities. In these situations reflow soldering is often used.

15.2 Reflow soldering

Reflow soldering requires solder paste (a suspension of fine solder particles, flux and binding agent) to be applied to the printed-circuit board by screen printing, stencilling or pressure-syringe dispensing before package placement.

Several methods exist for reflowing; for example, infrared/convection heating in a conveyor type oven. Throughput times (preheating, soldering and cooling) vary between 100 and 200 seconds depending on heating method.

Typical reflow peak temperatures range from 215 to 250 °C. The top-surface temperature of the packages should preferably be kept below 230 °C.

15.3 Wave soldering

Conventional single wave soldering is not recommended for surface mount devices (SMDs) or printed-circuit boards with a high component density, as solder bridging and non-wetting can present major problems.

To overcome these problems the double-wave soldering method was specifically developed.

If wave soldering is used the following conditions must be observed for optimal results:

- Use a double-wave soldering method comprising a turbulent wave with high upward pressure followed by a smooth laminar wave.
- For packages with leads on two sides and a pitch (e):
 - larger than or equal to 1.27 mm, the footprint longitudinal axis is **preferred** to be parallel to the transport direction of the printed-circuit board;
 - smaller than 1.27 mm, the footprint longitudinal axis **must** be parallel to the transport direction of the printed-circuit board.

The footprint must incorporate solder thieves at the downstream end.

- For packages with leads on four sides, the footprint must be placed at a 45° angle to the transport direction of the printed-circuit board. The footprint must incorporate solder thieves downstream and at the side corners.

During placement and before soldering, the package must be fixed with a droplet of adhesive. The adhesive can be applied by screen printing, pin transfer or syringe dispensing. The package can be soldered after the adhesive is cured.

Typical dwell time is 4 seconds at 250 °C.

A mildly-activated flux will eliminate the need for removal of corrosive residues in most applications.

15.4 Manual soldering

Fix the component by first soldering two diagonally-opposite end leads. Use a low voltage (24 V or less) soldering iron applied to the flat part of the lead. Contact time must be limited to 10 seconds at up to 300 °C.

When using a dedicated tool, all other leads can be soldered in one operation within 2 to 5 seconds between 270 and 320 °C.

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

15.5 Suitability of surface mount IC packages for wave and reflow soldering methods

| PACKAGE | SOLDERING METHOD | |
|--|-----------------------------------|-----------------------|
| | WAVE | REFLOW ⁽¹⁾ |
| BGA, LFBGA, SQFP, TFBGA | not suitable | suitable |
| HBCC, HLQFP, HSQFP, HSOP, HTQFP, HTSSOP, SMS | not suitable ⁽²⁾ | suitable |
| PLCC ⁽³⁾ , SO, SOJ | suitable | suitable |
| LQFP, QFP, TQFP | not recommended ⁽³⁾⁽⁴⁾ | suitable |
| SSOP, TSSOP, VSO | not recommended ⁽⁵⁾ | suitable |

Notes

- All surface mount (SMD) packages are moisture sensitive. Depending upon the moisture content, the maximum temperature (with respect to time) and body size of the package, there is a risk that internal or external package cracks may occur due to vaporization of the moisture in them (the so called popcorn effect). For details, refer to the Drypack information in the *"Data Handbook IC26; Integrated Circuit Packages; Section: Packing Methods"*.
- These packages are not suitable for wave soldering as a solder joint between the printed-circuit board and heatsink (at bottom version) can not be achieved, and as solder may stick to the heatsink (on top version).
- If wave soldering is considered, then the package must be placed at a 45° angle to the solder wave direction. The package footprint must incorporate solder thieves downstream and at the side corners.
- Wave soldering is only suitable for LQFP, TQFP and QFP packages with a pitch (e) equal to or larger than 0.8 mm; it is definitely not suitable for packages with a pitch (e) equal to or smaller than 0.65 mm.
- Wave soldering is only suitable for SSOP and TSSOP packages with a pitch (e) equal to or larger than 0.65 mm; it is definitely not suitable for packages with a pitch (e) equal to or smaller than 0.5 mm.

Up-level Car radio Analog Signal Processor (CASP)

TEA6886HL

16 DATA SHEET STATUS

| DATA SHEET STATUS | PRODUCT STATUS | DEFINITIONS ⁽¹⁾ |
|---------------------------|----------------|--|
| Objective specification | Development | This data sheet contains the design target or goal specifications for product development. Specification may change in any manner without notice. |
| Preliminary specification | Qualification | This data sheet contains preliminary data, and supplementary data will be published at a later date. Philips Semiconductors reserves the right to make changes at any time without notice in order to improve design and supply the best possible product. |
| Product specification | Production | This data sheet contains final specifications. Philips Semiconductors reserves the right to make changes at any time without notice in order to improve design and supply the best possible product. |

Note

1. Please consult the most recently issued data sheet before initiating or completing a design.

17 DEFINITIONS

Short-form specification — The data in a short-form specification is extracted from a full data sheet with the same type number and title. For detailed information see the relevant data sheet or data handbook.

Limiting values definition — Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 60134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.

Application information — Applications that are described herein for any of these products are for illustrative purposes only. Philips Semiconductors make no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

18 DISCLAIMERS

Life support applications — These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips Semiconductors customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips Semiconductors for any damages resulting from such application.

Right to make changes — Philips Semiconductors reserves the right to make changes, without notice, in the products, including circuits, standard cells, and/or software, described or contained herein in order to improve design and/or performance. Philips Semiconductors assumes no responsibility or liability for the use of any of these products, conveys no licence or title under any patent, copyright, or mask work right to these products, and makes no representations or warranties that these products are free from patent, copyright, or mask work right infringement, unless otherwise specified.

19 PURCHASE OF PHILIPS I²C COMPONENTS



Purchase of Philips I²C components conveys a license under the Philips' I²C patent to use the components in the I²C system provided the system conforms to the I²C specification defined by Philips. This specification can be ordered using the code 9398 393 40011.

Up-level Car radio Analog Signal
Processor (CASP)

TEA6886HL

NOTES

Up-level Car radio Analog Signal
Processor (CASP)

TEA6886HL

NOTES

Up-level Car radio Analog Signal
Processor (CASP)

TEA6886HL

NOTES

Philips Semiconductors – a worldwide company

Argentina: see South America

Australia: 3 Figtree Drive, HOMEBUSH, NSW 2140,
Tel. +61 2 9704 8141, Fax. +61 2 9704 8139

Austria: Computerstr. 6, A-1101 WIEN, P.O. Box 213,
Tel. +43 1 60 101 1248, Fax. +43 1 60 101 1210

Belarus: Hotel Minsk Business Center, Bld. 3, r. 1211, Volodarski Str. 6,
220050 MINSK, Tel. +375 172 20 0733, Fax. +375 172 20 0773

Belgium: see The Netherlands

Brazil: see South America

Bulgaria: Philips Bulgaria Ltd., Energoproject, 15th floor,
51 James Bourchier Blvd., 1407 SOFIA,
Tel. +359 2 68 9211, Fax. +359 2 68 9102

Canada: PHILIPS SEMICONDUCTORS/COMPONENTS,
Tel. +1 800 234 7381, Fax. +1 800 943 0087

China/Hong Kong: 501 Hong Kong Industrial Technology Centre,
72 Tat Chee Avenue, Kowloon Tong, HONG KONG,
Tel. +852 2319 7888, Fax. +852 2319 7700

Colombia: see South America

Czech Republic: see Austria

Denmark: Sydhavnsgade 23, 1780 COPENHAGEN V,
Tel. +45 33 29 3333, Fax. +45 33 29 3905

Finland: Sinikalliontie 3, FIN-02630 ESPOO,
Tel. +358 9 615 800, Fax. +358 9 6158 0920

France: 51 Rue Carnot, BP317, 92156 SURESNES Cedex,
Tel. +33 1 4099 6161, Fax. +33 1 4099 6427

Germany: Hammerbrookstraße 69, D-20097 HAMBURG,
Tel. +49 40 2353 60, Fax. +49 40 2353 6300

Hungary: see Austria

India: Philips INDIA Ltd, Band Box Building, 2nd floor,
254-D, Dr. Annie Besant Road, Worli, MUMBAI 400 025,
Tel. +91 22 493 8541, Fax. +91 22 493 0966

Indonesia: PT Philips Development Corporation, Semiconductors Division,
Gedung Philips, Jl. Buncit Raya Kav.99-100, JAKARTA 12510,
Tel. +62 21 794 0040 ext. 2501, Fax. +62 21 794 0080

Ireland: Newstead, Clonskeagh, DUBLIN 14,
Tel. +353 1 7640 000, Fax. +353 1 7640 200

Israel: RAPAC Electronics, 7 Kehilat Saloniki St, PO Box 18053,
TEL AVIV 61180, Tel. +972 3 645 0444, Fax. +972 3 649 1007

Italy: PHILIPS SEMICONDUCTORS, Via Casati, 23 - 20052 MONZA (MI),
Tel. +39 039 203 6838, Fax +39 039 203 6800

Japan: Philips Bldg 13-37, Kohnan 2-chome, Minato-ku,
TOKYO 108-8507, Tel. +81 3 3740 5130, Fax. +81 3 3740 5057

Korea: Philips House, 260-199 Itaewon-dong, Yongsan-ku, SEOUL,
Tel. +82 2 709 1412, Fax. +82 2 709 1415

Malaysia: No. 76 Jalan Universiti, 46200 PETALING JAYA, SELANGOR,
Tel. +60 3 750 5214, Fax. +60 3 757 4880

Mexico: 5900 Gateway East, Suite 200, EL PASO, TEXAS 79905,
Tel. +9-5 800 234 7381, Fax +9-5 800 943 0087

Middle East: see Italy

Netherlands: Postbus 90050, 5600 PB EINDHOVEN, Bldg. VB,
Tel. +31 40 27 82785, Fax. +31 40 27 88399

New Zealand: 2 Wagener Place, C.P.O. Box 1041, AUCKLAND,
Tel. +64 9 849 4160, Fax. +64 9 849 7811

Norway: Box 1, Manglerud 0612, OSLO,
Tel. +47 22 74 8000, Fax. +47 22 74 8341

Pakistan: see Singapore

Philippines: Philips Semiconductors Philippines Inc.,
106 Valero St. Salcedo Village, P.O. Box 2108 MCC, MAKATI,
Metro MANILA, Tel. +63 2 816 6380, Fax. +63 2 817 3474

Poland: Al.Jerozolimskie 195 B, 02-222 WARSAW,
Tel. +48 22 5710 000, Fax. +48 22 5710 001

Portugal: see Spain

Romania: see Italy

Russia: Philips Russia, Ul. Usatcheva 35A, 119048 MOSCOW,
Tel. +7 095 755 6918, Fax. +7 095 755 6919

Singapore: Lorong 1, Toa Payoh, SINGAPORE 319762,
Tel. +65 350 2538, Fax. +65 251 6500

Slovakia: see Austria

Slovenia: see Italy

South Africa: S.A. PHILIPS Pty Ltd., 195-215 Main Road Martindale,
2092 JOHANNESBURG, P.O. Box 58088 Newville 2114,
Tel. +27 11 471 5401, Fax. +27 11 471 5398

South America: Al. Vicente Pinzon, 173, 6th floor,
04547-130 SÃO PAULO, SP, Brazil,
Tel. +55 11 821 2333, Fax. +55 11 821 2382

Spain: Balmes 22, 08007 BARCELONA,
Tel. +34 93 301 6312, Fax. +34 93 301 4107

Sweden: Kottbygatan 7, Akalla, S-16485 STOCKHOLM,
Tel. +46 8 5985 2000, Fax. +46 8 5985 2745

Switzerland: Allmendstrasse 140, CH-8027 ZÜRICH,
Tel. +41 1 488 2741 Fax. +41 1 488 3263

Taiwan: Philips Semiconductors, 5F, No. 96, Chien Kuo N. Rd., Sec. 1,
TAIPEI, Taiwan Tel. +886 2 2134 2451, Fax. +886 2 2134 2874

Thailand: PHILIPS ELECTRONICS (THAILAND) Ltd.,
60/14 MOO 11, Bangna Trad Road KM. 3, Bagna, BANGKOK 10260,
Tel. +66 2 361 7910, Fax. +66 2 398 3447

Turkey: Yukari Dudullu, Org. San. Blg., 2.Cad. Nr. 28 81260 Umraniye,
ISTANBUL, Tel. +90 216 522 1500, Fax. +90 216 522 1813

Ukraine: PHILIPS UKRAINE, 4 Patrice Lumumba str., Building B, Floor 7,
252042 KIEV, Tel. +380 44 264 2776, Fax. +380 44 268 0461

United Kingdom: Philips Semiconductors Ltd., 276 Bath Road, Hayes,
MIDDLESEX UB3 5BX, Tel. +44 208 730 5000, Fax. +44 208 754 8421

United States: 811 East Arques Avenue, SUNNYVALE, CA 94088-3409,
Tel. +1 800 234 7381, Fax. +1 800 943 0087

Uruguay: see South America

Vietnam: see Singapore

Yugoslavia: PHILIPS, Trg N. Pasica 5/v, 11000 BEOGRAD,
Tel. +381 11 3341 299, Fax.+381 11 3342 553

For all other countries apply to: Philips Semiconductors,
Marketing Communications, Building BE-p, P.O. Box 218, 5600 MD EINDHOVEN,
The Netherlands, Fax. +31 40 27 24825

Internet: <http://www.semiconductors.philips.com>

© Philips Electronics N.V. 2000

SCA 70

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Printed in The Netherlands

753503/25/01/pp92

Date of release: 2000 Nov 21

Document order number: 9397 750 07523

Let's make things better.

**Philips
Semiconductors**



PHILIPS