IEC cord connector C19, rewirable, straight



C19

70° C

Description

- Connector:
  Screw-on
- Outlet, Pin temperature 70 °C, Protection class I
- Cable

Approvals

- UL License Number: E96454
- CSA License Number: 205419

Characteristics

- Qualified for use in equipment according IEC/EN 60950

Weblinks

Approvals, RoHS, CHINA-RoHS, e-Store, SCHURTER-Stock-Check, Distributor-Stock-Check


Technical Data

Ratings IEC	16 A / 250 VAC; 50 Hz
Ratings UL/CSA	20 A / 250 VAC; 60 Hz
Dielectric Strength	> 2 kVAC between L-N > 2 kVAC between L/N-PE (1 min/50 Hz)
Allowable Operation Temp.	-25 °C to 70 °C
Protection Class	Suitable for appliances with protection class I acc. to IEC 61140
Terminal	Cable
Material: Housing	Thermoplastic, black, UL 94V-0

Appliance-Inlet/-Outlet	C19 acc. to IEC/EN 60320-1, UL 498, CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 16 A, Protection class I

Dimensions

Length 36 mm

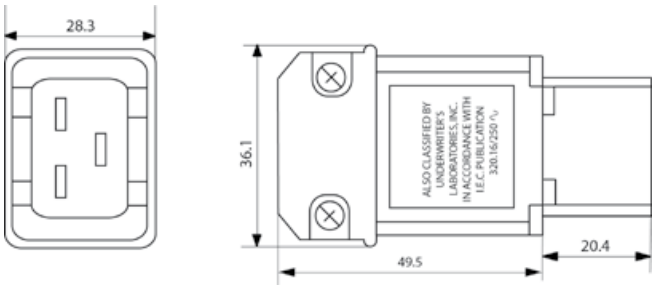

Variants

Distributor-Stock-Check | SCHURTER-Stock-Check | e-Store

Color	Max. cable diameter	Max. wire size	Order Number
black	12.0 mm	3 x 12 AWG	4300.0921

Packaging unit

100 Pcs

The specifications, descriptions and illustrations indicated in this document are based on current information. All content is subject to modifications anamendments.