

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0923152039](#)
Status: **Active**
Overview: [picoflex](#)
Description: Picoflex® PF-50 IDT-to-IDT, 20 Circuits, 0.39m (1.28') Length

Documents:
[3D Model](#) [Product Specification PS-99020-0011 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

General
Product Family Cable Assemblies
Series [92315](#)
Connector to Connector Picoflex® IDT-to-IDT
Overview [picoflex](#)
Product Name Picoflex®


Physical
Cable Length 0.39m (1.28')
Circuits (Loaded) 20
Color - Resin Natural
Gender Female-Female
Lock to Mating Part None
Material - Metal Phosphor Bronze
Material - Plating Mating Tin
Material - Plating Termination Tin
Material - Resin Polyester
Packaging Type Bag
Pitch - Mating Interface (in) 0.050 In
Pitch - Mating Interface (mm) 1.27 mm
Plating min: Mating (µin) 80.00
Plating min: Mating (µm) 2.000
Plating min: Termination (µin) 80.00
Plating min: Termination (µm) 2.00
Single Ended No
Termination Interface: Style IDT or Pierce
Waterproof / Dustproof No
Wire Insulation Diameter N/A
Wire Size AWG 28
Wire/Cable Type PVC, Ribbon Cable

Electrical
Current - Maximum per Contact 1.2A
Shielded No
Voltage - Maximum 250V

Material Info

Reference - Drawing Numbers

Product Specification PS-99020-0011
Sales Drawing SD-92315-001

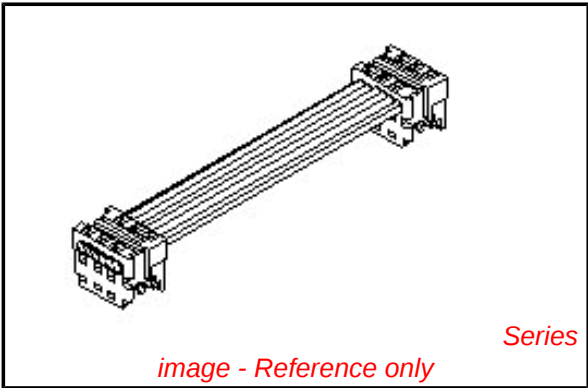

EU RoHS
ELV and RoHS
Compliant
REACH SVHC
Not Reviewed
Halogen-Free
Status
Not Reviewed

China RoHS



Need more information on product environmental compliance?
Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)
Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
[92315Series](#)



Mates With
Picoflex® PF-50 Header [90325](#) , [90800](#) ,
[90779](#) , [90715](#) , [90814](#)

PART NO.

SEE CHART

DWG. NO.

SD-92315-001

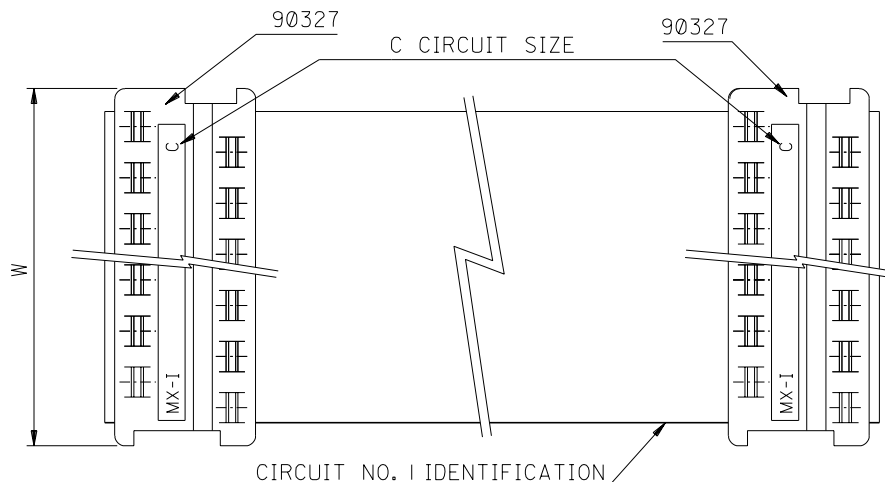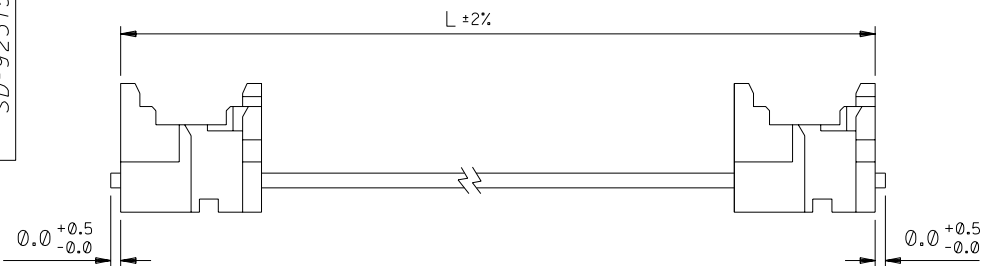

ORDERING INFORMATION

92315-****

CIRCUIT SIZE
LENGTH L IN CENTIMETRES

LENGTHS AVAILABLE FROM 6 CM TO 120 CM

e.g. 92315-1208 = 12 CIRCUIT
WITH LENGTH L OF 8 CM.

NOTE : FOR LENGTHS OF
100 CM , THE PART NO. IS 92315-***01
105 CM , THE PART NO. IS 92315-***02
110 CM , THE PART NO. IS 92315-***03
115 CM , THE PART NO. IS 92315-***04
120 CM , THE PART NO. IS 92315-***05

90327 CONNECTOR

CIRCUIT SIZE	DIMENSION W
4	7.59
6	10.13
8	12.67
10	15.21
12	17.75
14	20.29
16	22.83
18	25.37
20	27.91
22	30.45
24	32.99
26	35.53

CABLE DETAILS:

28 AWG , 1.27 MM PITCH , 7 STRANDS WITH TINNED COPPER ,
GREY PVC INSULATION WITH A COLOURED POLARITY STRIPE
INDICATING CIRCUIT NO. 1 , UL 2651.

NOTES:

- SEE PRODUCT SPECIFICATIONS PS-99020-0011.
- SEE TERMINATION SPECIFICATION ES-99033-0001.
- SEE CABLE SPECIFICATION ES-99027-0006.
- HARNESSES WILL BE 100% ELECTRICALLY TESTED FOR
SHORTS AND DISCONTINUITIES.

ADDED OPTION
EC NO. 2002-1088
DRAWING NO. 020607
CHK: / /
APPR: / /

B

REV

DESCRIPTION

QUALITY
SYMBOLS

MAJOR
=

CRITICAL
=

GENERAL TOLERANCES:
(UNLESS SPECIFIED)

	mm	INCH
4 PLACES	±0.	±.
3 PLACES	±0.	±.
2 PLACES	±0.	±.
1 PLACE	±0.	±.

ANGULAR: ± 1/2 °

DRAFT WHERE APPLICABLE MUST
REMAIN WITHIN DIMENSIONSSCALE
4 : 1DESIGN UNITS
☒ mm ☐ INCHDRAWN BY & DATE
MCURRAN 98/06/19CHECKED BY & DATE
AMcCANN 98/06/19APPROVED BY & DATE
MWILHITE 98/06/19CAD FILENAME
S92315X1.DGN

SEE CHART

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.DIMENSIONS:
☐ mm ☐ INCH ☒ mm ONLYSHT REV
REVISE ON
CAD ONLYTITLE: PICO FLEX IDT TO IDT
STANDARD ASSEMBLIES

MOLEX INCORPORATED

MATERIAL NO. DRAWING NO. SHEET NO.

SD-92315-001 1 OF 1

SIZE
B