

F-366XP

Electrical Specifications (@25C)

1. Maximum Power: 10.0 VA
2. Primary: Series: 230V @ 50/60 Hz
Parallel: 115V @ 50/60Hz
3. Secondary: Series: 16.0V CT @ 0.640 Amps
Parallel: 8.0V CT @ 1.280 Amps

Description:

The F-366XP is part of a wide selection of plug-in types that meet the needs of PC boards and solid state power supply design. This transformer can satisfy power as well as control and instrumentation applications.

Construction:

Wound on a single channel nylon bobbin. Materials are UL recognized, Class B (130° C) rated.

Safety:

These products are 100% hipot tested with an insulation of 1500V between primary and secondary windings.

Dimensions:

Units: In inches

| A | B | C | D | E | F | G |
|-------|-------|-------|-------|------|-------|-------|
| 1.625 | 2.812 | 1.437 | 1.875 | .250 | 1.312 | 2.375 |


Mounting holes: 0.187 in.

Pin length: 0.187 in.

Pin size: 0.20 x .041 in.

Weight: 11.0 oz




Schematic:

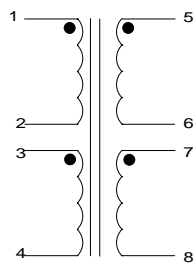

Primary: Series - 1 to 4, Jumper 2 to 3
Parallel - 1 to 3, Jumper 1 to 3 and 2 to 4

Secondary: Series - 3 to 6, Jumper 4 to 5
Parallel - 3 to 5, Jumper 3 to 5 and 4 to 6

RoHS Compliance: As of manufacturing date February 2005, all standard products meet the requirements of 2002/95/EC, known as the RoHS initiative.

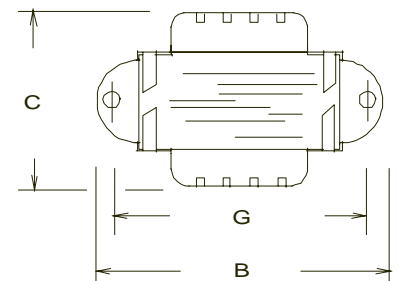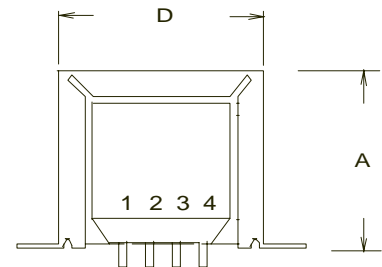

Power Transformers

PC Mount

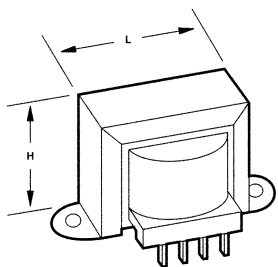


Figure A




Figure B

:: Description

Triad power transformers are offered in a wide selection of plug-in types to meet the needs of PC board and solid state power supply designs. These transformers can satisfy power as well as control and instrumentation applications. The transformers are available in a single or dual primary and dual center tapped secondary configurations.

:: Specifications

Primary: 115/230 V, 50/60 Hz

:: Dual Primary, Dual Secondaries

| Section | Type No. | Figure | VA | Secondary | | Dimensions | | | | | | | Wt. Oz. |
|---------|----------|--------|----|---------------------|-----------------|------------|----|----|----|---|----|----|---------|
| | | | | Series | Parallel | H | W | D | L | A | B | MW | |
| A | F-3132P | B | 1½ | 15.0V CT @ 0.1A | 7.5V @ 0.2A | 1⅜ | • | 1⅝ | • | ⅜ | 1 | • | 4.0 |
| | F-333P | | | 30.0V CT @ 0.050A | 15.0V @ 0.100A | | | | | | | | |
| | F-367P | | | 230.0V CT @ 0.0065A | 115.0V @ 0.013A | | | | | | | | |
| B | F-348XP | A | 4½ | 12.6V CT @ 0.350A | 6.3V @ 0.700A | 1⅜ | 2⅝ | 1¼ | 1⅝ | ¼ | 1⅞ | 2 | 6.5 |
| C | F-3142XP | A | 4½ | 15.0V CT @ 0.3A | 7.5V @ 0.6A | 1⅞ | 2⅝ | 1¼ | 1⅝ | ¼ | 1⅞ | 2 | 6.5 |
| | F-349XP | | | 16.0V CT @ 0.280A | 8.0V @ 0.560A | | | | | | | | |
| | F-350XP | | | 24.0V CT @ 0.180A | 12.0V @ 0.360A | | | | | | | | |
| | F-358XP | | | 20.0V CT @ 0.225A | 10.0V @ 0.450A | | | | | | | | |
| | F-3143XP | | | 30.0V CT @ 0.15A | 15.0V @ 0.3A | | | | | | | | |
| | F-363XP | | | 230.0V CT @ 0.020A | 115.0V @ 0.040A | | | | | | | | |
| D | F-3152XP | A | 7½ | 15.0V CT @ 0.5A | 7.5V @ 1.0A | 1⅜ | 2⅞ | 1⅞ | 1⅝ | ¼ | 1⅞ | 2⅝ | 11.0 |
| | F-3153XP | | | 30.0V CT @ 0.25A | 15.0V @ 0.5A | | | | | | | | |
| E | F-359XP | A | 10 | 24.0V CT @ 0.450A | 12.0V @ 0.900A | 1⅜ | 2⅞ | 1⅞ | 1⅝ | ¼ | 1⅞ | 2⅝ | 11.0 |
| | F-362XP | | | 20.0V CT @ 0.500A | 10.0V @ 1.0A | | | | | | | | |
| | F-365XP | | | 12.6V CT @ 0.800A | 6.3.0V @ 1.6A | | | | | | | | |
| | F-366XP | | | 16.0V CT @ 0.640A | 8.0V @ 1.28A | | | | | | | | |
| | F-369XP | | | 230.0V CT @ 0.044A | 115.0V @ 0.088A | | | | | | | | |
| F | F-370P | B | 24 | 10.0V CT @ 2.4A | 5.0V @ 4.8A | 1⅜ | • | 2¼ | 1⅝ | ¼ | 2⅞ | • | 13.3 |
| | F-371P | | | 12.6V CT @ 2.0A | 6.3V @ 4.0A | | | | | | | | |
| | F-372P | | | 16.0V CT @ 1.5A | 8.0V @ 3.0A | | | | | | | | |
| | F-373P | | | 20.0V CT @ 1.2A | 10.0V @ 2.4A | | | | | | | | |
| | F-374P | | | 24.0V CT @ 1.0A | 12.0V @ 2.0A | | | | | | | | |
| | F-375P | | | 28.0V CT @ 0.8A | 14.0V @ 1.6A | | | | | | | | |
| | F-376P | | | 34.0V CT @ 0.7A | 17.0V @ 1.4A | | | | | | | | |
| | F-377P | | | 40.0V CT @ 0.6A | 20.0V @ 1.2A | | | | | | | | |
| | F-378P | | | 56.0V CT @ 0.42A | 28.0V @ 0.84A | | | | | | | | |
| | F-379P | | | 120.0V CT @ 0.2A | 60.0V @ 0.4A | | | | | | | | |

CT = Center Tap Mounting hole size: Figure A = ⅜"

:: Outline Dimensions

Technical Notes

1. The transformers with dual primaries permit their use in equipment for sale in both foreign and domestic markets.
2. Hi-pot tested at 1,500 VRMS.

Figure A

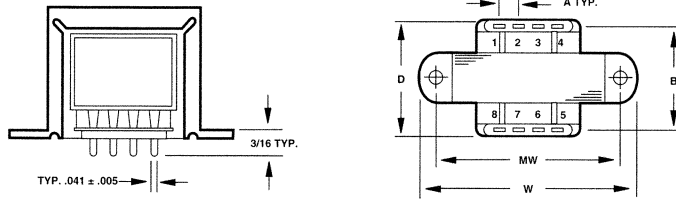


Figure B

