SML400HB01MF

Attributes:
-aerospace build standard
-high reliability
-lightweight
-metal matrix base plate
-AlN isolation
-Mosfet module

Maximum rated values/Electrical Properties

Source-drain voltage V_{DSS}	Tj=25C to 175C Rgs=1MΩ	V_{DSS}	100	V
DC Collector Current I_{D25}	Tc=25C Tc=25C,Tvj=175C	I_c, nom Ic	400 400	A
Repetitive peak Drain Current	tp=1msec,Tc=80C	I_{crm}	600	A
Total Power Dissipation	Tc=25C	P_{tot}	1700	W
Gate-emitter peak voltage	Continuous Transient	V_{GS}	+/-20 =/-30	V V
Repetitive Peak Forward Current	tp=1msec	I_{frm}	600	A
Isolation voltage	RMS, 50Hz, t=1min	V_{isol}	2500	V

			MIN	TYP	MAX	
Drain-source breakdown voltage	I_D=250µA,V_{GS}=0V, Tc=25C	BV_{DSS}	100			V
Gate Threshold voltage	I_D=8mA,V_{DS}=V_{GS}, Tvj=25C	$Vge_{(th)}$	3.0		5	V
C_{iss} C_{oss} C_{rss}	f=1MHz,Tvj=25C,Vgs=0V,V_{DS}=0V			15200 5800 1720		pF pF pF
$Q_{g(on)}$ Q_{gs} Q_{gd}	Tvj=25C,V_{DS}=0.5V_{DSS},ID=0.5I_{D25},V_{GS}=10V			470 100 270		nC nC nC
Gate-source leakage current	V_{GS}=+/-20V, V_{GS}=0V,Tvj=25C	I_{GSS}		1	+/-200	nA
Drain source leakage current	V_{DS}=V_{GS}=20V, Tvj=25C Tvj=150C Tvj=175C	I_{DSS}			25 1 5	µA mA mA

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders

gfs	Vgs=10V, I_D=0.5I_{D25}		60	97		S
$t_{d(on)}$ t_r $t_{d(off)}$ t_f	Ic=120A,V_{DS}=0.5VDSS,V_{GS}=10 V Rge=3.3Ω,L=30nH Tvj=25C			50 60 150 90		ns ns Ns ns
Stray Module inductance		$L_{\sigma ce}$		30		nH
Terminal-chip resistance		R_c		1.0		mΩ

Source –Drain Diode characteristics

			TYP	MAX	
DC Forward Diode Current Is	T_c=25C V_{GS}=0V	I_s		400	A
Repetitive forward current		Ism		800	A
	I_F=I_S, V_{GS}=0V t_P=300µsec, duty cycle=2%	V_{SD}		1.5	V
Peak reverse recovery current	If=50A, -di/dt=100A/µsec V_R=50V,Vgs=0V,Tvj=25C	I_{rm}	12		A
Reverse recovery time	If=50A, -di/dt=100A/µsec Vr=50V,Vgs=0V,Tvj=25C	trr		300	ns
Recovered charge	If=50A, -di/dt=100A/µsec Vr=50V,Vgs=0V,Tvj=25C	Qrm	0.8		µC

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders

Thermal Properties			Min	Typ	Max	
Thermal resistance junction to case	Igbt Diode	$R_{\theta J-C}$			0.09 0.11	K/W
Thermal resistance case to heatsink		$R_{\theta C-hs}$		0.03		K/W
Maximum junction temperature		Tvj			175	C
Maximum operating temperature		Top	-55		175	C
Storage Temperature		Tstg	-55		175	C

Fig. 1. Output Characteristics
@ 25°C

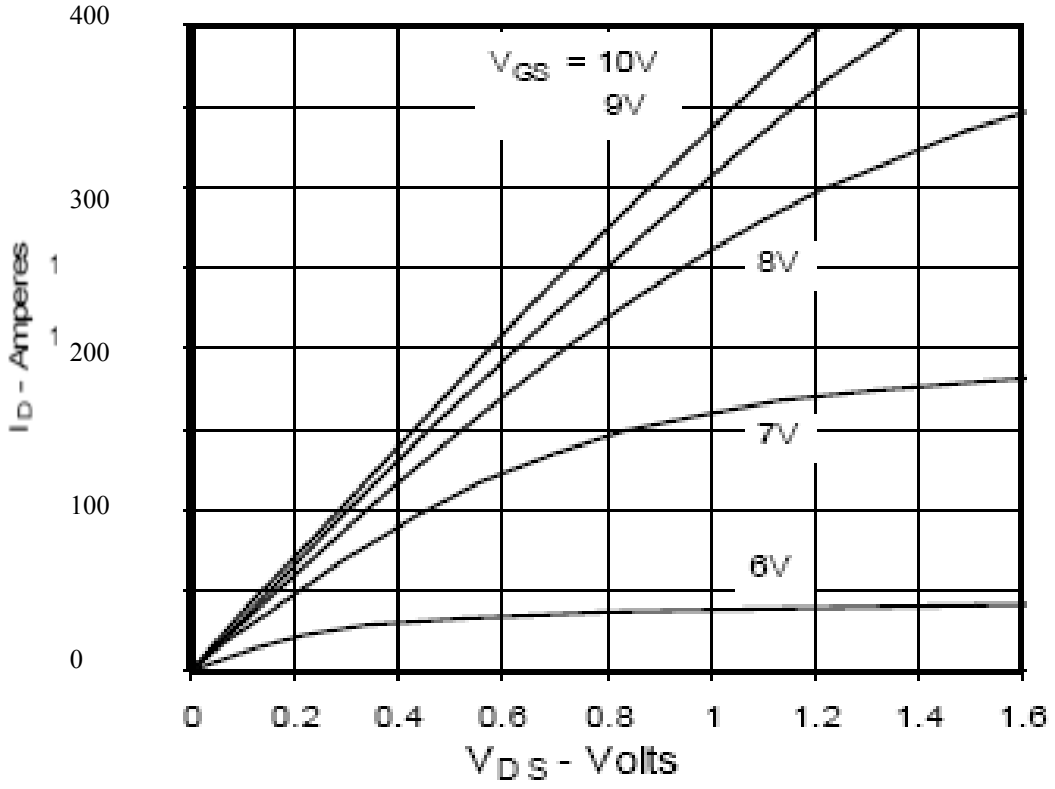

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders

Fig. 2. Extended Output Characteristics
@ 25°C

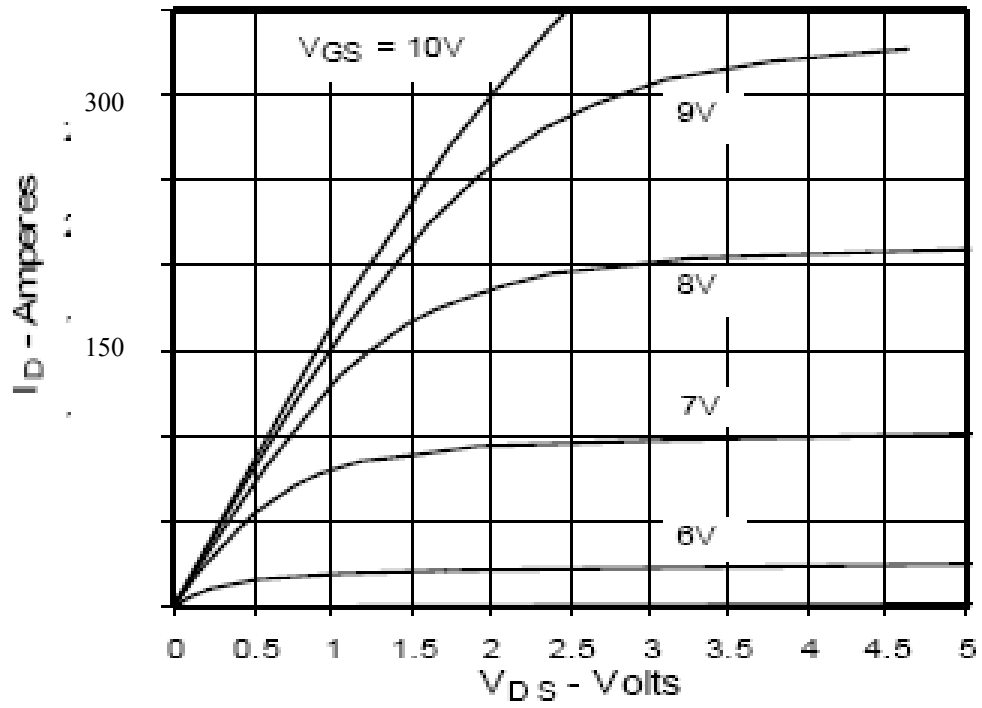

Fig. 3. Output Characteristics
@ 150°C

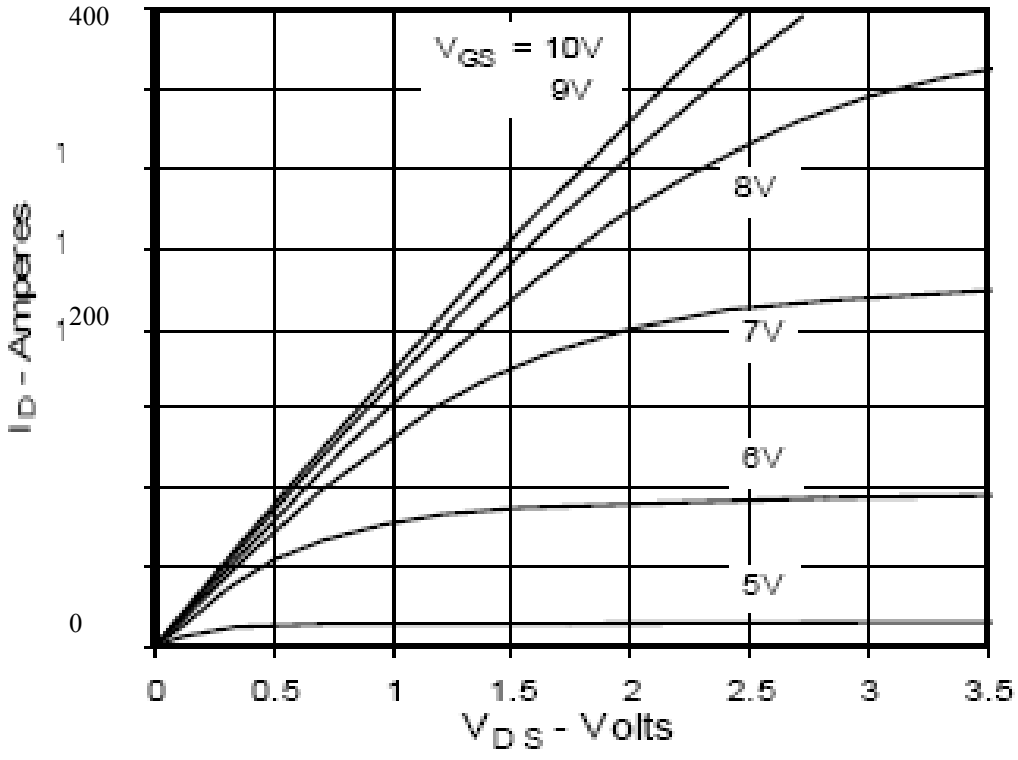

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders

Fig. 4. $R_{DS(on)}$ Normalized to 0.5 I_{D25} Value vs. Junction Temperature

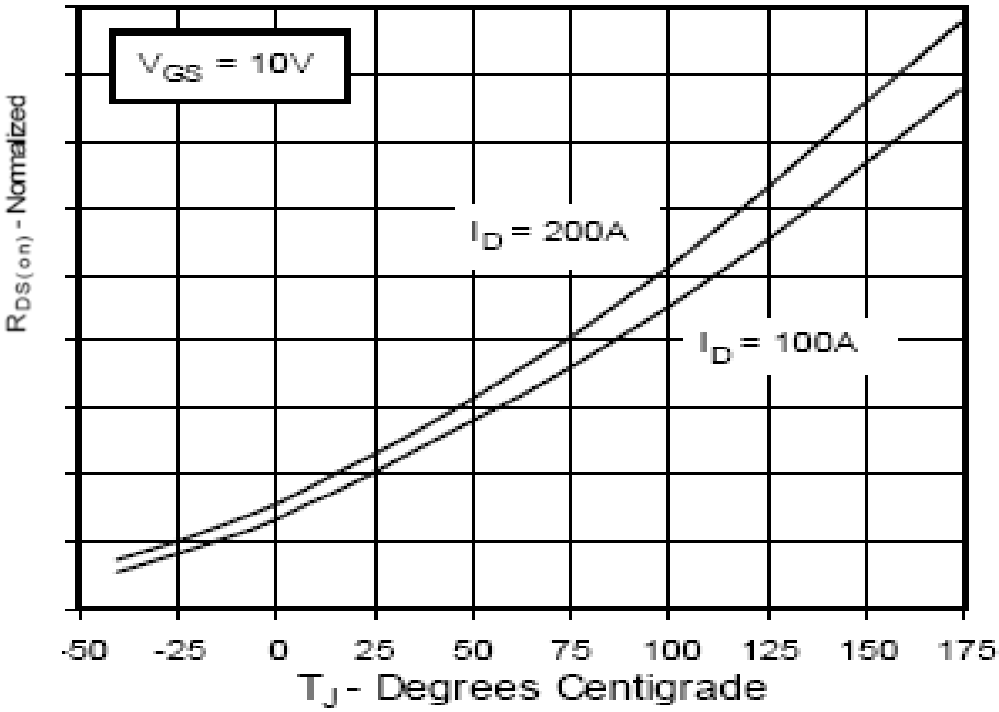

Fig. 5. $R_{DS(on)}$ Normalized to 0.5 I_{D25} Value vs. Drain Current

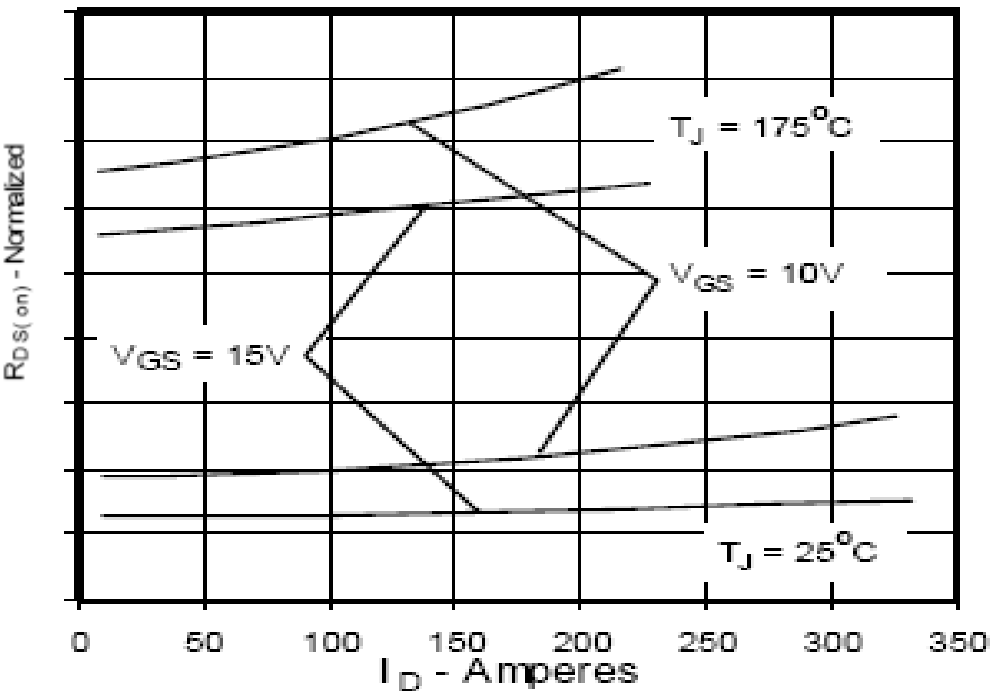

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders

Fig. 6. Drain Current vs. Case Temperature

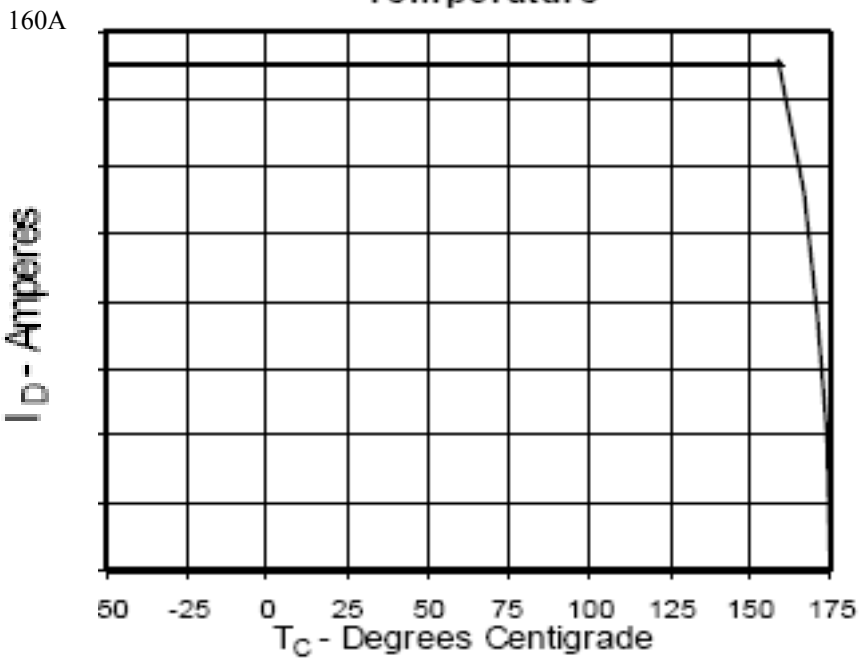

Fig. 7. Input Admittance

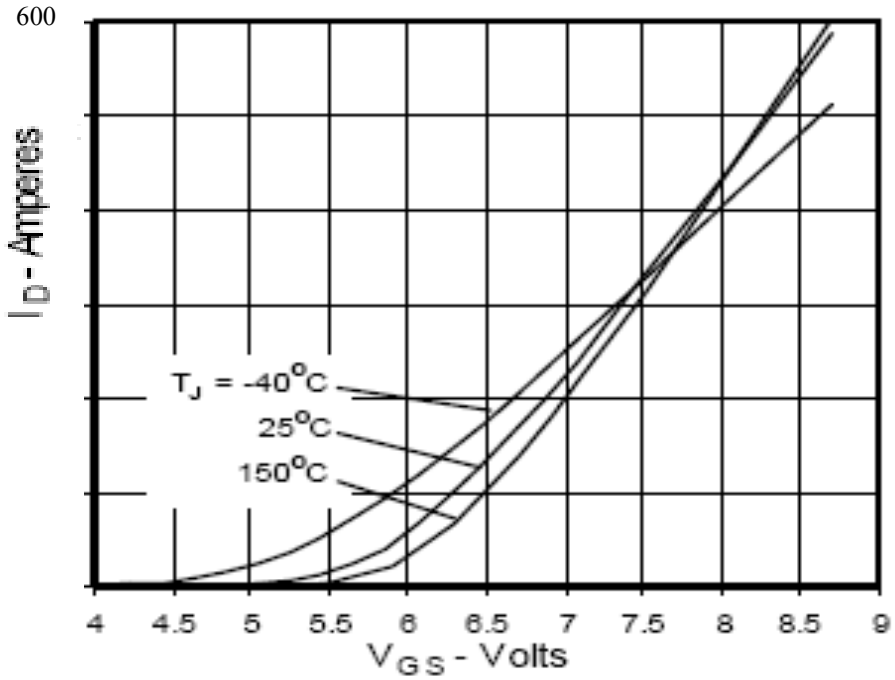

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders

Fig. 8. Transconductance

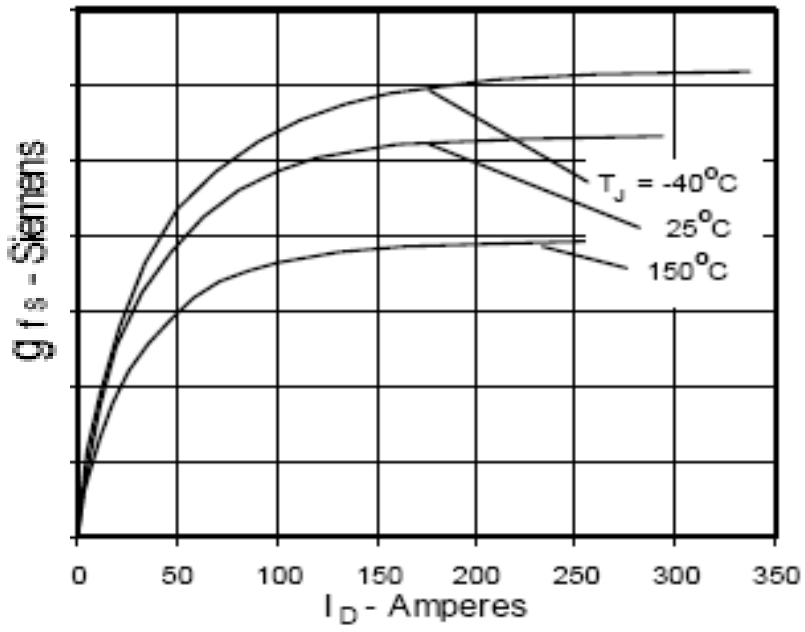

Fig. 9. Source Current vs. Source-To-Drain Voltage

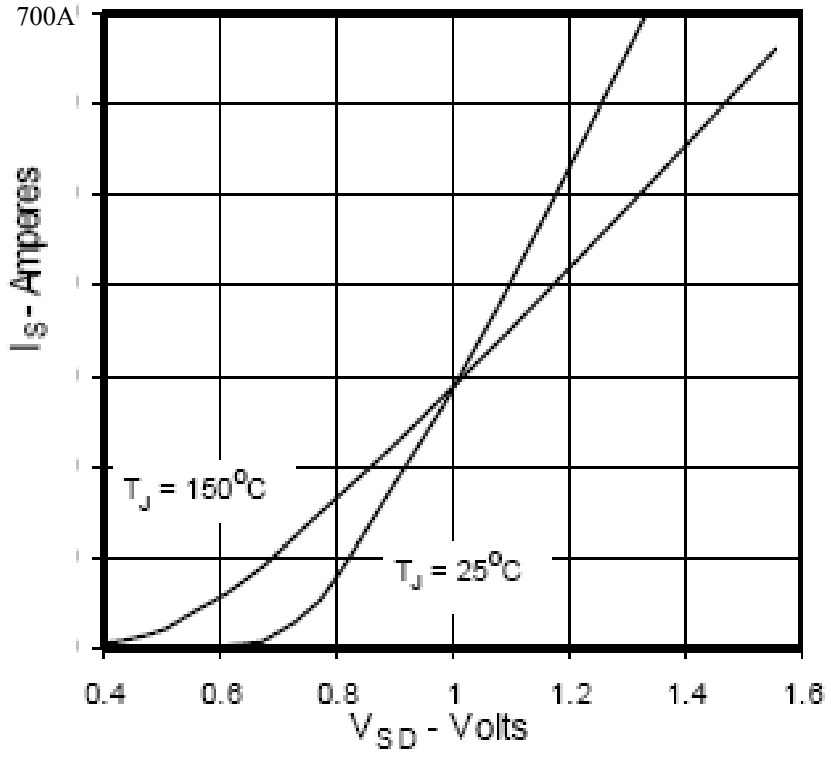

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders

Fig. 10. Gate Charge

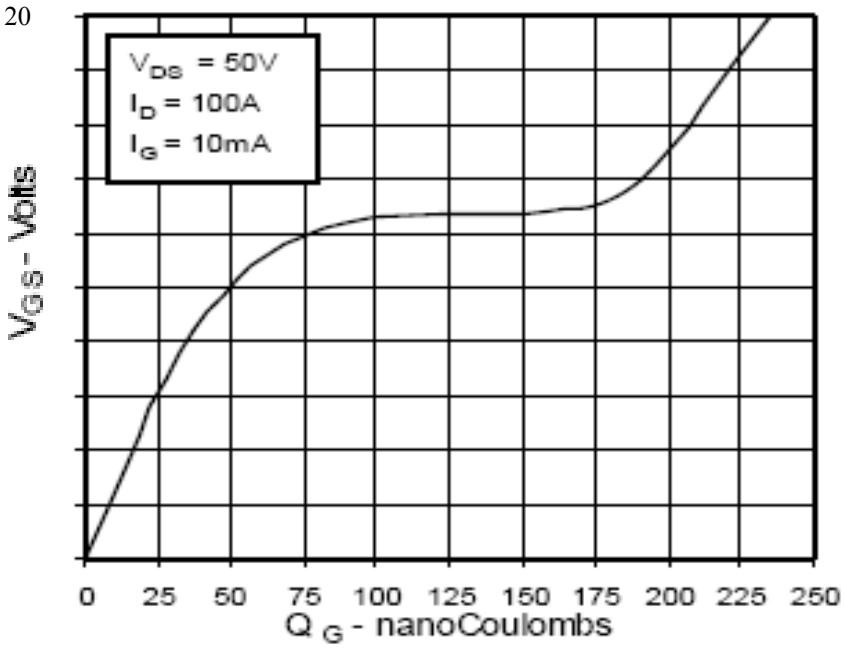

Fig. 11. Capacitance

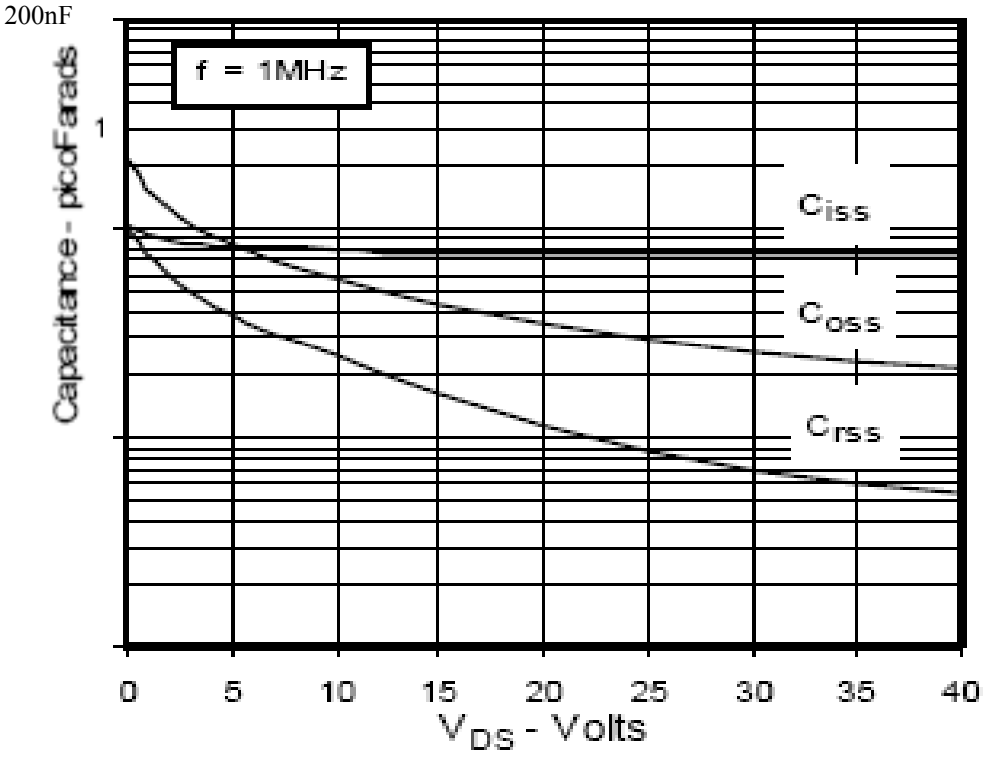

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders

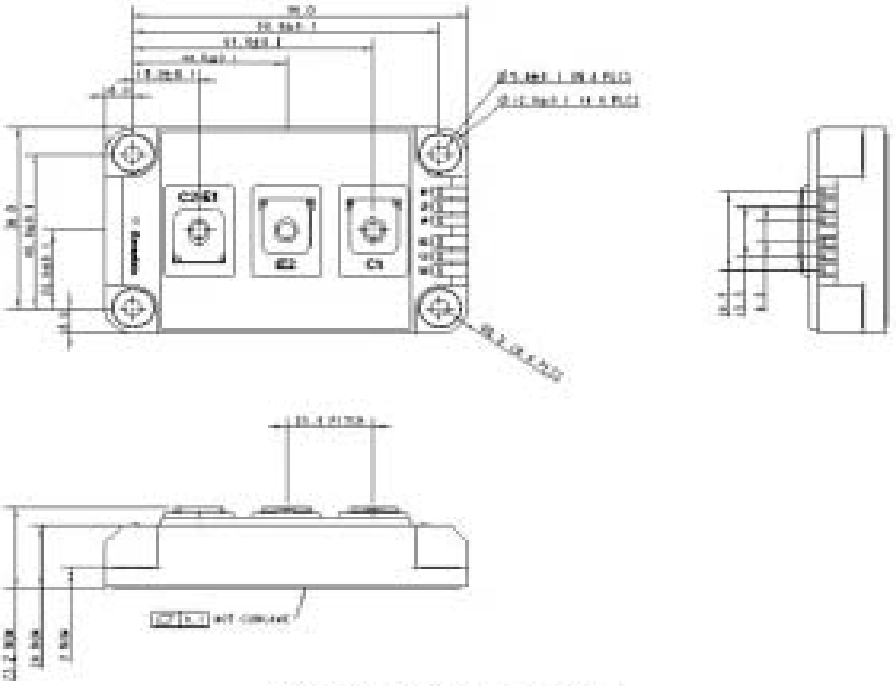

All dimensions in mm

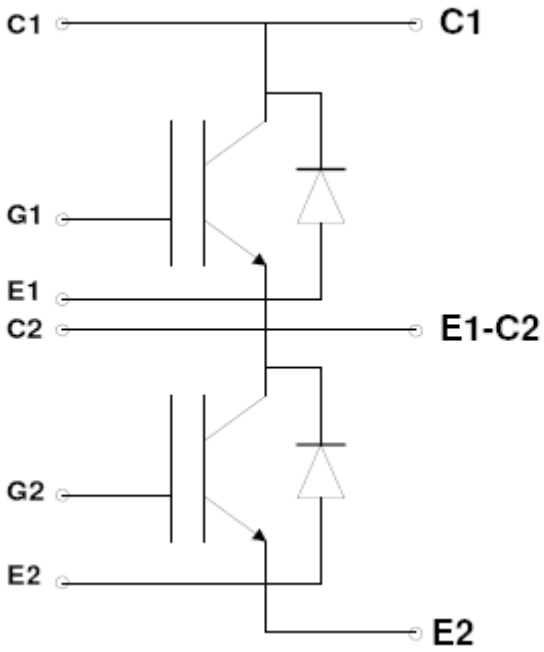

CIRCUIT DIAGRAM

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders