
- **Provides System Clock Solution for Pentium™/82430X/82430VX and Pentium Pro 82440FX Chipsets**
- **Four Host-Clock Outputs With Programmable Frequency (50 MHz, 60 MHz and 66 MHz)**
- **Six PCI Clock Outputs at Half-CPU Frequency**
- **One 48-MHz Universal Serial Bus (USB) Clock Output**
- **Three 14.318-MHz Reference Clock Outputs**
- **All Output Clock Frequencies Derived From a Single 14.31818-MHz Crystal Input**
- **LVTTL-Compatible Inputs and Outputs**
- **Internal Loop Filters for Phase-Locked Loops Eliminate the Need for External Components**
- **Operates at 3.3 V_{CC}**
- **Packaged in Plastic Small-Outline Package**

DW PACKAGE
(TOP VIEW)

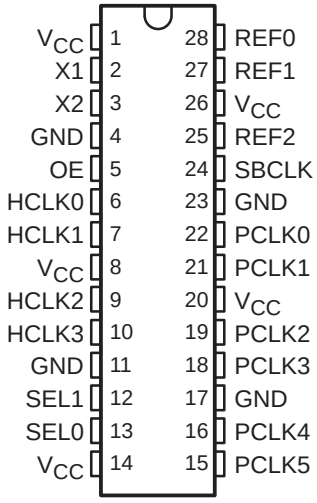

description

The CDC9842 is a high-performance clock synthesizer/driver that generates the system clocks necessary to support Pentium™/82430X/82430VX and Pentium Pro 82440FX chipsets. Four host-clock outputs (HCLKn) are programmable to one of three frequencies (50 MHz, 60 MHz, or 66 MHz) via the SEL0 and SEL1 control inputs. Six PCI-clock outputs (PCLKn) are half the frequency of CPU clock outputs and are delayed 1 ns to 4 ns from the rising edge of the CPU clock. In addition, a universal serial bus (USB) clock output at 48 MHz (SBCLK) and three 14.318-MHz reference clock outputs (REF0, REF1, REF2) are provided.

All output frequencies are generated from a 14.318-MHZ crystal input. A reference clock can be provided at the X1 input instead of a crystal input.

Two phase-locked loops (PLLs) are used to generate the host clock frequency and the 48-MHz clock frequency. On-chip loop filters and internal feedback eliminate the need for external components. The PCI-clock frequency is derived directly from the host-clock frequency. The PLL circuit can be bypassed in the TEST mode (i.e., SEL0 = SEL1 = H) to distribute a test clock provided at the X1 input.

The host- and PCI-clock outputs provide low-skew/low-jitter clock signals for reliable clock operation. All outputs are 3 state and are enabled via OE.

Because the CDC9842 is based on PLL circuitry, it requires a stabilization time to achieve phase-lock of the PLL. This stabilization time is required following power up and application of a fixed-frequency, fixed-phase signal at the X1 input, as well as following any changes to the OE or SELn inputs.

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

Pentium is a trademark of Intel Corporation.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.


Copyright © 1996, Texas Instruments Incorporated

FUNCTION TABLE

OE	SEL0	SEL1	X1	HCLKn	PCLKn	REFn	SBCLK
L	X	X	14.318 MHz	Hi-Z	Hi-Z	Hi-Z	Hi-Z
H	L	L	14.318 MHz	50 MHz	25 MHz	14.318 MHz	48 MHz
H	L	H	14.318 MHz	60 MHz	30 MHz	14.318 MHz	48 MHz
H	H	L	14.318 MHz	66 MHz	33 MHz	14.318 MHz	48 MHz
H	H	H	TCLK†	TCLK/2	TCLK/4	TCLK	TCLK/4

† TCLK is a test-clock input at the X1 input during test mode.

functional block diagram

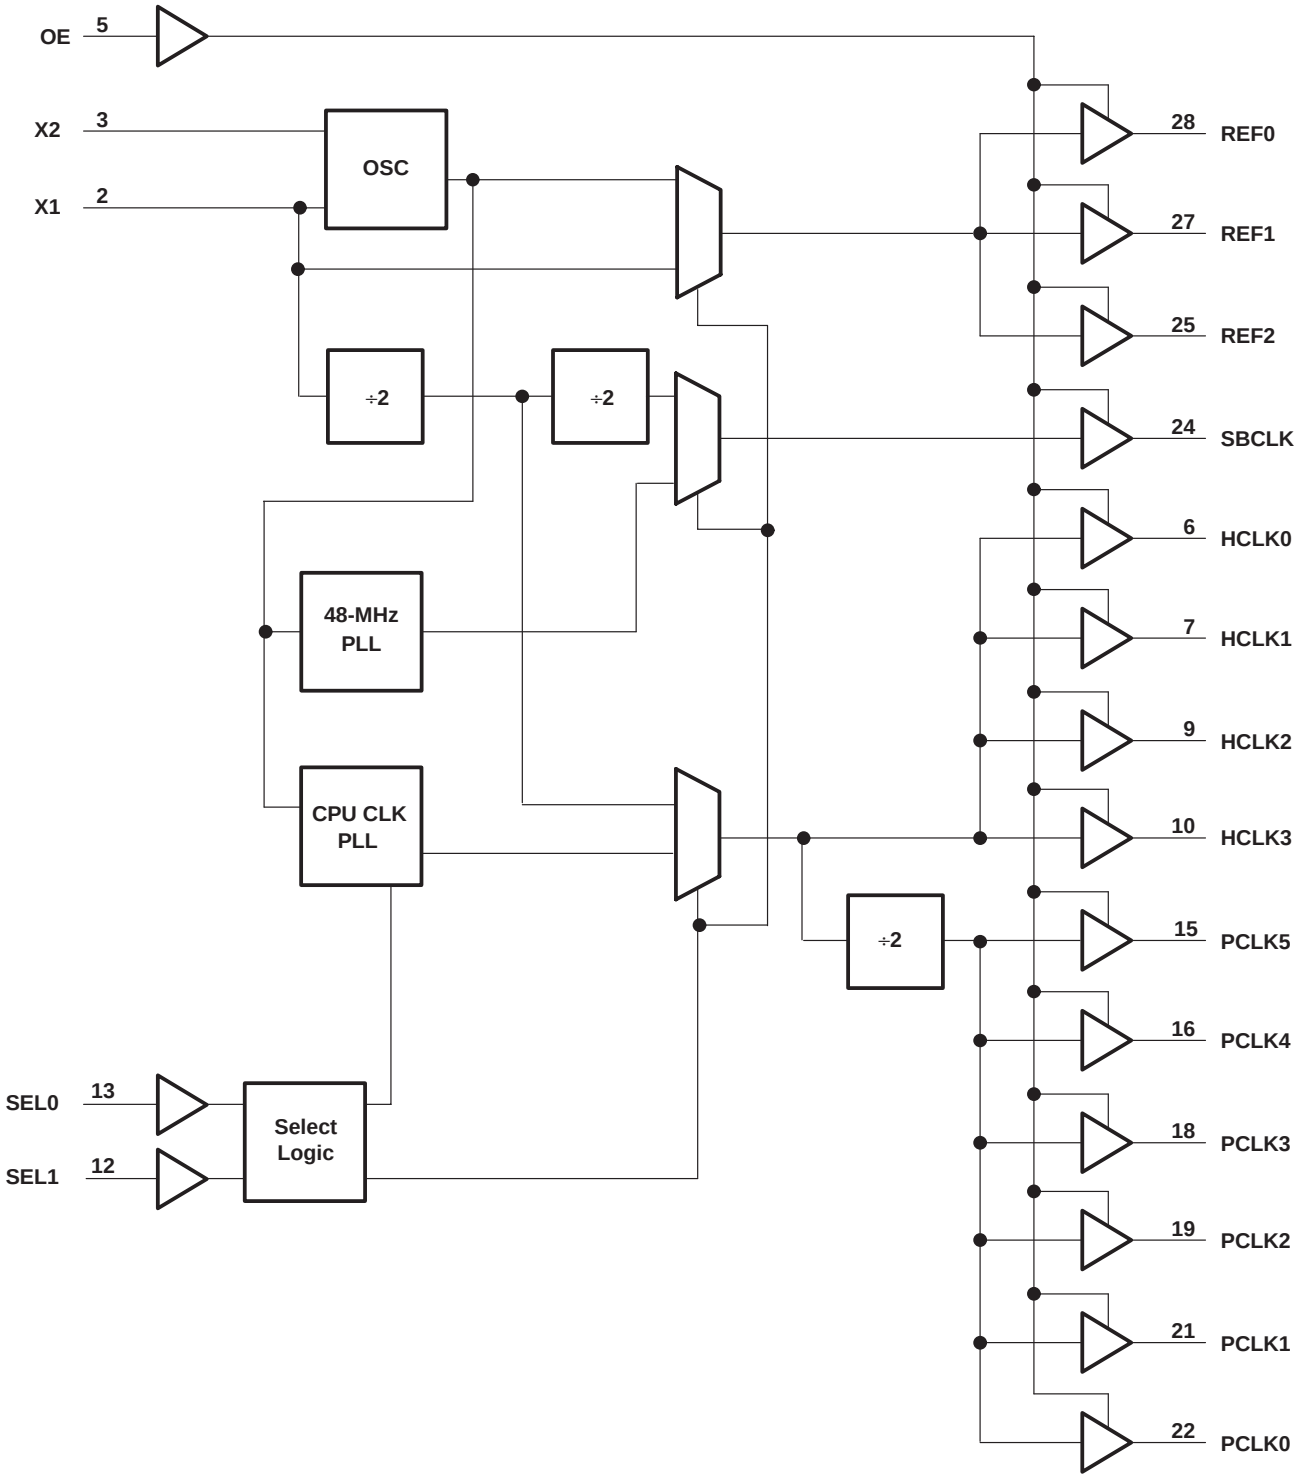

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

Supply voltage range, V_{CC} . . . . . –0.5 V to 4.6 V
Input voltage range, V_I . . . . . –0.5 V to 4.6 V
Voltage range applied to any output in the high-impedance state or power-off state,
V_O (see Note 1) . . . . . –0.5 V to V_{CC} + 0.5 V
Current into any output in the low state, I_O . . . . . 16 mA
Input clamp current, I_{IK} (V_I < 0) . . . . . –18 mA
Output clamp current, I_{OK} (V_O < 0) . . . . . –50 mA
Maximum power dissipation at T_A = 55°C (in still air) (see Note 2) . . . . . 1.2 W
Storage temperature range, T_{stg} . . . . . –65°C to 150°C

† Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTES: 1. The input and output negative-voltage ratings may be exceeded if the input and output clamp-current ratings are observed.
2. The maximum package power dissipation is calculated using a junction temperature of 150°C and a board trace length of 750 mils. For more information, refer to the *Package Thermal Considerations* application note in the *ABT Advanced BiCMOS Technology Data Book*, literature number SCBD002.

recommended operating conditions (see Note 3)

		MIN	MAX	UNIT
V_{CC}	Supply voltage	3.135	3.6	V
V_{IH}	High-level input voltage	2		V
V_{IL}	Low-level input voltage		0.8	V
V_I	Input voltage	0	V_{CC}	V
I_{OH}	High-level output current		–8	mA
I_{OL}	Low-level output current		8	mA
T_A	Operating free-air temperature	0	70	°C

NOTE 3: Unused inputs must be held high or low to prevent them from floating.

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS			T_A = 25°C			UNIT
				MIN	TYP‡	MAX	
V_{IK}	V_{CC} = 3.135 V,	I_I = –18 mA				–1.2	V
V_{OH}	V_{CC} = 3.135 V,	I_{OH} = –8 mA		2.5			V
V_{OL}	V_{CC} = 3.135 V,	I_{OL} = 8 mA				0.4	V
I_I	V_{CC} = 3.6 V,	V_I = V_{CC} or GND				±1	µA
I_{OZ}	V_{CC} = 3.6 V,	V_O = V_{CC} or GND					µA
I_{CC}	V_{CC} = 3.6 V, V_I = V_{CC} or GND	I_O = 0,	Outputs enabled§			50	mA
			Outputs disabled			1	mA
C_i	V_I = V_{CC} or GND				6		pF
C_o	V_O = V_{CC} or GND				6		pF

‡ All typical values are at V_{CC} = 3.3 V.
§ Device in normal operating mode with no load on outputs

timing requirements over recommended ranges of supply voltage and operating free-air temperature

		MIN	MAX	UNIT
Stabilization time†	After SEL1, SEL0		5	ms
	After OE↑		5	
	After power up		5	


† Time required for the integrated PLL circuit to obtain phase lock of its feedback signal to its reference signal. In order for phase lock to be obtained, a fixed-frequency, fixed-phase reference signal must be present at X1. Until phase lock is obtained, the specifications for propagation delay and skew parameters given in the switching characteristics table are not applicable.

switching characteristics (see Figures 1 and 2)

PARAMETER	FROM (INPUT)	TO (OUTPUT)		V_{CC} = 3.135 V to 3.6 V, T_A = 0°C to 70°C		UNIT
				MIN	MAX	
t_{skew}‡		HCLKn			200	ps
		PCLKn			400	ps
Offset‡	HCLKn	PCLKn		1	4	ns
Jitter‡		HCKLn			±250	ps
		PCLKn			±350	ps
Duty cycle		Any output		45%	55%	
t_c‡		HCKLn	SEL0 = L, SEL1 = L	20		ns
			SEL0 = L, SEL1 = H	16.7		ns
			SEL0 = H, SEL1 = L	15		ns
		PCLKn	SEL0 = L, SEL1 = L	40		ns
			SEL0 = L, SEL1 = H	33.3		ns
			SEL0 = H, SEL1 = L	30		ns
t_r‡§		HCLKn			2	ns
		PCKLn				
t_f‡§		HCKLn			2	ns
		PCLKn				

‡ Specifications are applicable only after the PLL stabilization time has elapsed.
§ Rise and fall times are characterized using the load circuits shown in Figure 1.

PARAMETER MEASUREMENT INFORMATION
CLOCK DRIVER CIRCUITS

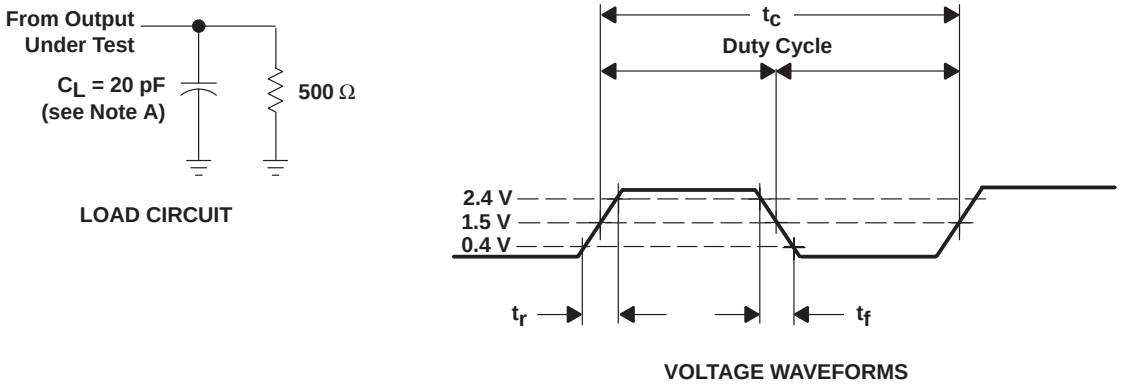

NOTES: A. C_L includes probe and jig capacitance.
B. All input pulses are supplied by generators having the following characteristics: PRR ≤ 10 MHz, Z_O = 50 Ω, t_r ≤ 2.5 ns,t_f ≤ 2.5 ns.
C. The outputs are measured one at a time with one transition per measurement.

Figure 1. Load Circuit and Voltage Waveforms

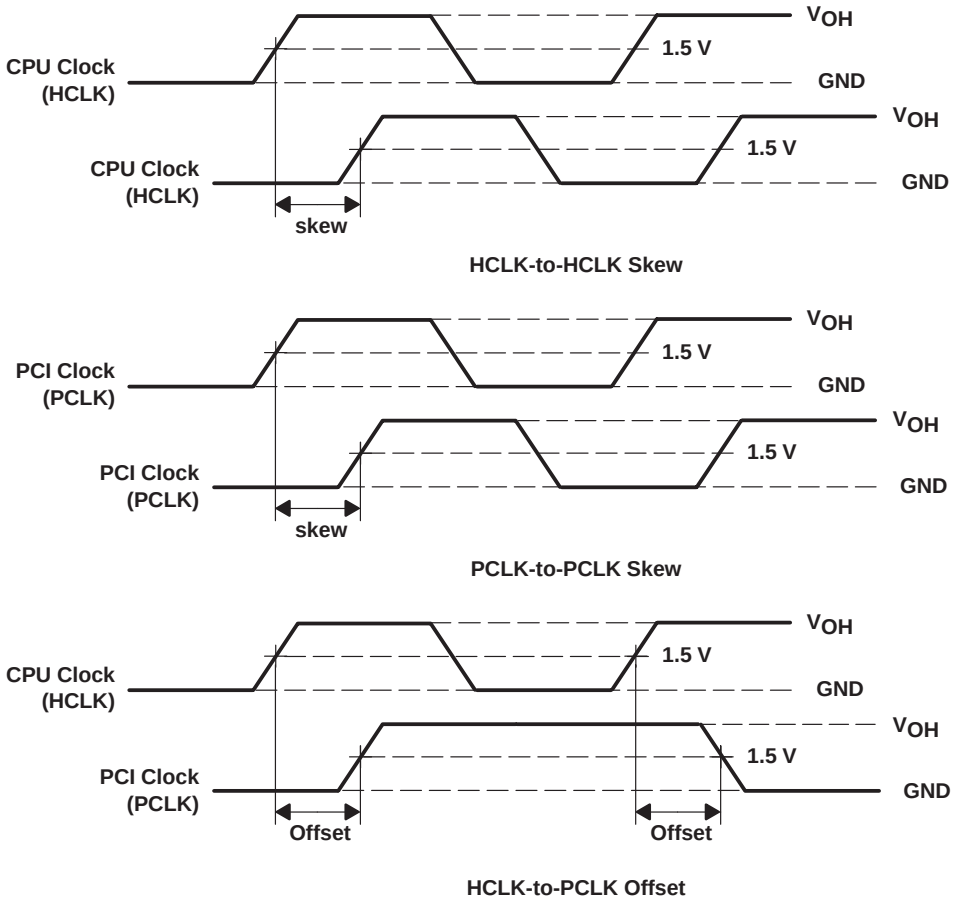


Figure 2. Waveforms for Calculation of t_{skew} and Offset

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products		**Applications**	
Amplifiers	amplifier.ti.com	Audio	www.ti.com/audio
Data Converters	dataconverter.ti.com	Automotive	www.ti.com/automotive
DSP	dsp.ti.com	Broadband	www.ti.com/broadband
Interface	interface.ti.com	Digital Control	www.ti.com/digitalcontrol
Logic	logic.ti.com	Military	www.ti.com/military
Power Mgmt	power.ti.com	Optical Networking	www.ti.com/opticalnetwork
Microcontrollers	microcontroller.ti.com	Security	www.ti.com/security
Low Power Wireless	www.ti.com/lpw	Telephony	www.ti.com/telephony
		Video & Imaging	www.ti.com/video
		Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments
Post Office Box 655303 Dallas, Texas 75265

Copyright © 2007, Texas Instruments Incorporated