
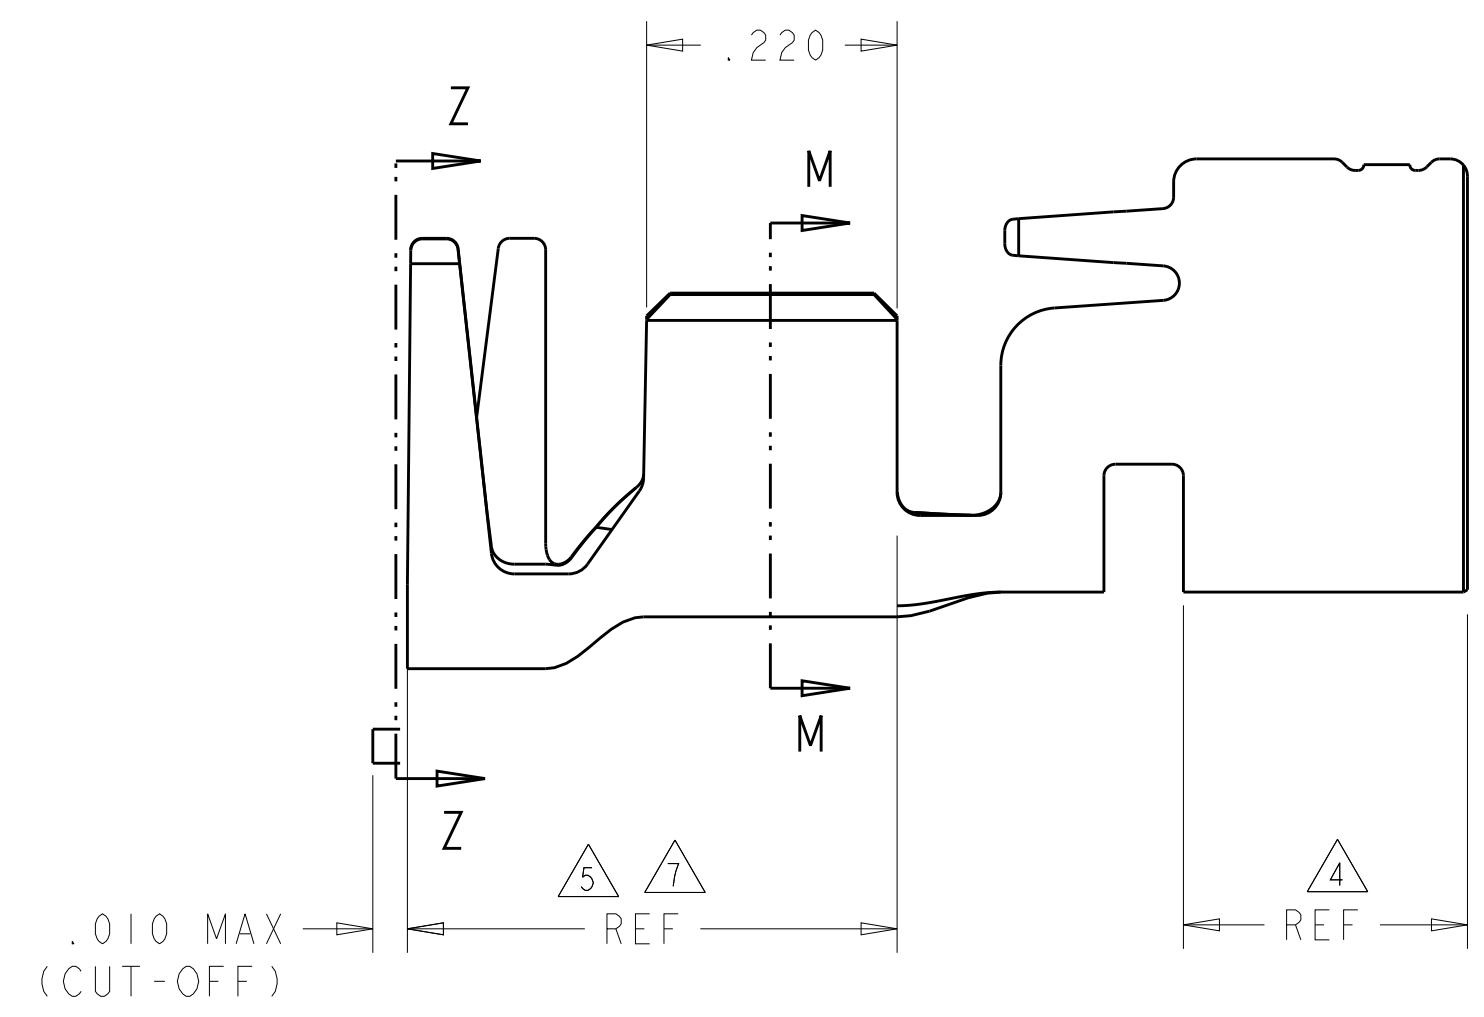


D


C

B


A

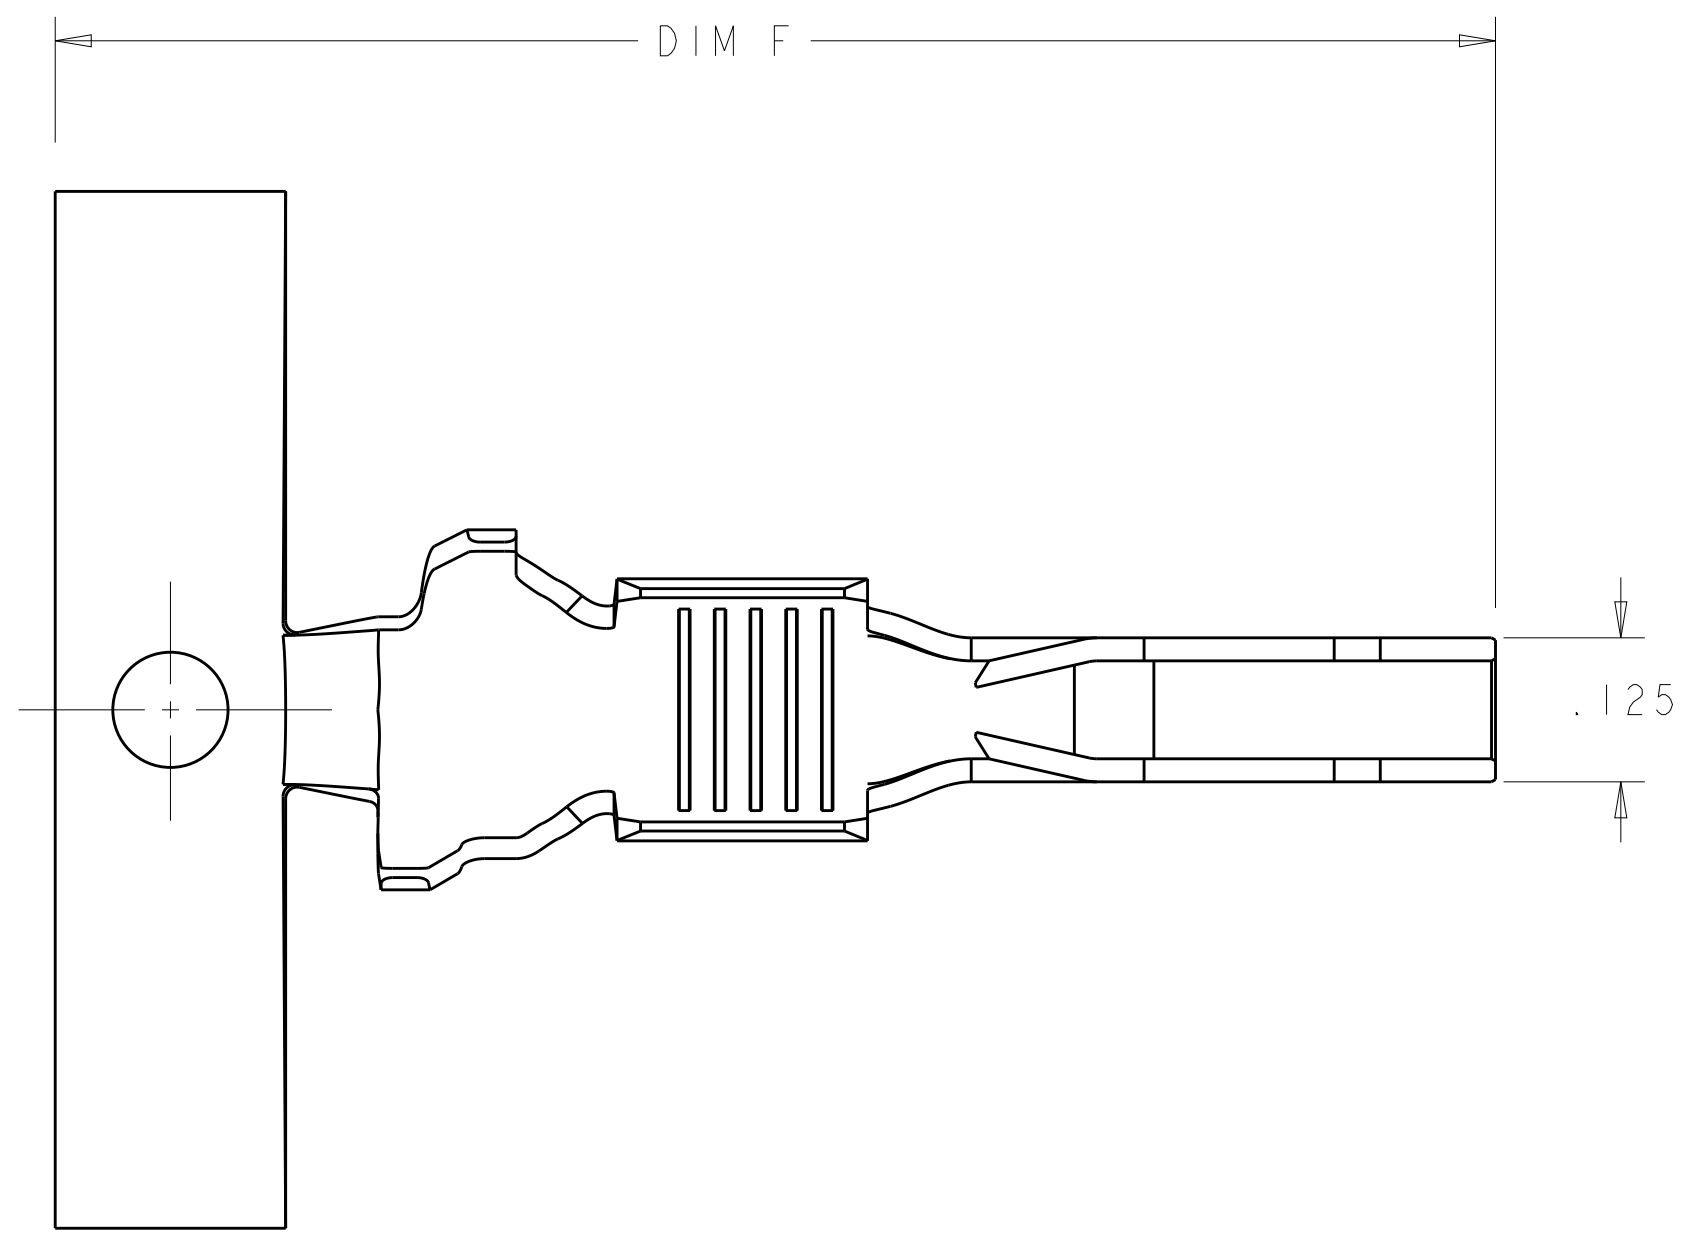

1. WIRE RANGE: 8 - 10 AWG
2. INSULATION RANGE: .176 - .272
- 3 FINISH: NICKEL PLATE ALL OVER 0.000050 MIN THICK
- 4 FINISH: NOBLE METAL PLATING ON CONTACT FUNCTIONAL AREA
- 5 FINISH: TIN IN AREA INDICATED 0.000050 - 0.000100 THK.
6. MATERIAL: HIGH CONDUCTIVITY COPPER ALLOY
- 7 FINISH: TIN-LEAD IN AREA INDICATED 0.000050 - 0.000100 THK.

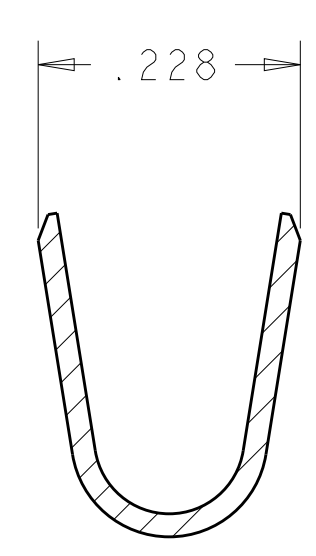

SECTION M-M

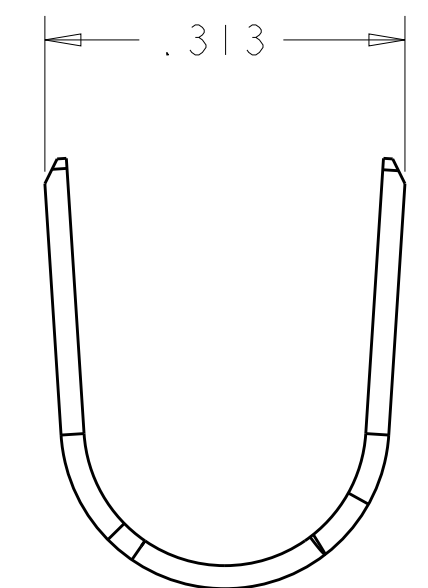

SECTION Z-Z

1.200	3 4 5	STD	1-1600960-8
1.250	3 4 5	MFBL	1-1600960-7
1.200	3 4 7	STD	1-1600960-0
1.250	3 4 7	MFBL	1600960-9
DIM F REF	FINISH	DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION
IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION
SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS:
INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±
1 PLC	±.10
2 PLC	±.005
3 PLC	±.0020
4 PLC	±
ANGLES	±
FINISH	

MATERIAL

SEE NOTES

DWN

19 JAN 2005

CHK

R. GRZYBOWSKI

APVD

P. D'AMATO

PRODUCT SPEC

108-2157

APPLICATION SPEC

114-13112

WEIGHT

-

CUSTOMER DRAWING

tyco
Electronics

Tyco Electronics
Harrisburg, PA 17105-3608

NAME

VERTICAL BULKHEAD CABLE RECEPTACLE
POWER CONTACT
MULTI-BEAM XL

SIZE

A2

CAGE CODE

00779

DRAWING NO

1600960

RESTRICTED TO

-

SCALE

8:1

SHEET

1

OF

1

REV

BI