

Keysight Technologies

Serial Bus Options for InfiniiVision X-Series Oscilloscopes

Data Sheet



Introduction

Serial buses are pervasive in today's digital designs and are used for a variety of purposes including on-board chip-to-chip communication, CPU to peripheral control, as well as for remote sensor data transfer and control.

Without intelligent oscilloscope serial bus triggering and protocol decode, it can be difficult to debug these buses and correlate data transfers with other mixed signal interactions in your system. Keysight Technologies, Inc. InfiniiVision X-Series oscilloscopes (DSOs) and mixed-signal oscilloscopes (MSOs) offer optional integrated serial bus triggering and hardware-based protocol decoding solutions that give you the tools you need to accelerate debug of your designs that include serial bus communication.

Supported Protocols and Features

- I²C
- SPI
- RS232/UART
- CAN
- CAN FD (except 2000 X-Series)
- CAN-dbc symbolic decode and trigger (except 2000 X-Series)
- LIN
- LIN-ldf symbolic decode and trigger (except 2000 X-Series)
- SENT (3000T, 4000 and 6000 X-Series only)
- CXPI (3000T and 4000 X-Series only)
- FlexRay (except 2000 X-Series)
- USB 2.0 low- and full-speed (4000 and 6000 X-Series)
- USB 2.0 hi-speed (4000 and 6000 X-Series only)
- USB 2.0 signal quality (4000 and 6000 X-Series only)
- I²S (except 2000 X-Series)
- MIL-STD 1553 (except 2000 X-Series)
- ARINC 429 (except 2000 X-Series)
- Hardware-based decoding
- Multi-bus analysis (except 2000 X-Series)
- Automatic search and navigation
- Compatibility with segmented memory acquisition
- Eye-diagram mask files available for CAN, FlexRay, MIL-STD 1553, and ARINC 429 (requires DS0X2MASK/DS0X3MASK/DS0X4MASK/DS0X6MASK mask test option)
- FlexRay physical layer conformance test software (except 2000 X-Series)

Hardware-Based Decoding

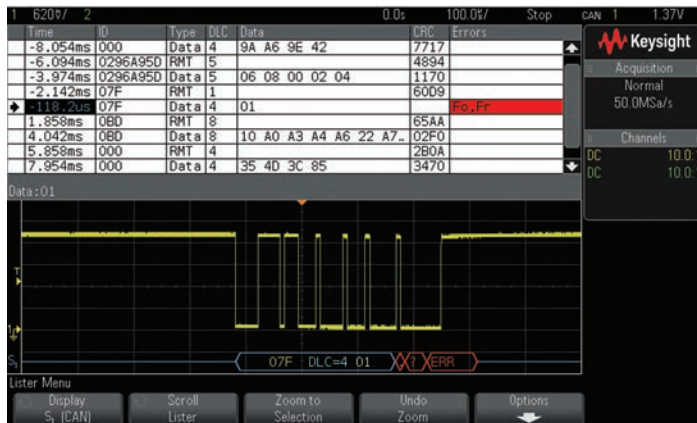


Figure 1. Hardware-based decoding quickly reveals serial communication errors.

Keysight's InfiniiVision Series oscilloscopes are the industry's only scopes to use hardware-based decoding. Most other vendor's scopes with serial bus triggering and protocol decode, use software post-processing techniques to decode serial packets/frames. With these software techniques, waveform- and decode-update rates tend to be slow (sometimes seconds per update.) That's especially true when using deep memory, which is often required to capture multiple packetized serial bus signals. And when analyzing multiple serial buses simultaneously, software techniques can make decode update rates even slower.

Faster decoding with hardware-based technology enhances scope usability, and more importantly, the probability of capturing infrequent serial communication errors. Figure 1 shows an example of a Keysight InfiniiVision X-Series scope capturing a random and infrequent CAN error frame. The upper half of the scope's display shows the decoded data in a "Lister" format, along with a time-correlated decode trace shown below the waveform.

Symbolic Trigger and Decode

With the DSOXT3AUTO, DSOX4AUTO or DSOX6AUTO option licensed on a 3000T, 4000 or 6000 X-Series oscilloscope, you can import a .dbc file that defines your multi-node CAN network. The oscilloscope can then trigger on and decode the CAN bus symbolically as shown in Figure 2. LIN symbolic trigger and decode is also supported on the 3000T, 4000, and 6000 X-Series oscilloscopes by importing an industry-standard .ldf file.

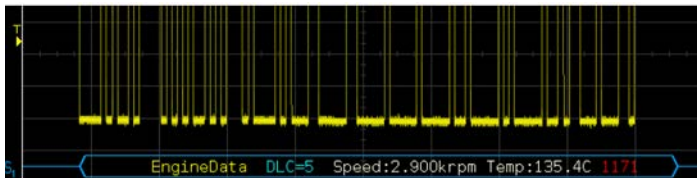


Figure 2. Symbolically decoding the CAN bus.

Automatic Search and Navigation

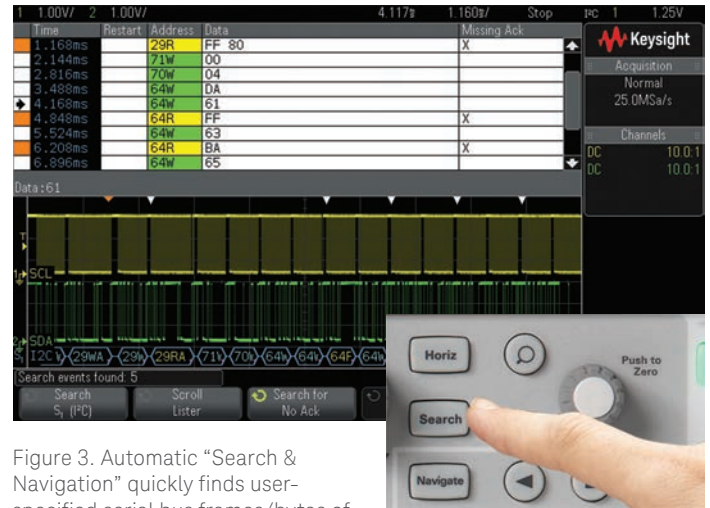


Figure 3. Automatic "Search & Navigation" quickly finds user-specified serial bus frames/bytes of interest.

After capturing a long record of serial bus communication using the InfiniiVision scope's MegaZoom deep memory, you can easily perform a search operation based on specific criteria that you enter. Then, you can quickly navigate to bytes/frames of serial data that satisfy the entered search criteria. Figure 3 shows an example of searching on captured I2C data to find all occurrences of Read or Write operations with "No Ack." In this case, the scope found five occurrences of data transfers with "No Ack," and marked each occurrence with a white triangle to show where in time they happened relative to the captured waveform. Navigating and zooming-in on each marked byte/frame is quick and easy using the scope's front panel navigation keys. Search and Navigation not available for DSOXT3CXPI/DSOX4CXPI.

Multi-bus Analysis



Figure 4. An interleaved “Lister” makes it easier to time-correlate activity between two decoded serial buses.

Many of today’s designs include multiple serial buses. Sometimes it may be necessary to correlate data from one serial bus to another. Keysight’s InfiniiVision 3000, 4000 and 6000 X-Series oscilloscopes can decode two serial buses simultaneously using hardware-based decoding. Plus they are the only scopes on the market that can also display the captured data in a time-interleaved “Lister” display, as shown in Figure 4. In this particular example, the scope has simultaneously decoded and interleaved a CAN and LIN bus in an automotive system.

Using Segmented Memory to Capture Multiple Serial Bus

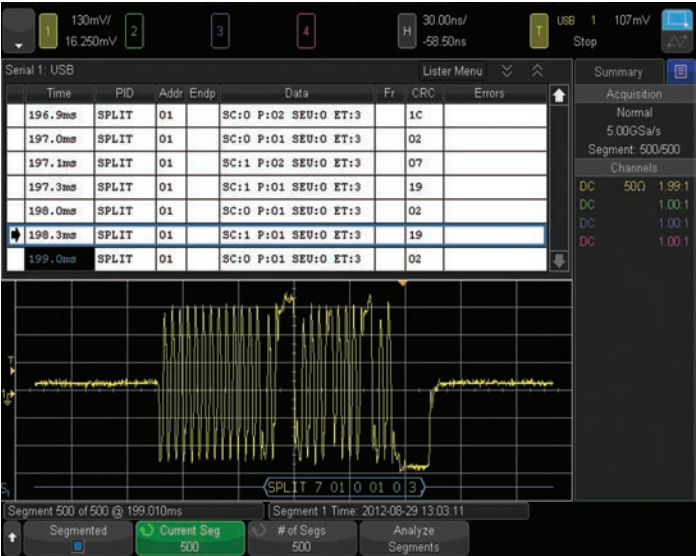


Figure 5. Segmented memory acquisition selectively captures more packets/bytes of serial bus activity.

The segmented memory option for Keysight’s InfiniiVision X-Series oscilloscopes (standard in 3000T, 4000 and 6000 X-Series) can optimize your scope’s memory, letting you capture more packets/frames of serial bus activity. Segmented memory acquisition optimizes the number of packetized serial communication frames that can be captured consecutively. Segmented memory does this by capturing just the selective frames/bytes of interest while ignoring (not digitizing) idle time and other unimportant frames/bytes. Figure 5 shows an example of the oscilloscope capturing 500 consecutive hi-speed USB split packets for a total acquisition time of approximately 200 ms. Capturing this much data using conventional oscilloscope acquisition memory would require 1G bytes of memory.

Keysight’s InfiniiVision X-Series oscilloscopes are the only scopes on the market today that can acquire segments on up to four analog channels of acquisition, and time-correlated segments on digital channels (using an MSO model), along with automatic hardware-based serial bus decoding for each segment. In addition, you can use the scope’s Search and Navigation capability after a segmented memory acquisition has been performed.

Serial Bus Eye-diagram and Pulse Mask Testing

With the addition of the DSOX2MASK, DSOX3MASK, DSOX4MASK or DSOX6MASK mask test option, which can perform over 200,000 pass/fail tests (50,000 on 2000 X-Series) per second, you can perform eye-diagram and pulse mask testing on CAN signals on all InfiniiVision X-Series oscilloscopes. Eye-diagram mask testing on FlexRay, MIL-STD 1553, and ARINC 429 signals can be performed using an InfiniiVision 3000, 4000 or 6000 X-Series oscilloscope. Eye-diagram measurements provide a comprehensive signal quality test of the integrity of your transmitted and received signals. Keysight provides various mask files that you can download at no charge. The mask files are based on published industry mask standards and/or derived from physical layer/electrical specifications.

The following CAN mask files are available:

- 125 kbps – 400 meters
- 250 kbps – 200 meters
- 500 kbps – 10 meters
- 500 kbps – 80 meters
- 800 kbps – 40 meters
- 1000 kbps – 25 meters

Mask files for CAN FD are also available (3000, 4000, and 6000 X-Series only). CAN FD eye-diagrams are based on the first 10 bits of the FD phase from all frames.

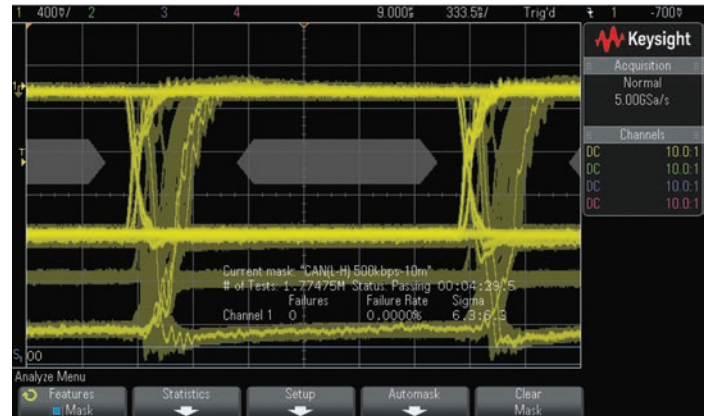


Figure 6. CAN 500 kbps mask test on 10 meter system.

The following FlexRay mask test files are available:

- TP1 standard voltage (10 Mbps only)
- TP1 increased voltage (10 Mbps only)
- TP11 standard voltage (10 Mbps only)
- TP11 increased voltage (10 Mbps only)
- TP4 10 Mbps
- TP4 5 Mbps
- TP4 2.5 Mbps

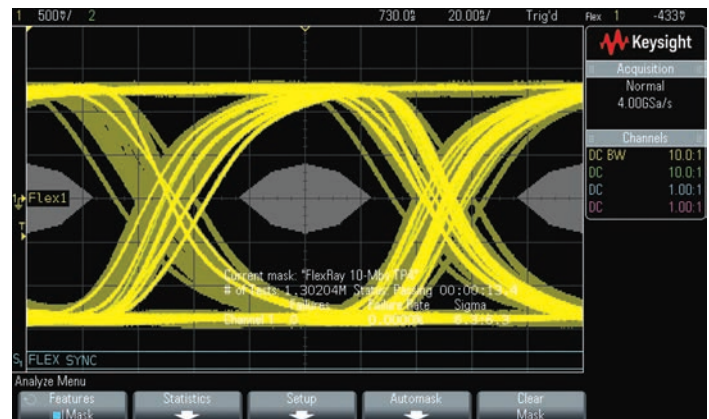


Figure 7. FlexRay TP4 eye-diagram mask test.

The following MIL-STD 1553 mask test files are available:

- System xfrm-coupled Input
- System direct-coupled Input
- BC xfrm-coupled Input
- BC direct-coupled Input
- RT xfrm-coupled Input
- RT direct-coupled Input

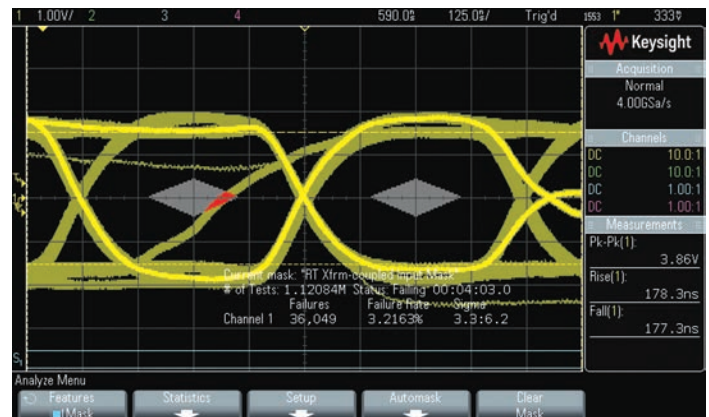


Figure 8. MIL-STD 1553 BC to RT xfrm-coupled input mask test reveals a shifted bit that violates the pass/fail mask.

Serial Bus Eye-diagram and Pulse Mask Testing

The following ARINC 429 mask/pulse test files are available:

- 100 kbps Eye Test
- 100 kbps 1's Pulse Test
- 100 kbps 0's Pulse Test
- 100 kbps Null Level Test
- 12.5 kbps Eye Test
- 12.5 kbps 1's Pulse Test
- 12.5 kbps 0's Pulse Test
- 12.5 kbps Null Level Test

For additional information about eye-diagram mask testing on CAN, FlexRay, MIL-STD 1553, and ARINC 429 signals, refer to the application notes listed at the end of this document.

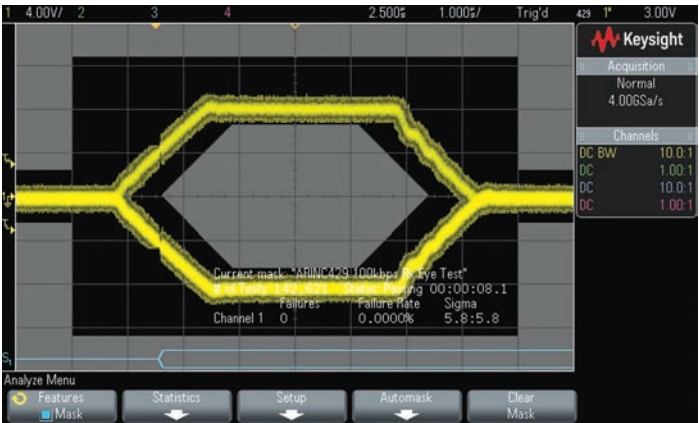


Figure 9. ARINC 429 100 kbps eye-diagram mask test.

Automated Physical Layer Conformance Testing

To perform USB 2.0 signal quality testing based on USB-IF compliance standards, Keysight offers the DSOX4USBSQ or DSOX6USBSQ options on InfiniiVision 4000 or 6000 X-Series oscilloscopes. Figure 10 shows an example of the USB 2.0 real-time eye test. Also included with this option is complete signal quality test report generation in HTML format. To see the complete list of supported tests, refer to the DSOX4USBSQ/DSOX6USBSQ signal quality test option data sheet listed at the end of this document.



Figure 10. USB 2.0 signal quality eye test based on USB-IF physical layer compliance standards.

To perform physical layer conformance testing on the differential FlexRay bus, Keysight provides a PC-based software package that you can download from Keysight's website at no additional charge. If the InfiniiVision X-Series scope is licensed with the FlexRay, mask test, and segmented memory, you can perform automated physical layer tests at either receiver input or transmitter output test points. Figure 10 shows an example of the generated report from a signal integrity voting test on a 10-Mbs isolated "1" pulse. The test report includes comprehensive pass/fail and margin analysis based on published specifications.

Refer to the tables in the Specifications/Characteristics section of this document on page 17 to see the entire list of 33 available FlexRay tests that can be selected and performed using the FlexRay physical layer conformance test software package.

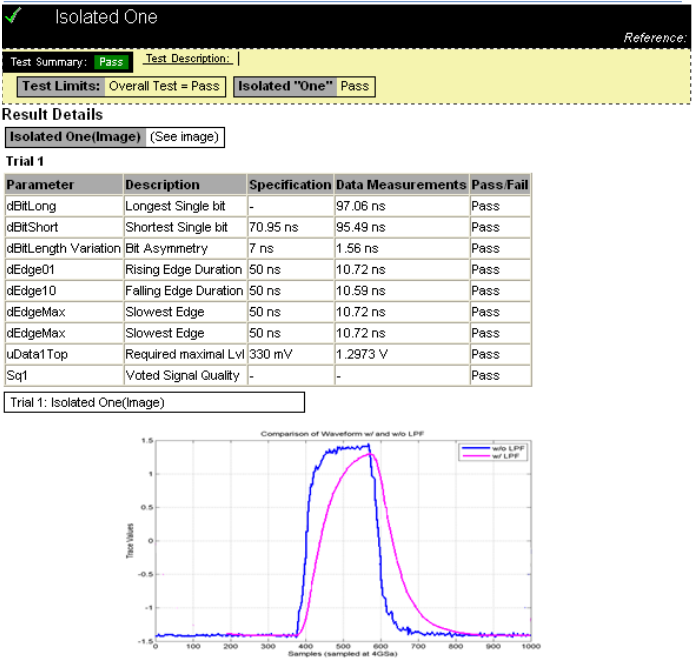


Figure 11. FlexRay signal integrity voting test performed on an isolated "1" bit.

Probing Differential Serial Buses

Many of today’s serial buses are based on differential signaling including USB, CAN, CAN FD, FlexRay, MIL-STD 1553, and ARINC 429. In addition, serial buses based on the RS232/UART protocol are often differential if implemented with RS422 or RS485 output drivers/transceivers. Keysight offers a wide range of differential active probes compatible with the InfiniiVision X-Series oscilloscopes for various bandwidth and dynamic range applications. Table 1 shows the differential probes that Keysight recommends for each of the listed differential serial buses.

Table 1. Recommended probes for differential buses

Differential bus (max bit rate)	N2791A (25-MHz bandwidth)	N2818A ¹ (200-MHz bandwidth)	N2750A (1.5-GHz bandwidth)
CAN (1 Mbps)	X	X	
CAN FD (10 Mbps data phase)		X	
FlexRay (10 Mbps)		X	
MIL-STD 1553 (1 Mbps)	X	X	
ARINC 429 (100 kbps)	X	X	
RS422/RS485 (10 Mbps)	X	X	
Hi-speed USB (480 Mbps)			X

1. The N2818A differential probe is not compatible with Keysight’s InfiniiVision 2000 X-Series oscilloscopes.

If you need to connect to DB9-SubD connectors on your differential CAN, CAN FD and/or FlexRay bus, Keysight also offers the CAN/FlexRay DB9 probe head (part number 0960-2926) is shown in the inset picture of Figure 12.

When probing differential signals inside of environmental chambers at extreme temperatures, Keysight offers the N7013A extreme temperature extension kit shown in Figure 13. The N7013A is compatible with the N2791A and N2818A differential probes and can operate in temperatures ranging from -40 degrees to +85 degree Celsius. To learn more about this probing solution, refer the Extreme Temperature Probing Solutions selection guide (publication number 5991-3504EN) listed at the end of this document.

The N2750A differential active probe shown in Figure 14, which is recommended for hi-speed USB 2.0 measurement applications, is based on Keysight’s InfiniiMode technology. With the press of a button, you can quickly toggle between viewing the differential signal, high-side signal, low-side signal, or the common mode signal on the USB 2.0 hi-speed bus without moving probe connections.



Figure 13. The N7013A extreme temperature probing kit for differential probes.




Figure 12. Keysight’s N2818A 200-MHz differential active probe.



Figure 14. Keysight’s N2750A 1.5-GHz InfiniiMode differential active probe.


Specifications/Characteristics

I ² C specifications/characteristics (DSOX2EMBD, DSOX3EMBD, and DSOX4EMBD)	
Clock and data input source	Analog channels 1, 2, 3, or 4
	Digital channels D0 to D15 (3000, 4000 and 6000 X-Series only)
Max clock/data rate	Up to 3.4 Mbps
Triggering	Start condition
	Stop condition
	Missing acknowledge
	Address with no acknowledge
	Restart
	EEPROM data read
	Frame (Start:Addr7:Read:Ack:Data)
	Frame (Start:Addr7:Write:Ack:Data)
	Frame (Start:Addr7:Read:Ack:Data:Ack:Data2)
	Frame (Start:Addr7:Write:Ack:Data:Ack:Data2)
Hardware-based decode	10-bit write
	Data (HEX digits in white)
	Address decode size: 7 bits (excludes R/W bit) or 8 bits (includes R/W bit)
	Read address (HEX digits followed by "R" in yellow)
	Write address (HEX digits followed by "W" in light-blue)
	Restart addresses ("S" in green, followed by HEX digits, followed by "R" or "W")
	Acknowledges (suffixes "A" or "~A" in the same color as the data or address preceding it)
	Idle bus (mid-level bus trace in dark blue)
	Active bus (bi-level bus trace in dark blue)
	Unknown/error bus (bi-level bus trace in red)
Multi-bus analysis	I ² C plus one other serial bus, including another I ² C bus. (3000, 4000 and 6000 X-Series only)

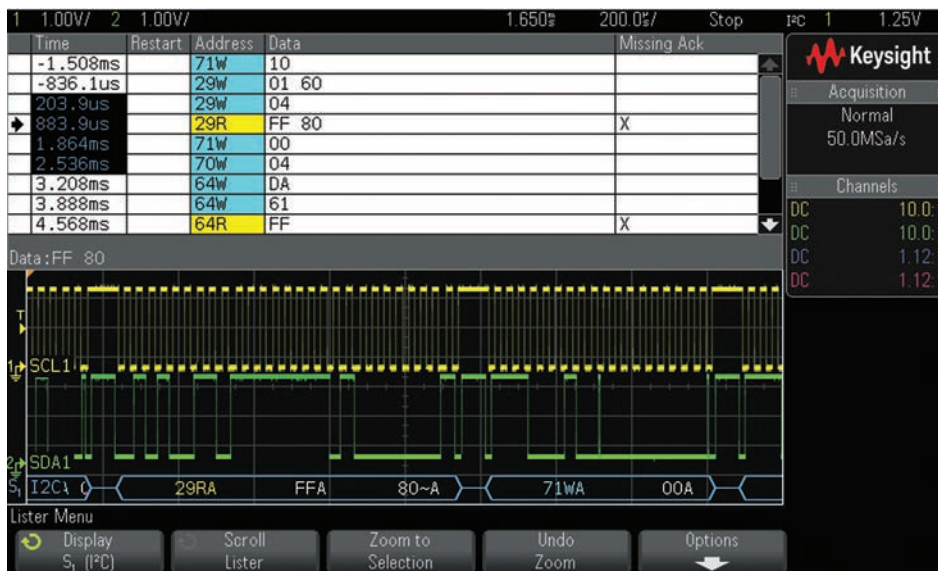


Specifications/Characteristics (Continued)

SPI specifications/characteristics (DSOX2EMBD, DSOX3EMBD, DSOX4EMBD and DSOX6EMBD)	
MOSI, MISO, Clock, and CS input source	Analog channels 1, 2, 3, or 4
	Digital channels D0 to D15 (3000, 4000 and 6000 X-Series only)
Max clock/data rate	Up to 25 Mb/s
Triggering	4- to 64-bit data pattern during a user-specified framing period
	Framing period can be a positive or negative chip select (CS or ~CS) or clock idle time (timeout)
Hardware-based decode	Number of decode traces: 2 independent traces (MISO and MOSI)
	Data (hex digits in white)
	Unknown/error bus (bi-level bus trace in red)
	Number of clocks/packet ("XX CLKS" in light-blue above data packet)
	Idle bus (mid-level bus trace in dark blue)
	Active bus (bi-level bus trace in dark blue)
Multi-bus analysis	SPI plus one other serial bus, excluding another SPI bus. (3000, 4000 and 6000 X-Series only)

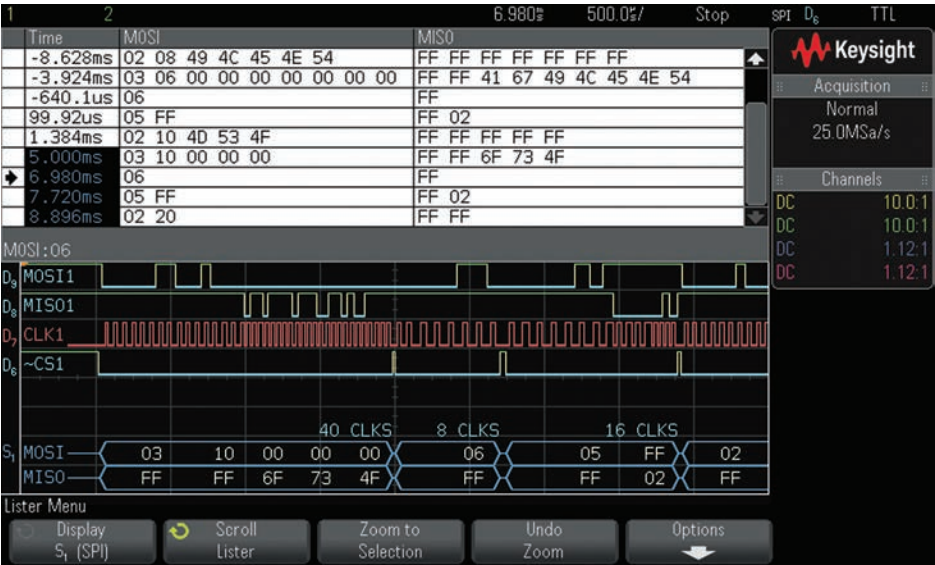

Specifications/Characteristics (Continued)

RS232/UART specifications/characteristics (DSOX2COMP, DSOX3COMP, DSOX4COMP and DSOX6COMP)	
Tx and Rx input source	Analog channels 1, 2, 3, or 4
	Digital channels D0 to D15 (3000, 4000 and 6000 X-Series only)
Bus configuration	
– Baud rates	100 b/s up to 8 Mb/s
– Number of bits	5 to 9
– Parity	None, odd, or even
– Polarity	Idle low or idle high
– Bit order	LSB out first or MSB out first
Triggering	Rx start bit
	Rx stop bit
	Rx data
	Rx 1:data (9-bit format)
	Rx 0:data (9-bit format)
	Rx X:data (9-bit format)
	Rx or Tx parity error
	Tx start bit
	Tx stop bit
	Tx data
	Tx 1:data (9-bit format)
	Tx 0:data (9-bit format)
	Tx X:data (9-bit format)
	Burst (nth frame within burst defined by timeout)
Hardware-based decode	
– Number of decode traces	2 independent traces (Tx and Rx)
– Data format	Binary, hex, or ASCII-code characters
– Data byte display	White characters if no parity error, red characters if parity or bus error
– Idle bus trace	Mid-level bus trace in blue
– Active bus trace	Bi-level trace in blue
Multi-bus analysis	RS232/UART plus one other serial bus, including another RS232/UART bus. (3000, 4000 and 6000 X-Series only)
Totalize/counter function	Total received frames
	Total transmitted frames
	Total parity error frames (with percentage)

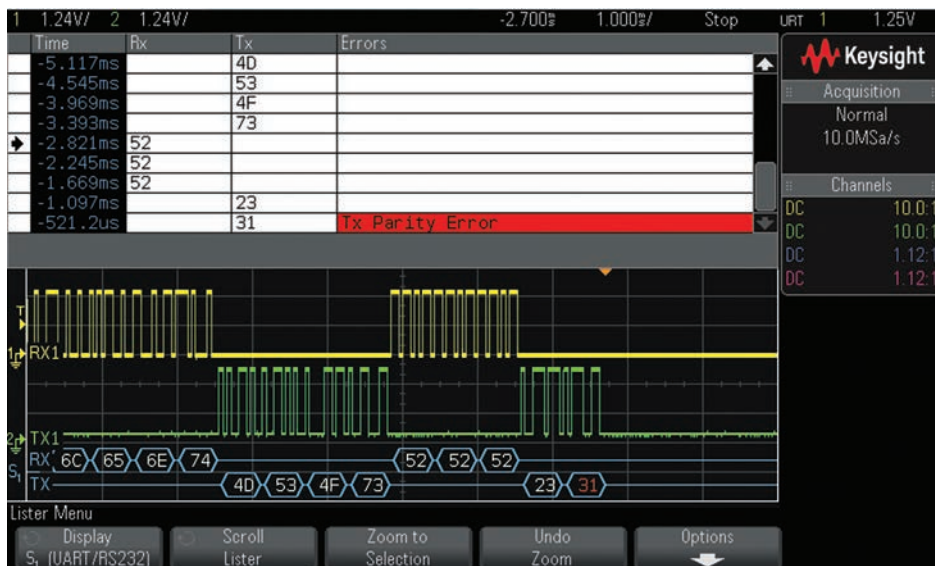

Specifications/Characteristics (Continued)

USB 2.0 low- and full-speed specifications/characteristics (DSOX4USBFL and DSOX6USBFL)	
USB input source (D+ & D-)	Analog channels 1, 2, 3, 4 Digital channels D0-D15
Speed	Low (1.5 Mb/s) and Full (12 Mb/s)
Triggering	Start of packet (SOP) End of packet (EOP) Suspend – when bus is idle for > 3 ms Resume – when exiting an idle state > 10 ms Reset – when SE0 is > 10 ms Token packet with specified content Data packet with specified content Handshake packet with specified content Special packet with specified content All errors – any of the below error conditions PID error – if packet type field does not match check field CRC5 error – if 5 bit CRC error is detected CRC16 error – if 16 bit CRC error is detected Glitch error – if two transitions occur in half a bit time Bit stuff error – if >6 consecutive “ones” are detected SE1 error – if SE1 > 1 bit time
Hardware-based decode	
– Base format	Hex, Binary, ASCII, or Decimal data decode
– Token packets (excluding SOF, 3 bytes)	PID (yellow, “OUT”, “IN”, “SETUP”, “PING”) PID Check (yellow when valid, red when error detected) – numeric value Address (blue, 7 bits) Endpoint (green, 4 bits) CRC (blue when valid, red when error detected, 5 bits)
– Token packets (SOF, 3 bytes)	PID (yellow, “SOF”) PID Check (yellow when valid, red when error detected, 5 bits) Frame (green, 11-bits) – the frame number CRC (blue when valid, red when error detected, 5 bits)
– Data packets (3 to 1027 bytes)	PID (yellow, “DATA0”, “DATA1”, “DATA2”, “MDATA”) PID Check (yellow when valid, red when error detected, 16 bits)
– Handshake packets (1 byte)	PID (yellow, “ACK”, “NAK”, “STALL”, “NYET”, “PRE”, “ERR”) PID Check (yellow when valid, red when error detected) – numeric value Hub Addr (green, 7 bits) SC (blue, 1 bit) Port (green, 7 bits) S & E U (blue, 2 bits) ET (green, 2 bits) CRC (blue when valid, red when error detected, 5 bits)
– Multi-bus analysis	USB low-full-speed plus one other serial bus (including another USB bus)



Specifications/Characteristics (Continued)

USB 2.0 high-speed specifications/characteristics (DSOX4USBH and DSOX6USBH)	
USB differential input source	Analog channels 1, 2, 3, 4 (using a differential active probe)
Speed	High (480 Mb/s)
Triggering	Token packet with specified content
	Data packet with specified content
	Handshake packet with specified content
	Special packet with specified content
	All errors – any of the below error conditions
	PID error – if packet type field does not match check field
	CRC5 error – if 5 bit CRC error is detected
	CRC16 error – if 16 bit CRC error is detected
	Glitch error – if two transitions occur in half a bit time
Hardware-based decode	
Base format	Hex, Binary, ASCII, or Decimal data decode
Token packets (excluding SOF, 3 bytes)	PID (yellow, “OUT”, “IN”, “SETUP”, “PING”)
	PID check (yellow when valid, red when error detected) – numeric value
	Address (blue, 7 bits)
	Endpoint (green, 4 bits)
	CRC (blue when valid, red when error detected, 5 bits)
Token packets (SOF, 3 bytes)	PID (yellow, “SOF”)
	PID check (yellow when valid, red when error detected, 5 bits)
Data packets (3 to 1027 bytes)	Frame (green, 11-bits) – the frame number
	CRC (blue when valid, red when error detected, 5 bits)
	PID (yellow, “DATA0”, “DATA1”, “DATA2”, “MDATA”)
	PID check (yellow when valid, red when error detected, 16 bits)
Handshake packets (1 byte)	PID (yellow, “ACK”, “NAK”, “STALL”, “NYET”, “PRE”, “ERR”)
	PID check (yellow when valid, red when error detected) – numeric value
	Hub Addr (green, 7 bits)
	SC (blue, 1 bit)
	Port (green, 7 bits)
	S & E U (blue, 2 bits)
	ET (green, 2 bits)
	CRC (blue when valid, red when error detected, 5 bits)
Multi-bus analysis	N/A



Specifications/Characteristics (Continued)

CAN specifications/characteristics (DSOX2AUTO and DSOX3AUTO)	
CAN input source	Analog channels 1, 2, 3, or 4 Digital channels D0 to D15 non-differential. (3000 X-Series only)
Signal types	Rx, Tx, CAN_L, CAN_H, Diff (L-H), Diff (H-L)
Baud rates	10 kb/s up to 5 Mb/s
Triggering	Start-of-frame (SOF)
	Remote frame ID (RMT)
	Data frame ID (~RMT)
	Remote or data frame ID
	Data frame ID and data
	Error frame
	All errors (includes protocol “form” errors that may not generate flagged error frames)
	Acknowledge errors
	Overload frames
	ID length: 11 bits or 29 bits (extended)
Hardware-based decode	Frame ID (hex digits in yellow)
	Remote frame (RMT in green)
	Data length code (DLC in blue)
	Data bytes (hex digits in white)
	CRC (hex digits in blue = valid, hex digits in red = error)
	Error frame (bi-level bus trace and ERR message in red)
	Form error (bi-level bus trace and “?” in red)
	Overload frame (“OVRD” in blue)
	Idle bus (mid-level bus trace in dark blue)
	Active bus (bi-level bus trace in dark blue)
Multi-bus analysis	CAN plus one other serial bus, including another CAN bus. (3000 X-Series only)
Totalize function	Total frames, total overload frames, total error frames, bus utilization (bus load)
Eye-diagram mask testing (3000 X-Series only, requires DSOX3MASK)	Various downloadable mask files available based on differential probing polarity, baud rate, and network length



Specifications/Characteristics (Continued)

CAN/CAN FD specifications/characteristics (DSOXT3AUTO, DSOX4AUTO, and DSOX6AUTO)


Note: “Classic” CAN 2.0 is a subset of CAN FD. CAN FD trigger and decode supports ISO and non-ISO CAN FD specifications. Both of these protocol standards are supported with the DSOXT3AUTO, DSOX4AUTO, and DSOX6AUTO option in an InfiniiVision 3000T, 4000, and 6000 X-Series oscilloscope.

CAN input source	Analog channels 1, 2, 3, or 4 Digital channels D0 to D15 non-differential
Signal types	Rx, Tx, CAN_L, CAN_H, Diff (L-H), Diff (H-L)
Standard baud rates	10 kb/s up to 5 Mb/s
FD baud rates	10 kb/s up to 10 Mb/s
Triggering	SOF (Start-of-frame)
	EOF (End-of-frame, filtered by ID)
	Data frame ID (11 bits or 29 bits: Extended)
	Data frame ID and data – non FD
	Data frame ID and data – FD
	Remote frame ID (RTR)
	Remote or data frame ID
	Error frame (filtered by ID)
	Acknowledge error (filtered by ID)
	Form error (filtered by ID)
	Stuff error (filtered by ID)
	CRC error (filtered by ID)
	Spec error (includes Ack, Form, Stuff, or CRC error; filter by ID)
	All errors (includes any Spec error or Error frame; filtered by ID)
	BRS bit (filtered by ID of FD frames only)
	CRC delimiter bit (filtered by ID of FD frames only)
	ESI bit active (filtered by ID of FD frames only)
	ESI bit passive (filtered by ID of FD frame only)
	Overload frames
Symbolic triggering (based on .dbc file)	Message names
	Message and signal values/encoded states (first 8 bytes)
Hardware-based decode	Frame ID (hex digits in yellow)
	Remote frame (RMT in green)
	Data length code (DLC = with decimal digits in blue)
	Data bytes (hex digits in white)
	ESI bit passive (frame type column in lister shaded yellow; FD frames only)
	Error frame (bi-level red bus trace with ERR FRAME in red)
	Stuff bit error (bi-level red bus trace with STUFF ERR in red)
	Form error (bi-level red bus trace with FORM ERR in red)
	Acknowledge error (bi-level red bus trace with ACK ERR in red)
	CRC (hex digits in blue = valid, hex digits in red = error)
	Overload frame (“OVRD” in blue)
	Idle bus (mid-level dark blue bus trace)
	Active bus (bi-level dark blue bus trace with embedded decode within)
Symbolic decode (based on .dbc file)	Message names (alpha-numeric characters in yellow)
	Signal names, value/encoded state (first 8 bytes), and units (alpha-numeric characters in white)
Multi-bus analysis	CAN/CAN FD plus one other serial bus, including another CAN/CAN FD bus
Totalize function (real time)	Total frames, total error frames with %, total spec errors, bus load in %
CAN/CAN FD Eye-diagram mask testing (requires DSOX3MASK/DSOX4MASK/DSOX6MASK)	Various downloadable mask files available based on differential probing polarity, baud rate, and network length




Specifications/Characteristics (Continued)

LIN specifications/characteristics (DSOX2AUTO, DSOX3AUTO, DSOX3TAUTO, DSOX4AUTO and DSOX6AUTO)	
LIN input source	Analog channels 1, 2, 3, or 4
	Digital channels D0 to D15 except 2000 X-Series
LIN standards	LIN 1.3 or LIN 2.X
Baud rates	2400 b/s to 625 kb/s
Triggering	Sync break
	Frame ID (0X00HEX to 0X3FHEX)
	Frame ID and data
	Parity error
	Checksum error
Symbolic decode (except 2000X)(based on .ldf file)	Message names (alpha-numeric characters in yellow)
	Signal names, value/encoded state and units (alpha-numeric characters in white)
Hardware-based decode	Frame ID (6-bit hex digits in yellow)
	Frame ID and optional parity bits (8-bit hex digits in yellow if valid, red if parity bit error)
	Data bytes (hex digits in white)
	Check sum (hex digits in blue = valid, hex digits in red = error)
	Sync error ("SYNC" in red)
	THeader-max ("THM" in red)
	TFrame-max ("TFM" in red)
	Parity error ("PAR" in red)
	LIN 1.3 wake-up error ("WUP" in red)
	Idle bus (mid-level bus trace in dark blue)
	Active bus (bi-level bus trace in dark blue)
Symbolic triggering (except 2000X) (based on .dbc file)	Message names
	Message and signal values/encoded states
Multi-bus analysis	LIN plus one other serial bus, including another LIN bus. (except 2000X)

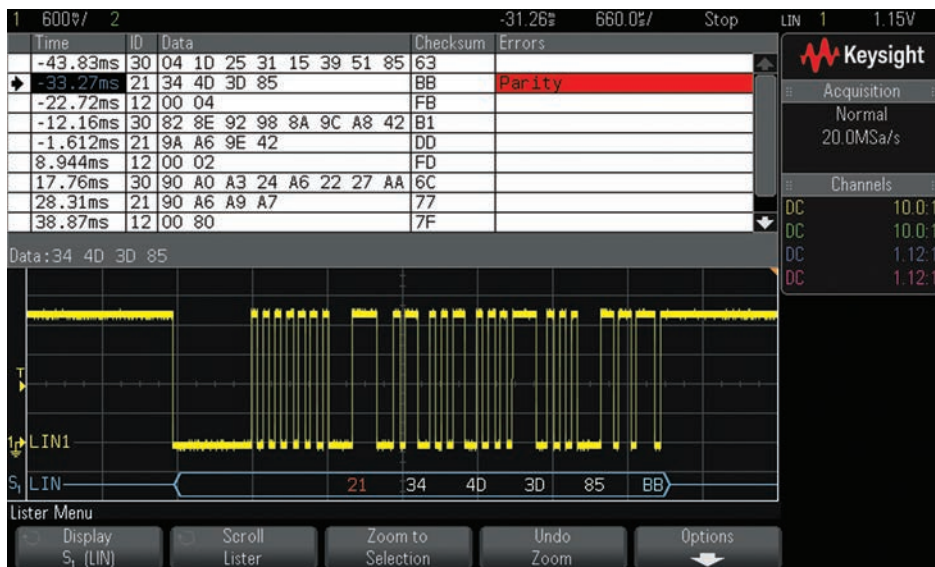

Specifications/Characteristics (Continued)

SENT specifications/characteristics (DSOXT3SENSOR, DSOX4SENSOR, and DSOX6SENSOR)	
CAN input source	Analog channels 1, 2, 3, or 4
	Digital channels D0 to D15 non-differential
Clock period	1 μ s to 300 μ s with user-defined tolerance setting from 3 to 30%
Number of nibbles	1 to 6
Idle state	High or low
CRC format	2008 or 2010 standards
Pause pulse	On/Off
Message format	Fast Nibbles (All)
	Fast Signals (only)
	Fast + Short Serial
	Fast + Enhanced Serial (automatically detects bit format: 12-bit data/8-bit ID or 16-bit data/4-bit ID)
	Short Serial (only)
Number of defined signals	Enhanced Serial (only)
	1 to 6 (each specified by start bit #, number of bits, and nibble order)
Numerical format of signals	Hexadecimal, unsigned decimal, or transfer function with user-defined multiplier and offset for each defined signal
Triggering	Start of fast channel message
	Start of slow channel message
	Fast channel status & communication nibble + data
	Slow channel message ID
	Slow channel message ID + data
	Tolerance violation (sync pulse width exceeds user-specified tolerance)
	Fast channel CRC error
	Slow channel CRC error
	All CRC errors
	Pulse period error (if nibbles are < 12 or > 27 ticks wide)
Fast channel decode	Successive sync pulses error (if consecutive sync pulse widths are greater than 1/64 difference)
	Status & communication nibble (binary digits in green)
	Data (hex, unsigned decimal, or transfer function digits in white based on user-defined signal format)
	CRC error (hex digit in blue = valid, hex digit in red = error)
	Pulse period error (< or > in red)
Slow channel decode	Message ID (hex digits in yellow)
	Data (hex digits in white)
	CRC (hex digits in blue = valid, hex digits in red = error)
Multi-bus analysis	SENT plus one other serial bus, including another SENT bus

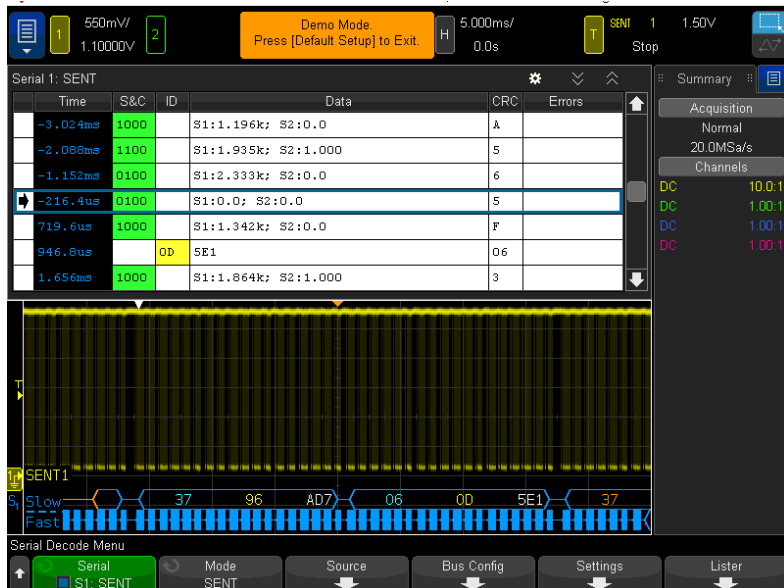


Specifications/Characteristics (Continued)

CXPI specifications/characteristics (DSOXT3CXPI and DSOX4CXPI)	
CXPI input source	Analog channels 1, 2, 3 or 4
Baud rates	9.6 kb/s to 40 kb/s (20 kb/s typical) with tolerance setting
Triggering	SOF (Start-of-frame)
	EOF (End-of-frame)
	PTYPE
	Frame ID (PTYPE present or not present)
	Frame ID + info + data
	Frame ID + info + data (long frame)
	CRC field error (filtered by ID)
	Parity error
	Inter-byte space error (filtered by ID)
	Inter-frame space error (filtered by ID)
	Framing error (filtered by ID)
	Data length error (filtered by ID)
	Sample error
	All errors
	Sleep frame
	Wakeup pulse
	Frame ID (hex digits in yellow if valid or red if parity error)
	Data length code (DLC = with decimal digits in blue)
	Network management (NM) bits (binary digits in green)
Hardware-based decode	Counter (CT) bits (binary digits in yellow)
	Data (hex digits in white)
	CRC (hex digits in blue = valid, hex digits in red = error)
	Idle bus (mid-level dark blue bus trace)
	Active bus (bi-level dark blue bus trace with embedded decode within)
	Inter-byte space error (IBS ERR in red)
	Data length error (LEN ERR in red)
	Sleep mode (SLEEP MODE in orange within bi-level orange bus trace)
	Wakeup pulse (WAKEUP PULSE in blue with bi-level blue bus trace)
Multi-bus analysis	CXPI plus one other serial bus



Specifications/Characteristics (Continued)

FlexRay specifications/characteristics (DSOX3FLEX, DSOX4FLEX and DSOX6FLEX)	
FlexRay input source	Channel 1, 2, 3, or 4 (using differential probe)
FlexRay channels	A or B
Baud rates	2.5 Mbps, 5.0 Mbps, and 10 Mbps
Frame triggering	Frame type: Startup (SUP), not startup (~SUP), sync (SYNC), not sync (~SYNC), null (NULL), not null (~NULL), normal (NORM), and All
	Frame ID: 1 to 2047 (decimal format), and All
	Cycle -
	Base: 0 to 63 (decimal format), and All
	Repetition: 1, 2, 4, 8, 16, 32, 64 (decimal format), and All
Error triggering	All errors
	Header CRC error
	Frame CRC error
Event triggering	Wake-up
	TSS (transmission start sequence)
	BSS (byte start sequence)
	FES/DTS (frame end or dynamic trailing sequence)
Frame decoding	Frame type (NORM, SYNC, SUP, NULL in blue)
	Frame ID (decimal digits in yellow)
	Payload-length (decimal number of words in green)
	Header CRC (hex digits in blue if valid, or red digits if invalid)
	Cycle number (decimal digits in yellow)
	Data bytes (HEX digits in white)
	Frame CRC (hex digits in blue if valid, or red digits)
Totalize function	Total frames
	Total synchronization frames
	Total null frames
Eye-diagram mask testing (requires DSOX3MASK mask test option plus downloadable mask files)	TP1 standard voltage (10 Mbps only)
	TP1 increased voltage (10 Mbps only)
	TP11 standard voltage (10 Mbps only)
	TP11 increased voltage (10 Mbps only)
	TP4 10 Mbps, TP4 5 Mbps and TP4 2.5 Mbps
Multi-bus analysis	FlexRay plus one other serial bus (including another FlexRay bus)

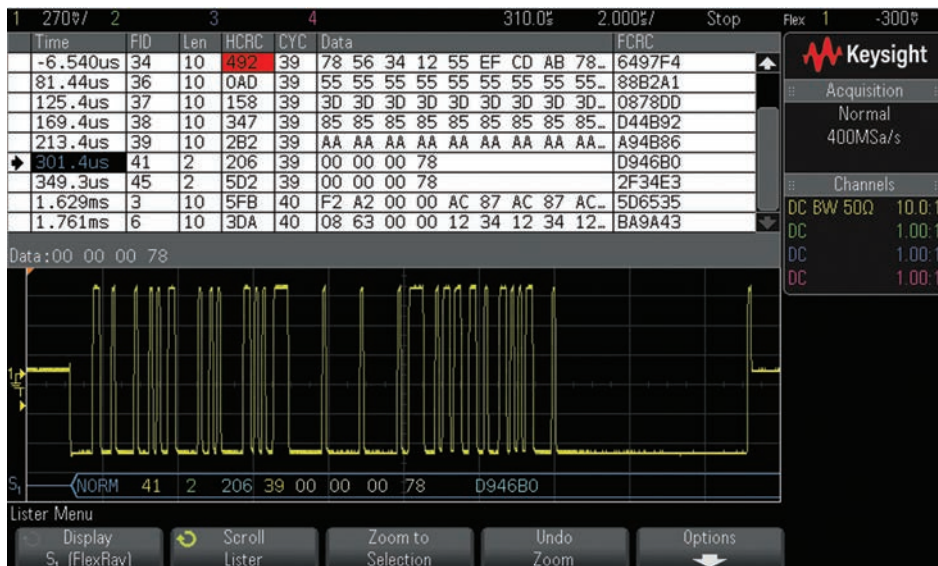

FlexRay Physical Layer Conformance Test software

Requires FlexRay option (DSOX3FLEX/DSOX4FLEX/DSOX6FLEX)

Mask test option (DSOX3MASK/DSOX4MASK/DSOX6MASK)

Segmented memory option (DSOX3SGM or standard on 3000T, 4000 and 6000 X-Series)

Table 1. Receiver input tests


Parameter tested	Test description
Eye-diagram mask tests:	
– TP4 – All	Receiver mask test on all frames
– TP4 – ID	Receiver mask test on specified frame
Signal integrity voting tests on 13 MHz low-pass filtered Isolated “1”:	
– uData1Top	Required maximal level
– dBitShort	Shortest single bit
– dBitLengthVariation	Bit asymmetry
– dEdge01	Rising edge duration (-300 mV to +300 mV)
– dEdge10	Falling edge duration (+300 mV to -300 mV)
– dEdgeMax	Slowest edge
– Sq1	Isolated “1” voted signal quality
Signal integrity voting tests on 13 MHz low-pass filtered Isolated “0”:	
– uData0Top	Required minimal level
– dBitShort	Shortest single bit
– dBitLengthVariation	Bit asymmetry
– dEdge01	Rising edge duration (-300 mV to +300 mV)
– dEdge10	Falling edge duration (+300 mV to -300 mV)
– dEdgeMax	Slowest edge
– Sq0	Isolated “0” voted signal quality
Advanced diagnostic tests:	
– gdTSSTransmitter	Transmitted TSS width @ receiver
– MCT	Mean corrected cycle time
– uBusRx-Data	Data 1 amplitude
– -uBusRx-Data	Data 0 amplitude
– uRx-Idle	Mean idle level
– dBusRx01	Rise time Data0 to Data1 (-300 mV to +300 mV)
– dBusRx10	Fall time Data1 to Data0 (+300 mV to -300 mV)

Table 2. Transmitter output tests

Parameter tested	Test description
Eye-diagram mask tests (10 Mbs only):	
– TP1 – Std V	Mask test on standard voltage bus driver output
– TP1 – Incr V	Mask test on increased voltage bus driver output
– TP11 – Std V	Mask test on standard voltage active star output
– P11 – Incr V	Mask test on increased voltage active star output
Advanced diagnostic tests:	
– gdTSSTransmitter	Transmitted TSS width
– uBusTx-Data	Data 1 amplitude
– -uBusTx-Data	Data 0 amplitude
– uRx-Idle	Mean idle level
– dBusTx01	Rise time Data0 to Data1 (20 to 80%)
– dBusTx10	Fall time Data1 to Data0 (80 to 20%)


Specifications/Characteristics (Continued)

I²S specifications/characteristics (DSOX3AUDIO, DSOX4AUDIO, and DSOX6AUDIO)	
SCLK, WS, and SDATA input source	Analog channels 1, 2, 3, or 4 Digital channels D0 to D15
Bus configuration:	
– Transmitted word size	4 to 32 bits (user selectable)
– Decoded/receiver word size	4 to 32 bits (user selectable)
– Alignment	Standard, left-justified, or right-justified
– Word select - low	Left-channel or right-channel
– SCLK slope	Rising edge or falling edge
– Decoded base	Hex (2's complement) or signed decimal
Baud rates	2400 b/s to 625 kb/s
Triggering:	
– Audio channel	Audio left, audio right, or either
– Trigger modes	= (Equal to entered data value) ≠ (Not equal to entered data value) < (Less than entered data value) > (Greater than entered data value) >< (Within range of entered data values) <> (Out of range of entered data values) Increasing value that crosses armed (<=) and trigger (>=) entered data values Decreasing value that crosses armed (>=) and trigger (<=) entered data values
Hardware-based decode:	
– Left channel	L: “decoded value” in white
– Right channel	R: “decoded value” in green
– Error	ERR in red (mismatch between transmitted and received word size, or invalid input signaling)
– Word size indicator	“# of TX / # of RX” CLKS in blue displayed above each decoded word
Multi-bus analysis	I ² S plus one other serial bus (excluding another I ² S bus)

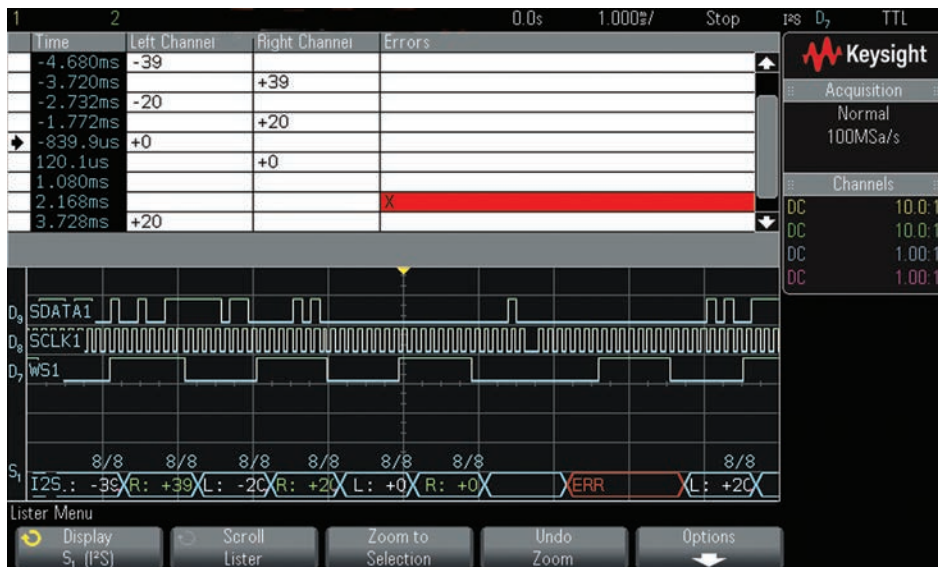


Specifications/Characteristics (Continued)

MIL-STD 1553 specifications/characteristics (DSOX3AERO, DSOX4AERO, and DSOX6AERO)	
MIL-Std 1553 input source	Analog channels 1, 2, 3, or 4 (using a differential active probe)
Triggering	Data word start
	Data word stop
	Command/status word start
	Command/status word stop
	Remote terminal address (hex)
	Remote terminal address (hex) + 11 bits (binary)
	Parity error
	Sync error
	Manchester error
Color-coded, hardware-accelerated decode	Base: HEX or binary
	Command or status word (“C/S” in green)
	Remote terminal address (hex or binary digits in green)
	11 Bits following RTA (hex or binary digits in green)
	Data word (“D” in white)
	Data word bits (hex or binary digits in white)
	Parity error (all decoded text in red)
	Synchronization error (“Sync” in red)
Eye-diagram mask testing (requires DSOX3MASK mask test option plus downloadable mask files)	Manchester error (“Manch” in red)
	System xfmr-coupled input
	System direct-coupled input
	BC xfmr-coupled input
	BC direct-coupled input
	RT xfmr-coupled input
Multi-bus analysis	RT xfmr-coupled input
	MIL-STD 1553 plus one other serial bus, (including another MIL-STD 1553 bus)

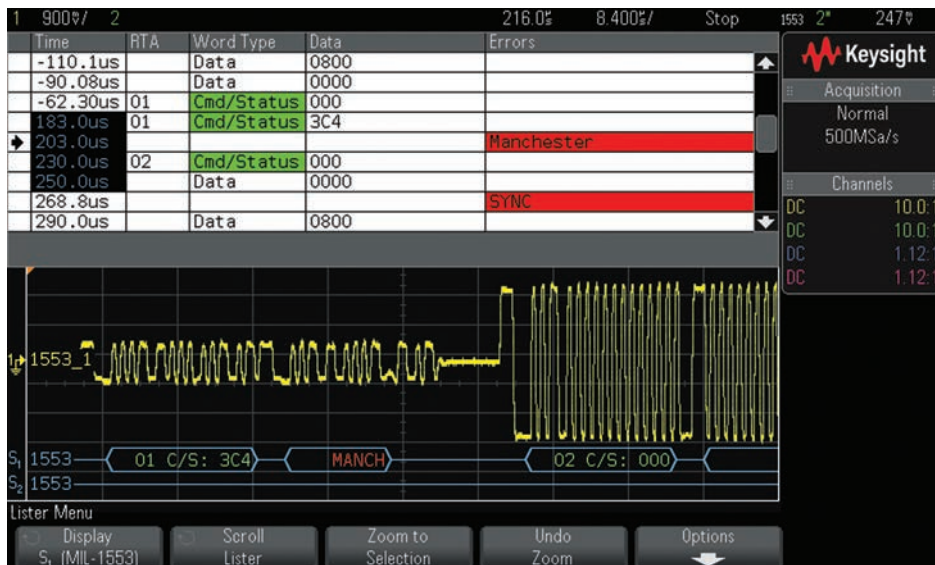

Specifications/Characteristics (Continued)

ARINC 429 specifications/characteristics (DSOX3AERO, DSOX4AERO and DSOX6AERO)	
ARINC 429 input source	Analog channels 1, 2, 3, or 4 (using a differential active probe)
	High (100 kbps)
Baud rates	Low (12.5 kbps)
Triggering	Word start
	Word stop
	Label (octal)
	Label (octal) + bits (binary)
	Label range (octal)
	Parity error
	Word error
	Gap error
	Word or gap error
	All errors
	All bits (useful for eye-diagram testing)
	All 0 bits
	All 1 bits
Color-coded, hardware-accelerated decode	Word format: Label/SDI/data/SSM or label/data/SSM or label/data
	Label (octal digits in yellow)
	SDI (binary digits in blue)
	Data (hex or binary digits in white)
	SSM (binary digits in green)
	Errors (text in red)
Totalize function	Total words
	Total errors
Eye-diagram and pulse mask testing (requires DSOX3MASK plus downloadable mask files)	100 kbps eye test
	100 kbps 1's test
	100 kbps 0's test
	100 kbps null test
	12.5 kbps eye test
	12.5 kbps 1's test
	12.5 kbps 0's test
	12.5 kbps null test
Multi-bus analysis	ARINC 429 plus one other bus (including another ARINC 429 bus)

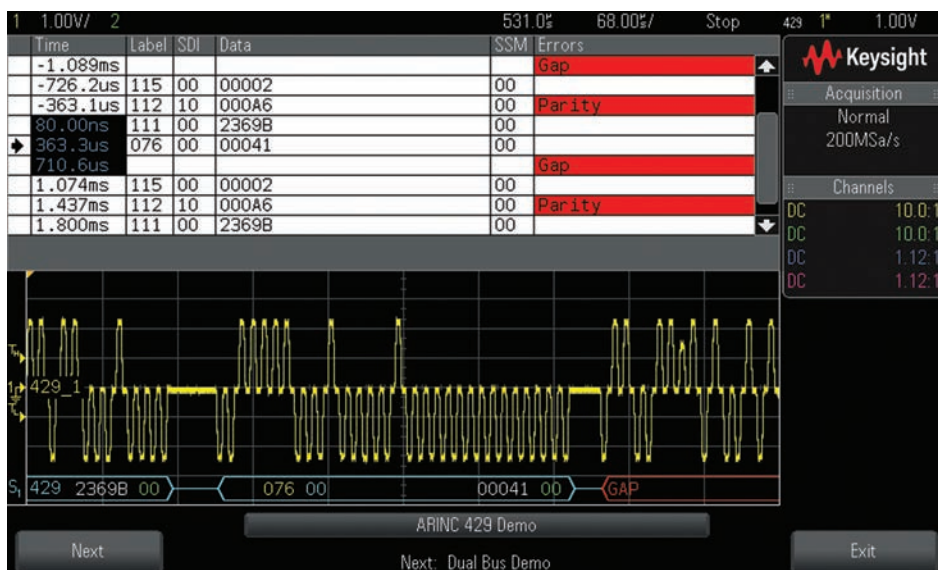

Ordering Information

The various serial bus options are compatible on most models of the Keysight InfiniiVision 3000, 4000 and 6000 X-Series oscilloscopes. The entry-level 2000 X-Series oscilloscopes support only the I²C/SPI, RS232/UART, and CAN/LIN options. Existing InfiniiVision X-Series oscilloscopes can also be upgraded with these options.

For most model numbers, the number after DSOX tells you to which series of oscilloscope it applies. For example, DSOX2EMBD applies to the 2000 X-Series and DSOX3EMBD applies to the 3000 X-Series. “T” in the model number indicates that this option is available in the 3000T X-Series, but not in the 3000A X-Series.

Model number	Description
DSOX2EMBD, DSOX3EMBD, DSOX4EMBD or DSOX6EMBD	I ² C and SPI trigger and decode
DSOX2COMP, DSOX3COMP, DSOX4COMP or DSOX6COMP	RS232/UART trigger and decode
DSOX2AUTO or DSOX3AUTO	CAN and LIN trigger and decode
DSOXT3AUTO, DSOX4AUTO, or DSOX6AUTO	CAN, CAN FD, and LIN trigger and decode, including CAN-dbc and LIN-ldf symbolic decoding
DSOXT3SENSOR, DSOX4SENSOR, or DSOX6SENSOR	Single Edge Nibble Transmission (SENT) trigger and decode
DSOX3TCXPI or DSOX4CXPI	Clock extension peripheral interface (CXPI) trigger and decode
DSOX3FLEX, DSOX4FLEX or DSOX6FLEX	FlexRay trigger and decode
DSOX3AERO, DSOX4AERO or DSOX6AERO	MIL-STD 1553 and ARINC 429 trigger and decode
DSOX3AUDIO, DSOX4AUDIO or DSOX6AUDIO	I ² S trigger and decode
DSOX4USBFL or DSOX6USBFL	USB 2.0 low- and full-speed trigger and decode
DSOX4USBH or DSOX6USBH	USB 2.0 hi-speed trigger and decode (1 GHz and 1.5 GHz bandwidth models of 4000 X-Series only)
DSOX4USBSQ or DSOX6USBSQ	USB 2.0 signal quality test (hi-speed tests require 1.5 GHz bandwidth models)
DSOX2SGM and DSOX3SGM	Segmented memory (standard on 3000T, 4000 and 6000 X-Series models)
DSOX2MASK, DSOX3MASK, DSOX4MASK or DSOX6MASK	Mask test option
N2791A	25-MHz differential active probe
N2818A	200-MHz differential active probe
N7013A	Extreme temperature probing kit for differential active probes
N2750A	1.5 GHz differential active probe (recommended for USB 2.0 hi-speed applications)
0960-2926	DB9 probe head adapter for N2791A and N2818A

Additional options and accessories are available for Keysight’s InfiniiVision oscilloscopes. Refer to the first four documents in the list below for ordering information about these additional options and accessories.

Related Keysight Literature

Publication title	Publication number
<i>InfiniiVision 2000 X-Series Oscilloscopes - Data Sheet</i>	5990-6618EN
<i>InfiniiVision 3000T X-Series Oscilloscopes - Data Sheet</i>	5992-0140EN
<i>InfiniiVision 4000 X-Series Oscilloscopes - Data Sheet</i>	5991-1103EN
<i>InfiniiVision 6000 X-Series Oscilloscopes - Data Sheet</i>	5991-4087EN
<i>InfiniiVision Oscilloscope Probes and Accessories - Selection Guide</i>	5968-8153EN
<i>Extreme Temperature Probing Solutions for Oscilloscope Measurements - Data Sheet</i>	5990-3504EN
<i>N2792A/N2818A 200 MHz and N2793A/N2819A 800 MHz Differential Probes - Data Sheet</i>	5990-4753EN
<i>N2750A/51A/52A InfiniiMode Differential Active Probes - Data Sheet</i>	5991-0560EN
<i>DSOX4USBSQ and DSOX6USBSQ USB 2.0 Signal Quality Test Option for 4000 and 6000 X-Series - Data Sheet</i>	5991-1762EN
<i>Using Oscilloscope Segmented Memory for Serial Bus Applications - Application Note</i>	5990-5817EN
<i>Characterizing Hi-Speed USB 2.0 Serial Buses In Embedded Designs - Data Sheet</i>	5991-1148EN
<i>Debug Automotive Designs Faster with CAN-dbc Symbolic Trigger and Decode - Application Note</i>	5991-2847EN
<i>CAN Eye-Diagram Mask Testing - Application Note</i>	5991-0484EN
<i>CAN FD Eye-Diagram Mask Testing - Application Note</i>	5992-0437EN
<i>Characterizing CAN Bus Arbitration Using InfiniiVision 4000/6000 X-Series Oscilloscope - Application Note</i>	5991-4166EN
<i>FlexRay Physical Layer Eye-diagram Mask Testing - Application Note</i>	5990-4923EN
<i>MIL-STD 1553 Eye-diagram Mask Testing - Application Note</i>	5990-9324EN
<i>ARINC 429 Eye-diagram and Pulse-shape Mask Testing - Application Note</i>	5990-9325EN


To download these documents, insert the publication number in the URL:

<http://cp.literature.keysight.com/litweb/pdf/xxxx-xxxxEN.pdf>

Product web site

For the most up-to-date and complete application and product information, please visit our product Web sites at:

- www.keysight.com/find/2000X-Series
- www.keysight.com/find/3000TX-Series
- www.keysight.com/find/4000X-Series
- www.keysight.com/find/6000X-Series

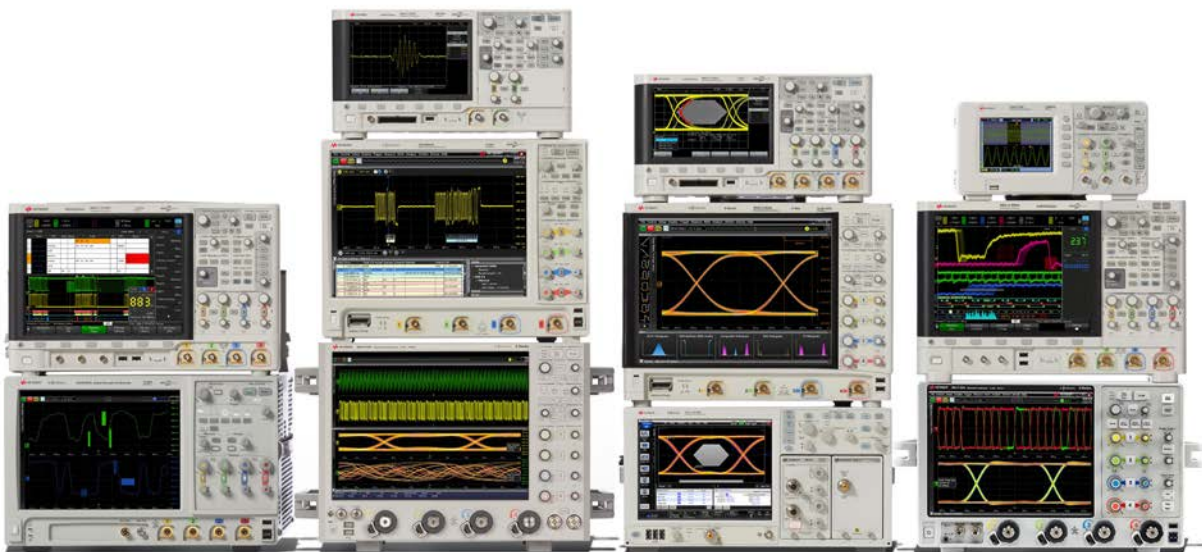

Keysight Oscilloscopes

Multiple form factors from 20 MHz to > 90 GHz | Industry leading specs | Powerful applications



www.axistandard.org

AdvancedTCA® Extensions for Instrumentation and Test (AXIe) is an open standard that extends the AdvancedTCA for general purpose and semiconductor test. The business that became Keysight was a founding member of the AXIe consortium. ATCA®, AdvancedTCA®, and the ATCA logo are registered US trademarks of the PCI Industrial Computer Manufacturers Group.



www.lxistandard.org

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. The business that became Keysight was a founding member of the LXI consortium.




www.pxisa.org

PCI eXtensions for Instrumentation (PXI) modular instrumentation delivers a rugged, PC-based high-performance measurement and automation system.

Evolving

Our unique combination of hardware, software, support, and people can help you reach your next breakthrough. **We are unlocking the future of technology.**

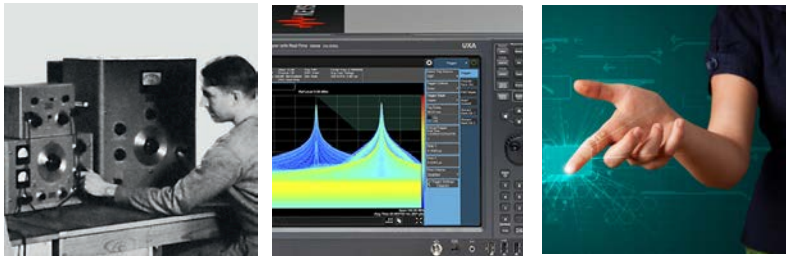

From Hewlett-Packard to Agilent to Keysight



myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.

Keysight Infoline

Keysight Infoline

www.keysight.com/find/Infoline

Keysight's insight to best in class information management. Free access to your Keysight equipment company reports and e-library.

KEYSIGHT SERVICES

Keysight Services

www.keysight.com/find/service

Our deep offering in design, test, and measurement services deploys an industry-leading array of people, processes, and tools. The result? We help you implement new technologies and engineer improved processes that lower costs.

Three-Year Warranty

www.keysight.com/find/ThreeYearWarranty

Keysight's committed to superior product quality and lower total cost of ownership. Keysight is the only test and measurement company with three-year warranty standard on all instruments, worldwide. And, we provide a one-year warranty on many accessories, calibration devices, systems and custom products.

Keysight Assurance Plans

www.keysight.com/find/AssurancePlans

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

www.keysight.com/find/2000X-Series

www.keysight.com/find/3000X-Series

www.keysight.com/find/4000X-Series

www.keysight.com/find/6000X-Series

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 11 2626
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:
www.keysight.com/find/contactus
(BP-06-08-16)

DEKRA Certified
ISO 9001 Quality Management System

www.keysight.com/go/quality

Keysight Technologies, Inc.
DEKRA Certified ISO 9001:2015
Quality Management System



Unlocking Measurement Insights

This information is subject to change without notice.
© Keysight Technologies, 2012 – 2016
Published in USA, June 9, 2016
5990-6677EN
www.keysight.com