General Description

DA9213, DA9214, and DA9215 are PMUs optimized for the supply of CPUs, GPUs, and DDR memory rails in smartphones, tablets and other portable applications. The fast transient response (10 A/µs) and load regulation are optimized for the latest generation of multi core application processors.

DA9213 operates as a single four-phase buck converter delivering up to 20 A output current.

DA9214 integrates two dual-phase buck converters, capable of delivering 2 x10 A output current.

DA9215 integrates a three-phase buck converter capable of delivering 15 A and a single-phase buck converter delivering 5 A output current.

Each buck regulates a programmable output voltage in the range 0.3 to 1.57 V. With an external resistor divider the output voltage can be set to any voltage between 1.57 V and 4.3 V The input voltage range of 2.8 to 5.5 V makes it suited for a wide variety of low voltage systems, including all Li-Ion battery powered applications.

To guarantee the highest accuracy and to support multiple PCB routing scenarios without loss of performance, a remote sensing capability is implemented in DA9213, DA9214, and DA9215.

The power devices are fully integrated, so no external FETs or Schottky diodes are needed.

A programmable soft start-up can be enabled, which limits the inrush current from the input node and secures a slope controlled activation of the rail.

The Dynamic Voltage Control (DVC) supports adaptive adjustment of the supply voltage depending on the processor load, either via direct register writes through the communication interface (I^2C or SPI compatible) or via an input pin.

DA9213, DA9214, and DA9215 feature integrated over-temperature and over-current protection for increased system reliability without the need for external sensing components. The safety feature set is completed by a VDDIO under voltage lockout.

The configurable I^2C address selection via GPI allows multiple instances of DA9213, DA9214, and DA9215 or both to be placed in the application sharing the same communication interface with different addresses.

Key Features

- 2.8 V to 5.5 V input voltage
- 0.3 V to 1.57 V output voltage
- 1.57 to 4.3 V with resistor divider
- 20 A DA9213
- 2 x 10 A DA9214
- 1 x 15 A + 1x 5 A DA9215
- 3 MHz nominal switching frequency (allows use of low profile [1 mm] inductors)
- ±1 % accuracy (static)
- ±3 % accuracy (dynamic)
- Dynamic Voltage Control (DVC)
- Automatic phase shedding
- Integrated power switches
- Remote sensing at point of load
- I^2C/SPI compatible interface
- Adjustable soft start
- -40 to +85 ºC temperature range
- Package 66 WL-CSP 0.4 mm pitch

© 2017 Dialog Semiconductor

Applications

- TV/media players
- Smartphones
- Tablet PCs
- Ultrabooks
- Mobile computing

System Diagrams

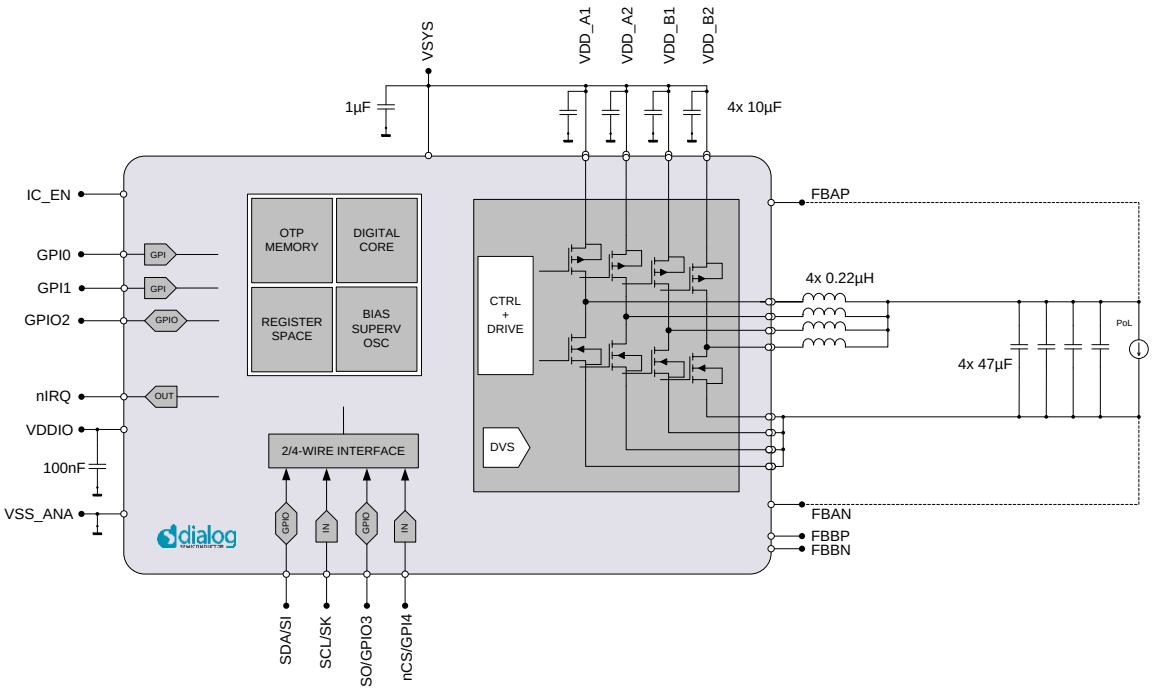


Figure 1: DA9213, DA9214, and DA9215 System Diagram

© 2017 Dialog Semiconductor

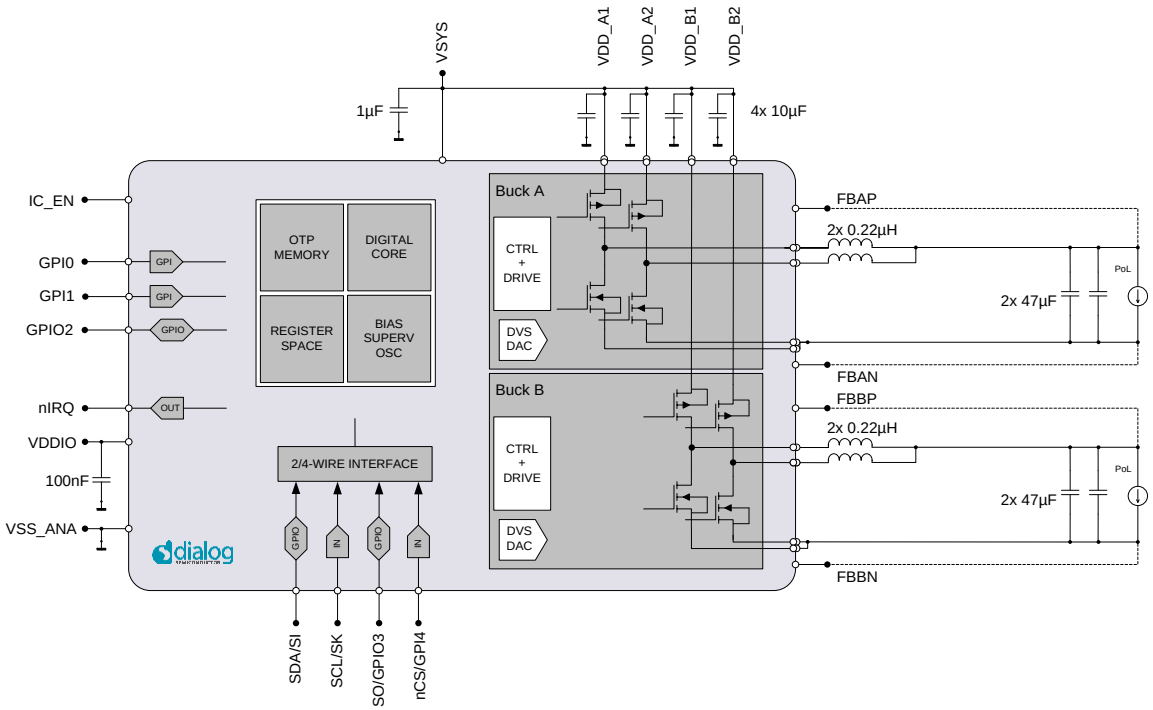


Figure 2: DA9214 System Diagram

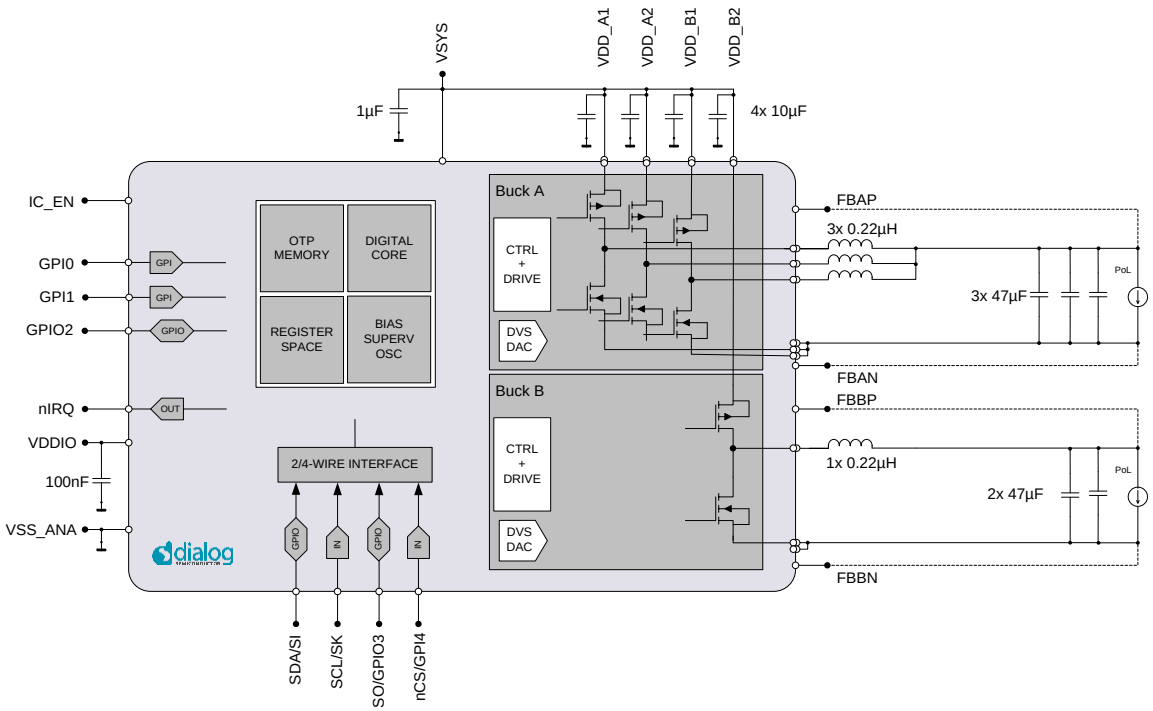


Figure 3: DA9215 System Diagram

© 2017 Dialog Semiconductor

Contents

General Description **1**

Key Features **1**

Applications **2**

System Diagrams **2**

Contents **4**

Figures **5**

Tables **6**

1 Terms and Definitions **7**

2 Pinout **8**

3 Absolute Maximum Ratings **11**

4 Recommended Operating Conditions **11**

5 Electrical Characteristics **12**

6 Efficiency Measurements **19**

7 Functional Description **20**

7.1 DC_DC Buck Converter 23

7.1.1 Switching Frequency 24

7.1.2 Operation Modes and Phase Selection 24

7.1.3 Output Voltage Selection 24

7.1.4 Soft Start-Up 25

7.1.5 Current Limit 25

7.1.6 Variable VOUT above 1.57 V 26

7.2 Ports Description 27

7.2.1 VDDIO 27

7.2.2 IC_EN 27

7.2.3 nIRQ 27

7.2.4 GPIO Extender 28

7.3 Operating Modes 30

7.3.1 ON Mode 30

7.3.2 OFF Mode 30

7.4 Control Interfaces 30

7.4.1 4-WIRE Communication 30

7.4.2 2-WIRE Communication 35

7.4.3 Details of the 2-WIRE Control Bus Protocol 36

7.5 Internal Temperature Supervision 39

8 Register Definitions **40**

8.1 Register Map 40

8.1.1 Register Page Control 42

8.1.2 Register Page 0 42

8.1.2.1 System Control and Event 42

 © 2017 Dialog Semiconductor

8.1.2.2 GPIO Control 44
8.1.2.3 Regulators Control 46
8.1.3 Register Page 1 47
8.1.3.1 Regulators Settings 47
8.1.4 Register Page 2 52
8.1.4.1 Interface and OTP Settings (shared with DA9063) 52
8.1.4.2 OTP Fusing Registers 53
8.1.4.3 Application Configuration Settings 54
9 Application Information 58
9.1 Capacitor Selection 58
9.2 Inductor Selection 59
10 Package Information 60
10.1 Package Outlines 60
11 Ordering Information 61

Figures

Figure 1: DA9213, DA9214, and DA9215 System Diagram 2
Figure 2: DA9214 System Diagram 3
Figure 3: DA9215 System Diagram 3
Figure 4: Connection Diagram 8
Figure 5: 2-WIRE Bus Timing 17
Figure 6: 4-WIRE Bus Timing 18
Figure 7: 2 Phase Auto-Mode, 0 to 10 A 19
Figure 8: 2 Phase Auto-Mode, 0 to 10 A 19
Figure 9: 4 Phase Auto-Mode, 0 to 20 A (Linear) 19
Figure 10: 4 Phase Auto-Mode, 0 to 20 A (Logarithmic) 19
Figure 11: 4 Phase Auto-Mode, 0 to 20 A 19
Figure 12: 1, 2, 3, and 4 Phase Modes 19
Figure 13: Interface of DA9213/14/15 with DA9063 and the Host Processor 20
Figure 14: Typical Application of DA9213 21
Figure 15: Typical Application of DA9214 22
Figure 16: Concept of Control of the Buck's Output Voltage 25
Figure 17: Resistive Divider from VOUT to FBAN 26
Figure 18: GPIO Principle of Operation (example paths) 29
Figure 19: Schematic of 4-WIRE and 2-WIRE Power Manager Bus 31
Figure 20: 4-WIRE Host Write and Read Timing (nCS_POL = '0', CPOL = '0', CPHA = '0') 32
Figure 21: 4-WIRE Host Write and Read Timing (nCS_POL= '0', CPOL = '0', CPHA = '1') 33
Figure 22: 4-WIRE Host Write and Read Timing (nCS_POL = '0', CPOL = '1', CPHA = '0') 33
Figure 23: 4-WIRE Host Write and Read Timing (nCS_POL = '0', CPOL = '1', CPHA = '1') 34
Figure 24: Timing of 2-WIRE START and STOP Condition 36
Figure 25: 2-WIRE Byte Write (SDA Line) 37
Figure 26: Examples of 2-WIRE Byte Read (SDA Line) 37
Figure 27: Examples of 2-WIRE Page Read (SDA Line) 37
Figure 28: 2-WIRE Page Write (SDA Line) 38
Figure 29: 2-WIRE Repeated Write (SDA Line) 38
Figure 30: DA9213/14/15 WL-CSP Package Outline Drawing 60

© 2017 Dialog Semiconductor

Tables

Table 1: Pin Description 9
Table 2: Pin Type Definition 10
Table 3: Absolute Maximum Ratings 11
Table 4: Recommended Operating Conditions (Note 1) 11
Table 5: Buck Converters Characteristics 12
Table 6: IC Performance and Supervision 15
Table 7: Digital I/O Characteristics 15
Table 8: 2-WIRE Control Bus Characteristics 16
Table 9: 4-WIRE Control Bus Characteristics 18
Table 10: 4-WIRE Clock Configurations 31
Table 11: 4-WIRE Interface Summary 35
Table 12: Over-Temperature Thresholds 39
Table 13: Register Map 41
Table 14: Recommended Capacitor Types 58
Table 15: Recommended Inductor Types 59
Table 16: Ordering Information 61

 © 2017 Dialog Semiconductor

1 Terms and Definitions

AP	Application Processor
CPU	Central Processing Unit
DDR	Double Data Rate (type of SDRAM memory for PCs)
DVC	Dynamic Voltage Control
GPU	Graphic Processing Unit
IC	Integrated Circuit
OTP	One Time Programmable memory
PCB	Printed Circuit Board
PMIC	Power Management Integrated Circuit
POL	Point Of Load
SDRAM	Synchronous Dynamic Random Access Memory

© 2017 Dialog Semiconductor

2 Pinout

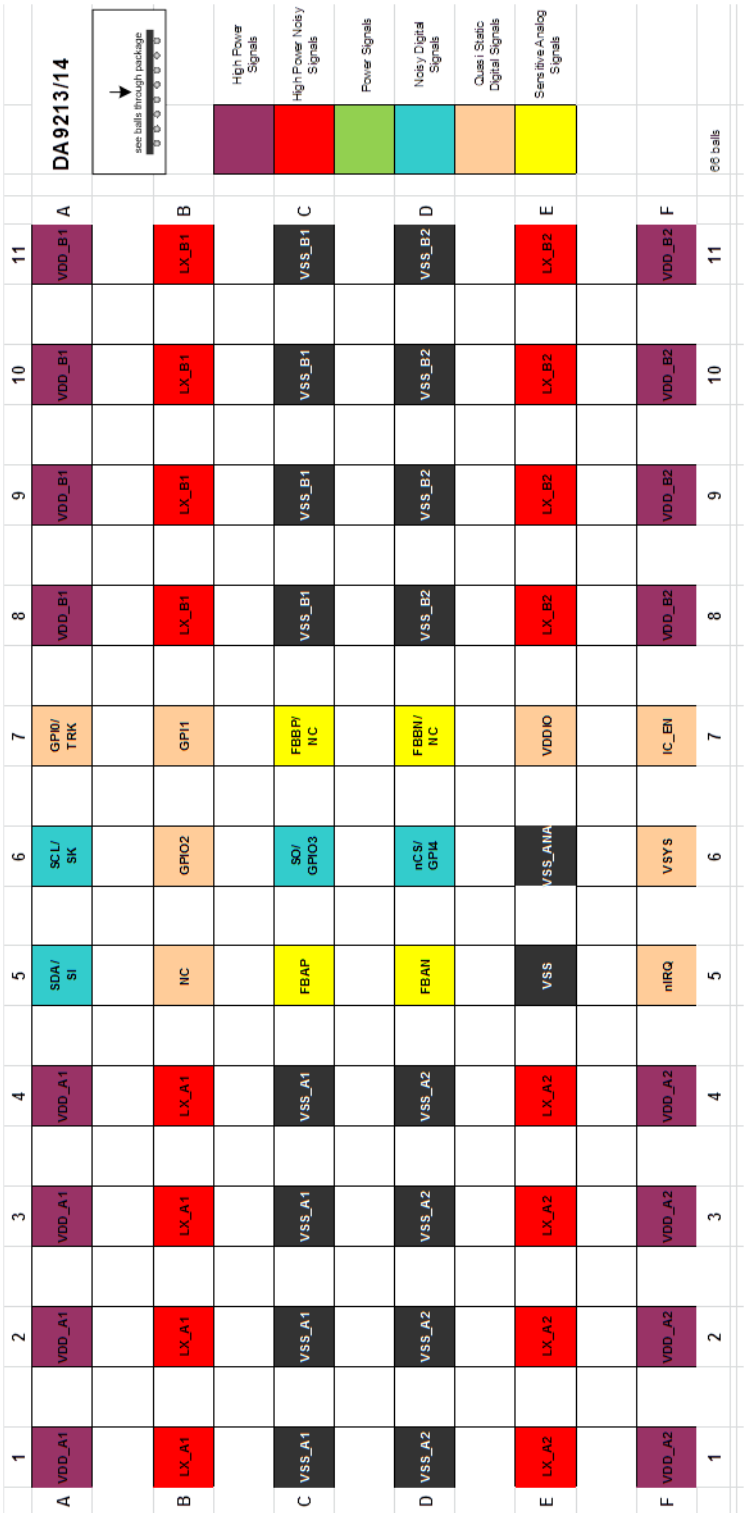


Figure 4: Connection Diagram

© 2017 Dialog Semiconductor

Table 1: Pin Description

Pin Name	Signal Name	Second Function	Type (Table 2)	Description
B1, B2, B3, B4	LX_A1		AO	Switching node for Buck A phase 1
E1, E2, E3, E4	LX_A2		AO	Switching node for Buck A phase 2
B8, B9, B10, B11	LX_B1		AO	Switching node for Buck B phase 1
E8, E9, E10, E11	LX_B2		AO	Switching node for Buck B phase 2
A1, A2, A3, A4	VDD_A1		PS	Supply voltage for Buck A phase 1 To be connected to VSYS
F1, F2, F3, F4	VDD_A2		PS	Supply voltage for Buck A phase 2 To be connected to VSYS
A8, A9, A10, A11	VDD_B1		PS	Supply voltage for Buck B phase 1 To be connected to VSYS
F8, F9, F10, F11	VDD_B2		PS	Supply voltage for Buck B phase 2 To be connected to VSYS
F7	IC_EN		DI	Integrated Circuit (IC) Enable Signal
F5	nIRQ		DO	Interrupt line towards the host
E7	VDDIO		PS	I/O Voltage Rail
C5	FBAP		AI	Positive sense node for the Buck A
D5	FBAN		AI	Negative sense node for the Buck A
C7	FBBP		AI	Positive sense node for the Buck B for DA9214 and DA9215
	NC		AO	Do not connect for DA9213
D7	FBBN		AI	Negative sense node for the Buck B for DA9214 and DA9215
	NC		AO	Do not connect for DA9213
A7	GPI0	TRK	DI/AI	General purpose input, input track
B7	GPI1		DI	General purpose input
B6	GPIO2		DIO	General purpose input/output
A5	SDA	SI	DIO	2-WIRE data, 4-WIRE data input/output
A6	SCL	SK	DI	2-WIRE clock, 4-WIRE clock
D6	nCS	GPI4	DI	4-WIRE chip select, general purpose input
C6	SO	GPIO3	DIO	4-WIRE data output, general purpose input/output
B5	NC		AO	Do not connect and leave floating. This pin is used for the supply of internal circuits
F6	VSYS		PS	Supply for IC and input for voltage supervision
E5	VSS		VSS	
E6	VSS_ANA		VSS	

© 2017 Dialog Semiconductor

Pin Name	Signal Name	Second Function	Type (Table 2)	Description
C1, C2, C3, C4, D1, D2, D3, D4, C8, C9, C10, C11, D8, D9, D10, D11	VSS_A1, VSS_A2 VSS_B1 VSS_B2		VSS	Connect together

Table 2: Pin Type Definition

Pin Type	Description	Pin Type	Description
DI	Digital Input	AI	Analogue Input
DO	Digital Output	AO	Analogue Output
DIO	Digital Input/Output	AIO	Analogue Input/Output
PS	Power Supply	VSS	Ground

© 2017 Dialog Semiconductor

3 Absolute Maximum Ratings

Table 3: Absolute Maximum Ratings

Symbol	Parameter	Conditions (Note 1)	Min	Typ	Max	Unit
T_{STG}	Storage temperature		-65		+150	°C
T_{A_LIM}	Limiting ambient temperature		-40		+85	°C
V_{DD_LIM}	Limiting supply voltage		-0.3		5.5	V
V_{PIN}	Limiting voltage at all pins except above		-0.3		V_{DD} + 0.3 (max 5.5)	V
P_{TOT}	Total power dissipation Note 2	Derating factor above T_A = 70 °C: 37 mW/°C	2035	2590		mW
V_{ESD_HBM}	Electrostatic discharge voltage	Human Body Model			2	kV

Note 1 Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, so functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specification are not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Note 2 Obtained from simulation on a 2S2P 4L JEDEC Board (EIA/JESD51-2). Influenced by PCB technology and layout.

4 Recommended Operating Conditions

Table 4: Recommended Operating Conditions (Note 1)

Parameter	Description	Conditions	Min	Typ	Max	Unit
V_{DD}	Supply voltage		2.8		5.5	V
V_{DDIO}	Input/output supply voltage		1.2		3.6 Note 2	

Note 1 Within the specified limits, a lifetime of 10 years is guaranteed.

Note 2 V_{DDIO} is not allowed to be higher than V_{DD}.

© 2017 Dialog Semiconductor

5 Electrical Characteristics

Unless otherwise noted, the following is valid for T_A = -40 to +85 ºC, V_{DD} = 2.8 V to 5.5 V, C_{OUT} = 47 µF per phase, local sensing.

Table 5: Buck Converters Characteristics

Parameter	Description	Conditions	Min	Typ	Max	Unit
External Component Electrical Conditions						
C_{OUT}	Output capacitance (per phase)	Including voltage and temperature coefficient	23	47	62	µF
ESR_{COUT}	Equivalent series resistance (per phase)	f > 100 kHz			10	mΩ
L_{PHASE}	Inductance (per phase)	Including current and temperature dependence	0.11	0.22	0.29	µH
DCR_{LPHASE}	Inductor resistance				100	mΩ
Electrical Characteristics						
V_{DD}	Supply voltage	VDD_x = VSYS	2.8		5.5	V
V_{BUCK}	Buck output voltage Note 1	I_O = 0 to I_{O_MAX}	0.3		1.57	V
V_{OACC}	Output voltage accuracy PWM mode	Incl. static line/load reg and voltage ripple V_{BUCK} ≥ 1 V	-2.0		+2.0	%
		Incl. static line/load reg and voltage ripple V_{BUCK} < 1 V		±20		mV
		V_{BUCK} = 1 V V_{DD} = 3.8 V no load	-1.0		+1.0	%
		V_{BUCK} = 1 V V_{DD} = 3.8 V no load T_A = 27 ºC	-0.5		+0.5	%
V_{TR_LOAD}	Load regulation transient voltage Note 2	DA9213 I_O = 0 to 5 A, t_R = 500 ns PWM 4-phase V_{BUCK} ≥ 1 V V_{BUCK} < 1 V	-2 -20 mV		+2 +20 mV	%
		DA9213 I_O = 0 to 5 A, t_R = 500 ns auto mode, ph shedding V_{BUCK} = 1 V	-3.5		+3.5	%
		DA9214 I_O = 0 to 5 A, t_R = 500 ns PWM 2-phase V_{BUCK} = 1 V		±3.5		%

© 2017 Dialog Semiconductor

Parameter	Description	Conditions	Min	Typ	Max	Unit
		DA9215 Buck A I_O = 0 to 5 A, t_R = 500 ns PWM 3-phase VBUCK = 1 V		±2.5		%
		DA9215 Buck B I_O = 0 to 2.5 A, t_R = 200 ns PWM, 2 x 47 µF V_{BUCK} = 1 V		±2.5		%
V_{TR_LINE}	Line regulation transient voltage	V_{DD} = 3.0 to 3.6 V dt =10 µs I_O = $I_{O(MAX)}$/2		15		mV
I_{O_MAX}	Maximum output current	Per phase	5000			mA
I_{LIM_MIN}	Minimum current limit per phase (programmable)	BUCKA_ILIM = 0000 BUCKB_ILIM = 0000 Note 3	-20%	4000	20%	mA
I_{LIM_MAX}	Maximum current limit per phase (programmable)	BUCKA_ILIM = 1111 BUCKB_ILIM = 1111 Note 3	-20%	7000	20%	mA
I_{Q_PWM}	Quiescent current at synchronous rectification mode	Per phase No load V_{DD} = 3.7 V		17		mA
f_{SW}	Switching frequency			3		MHz
t_{STUP}	Start-up time	BUCKA_UP_CTRL = 011 BUCKB_UP_CTRL = 011		50 Note 4		µs
R_{O_PD}	Output pull-down resistance	For each phase at the LX node at 0.5 V, (see BUCKx_PD_DIS)		150	200	Ω
R_{ON_PMOS}	PMOS on-resistance	incl. pin and routing V_{DD} = 3.7 V per phase		26		mΩ
R_{ON_NMOS}	NMOS on-resistance	incl. pin and routing V_{DD} = 3.7 V per phase		18		mΩ
PFM Mode						
V_{BUCK_PFM}	Buck output voltage in PFM	I_O = 0 mA to I_{O_MAX}	0.3		1.57	V
$I_{Q_PFM_A2}$	DA9214 quiescent current Buck A enabled	No switching V_{DD} = 3.7 V Note 5		58		µA

© 2017 Dialog Semiconductor

Parameter	Description	Conditions	Min	Typ	Max	Unit
$I_{Q_PFM_A4}$	DA9213 quiescent current Buck enabled	No switching V_{DD} = 3.7 V Note 5		72		µA
$I_{Q_PFM_A2B2}$	DA9214 quiescent current Buck A enabled Buck B enabled	No switching V_{DD} = 3.7 V Note 5		106		µA
$I_{Q_PFM_A3B1}$	DA9215 quiescent current Buck A enabled Buck B enabled	No switching V_{DD} = 3.7 V Note 5		130		µA

Note 1 Programmable in 10 mV increments.

Note 2 Additional to the dc accuracy. The value is intended to be measured directly at $C_{OUT(EXT)}$. In case of remote sensing, parasitics of PCB and external components may affect this value.

Note 3 On-time > 50 ns.

Note 4 Time from beginning to end of the voltage ramp. Additional 10 µs typical delay, plus internal sync to the enable port.

Note 5 For the total quiescent current of the IC, the I_{DD_ON} should be added.

© 2017 Dialog Semiconductor

Table 6: IC Performance and Supervision

Parameter	Description	Conditions	Min	Typ	Max	Unit
I_{DD_OFF}	Off state supply current	IC_EN = 0 T_A = 27 °C		0.1	1	µA
I_{DD_ON}	On state supply current	IC_EN = 1 Buck A/B off T_A = 27 °C		14		µA
V_{TH_PG}	Power good threshold voltage	referred to V_{BUCK}		-50		mV
V_{HYS_PG}	Power good hysteresis voltage			50		mV
$V_{TH_UVLO_VDD}$	Under voltage lockout threshold at V_{DD}			2.0		V
$V_{TH_UVLO_IO}$	Under voltage lockout threshold at V_{DDIO}		1.35	1.45	1.55	V
$V_{HYS_UVLO_IO}$	Under voltage lockout hysteresis at V_{DDIO}			70		mV
T_{TH_WARN}	Thermal warning threshold temperature		110	125	140	°C
T_{TH_CRIT}	Thermal critical threshold temperature		125	140	155	ºC
T_{TH_POR}	Thermal power on reset threshold temperature		135	150	165	°C
f_{OSC}	Internal oscillator frequency		-7%	6.0	+7%	MHz

Table 7: Digital I/O Characteristics

T_A = -40 to +85 ºC

Parameter	Description	Conditions	Min	Typ	Max	Unit
V_{IH_EN}	HIGH level input voltage	At pin IC_EN	1.1			V
V_{IL_EN}	LOW level input voltage	At pin IC_EN			0.35	V
t_{EN}	Enable time	I/F operating		750		µs
$R_{O_PU_GPO}$	Pull up resistor at GPO	V_{DDIO} = 1.8 V V_{GPO} = 0 V		100		kΩ
$R_{I_PD_GPI}$	Pull down resistor at GPI	V_{DDIO} = 1.8 V V_{GPO} = 0 V		150		kΩ
V_{IH}	GPI0-4, SCL, SDA, (2-WIRE mode) HIGH level input voltage	$V_{LDOCORE}$ mode V_{DDIO} mode	1.75 0.7 * V_{DDIO}			V
V_{IL}	GPI0-4, SCL, SDA, (2-WIRE mode) LOW level input voltage	$V_{LDOCORE}$ mode V_{DDIO} mode			0.75 0.3 * V_{DDIO}	V

© 2017 Dialog Semiconductor

Parameter	Description	Conditions	Min	Typ	Max	Unit
V_{IH_4WIRE}	SK, nCS, SI (4-WIRE Mode) HIGH level input voltage		0.7* V_{DDIO}			V
V_{IL_4WIRE}	SK, nCS, SI (4-WIRE Mode) LOW level input voltage				0.3*V_{DDIO}	V
V_{OH}	GPO2-3, SO (4-WIRE mode) HIGH level output voltage	push-pull mode at 1 mA V_{DDIO} ≥ 1.5 V	0.8*V_{DDIO}			V
V_{OL1}	GPO2-3, SDA (2-WIRE mode) SO (4-WIRE mode) LOW level output voltage at I_{OL} = 1 mA				0.3	V
V_{OL3}	SDA (2-WIRE Mode) LOW level output voltage at I_{OL} = 3 mA				0.24	V
V_{OL20}	SDA (2-WIRE Mode) LOW level output voltage at I_{OL} = 20 mA				0.4	V
C_{IN}	CLK, SDA (2-WIRE Mode) input capacitance			2.5	10	pF
t_{SP}	CLK, SDA (2-WIRE Mode) spike suppression pulse width	Fast/Fast+ mode High Speed mode	0 0		50 10	ns
t_{fDA}	Fall time of SDA signal (2-WIRE Mode)	Fast at C_B < 550 pF HS at 10 < C_B < 100 pF HS at C_B < 400 pF	20+0.1C_B 10 20		120 80 160	ns

Table 8: 2-WIRE Control Bus Characteristics

T_A = -40 to +85 ºC

Parameter	Description	Conditions	Min	Typ	Max	Unit
t_{BUF}	Bus free time from STOP to START condition		0.5			µs
C_B	Bus line capacitive load				150	pF
Standard/Fast/Fast+ Mode						
f_{SCL}	Clock frequency	At pin SCL	0 Note 1		1000	kHz
t_{SU_STA}	START condition set-up time		0.26			µs
t_{H_STA}	START condition hold time		0.26			µs

© 2017 Dialog Semiconductor

Parameter	Description	Conditions	Min	Typ	Max	Unit
t_{W_CL}	Clock LOW duration		0.5			µs
t_{W_CH}	Clock HIGH duration		0.26			µs
t_R	Rise time	Input requirement. At pin CLK and DATA			1000	ns
t_F	Fall time	Input requirement. At pin CLK and DATA			300	ns
t_{SU_D}	Data set-up time		50			ns
t_{H_D}	Data hold time		0			ns
High Speed Mode						
f_{SCL_HS}	Clock frequency	At pin SCL	0 Note 1		3400	kHz
$t_{SU_STA_HS}$	START condition set-up time		160			ns
$t_{H_STA_HS}$	START condition hold time		160			ns
$t_{W_CL_HS}$	Clock LOW duration		160			ns
$t_{W_CH_HS}$	Clock HIGH duration		60			ns
t_{R_HS}	Rise time	Input requirement. At pin CLK and DATA			160	ns
t_{F_HS}	Fall time	Input requirement. At pin CLK and DATA			160	ns
$t_{SU_D_HS}$	Data set-up time		10			ns
$t_{H_D_HS}$	Data hold time		0			ns
$t_{SU_STO_HS}$	STOP condition set-up time		160			ns

Note 1 Minimum clock frequency is 10 kHz if 2WIRE_TO is enabled

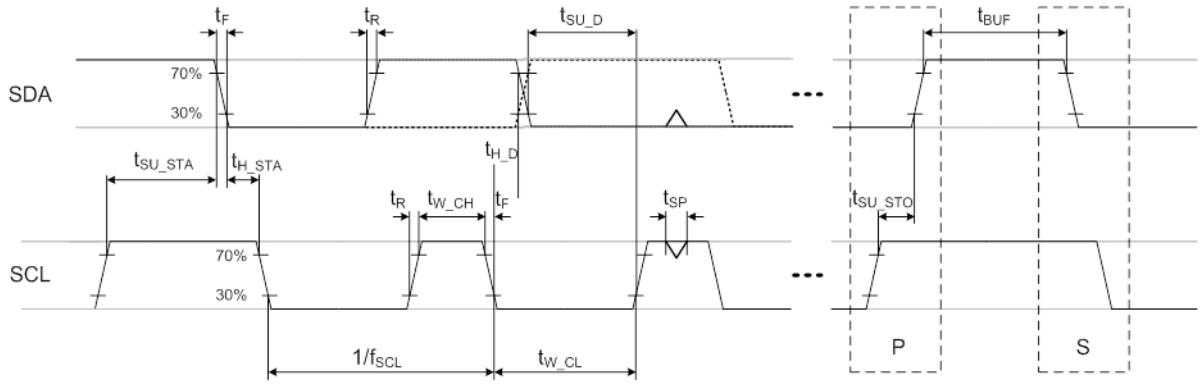


Figure 5: 2-WIRE Bus Timing

© 2017 Dialog Semiconductor

Table 9: 4-WIRE Control Bus Characteristics

T_A = -40 to +85 ºC

Parameter	Description	Conditions	Min	Typ	Max	Unit
C_B	Bus line capacitive load				100	pF
t_C	Cycle time	1	70			ns
t_{SU_CS}	Chip select setup time	2, from CS active to first SK edge	20			ns
t_{H_CS}	Chip select hold time	3, from last SK edge to CS idle	20			ns
t_{W_CL}	Clock LOW duration	4	0.4 x t_C			ns
t_{W_CH}	Clock HIGH duration	5	0.4 x t_C			ns
t_{SU_SI}	Data input setup time	6	10			ns
t_{H_SI}	Data input hold time	7	10			ns
t_{V_SO}	Data output valid time	8			22	ns
t_{H_SO}	Data output hold time	9	6			ns
t_{W_CS}	Chip select HIGH duration	10	20			ns

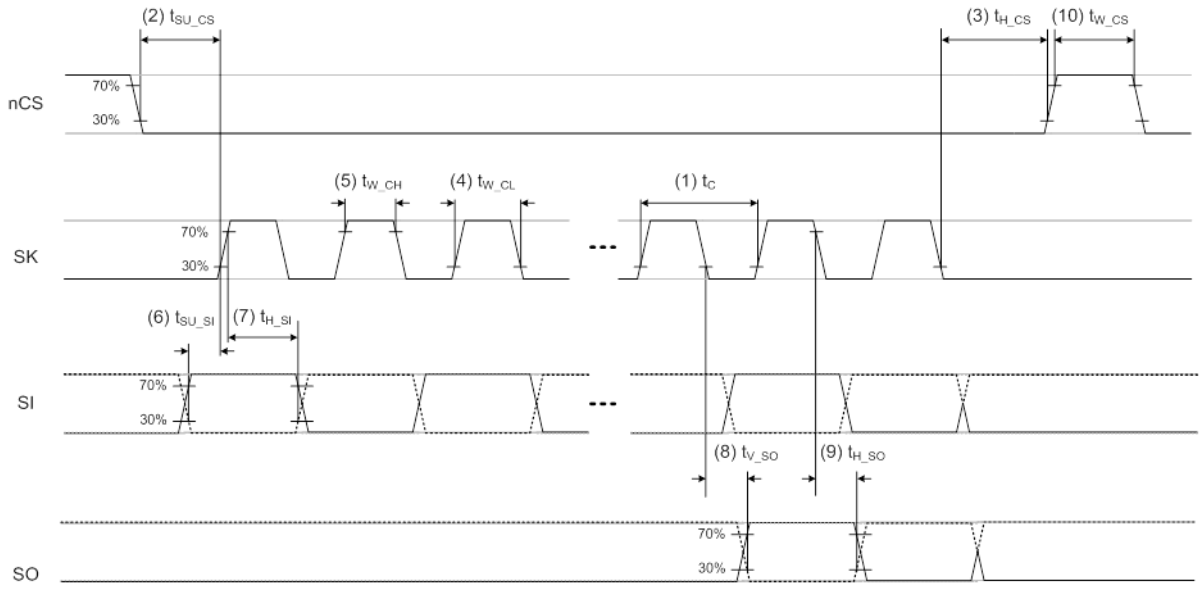


Figure 6: 4-WIRE Bus Timing

© 2017 Dialog Semiconductor

6 Efficiency Measurements

Note: Phase shedding is enabled in each plot.

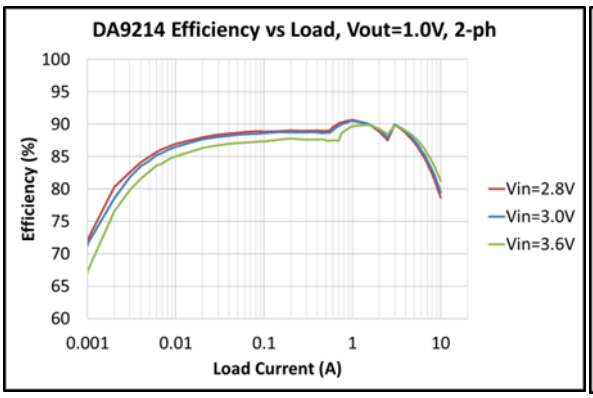


Figure 7: 2 Phase Auto-Mode, 0 to 10 A

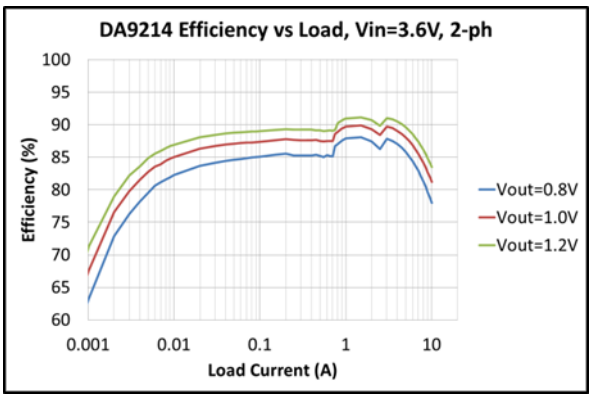


Figure 8: 2 Phase Auto-Mode, 0 to 10 A

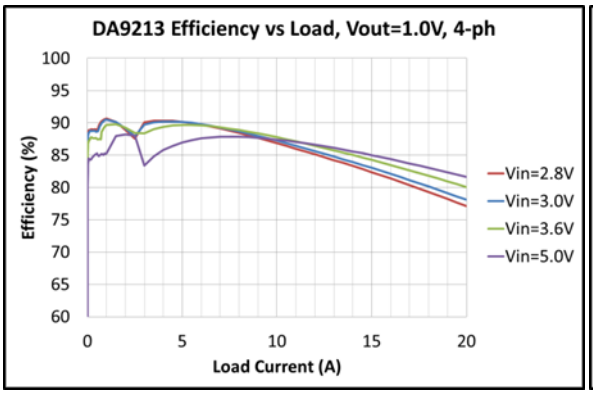


Figure 9: 4 Phase Auto-Mode, 0 to 20 A (Linear)

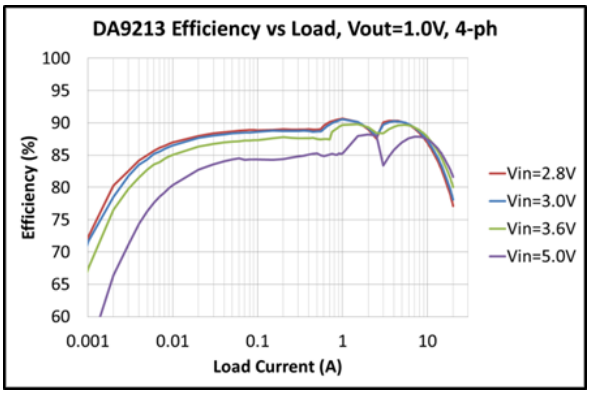


Figure 10: 4 Phase Auto-Mode, 0 to 20 A (Logarithmic)

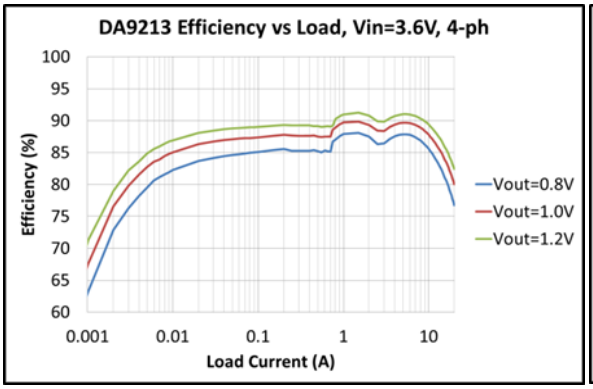


Figure 11: 4 Phase Auto-Mode, 0 to 20 A

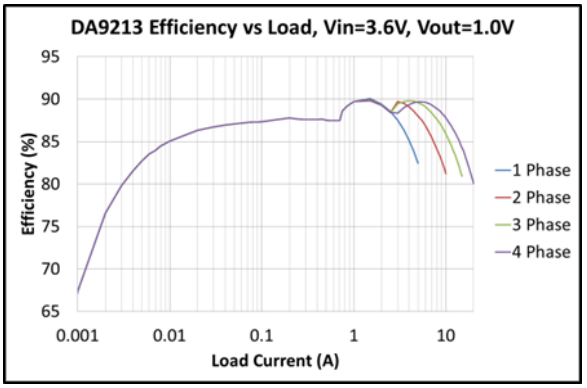


Figure 12: 1, 2, 3, and 4 Phase Modes

© 2017 Dialog Semiconductor

7 Functional Description

Flexible configurability and the availability of different control schemes make both DA9213, DA9214, and DA9215 the ideal single/dual buck companion ICs to expand the existing capabilities of a master PMIC.

Due to the advanced compatibility between both DA9213, DA9214, and DA9215 and the DA9063, they offer several advantages when they are operated together. These advantages include:

- DA9213, DA9214, and DA9215 can be enabled and controlled by DA9063 during the power up sequence, thanks to DA9063's dedicated output signals during power up, and compatible input controls in both DA9213, DA9214, and DA9215.
- DA9213, DA9214, and DA9215 can be used in a completely transparent way for the host processor and can share the same Control Interface (same SPI chip select or I^2C address), thanks to the compatible registers map. DA9213, DA9214, and DA9215 have a dedicated register space for configuration and control which doesn't conflict with DA9063.
- DA9213, DA9214, and DA9215 support a power good configurable port for enhanced communication to the host processor and improved power up sequencing.
- DA9213, DA9214, and DA9215 can both share the same interrupt line with DA9063.

In addition, the 2-WIRE / 4-WIRE interfaces allow DA9213, DA9214, and DA9215 to fit many standard PMU parts and power applications.

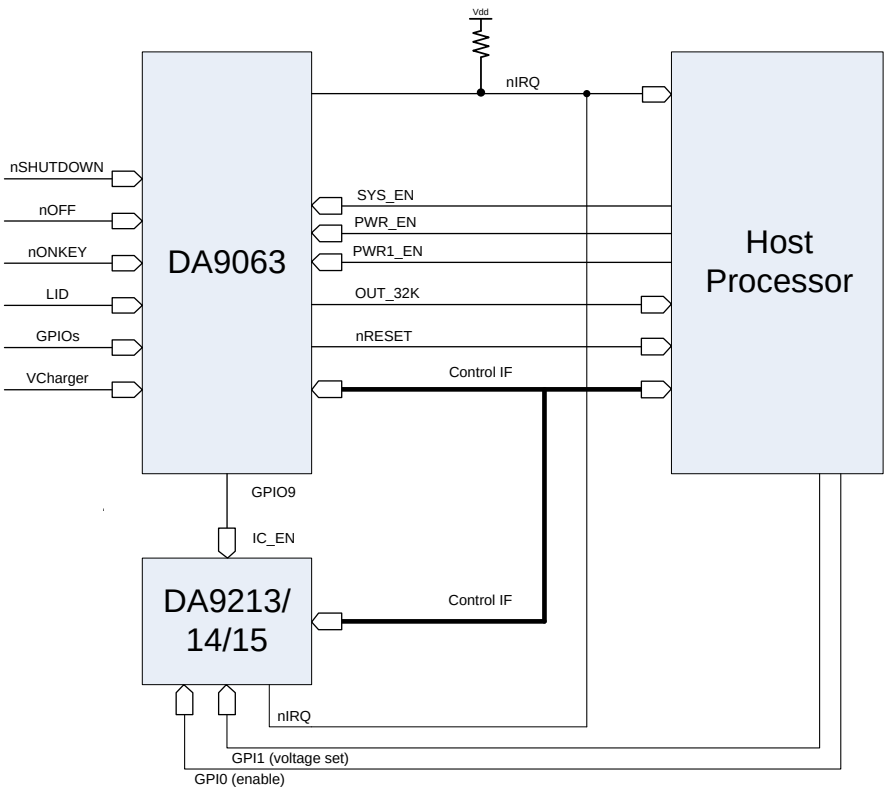


Figure 13: Interface of DA9213/14/15 with DA9063 and the Host Processor

As shown in Figure 13, a typical application case includes a host processor, a Main PMIC (for example, DA9063) and DA9213 or DA9214 used as companion IC for the high power core supply.

The easiest way of controlling DA9213, DA9214, and DA9215 is through the Control Interface. The master initiating the communication must always be the host processor that reads and writes to the

 © 2017 Dialog Semiconductor

main PMIC, and to the DA9213, DA9214, and DA9215 registers. To poll the status of DA9213 or DA9214, the host processor must access the dedicated register area through the Control Interface. DA9213, DA9214, and DA9215 can be additionally controlled by means of hardware inputs.

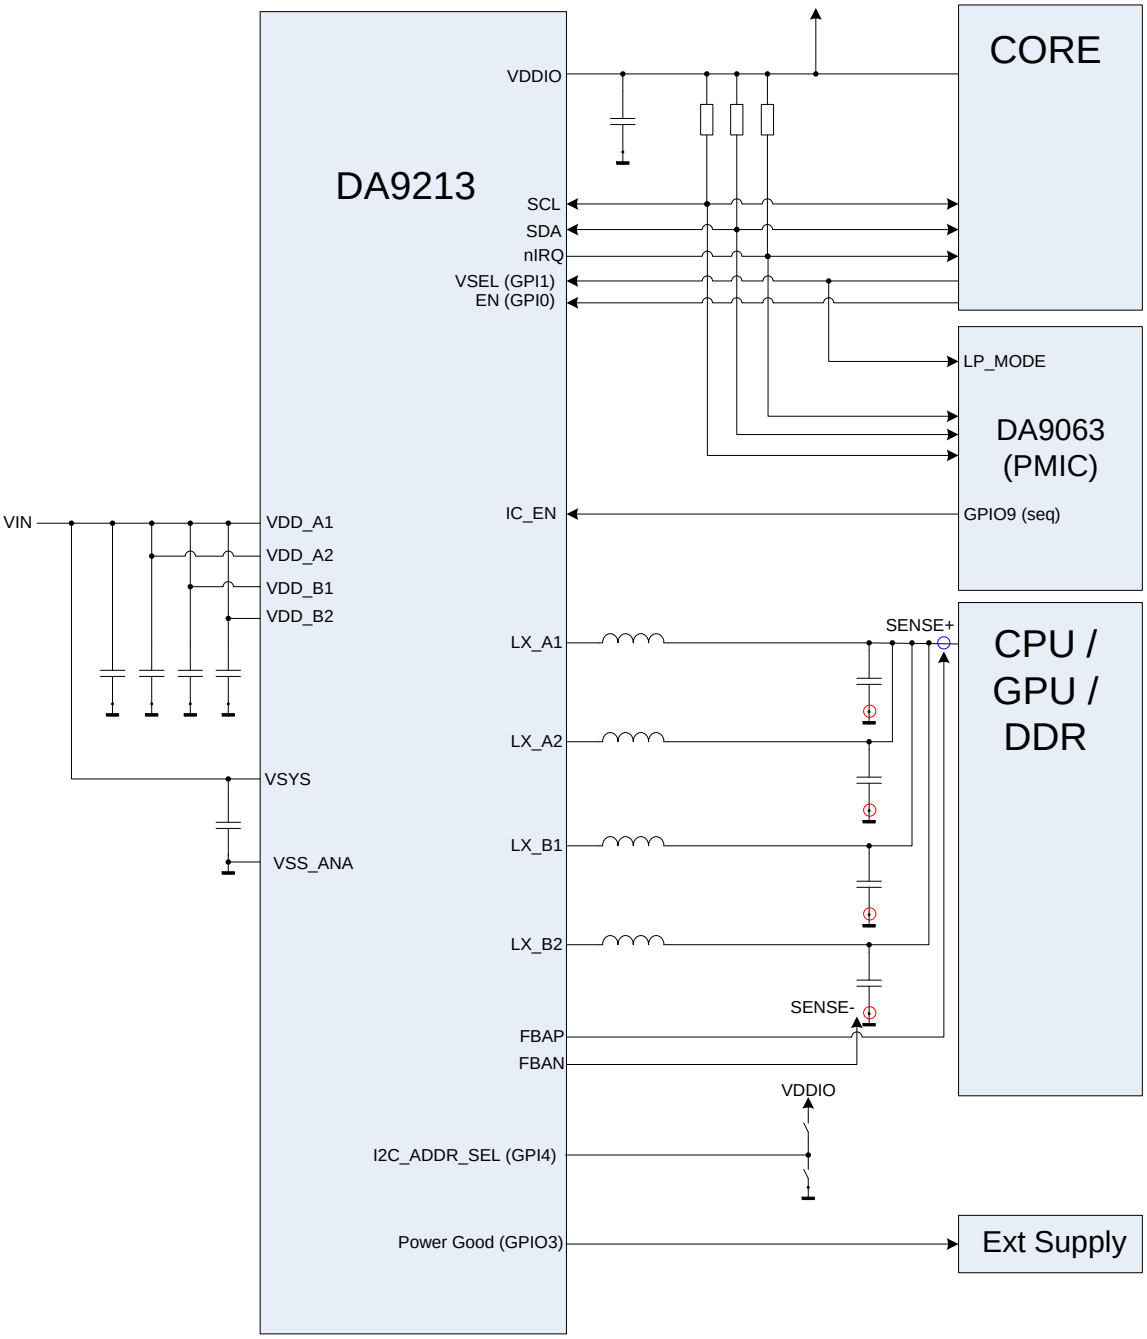


Figure 14: Typical Application of DA9213

Figure 14 shows a typical use case of DA9213 for the supply of CPU, GPU, or DDR rails. The IC is enabled and disabled by the main PMIC via IC_EN port as part of its sequencer. Once the IC is enabled, the CORE application processor enables the buck converter with the EN1 signal and manages the output voltage selection with the VSEL signal.

© 2017 Dialog Semiconductor

The VSEL signal can be shared between the main PMIC and the DA9213. Three GPI/GPIOs embedded in DA9213 are used in this case:

- GPIO2 signals the insertion of an external charger in the application (through interrupt to the host processor)
- GPIO3 indicates a power good condition, either to proceed with the power up sequence or to enable an external supply connected to the port
- GPI4 is used for the I^2C interface address hardware selection

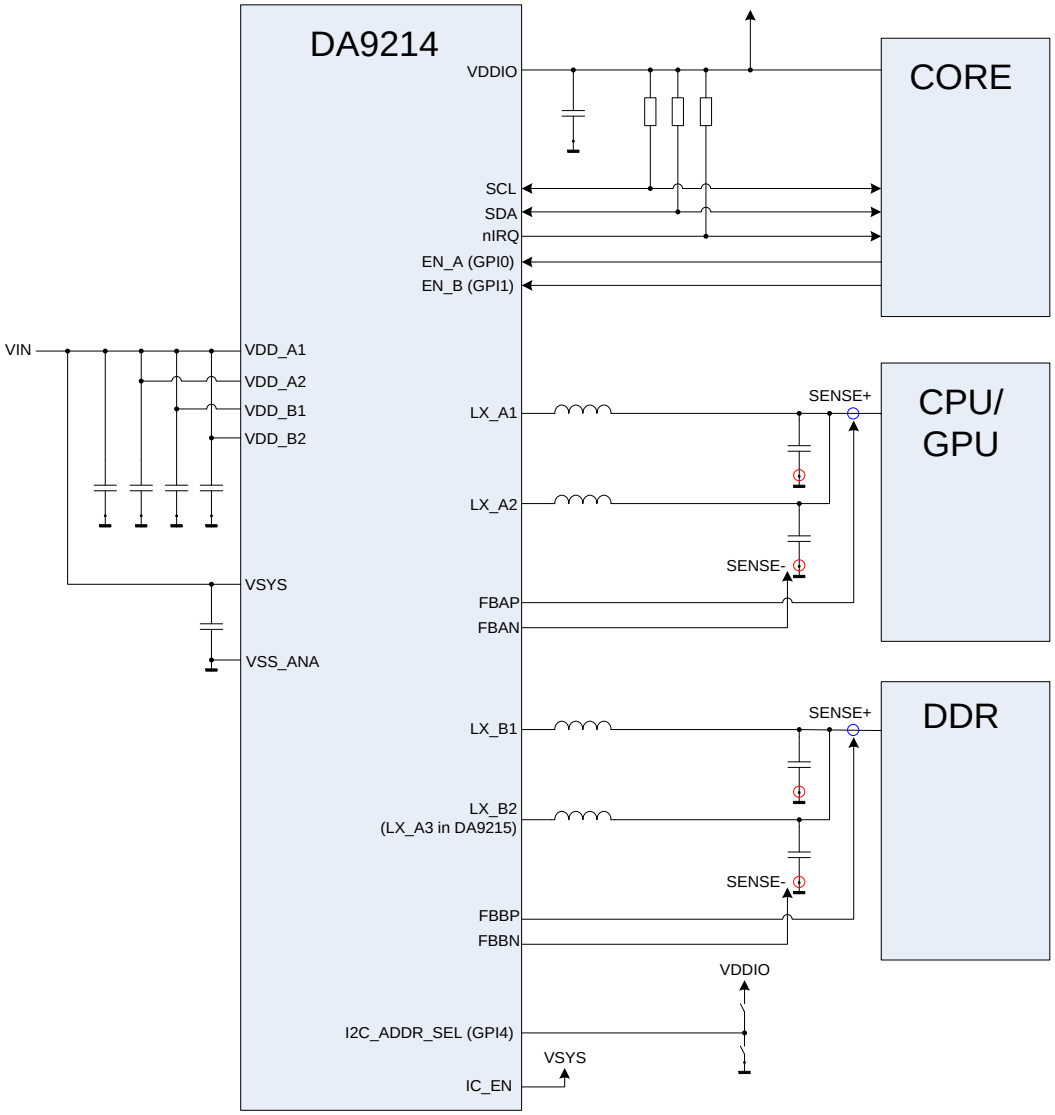


Figure 15: Typical Application of DA9214

Figure 15 shows a typical use case of DA9214 for the simultaneous supply of a CPU and a GPU rail. The IC is always enabled because IC_EN is shorted to the battery voltage. The CORE application processor enables and disables the CPU/GPU and the DDR individually via dedicated ports on DA9214.

© 2017 Dialog Semiconductor

7.1 DC_DC Buck Converter

DA9213 is a four phase 20 A high efficiency synchronous step down DVC regulator, operating at a high frequency of typically 3 MHz. It supplies an output voltage of typically 1.0 V for a CPU rail, configurable in the range 0.3 to 1.57 V, with high accuracy in steps of 10 mV.

DA9214 contains two buck converters, Buck A and Buck B, each capable of delivering 10 A.

DA9215 contains also two buck converters, Buck A capable of 15 A and Buck B capable of 5 A.

To improve the accuracy of the delivered voltage, each buck converter is able to support a differential sensing of the configured voltage directly at the point of load via dedicated positive and negative sense pins.

Both Buck A and Buck B have two voltage registers each. One defines the normal output voltage, while the other offers an alternative retention voltage. In this way different application power modes can easily be supported. The voltage selection can be operated either via GPI or via control interface to guarantee the maximum flexibility according to the specific host processor status in the application.

When a buck is enabled, its output voltage is monitored and a power good signal indicates that the buck output voltage has reached a level higher than the $V_{TH(PG)}$ threshold. The power good is lost when the voltage drops below $V_{TH(PG)}$ - $V_{HYS(PG)}$, which is the level at which the signal is de-asserted. The power good signaling should not be used in conjunction with fast start up rates, configured in BUCKx_UP_CTRL register fields and can be individually masked during DVC transitions using the PGA_DVC_MASK and PGB_DVC_MASK bits. For each of the buck converters the status of the power good indicator can be read back via I^2C from the PWRGOOD_A and PWRGOOD_B status bits. It can be also individually assigned to either GPIO2 or GPIO3 using BUCKA_PG_SEL and BUCKB_PG_SEL. For correct functionality, the GPIO ports need to be configured as output. An I^2C write in GPIOx_MODE can overwrite the internal configuration so that a new update will be automatically done only when the internal power good indicator changes status.

The buck converters are capable of supporting DVC transitions that occur:

- When the active and selected A-voltage or B-voltage is updated to a new target value.
- When the voltage selection is changed from the A-voltage to the B-voltage (or B-voltage to the A voltage) using VBUCKA_SEL and VBUCKB_SEL.

The DVC controller operates in Pulse Width Modulation (PWM) mode with synchronous rectification. When the host processor changes the output voltage, the voltage transition of each buck converter can be individually signaled with a READY signal routed to either GPIO2 or GPIO3. The port has to be configured as GPO and selected for the functionality via READYA_CONF or READYB_CONF. In contrast to the power good signal, the READY only informs the host processor about the completion of the digital DVC ramp without confirming that the target voltage has actually been reached.

The slew rate of the DVC transition is individually programmed for each buck converter at 10 mV per (4, 2, 1, or 0.5 µs) via control bit SLEW_RATE_A and SLEW_RATE_B.

The typical supply current is in the order of 8 mA per phase (quiescent current and charge/discharge current) and drops to <1 µA when the buck is turned off.

When the buck is disabled, a pull down resistor (typically 150 Ω) for each phase is activated depending of the value stored in register bits BUCKA_PD_DIS and BUCKB_PD_DIS. Phases disabled using PHASE_SEL_A and PHASE_SEL_B will not have any pull down. The pull down resistor is always disabled at all phases when DA9213, DA9214, and DA9215 are OFF.

 © 2017 Dialog Semiconductor

7.1.1 Switching Frequency

The switching frequency is chosen to be high enough to allow the use of a small 0.22 µH inductor (see a complete list of coils in the Application Information, Section 9). The buck switching frequency can be tuned using register bit OSC_TUNE. The internal 6 MHz oscillator frequency is tuned in steps of 180 kHz. This impacts the buck converter frequency in steps of 90 kHz and helps to mitigate possible disturbances to other HF systems in the application.

7.1.2 Operation Modes and Phase Selection

The buck converters can operate in synchronous PWM mode and PFM mode. The operating mode is selected using register bits BUCKA_MODE and BUCKB_MODE.

An automatic phase shedding can be enabled for each buck converter in PWM mode via PH_SH_EN_A, PH_SH_EN_B, thereby automatically reducing or increasing the number of active phases depending on the output load current. For DA9214 the phase shedding will automatically change between 1-phase and 2-phase operation at a typical current of 2.0 A. For DA9213 the phase shedding will automatically change between 1-phase and 4-phase operation at a typical current of 2.5 A. The PHASE_SEL_A and PHASE_SEL_B register fields limit the maximum number of active phases under any conditions.

If the automatic operation mode is selected on BUCKA_MODE or BUCKB_MODE, the buck converters will automatically change between synchronous PWM mode and PFM depending on the load current. This improves the efficiency of the converters across the whole range of output load currents.

7.1.3 Output Voltage Selection

The switching converter can be configured using either a 2-WIRE or a 4-WIRE interface. For security reasons, the re-programming of registers that can cause damage when wrongly programmed (for example, the voltage settings) can be disabled by asserting the control V_LOCK. When V_LOCK is asserted, reprogramming the registers 0xD0 to 0x14F from control interfaces is disabled.

For each buck converter two output voltages can be pre-configured inside registers VBUCKA_A and VBUCKB_A, and registers VBUCKA_B and VBUCKB_B. The output voltage can be selected by either toggling register bits VBUCKA_SEL and VBUCKB_SEL or by re-programming the selected voltage control register. Both changes will result into ramped voltage transitions, during which the READY signal is asserted. After being enabled, the buck converter will by default use the register settings in VBUCKA_A and VBUCKB_A unless the output voltage selection is configured via the GPI port.

If “00” has been selected in BUCKA_MODE or BUCKB_MODE, A-/B- voltage selection registers VBUCKx_x control the operation of the PWM and PFM modes.

Regardless of the values programmed in the VBUCKx_A and VBUCKx_B registers, the registers VBUCKA_MAX, VBUCKB_MAX will individually limit the output voltage that can be set for each of the buck converters.

The buck converter provides an optional hardware enable/disable via selectable GPI, and configured via control register bits BUCKA_GPI and BUCKB_GPI. A change of the output voltage from the state of a GPI is enabled via control register bits VBUCKA_GPI and VBUCKB_GPI. After detecting a rising or falling edge at the related GPIs, DA9213, DA9214, and DA9215 will configure the buck converters according to their status.

In addition to selecting between the A/B voltages, a track mode can be activated for Buck A to set the output voltage. In the DA9213, the track mode is applied to the 4-phase buck converter. This feature can be enabled on GPI0 via GPI0_PIN. The output voltage will be configured to follow the value applied at a selected GPI pin. The voltage applied at GPI0 must be in the same range as the nominal

 © 2017 Dialog Semiconductor

output voltage selectable for the buck rail (see VBUCKA_A and VBUCKA_B registers). In Track Mode, only single ended remote sensing is possible.

In Track Mode, the content of the VBUCKA_SEL bit is ignored, as well as VBUCKA_A and VBUCKA_B bits. They will become active again once the voltage track mode is disabled. The GPI0 does not generate any event in this case.

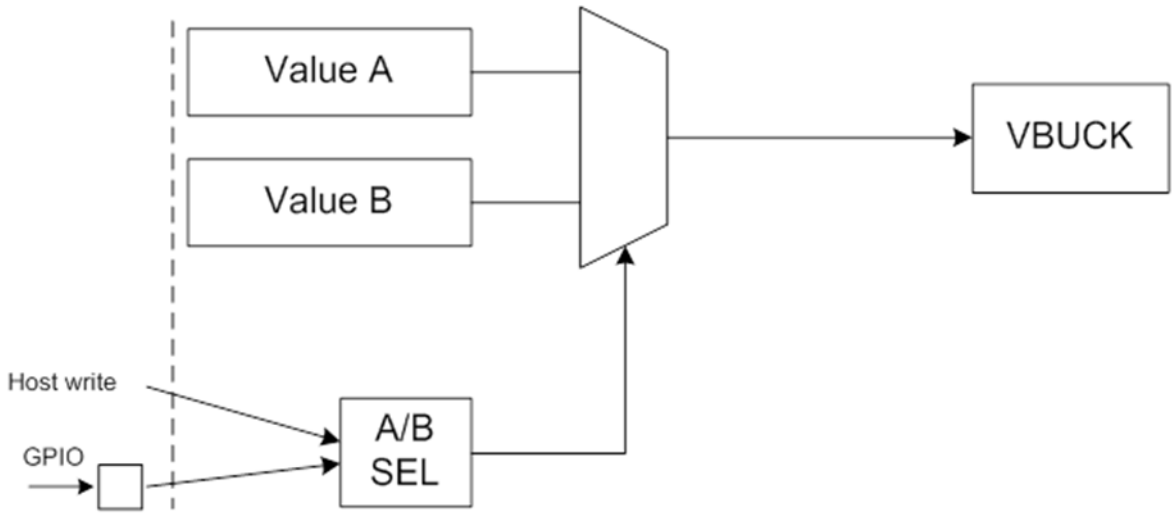


Figure 16: Concept of Control of the Buck's Output Voltage

7.1.4 Soft Start-Up

To limit in-rush current from VSYS, the buck converters can perform a soft start after being enabled. The start-up behavior is a compromise between acceptable inrush current from the battery and turn on time. In DA9213, DA9214, and DA9215, different ramp times can be individually configured for each buck converter on register BUCKA_UP_CTRL and BUCKB_UP_CTRL. Rates higher than 20 mV/µs may produce overshoot during the start-up phase, so they should be considered carefully.

A ramped power down can be selected on register bits BUCKA_DOWN_CTRL and BUCKB_DOWN_CTRL. When no ramp is selected, the output node will be discharged only by the pull down resistor, if enabled via BUCKA_PD_DIS and BUCKB_PD_DIS.

7.1.5 Current Limit

The integrated current limit is meant to protect DA9213, DA9214, and DA9215's power stages and the external coil from excessive current. The bucks' current limit should be configured to be at least 40 % higher than the required maximum continuous output current.

When reaching the current limit, each buck converter generates an event and an interrupt to the host processor unless the interrupt has been masked using the OCx_MASK controls. These OCA_MASK and OCB_MASK control bits can be used to mask the generation of over current events during DVC transitions. An extra masking time as defined in OCx_MASK will be automatically added to the DVC interval after the DVC has finished in order to ensure that the possible high current levels needed for DVC do not influence the event generation.

© 2017 Dialog Semiconductor

7.1.6 Variable VOUT above 1.57 V

The whole product family is also available with an adjustable output voltage up to 4.3V. A resistive divider from VOUT to FBAN (or FBBN) can be used to set the output voltage higher than 1.57 V, see Figure 17. The specific variant DA921_S is optimized for variable output voltage and the VREF on FBAN (or FBBN) is set to 1.2 V.

The value of the output voltage V_{OUT} is set by the selection of the resistive divider shown in equation 1. The total resistance of the divider resistors (R1+R2) should be less than 40 kΩ.

$$VOUT = \left(1 + \frac{R1}{R2}\right) \cdot VREF$$

Equation 1

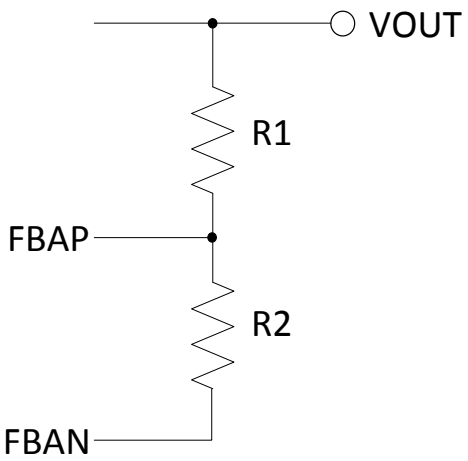


Figure 17: Resistive Divider from VOUT to FBAN

For example, to program the output voltage VOUT to 1.8 V, suggest 10 kΩ on R1 and 20 kΩ on R2.

Note 1 The resistors need to be properly selected since the output voltage accuracy will be directly affected by any errors on the resistors. The voltage across FBAP and FBAN (VREF) is guaranteed, but not the output voltage accuracy.

CAUTION

The followings are important notes that need to be considered before using resistive divider on DA9213, DA9214, and DA9215:

1. Please contact your region's Dialog representative when adopting the resistive divider technique. Dialog need to prepare a special OTP because incorrect OTP settings may result in a different output voltage than expected.
2. The voltage difference between input voltage and output voltage needs to be: above 1.2 V, VIN-VOUT > 1.2 V.
3. The total resistance (R1+R2) is less than 40 kΩ.
4. It is recommended that the device is operated in PWM mode only.

 © 2017 Dialog Semiconductor

7.2 Ports Description

This section describes the functionality of each input / output port.

7.2.1 VDDIO

VDDIO is an independent IO supply rail input to DA9213, DA9214, and DA9215 that can be assigned to the power manager interface and to the GPIOs (see control PM_IF_V and GPI_V). The rail assignment determines the IO voltage levels and logical thresholds (see also the Digital I/O Characteristics in Table 7).

An integrated under voltage lockout circuit for the VDDIO prevents internal errors by disabling the I^2C communication when the voltage drops below V_{ULO_IO}. In that case the buck converters are also disabled and cannot be re-enabled (even via input port) until the VDDIO under voltage condition has been resolved. At the exit of the VDDIO under voltage condition an event E_UVLO_IO is generated and the nIRQ line is driven active if the event is not masked.

The VDDIO under voltage circuit monitors voltages relative to a nominal voltage of 1.8V. If a different rail voltage is being used, the under-voltage circuit can be disabled via UVLO_IO_DIS.

Note that the maximum speed at 4-WIRE interface is only available if the selected supply rail is greater than 1.6 V.

7.2.2 IC_EN

IC_EN is a general enable signal for DA9213, DA9214, and DA9215, turning on and off the internal circuitry (for example, the reference, the digital core, etc.). Correct control of this port has a direct impact on the quiescent current of the whole application. A low level of IC_EN allows the device to reach the minimum quiescent current. The voltage at this pin is continuously sensed by a dedicated analogue circuit.

The host processor will be allowed to start the communication with DA9213, DA9214, and DA9215 through the Control Interface and, for example to turn on the buck converters, a delay time of t_{EN} after assertion of the IC_EN pin. If the bucks are enabled via OTP (see BUCKA_EN and BUCKB_EN controls), they will start up automatically after assertion of IC_EN.

The IC_EN activation threshold is defined with a built in hysteresis to avoid glitching transitions that take place with unstable rising or falling edges.

7.2.3 nIRQ

The nIRQ port indicates that an interrupt causing event has occurred and that the event/status information is available in the related registers. The nIRQ is an output signal that can either be push pull or open drain (selected via IRQ_TYPE). If an active high IRQ signal is required, it can be achieved by asserting control IRQ_LEVEL (recommended for push-pull mode).

Examples of this type of information can be critical temperature and voltage, fault conditions, status changes at GPI ports, and so forth. The event registers hold information about the events that have occurred. Events are triggered by a status change at the monitored signals. When an event bit is set, the nIRQ signal is asserted unless this interrupt is masked by a bit in the IRQ mask register. The nIRQ will not be released until all event registers with asserted bits have been read and cleared. New events that occur during reading an event register are held until the event register has been cleared, ensuring that the host processor does not miss them.

 © 2017 Dialog Semiconductor

7.2.4 GPIO Extender

DA9213, DA9214, and DA9215 include a GPIO extender that offers up to five 5 V-tolerant general purpose input/output ports. Each port is controlled via registers from the host processor.

The GPIO3 and GPI4 ports are pin-shared with the 4-WIRE Control Interface. For instance, if GPIO3_PIN = 01, GPI4_PIN = 01 (Interface selected), the GPIO3 and GPI4 ports will be exclusively dedicated to output and chip select signaling for 4-WIRE purposes. If the alternative function is selected, all GPIOs configuration as per registers 0x58 to 0x5A and 0x145 will be ignored.

GPIs are supplied from the internal rail VDDCORE or VDDIO (selected via GPI_V) and can be configured to be active high or active low (selected via GPIOx_TYPE). The input signals can be debounced or directly change the state of the assigned status register GPIx to high or low, according to the setting of GPIOx_MODE. The debouncing time is configurable via control DEBOUNCE (10 ms default).

Whenever the status has changed to its configured active state (edge sensitive), the assigned event register is set and the nIRQ signal is asserted (unless this nIRQ is masked, see also Figure 18).

Whenever DA9213, DA9214, and DA9215 is enabled and enters ON mode (also when enabled changing the setting of GPIOx_PIN) the GPI status bits are initiated towards their configured passive state. This ensures that already active signals are detected, and that they create an event immediately after the GPI comparators are enabled.

The buck enable signal (BUCKx_EN) can be controlled directly via a GPI, if so configured in the BUCKA_GPI and BUCKB_GPI registers. If it is required that GPI ports do not generate an event when configured for the HW control of the switching regulator, the relative mask bit should be set.

GPIs can alternatively be selected to toggle the VBUCKA_SEL and VBUCKB_SEL from rising and falling edges at these inputs. Apart from changing the regulator output voltage this also provides hardware control of the regulator mode (normal/low power mode) from the settings of BUCKA_SL_A, BUCKA_SL_B, BUCKB_SL_A, and BUCKB_SL_B (enabled if BUCKA_MODE or BUCKB_MODE = '00').

All GPI ports have the additional option of activating a 100 kΩ pull-down resistor via GPIOx_PUPD, which ensures a well-defined level in case the input is not actively driven.

If enabled via ADDR_SEL_CONF, the I^2C address selection can be assigned to a specific GPI. An active voltage level at the selected GPI configures the slave address of DA9213, DA9214, and DA9215 to IF_BASE_ADDR1 while a passive voltage level configures the slave address to IF_BASE_ADDR2. If no GPI is selected then the IF_BASE_ADDR1 is automatically used.

If defined as an output, GPIOs can be configured to be open-drain or push-pull. If configured as push pull, the supply rail is VDDIO. By disabling the internal 120 kΩ pull-up resistor in open-drain mode, the GPO can also be supplied from an external rail. The output state will be assigned as configured by the GPIO register bit GPIOx_MODE.

A specific power good port for each of the buck converters can be configured via BUCKA_PG_SEL and BUCKB_PG_SEL. The respective port must be configured as GPO for correct operation. If assigned to the same GPO, it is necessary that the power good indicators for Buck A and Buck B are both active (supply voltages in range) to assert the overall power good. The signal will be released as soon as one of the single power good signals is not active (that is, at least one supply is out of range).

The power good signaling should not be used in conjunction with fast start up rates, configured in BUCKx_UP_CTRL register fields.

Once enabled via RELOAD_FUNC_EN the GPIO0 can be used as input port to operate a partial OTP download. When the input level is changed to active, the registers 0x5D, 0x5E, 0xD1 to 0xDA are updated to their OTP default. This allows a complete buck re-configuration that resets all the changes done to those registers previously (soft reset). If the buck should be kept on during the soft

 © 2017 Dialog Semiconductor

reset, the OTP values for the enable bits should be asserted because they are also part of the re-load.

Whenever the GPIO unit is off (POR or OFF Mode) all ports are configured as open drain active high (pass device switched off, high impedance state). When leaving POR the pull-up or pull-down resistors will be configured from register GPIOx_PUPD.

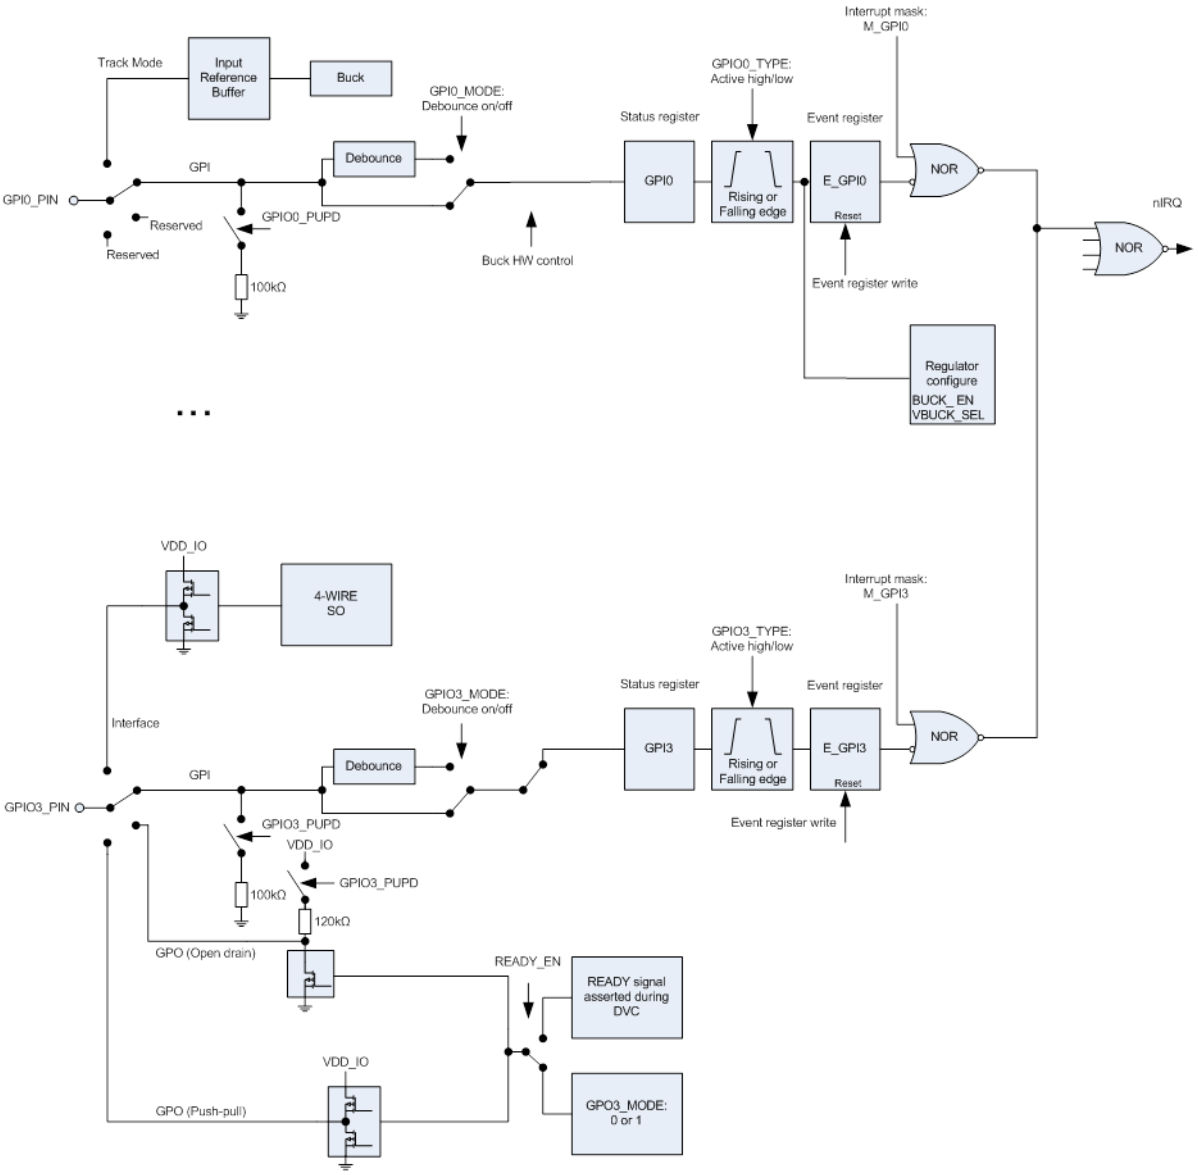


Figure 18: GPIO Principle of Operation (example paths)

© 2017 Dialog Semiconductor

7.3 Operating Modes

7.3.1 ON Mode

DA9213, DA9214, and DA9215 are in ON Mode when the IC_EN port is higher than EN_ON and the supply voltage is higher than $V_{TH(UVLO)(VDD)}$. Once enabled, the host processor can start the communication with DA9213, DA9214, and DA9215 via Control Interface after the t_{EN} delay needed for internal circuit start up.

If BUCKA_EN or BUCKB_EN is asserted when DA9213, DA9214, and DA9215 is in ON Mode the power up of the related buck converter is initiated. If the bucks are controlled via GPI, the level of the controlling ports is checked when entering ON mode, so that an active level will immediately have effect on the buck. If BUCKA_EN or BUCKB_EN are not asserted and all controlling GPI ports are inactive, the buck converter will stay off with the output pull down resistor enabled/disabled according to the setting of BUCKA_PD_DIS and BUCKB_PD_DIS.

7.3.2 OFF Mode

DA9213, DA9214, and DA9215 are in OFF Mode when the IC_EN port is lower than EN_OFF. In OFF Mode, the bucks are always disabled and the output pull down resistors are disabled independently of BUCKA_PD_DIS and BUCKB_PD_DIS. All I/O ports of DA9213, DA9214, and DA9215 are configured as high impedance.

7.4 Control Interfaces

All the features of DA9213, DA9214, and DA9215 can be controlled by SW through a serial control interfaces. The communication is selectable to be either a 2-WIRE (I^2C compliant) or a 4-WIRE connection (SPI compliant) via control IF_TYPE, which will be selected during the initial OTP read. If 4-WIRE is selected, the GPIO3 and GPI4 are automatically configured as interface pins. Data is shifted into or out of DA9213, DA9214, and DA9215 under the control of the host processor, which also provides the serial clock. In a normal application case the interface is only configured once from OTP values, which are loaded during the initial start-up of DA9213, DA9214, and DA9215.

DA9213, DA9214, and DA9215 reacts only on read/write commands where the transmitted register address (using the actual page bits as a MSB address range extensions) is within 0x50 to 0x67, 0xD0 to DF, 0x140 to 0x14F and (read only) 0x200 to 0x27F. Host access to registers outside these ranges will be ignored. This means there will be no acknowledge after receiving the register address in 2-WIRE Mode, and SO stays HI-Z in 4-WIRE Mode. During debug and production modes write access is available to page 4 (0x200 to 0x27F). DA9213, DA9214, and DA9215 will react only on write commands where the transmitted register address is 0x00, 0x80, 0x100 to0x106. The host processor must read the content of those registers before writing, thereby changing only the bit fields that are not marked as reserved (the content of the read back comes from the compatible PMIC, for example DA9063).

If the STAND_ALONE bit is asserted (OTP bit), DA9213, DA9214, and DA9215 will also react to read commands.

7.4.1 4-WIRE Communication

In 4-WIRE Mode the interface uses a chip-select line (nCS/nSS), a clock line (SK), data input (SI) and data output line (SO).

The DA9213, DA9214, and DA9215 register map is split into four pages that each contain up to 128 registers. The register at address zero on each page is used as a page control register. The default active page after turn on includes registers 0x50 to 0x6F. Writing to the page control register changes the active page for all subsequent read/write operations unless an automatic return to page 0 was selected by asserting bit REVERT. Unless the REVERT bit was asserted after modifying the

 © 2017 Dialog Semiconductor

active page, it is recommended to read back the page control register to ensure that future data exchange is accessing the intended registers.

All registers outside the DA9213, DA9214, and DA9215 range are write only, that is, the DA9213, DA9214, and DA9215 will not answer to a read command and the data bus is tristate (they are implicitly directed to DA9063). In particular the information contained in registers 0x105 and 0x106 is used by DA9213, DA9214, and DA9215 to configure the control interface. They must be the same as the main PMIC (DA9063), so that a write to those registers configures both the main PMIC and DA9213, DA9214, and DA9215 at the same time. The default OTP settings also need to be identical for a correct operation of the system.

The 4-WIRE interface features a half-duplex operation, that is, data can be transmitted and received within a single 16-bit frame at enhanced clock speed (up to 14 MHz). It operates at the clock frequencies provided by the host.

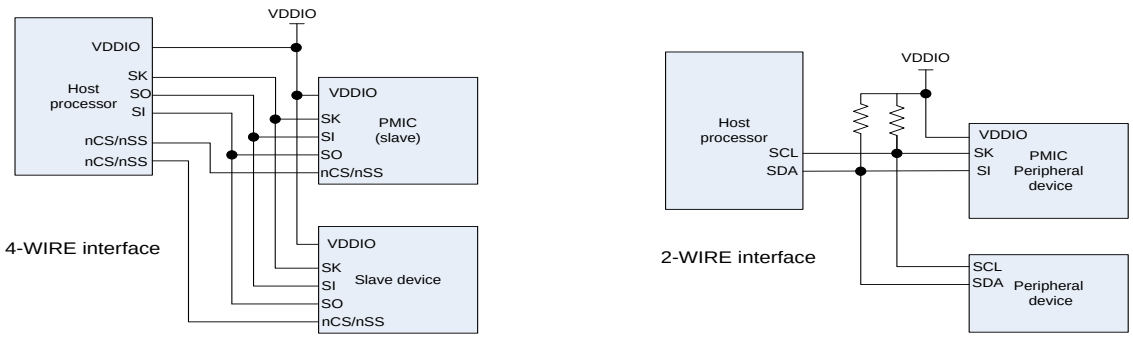


Figure 19: Schematic of 4-WIRE and 2-WIRE Power Manager Bus

A transmission begins when initiated by the host. Reading and writing is accomplished by the use of an 8-bit command, which is sent by the host prior to the exchanged 8-bit data. The byte from the host begins shifting in on the SI pin under the control of the serial clock SK provided from the host. The first seven bits specify the register address (0x01 to 0x07) that will be written or read by the host. The register address is automatically decoded after receiving the seventh address bit. The command word ends with an R/W bit, which together with the control bit R/W_POL specifies the direction of the following data exchange. During register writing the host continues sending out data during the following eight SK clocks. For reading, the host stops transmitting and the 8-bit register is clocked out of DA9213, DA9214, and DA9215 during the consecutive eight SK clocks of the frame. Address and data are transmitted with MSB first. The polarity (active state) of nCS is defined by control bit nCS_POL. nCS resets the interface when inactive and it has to be released between successive cycles.

The SO output from DA9213, DA9214, and DA9215 is normally in high-impedance state and active only during the second half of read cycles. A pull-up or pull-down resistor may be needed at the SO line if a floating logic signal can cause unintended current consumption inside other circuits.

Table 10: 4-WIRE Clock Configurations

CPHA Clock Polarity	CPOL Clock Phase	Output Data is Updated at SK Edge	Input Data is Registered at SK Edge
0 (idle low)	0	Falling	Rising
0 (idle low)	1	Rising	Falling
1 (idle high)	0	Rising	Falling
1 (idle high)	1	Falling	Rising

© 2017 Dialog Semiconductor

DA9213, DA9214, and DA9215's 4-WIRE interface offers two further configuration bits. Clock polarity (CPOL) and clock phase (CPHA) define when the interface will latch the serial data bits. CPOL determines whether SK idles high (CPOL = 1) or low (CPOL = 0). CPHA determines on which SK edge data is shifted in and out. With CPOL = 0 and CPHA = 0, DA9213, DA9214, and DA9215 latch data on the SK rising edge. If the CPHA is set to 1 the data is latched on the SK falling edge. CPOL and CPHA states allow four different combinations of clock polarity and phase. Each setting is incompatible with the other three. The host and DA9213, DA9214, and DA9215 must be set to the same CPOL and CPHA states to communicate with each other.

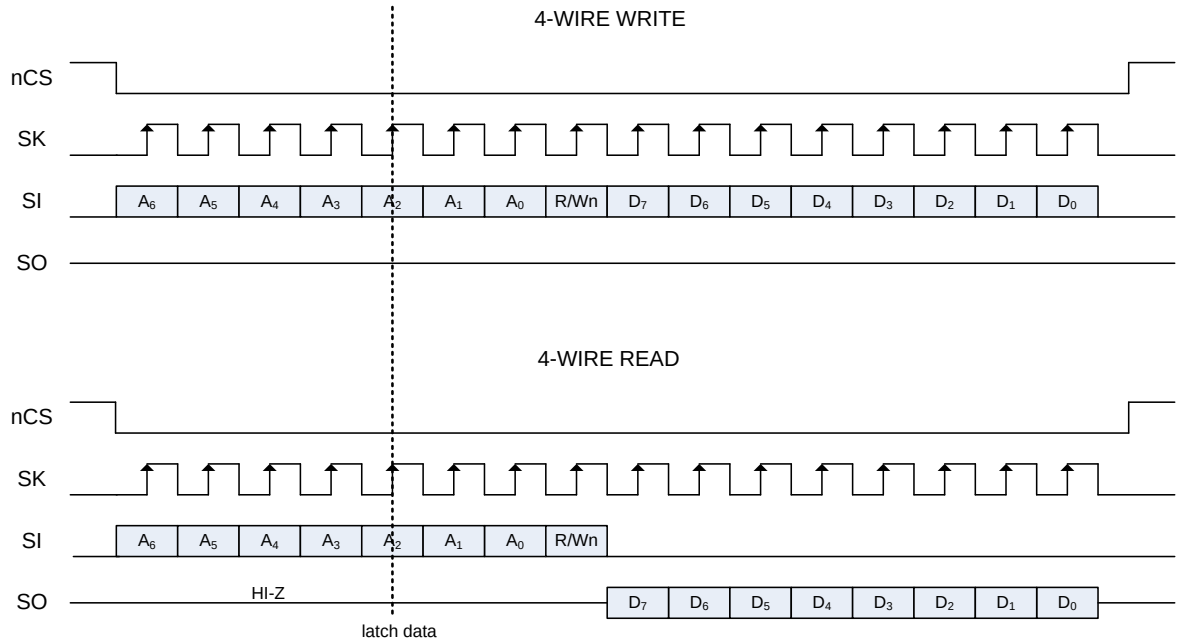


Figure 20: 4-WIRE Host Write and Read Timing (nCS_POL = '0', CPOL = '0', CPHA = '0')

© 2017 Dialog Semiconductor

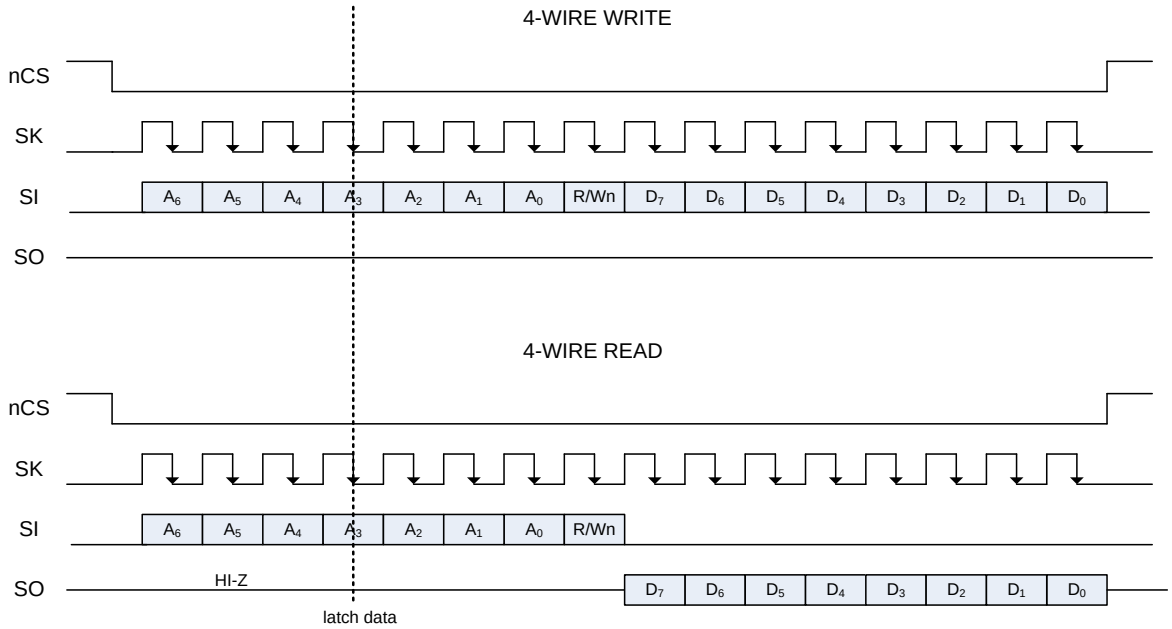


Figure 21: 4-WIRE Host Write and Read Timing (nCS_POL= '0', CPOL = '0', CPHA = '1')

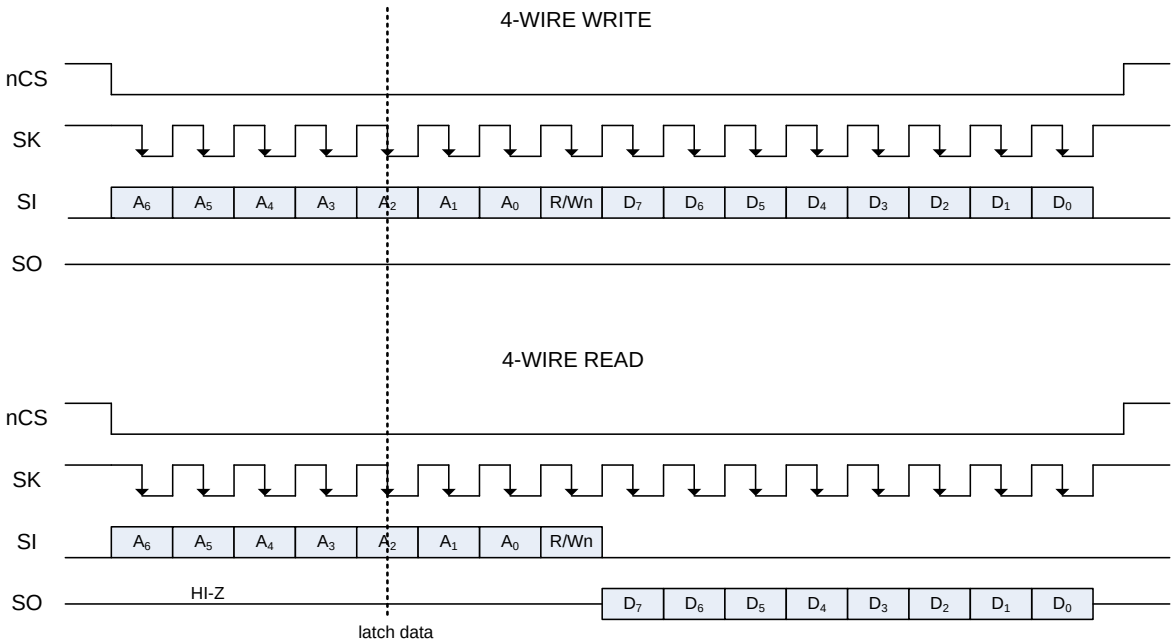


Figure 22: 4-WIRE Host Write and Read Timing (nCS_POL = '0', CPOL = '1', CPHA = '0')

© 2017 Dialog Semiconductor

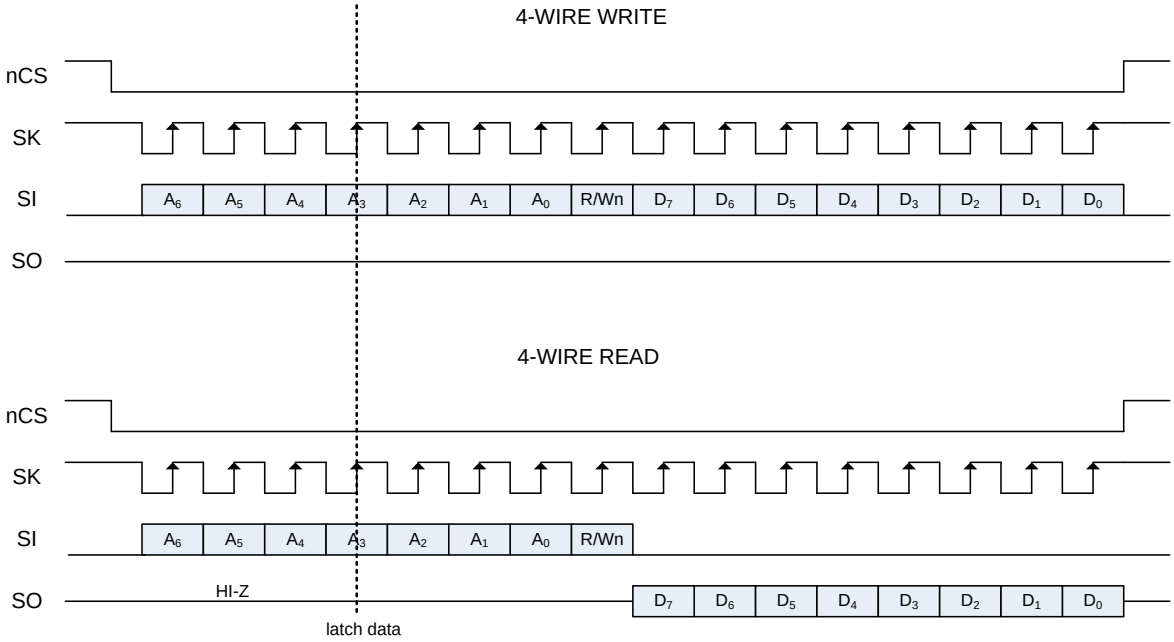


Figure 23: 4-WIRE Host Write and Read Timing (nCS_POL = '0', CPOL = '1', CPHA = '1')

© 2017 Dialog Semiconductor

Table 11: 4-WIRE Interface Summary

Parameters		
Signal lines	nCS	Chip select
	SI Serial input data	Master out Slave in
	SO Serial output data	Master in Slave out
	SK	Transmission clock
Interface	Push-pull with tristate	
Supply voltage	Selected from VDDIO	1.6 V to 3.3 V
Data rate	Effective read/write data	Up to 7 Mbps
Transmission	Half-duplex	MSB first
	16-bit cycles	7-bit address, 1-bit read/write, 8-bit data
Configuration	CPOL	Clock polarity
	CPHA	Clock phase
	nCS_POL	nCS is active low/high

Note 1 Reading the same register at high clock rates directly after writing it does not guarantee a correct value. It is recommended to keep a delay of one frame until re-accessing a register that has just been written (for example, by writing/reading another register address in-between).

7.4.2 2-WIRE Communication

The IF_TYPE bit in the INTERFACE2 register can be used to configure the DA9213, DA9214, and DA9215 control interface as a 2-WIRE serial data interface. In this case the GPIO3 and GPI4 are free for regular input/output functions. DA9213, DA9214, and DA9215 has a configurable device write address (default: 0xD0) and a configurable device read address (default: 0xD1). See control IF_BASE_ADDR1 for details of configurable addresses. The ADDR_SEL_CONF bit is used to configure the device address as IF_BASE_ADDR1 or IF_BASE_ADDR2 depending on the voltage level applied at a configurable GPI port (see Section 7.2.4).

The SK port functions as the 2-WIRE clock and the SI port carries all the power manager bidirectional 2-WIRE data. The 2-WIRE interface is open-drain supporting multiple devices on a single line. The bus lines have to be pulled HIGH by external pull-up resistors (in the 2 kΩ to 20 kΩ range). The attached devices only drive the bus lines LOW by connecting them to ground. As a result two devices cannot conflict if they drive the bus simultaneously. In standard/fast mode the highest frequency of the bus is 400 kHz. The exact frequency can be determined by the application and does not have any relation to the DA9213, DA9214, and DA9215 internal clock signals. DA9213, DA9214, and DA9215 will follow the host clock speed within the described limitations, and does not initiate any clock arbitration or slow down. An automatic interface reset can be triggered using control 2WIRE_TO if the clock signal stops to toggle for more than 35 ms.

The interface supports operation compatible to Standard, Fast, Fast-Plus and High Speed mode of the I^2C-bus specification Rev 4. Operation in high speed mode at 3.4 MHz requires mode changing in order to set spike suppression and slope control characteristics to be compatible with the I^2C-bus specification. The high speed mode can be enabled on a transfer by transfer basis by sending the master code (0000 1XXX) at the beginning of the transfer. DA9213, DA9214, and DA9215 do not make use of clock stretching, and deliver read data without additional delay up to 3.4 MHz.

Alternatively, PM_IF_HSM configures the interface to use high speed mode continuously. In this case, the master code is not required at the beginning of every transfer. This reduces the communication overhead on the bus but limits the slaves attachable to the bus to compatible devices.

© 2017 Dialog Semiconductor

The communication on the 2-WIRE bus always takes place between two devices, one acting as the master and the other as the slave. The DA9213, DA9214, and DA9215 will only operate as a SLAVE.

In contrast to the 4-WIRE mode, the 2-WIRE interface has direct access to two pages of the register map (up to 256 addresses). The register at address zero on each page is used as a page control register (with the 2-WIRE bus ignoring the LSB of control REG_PAGE). Writing to the page control register changes the active page for all subsequent read/write operations unless an automatic return to page 0 was selected by asserting control REVERT. Unless REVERT was asserted after modifying the active page, it is recommended to read back the page control register to ensure that future data exchange is accessing the intended registers.

In 2-WIRE operation DA9213, DA9214, and DA9215 offer an alternative way to access register page 2 and page 3. It removes the need for preceding page selection writes by incrementing the device write/read address by one (default 0xD2/0xD3) for any direct access of page 2 and page 3 (page 0 and 1 access requires the basic write/read device address with the MSB of REG_PAGE to be '0').

7.4.3 Details of the 2-WIRE Control Bus Protocol

All data is transmitted across the 2-WIRE bus in groups of eight bits. To send a bit the SDA line is driven towards the intended state while the SCL is LOW (a low on SDA indicates a zero bit). Once the SDA has settled, the SCL line is brought HIGH and then LOW. This pulse on SCL clocks the SDA bit into the receiver's shift register.

A two-byte serial protocol is used containing one byte for address and one byte data. Data and address transfer are transmitted MSB first for both read and write operations. All transmissions begin with the START condition from the master while the bus is in IDLE state (the bus is free). It is initiated by a high to low transition on the SDA line while the SCL is in the high state (a STOP condition is indicated by a low to high transition on the SDA line while the SCL is in the high state).

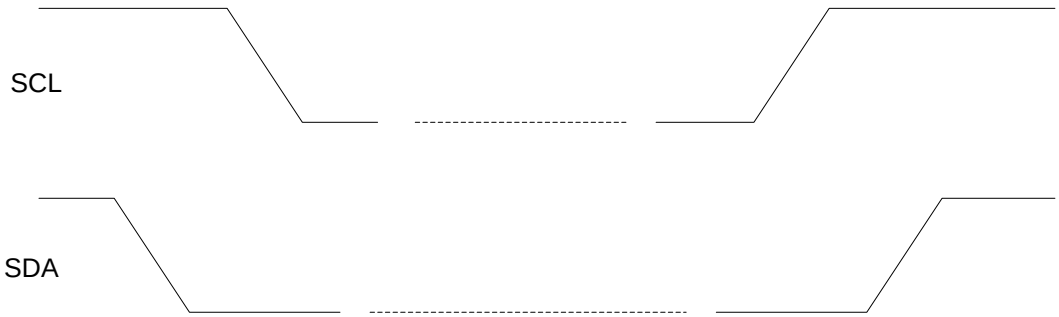


Figure 24: Timing of 2-WIRE START and STOP Condition

The 2-WIRE bus is monitored by DA9213, DA9214, and DA9215 for a valid SLAVE address whenever the interface is enabled. It responds immediately when it receives its own slave address. The acknowledge is done by pulling the SDA line low during the following clock cycle (white blocks marked with 'A' in Figure 25 to Figure 29).

The protocol for a register write from master to slave consists of a start condition, a slave address with read/write bit and the 8-bit register address followed by eight bits of data terminated by a STOP condition. DA9213, DA9214, and DA9215 respond to all bytes with Acknowledge. This is illustrated in Figure 25.

© 2017 Dialog Semiconductor

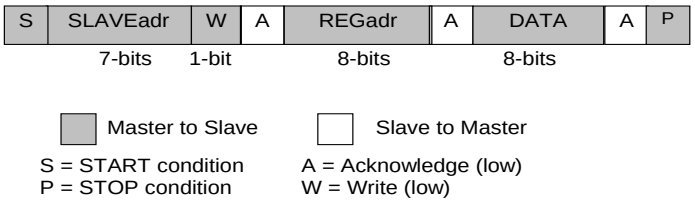


Figure 25: 2-WIRE Byte Write (SDA Line)

When the host reads data from a register it first has to write to DA9213, DA9214, and DA9215 with the target register address and then read from DA9213, DA9214, and DA9215 with a Repeated START or alternatively a second START condition. After receiving the data, the host sends No Acknowledge and terminates the transmission with a STOP condition. This is illustrated in Figure 26.

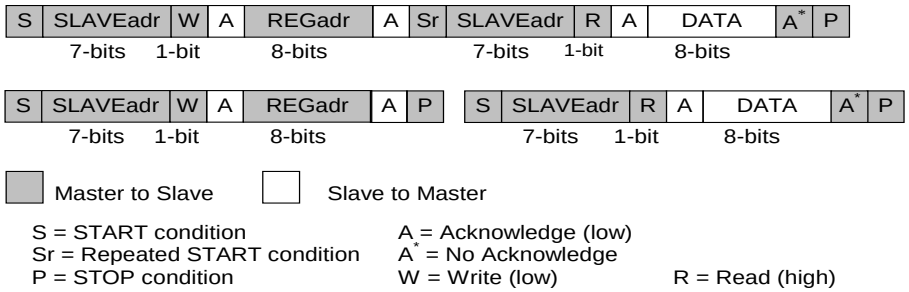


Figure 26: Examples of 2-WIRE Byte Read (SDA Line)

Consecutive (page) read out mode is initiated from the master by sending an Acknowledge instead of Not acknowledge after receipt of the data word. The 2-WIRE control block then increments the address pointer to the next 2-WIRE address and sends the data to the master. This enables an unlimited read of data bytes until the master sends a Not acknowledge directly after the receipt of data, followed by a subsequent STOP condition. If a non-existent 2-WIRE address is read out, the DA9213, DA9214, and DA9215 will return code zero. This is illustrated in Figure 27.

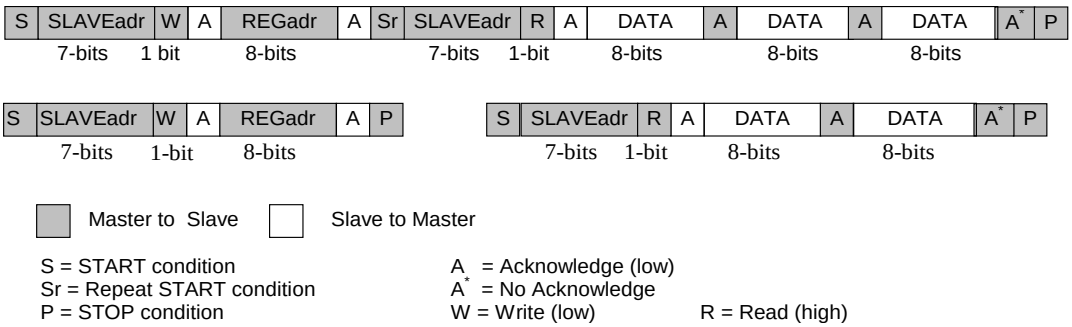


Figure 27: Examples of 2-WIRE Page Read (SDA Line)

Note that the slave address after the Repeated START condition must be the same as the previous slave address.

Consecutive (page) write mode is supported if the Master sends several data bytes following a slave register address. The 2-WIRE control block then increments the address pointer to the next 2-WIRE address, stores the received data and sends an Acknowledge until the master sends the STOP condition. This is illustrated in Figure 28.

© 2017 Dialog Semiconductor

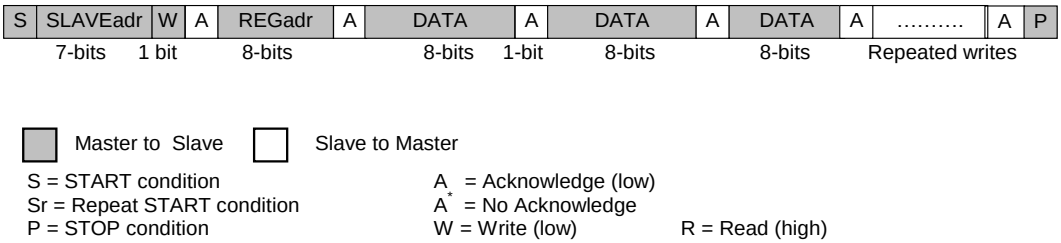


Figure 28: 2-WIRE Page Write (SDA Line)

Via control WRITE_MODE an alternate write mode can be configured. Register addresses and data are sent in alternation like in Figure 29 to support host repeated write operations that access several non-consecutive registers. Data will be stored at the previously received register address.

An update of WRITE_MODE cannot be done without interruption within a transmission frame. Thus, if not previously selected or not set as OTP default, the activation of Repeated Write must be done with a regular write on WRITE_MODE followed by a stop condition. The next frame after a start condition can be written in Repeated Write.

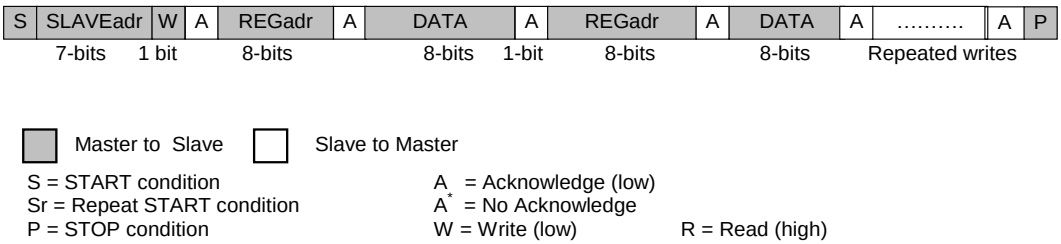


Figure 29: 2-WIRE Repeated Write (SDA Line)

If a new START or STOP condition occurs within a message, the bus will return to IDLE mode.

© 2017 Dialog Semiconductor

7.5 Internal Temperature Supervision

To protect DA9213, DA9214, and DA9215 from damage due to excessive power dissipation, the internal temperature is continuously monitored. There are three temperature thresholds, as shown in Table 12.

Table 12: Over-Temperature Thresholds

Temperature Threshold	Typical Temperature Setting	Interrupt Event	Status Bit	Masking Bit
TEMP_WARN	125 °C	E_TEMP_WARN	TEMP_WARN	M_TEMP_WARN
TEMP_CRIT	140 °C	E_TEMP_CRIT	TEMP_CRIT	M_TEMP_CRIT
TEMP_POR	150 °C			

When the junction temperature reaches the TEMP_WARN threshold, DA9213, DA9214, and DA9215 will assert the bit TEMP_WARN and will generate the event E_TEMP_WARN. If not masked using bit M_TEMP_WARN, the output port nIRQ will be asserted. The status bit TEMP_WARN will remain asserted as long as the junction temperature remains higher than TEMP_WARN.

When the junction temperature increases further to TEMP_CRIT, DA9213, DA9214, and DA9215 will immediately disable the buck converter, assert the bit TEMP_CRIT, and will generate the event E_TEMP_CRIT. If not masked via bit M_TEMP_CRIT, the output port nIRQ will be asserted. The status bit TEMP_CRIT will remain asserted as long as the junction temperature remains higher than TEMP_CRIT. The buck converter will be kept disabled as long as the junction temperature is above TEMP_CRIT. It will not be automatically re-enabled even after the temperature drops below the valid threshold (even if the controlling GPI is asserted). A direct write into BUCKA_EN or BUCKB_EN, or a toggling of the controlling GPI, is needed to enable the buck converter.

Whenever the junction temperature exceeds TEMP_POR, a power on reset to the digital core is immediately asserted, which stops all functionalities of DA9213, DA9214, and DA9215. This is needed to prevent possible permanent damage in the case of a rapid temperature increase.

© 2017 Dialog Semiconductor

8 Register Definitions

8.1 Register Map

Table 13 displays the register map, where all bits loaded from OTP are marked in bold.

 © 2017 Dialog Semiconductor

Table 13: Register Map

Addr	Function	7	6	5	4	3	2	1	0
Register Page 0									
0x00	PAGE_CON	REVERT	WRITE_MODE	Reserved	Reserved	REG_PAGE			
0x50	STATUS_A	Reserved	Reserved	Reserved	GPI4	GPI3	GPI2	GPI1	GPI0
0x51	STATUS_B	RAMP_READY_B	RAMP_READY_A	OV_CURR_B	OV_CURR_A	TEMP_CRIT	TEMP_WARN	PWRGOOD_B	PWRGOOD_A
0x52	EVENT_A	Reserved	E_UVLO_IO	Reserved	E_GPI4	E_GPI3	E_GPI2	E_GPI1	E_GPI0
0x53	EVENT_B	Reserved	Reserved	E_OV_CURR_B	E_OV_CURR_A	E_TEMP_CRIT	E_TEMP_WARN	E_PWRGOODB	E_PWRGOOD_A
0x54	MASK_A	Reserved	M_UVLO_IO	Reserved	M_GPI4	M_GPI3	M_GPI2	M_GPI1	M_GPI0
0x55	MASK_B	Reserved	Reserved	M_OV_CURR_B	M_OV_CURR_A	M_TEMP_CRIT	M_TEMP_WARN	M_PWRGOOD_B	M_PWRGOOD_A
0x56	CONTROL_A	V_LOCK	SLEW_RATE_B		SLEW_RATE_A		DEBOUNCING		
0x57	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved
0x58	GPIO0-1	GPI1_MODE	GPI1_TYPE	GPI1_PIN		GPI0_MODE	GPI0_TYPE	GPI0_PIN	
0x59	GPIO2-3	GPIO3_MODE	GPIO3_TYPE	GPIO3_PIN		GPIO2_MODE	GPIO2_TYPE	GPIO2_PIN	
0x5A	GPIO4	Reserved	Reserved	Reserved		GPI4_MODE	GPI4_TYPE	GPI4_PIN	
0x5B	Reserved	Reserved	Reserved	Reserved		Reserved	Reserved	Reserved	
0x5C	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved
0x5D	BUCKA_CONT	Reserved	VBUCKA_GPI		VBUCKA_SEL	BUCKA_PD_DIS	BUCKA_GPI		BUCKA_EN
0x5E	BUCKB_CONT	Reserved	VBUCKB_GPI		VBUCKB_SEL	BUCKB_PD_DIS	BUCKB_GPI		BUCKB_EN
Register Page 1									
0x80	PAGE_CON	REVERT	WRITE_MODE	Reserved	Reserved	Reserved	REG_PAGE		
0xD0	BUCK_ILIM	BUCKB_ILIM				BUCKA_ILIM			
0xD1	BUCKA_CONF	BUCKA_DOWN_CTRL			BUCKA_UP_CTRL			BUCKA_MODE	
0xD2	BUCKB_CONF	BUCKB_DOWN_CTRL			BUCKB_UP_CTRL			BUCKB_MODE	
0xD3	BUCK_CONF	Reserved	Reserved	Reserved	PH_SH_EN_B	PH_SH_EN_A	PHASE_SEL_B	PHASE_SEL_A	
0xD4	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved
0xD5	VBUCKA_MAX	Reserved	VBUCKA_MAX						
0xD6	VBUCKB_MAX	Reserved	VBUCKB_MAX						
0xD7	VBUCKA_A	BUCKA_SL_A	VBUCKA_A						
0xD8	VBUCKB_B	BUCKA_SL_B	VBUCKA_B						
0xD9	VBUCKB_A	BUCKB_SL_A	VBUCKB_A						
0xDA	VBUCKB_B	BUCKB_SL_B	VBUCKB_B						
Register Page 2									
0x100	PAGE_CON	REVERT	WRITE_MODE	Reserved	Reserved	Reserved	REG_PAGE		
0x101	OTP_CONT	Reserved	Reserved	Reserved	Reserved	PC_DONE	OTP_APPS_RD	Reserved	OTP_TIM
0x102	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved
0x103	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved
0x104	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved
0x105	INTERFACE	IF_BASE_ADDR1				R/W_POL	CPHA	CPOL	nCS_POL
0x106	INTERFACE2	IF_TYPE	PM_IF_HSM	PM_IF_FMP	PM_IF_V	Reserved	Reserved	Reserved	Reserved
0x140	OTP_CONT2	OTP_CONF_LOCK	OTP_APPS_LOCK	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved
0x141	OTP_ADDR	OTP_ADDR							
0x142	OTP_DATA	OTP_DATA							
0x143	CONFIG_A	Reserved	Reserved	Reserved	2WIRE_TO	GPI_V	Reserved	IRQ_TYPE	IRQ_LEVEL
0x144	CONFIG_B	UVLO_IO_DIS	PGB_DVC_MASK	PGA_DVC_MASK	OCB_MASK		OCA_MASK		RELOAD_FUNC_EN
0x145	CONFIG_C	Reserved	Reserved	Reserved	GPI4_PUPD	GPIO3_PUPD	GPIO2_PUPD	GPI1_PUPD	GPI0_PUPD
0x146	CONFIG_D	BUCKB_PG_SEL		BUCKA_PG_SEL		READYB_CONF		READYA_CONF	
0x147	CONFIG_E	STAND_ALONE	Reserved	Reserved	Reserved	Reserved	OSC_TUNE		
0x148	CONFIG_F	IF_BASE_ADDR2				Reserved	Reserved	ADDR_SEL_CONF	

© 2017 Dialog Semiconductor

8.1.1 Register Page Control

Register	Bit	Type	Label	Description
0x00 PAGE_CON	7	R/W	REVERT	Resets REG_PAGE to 000 after read/write access has finished
	6	R/W	WRITE_MODE	2-WIRE multiple write mode (Note 1) 0: Page Write Mode 1: Repeated Write Mode
	5:3	R/W	(reserved)	
	2:0	R/W	REG_PAGE	I^2C 00x: Selects Register 0x00 to 0xFF 01x: Selects Register 0x100 to 0x17F SPI 000: Selects Register 0x00 to 0x7F 001: Selects Register 0x80 to 0xFF 010: Selects Register 0x100 to 0x17F >010: Reserved for production and test

Note 1 Not used for 4-WIRE-IF

8.1.2 Register Page 0

8.1.2.1 System Control and Event

The STATUS registers report the current value of the various signals at the time that it is read out.

Register	Bit	Type	Label	Description
0x50 STATUS_A	7:5	R	(reserved)	
	4	R	GPI4	GPI4 level
	3	R	GPI3	GPI3 level
	2	R	GPI2	GPI2 level
	1	R	GPI1	GPI1 level
	0	R	GPI0	GPI0 level

Register	Bit	Type	Label	Description
0x51 STATUS_B	7	R	RAMP_READY_B	De-asserted during Buck A DVC, power up and power down
	6	R	RAMP_READY_A	De-asserted during Buck B DVC, power up and power down
	5	R	OV_CURR_B	Asserted as long as the current limit for Buck B is hit
	4	R	OV_CURR_A	Asserted as long as the current limit for Buck A is hit
	3	R	TEMP_CRIT	Asserted as long as the thermal shutdown threshold is reached
	2	R	TEMP_WARN	Asserted as long as the thermal warning threshold is reached
	1	R	PWRGOOD_B	Asserted as long as the Buck B output voltage is in range

© 2017 Dialog Semiconductor

Register	Bit	Type	Label	Description
	0	R	PWRGOOD_A	Asserted as long as the Buck A output voltage is in range

The EVENT registers hold information about events that have occurred in DA9213, DA9214, and DA9215. Events are triggered by a change in the status register which contains the status of monitored signals. When an EVENT bit is set in the event register, the IRQ signal is asserted unless the event is masked by a bit in the mask register. **The IRQ triggering event register will be cleared from the host by writing back its read value.** New events occurring during clearing will be delayed before they are passed to the event register, ensuring that the host controller does not miss them.

Register	Bit	Type	Label	Description
0x52 EVENT_A	7	R	(reserved)	
	6	R	E_UVLO_IO	UVLO_IO caused the event
	5	R	(reserved)	
	4	R	E_GPI4	GPI4 event according to active state setting
	3	R	E_GPI3	GPI3 event according to active state setting
	2	R	E_GPI2	GPI2 event according to active state setting
	1	R	E_GPI1	GPI1 event according to active state setting
	0	R	E_GPI0	GPI0 event according to active state setting

Register	Bit	Type	Label	Description
0x53 EVENT_B	7:6	R	(reserved)	
	5	R	E_OV_CURR_B	OV_CURR Buck B caused event
	4	R	E_OV_CURR_A	OV_CURR Buck A caused event
	3	R	E_TEMP_CRIT	TEMP_CRIT caused event
	2	R	E_TEMP_WARN	TEMP_WARN caused event
	1	R	E_PWRGOOD_B	PWRGOOD loss at Buck B caused event
	0	R	E_PWRGOOD_A	PWRGOOD loss at Buck A caused event

Register	Bit	Type	Label	Description
0x54 MASK_A	7	R/W	(reserved)	
	6	R/W	**M_UVLO_IO**	Mask UVLO_IO caused nIRQ
	5	R/W	(reserved)	
	4	R/W	**M_GPI4**	Masks nIRQ interrupt at GPI4
	3	R/W	**M_GPI3**	Masks nIRQ interrupt at GPI3
	2	R/W	**M_GPI2**	Masks nIRQ interrupt at GPI2
	1	R/W	**M_GPI1**	Masks nIRQ interrupt at GPI1
	0	R/W	**M_GPI0**	Masks nIRQ interrupt at GPI0

Register	Bit	Type	Label	Description
0x55	7:6	R/W	(reserved)	

© 2017 Dialog Semiconductor

Register	Bit	Type	Label	Description
MASK_B	5	R/W	**M_OV_CURR_B**	OV_CURR Buck B caused event
	4	R/W	**M_OV_CURR_A**	OV_CURR Buck A caused event
	3	R/W	**M_TEMP_CRIT**	TEMP_CRIT caused event
	2	R/W	**M_TEMP_WARN**	TEMP_WARN caused event
	1	R/W	**M_PWRGOOD_B**	PWRGOOD Buck B caused event
	0	R/W	**M_PWRGOOD_A**	PWRGOOD Buck A caused event

Register	Bit	Type	Label	Description
0x56 CONTROL_A	7	R/W	**V_LOCK**	0: Allows host writes into registers 0xD0 to 0x14F 1: Disables register 0xD0 to 0x14F re-programming from control interfaces
	6:5	R/W	**SLEW_RATE_B**	Buck B DVC slewing is executed at 00: 10 mV every 4.0 µs 01: 10 mV every 2.0 µs **10: 10 mV every 1.0 µs** 11: 10 mV every 0.5 µs
	4:3	R/W	**SLEW_RATE_A**	Buck A DVC slewing is executed at 00: 10 mV every 4.0 µs 01: 10 mV every 2.0 µs **10: 10 mV every 1.0 µs** 11: 10 mV every 0.5 µs
	0:2	R/W	**DEBOUNCE**	Input signals debounce time: 000: no debounce time 001: 0.1 ms 010: 1.0 ms **011: 10 ms** 100: 50 ms 101: 250 ms 110: 500 ms 111: 1000 ms

8.1.2.2 GPIO Control

Register	Bit	Type	Label	Description
0x58 GPI0-1	7	R/W	**GPI1_MODE**	**0: GPI: debouncing off** 1: GPI: debouncing on
	6	R/W	**GPI1_TYPE**	0: GPI: active low **1: GPI: active high**
	5:4	R/W	**GPI1_PIN**	PIN assigned to: **00: GPI** >00: Reserved
	3	R/W	**GPI0_MODE**	**0: GPI: debouncing off** 1: GPI: debouncing on
	2	R/W	**GPI0_TYPE**	0: GPI: active low **1: GPI: active high**

© 2017 Dialog Semiconductor

Register	Bit	Type	Label	Description
	1:0	R/W	**GPI0_PIN**	PIN assigned to: **00: GPI** 01: Track enable 1x: Reserved

Register	Bit	Type	Label	Description
0x59 GPIO2-3	7	R/W	**GPIO3_MODE**	**0: GPI: debouncing off** **GPO: Sets output to passive level** 1: GPI: debouncing on GPO: Sets output to active level
	6	R/W	**GPIO3_TYPE**	0: GPI/GPO: active low **1: GPI/GPO: active high**
	5:4	R/W	**GPIO3_PIN**	PIN assigned to: **00: GPI** 01: Reserved 10: GPO (Open drain) 11: GPO (Push-pull)
	3	R/W	**GPIO2_MODE**	**0: GPI: debouncing off** **GPO: Sets output to passive level** 1: GPI: debouncing on GPO: Sets output to active level
	2	R/W	**GPIO2_TYPE**	0: GPI/GPO: active low **1: GPI/GPO: active high**
	1:0	R/W	**GPIO2_PIN**	PIN assigned to: **00: GPI** 01: Reserved 10: GPO (Open drain) 11: GPO (Push-pull)

Register	Bit	Type	Label	Description
0x5A GPI4	7:4	R/W	(reserved)	
	3	R/W	**GPI4_MODE**	**0: GPI: debouncing off** 1: GPI: debouncing on
	2	R/W	**GPI4_TYPE**	0: GPI: active low **1: GPI: active high**
	1:0	R/W	**GPI4_PIN**	PIN assigned to: **00: GPI** 01: Reserved 1x: Reserved

© 2017 Dialog Semiconductor

8.1.2.3 Regulators Control

Register	Bit	Type	Label	Description
0x5D BUCKA_CONT	7	R/W	(reserved)	
	6:5	R/W	**VBUCKA_GPI**	Selects the GPI that specifies the target voltage of VBUCKA. This is VBUCKA_A on active to passive transition, VBUCKA_B on passive to active transition. Active high/low is controlled by GPIx_TYPE. **00: Not controlled by GPIO** 01: GPIO1 controlled 10: GPIO2 controlled 11: GPIO4 controlled
	4	R/W	**VBUCKA_SEL**	Buck A voltage is selected from (ramping): **0: VBUCKA_A** 1: VBUCKA_B
	3	R/W	**BUCKA_PD_DIS**	**0: Enable pull-down resistor of Buck A when the buck is disabled** 1: Disable pull-down resistor of Buck A when the buck is disabled
	2:1	R/W	**BUCKA_GPI**	GPIO enables the Buck A on passive to active state transition, disables the Buck A on active to passive state transition **00: Not controlled by GPIO** 01: GPIO0 controlled 10: GPIO1 controlled 11: GPIO3 controlled
	0	R/W	**BUCKA_EN**	**0: Buck A disabled** 1: Buck A enabled

Register	Bit	Type	Label	Description
0x5E BUCKB_CONT	7	R/W	(reserved)	
	6:5	R/W	**VBUCKB_GPI**	Selects the GPI that specifies the target voltage of VBUCKB. This is VBUCKB_A on active to passive transition, VBUCKB_B on passive to active transition. Active high/low is controlled by GPIx_TYPE. **00: Not controlled by GPIO** 01: GPIO1 controlled 10: GPIO2 controlled 11: GPIO4 controlled
	4	R/W	**VBUCKB_SEL**	Buck A voltage is selected from (ramping): **0: VBUCKB_A** 1: VBUCKB_B
	3	R/W	**BUCKB_PD_DIS**	**0: Enable pull-down resistor of Buck B when the buck is disabled** 1: Disable pull-down resistor of Buck B when the buck is disabled
	2:1	R/W	**BUCKB_GPI**	GPIO enables the Buck B on passive to active state transition, disables the Buck B on active to passive

© 2017 Dialog Semiconductor

Register	Bit	Type	Label	Description
				state transition **00: Not controlled by GPIO** 01: GPIO0 controlled 10: GPIO1 controlled 11: GPIO3 controlled
	0	R/W	**BUCKB_EN**	**0: Buck B disabled** 1: Buck B enabled

8.1.3 Register Page 1

Register	Bit	Type	Label	Description
0x80 PAGE_CON	7	R/W	REVERT	Resets REG_PAGE to 000 after read/write access has finished
	6	R/W	WRITE_MODE	2-WIRE multiple write mode 0: Page Write Mode 1: Repeated Write Mode
	5:3	R/W	(reserved)	
	2:0	R/W	REG_PAGE	I^2C 00x: Selects Register 0x00 to 0xFF 01x: Selects Register 0x100 to 0x17F SPI 000: Selects Register 0x00 to 0x7F 001: Selects Register 0x80 to 0xFF 010: Selects Register 0x100 to 0x17F >010: Reserved for production and test

8.1.3.1 Regulators Settings

Register	Bit	Type	Label	Description
0xD0 BUCK_ILIM	7:4	R/W	**BUCKB_ILIM**	Current limit per phase: 0000: 4000 mA 0001: 4200 mA 0010: 4400 mA Continuing through… **1001: 5800 mA** to… 1110: 6800 mA 1111: 7000 mA
	3:0	R/W	**BUCKA_ILIM**	Current limit per phase: 0000: 4000 mA 0001: 4200 mA 0010: 4400 mA Continuing through… **1001: 5800 mA** to…

© 2017 Dialog Semiconductor

Register	Bit	Type	Label	Description
				1110: 6800 mA 1111: 7000 mA

Register	Bit	Type	Label	Description
0xD1 BUCKA_CONF	7:5	R/W	**BUCKA_DOWN_CTRL**	Buck A voltage ramping during power down 000: 1.25 mV/µs 001: 2.5 mV/µs 010: 5 mV/µs 011: 10 mV/µs **100: 20 mV/µs** 101: 30 mV/µs 110: 40 mV/µs 111: no ramped power down
	4:2	R/W	**BUCKA_UP_CTRL**	Buck A voltage ramping during start up 000: 1.25 mV/µs 001: 2.5 mV/µs 010: 5 mV/µs 011: 10 mV/µs **100: 20 mV/µs** (Note 1) 101: 30 mV/µs 110: 40 mV/µs 111: target voltage applied immediately (no soft start)
	1:0	R/W	**BUCKA_MODE**	00: PFM/PWM mode controlled via voltage A and B registers 01: Automatic mode 10: **Buck A always operates in PWM mode** 11: Automatic mode

Note 1 Settings higher than 20 mV/µs may cause significant overshoot

Register	Bit	Type	Label	Description
0xD2 BUCKB_CONF	7:5	R/W	**BUCKB_DOWN_CTRL**	Buck B voltage ramping during power down 000: 1.25 mV/µs 001: 2.5 mV/µs 010: 5 mV/µs 011: 10 mV/µs **100: 20 mV/µs** 101: 30 mV/µs 110: 40 mV/µs 111: no ramped power down
	4:2	R/W	**BUCKB_UP_CTRL**	Buck B voltage ramping during start up 000: 1.25 mV/µs 001: 2.5 mV/µs 010: 5 mV/µs 011: 10 mV/µs **100: 20 mV/µs** (Note 2) 101: 30 mV/µs

© 2017 Dialog Semiconductor

Register	Bit	Type	Label	Description
				110: 40 mV/µs 111: target voltage applied immediately (no soft start)
	1:0	R/W	**BUCKB_MODE**	00: PFM/PWM mode controlled via voltage A and B registers 01: Automatic mode **10: Buck B always operates in PWM mode** 11: Automatic mode

Note 2 Settings higher than 20 mV/µs may cause significant overshoot

Register	Bit	Type	Label	Description
0xD3 BUCK_CONF	7:5	R/W	(reserved)	
	4	R/W	**PH_SH_EN_B**	Enable current dependent phase shedding in PWM for Buck B
	3	R/W	**PH_SH_EN_A**	Enable current dependent phase shedding in PWM for Buck A
	2	R/W	**PHASE_SEL_B**	Phase selection for Buck B in PWM 0: 1 phase is selected **1: 2 phases are selected**
	1:0	R/W	**PHASE_SEL_A**	Phase selection for Buck A in PWM mode. Settings >01 apply only for DA9213 otherwise the number of phases is limited to max 2 00: 1 phase is selected 01: 2 phases are selected 10: 3 phases are selected (uneven 0/90/180 phase shift) **11: 4 phases are selected**

Register	Bit	Type	Label	Description
0xD5 VBUCKA_MAX	7	R/W	(reserved)	
	6:0	R	**VBUCKA_MAX**	Sets the maximum voltage allowed for Buck A (OTP programmed, access only in test mode) 0000000: 0.30 V 0000001: 0.31 V 0000010: 0.32 V Continuing through… 1000110: 1.0 V to… 1111101: 1.55 V 1111110: 1.56 V **1111111: 1.57 V**

© 2017 Dialog Semiconductor

Register	Bit	Type	Label	Description
0xD6 VBUCKB_MAX	7	R/W	(reserved)	
	6:0	R	**VBUCKB_MAX**	Sets the maximum voltage allowed for Buck B (OTP programmed, access only in test mode) 0000000: 0.30 V 0000001: 0.31 V 0000010: 0.32 V Continuing through… 1000110: 1.0 V to… 1111101: 1.55 V 1111110: 1.56 V **1111111: 1.57 V**

Register	Bit	Type	Label	Description
0xD7 VBUCKA_A	7	R/W	**BUCKA_SL_A**	**0: Configures Buck A to PWM mode whenever selecting A voltage setting** 1: Configures Buck A to automatic mode whenever selecting A voltage setting
	6:0	R/W	**VBUCKA_A**	0000000: 0.30 V 0000001: 0.31 V 0000010: 0.32 V Continuing through… **1000110: 1.0 V** to… 1111101: 1.55 V 1111110: 1.56 V 1111111: 1.57 V

Register	Bit	Type	Label	Description
0xD8 VBUCKA_B	7	R/W	**BUCKA_SL_B**	**0: Configures Buck A to PWM mode, whenever selecting B voltage setting** 1: Configures Buck A to automatic mode, whenever selecting B voltage setting
	6:0	R/W	**VBUCKA_B**	0000000: 0.30 V 0000001: 0.31 V 0000010: 0.32 V Continuing through… **1000110: 1.0 V** to… 1111101: 1.55 V

© 2017 Dialog Semiconductor

Register	Bit	Type	Label	Description
				1111110: 1.56 V 1111111: 1.57 V

Register	Bit	Type	Label	Description
0xD9 VBUCKB_A	7	R/W	**BUCKB_SL_A**	**0: Configures Buck B to PWM mode, whenever selecting A voltage setting** 1: Configures Buck B to automatic mode, whenever selecting A voltage setting
	6:0	R/W	**VBUCKB_A**	0000000: 0.30 V 0000001: 0.31 V 0000010: 0.32 V Continuing through… **1000110: 1.0 V** to… 1111101: 1.55 V 1111110: 1.56 V 1111111: 1.57 V

Register	Bit	Type	Label	Description
0xDA VBUCKB_B	7	R/W	**BUCKB_SL_B**	**0: Configures Buck B to PWM mode, whenever selecting B voltage setting** 1: Configures Buck B to automatic mode, whenever selecting B voltage setting
	6:0	R/W	**VBUCKB_B**	0000000: 0.30 V 0000001: 0.31 V 0000010: 0.32 V Continuing through… **1000110: 1.0 V** to… 1111101: 1.55 V 1111110: 1.56 V 1111111: 1.57 V

© 2017 Dialog Semiconductor

8.1.4 Register Page 2

Register	Bit	Type	Label	Description
0x100 PAGE_CON	7	R/W	REVERT	Resets REG_PAGE to 000 after read/write access has finished
	6	R/W	WRITE_MODE	2-WIRE multiple write mode 0: Page Write Mode 1: Repeated Write Mode
	5:3	R/W	(reserved)	
	2:0	R/W	REG_PAGE	I^2C 00x: Selects Register 0x00 to 0xFF 01x: Selects Register 0x100 to 0x17F SPI 000: Selects Register 0x00 to 0x7F 001: Selects Register 0x80 to 0xFF 010: Selects Register 0x100 to 0x17F >010: Reserved for production and test

8.1.4.1 Interface and OTP Settings (shared with DA9063)

Register	Bit	Type	Label	Description
0x101 OTP_CONT	7:4	R/W	(reserved)	
	3	R/W	PC_DONE	Asserted from Power Commander software after the emulated OTP read has finished, automatically cleared when leaving emulated OTP read
	2	R/W	OTP_APPS_RD	Reads on assertion application specific registers 0x105, 0x106, 0x143 to 0x149 and OTP_APPS_LOCK) from OTP
	1	R/W	(reserved)	
	0	R/W	OTP_TIM	OTP read timing: 0: normal read 1: marginal read (for OTP fuse verification)

Register	Bit	Type	Label	Description
0x105 INTERFACE	7:4	R/W	**IF_BASE_ADDR1**	4 MSB of 2-WIRE control interfaces base address XXXX0000 **1101**0000 = 0xD0 write address of PM 2-WIRE interface (page 0 and 1) **1101**0001 = 0xD1 read address of PM 2-WIRE interface (page 0 and 1) **1101**0010 = 0xD2 write address of PM-2-WIRE interface (page 2 and 3) **1101**0011 = 0xD3 read address of PM-2-WIRE interface (page 2 and 3) Code '0000' is reserved for unprogrammed OTP (triggers start-up with hardware default interface address)
	3	R/W	**R/W_POL**	4-WIRE: Read/Write bit polarity 0: Host indicates reading access via R/W bit = '0' **1: Host indicates reading access via R/W bit = '1'**

© 2017 Dialog Semiconductor

Register	Bit	Type	Label	Description
	2	R/W	**CPHA**	4-WIRE interface clock phase (see Table 10)
	1	R/W	**CPOL**	4-WIRE interface clock polarity **0: SK is low during idle** 1: SK is high during idle
	0	R/W	**nCS_POL**	4-WIRE chip select polarity 0: nCS is low active **1: nCS is high active**

Register	Bit	Type	Label	Description
0x106 INTERFACE2	7	R/W	**IF_TYPE**	0: Power manager interface is 4-WIRE. Automatically configures GPIO3 and GPI4 as interface signals. The GPIO configuration is overruled. **1: Power manager interface is 2-WIRE**
	6	R/W	**PM_IF_HSM**	Enables continuous high speed mode on 2-WIRE interface if asserted (no master code required)
	5	R/W	**PM_IF_FMP**	Enables 2-WIRE interface operating with fast mode+ timings if asserted
	4	R/W	**PM_IF_V**	**0: Power manager interface in 2-WIRE mode is supplied from VDDCORE (4-WIRE always from VDDIO)** 1: Power manager interface in 2-WIRE mode is supplied from VDDIO (4-WIRE always from VDDIO)
	0:3	R/W	(reserved)	

8.1.4.2 OTP Fusing Registers

Register	Bit	Type	Label	Description
0x140 OTP_CONT2	7	R/W	**OTP_CONF_LOCK**	**0: Registers 0x54 to 0x5E and 0xD0 to 0xDA are not locked for OTP programming (should be selected for unmarked evaluation samples)** 1: Registers 0x54 to 0x5E and 0xD0 to 0xDA are locked in OTP (no further fusing possible)
	6	R/W	**OTP_APPS_LOCK**	**0: Registers 0x105, 0x106, 0x143 to 0x149 are not locked for OTP programming (should be selected for unmarked evaluation samples)** 1: Registers 0x105, 0x106, 0x143 to 0x149 are locked in OTP (no further fusing possible)
	5:0	R/W	(reserved)	

Register	Bit	Type	Label	Description
0x141 OTP_ADDR	7:0	R/W	OTP_ADDR	OTP Array address

© 2017 Dialog Semiconductor

Register	Bit	Type	Label	Description
0x142 OTP_DATA	7:0	R/W	OTP_DATA	OTP read/write data OTP_DATA written to OTP_ADDR selects the IC and accepts unlock sequence (1 + 3 bytes)

8.1.4.3 Application Configuration Settings

Register	Bit	Type	Label	Description
0x143 CONFIG_A	7:5	R/W	(reserved)	
	4	R/W	**2WIRE_TO**	Enables automatic reset of 2-WIRE interface if the clock stays low for >35 ms 0: Disabled **1: Enabled**
	3	R/W	**GPI_V**	GPIs are supplied from: **0: VDDCORE** 1: VDDIO
	2	R/W	(reserved)	
	1	R/W	**IRQ_TYPE**	nIRQ output port is: 0: Push-pull **1: Open drain (requires external pull-up resistor)**
	0	R/W	**IRQ_LEVEL**	nIRQ output port is: **0: Active low** 1: Active high

Register	Bit	Type	Label	Description
0x144 CONFIG_B	7	R/W	**UVLO_IO_DIS**	Disable the UVLO for the VDDIO rail and its comparator (suggested for rail voltages different to 1.8 V and to save quiescent current)
	6	R/W	**PGB_DVC_MASK**	Power-good configuration for Buck B 0: Power-good signal not masked during DVC transitions **1: Power-good signal masked during DVC transitions (keep previous status)**
	5	R/W	**PGA_DVC_MASK**	Power-good configuration for Buck A 0: Power-good signal not masked during DVC transitions **1: Power-good signal masked during DVC transitions (keep previous status)**
	4:3	R/W	**OCB_MASK**	Over Current configuration for Buck B **00: Event generation due to over current hit is always active during DVC transitions of the Buck converter** 01: Event generation due to over current hit is masked during DVC transitions of the buck converter + 2 µs extra masking at the end 10: Event generation due to over current hit is masked during DVC transitions of the buck converter + 10 µs extra masking at the end 11: Event generation due to over current hit is masked during DVC transitions of the buck

© 2017 Dialog Semiconductor

Register	Bit	Type	Label	Description
				converter + 50 µs extra masking at the end
	2:1	R/W	**OCA_MASK**	Over Current configuration for Buck A **00: Event generation due to over current hit is always active during DVC transitions of the buck converter** 01: Event generation due to over current hit is masked during DVC transitions of the buck converter + 2 µs extra masking at the end 10: Event generation due to over current hit is masked during DVC transitions of the buck converter + 10 µs extra masking at the end 11: Event generation due to over current hit is masked during DVC transitions of the buck converter + 50 µs extra masking at the end
	0	R/W	**RELOAD_FUNC_EN**	Enable the OTP re-load function for GPIO0 when configured as input port

Register	Bit	Type	Label	Description
0x145 CONFIG_C	7:5	R/W	(reserved)	
	4	R/W	**GPI4_PUPD**	**0: GPI: pull-down resistor disabled** 1: GPI: pull-down resistor enabled
	3	R/W	**GPIO3_PUPD**	**0: GPI: pull-down resistor disabled** **GPO (open drain): pull up resistor disabled (external pull-up resistor)** 1: GPI: pull-down resistor enabled GPO (open drain): pull up resistor
	2	R/W	**GPIO2_PUPD**	**0: GPI: pull-down resistor disabled** **GPO (open drain): pull up resistor disabled (external pull-up resistor)** 1: GPI: pull-down resistor enabled GPO (open drain): pull up resistor enabled
	1	R/W	**GPI1_PUPD**	**0: GPI: pull-down resistor disabled** 1: GPI: pull-down resistor enabled
	0	R/W	**GPI0_PUPD**	**0: GPI: pull-down resistor disabled** 1: GPI: pull-down resistor enabled

Register	Bit	Type	Label	Description
0x146 CONFIG_D	7:6	R/W	**BUCKB_PG_SEL**	Selection of the PG signal for Buck B 00: none 01: GPO2 10: GPO3 11: reserved
	5:4	R/W	**BUCKA_PG_SEL**	Selection of the PG signal for Buck A 00: none 01: GPO2 10: GPO3 11: reserved
	3:2	R/W	**READYB_CONF**	Selection of the READY signal for Buck B

© 2017 Dialog Semiconductor

Register	Bit	Type	Label	Description
				00: none 01: GPO2 10: GPO3 11: reserved
	1:0	R/W	**READYA_CONF**	Selection of the READY signal for Buck A 00: none 01: GPO2 10: GPO3 11: reserved

Register	Bit	Type	Label	Description
0x147 CONFIG_E	7	R/W	**STAND_ALONE**	**0: DA9213, DA9214, and DA9215 is used as companion IC to DA9063 or DA9063-compliant** 1: DA9213, DA9214, and DA9215 is standalone or as companion IC with another PMU not DA9063-compliant
	6:5	R/W	(reserved)	
	4:3	R/W	(reserved)	
	2:0	R/W	**OSC_TUNE**	Tune the main 6 MHz oscillator frequency: **000: no tune** 001: +180 kHz 010: +360 kHz 011: +540 kHz 100: +720 kHz 101: +900 kHz 110: +1080 kHz 111: +1260 kHz

Register	Bit	Type	Label	Description
0x148 CONFIG_F	7:4	R/W	**IF_BASE_ADDR2**	If a second I^2C address is to be selected on ADR_SEL_CONF, this field configures the second address. 4 MSB of 2-WIRE control interfaces base address XXXX0000 **1101**0000 = 0xD0 write address of PM 2-WIRE interface (page 0 and 1) **1101**0001 = 0xD1 read address of PM 2-WIRE interface (page 0 and 1) **1101**0010 = 0xD2 write address of PM-2-WIRE interface (page 2 and 3) **1101**0011 = 0xD3 read address of PM-2-WIRE interface (page 2 and 3) Code '0000' is reserved for unprogrammed OTP (triggers start-up with hardware default interface address)
	3:2	R	(reserved)	
	1	R/W	**ADDR_SEL_CONF**	Selects the GPI for the alternative I^2C address selection:

© 2017 Dialog Semiconductor

Register	Bit	Type	Label	Description
				00: none 01: GPI0 10: GPI1 11: GPI4

© 2017 Dialog Semiconductor

9 Application Information

The following recommended components are examples selected from requirements of a typical application.

9.1 Capacitor Selection

Ceramic capacitors are used as bypass capacitors at all VDD and output rails. When selecting a capacitor, especially for types with high capacitance at smallest physical dimension, the DC bias characteristic has to be taken into account.

Table 14: Recommended Capacitor Types

Application	Value	Size	Temp Char	Tol (%)	V-Rate	Type
VOUT output bypass	47 µF	0603	X5R ±15 %	±20	6.3 V	Murata GRM188R60J476ME15
	47 µF	0805	X5R ±15 %	±20	10 V	Murata GRM21BR61A476ME15
	22 µF	0603	X5R ±15 %	±20	10 V	Murata GRM188R61A226ME15
	22 µF	0402	X5R ±15 %	±20	4 V	Semco CL05A226MR5NZNC
VDDx bypass	10 µF	0402	X5R ±15 %	±20	10 V	Semco CL05A106MP5NUNC
	10 µF	0603	X5R ±15 %	±10	10 V	Murata GRM188R61A105KAAL
VSYS bypass	1 µF	0402	X5R ±15 %	±10	10 V	Murata GRM155R61A105KE15
VDDIO bypass	100 nF	01005	X5R ±15 %	±10	6.3 V	Semco CL02A104KQ2NNN

© 2017 Dialog Semiconductor

9.2 Inductor Selection

Inductors should be selected based upon the following parameters:

- Rated max. current: usually a coil provides two current limits: The Isat specifies the maximum current at which the inductance drops by 30 % of the nominal value. The Imax is defined by the maximum power dissipation and is applied to the effective current.
- DC resistance: critical for the converter efficiency and should therefore be minimized.


Table 15: Recommended Inductor Types


Value (µH)	Size (mm)	Imax(dc) (A)	Isat (A)	Tol (%)	DC Res (mΩ)	Type
0.47	2.0 x 1.6 x 1.0	4.7	6.2	±20	26	Semco CIGT201610EHR47MLE
0.47	2.5 x 2.0 x 0.8	5.5	5.5	±20	15	Semco CIGT252008 EHR47MNE
0.24	2.5 x 2.0 x 1.0	5.7	5.7	±20	10	Semco CIGT252010 LMR24MNE
0.24	2.5 x 2.0 x 1.2	6.6	6.6	±20	8	Semco CIGT252012 LMR24MNE
0.47	2.5 x 2.0 x 1.0	4.1	5.3	±20	28	TOKO DFE252010P-H-R47M
0.47	2.5 x 2.0 x 1.2	4.7	6.1	±20	21	TOKO DFE252012P-H-R47M
0.33	2.5 x 2.0 x 1.0	4.4	5.8	±20	22	TOKO DFE252010P-H-R33M
0.33	2.5 x 2.0 x 1.2	5.0	6.4	±20	18	TOKO DFE252012P-H-R33M
0.47	2.5 x 2.0 x 1.2	4.7	5.2	±20	19	Cyntec HMLE25201B-R47MS
0.22	2.5 x 2.0 x 1.2	7.3	7.0	±20	8	Cyntec PIFE25201B
0.22	2.5 x 2.0 x 1.0	6.6	5.8	±20	10	Cyntec PIFE25201T-R22MS
0.47	4 x 4 x 1.0	9.0	10.5	±20	17	Cyntec PIME041B-R47MS-11
0.47	2.5 x 2.0 x 1.2	3.9	4.8	±20	30	Taiyo Yuden MAMK2520T R47M
0.47	4 x 4 x 1.2	8.7	6.7	±20	14	Coilcraft XFL4012-471ME

© 2017 Dialog Semiconductor

10 Package Information

10.1 Package Outlines

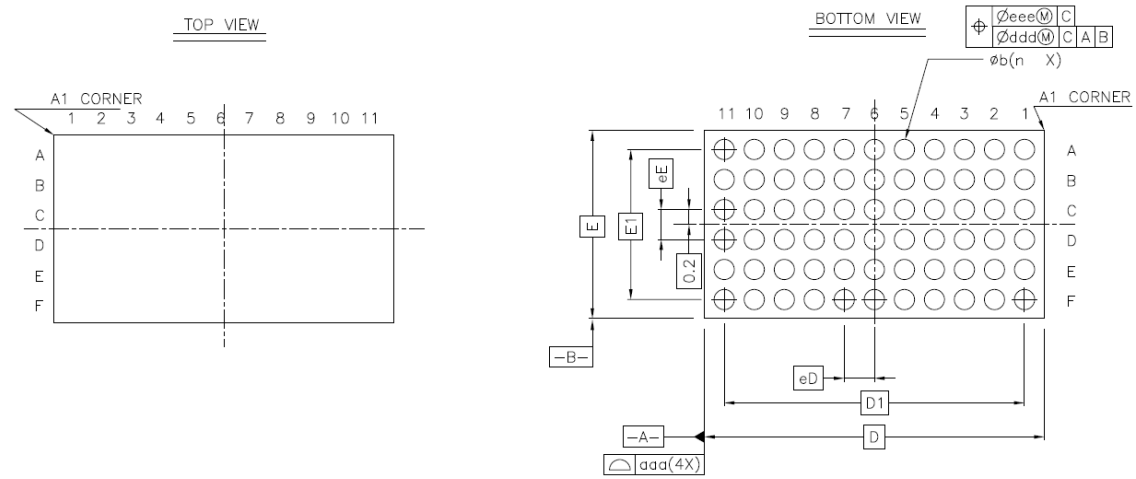

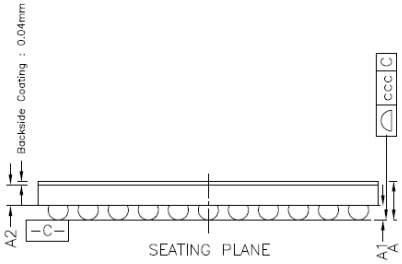

	SYMBOL	COMMON DIMENSIONS		
		MIN.	NOM.	MAX.
Total Thickness	A	0.471	0.511	0.551
Stand Off	A1	0.177	–	0.205
Wafer Thickness	A2	0.279 ±0.025		
Body Size	D	4.530 BSC		
	E	2.509 BSC		
Ball Diameter (Size)		0.25		
Ball/Bump Width	b	0.255	0.270	0.285
Ball/Bump Pitch	eD	0.4		
	eE	0.4		
Ball/Bump Count	n	66		
Edge Ball Center to Center	D1	4.0 BSC		
	E1	2.0 BSC		
Package Edge Tolerance	aaa	0.03		
Coplanarity (whole wafer)	ccc	0.03		
Ball/Bump Offset (Package)	ddd	0.05		
Ball/Bump Offset (Ball)	eee	0.015		

Figure 30: DA9213/14/15 WL-CSP Package Outline Drawing

© 2017 Dialog Semiconductor

11 Ordering Information

The ordering number consists of the part number followed by a suffix indicating the packing method. For details and availability, please consult Dialog Semiconductor's customer portal or your local sales representative.

Table 16: Ordering Information

Part Number	Package	Package Description	Comment	Package Outline
DA9213-xxUP2	66 WL-CSP	T&R, 4500pcs		Figure 30
DA9213-xxUP6	66 WL-CSP	Waffle		
DA9214-xxUP2	66 WL-CSP	T&R, 4500pcs		
DA9214-xxUP6	66 WL-CSP	Waffle		
DA9215-xxUP2	66 WL-CSP	T&R, 4500pcs		
DA9215-xxUP6	66 WL-CSP	Waffle		
DA921yS-xxUPz	66 WL-CSP	T&R/Waffle	Adjustable Version V_{OUT} 1.2 V	

© 2017 Dialog Semiconductor

Datasheet

Status Definitions

Revision	Datasheet Status	Product Status	Definition
1.<n>	Target	Development	This datasheet contains the design specifications for product development. Specifications may be changed in any manner without notice.
2.<n>	Preliminary	Qualification	This datasheet contains the specifications and preliminary characterization data for products in pre-production. Specifications may be changed at any time without notice in order to improve the design.
3.<n>	Final	Production	This datasheet contains the final specifications for products in volume production. The specifications may be changed at any time in order to improve the design, manufacturing and supply. Major specification changes are communicated via Customer Product Notifications. Datasheet changes are communicated via www.dialog-semiconductor.com.
4.<n>	Obsolete	Archived	This datasheet contains the specifications for discontinued products. The information is provided for reference only.

Disclaimer

Information in this document is believed to be accurate and reliable. However, Dialog Semiconductor does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information. Dialog Semiconductor furthermore takes no responsibility whatsoever for the content in this document if provided by any information source outside of Dialog Semiconductor.

Dialog Semiconductor reserves the right to change without notice the information published in this document, including without limitation the specification and the design of the related semiconductor products, software and applications.

Applications, software, and semiconductor products described in this document are for illustrative purposes only. Dialog Semiconductor makes no representation or warranty that such applications, software and semiconductor products will be suitable for the specified use without further testing or modification. Unless otherwise agreed in writing, such testing or modification is the sole responsibility of the customer and Dialog Semiconductor excludes all liability in this respect.

Customer notes that nothing in this document may be construed as a license for customer to use the Dialog Semiconductor products, software and applications referred to in this document. Such license must be separately sought by customer with Dialog Semiconductor.

All use of Dialog Semiconductor products, software and applications referred to in this document are subject to Dialog Semiconductor's Standard Terms and Conditions of Sale, available on the company website (www.dialog-semiconductor.com) unless otherwise stated.

Dialog and the Dialog logo are trademarks of Dialog Semiconductor plc or its subsidiaries. All other product or service names are the property of their respective owners.

© 2017 Dialog Semiconductor. All rights reserved.

RoHS Compliance

Dialog Semiconductor's suppliers certify that its products are in compliance with the requirements of Directive 2011/65/EU of the European Parliament on the restriction of the use of certain hazardous substances in electrical and electronic equipment. RoHS certificates from our suppliers are available on request.

Contacting Dialog Semiconductor

United Kingdom (Headquarters)
Dialog Semiconductor (UK) LTD
Phone: +44 1793 757700

Germany
Dialog Semiconductor GmbH
Phone: +49 7021 805-0

The Netherlands
Dialog Semiconductor B.V.
Phone: +31 73 640 8822

Email:
enquiry@diasemi.com

North America
Dialog Semiconductor Inc.
Phone: +1 408 845 8500

Japan
Dialog Semiconductor K. K.
Phone: +81 3 5769 5100

Taiwan
Dialog Semiconductor Taiwan
Phone: +886 281 786 222

Web site:
www.dialog-semiconductor.com

Hong Kong
Dialog Semiconductor Hong Kong
Phone: +852 2607 4271

Korea
Dialog Semiconductor Korea
Phone: +82 2 3469 8200

China (Shenzhen)
Dialog Semiconductor China
Phone: +86 755 2981 3669

China (Shanghai)
Dialog Semiconductor China
Phone: +86 21 5424 9058