

RADIO MODULE
MXR-505

UHF FM TRANSCEIVER MODULE

PRELIMINARY

DATA SHEET


Radios, Inc.

May 30, 2007 Preliminary Data Sheet

MXR-505

UHF FM TRANSCEIVER MODULE

The MXR-505 is a frequency shift keyed (FSK) high performance, ultra compact, long range transceiver operating at the 902-928 MHz and 868.25 MHz bands. This integrated modularized transceiver is designed for use in half-duplex, bidirectional RF links. The multi-channelled MXR-505 is intended for use in UHF radio equipment in compliance with both the North American Federal Communications Commission (FCC) part 15.247 and 15.249 systems and the European Telecommunications Standard Institute (ETS) specification EN300 200.

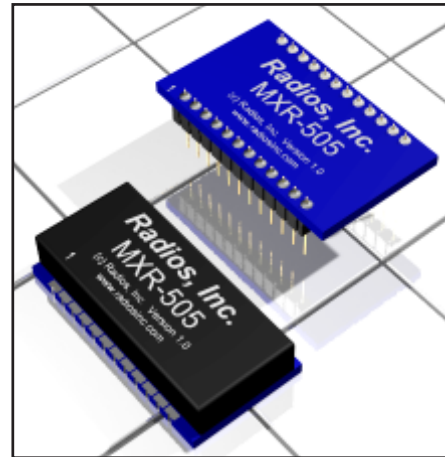

The transmitter is composed of both a PLL frequency synthesizer and a power amplifier. The synthesizer uses a voltage-controlled crystal oscillator, a dual-modulus prescaler, programmable frequency dividers, and a phase-detector. The power amplifier's output power can be programmed to seven different levels.

The MXR-505 has zero IF architecture which enables channel filtering with low-power, integrated low-pass filters. Each channel includes a pre-amplifier and a third order Sallen-Key RC low-pass filter that protects the switched-capacitor filter from strong adjacent channel signals. The main channel filter is a switched-capacitor implementation of a six-pole elliptic low pass filter. The cutoff frequency of the Sallen-Key RC filter can be programmed to four different frequencies: 100kHz, 150 kHz, 230 kHz, and 340 kHz. A receive signal strength indicator circuit indicates the received signal level. The MXR-505 is a well-designed transceiver suitable for a variety of RF applications, particularly voice applications and high volume OEM applications.

Key Features

- Low cost
- Wide supply voltage range
- Wide operating temperature range
- Easily integrated
- Low power consumption
- Compact surface-mount packages/Small Size
- 2.5V operation
- Simple serial programming interface
- Baud rate from 1200 to 200,000 bps
- Spread spectrum
- External reset pin
- Exceptional sensitivity: -111dBm
- Receive signal strength (RSSI) pin
- No production tuning

Typical Applications

- Remote controls
- Garage openers / Gate controls
- Keyless entry
- Lighting control
- Home / Industrial automation
- Continuous / Periodic data transfer
- Wireless networking
- Remote access
- Remote monitoring / Telemetry
- Medical monitoring / Call systems
- Guard patrol / Lone worker protection
- Domestic / Commercial security
- Fire / Security alarms
- Long-range RFID
- Automated meter reading

Contact Information

Radios, Inc.
1408 Center Avenue
Oostburg, WI 53070


Phone: 920-564-6622
Fax: 920-564-6630
Email: sales@radiosinc.com

MXR-505

UHF FM TRANSCEIVER MODULE

Mechanical and Pin Diagram

* Note: Pinouts of surface mount and through-hole packages are mirrored

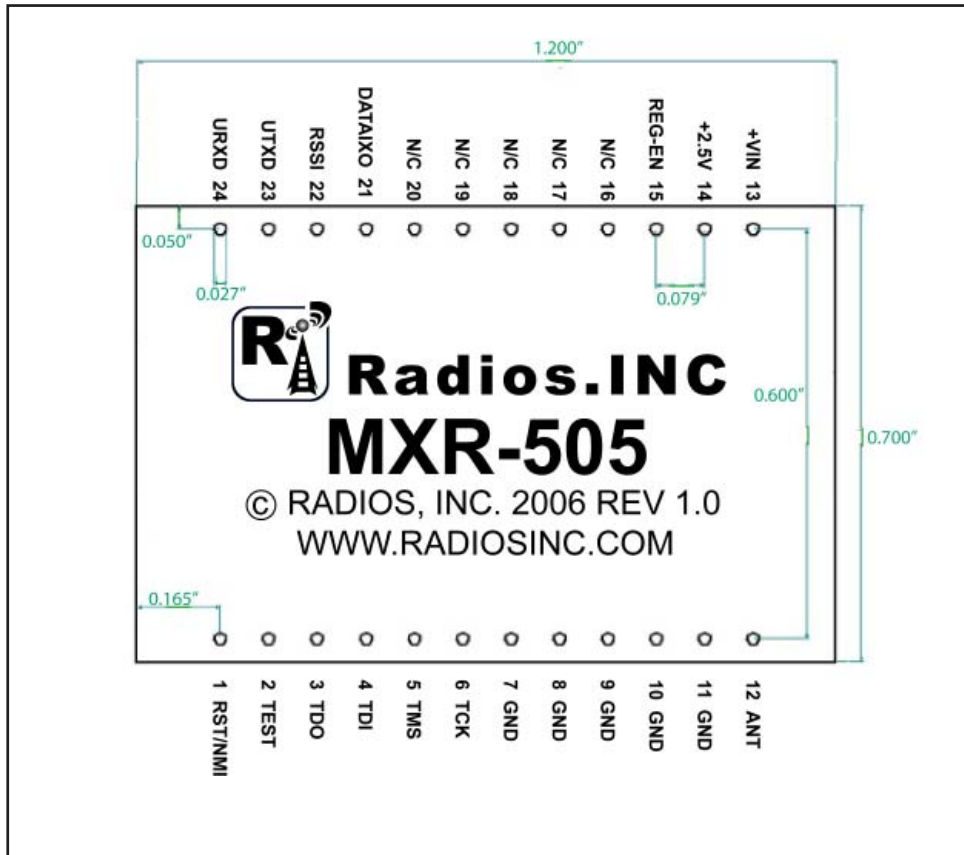

DIP Package

Pin Description


| Pin Num | Pin Name | Description | Pin Num | Pin Name | Description |
|---------|----------|---------------------------|---------|----------|--|
| Pin 1 | RST/NMI | No Connect | Pin 13 | +VIN | Positive Supply Pin (2.6-16V) |
| Pin 2 | TEST | No Connect | Pin 14 | +2.5V | Regulated Output (2.5V) |
| Pin 3 | TDO | No Connect | Pin 15 | REG-EN | Regulator Enable (2-VCC) |
| Pin 4 | TDI | No Connect | Pin 16 | N/C | No Connect |
| Pin 5 | TMS | No Connect | Pin 17 | N/C | No Connect |
| Pin 6 | TCK | No Connect | Pin 18 | N/C | No Connect |
| Pin 7 | Gnd | Ground | Pin 19 | N/C | No Connect |
| Pin 8 | Gnd | Ground | Pin 20 | DATACLK | Data Clock Output (0-2.5V) |
| Pin 9 | Gnd | Ground | Pin 21 | DATAIXO | Data Input/Output (0-2.5V) |
| Pin 10 | Gnd | Ground | Pin 22 | RSSI | Receive Signal Strength Indicator (0-2.5V) |
| Pin 11 | Gnd | Ground | Pin 23 | UTXD | Transmit Data Out—UART mode (0-2.5V) |
| Pin 12 | Ant | RF Input/Output (50 Ohms) | Pin 24 | URXD | Receive Data Out—UART mode (0-2.5V) |

MXR-505

UHF FM TRANSCEIVER MODULE

Mechanical and Pin Diagram

* Note: Pinouts of surface mount and through-hole packages are mirrored

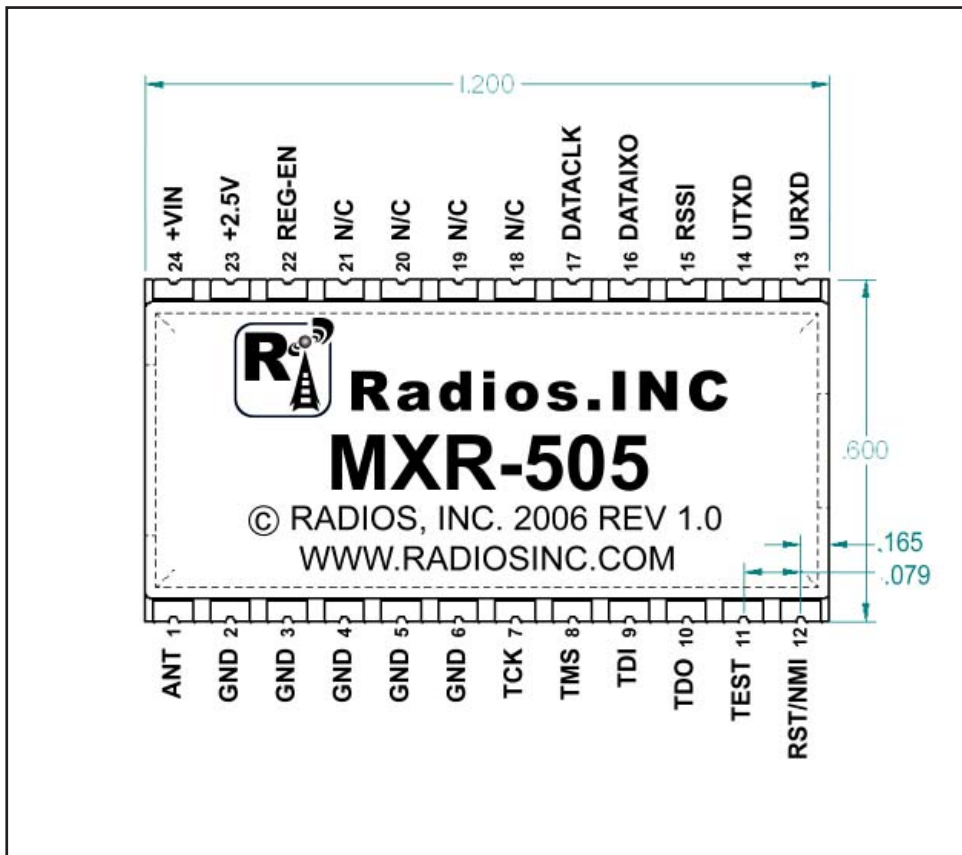

Surface Mount Package

Pin Description

| Pin Num | Pin Name | Description | Pin Num | Pin Name | Description |
|---------|----------|---------------------------|---------|----------|--|
| Pin 1 | Ant | RF Input/Output (50 Ohms) | Pin 13 | URXD | Receive Data Out—UART mode (0-2.5V) |
| Pin 2 | Gnd | Ground | Pin 14 | UTXD | Transmit Data Out—UART mode (0-2.5V) |
| Pin 3 | Gnd | Ground | Pin 15 | RSSI | Receive Signal Strength Indicator (0-2.5V) |
| Pin 4 | Gnd | Ground | Pin 16 | DATAIXO | Data Input/Output (0-2.5V) |
| Pin 5 | Gnd | Ground | Pin 17 | DATACLK | Data Clock Output (0-2.5V) |
| Pin 6 | Gnd | Ground | Pin 18 | N/C | No Connect |
| Pin 7 | TCK | No Connect | Pin 19 | N/C | No Connect |
| Pin 8 | TMS | No Connect | Pin 20 | N/C | No Connect |
| Pin 9 | TDI | No Connect | Pin 21 | N/C | No Connect |
| Pin 10 | TDO | No Connect | Pin 22 | REG-EN | Regulator Enable (2-VCC) |
| Pin 11 | TEST | No Connect | Pin 23 | +2.5V | Regulated Output (2.5V) |
| Pin 12 | RST/NMI | No Connect | Pin 24 | +VIN | Positive Supply Pin (2.6-16V) |

MXR-505

UHF FM TRANSCEIVER MODULE

MXR-505 Communication

Communication with the MXR-505 is accomplished through a universal asynchronous receive/transmit (UART) peripheral interface. The UART uses 8-bit, non-parity, LSB, 1200bps baud format. The maximum number of data bytes that can be transmitted or received in one packet is 50. The user will transmit data through the UART on the MXR-505 via pin 24, URXD. The MXR-505 will packetize and wirelessly transmit the data. Once the data is received on the other side, the MXR-505 will demodulate the data and send the received data out to the user via pin 23, UTXD. The data being sent through the UART should follow a specific protocol.

The communication protocol is outlined below:

Byte #1 **Number of Bytes** – The number of bytes is one byte containing the total number of data bytes. This byte should not be included in the number of bytes. Therefore, the number of bytes should be one less than the total number of bytes being sent or received. The maximum number of data bytes that can be transmitted or received is 50; therefore, the number of bytes should not exceed 50.

Bytes #2-51 **Data Bytes** – The data bytes are the actual data byte values being transmitted or received by the MXR-505. The MXR-505 can send or receive a maximum of 50 data bytes per packet. The first two bytes are used as preamble bytes by Radios, Inc. to differentiate the detection of data from noise. They can be set to any value, but to work with the HHDS-ML they must be set to 0xFF and 0x00, respectively.

When the first byte is received through the UART on the MXR-505, the user will have one second to send the remaining data bytes to the MXR-505. If the MXR-505 does not receive all of the data bytes within that second, the data the MXR-505 did receive will be dumped. For example, if the user sends a 10 for the number of bytes and then only sends five more bytes within one second, the MXR-505 assumes this is corrupted data and does not transmit the packet. The five bytes the MXR-505 did receive will be discarded and the MXR-505 will wait for a new packet of data to be received.

Electrical Limits

| Sym | Parameters | Min | Typ | Max | Unit | Notes |
|-----------------|---------------------------------|------|-----|-----|------|-------|
| | Absolute Maximum Ratings | | | | | |
| VCC | Supply Voltage | 2.6 | | 16 | V | |
| | Voltage on any Pins | -0.5 | | 2.7 | V | |
| | Storage Temperature Range | 0 | | 70 | °C | |
| | Lead Temperature | | 260 | | °C | |
| V _{EN} | Enable Input Voltage | 0 | | 16 | V | |
| | ESD Rating | | | | kV | |
| | Operating Ratings | | | | | |
| | Package Thermal Resistance | | | | °C/W | |
| V _{EN} | Enable Input Voltage | 0 | | VCC | V | |
| TA | Ambient operating temperature | 0 | | 70 | °C | |

MXR-505

UHF FM TRANSCEIVER MODULE

Electrical Characteristics

This device is ESD sensitive. Do not operate or store near strong electrostatic fields. Use appropriate ESD precautions. All voltages are with respect to Ground.

| Parameters | Test Conditions | Min | Typ | Max | Unit |
|----------------------------------|---|------|------|--------|------|
| Power Supply | | | | | |
| RF Frequency Operating Range | | 2400 | | 2483.5 | MHz |
| Power Supply | | | | | V |
| Power Down Current | | | | | μA |
| Standby current | | | | | μA |
| Quiescent Current | | 13 | 20 | 29 | μA |
| Operating Voltage | | 2.6 | | 16 | V |
| | | | | | |
| VCO and PLL Section | | | | | |
| Reference Frequency | | | | | MHz |
| PLL Lock Time | 915MHz to 915.5MHz | | | | ms |
| 3kHz bandwidth | 902MHz to 927MHz | | | | ms |
| | 20kHz bandwidth | | | | ms |
| Switch Time | Rx – Tx | | | | ms |
| 3kHz loop bandwidth | Tx – Rx | | | | ms |
| | Standby Rx | | | | ms |
| | Standby Tx | | | | ms |
| Crystal Oscillator Start-Up Time | 16 pF load | | 0.86 | | ms |
| Charge Pump Current | VCPOUT = 1.1V, CP_HI = 0 | | | | μA |
| | VCPOUT = 1.1V, CP_HI = 1 | | | | μA |
| Charge Pump Tolerance | | | | | % |
| | | | | | |
| Transmit Section | | | | | |
| Output Power | Delivered to a single ended 50 ohm load through a balun | -3 | 0 | | dBm |
| Output Power Tolerance | Over temperature range | | | | dB |
| | Over power supply range | | | | dB |
| Tx Current Consumption | P = -25 dBm | | 8.5 | | mA |
| | P = -15 dBm | | 9.9 | | mA |
| | P = -10 dBm | | 11 | | mA |
| | P = -5 dBm | | 14 | | mA |
| | P = 0 dBm | | 17.4 | | mA |
| Tx Current Consumption Variation | 10dBm | | | | mA |
| Binary FSK Frequency Separation | bitrate = 200kbps | | | | kHz |
| Data Rate | | 250 | | 250 | kbps |
| Occupied bandwidth | 20kbps, b = 2, 20dBc | | | | kHz |
| | 125kbps, b = 2, 20dBc | | | | kHz |
| | 200kbps, b = 2, 20dBc | | | | kHz |
| 2nd Harmonic | | | -34 | | dBc |
| 3rd Harmonic | | | -60 | | dBc |
| Spurious Emission | 30-1000 MHz | | | -36 | dBm |
| | 1-12.75 GHz | | | -30 | dBm |
| | 1.8-1.9 GHz | | | -47 | dBm |
| | 5.15-5.3 GHz | | | -47 | dBm |

MXR-505

UHF FM TRANSCEIVER MODULE

Electrical Characteristics - CONT.

| Receive Section | | | | | |
|----------------------------------|--|--------|----------------------|------------|----------------------|
| Rx Current Consumption | | | 19.7 | | mA |
| Rx Current Consumption Variation | Over temperature | | | | mA |
| Receiver Sensitivity | | -90 | -94 | | dBm |
| Receiver Maximum Input Power | 125kbps, 125kHz deviation 20kbps, 20kHz deviation | | | | dBm dBm |
| Receiver Sensitivity Tolerance | Over temperature Over power supply range | | | | dB dB |
| Receiver Bandwidth | | | | | kHz |
| Co-Channel Rejection | | | | | dB |
| Adjacent Channel Rejection | 200kHz spacing 500kHz spacing 1MHz spacing | | | | |
| Blocking | ±1MHz ±2MHz ±5MHz ±10MHz | | 42 47 38 41 | | dB dB dB dB |
| Noise Figure, Cascade | | | TBD | | dB |
| 1dB Compression | | | -35 | | dB |
| Input IP3 | 2 tones with 1MHz separation | | -25 | | dBm |
| Input IP2 | | | | | dBm |
| LO Leakage | | | | -90 | dBm |
| Spurious Emission | < 1GHz < 1GHz | | | -54 -54 | dBm dBm |
| Input Impedance | | | 50 | | Ohms |
| Input Reflection (s11) | | | -20 | -15 | dB |
| RSSI Dynamic Range | | | 50 | | dB |
| RSSI Output Voltage | Pin = 100dBm Pin = 60dBm | | 0.9 1.85 | | V V |
| Digital Inputs/Outputs | | | | | |
| Logic Input High | | 0.7VCC | | VCC | V |
| Logic Input Low | | 0 | | 0.3VCC | V |
| Clock/Data Frequency | | | | 10 | MHz |
| Clock/Data Duty Cycle | | 45 | | 55 | % |
| Regulator Enable Input | | | | | |
| Input Low Voltage | Regulator OFF | | | 0.6 | V |
| Input High Voltage | Regulator ON | 2.0 | | | V |
| Enable Input Current | V _{EN} = 0.6V; Regulator OFF | | 0.01 | | µA |

Note 1. Exceeding the absolute maximum rating may damage the device.

Note 2. The device is not guaranteed to function outside its operating rating.

Note 3. Devices are ESD sensitive. Handling precautions recommended. Human body model, 1.5k in series with 100pF.

MXR-505

UHF FM TRANSCEIVER MODULE

Technical Support:

Radios, Inc. is committed to providing its customers with excellent technical support and the resources necessary to assist them with their product development. All technical support is provided free of charge. Customers have several options to obtain assistance. First, any questions or concerns can be e-mailed to Radios, Inc. at information@radiosinc.com. We monitor our e-mail daily, and will respond to all questions promptly. Additionally, to speak directly to a technical support representative, customers can call Radios, Inc. at 920-564-6622.

Compliance:

Embedded wireless modules are intended for use as component devices which require peripheral elements to operate. Radios, Inc.'s modules are intended to be used in products requiring compliance. They are, however, not pre-approved by the FCC or any other agency worldwide unless so stated. The user or customer understands that regulatory compliance may be required prior to the sale or operation of the module or development system, and agrees to abide by all laws governing the module's or development system's use in the country of operation.

The approval process of embedded wireless modules in the United States is relatively uncomplicated. The Federal Communications Commission (FCC) is the governing body in the US that specifies its requirements in the Code of Federal Regulations (CFR), Title 47. Title 47 consists of several volumes and it is necessary to first identify the correct section that applies to your application. These rules require that a device which intentionally creates RF emissions be FCC compliant; i.e., pre-tested for compliance and assigned an identification number. Radios, Inc. offers pre-screening at one of our affiliate test sites. Final certification is then accomplished by an independent test laboratory. After passing compliance testing, you will be issued a unique ID number which must be placed on each product manufactured.

Any questions dealing with interpretations of the rules relating to testing or compliance should be addressed to:

FCC
Equipment Authorization Division
Customer Service Branch, MN 1300F2
7435 Oakland Mills Road
Columbia, MD 21046

MXR-505

UHF FM TRANSCEIVER MODULE

Returns:

Products may be returned directly to Radios, Inc. for evaluation. Returns, without exception, must have a valid RMA number attached. RMA numbers can be obtained by calling a customer service representative at Radios, Inc. If a product is found to be defective and is returned within 90 days of purchase, Radios, Inc. may repair or replace, at its option, said defective product. The warranty does not apply to any products which have been disassembled, modified or subjected to conditions exceeding the application specifications. Under no circumstances will Radios, Inc. be responsible for losses, financial or other, arising from the use or failure of a device in an application or for losses arising from failure to meet delivery requirements, other than the repair, replacement, or refund limited to the original product purchase price. No other warranties, express, implied, or statutory, including warranty of fitness for a particular purpose, apply.

Product Warranty and Disclaimer Information:

Radios, Inc. is dedicated to providing its customers with the best possible products, and is continually working on improving the quality and function of its entire product line. Therefore, Radios, Inc. reserves the right to make changes to the design, specifications, or manufacturing of its products without notice. The information contained in this data sheet is believed to be complete, accurate, and reliable as of the time of publication. Because product specifications are based on representative lot samples, however, values can vary from lot to lot and are not guaranteed.

Radios, Inc. does not assume any liability or responsibility arising from the application or use of any product described herein, and makes no guarantee, warranty, or representation regarding the suitability or legality of any product for use in a specific application. Radios, Inc. does not assume any liability for any infringement of patents or other rights of third parties which may result from the use of its products. No product sold by Radios, Inc. is intended for use in a life critical application, or any application where the safety of property is at risk. The user assumes full and complete responsibility for any use of Radios, Inc.'s products in an application where the safety of life or property is at stake.

Radios, Inc., its suppliers, and its licensors shall in no event be liable for any damages arising from the use of or inability to use this product. This includes business interruption, loss of business information, or other losses that may arise from the use of this product. Some devices described in this publication are patented. Under no circumstances shall any user be conveyed any license or right to the use or ownership of these patents.

Copyright:

Radios Inc. reserves the right to all proprietary or commercial information contained in this data sheet. This data sheet is protected by copyright, and any unauthorized copying, reproduction, or dissemination is strictly prohibited without the prior written approval of Radios Inc.

MXR-505


UHF FM TRANSCEIVER MODULE

Editorial Information:

Last Updated (Date)
May 30, 2007 PRELIMINARY

Product Ordering Information:

MXR-505 E - 915 D 4800 R A -B

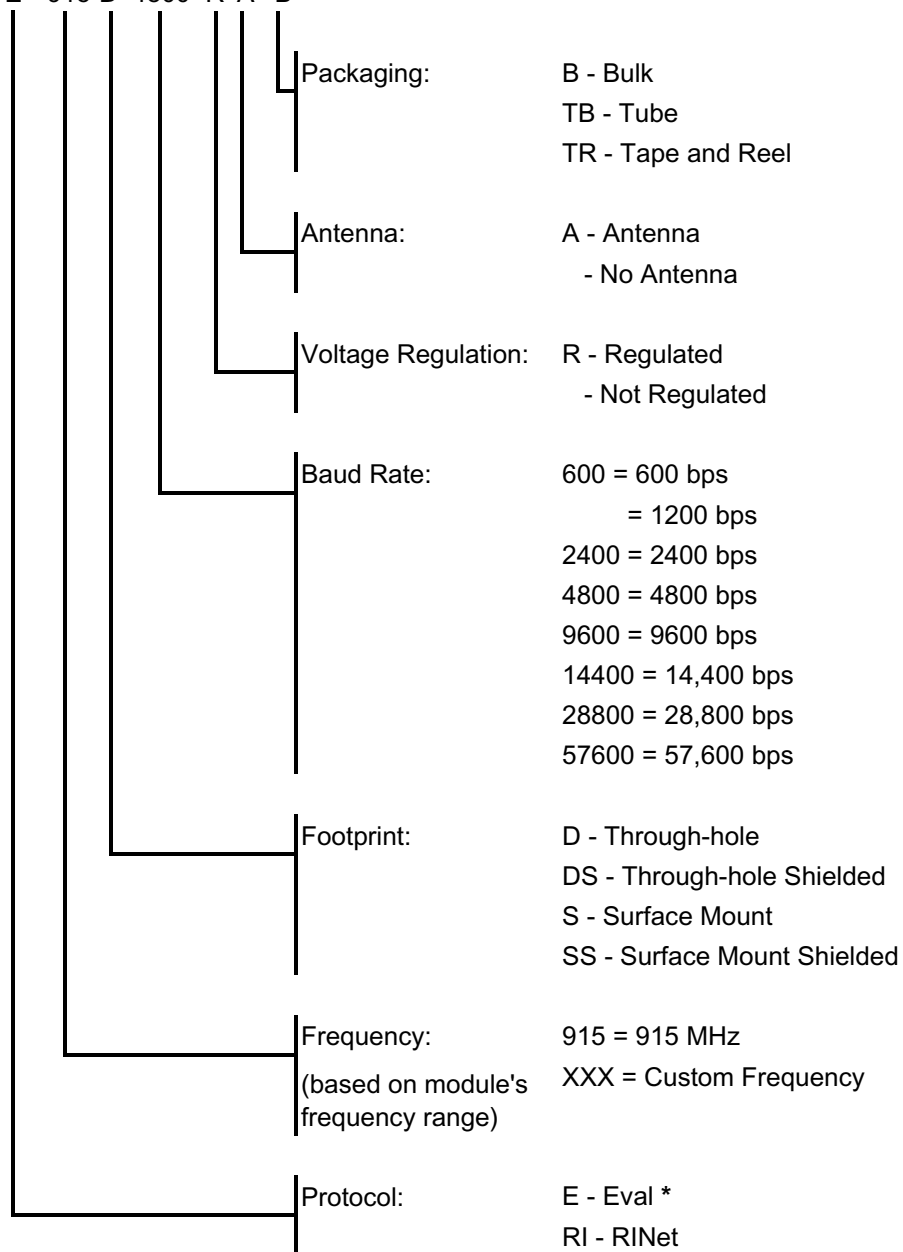

* Eval software for use with HHDS-ML M only. Will not work for other applications.