

Dropper Type Dual Output Regulator SI-3102S

Features

- Single input dual output <sub output (5V/0.04A), main output (5V/0.1A)>
- Main output can be externally turned ON/OFF (with ignition switch, etc.)
<most suitable as memory backup power supply>
- Low standby current ($\leq 0.8\text{mA}$)
- Low dropout voltage $\leq 1\text{V}$
- Built-in constant current type overcurrent, overvoltage and thermal protection circuits
- TO-220 equivalent 5-terminal full-mold miniature package

Absolute Maximum Ratings

(Ta=25°C)

Parameter	Symbol	Ratings	Unit	Conditions	
DC Input voltage	V _{IN}	35	V		
Battery reverse connection	V _{INB}	-13 ^{*6}	V	One minute	
Output control terminal voltage	V _C	V _{IN}	V		
Output current	CH1 CH2	I _{O1} I _{O2}	0.04 ^{*1} 0.1 ^{*1}	A	
Power Dissipation	P _{D1} P _{D2}	22 1.8	W	With infinite heatsink Stand-alone without heatsink	
Junction temperature	T _j	-40 to +150	°C		
Operating temperature	T _{OP}	-40 to +105	°C		
Storage temperature	T _{STG}	-40 to +150	°C		
Junction to case thermal resistance	θ_{j-c}	5.5	°C/W		
Junction to ambient-air thermal resistance	θ_{j-a}	66.7	°C/W	Stand-alone without heatsink	

Electrical Characteristics


(T_j=25°C, V_{IN}=14V unless otherwise specified)

Parameter	Symbol	Ratings			Unit	Conditions	
		min	typ	max			
Input voltage	V _{IN}	6 ^{*2}		30 ^{*1}	V		
Output voltage	CH1 CH2	V _{O1} V _{O2}	4.80 4.80	5.00 5.00	5.20 5.20	V	I _O =0.04A I _O =0.1A
Channel-channel voltage difference (V _{O1} -V _{O2})	ΔV_O	-0.3		5.3	V	V _{IN} =0 to 40V, I _{O1} and I _{O2} =0A up to load short-circuiting	
Dropout voltage	CH1 CH2	V _{DIF1} V _{DIF2}		1.0 1.0	V	I _{O1} =0.04A I _{O2} =0.1A	
Line regulation	CH1 CH2	ΔV_O LINE1 ΔV_O LINE2	10 10	50 50	mV	V _{IN} =6 to 30V, I _O =0.04A V _{IN} =6 to 30V, I _O =0.1A	
Load regulation	CH1 CH2	ΔV_O LOAD1 ΔV_O LOAD2	30 40	70 70	mV	I _{O1} =0 to 0.04A I _{O2} =0 to 0.1A	
Ripple rejection	CH1 CH2	R _{REJ1} R _{REJ2}		54 54	dB	f=100 to 120Hz	
Quiescent circuit current	I _Q			0.8	mA	I _{O1} =0A, V _C =0V	
Overcurrent protection starting current	CH1 CH2	I _{(S1)1} I _{(S1)2}	0.06 ^{*3} 0.15 ^{*3}		A		
Output control voltage	Output ON Output OFF	V _{CH} V _{CL}	4.2 3.2	4.5 3.5	4.8 3.8	V	
Output control current	Output ON Output OFF	I _{CH} I _{CL}		100 -100	μA	V _C =4.8V V _C =3.2V	
Overvoltage protection starting voltage	V _{OVP}	30 ^{*4}			V		
Thermal protection starting temperature	T _{TSD}	151 ^{*5}			°C		

Notes:


- Since P_{D(max)} = (V_{IN}-V_O) • I_{O1} + (V_{IN}-V_{O2}) • I_{O2} = 22 (W), V_{IN} (max), I_{O1} (max) and I_{O2} (max) may be limited depending on operating conditions. Refer to the Ta-P_D curve to compute the corresponding values.
- Refer to the dropout voltage.
- I_{S1} rating shall be the point at which the output voltage V_{O1} or V_{O2} (V_{IN}=14V, I_{O1}=0.04A or I_{O2}=0.1A) drops to -5%.
- Overvoltage protection circuit is built only in CH2 (V_{O2} side).
- The indicated temperatures are junction temperatures.
- All terminals, except V_{IN} and GND, are open.

External Dimensions (unit: mm)

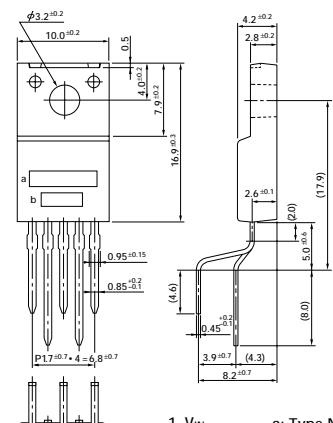


(Forming No. 1101)

Equivalent Circuit Diagram

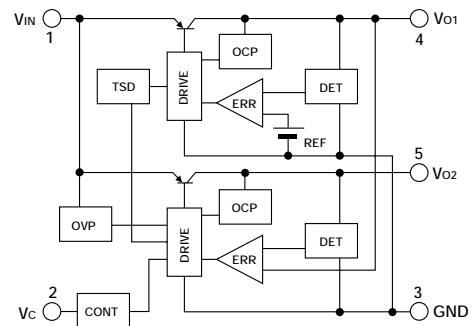

Standard Circuit Diagram

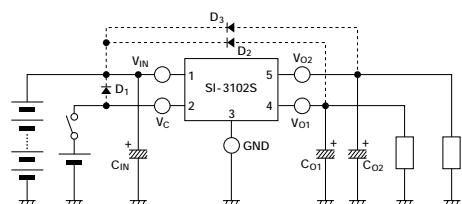

C_{O1}: Output capacitor (47 to 100μF, 50V)
C_{O2}: Output capacitor (47 to 100μF, 50V)
*1 C_{IN}:


Anti-oscillation capacitors (approx. 47μF). Tantalum capacitors are recommended, especially at low temperatures.

*2 D₁, D₂, D₃: Protection diode.


Required as protection against reverse biasing between input and output.

(Recommended diode: Sanken EUZ2.)


■ Line Regulation (1)

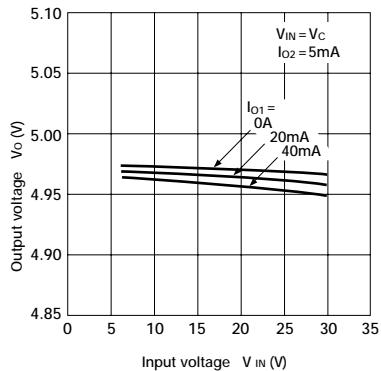


■ Line Regulation (2)

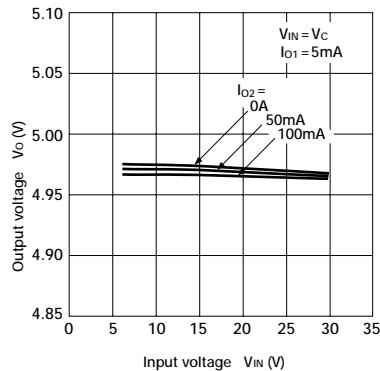


■ Load Regulation (1)

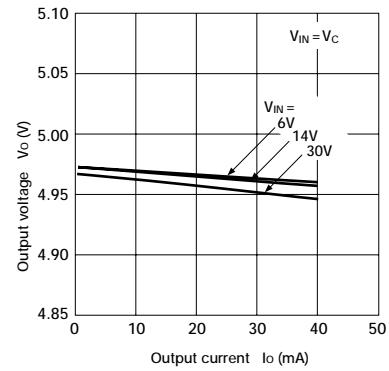


■ Load Regulation (2)

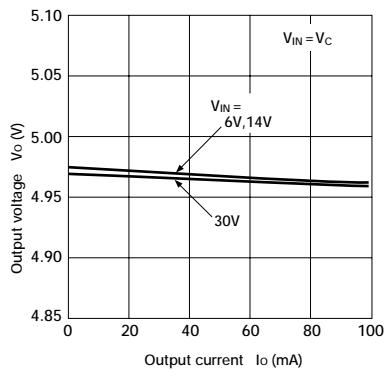


■ Rise Characteristics

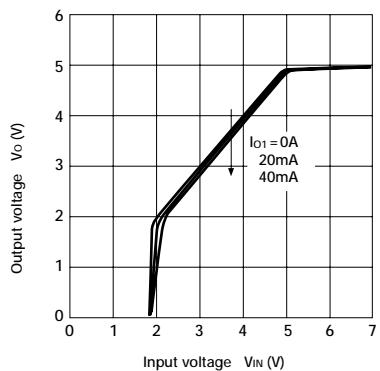


■ Circuit Current

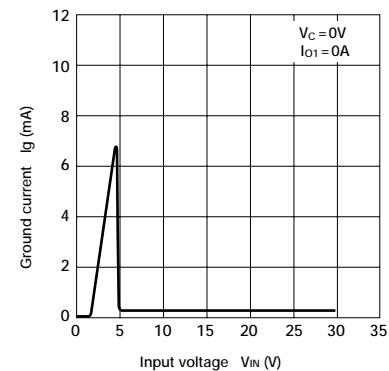


■ ON/OFF Control Characteristics

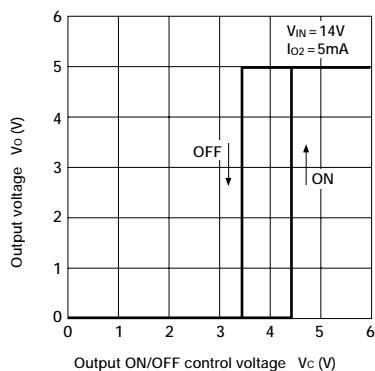


■ Overcurrent Protection Characteristics (1)

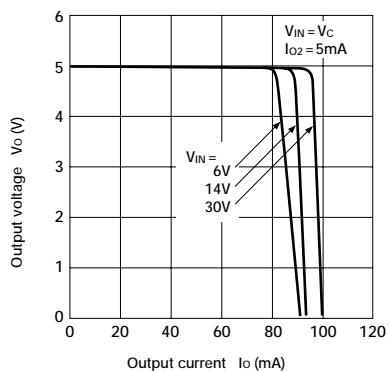


■ Overcurrent Protection Characteristics (2)

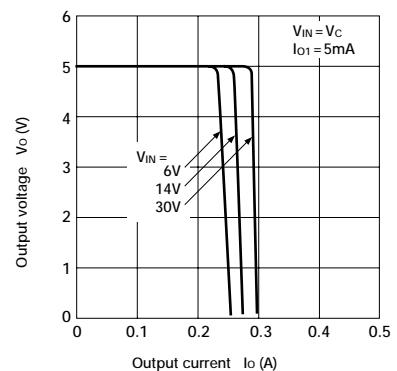


■ Thermal Protection Characteristics

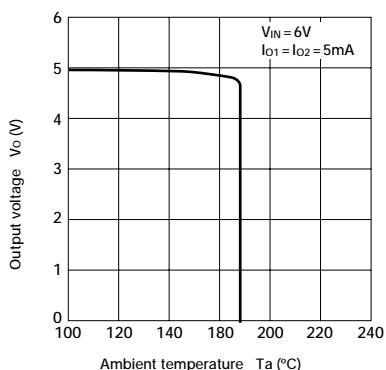

■ Overvoltage Protection Characteristics

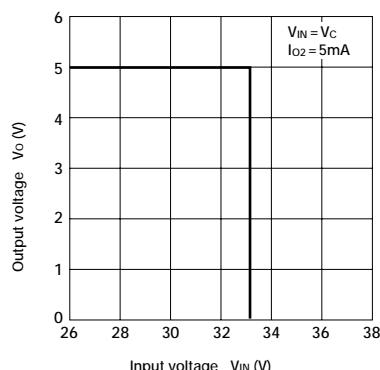

■ Ta—Pd Characteristics

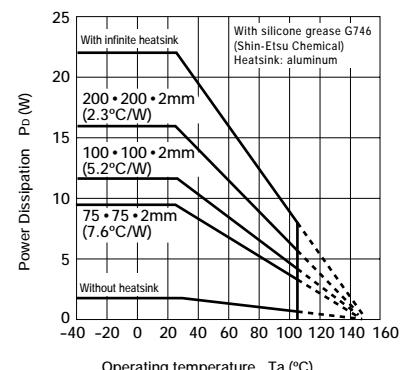

Note on Thermal Protection Characteristics:

The thermal protection circuit is intended for protection against heat during instantaneous short-circuiting. Its operation, including reliability, is not guaranteed for short-circuiting over an extended period of time.