


## Current Transducer LA 125-P

$$I_{PN} = 125 \text{ A}$$

For the electronic measurement of currents : DC, AC, pulsed..., with a galvanic isolation between the primary circuit (high power) and the secondary circuit (electronic circuit).



16030



### Electrical data

$I_{PN}$	Primary nominal r.m.s. current	125	A				
$I_P$	Primary current, measuring range	0 .. $\pm 200$	A				
$R_M$	Measuring resistance @	$T_A = 70^\circ\text{C}$		$T_A = 85^\circ\text{C}$			
			$R_{Mmin}$	$R_{Mmax}$	$R_{Mmin}$	$R_{Mmax}$	
		with $\pm 12 \text{ V}$	@ $\pm 125 \text{ A}_{max}$	5	52	14	50 $\Omega$
			@ $\pm 200 \text{ A}_{max}$	5	20	14	18 $\Omega$
		with $\pm 15 \text{ V}$	@ $\pm 125 \text{ A}_{max}$	25	74	40	72 $\Omega$
			@ $\pm 200 \text{ A}_{max}$	25	34	40 <sup>1)</sup>	40 <sup>1)</sup> $\Omega$
$I_{SN}$	Secondary nominal r.m.s. current	125	mA				
$K_N$	Conversion ratio	1 : 1000					
$V_C$	Supply voltage ( $\pm 5\%$ )	$\pm 12 \dots 15$	V				
$I_C$	Current consumption	16 (@ $\pm 15 \text{ V}$ ) + $I_S$	mA				
$V_d$	R.m.s. voltage for AC isolation test, 50 Hz, 1 mn	3	kV				

### Accuracy - Dynamic performance data

$X$	Accuracy @ $I_{PN}, T_A = 25^\circ\text{C}$	@ $\pm 15 \text{ V} (\pm 5\%)$	$\pm 0.60$	%
		@ $\pm 12 \dots 15 \text{ V} (\pm 5\%)$	$\pm 0.80$	%
$e_L$	Linearity error		< 0.15	%
$I_O$	Offset current @ $I_P = 0, T_A = 25^\circ\text{C}$		Typ	Max
$I_{OM}$	Residual current <sup>2)</sup> @ $I_P = 0$ , after an overload of $3 \times I_{PN}$			$\pm 0.40$ mA
$I_{OT}$	Thermal drift of $I_O$	0 $^\circ\text{C}$ .. +70 $^\circ\text{C}$	$\pm 0.15$	$\pm 0.50$ mA
		-40 $^\circ\text{C}$ .. +85 $^\circ\text{C}$	$\pm 0.30$	$\pm 0.95$ mA
$t_{ra}$	Reaction time @ 10 % of $I_{PN}$		< 500	ns
$t_r$	Response time <sup>3) 4)</sup> @ 90 % of $I_{PN}$		< 1	$\mu\text{s}$
$di/dt$	$di/dt$ accurately followed <sup>4)</sup>		> 200	A/ $\mu\text{s}$
$f$	Frequency bandwidth <sup>4)</sup> (-1 dB)		DC .. 100	kHz

### General data

$T_A$	Ambient operating temperature	-40 .. +85	$^\circ\text{C}$
$T_S$	Ambient storage temperature	-40 .. +90	$^\circ\text{C}$
$R_S$	Secondary coil resistance @	$T_A = 70^\circ\text{C}$	32 $\Omega$
		$T_A = 85^\circ\text{C}$	33.5 $\Omega$
$m$	Mass Standards		40 g
			EN 50178 : 1997

- Notes :**
- 1) Measuring range limited to  $\pm 180 \text{ A}_{max}$
  - 2) The result of the coercive field of the magnetic circuit.
  - 3) With a  $di/dt$  of 100 A/ $\mu\text{s}$
  - 4) The primary conductor is best filling the through-hole and/or the return of the primary conductor is above the top of the transducer.

### Features

- Closed loop (compensated) current transducer using the Hall effect
- Printed circuit board mounting
- Insulated plastic case recognized according to UL 94-V0.


### Advantages

- Excellent accuracy
- Very good linearity
- Low temperature drift
- Optimized response time
- Wide frequency bandwidth
- No insertion losses
- High immunity to external interference
- Current overload capability.

### Applications

- AC variable speed drives and servo motor drives
- Static converters for DC motor drives
- Battery supplied applications
- Uninterruptible Power Supplies (UPS)
- Switched Mode Power Supplies (SMPS)
- Power supplies for welding applications.

## Dimensions LA 125-P (in mm. 1 mm = 0.0394 inch)

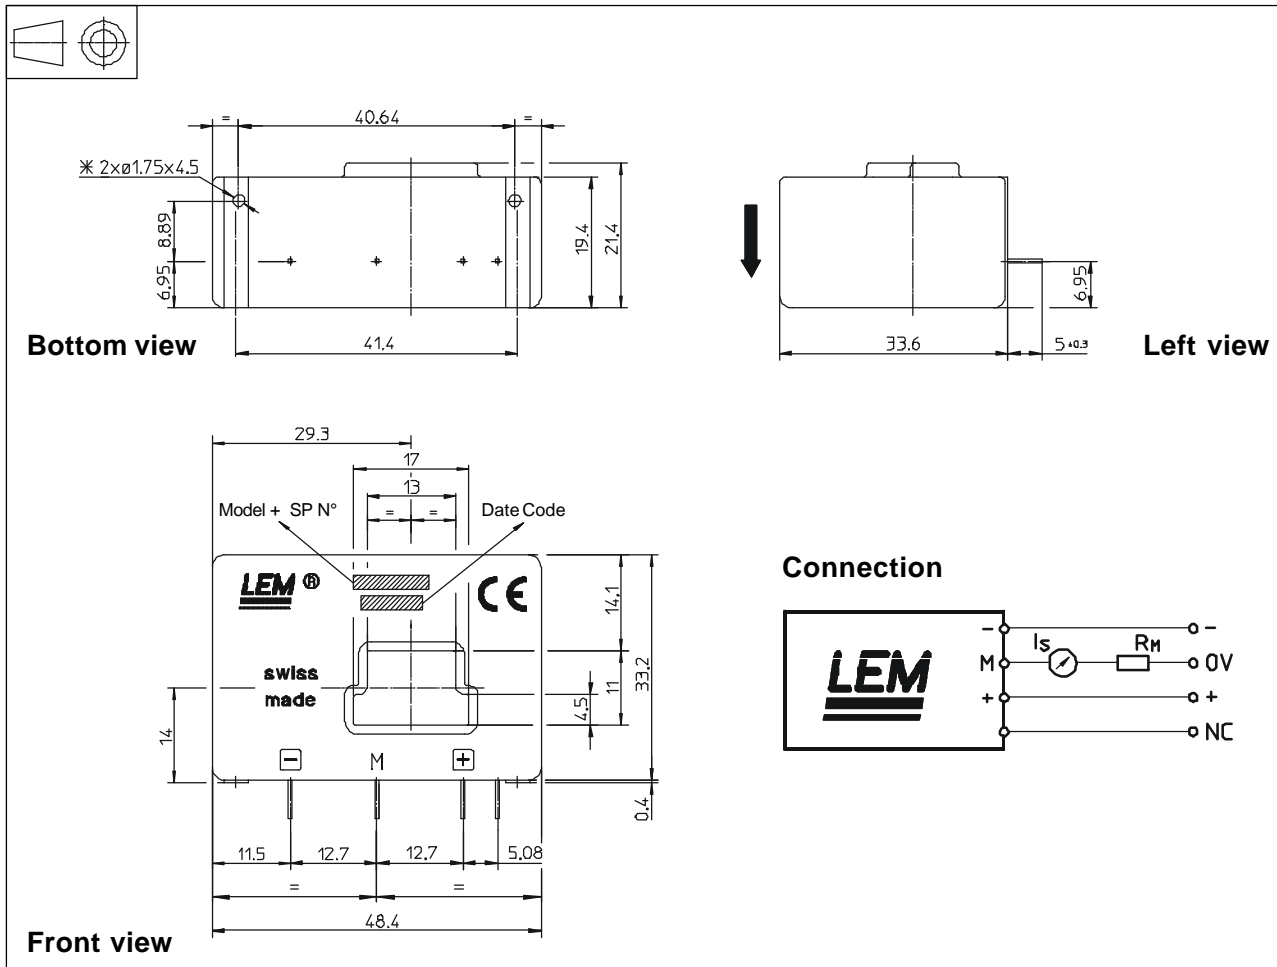

### Mechanical characteristics

• General tolerance	$\pm 0.2$ mm
• Primary through-hole	17 x 11 mm
• Fastening & connection of secondary	4 pins 0.63 x 0.56 mm
Recommended PCB hole	0.9 mm
• Supplementary fastening	2 holes $\varnothing 1.75$ mm
Recommended PCB hole	2.4 mm
Recommended screws	PT KA 22 x 6
Fastening torque, max.	0.5 Nm or .37 Lb. - Ft.

### Remarks

- $I_s$  is positive when  $I_p$  flows in the direction of the arrow.
- Temperature of the primary conductor should not exceed 90°C.
- Dynamic performances (di/dt and response time) are best with a primary bar in low position in the through-hole.
- In order to achieve the best magnetic coupling, the primary windings have to be wound over the top edge of the device.
- This is a standard model. For different versions (supply voltages, turns ratios, unidirectional measurements...), please contact us.