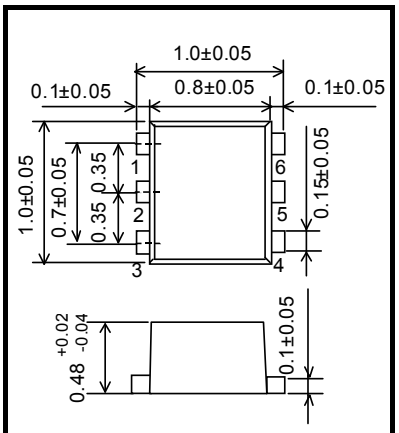
TOSHIBA Transistor Silicon PNP Epitaxial Type (PCT process) (Bias Resistor built-in Transistor)

RN2907FS,RN2908FS,RN2909FS

Switching, Inverter Circuit, Interface Circuit and Driver Circuit Applications.

- Two devices are incorporated into a fine pitch small mold (6-pin) package.
- Incorporating a bias resistor into a transistor reduces parts count. Reducing the parts count enables the manufacture of ever more compact equipment and lowers assembly cost.
- Complementary to RN1907FS to RN1909FS

Unit: mm




1.EMITTER1 (E1)
2.BASE1 (B1)
3.COLLECTOR2 (C2)
4.EMITTER2 (E2)
5.BASE2 (B2)
6.COLLECTOR1 (C1)

fS6

JEDEC	—
JEITA	—
TOSHIBA	2-1F1D

Weight: 1 mg (typ.)

Equivalent Circuit and Bias Resistor Values




Type No.	R1 (kΩ)	R2 (kΩ)
RN2907FS	10	47
RN2908FS	22	47
RN2909FS	47	22

Absolute Maximum Ratings (Ta = 25°C) (Q1, Q2 common)

Characteristics		Symbol	Rating	Unit
Collector-base voltage	RN2907FS to RN2909FS	V_{CBO}	−20	V
Collector-emitter voltage		V_{CEO}	−20	V
Emitter-base voltage	RN2907FS	V_{EBO}	−6	V
	RN2908FS		−7	
	RN2909FS		−15	
Collector current	RN2907FS to RN2909FS	I_C	−50	mA
Collector power dissipation		P_C*	50	mW
Junction temperature		T_j	150	°C
Storage temperature range		T_{stg}	−55 to 150	°C

Equivalent Circuit (top view)



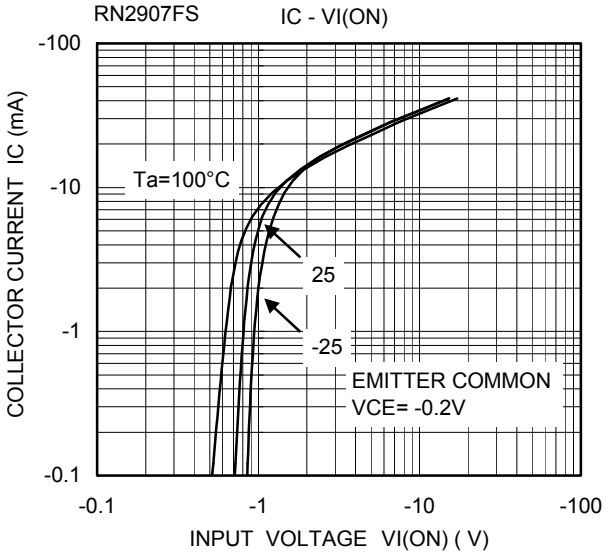
Note: Using continuously under heavy loads (e.g. the application of high temperature/current/voltage and the significant change in temperature, etc.) may cause this product to decrease in the reliability significantly even if the operating conditions (i.e. operating temperature/current/voltage, etc.) are within the absolute maximum ratings.
Please design the appropriate reliability upon reviewing the Toshiba Semiconductor Reliability Handbook (“Handling Precautions”/“Derating Concept and Methods”) and individual reliability data (i.e. reliability test report and estimated failure rate, etc).

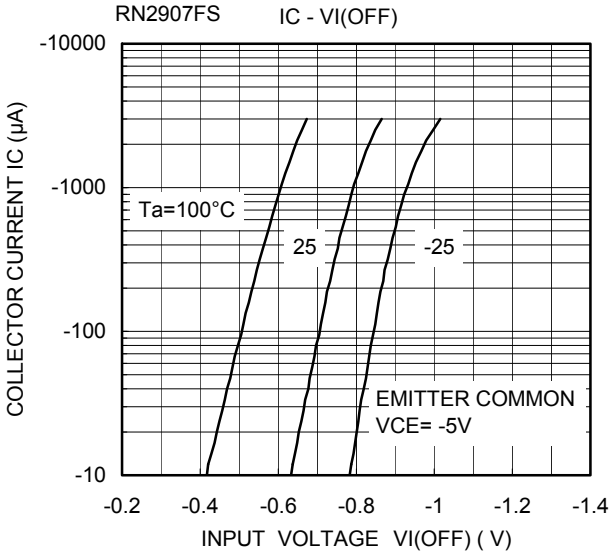
*: Total rating

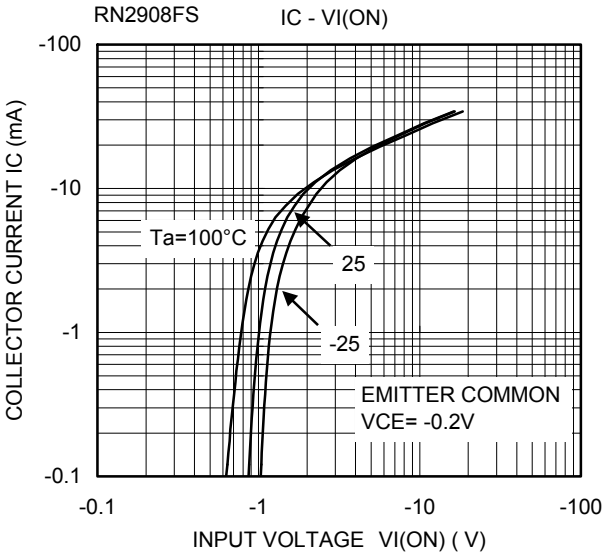
Electrical Characteristics (Ta = 25°C) (Q1, Q2 common)

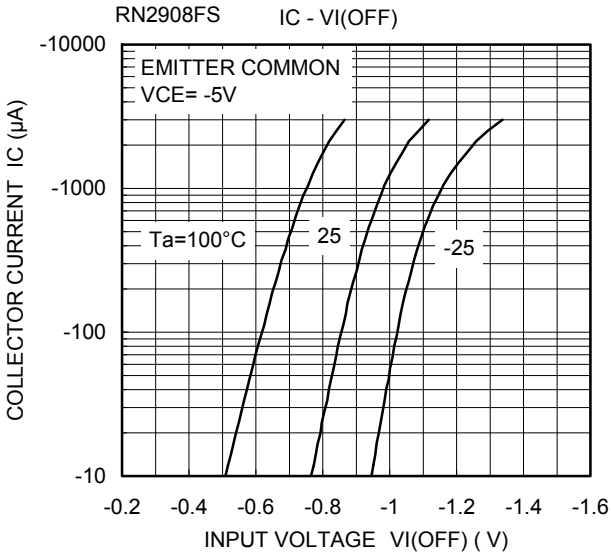
Characteristics		Symbol	Test Condition	Min	Typ.	Max	Unit
Collector cut-off current	RN2907FS to 2909FS	I_{CBO}	V_{CB} = –20 V, I_E = 0	—	—	–100	nA
		I_{CEO}	V_{CE} = –20 V, I_B = 0	—	—	–500	
Emitter cut-off current	RN2907FS	I_{EBO}	V_{EB} = –6 V, I_C = 0	–0.088	—	–0.131	mA
	RN2908FS		V_{EB} = –7 V, I_C = 0	–0.085	—	–0.126	
	RN2909FS		V_{EB} = –15 V, I_C = 0	–0.182	—	–0.271	
DC current gain	RN2907FS	h_{FE}	V_{CE} = –5 V, I_C = –10 mA	120	—	—	
	RN2908FS			120	—	—	
	RN2909FS			100	—	—	
Collector-emitter saturation voltage	RN2907FS to 2909FS	$V_{CE\ (sat)}$	I_C = –5 mA, I_B = –0.25 mA	—	—	–0.15	V
Input voltage (ON)	RN2907FS	$V_{I\ (ON)}$	V_{CE} = –0.2 V, I_C = –5 mA	–0.7	—	–1.5	V
	RN2908FS			–0.8	—	–2.2	
	RN2909FS			–1.6	—	–5.0	
Input voltage (OFF)	RN2907FS	$V_{I\ (OFF)}$	V_{CE} = –5 V, I_C = –0.1 mA,	–0.5	—	–1.0	V
	RN2908FS			–0.6	—	–1.1	
	RN2909FS			–1.3	—	–2.6	
Collector output capacitance	RN2907FS to 2909FS	C_{ob}	V_{CB} = –10 V, I_E = 0, f = 1 MHz	—	1.2	—	pF
Input resistor	RN2907FS	R1	—	8	10	12	kΩ
	RN2908FS			17.6	22	26.4	
	RN2909FS			37.6	47	56.4	
Resistor ratio	RN2907FS	R1/R2	—	0.17	0.213	0.255	
	RN2908FS			0.374	0.468	0.562	
	RN2909FS			1.71	2.14	2.56	

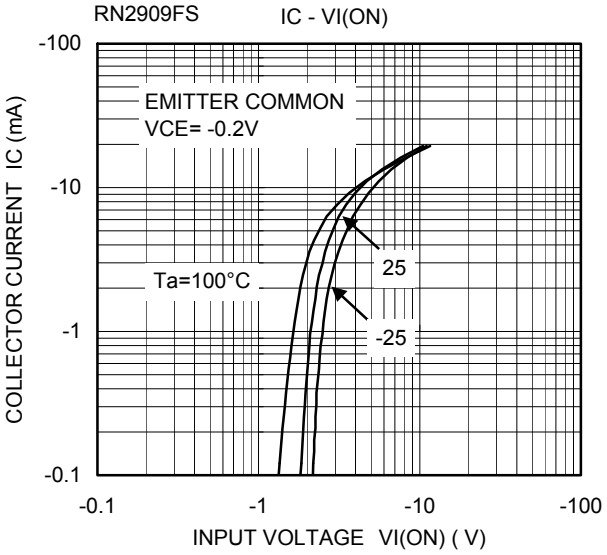
Q1, Q2 Common

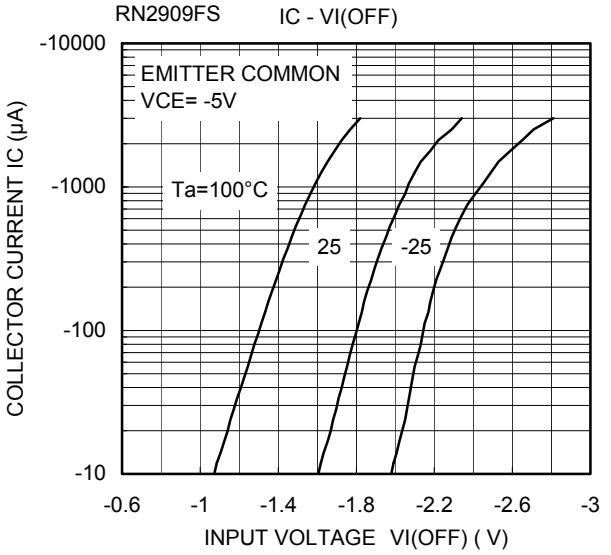

RN2907FS
IC - VI(ON)
COLLECTOR CURRENT IC (mA)
-100
-10
-1
-0.1
Ta=100°C
25
-25
EMITTER COMMON
VCE= -0.2V
-0.1
-1
-10
-100
INPUT VOLTAGE VI(ON) (V)


RN2907FS
IC - VI(OFF)
COLLECTOR CURRENT IC (μA)
-10000
-1000
-100
-10
Ta=100°C
25
-25
EMITTER COMMON
VCE= -5V
-0.2
-0.4
-0.6
-0.8
-1
-1.2
-1.4
INPUT VOLTAGE VI(OFF) (V)

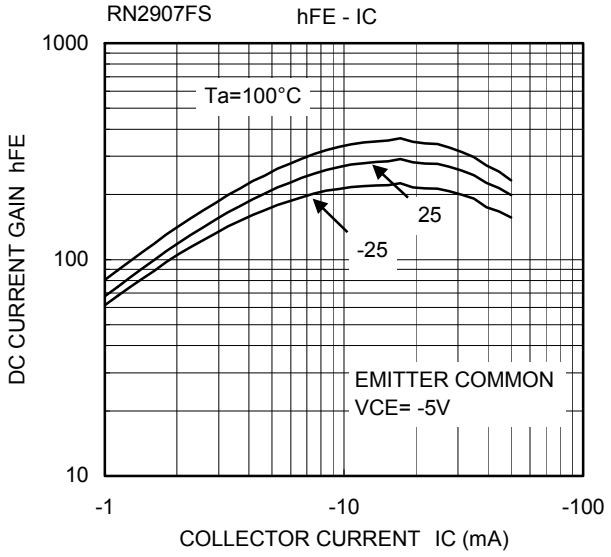

RN2908FS
IC - VI(ON)
COLLECTOR CURRENT IC (mA)
-100
-10
-1
-0.1
Ta=100°C
25
-25
EMITTER COMMON
VCE= -0.2V
-0.1
-1
-10
-100
INPUT VOLTAGE VI(ON) (V)

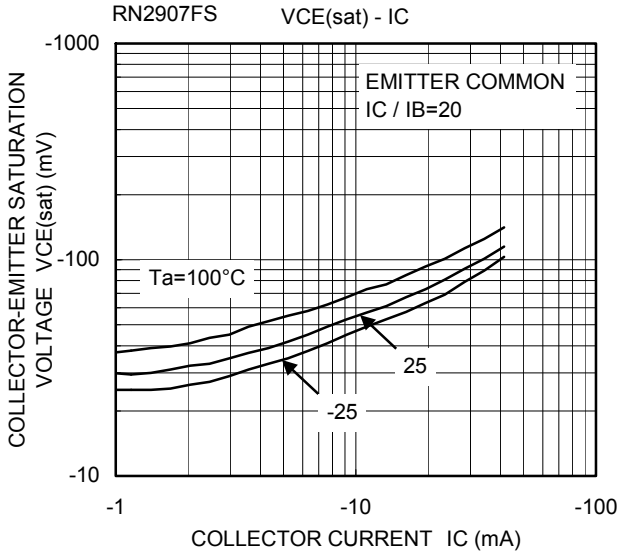

RN2908FS
IC - VI(OFF)
COLLECTOR CURRENT IC (μA)
-10000
-1000
-100
-10
EMITTER COMMON
VCE= -5V
Ta=100°C
25
-25
-0.2
-0.4
-0.6
-0.8
-1
-1.2
-1.4
-1.6
INPUT VOLTAGE VI(OFF) (V)

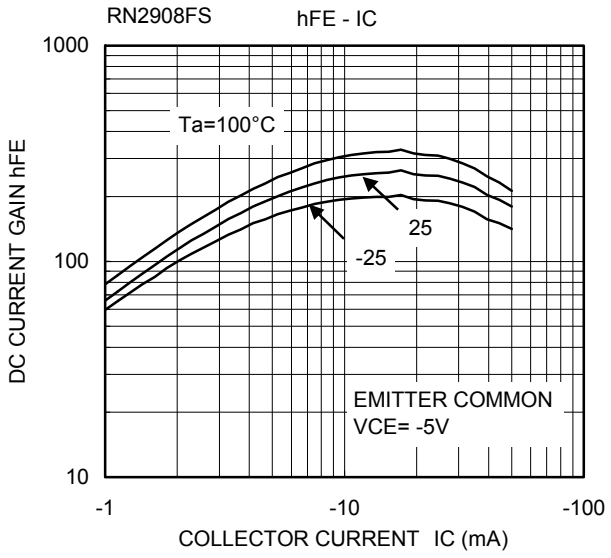

RN2909FS
IC - VI(ON)
COLLECTOR CURRENT IC (mA)
-100
-10
-1
-0.1
EMITTER COMMON
VCE= -0.2V
Ta=100°C
25
-25
-0.1
-1
-10
-100
INPUT VOLTAGE VI(ON) (V)

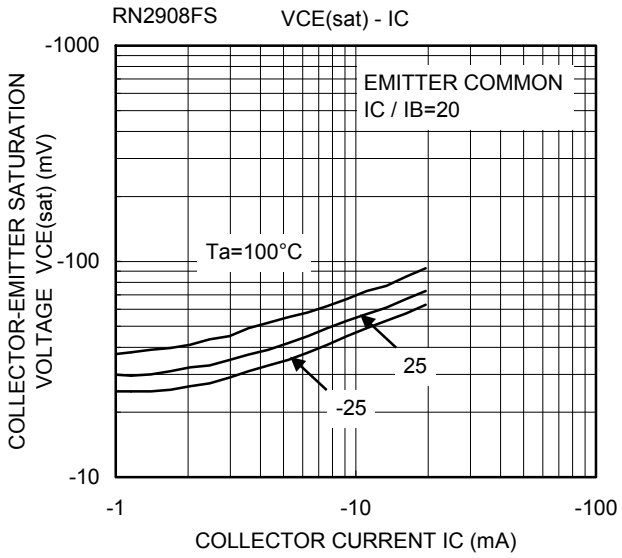

RN2909FS
IC - VI(OFF)
COLLECTOR CURRENT IC (μA)
-10000
-1000
-100
-10
EMITTER COMMON
VCE= -5V
Ta=100°C
25
-25
-0.6
-1
-1.4
-1.8
-2.2
-2.6
-3
INPUT VOLTAGE VI(OFF) (V)

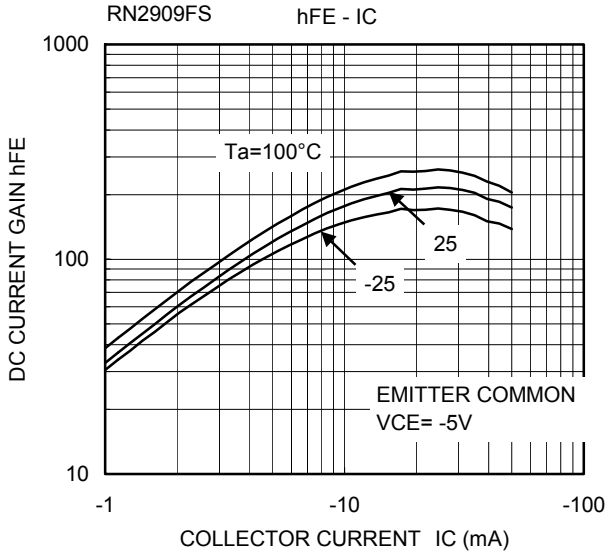
Q1, Q2 Common

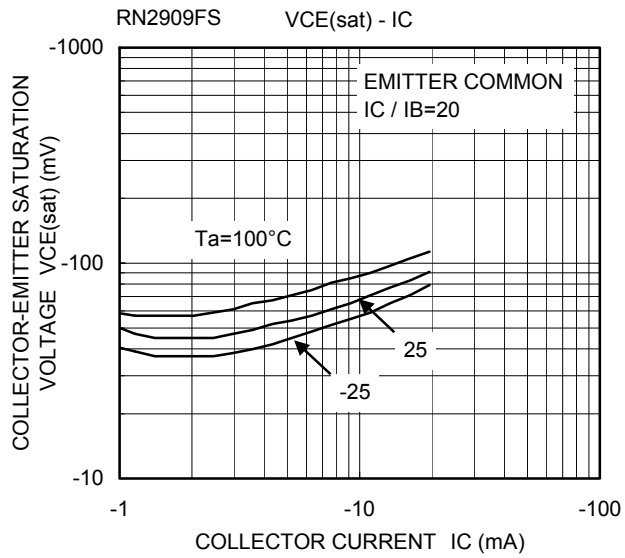

RN2907FS
hFE - IC
1000
100
10
Ta=100°C
25
-25
EMITTER COMMON
VCE= -5V
DC CURRENT GAIN hFE
-1
-10
-100
COLLECTOR CURRENT IC (mA)


RN2907FS
VCE(sat) - IC
-1000
-100
-10
EMITTER COMMON
IC / IB=20
Ta=100°C
25
-25
COLLECTOR-EMITTER SATURATION VOLTAGE VCE(sat) (mV)
-1
-10
-100
COLLECTOR CURRENT IC (mA)





RN2908FS
hFE - IC
1000
100
10
Ta=100°C
25
-25
EMITTER COMMON
VCE= -5V
DC CURRENT GAIN hFE
-1
-10
-100
COLLECTOR CURRENT IC (mA)


RN2908FS
VCE(sat) - IC
-1000
-100
-10
EMITTER COMMON
IC / IB=20
Ta=100°C
25
-25
COLLECTOR-EMITTER SATURATION VOLTAGE VCE(sat) (mV)
-1
-10
-100
COLLECTOR CURRENT IC (mA)


RN2909FS
hFE - IC
1000
100
10
Ta=100°C
25
-25
EMITTER COMMON
VCE= -5V
DC CURRENT GAIN hFE
-1
-10
-100
COLLECTOR CURRENT IC (mA)


RN2909FS
VCE(sat) - IC
-1000
-100
-10
EMITTER COMMON
IC / IB=20
Ta=100°C
25
-25
COLLECTOR-EMITTER SATURATION VOLTAGE VCE(sat) (mV)
-1
-10
-100
COLLECTOR CURRENT IC (mA)

Marking

Type Name	Marking
RN2907FS	
RN2908FS	
RN2909FS	

Handling Precaution

When handling individual devices (which are not yet mounted on a circuit board), be sure that the environment is protected against electrostatic discharge. Operators should wear anti-static clothing, and containers and other objects that come into direct contact with devices should be made of anti-static materials.

RESTRICTIONS ON PRODUCT USE

- Toshiba Corporation, and its subsidiaries and affiliates (collectively “TOSHIBA”), reserve the right to make changes to the information in this document, and related hardware, software and systems (collectively “Product”) without notice.
- This document and any information herein may not be reproduced without prior written permission from TOSHIBA. Even with TOSHIBA’s written permission, reproduction is permissible only if reproduction is without alteration/omission.
- Though TOSHIBA works continually to improve Product’s quality and reliability, Product can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards for their hardware, software and systems which minimize risk and avoid situations in which a malfunction or failure of Product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. Before customers use the Product, create designs including the Product, or incorporate the Product into their own applications, customers must also refer to and comply with (a) the latest versions of all relevant TOSHIBA information, including without limitation, this document, the specifications, the data sheets and application notes for Product and the precautions and conditions set forth in the “TOSHIBA Semiconductor Reliability Handbook” and (b) the instructions for the application with which the Product will be used with or for. Customers are solely responsible for all aspects of their own product design or applications, including but not limited to (a) determining the appropriateness of the use of this Product in such design or applications; (b) evaluating and determining the applicability of any information contained in this document, or in charts, diagrams, programs, algorithms, sample application circuits, or any other referenced documents; and (c) validating all operating parameters for such designs and applications. **TOSHIBA ASSUMES NO LIABILITY FOR CUSTOMERS’ PRODUCT DESIGN OR APPLICATIONS.**
- Product is intended for use in general electronics applications (e.g., computers, personal equipment, office equipment, measuring equipment, industrial robots and home electronics appliances) or for specific applications as expressly stated in this document. Product is neither intended nor warranted for use in equipment or systems that require extraordinarily high levels of quality and/or reliability and/or a malfunction or failure of which may cause loss of human life, bodily injury, serious property damage or serious public impact (“Unintended Use”). Unintended Use includes, without limitation, equipment used in nuclear facilities, equipment used in the aerospace industry, medical equipment, equipment used for automobiles, trains, ships and other transportation, traffic signaling equipment, equipment used to control combustions or explosions, safety devices, elevators and escalators, devices related to electric power, and equipment used in finance-related fields. Do not use Product for Unintended Use unless specifically permitted in this document.
- Do not disassemble, analyze, reverse-engineer, alter, modify, translate or copy Product, whether in whole or in part.
- Product shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable laws or regulations.
- The information contained herein is presented only as guidance for Product use. No responsibility is assumed by TOSHIBA for any infringement of patents or any other intellectual property rights of third parties that may result from the use of Product. No license to any intellectual property right is granted by this document, whether express or implied, by estoppel or otherwise.
- **ABSENT A WRITTEN SIGNED AGREEMENT, EXCEPT AS PROVIDED IN THE RELEVANT TERMS AND CONDITIONS OF SALE FOR PRODUCT, AND TO THE MAXIMUM EXTENT ALLOWABLE BY LAW, TOSHIBA (1) ASSUMES NO LIABILITY WHATSOEVER, INCLUDING WITHOUT LIMITATION, INDIRECT, CONSEQUENTIAL, SPECIAL, OR INCIDENTAL DAMAGES OR LOSS, INCLUDING WITHOUT LIMITATION, LOSS OF PROFITS, LOSS OF OPPORTUNITIES, BUSINESS INTERRUPTION AND LOSS OF DATA, AND (2) DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES AND CONDITIONS RELATED TO SALE, USE OF PRODUCT, OR INFORMATION, INCLUDING WARRANTIES OR CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, ACCURACY OF INFORMATION, OR NONINFRINGEMENT.**
- Do not use or otherwise make available Product or related software or technology for any military purposes, including without limitation, for the design, development, use, stockpiling or manufacturing of nuclear, chemical, or biological weapons or missile technology products (mass destruction weapons). Product and related software and technology may be controlled under the Japanese Foreign Exchange and Foreign Trade Law and the U.S. Export Administration Regulations. Export and re-export of Product or related software or technology are strictly prohibited except in compliance with all applicable export laws and regulations.
- Please contact your TOSHIBA sales representative for details as to environmental matters such as the RoHS compatibility of Product. Please use Product in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. TOSHIBA assumes no liability for damages or losses occurring as a result of noncompliance with applicable laws and regulations.