

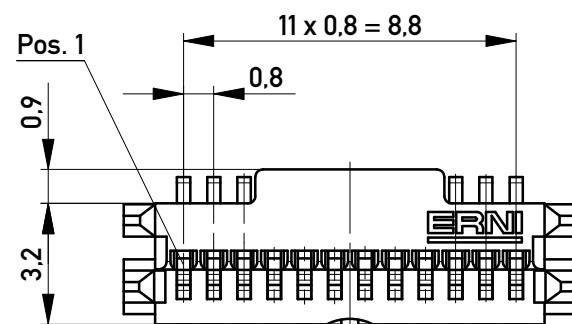
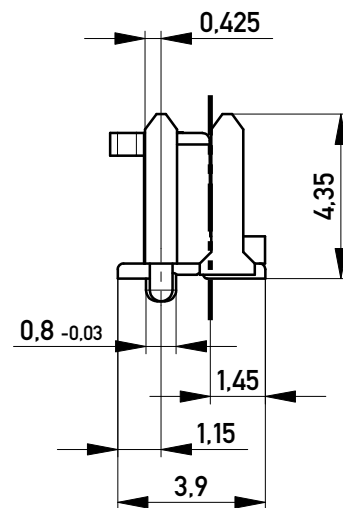


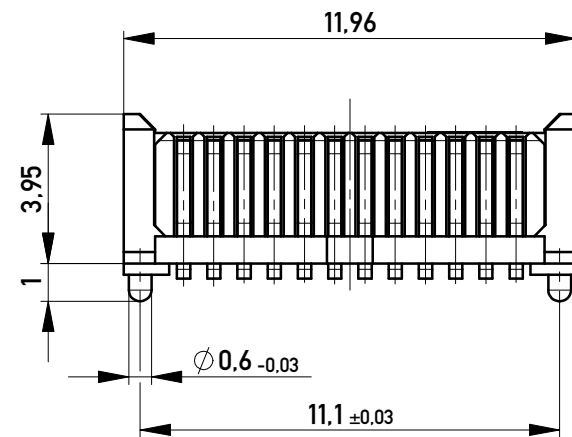


Koplanarität der Anschlüsse $\leq 0,1 \text{ mm} / 3$
Coplanarity Area of Termination $\leq 0,1 \text{ mm} / 3$

Leiterplatten-Layout Vorschlag PCB-Layout Proposal

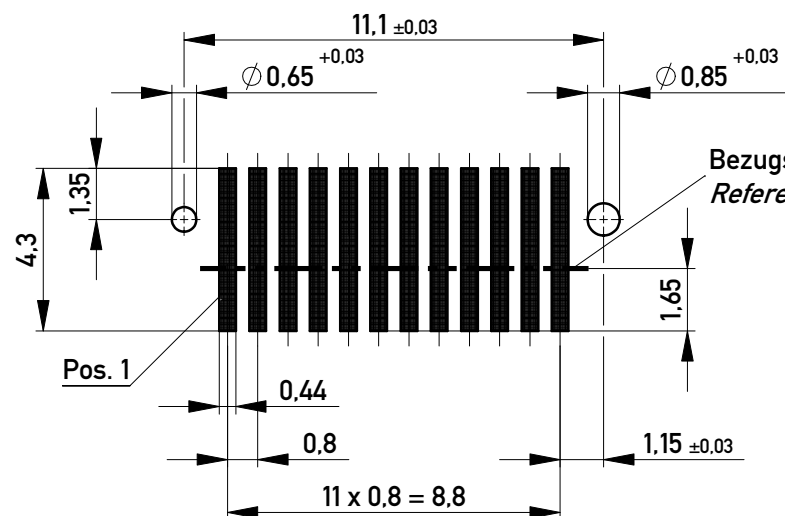


RoHS: 6/6
MSL: 1

Verpackt im Gurt in Anlehnung an DIN IEC 60286-3
Tape on Reel Packaging according to DIN IEC 60286-3
Verpackungseinheit: 1300 Stück
Packaging unit: 1300 pcs



Abspulrichtung - Reel off Direction

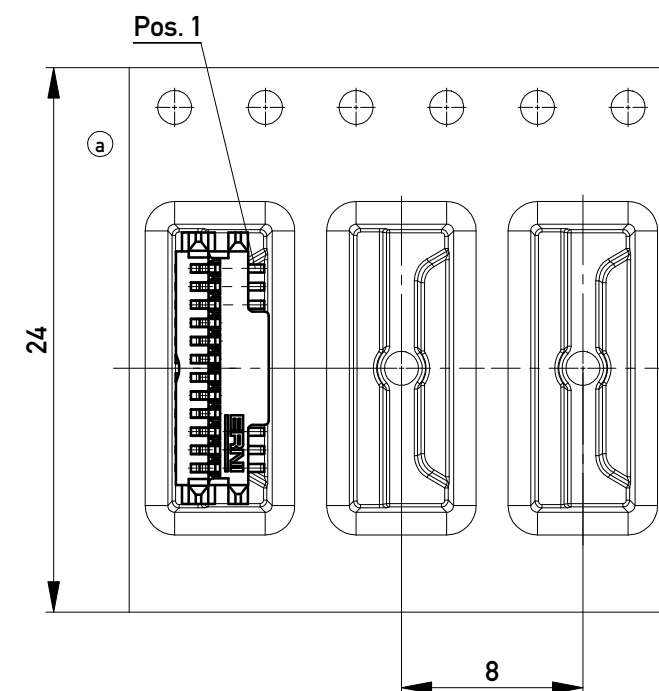

SPC-Maß: Prüfmerkmale der Kategorie /1
/1 Für SPC-Maße muss eine x/s Regelkarte geführt werden mit Nachweis der Prozessfähigkeit in der Serie (Cpk) oder 100% - Prüfung


Prüfmerkmal: Prüfmerkmale der Kategorie /2 und /3
/2 Für Prüfmerkmale muss eine x/s Regelkarte geführt werden

/3 Prüfmerkmale werden serienbegleitend geprüft

einreihig, mit Zapfen
1 row, with pegs

Copyright by ERNI Production GmbH & Co. KG
Proprietary notice pursuant to ISO 16016 to be observed.

Proprietary notice pursuant to ISO 16016 to be observed.

Information: antimagnetische Variante				Tolerances		 All Dimensions in mm		Scale 5:1			
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.				Subject to modification without prior notice. Drawing will not be updated.				Designation			
								MicroStac Steckverb., 12 polig <i>MicroStac Con., 12 contacts</i>			
										www.ERNI.com	
f				08.09.2015						A3	
Index		Date						Class		MICROS	