
Leiterplatten-Layout Vorschlag für SMT
PCB-Layout Proposal for SMT

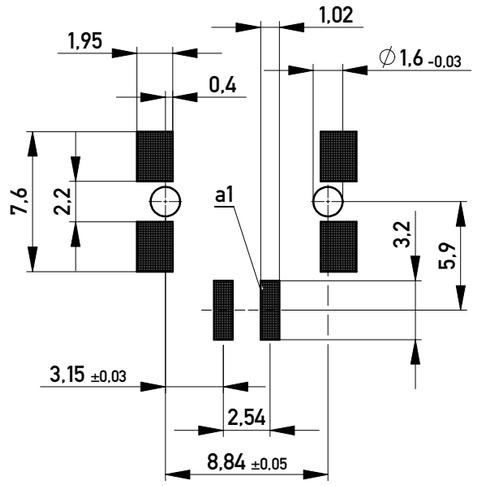



Anforderungsstufe 1
Performance Level 1


Kontaktbereich vergoldet
Mating Area gold plating

Anschlussbereich verzinnt 4-6 µm
Terminal Area 4-6 µm tin plating


Koplanarität der Anschlüsse ≤ 0,1 mm
Coplanarity Area of Termination ≤ 0,1 mm

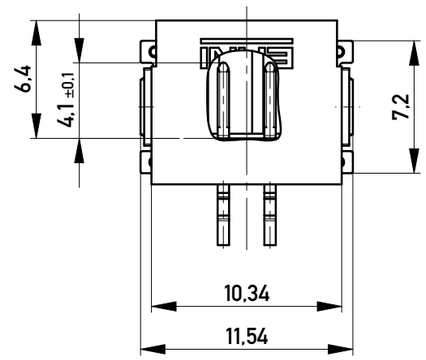




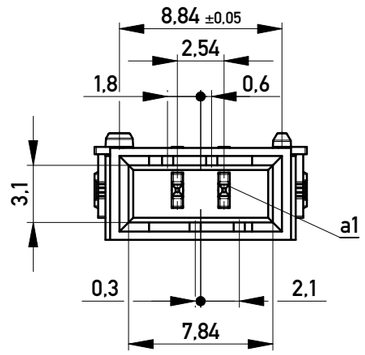

Verpackt im Gurt in Anlehnung an DIN IEC 60286-3
Tape on Reel Packaging according to DIN IEC 60286-3
Verpackungseinheit: 440 Stück
Packaging unit: 440 pcs

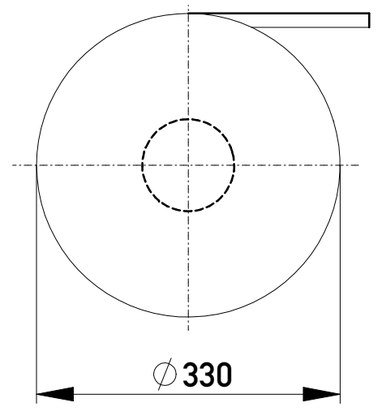

Abspulrichtung - *Reel off Direction*

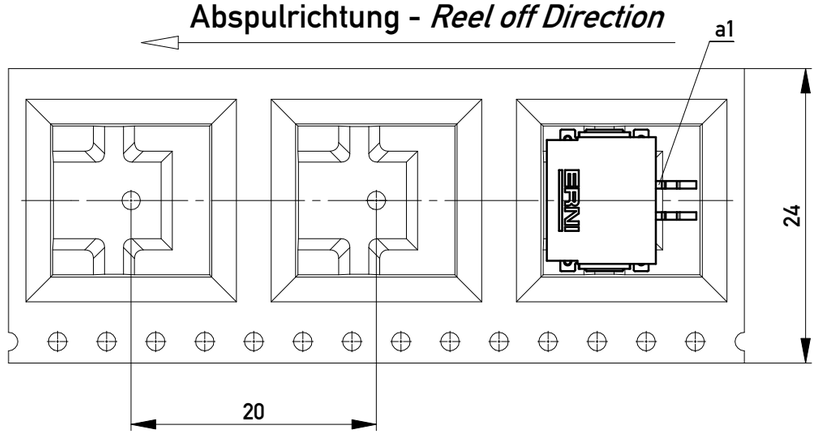

Copyright by ERNI Production GmbH & Co. KG
Proprietary notice pursuant to ISO 16016 to be observed.

Information:
Codierung schwarz - *coding black*

Tolerances

All Dimensions in mm

Scale 3:1

All rights reserved.
Only for Information.
To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.

Subject to modification without prior notice.
Drawing will not be updated.

Designation
M 2,54 SRC-A, 2-polig

ERNI www.ERNI.com

100103880001 K

Index		Date	
g		04.05.2015	

A3

Class SRCA