

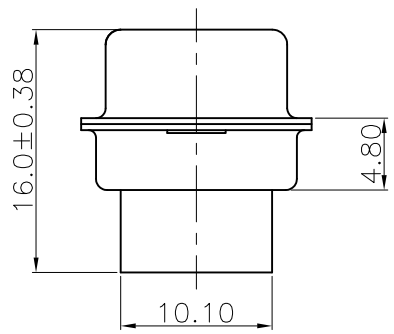


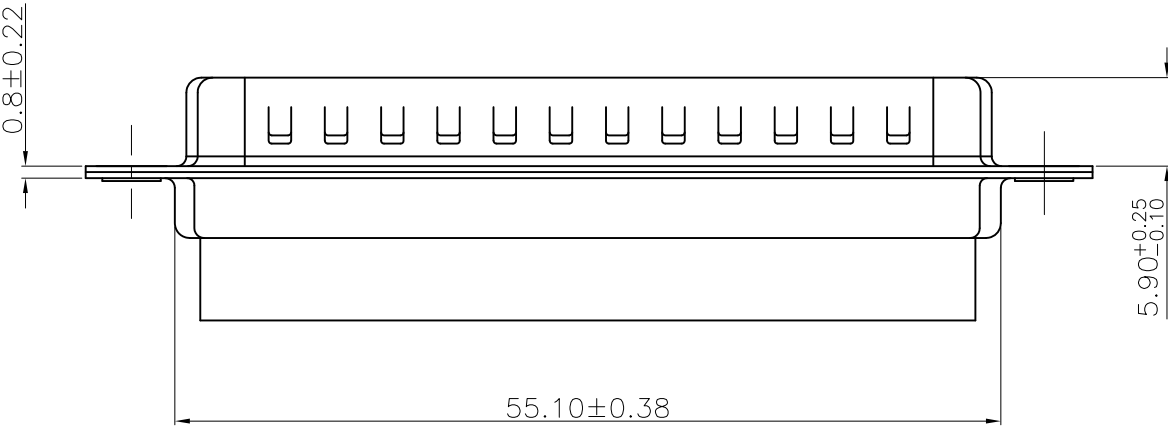

PART NO.: 10090930-P780ALF

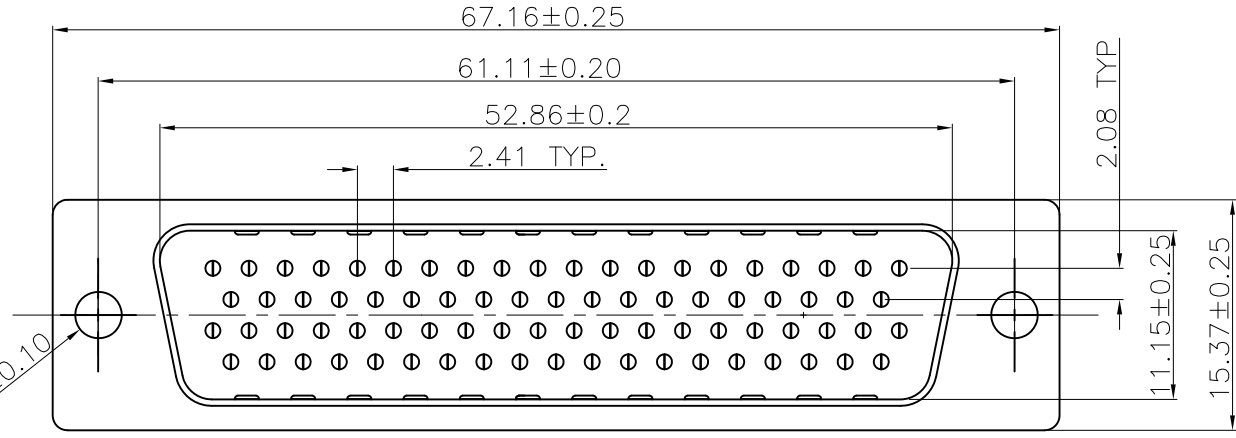

REMARK:
 1. CHARACTERISTICS:
 OPERATING TEMPERATURE RANGE: -55° C~105° C
 2. MATERIAL:
 INSULATORS: THERMOPLASTIC G.F(UL94V-0) BLACK
 SHELL: CARBON STEEL, 100u" Min NICKEL TIN TOP OVER, 50u" Min COPPER UNDER PLATE.
 STOPPER: CARBON STEEL.
 3. PART NUMBER DESCRIPTION: 10090930-P XX X X LF

SERIES NO. _____
 TYPE _____
 P: PIN (MALE)
 NUMBER OF CONTACTS _____
 78: 78-PIN

LF: ROHS COMPLIANT
 FLANGE MOUNTING OPTION
 A: STANDARD HOLE
 CONTACT FINISH
 0: NO CONTACT

mat'l. code				tolerances unless otherwise specified			CUSTOMER COPY		FCI 		www.fciconnect.com			
ltr	ecn no	dr	date	linear	.X ± 0.38			projection 	title HDEC 78P MALE CRIMPING					
A					.XX ± 0.25									
					.XXX ± 0.10									
				angles	0° ±2°			 MM	product family D-SUB				code	
				dr	JASON HSU	12/10/09	size		dwg no				TWN	
				engr	JASON HSU	12/10/09			scale					
				chr	GARY HSIEH	12/10/09		1:1		A4				sheet
				appd	JOSEPH HSIA	12/10/09	10090930				2 of 2			
sheet index		revision sheet												