



250±20

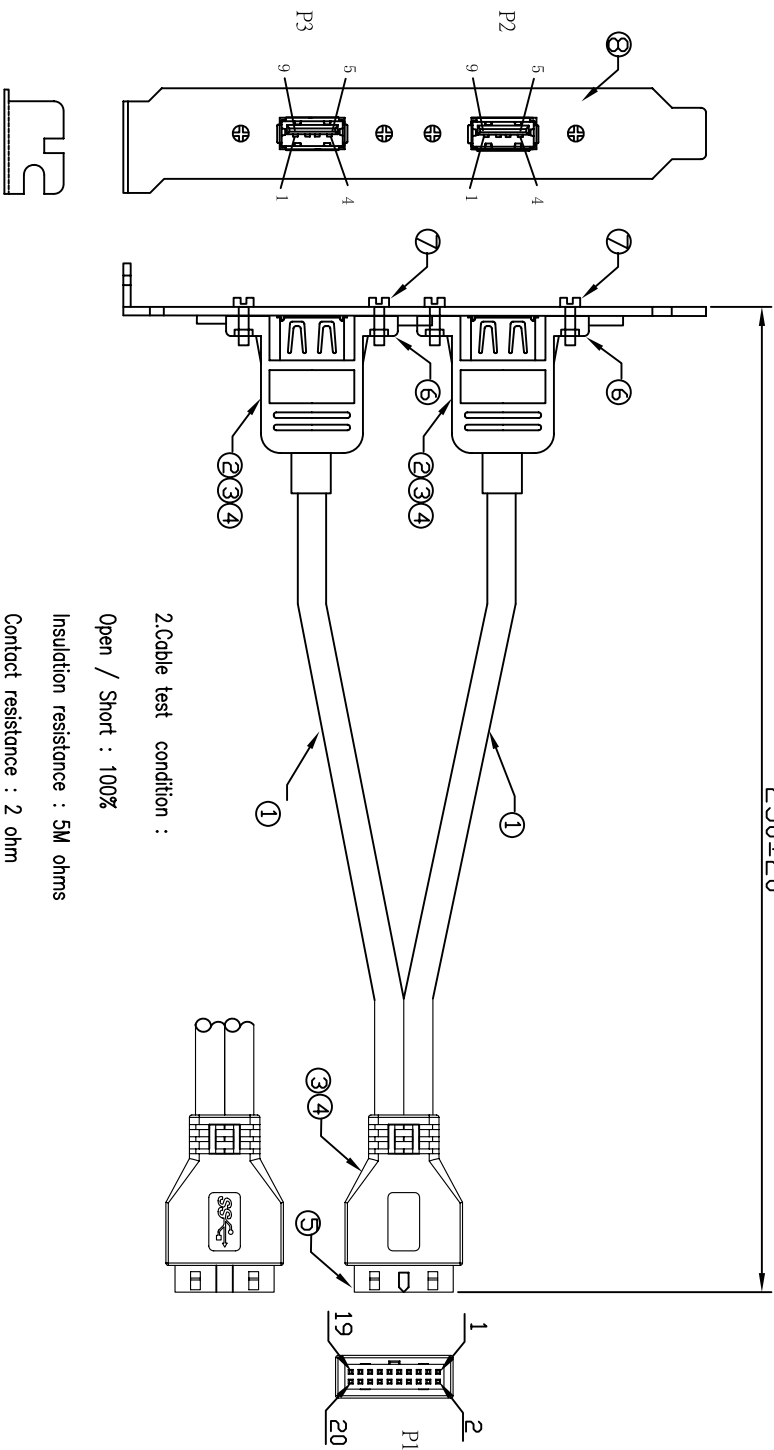

1.Wiring Diagram.

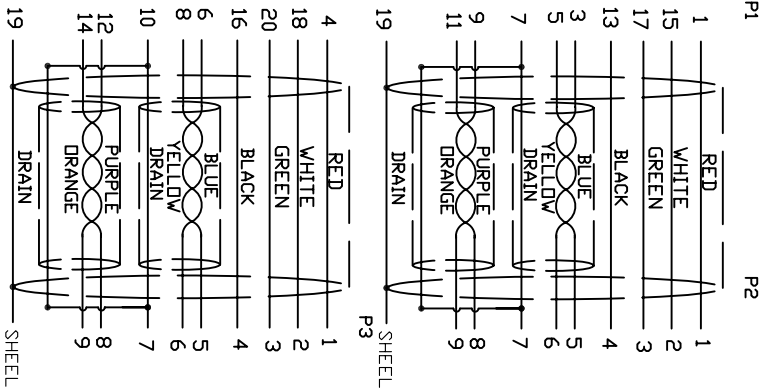

2.Cable test condition :

Open / Short : 100%

Insulation resistance : 5M ohms

Contact resistance : 2 ohm

Hipot : DC 300V / 1 sec

3.Each pcs with PE polybag.

8	BRACKET	BRACKET W/2*USB NICKEL PLATED	1	
7	SCREW	#4-40UNC 2.8*14.1 NICKEL PLATED	4	
6	NUT	HEX NUT #4-40UNC 4.75*1.75 NICKEL PLATED	4	
5	CONN.	USB3.0 20P FEMALE PIN G/F INSULATION BLUE	2	P1
4	PVC	45P PVC BLACK OVERMOLD	50g	
3	PE	LLDPE 500026 6201 INSIDE MOLDING	16g	
2	CONN	USB3.0 A TYPE FEMALE PIN G/F, SHELL PLATED G/F, INSULATION BLUE	2	P2,P3
1	CABLE	USB3.0 UL2725 (28AWG*1P+D+ALMLY)*2+28AWG*1P+24WG*2C AL+B+D (16/4/0.12AL) OD5.5 BLACK	2	250MM
NO.	PART NO.	DESCRIPTION	QTY	UNIT/REF
BILL OF MATERIAL				

A	INITIAL RELEASE	2016/08/25
REVECN#	DESCRIPTION	DATE
Cnc Tech,LLC		
DRAWN	DATE	
EDWIN LA	08/23/16	
CHECKED	DATE	
WIN C	08/25/16	
APPROVAL		
TITLE		
USB3.0 A/F 2 PORT CABLE		
DWN NO.	CUSTOMER P/N:	REV
103-1050-BL-00025		A
CUSTOMER:		
SHEET 1 OF 1		