



Leiterplatten-Layout Vorschlag für SMT
PCB-Layout Proposal for SMT

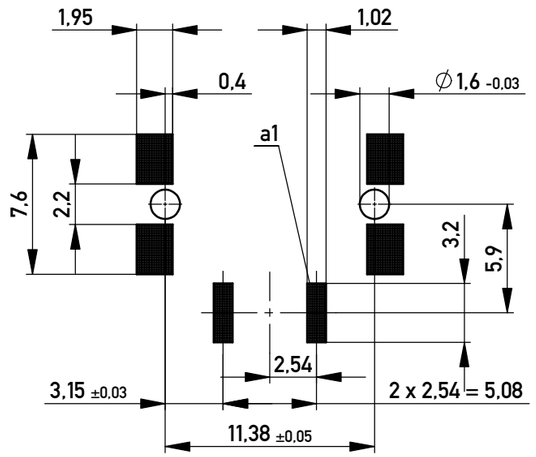

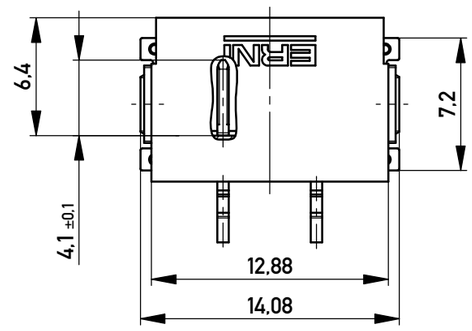

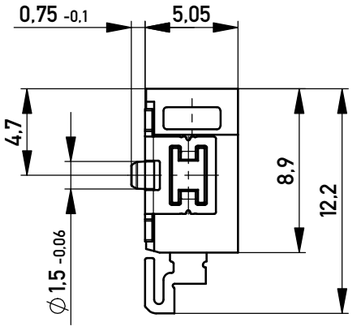

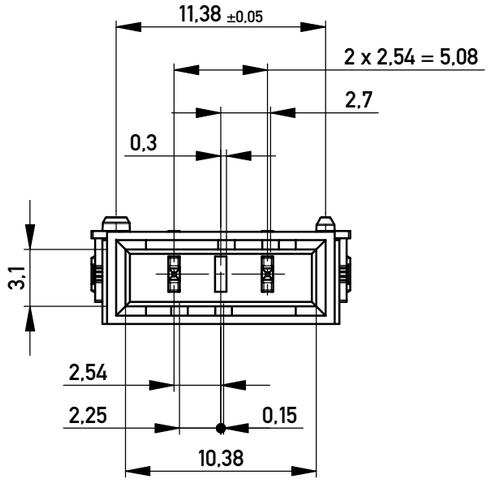


Anforderungsstufe 1
Performance Level 1

Kontaktbereich vergoldet
Mating Area gold plating


Anschlussbereich verzinnt 4-6 µm
Terminal Area 4-6 µm tin plating

Koplanarität der Anschlüsse ≤ 0,1 mm
Coplanarity Area of Termination ≤ 0,1 mm

Verpackt im Gurt in Anlehnung an DIN IEC 60286-3
Tape on Reel Packaging according to DIN IEC 60286-3
Verpackungseinheit: 440 Stück
Packaging unit: 440 pcs

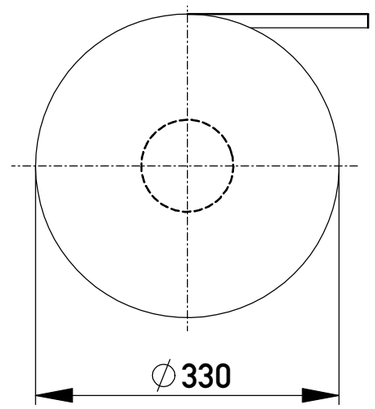

Abspulrichtung - *Reel off Direction*

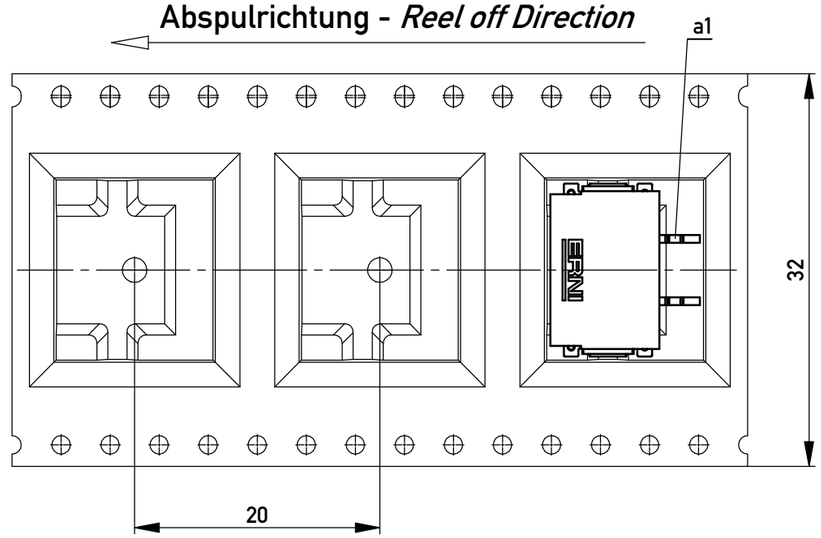

Information:
codierung grün - *coding green*
Pos. 2 unbestückt - *Pos. 2 not assembled*

Tolerances

All Dimensions in mm

Scale 3:1

Copyright by ERNI Production GmbH & Co. KG
Proprietary notice pursuant to ISO 16016 to be observed.

All rights reserved.
Only for Information.
To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.

Subject to modification without prior notice.
Drawing will not be updated.

Designation
M 2,54 SRC-A 3/2-polig

ERNI www.ERNI.com

103404240001

K

A3

Index | Date

Class SRCA