

DATA SHEET

OLH7000: Hermetic Linear Optocoupler

Features

- High reliability and rugged hermetic construction
- Couples AC and DC signals
- 1000 V_{DC} electrical isolation
- Matched photodiodes
- Excellent linearity and stability

Description

The OLH7000 linear optocoupler consists of two LEDs in a series coupled to two PIN photodiode detectors.

The photodiode on the input side acts as a feedback device that permits an external feedback loop to ensure constant LED light output. A similar matching photodiode on the output side is used to drive an output circuit that is electrically isolated from the input. A fixed relationship is thus maintained between the input and output, and compensates for the LED's nonlinear, time, and temperature characteristics.

Each OLH7000 is mounted and coupled in a hermetic 8-pin ceramic dual in-line package (DIP) that provides 1000 V_{DC} electrical isolation between the input and output.

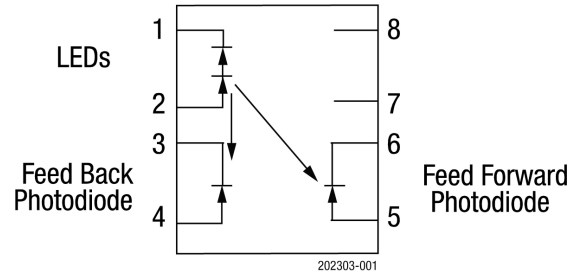


Figure 1. OLH7000 Block Diagram

Figure 1 shows the OLH7000 functional block diagram. Table 1 provides the OLH7000 absolute maximum ratings. Table 2 provides the OLH7000 electrical specifications.

Figure 2 shows the OLH7000 typical application. Figure 3 provides the OLH7000 package dimensions.

Table 1. OLH7000 Absolute Maximum Ratings¹

Parameter	Symbol	Minimum	Maximum	Units
<i>Coupled</i>				
Input to output isolation voltage	V _{DC}	-1000	+1000	V
Storage temperature range	T _{STG}	-65	+150	°C
Operating temperature range	T _A	-55	+125	°C
Mounting temperature range (3 minutes maximum)			+240	°C
Total power dissipation	P _D		+250	mW
<i>Input Diode</i>				
Average input current	I _{DD}		60	mA
Peak forward current (≤1ms duration)	I _F		100	mA
Reverse voltage	V _R		6	V
Power dissipation	P _D		100	mW
<i>Output Detector</i>				
Reverse voltage	V _R		30	V
Forward voltage	V _F		0.3	V


¹ Exposure to maximum rating conditions for extended periods may reduce device reliability. There is no damage to the device with only one parameter set at the limit and all other parameters set at or below their nominal value. Exceeding any of the limits listed here may result in permanent damage to the device.

CAUTION: Although this device is designed to be as robust as possible, electrostatic discharge (ESD) can damage this device. This device must be protected at all times from ESD. Static charges may easily produce potentials of several kilovolts on the human body or equipment, which can discharge without detection. Industry-standard ESD precautions should be used at all times.

Table 2. OLH7000 Electrical Specifications¹
(T_A = 25 °C)


Parameter	Symbol	Test Condition	Minimum	Typical	Maximum	Units
LED emitter:						
Forward voltage	V _F	I _F = 10.0 mA		2.5	3.3	V
Reverse voltage	V _R	I _R = 100.0 µA	5.0			V
Photodiode detector:						
Dark current	I _D	V _R = 15 V, I _F = 0 mA		1	25	nA
Open circuit voltage	V _{OC}	I _F = 10 mA		500		mV
Junction capacitance	C _J	V _F = 0 V, f = 1 MHz		12		pF
Coupled characteristics:						
K1, Servo current gain (I _{P1} / I _F)	K1	I _F = +10.0 mA, V _{DET} = -15.0 V	+0.0025	+0.0100	+0.0175	µA
Servo current	I _{P1}	I _F = +10.0 mA, V _{DET} = -15.0 V		+100.0		
K2, Forward current gain (I _{P2} / I _F)	K2	I _F = +10.0 mA, V _{DET} = -15.0 V	+0.0025	+0.0100	+0.0175	µA
Forward current	I _{P2}	I _F = +10.0 mA, V _{DET} = -15.0 V		+100.0		
K3, Transfer gain (K2/K1)	K3	I _F = +10.0 mA, V _{DET} = -15.0 V	+0.75	+1.00	+1.25	
Frequency response (-3 dB)	BW	I _F = +10.0 mA ± 4.0 mA, R _L = +50.0 Ω		+200.0		kHz
Phase response @ 200 KHz		I _F = +10.0 mA ± 4.0 mA, R _L = +50.0 Ω		-45.0		°C
Rise time	t _r	I _F = +10.0 mA ± 4.0 mA, R _L = +50.0 Ω		+2.0		µs
Fall time	t _f	I _F = +10.0 mA ± 4.0 mA, R _L = +50.0 Ω		+2.0		µs
Input/output capacitance	C _{I-O}	f = +1.0 MHz		+1.5		pF
Insulation resistance	R _{I-O}	V _{I-O} = +500.0 V _{DC}		+10.0		GΩ
Withstand test voltage	WTV	R _H ≤ +50%, I _{I-O} ≤ +1.0 µA, 1 s	+1000.0			V _{DC}

¹ Performance is guaranteed only under the conditions listed in this table.

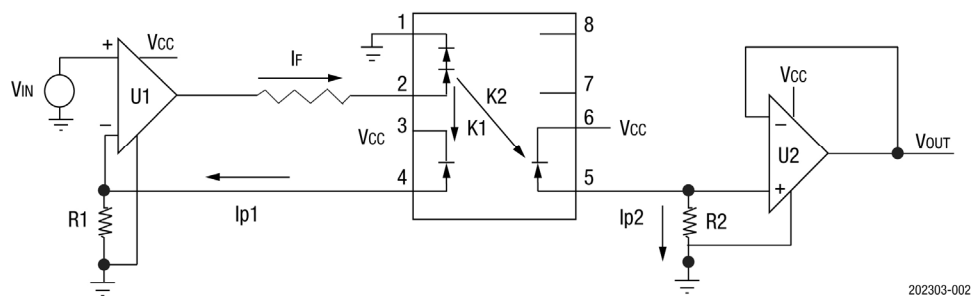

This typical application circuit uses an operational amplifier at the input side to drive the LEDs. The output photodiode is connected to a non-inverting voltage follower amplifier. The overall transfer gain, V_{OUT}/V_{IN} , equals $(K2 \cdot R2)/(K1 \cdot R1)$. Because $(K2/K1) = K3$, the circuit gain becomes $K3 (R2/R1)$.

Figure 2. OLH7000 Typical Application

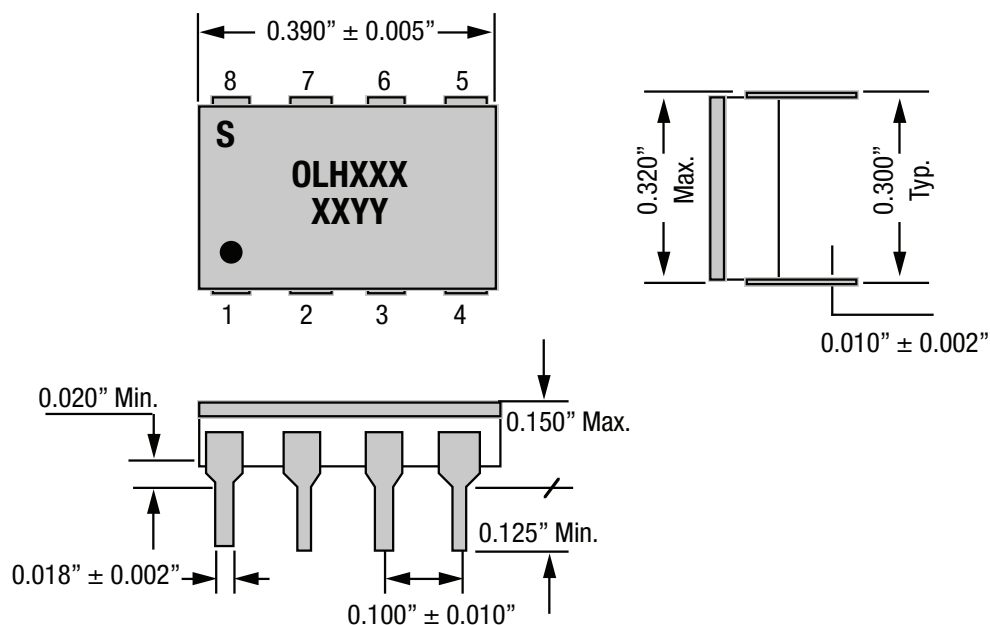

K021

Figure 3. OLH7000 Package Dimensions

Ordering Information

Part Number	Product Description
OLN7000	Hermetic Linear Optocoupler

Copyright © 2012, 2014-2015, 2017, 2019 Isolink, Inc. All Rights Reserved.

Information in this document is provided in connection with Isolink, Inc. ("Isolink"), a wholly-owned subsidiary of Skyworks Solutions, Inc. These materials, including the information contained herein, are provided by Isolink as a service to its customers and may be used for informational purposes only by the customer. Isolink assumes no responsibility for errors or omissions in these materials or the information contained herein. Isolink may change its documentation, products, services, specifications or product descriptions at any time, without notice. Isolink makes no commitment to update the materials or information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from any future changes.

No license, whether express, implied, by estoppel or otherwise, is granted to any intellectual property rights by this document. Isolink assumes no liability for any materials, products or information provided hereunder, including the sale, distribution, reproduction or use of Isolink products, information or materials, except as may be provided in Skyworks Terms and Conditions of Sale.

THE MATERIALS, PRODUCTS AND INFORMATION ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, INCLUDING FITNESS FOR A PARTICULAR PURPOSE OR USE, MERCHANTABILITY, PERFORMANCE, QUALITY OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT; ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. ISOLINK DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. ISOLINK SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO ANY SPECIAL, INDIRECT, INCIDENTAL, STATUTORY, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THE MATERIALS OR INFORMATION, WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Isolink products are not intended for use in medical, lifesaving or life-sustaining applications, or other equipment in which the failure of the Isolink products could lead to personal injury, death, physical or environmental damage. Isolink customers using or selling Isolink products for use in such applications do so at their own risk and agree to fully indemnify Isolink for any damages resulting from such improper use or sale.

Customers are responsible for their products and applications using Isolink products, which may deviate from published specifications as a result of design defects, errors, or operation of products outside of published parameters or design specifications. Customers should include design and operating safeguards to minimize these and other risks. Isolink assumes no liability for applications assistance, customer product design, or damage to any equipment resulting from the use of Isolink products outside of stated published specifications or parameters.

Isolink is a trademark of Isolink, Inc. in the United States and other countries. Skyworks and the Skyworks symbol are trademarks or registered trademarks of Skyworks Solutions, Inc. or its subsidiaries in the United States and other countries. Third-party brands and names are for identification purposes only, and are the property of their respective owners.