

## Broadband Low Noise Amplifier 2 - 18 GHz

Preliminary - Rev. V1P

### Features

- Gain: 21 dB @ 10 GHz
- Noise Figure: 1.4 dB @ 10 GHz
- Output P1dB: +14 dBm
- Single Voltage Bias: 3.3 V to 5 V
- Power Down Capability
- Lead-Free 2 mm 8-lead PDFN Package
- Halogen-Free "Green" Mold Compound
- RoHS\* Compliant

### Description

The MAAL-011130 is an easy-to-use, broadband, low noise amplifier with 19 dB typical gain from 2 to 18 GHz. The input and output are fully matched to 50 Ω with typical return loss >10 dB. Third order linearity (OIP3) is typically 23 dBm and reverse isolation is >35 dB.

Single voltage ( $V_{DD}$  from +3.3 V to +5 V) operation is achieved using an external resistor,  $R_B$ , between pin 4 and  $V_{DD}$ . The value of  $R_B$  will set the drain current. Alternatively, the application of a bias voltage ( $V_B$ ) to pin 4 allows for the adjustment of drain current from 5 mA to 80 mA and provides power down capability, achieved by applying  $V_B < 0.2$  V. See biasing information on pages 3 and 4.

The MAAL-011130 is housed in a lead-free 2 mm 8-lead PDFN package compatible with standard pick and place assembly equipment.

The MAAL-011130 is well suited to multiple applications such as X-Band satellite communication receivers and wideband A&D systems.


### Ordering Information<sup>1,2</sup>

Part Number	Package
MAAL-011130-000PPR	Bulk
MAAL-011130-SMBPPR	Sample Board

1. Reference Application Note M513 for reel size information.
2. All sample boards include 3 loose parts.

\* Restrictions on Hazardous Substances, European Union Directive 2011/65/EU.

### Functional Schematic

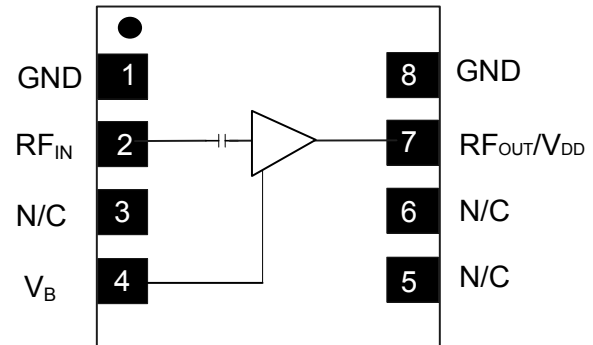

### Pin Configuration<sup>3,4</sup>

Pin No.	Pin Name	Description
1	GND	DC + RF ground
2	RF <sub>IN</sub>	RF input
3	N/C	No connection
4	V <sub>B</sub>	Bias control voltage
5	N/C	No connection
6	N/C	No connection
7	RF <sub>OUT</sub> / V <sub>DD</sub>	RF output and V <sub>DD</sub>
8	GND	DC + RF ground
	Paddle	DC + RF ground

3. MACOM recommends connecting unused package pins to ground.
4. The exposed pad centered on the package bottom must be connected to RF and DC ground.

## Broadband Low Noise Amplifier 2 - 18 GHz

Preliminary - Rev. V1P

Electrical Specifications:  $T_A = +25^\circ\text{C}$ ,  $V_{DD} = +5\text{ V}$ ,  $V_B = 0.9\text{ V}^5$ ,  $Z_0 = 50\ \Omega$

Parameter	Test Conditions	Units	Min.	Typ.	Max.
Gain	2 GHz	dB	—	27	—
	6 GHz			23	
	10 GHz			21	
	14 GHz			19	
	18 GHz			14	
Output P1dB	2 GHz	dBm	—	12	—
	6 GHz			13	
	10 GHz			14	
	14 GHz			15	
	18 GHz			15	
Noise Figure	2 GHz	dB	—	2.1	—
	6 GHz			1.2	
	10 GHz			1.4	
	14 GHz			1.8	
	18 GHz			2.9	
Output IP3	2 GHz	dBm	—	18	—
	6 GHz			20	
	10 GHz			24	
	14 GHz			25	
	18 GHz			24	
	$P_{IN} = -22\text{ dBm/tone}$ (10 MHz Tone Spacing)				
Input Return Loss	$P_{IN} = -20\text{ dBm}$	dB	—	10	—
Output Return Loss	$P_{IN} = -20\text{ dBm}$	dB	—	10	—
Isolation	$P_{IN} = -20\text{ dBm}$	dB	—	35	—
Bias Current	—	mA	—	80	—

5. For single voltage operation, refer to typical  $R_B$  values and biasing information on pages 3 and 4.

Preliminary Information

### Absolute Maximum Ratings<sup>6,7</sup>

Parameter	Absolute Maximum
Input Power	+10 dBm
Operating Voltage	7 V
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-65 °C to +150 °C
Junction Temperature <sup>8,9</sup>	+150 °C

6. Exceeding any one or combination of these limits may cause permanent damage to this device.
7. MACOM does not recommend sustained operation near these survivability limits.
8. Operating at nominal conditions with  $T_J \leq +150^\circ\text{C}$  will ensure  $\text{MTTF} > 1 \times 10^6$  hours.
9. Junction Temperature ( $T_J$ ) =  $T_C + \Theta_{jc} * (V * I)$ .  
Typical thermal resistance ( $\Theta_{jc}$ ) =  $126^\circ\text{C/W}$ .
  - a)  $T_C = +25^\circ\text{C}$ ,  
 $T_J = 76^\circ\text{C} @ 5 \text{ V}, 80 \text{ mA}$
  - b)  $T_C = +85^\circ\text{C}$ ,  
 $T_J = 136^\circ\text{C} @ 5 \text{ V}, 80 \text{ mA}$

### Handling Procedures

Please observe the following precautions to avoid damage:

### Static Sensitivity

Gallium Arsenide Integrated Circuits are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these Class 1A devices.

### Application Information

The MAAL-011130 is designed to for simple implementation with high performance. The ultra small size, fully matched, and simple bias application allows easy placement on system boards.

### Bias Adjust Using $V_B$


Pin 4 can be connected to a separate voltage source to achieve the desired  $I_{DD}$ . The amplifier will be powered down by applying a  $V_B$  of 0.2 V or less.

The following tables show typical total drain current ( $I_{D\_TOTAL} = I_{D\_BIAS} + I_{DD}$ , where  $I_{D\_BIAS}$  is the current drawn by the  $V_B$  pin and  $I_{DD}$  is the drain current) versus bias voltage ( $V_B$ ) values for  $V_{DD}$  voltages of 5.0 V and 3.3 V. Also shown in each case is a typical value of  $R_B$  required to set  $I_{DD}$  if using a single supply (see Single Bias Operation information on page 4).


$V_{DD} = 3.3 \text{ V}$				
$V_B$ (V)	$I_{D\_TOTAL}$ (mA)	$I_{D\_BIAS}$ (mA)	$I_{DD}$ (mA)	$R_B$ (k $\Omega$ )
0.6	32.9	1.2	31.7	2.2
0.7	44.9	2.3	42.6	1.1
0.8	56.7	3.5	53.3	0.7
0.9	67.4	4.6	62.8	0.5
1.0	76.4	5.8	70.5	0.4

$V_{DD} = 5 \text{ V}$				
$V_B$ (V)	$I_{D\_TOTAL}$ (mA)	$I_{D\_BIAS}$ (mA)	$I_{DD}$ (mA)	$R_B$ (k $\Omega$ )
0.6	89	5.8	83	4.0
0.7	77	4.5	73	1.9
0.8	65	3.4	62	1.3
0.9	53	2.3	50	0.9
1.0	40	1.1	39	0.7


## Sample PCB

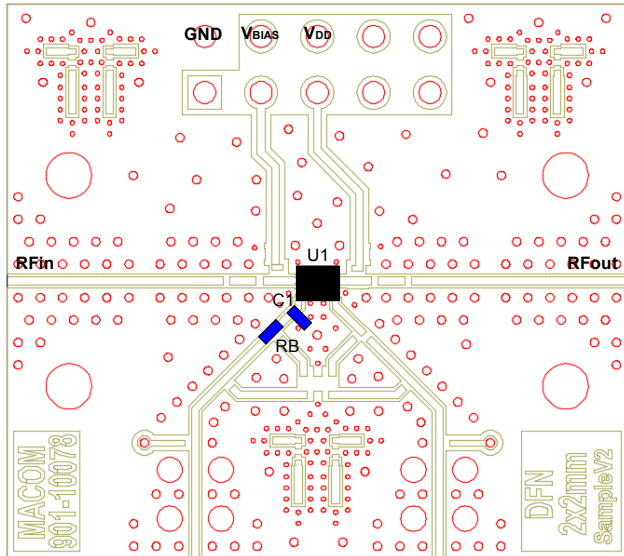

## Sample PCB layout

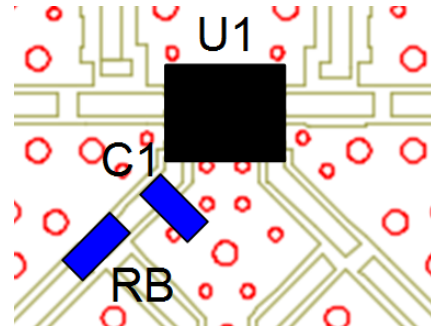

## Application Schematic

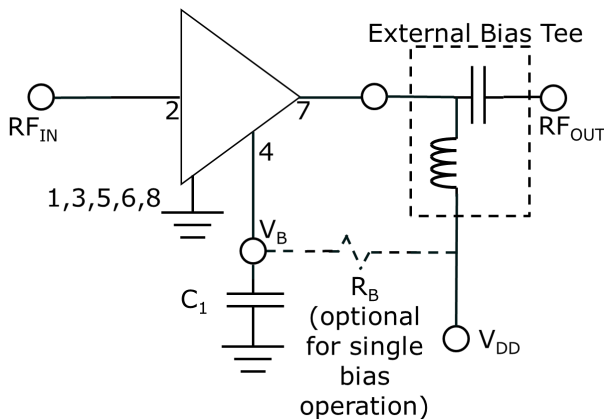

## Single Bias Operation

Connecting V<sub>DD</sub> to pin 4 using an external resistor R<sub>B</sub> enables single bias operation of the amplifier, where the value of external resistor R<sub>B</sub> can be used to set the desired I<sub>DD</sub>.

In this configuration, power down mode cannot be used unless a switch is included to connect V<sub>B</sub> to ground.

## Grounding

It is recommended that the total ground (common mode) inductance not exceed 0.03 nH (30 pH). This is equivalent to placing at least four 8-mil (200- $\mu$ m) diameter vias under the device, assuming an 8-mil (200- $\mu$ m) thick RF layer to ground.

## Parts List


Des	Value	Size	Part Number	Purpose
C1	0.01 $\mu$ F	0201	Murata GRM033R70J103KA01D	Bypass
U1	—	2 mm	MACOM MAAL-011130	LNA

## Broadband Low Noise Amplifier 2 - 18 GHz


Preliminary - Rev. V1P

Typical Performance Curves  $V_{DD} = 5\text{ V}$ ,  $V_B = 0.9\text{ V}$


Gain

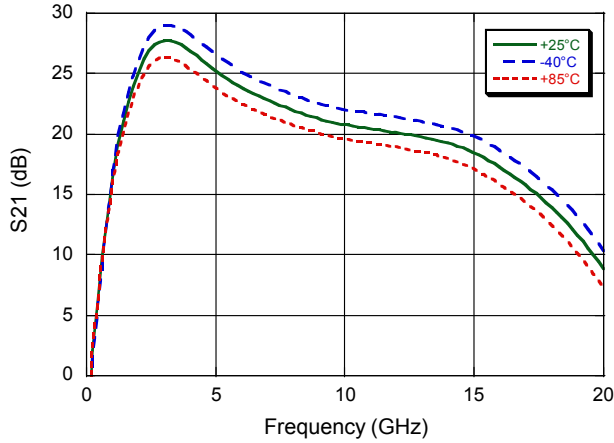


Isolation

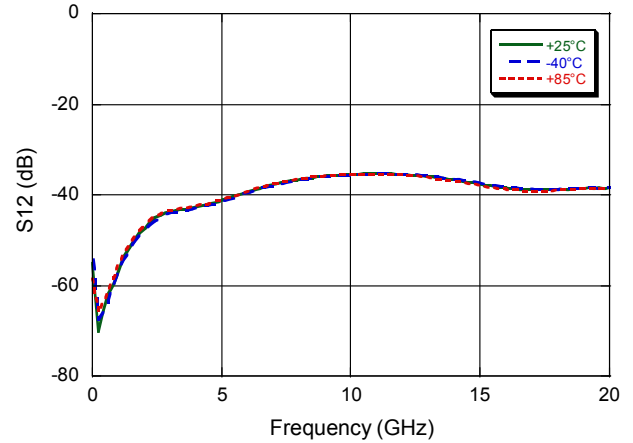


Input Return Loss

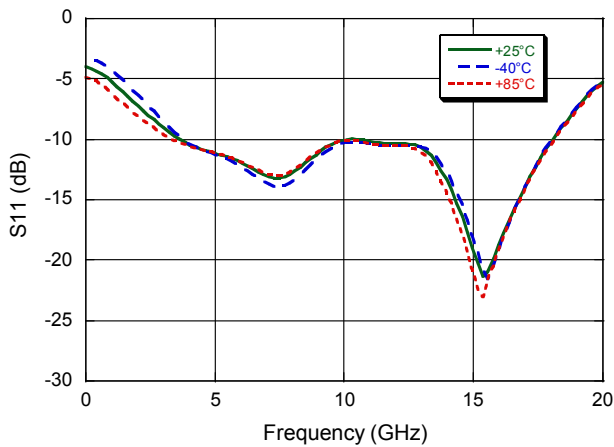

Output Return Loss

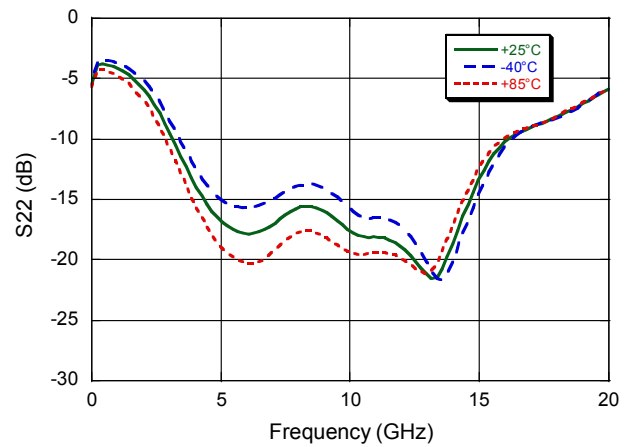

Noise Figure

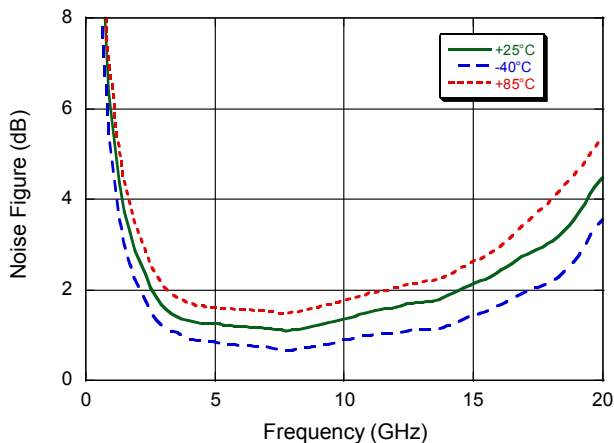

Preliminary Information

**PRELIMINARY:** Data Sheets contain information regarding a product MACOM has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.


For further information and support please visit: <https://www.macom.com/support>

## Broadband Low Noise Amplifier 2 - 18 GHz


Preliminary - Rev. V1P

### Typical Performance Curves $T_A = 25^\circ\text{C}$ , $V_{DD} = 3.3\text{ V}$ & $5\text{ V}$


Gain

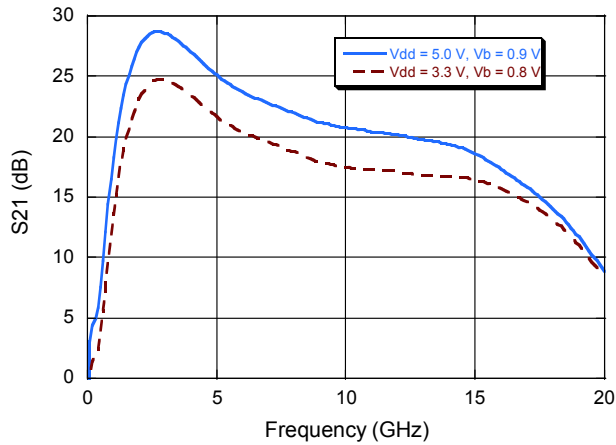


Isolation

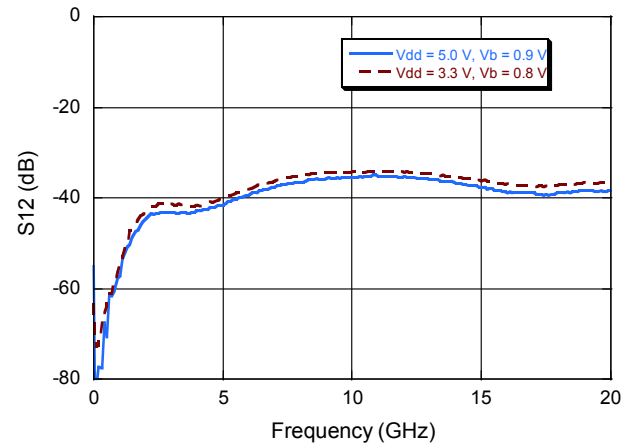


Input Return Loss

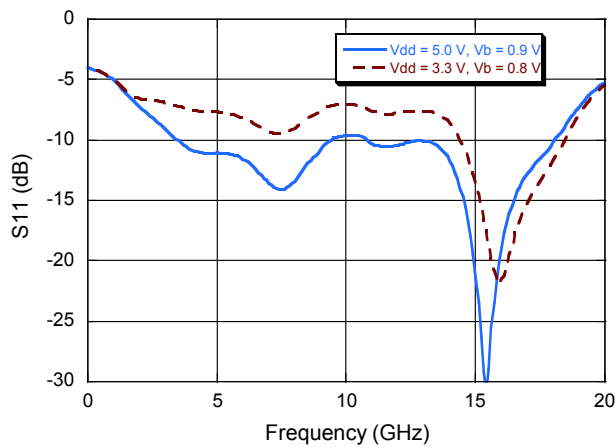

Output Return Loss

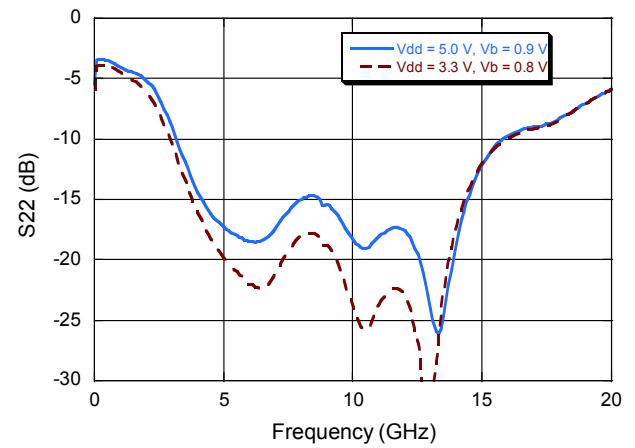

Noise Figure

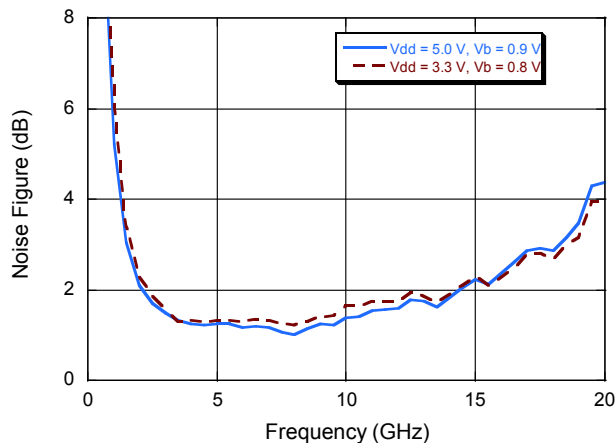

Preliminary Information

**PRELIMINARY:** Data Sheets contain information regarding a product MACOM has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.


For further information and support please visit: <https://www.macom.com/support>

## Broadband Low Noise Amplifier 2 - 18 GHz


Preliminary - Rev. V1P

### Typical Performance Curves $T_A = 25^\circ\text{C}$ , $V_{DD} = 5\text{ V}$ & $3.3\text{ V}$

Gain vs.  $V_B$  for  $V_{DD} = 5\text{ V}$

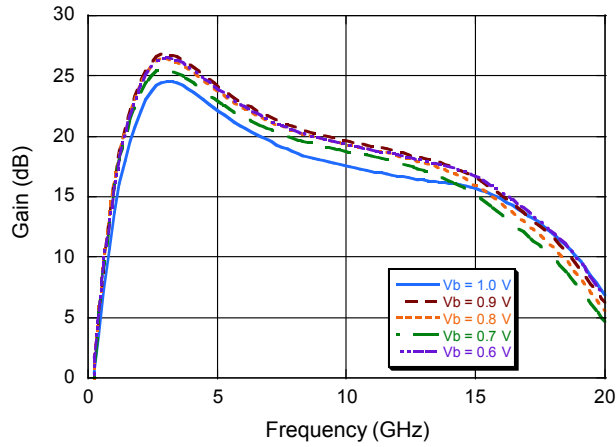

Gain vs.  $V_B$  for  $V_{DD} = 3.3\text{ V}$

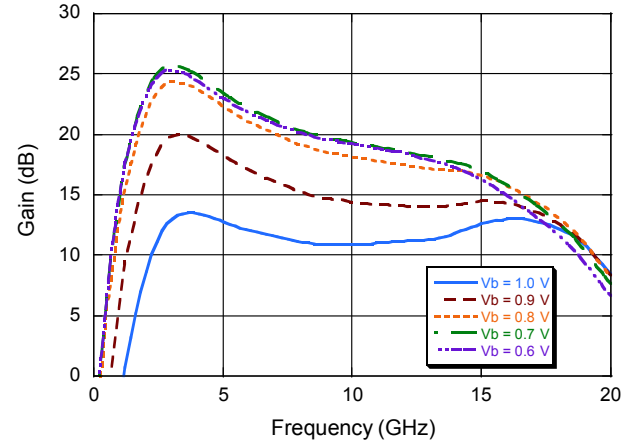


Preliminary Information

## Broadband Low Noise Amplifier 2 - 18 GHz


Preliminary - Rev. V1P

### Typical Output IP3 Curves $V_{DD} = 5\text{ V}$ and $3.3\text{ V}$


Output IP3 @  $T_A = 25^\circ\text{C}$ ,  $V_{DD} = 5\text{ V}$

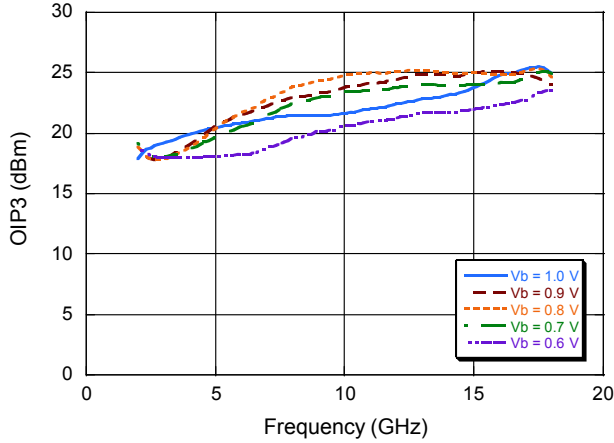


Output IP3 @  $T_A = 25^\circ\text{C}$ ,  $V_{DD} = 3.3\text{ V}$

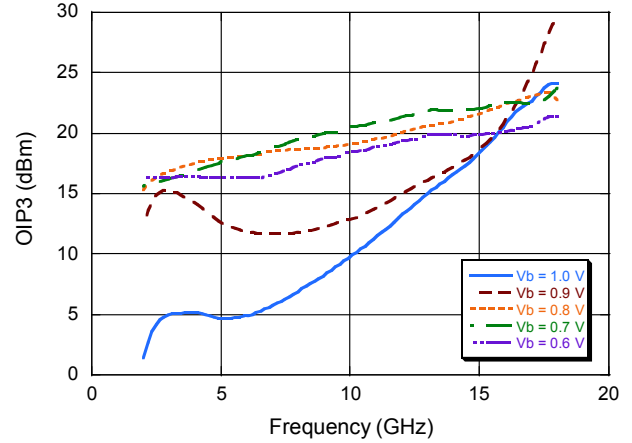


Output IP3 @  $T_A = -40^\circ\text{C}$ ,  $V_{DD} = 5\text{ V}$

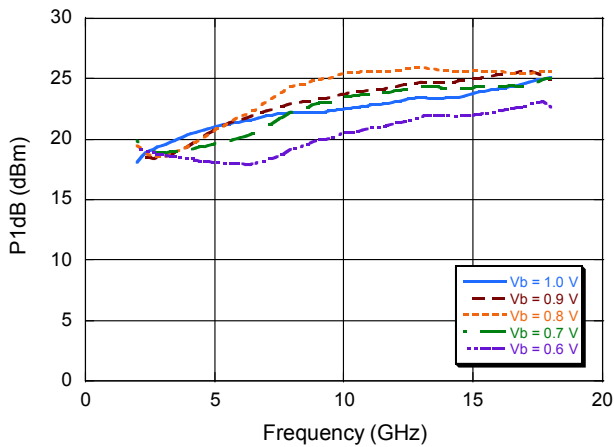


Output IP3 @  $T_A = -40^\circ\text{C}$ ,  $V_{DD} = 3.3\text{ V}$

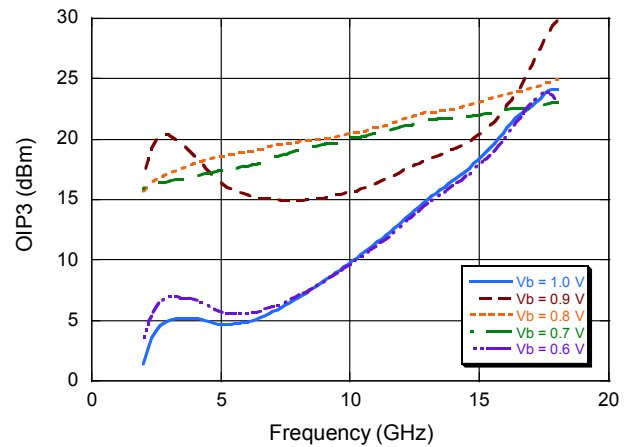

Output IP3 @  $T_A = 85^\circ\text{C}$ ,  $V_{DD} = 5\text{ V}$

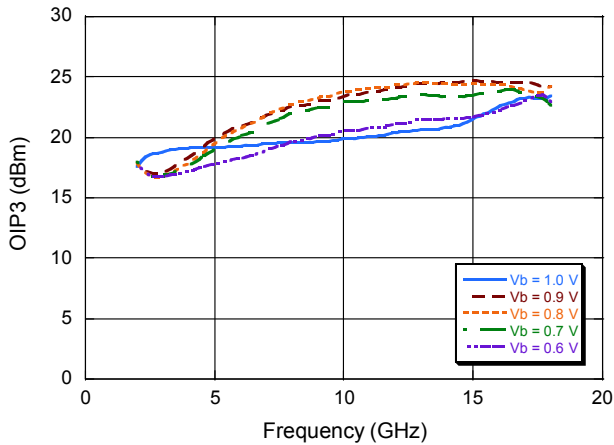

Output IP3 @  $T_A = 85^\circ\text{C}$ ,  $V_{DD} = 3.3\text{ V}$

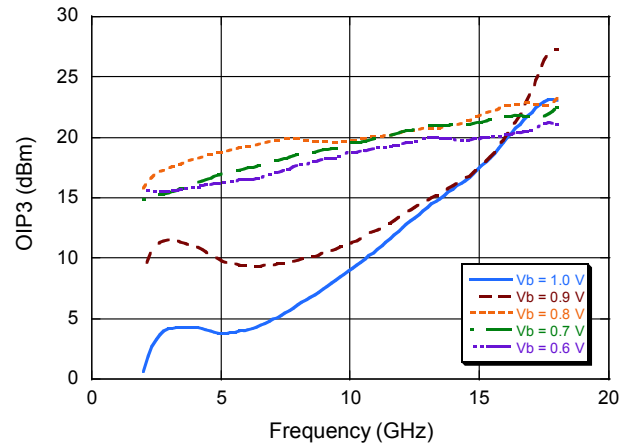

**PRELIMINARY:** Data Sheets contain information regarding a product MACOM has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

For further information and support please visit: <https://www.macom.com/support>




## Broadband Low Noise Amplifier 2 - 18 GHz


Preliminary - Rev. V1P

### Typical P1dB and P3dB Curves $V_{DD} = 5\text{ V}$


**P1dB @  $V_{DD} = 5\text{ V}$ ,  $V_B = 0.9\text{ V}$**

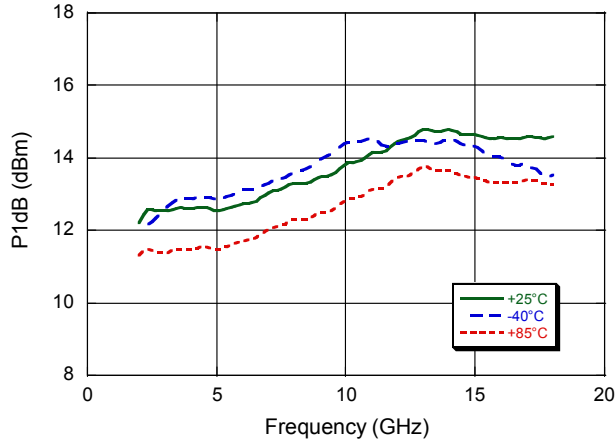


**P3dB @  $V_{DD} = 5\text{ V}$ ,  $V_B = 0.9\text{ V}$**

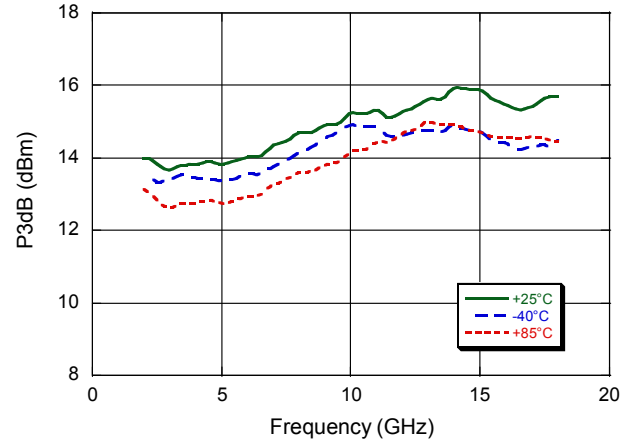

**P1dB @  $T_A = 25^\circ\text{C}$ ,  $V_{DD} = 5\text{ V}$**

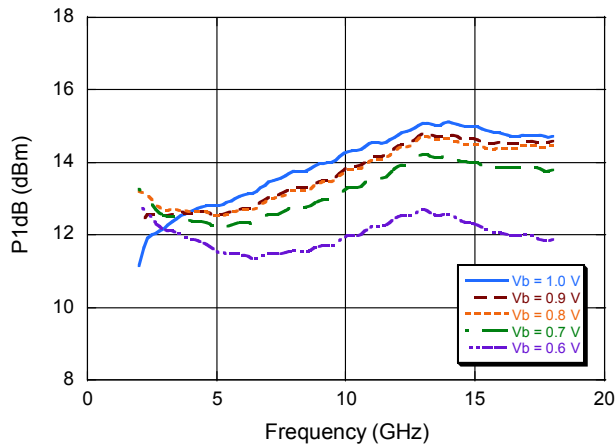

**P3dB @  $T_A = 25^\circ\text{C}$ ,  $V_{DD} = 5\text{ V}$**

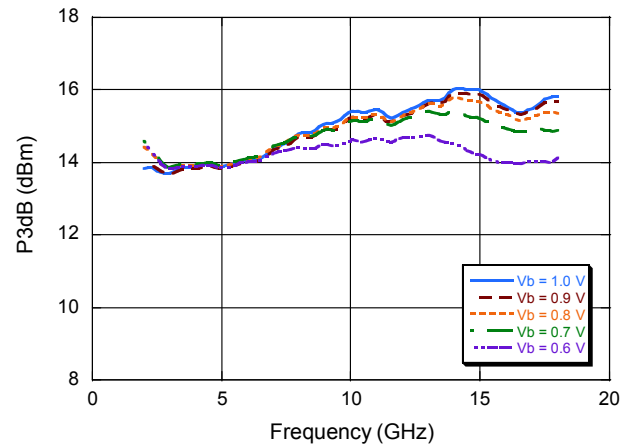


Preliminary Information

## Broadband Low Noise Amplifier 2 - 18 GHz


Preliminary - Rev. V1P

### Typical P1dB and P3dB Curves $V_{DD} = 3.3\text{ V}$


**P1dB @  $V_{DD} = 3.3\text{ V}$ ,  $V_B = 0.8\text{ V}$**

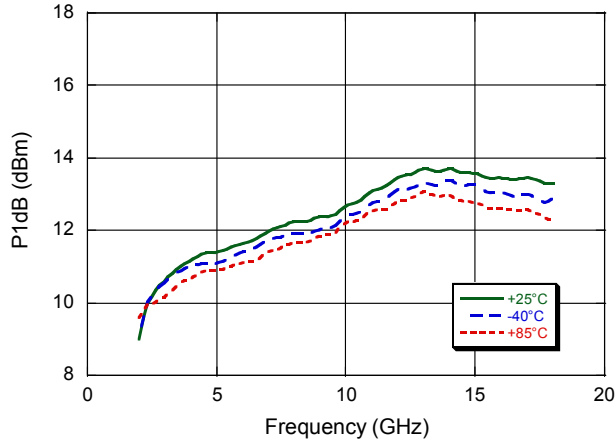


**P3dB @  $V_{DD} = 3.3\text{ V}$ ,  $V_B = 0.8\text{ V}$**

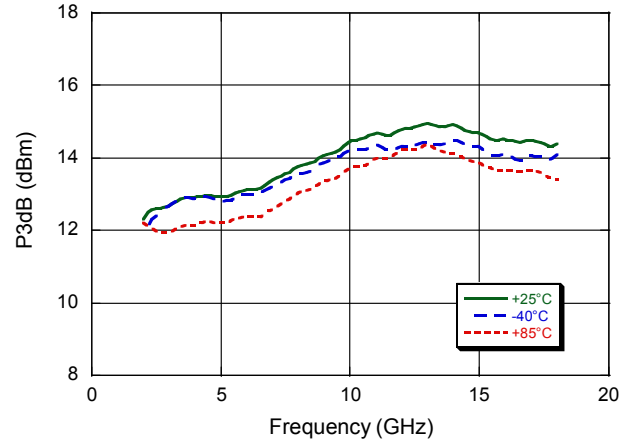

**P1dB @  $T_A = 25^\circ\text{C}$ ,  $V_{DD} = 3.3\text{ V}$**

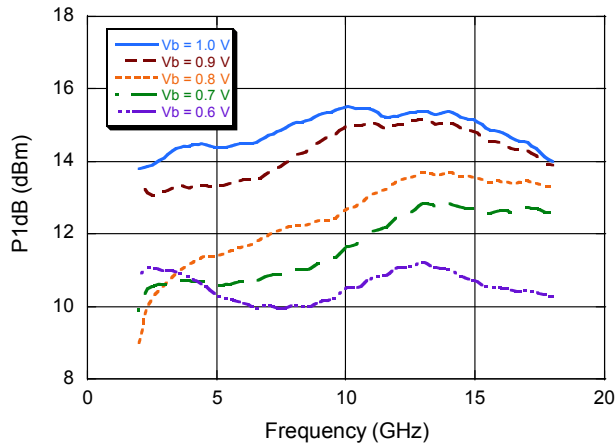

**P3dB @  $T_A = 25^\circ\text{C}$ ,  $V_{DD} = 3.3\text{ V}$**

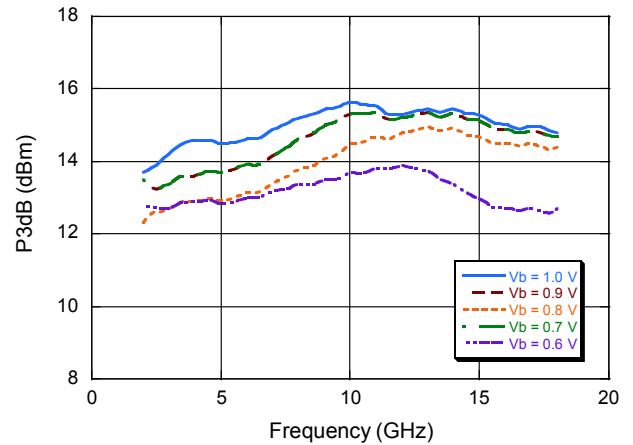


Preliminary Information

## Broadband Low Noise Amplifier 2 - 18 GHz

Preliminary - Rev. V1P

### Lead-Free 2 mm 8-Lead PDFN<sup>†</sup>

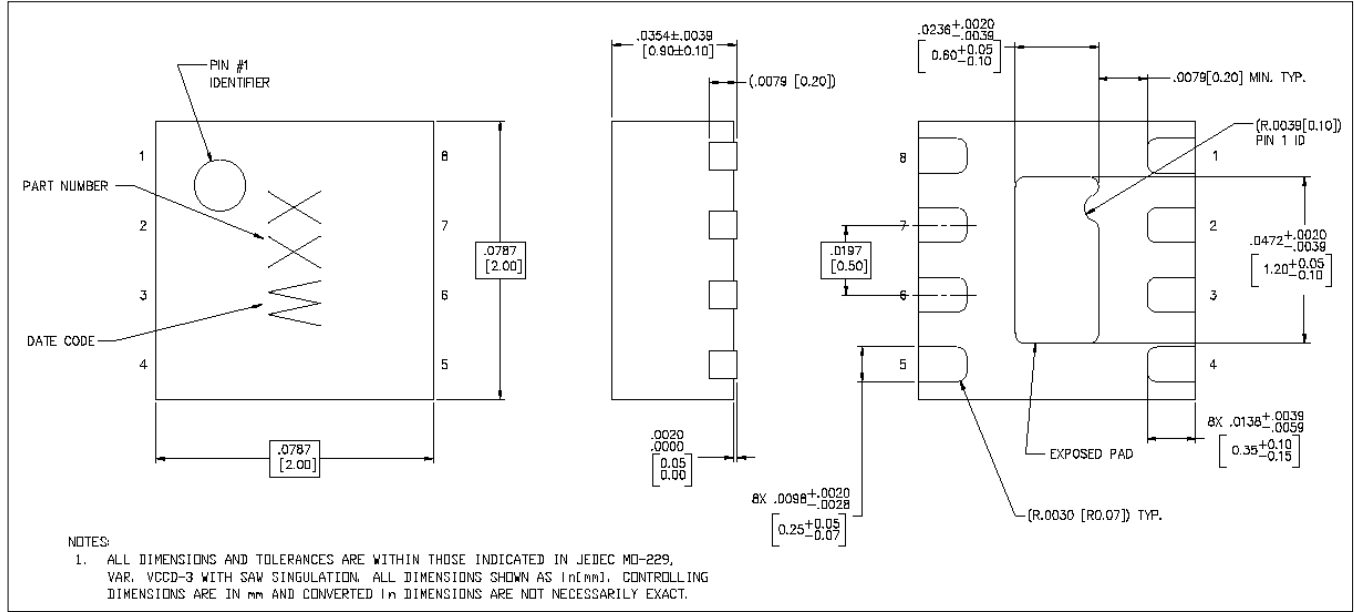

<sup>†</sup> Reference Application Note S2083 for lead-free solder reflow recommendations.  
Meets JEDEC moisture sensitivity level 1 requirements.  
Plating is 100% matte tin over copper.

Preliminary Information

MACOM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with MACOM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.