


FEATURES

- Super-low power version of DS1232
- 50µA quiescent current
- Halts and restarts an out-of-control microprocessor
- Automatically restarts microprocessor after power failure
- Monitors pushbutton for external override
- Accurate 5% or 10% microprocessor power supply monitoring
- 8-pin DIP, 8-pin SOIC or space saving µ-SOP package available
- Optional 16-pin SOIC package available
- Industrial temperature -40°C to +85°C available, designated N


PIN DESCRIPTION

$\overline{\text{PBRST}}$	-Pushbutton Reset Input
TD	-Time Delay Set
TOL	-Selects 5% or 10% Vcc Detect
GND	-Ground
RST	-Reset Output (Active High)
$\overline{\text{RST}}$	-Reset Output (Active Low, open drain)
ST	-Strobe Input
Vcc	-+5 Volt Power


PIN ASSIGNMENT




DS1232LP 8-Pin DIP (300-mil)
See Mech. Drawings Section

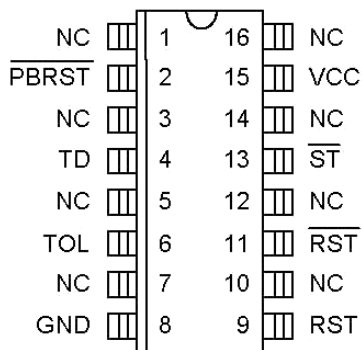

DS1232LPS 16-Pin SOIC (300-mil)
See Mech. Drawings Section



DS1232LPµ(118-mil µ-SOP)
See Mech. Drawings Section

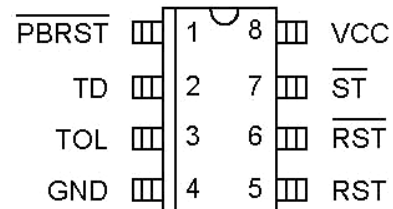

DS1232LPS-2 8-Pin SOIC (150-mil)
See Mech. Drawings Section

DESCRIPTION

The DS1232LP/LPS Low Power MicroMonitor Chip monitors three vital conditions for a microprocessor: power supply, software execution, and external over-ride. First, a precision temperature-compensated reference and comparator circuit monitors the status of Vcc. When an out-of-tolerance condition occurs, an internal power-fail signal is generated which forces reset to the active state. When Vcc returns to an in-tolerance condition, the reset signals are kept in the active state for a minimum of 250ms to allow the power supply and processor to stabilize.

The second function the DS1232LP/LPS performs is pushbutton reset control. The DS1232LP/LPS debounces the pushbutton input and guarantees an active reset pulse width of 250 ms minimum. The third function is a watchdog timer. The DS1232LP/LPS has an internal timer that forces the reset signals to the active state if the strobe input is not driven low prior to timeout. The watchdog timer function can be set to operate on timeout setting of approximately 150ms, 600ms, and 1.2 seconds.

OPERATION – POWER MONITOR

The DS1232LP/LPS detects out-of-tolerance power supply conditions and warns a processor-based system of impending power failure. When V_{cc} falls below a preset level as defined by TOL, the V_{cc} comparator outputs the signals RST and $\overline{RST}$. When TOL is connected to ground, the RST and $\overline{RST}$ signals become active as V_{cc} falls below 4.75 volts. When TOL is connected to V_{cc} , the RST and $\overline{RST}$ signals become active as V_{cc} falls below 4.5 volts. The RST and $\overline{RST}$ are excellent control signals for a microprocessor, as processing is stopped at the last possible moments of valid V_{cc} . On power-up, RST and $\overline{RST}$ are kept active for a minimum of 250 ms to allow the power supply and processor to stabilize.


OPERATION – PUSHBUTTON RESET

The DS1232LP/LPS provides an input pin for direct connection to a pushbutton (Figure 1). The pushbutton reset input requires an active low signal. Internally, this input is debounced and timed such that RST and $\overline{RST}$ signals of at least 250ms minimum are generated. The 250ms delay starts as the pushbutton reset input is released from low level.


OPERATION – WATCHDOG TIMER

The watchdog timer function forces RST and $\overline{RST}$ signals to the active state when the $\overline{ST}$ input is not stimulated for a predetermined time period. The time period is set by the TD input to be typically 150ms with TD connected to ground, 600 ms with TD left unconnected, and 1.2 seconds with TD connected to V_{cc} . The watchdog timer starts timing out from the set time period as soon as RST and $\overline{RST}$ are inactive. If a high-to-low transition occurs on the $\overline{ST}$ input pin prior to timeout, the watchdog timer is reset and begins to timeout again. If the watchdog timer is allowed to timeout, then the RST and $\overline{RST}$ signals are driven to the active state for 250ms minimum. The $\overline{ST}$ input can be derived from microprocessor address signals, data signals, and/or control signals. When the microprocessor is functioning normally, these signals would, as a matter of routine, cause the watchdog to be reset prior to timeout. To guarantee that the watchdog timer does not timeout, a high-to-low transition must occur at or less than the minimum shown in Table 1. A typical circuit example is shown in Figure 2.


MICROMONITOR BLOCK DIAGRAM

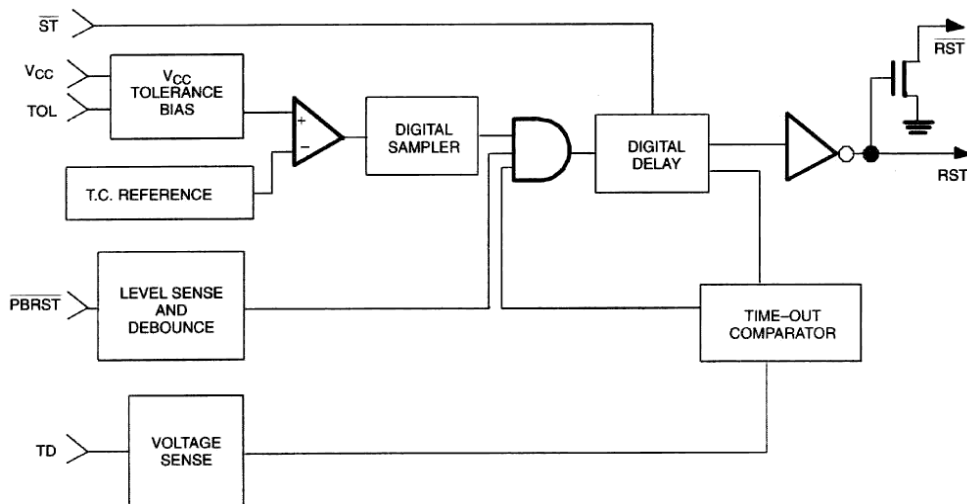


PUSHBUTTON RESET Figure 1

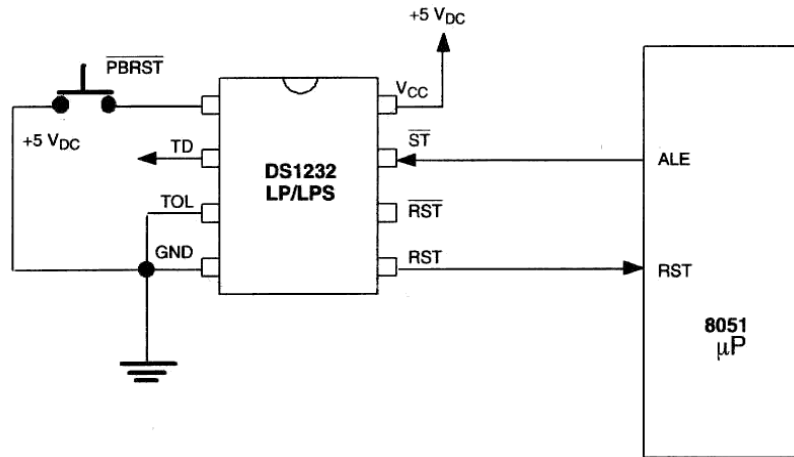


WATCHDOG TIMER Figure 2

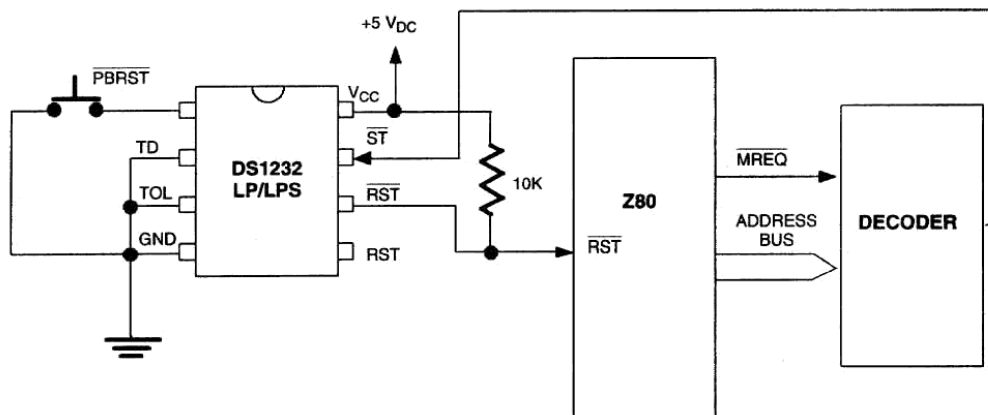

TIMING DIAGRAM: PUSHBUTTON RESET Figure 3

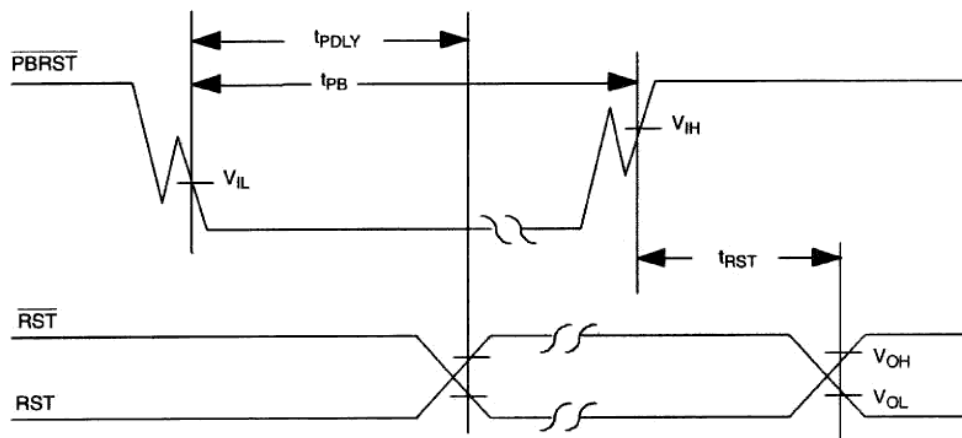


TIMING DIAGRAM:STROBE INPUT Figure 4

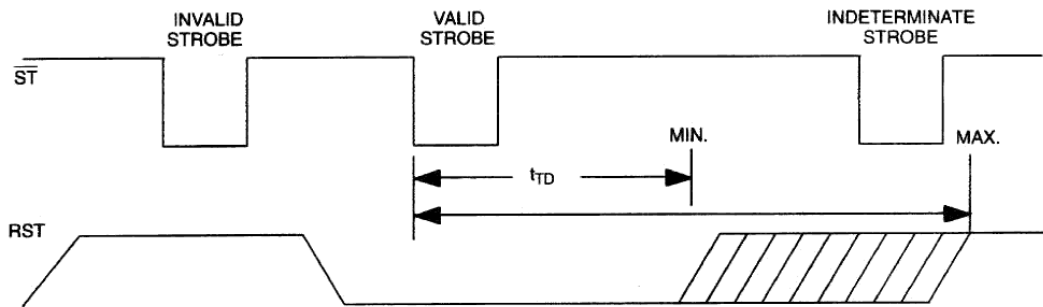


WATCHDOG TIME-OUTS Table 1

TD	TIME-OUT		
	MIN	TYP	MAX
GND	62.5ms	150ms	250ms
Float	250ms	600ms	1000ms
Vcc	500ms	1200ms	2000ms

TIMING DIAGRAM: POWER-DOWN Figure 5

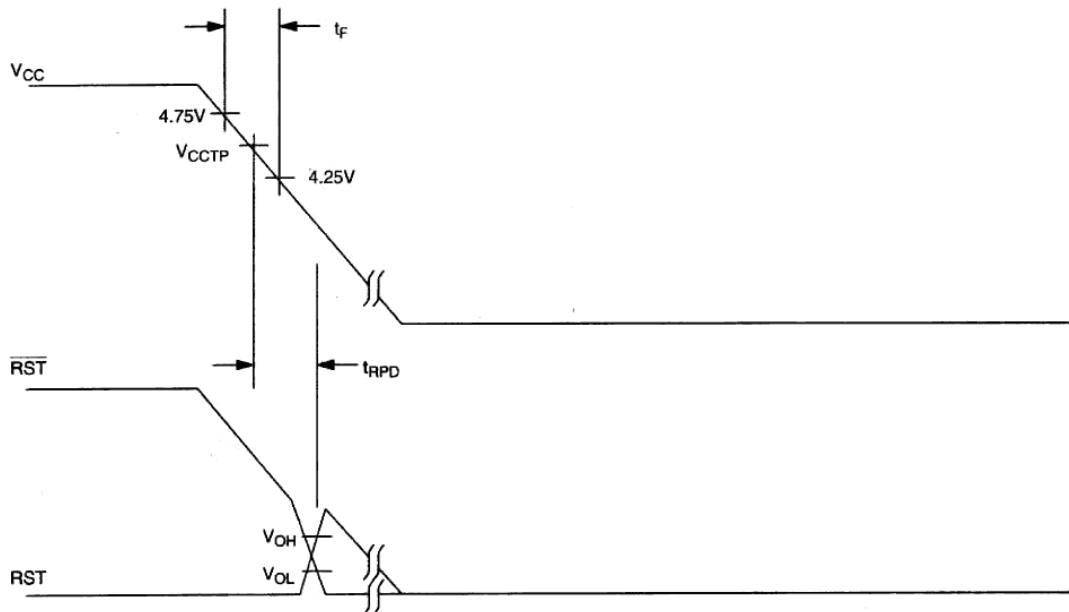

TIMING DIAGRAM: POWER-UP Figure 6

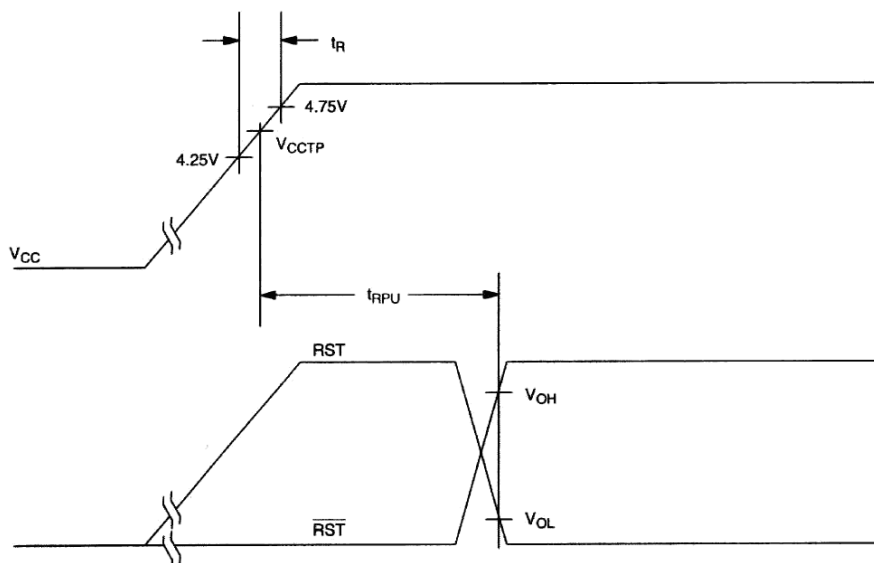

ABSOLUTE MAXIMUM RATINGS*

Voltage on Vcc Pin Relative to Ground
 Voltage on I/O Relative to Ground
 Operating Temperature
 Operating Temperature (Industrial Version)
 Storage Temperature
 Soldering Temperature

-0.5V to +7.0V
 -0.5V to Vcc +0.5V
 0°C to 70°C
 -40°C to +85°C
 -55°C to +125°C
 260°C for 10 seconds

*This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operation sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods of time may affect reliability.

RECOMMENDED DC OPERATING CONDITIONS

(0°C to 70°C)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	NOTES
Supply Voltage	Vcc	4.5	5.0	5.5	V	1
$\overline{ST}$ and $\overline{PBRST}$ Input High Level	V _{IH}	2.0		Vcc +0.3	V	1
$\overline{ST}$ and $\overline{PBRST}$ Input Low Level	V _{IL}	-0.3		+0.8	V	1

DC ELECTRICAL CHARACTERISTICS

(0°C to 70°C; Vcc =4.5 to 5.5V)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	NOTES
Input Leakage	I _{IL}	-1.0		+1.0	μA	3
Output Current @ 2.4V	I _{OH}	-8	-10		mA	5
Output Current @ 0.4V	I _{OL}	10			mA	
Low Level @ RST	V _{OL}			0.4	V	1
Output Voltage @ -500uA	V _{OH}	Vcc -0.5V	Vcc -0.1V		V	1,7
Output Current (CMOS)	I _{cc1}			50	μA	2
Operating Current (TTL)	I _{cc2}		200	500	μA	8
Vcc Trip Point (TOL=GND)	V _{CCTP}	4.50	4.62	4.74	V	1
Vcc Trip Point (TOL=Vcc)	V _{CCTP}	4.25	4.37	4.49	V	1

CAPACITANCE

($t_A=25^{\circ}\text{C}$)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	NOTES
Input Capacitance	C_{IN}			5	pF	
Output Capacitance	C_{OUT}			7	pF	

AC ELECTRICAL CHARACTERISTICS

(0°C to 70°C ; $V_{CC}=5\text{V} \pm 10\%$)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	NOTES
$\overline{\text{PBRST}} = V_{IL}$	t_{PB}	20			ms	
RESET Active Time	t_{RST}	250	610	1000	ms	
$\overline{\text{ST}}$ Pulse Width	t_{ST}	20			ns	6,9
Vcc Fail Detect to RST and $\overline{\text{RST}}$	t_{RPD}		50	175	μs	
Vcc Slew Rate 4.75 V to 4.25 V	t_F	300			μs	
Vcc Detect to RST and $\overline{\text{RST}}$ Inactive	t_{RPU}	250	610	1000	ms	4
Vcc Slew Rate 4.25V to 4.75V	t_R	0			ns	
$\overline{\text{PBRST}}$ Stable Low to $\overline{\text{RST}}$ and RST	t_{PDLY}			20	ms	

NOTES:

1. All voltages referenced to ground.
2. Measured with outputs open and $\overline{\text{ST}}$ and $\overline{\text{PBRST}}$ within 0.5V of supply rails.
3. $\overline{\text{PBRST}}$ is internally pulled up to Vcc with an internal impedance of 40k typical.
4. $t_R=5 \mu\text{s}$.
5. $\overline{\text{RST}}$ is an open-drain output.
6. Must not exceed t_{TD} minimum. See Table 1.
7. RST remains within 0.5V of Vcc on power-down until Vcc drops below 2.0V. $\overline{\text{RST}}$ remains within 0.5V of GND on power-down until Vcc drops below 2.0V.
8. Measured with outputs open and $\overline{\text{ST}}$ and $\overline{\text{PBRST}}$ at TTL levels.
9. Watchdog can not be disabled. It must be strobed to avoid resets.

MARKING INFORMATION:

8-pin DIP – "DS1232L"

16-pin SOIC – "DS1232L"

8-pin SOIC – "DS1232L"

8-pin μ -SOP – "1232"

