
10A05 THRU 10A10

GENERAL PURPOSE SILICON RECTIFIER

Reverse Voltage - 50 to 1000 Volts Forward Current -10.0 Amperes

R-6

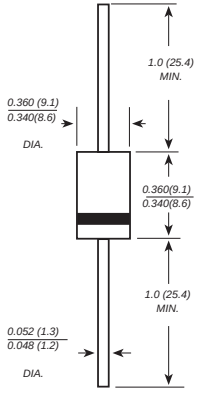

Dimensions in inches and (millimeters)

FEATURES

- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- Construction utilizes void-free molded plastic technique
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed: 250℃/10 seconds,0.375"(9.5mm) lead length, 5 lbs. (2.3kg) tension

MECHANICAL DATA

Case: R-6 molded plastic body
Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026
Polarity: Color band denotes cathode end
Mounting Position: Any
Weight:0.072 ounce, 2.05 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25℃ ambient temperature unless otherwise specified.
Single phase half-wave 60Hz,resistive or inductive load,for capacitive load current derate by 20%.

MDD Catalog Number	*SYMBOLS*	10A05	10A1	10A2	10A4	10A6	10A8	10A10	UNITS
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	VOLTS
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	VOLTS
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	VOLTS
Maximum average forward rectified current 0.375"(9.5mm) lead length at T_A=60℃	$I_{(AV)}$	10.0							Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	600							Amps
Maximum instantaneous forward voltage at 10.0A	V_F	1.0							Volts
Maximum DC reverse current T_A=25℃	I_R	10.0							μA
at rated DC blocking voltage T_A=100℃		100							
Typical junction capacitance (NOTE 1)	C_J	150							pF
Typical thermal resistance (NOTE 2)	$R_{\theta JA}$	10.0							°C/W
Operating junction and storage temperature range	T_J,T_{STG}	-50 to +150							°C

Note: 1.Measured at 1MHz and applied reverse voltage of 4.0V D.C.
2.Thermal resistance from junction to ambient at 0.375" (9.5mm)lead length,P.C.B. mounted

RATINGS AND CHARACTERISTIC CURVES 10A05 THRU 10A10

FIG. 1 -- TYPICAL FORWARD CHARACTERISTIC

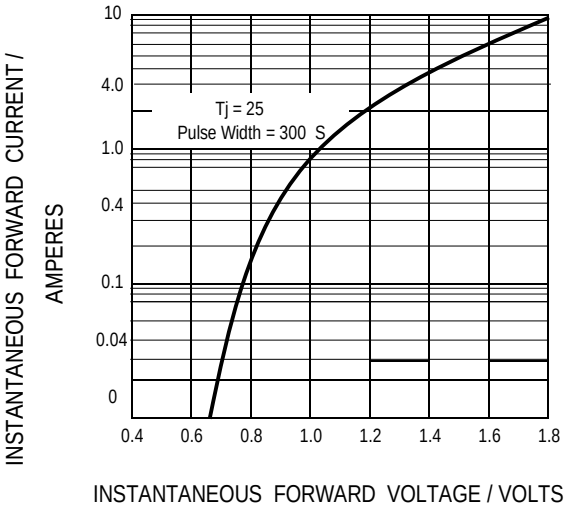


FIG. 2 -- TYPICAL JUNCTION CAPACITANCE

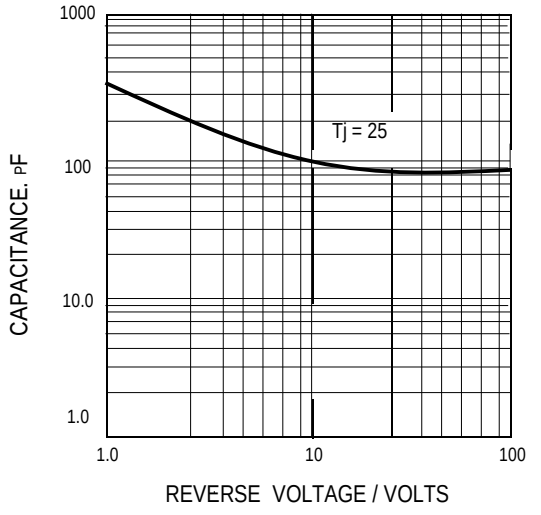


FIG. 3 -- FORWARD CURRENT DERATING CURVE

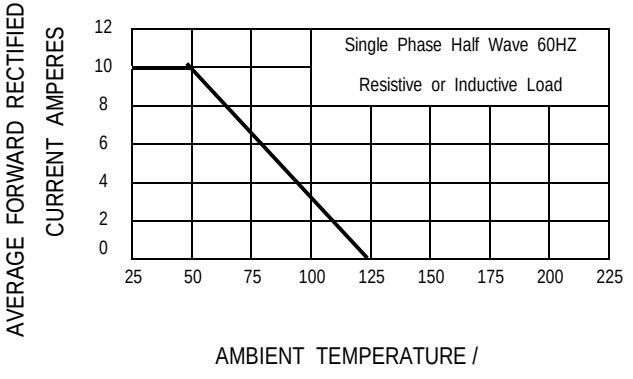


FIG. 4 -- PEAK FORWARD SURGE CURRENT

