REJ09B0187-0100

Everywhere you imagine. RENESAS

16

M16C/80 Group

Hardware Manual

RENESAS 16-BIT SINGLE-CHIP MICROCOMPUTER

M16C FAMILY / M16C/80 SERIES

Hardware Manual

Before using this material, please visit our website to verify that this is the most updated document available.

Rev. 1.00
Revision date: Aug. 02, 2005

RenesasTechnology
www.renesas.com

Keep safety first in your circuit designs!

1. Renesas Technology Corp. puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage. Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of nonflammable material or (iii) prevention against any malfunction or mishap.

Notes regarding these materials

1. These materials are intended as a reference to assist our customers in the selection of the Renesas Technology Corp. product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Renesas Technology Corp. or a third party.
2. Renesas Technology Corp. assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.
3. All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Renesas Technology Corp. without notice due to product improvements or other reasons. It is therefore recommended that customers contact Renesas Technology Corp. or an authorized Renesas Technology Corp. product distributor for the latest product information before purchasing a product listed herein.
   The information described here may contain technical inaccuracies or typographical errors. Renesas Technology Corp. assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors.
   Please also pay attention to information published by Renesas Technology Corp. by various means, including the Renesas Technology Corp. Semiconductor home page (http://www.renesas.com).
4. When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Renesas Technology Corp. assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.
5. Renesas Technology Corp. semiconductors are not designed or manufactured for use in a device or system that is used under circumstances in which human life is potentially at stake. Please contact Renesas Technology Corp. or an authorized Renesas Technology Corp. product distributor when considering the use of a product contained herein for any specific purposes, such as apparatus or systems for transportation, vehicular, medical, aerospace, nuclear, or undersea repeater use.
6. The prior written approval of Renesas Technology Corp. is necessary to reprint or reproduce in whole or in part these materials.
7. If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination.
   Any diversion or reexport contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.
8. Please contact Renesas Technology Corp. for further details on these materials or the products contained therein.

How to Use This Manual

1.Introduction

This hardware manual provides detailes information on the M16C/80 group microcomputers.
Users are exoected to have basic knowledge of electric circuits,logical circuits and microcomputers.

2.Register Diagram

The symbols,and descriptions,used for bit function in each register are shown below.

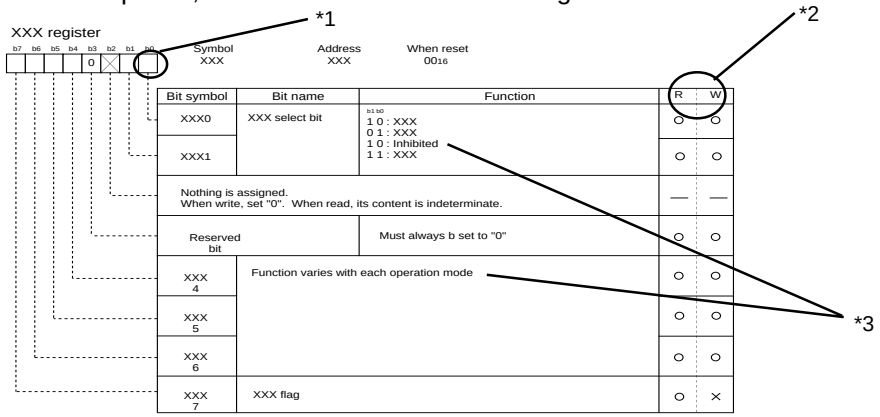

*1

Blank: Set to "0" or "1" according to intended use

0: Set to "0"

1: Set to "1"

X: Nothing is assigned

*2

R: Read

O.....Possible to read

X.....Impossible to read

–.....Nothing is assigned

W: Write

O.....Possible to write

X.....Written value is invalid

When write, value can be "0" or "1"

–.....Nothing is assigned

*3

Terms to use here are explained as follows.

• Nothing is assigned

Nothing is assigned to the bit concerned. When write, set "0" for new function in future plan.

• Inhibited

Not select. The operation at having selected is not guaranteed.

• Reserved bit

Reserved bit. Set the specified value.

• Function varies with each operation mode

Bit function changes according to the mode of peripheral functions.

• Must be fixed to "0" in A mode

Set the bit concerned to "0" in A mode.

• Invalid in A mode

The bit concerned has no function in A mode. Set the specified value.

• Valid when bit A="0"

When bit A is "1", the bit concerned has no function. When bit A is "0", the bit concerned has function.

3. M16C Family Documents

The following documents were prepared for the M16C family. (1)

Document	Contents
Short Sheet	Hardware overview
Data Sheet	Hardware overview and electrical characteristics
Hardware Manual	Hardware specifications (pin assignments, memory maps, peripheral specifications, electrical characteristics, timing charts)
Software Manual	Detailed description of assembly instructions and microcomputer performance of each instruction
Application Note	• Application examples of peripheral functions • Sample programs • Introduction to the basic functions in the M16C family • Programming method with Assembly and C languages
RENESAS TECHNICAL UPDATE	Preliminary report about the specification of a product, a document, etc.

NOTES :

1. Before using this material, please visit the our website to verify that this is the most updated document available.

Table of Contents

Quick Reference by Address ____ **B-1**

1. Overview ____ **1**

1.1 Features 1
1.2 Applications 1
1.3 Pin Configuration 2
1.4 Block Diagram 5
1.5 Performance Outline 6
1.6 Pin Description (1) 9

2. Memory ____ **12**

3. Central Processing Unit (CPU) ____ **13**

4. Reset ____ **18**

5. SFR ____ **22**

6. Processor Mode ____ **26**

7. Bus ____ **30**

7.1 Bus Settings 30
7.2 Bus Control 33

8. Clock Generating Circuit ____ **43**

8.1 Example of oscillator circuit 43
8.2 Clock Control 44
8.3 Clock Output 47
8.4 Stop Mode 48
8.5 Wait Mode 50
8.6 Status Transition of BCLK 51
8.7 Power Saving 53
8.8 Protection 55

9. Interrupt Outline ____ **56**

9.1 Types of Interrupts 56
9.2 Software Interrupts 57
9.3 Hardware Interrupts 58
9.4 High-speed interrupts 59
9.5 Interrupts and Interrupt Vector Tables 59

9.6 Interrupt control registers 62
9.7 Interrupt Enable Flag (I Flag) 64
9.8 Interrupt Request Bit 64
9.9 Interrupt Priority Level Select Bit and Processor Interrupt Priority Level (IPL) ... 64
9.10 Rewrite the interrupt control register 65
9.11 Interrupt Sequence 66
9.12 Interrupt Response Time 66
9.13 Changes of IPL When Interrupt Request Acknowledged 68
9.14 Saving Registers 68
9.15 Return from Interrupt Routine 69
9.16 Interrupt Priority 69
9.17 Interrupt Resolution Circuit 69
9.18 $\overline{\text{INT}}$ Interrupts 71
9.19 $\overline{\text{NMI}}$ Interrupt 72
9.20 Key Input Interrupt 72
9.21 Address Match Interrupt 73
9.22 Precautions for Interrupts 74

10. Watchdog Timer ____ 78

11. DMAC ____ 80

12. Timer ____ 92

13. Timer A ____ 94

14. Timer B ____ 106

15. Three-phase motor control timers' functions ____ 112

16. Serial I/O ____ 124

17. Clock synchronous serial I/O mode ____ 136

18. Clock asynchronous serial I/O (UART) mode ____ 144

19. Clock-asynchronous serial I/O mode (compliant with the SIM interface) ____ 151

20. UARTi Special Mode Register (i = 2 to 4) ____ 155

21. A/D Converter ____ 166

22. D/A Converter ____ 176

23. CRC Calculation Circuit ____ 178

24. XY Converter ____ 180

25. DRAM Controller ____ 183
26. Programmable I/O Ports ____ 190
27. Usage Precaution ____ 208
28. Electrical characteristics ____ 225
29. Flash Memory Version ____ 271
30. CPU Rewrite Mode ____ 274
31. Parallel I/O Mode ____ 290
32. Standard serial I/O mode ____ 295
32.1 Overview of standard serial I/O mode 1 (clock synchronized) 296
32.2 Overview of standard serial I/O mode 2 (clock asynchronized) 311

Package Dimension ____ 326

Register Index ____ 328

Revision History ____ C-1

Quick Reference by Address

Address	Register	Symbol	page
0000₁₆			
0001₁₆			
0002₁₆			
0003₁₆			
0004₁₆	Processor mode register 0	PM0	27
0005₁₆	Processor mode register 1	PM1	28
0006₁₆	System clock control register 0	CM0	46
0007₁₆	System clock control register 1	CM1	
0008₁₆	Wait control register	WCR	40
0009₁₆	Address match interrupt enable register	AIER	73
000A₁₆	Protect register	PRCR	55
000B₁₆	External data bus width control register	DS	31
000C₁₆	Main clock division register	MCD	47
000D₁₆			
000E₁₆	Watchdog timer start register	WDTS	79
000F₁₆	Watchdog timer control register	WDC	
0010₁₆	Address match interrupt register 0	RMAD0	73
0011₁₆			
0012₁₆			
0013₁₆			
0014₁₆	Address match interrupt register 1	RMAD1	73
0015₁₆			
0016₁₆			
0017₁₆			
0018₁₆	Address match interrupt register 2	RMAD2	73
0019₁₆			
001A₁₆			
001B₁₆			
001C₁₆	Address match interrupt register 3	RMAD3	73
001D₁₆			
001E₁₆			
001F₁₆			
0020₁₆	Emulator interrupt vector table register *	EIAD	
0021₁₆			
0022₁₆			
0023₁₆	Emulator interrupt detect register *	EITD	
0024₁₆	Emulator protect register *	EPRR	
0025₁₆			
0026₁₆			
0027₁₆			
0028₁₆			
0029₁₆			
002A₁₆			
002B₁₆			
002C₁₆			
002D₁₆			
002E₁₆			
002F₁₆			
0030₁₆	ROM areaset register *	ROA	
0031₁₆	Debug monitor area set register *	DBA	
0032₁₆	Expansion area set register 0 *	EXA0	
0033₁₆	Expansion area set register 1 *	EXA1	
0034₁₆	Expansion area set register 2 *	EXA2	
0035₁₆	Expansion area set register 3 *	EXA3	
0036₁₆			
0037₁₆			
0038₁₆			
0039₁₆			
003A₁₆			
003B₁₆			
003C₁₆			
003D₁₆			
003E₁₆			
003F₁₆			
0040₁₆	DRAM control register	DRAMCONT	183
0041₁₆	DRAM refresh interval set register	REFCNT	185
0042₁₆			
0043₁₆			
0044₁₆			

Address	Register	Symbol	page
0060₁₆			
0061₁₆			
0062₁₆			
0063₁₆			
0064₁₆			
0065₁₆			
0066₁₆			
0067₁₆			
0068₁₆	DMA0 interrupt control register	DM0IC	63
0069₁₆	Timer B5 interrupt control register	TB5IC	
006A₁₆	DMA2 interrupt control register	DM2IC	
006B₁₆	UART2 receive/ACK interrupt control register	S2RIC	
006C₁₆	Timer A0 interrupt control register	TA0IC	
006D₁₆	UART3 receive/ACK interrupt control register	S3RIC	
006E₁₆	Timer A2 interrupt control register	TA2IC	
006F₁₆	UART4 receive/ACK interrupt control register	S4RIC	
0070₁₆	Timer A4 interrupt control register	TA4IC	
0071₁₆	Bus collision detection(UART3) interrupt control register	BCN3IC	
0072₁₆	UART0 receive interrupt control register	S0RIC	
0073₁₆	A/D conversion interrupt control register	ADIC	
0074₁₆	UART1 receive interrupt control register	S1RIC	
0075₁₆			
0076₁₆	Timer B1 interrupt control register	TB1IC	63
0077₁₆			
0078₁₆	Timer B3 interrupt control register	TB3IC	63
0079₁₆			
007A₁₆	INT5 interrupt control register	INT5IC	63
007B₁₆			
007C₁₆	INT3 interrupt control register	INT3IC	63
007D₁₆			
007E₁₆	INT1 interrupt control register	INT1IC	63
007F₁₆			
0080₁₆			
0081₁₆			
0082₁₆			
0083₁₆			
0084₁₆			
0085₁₆			
0086₁₆			
0087₁₆			
0088₁₆	DMA1 interrupt control register	DM1IC	63
0089₁₆	UART2 transmit/NACK interrupt control register	S2TIC	
008A₁₆	DMA3 interrupt control register	DM3IC	
008B₁₆	UART3 transmit/NACK interrupt control register	S3TIC	
008C₁₆	Timer A1 interrupt control register	TA1IC	
008D₁₆	UART4 transmit/NACK interrupt control register	S4TIC	
008E₁₆	Timer A3 interrupt control register	TA3IC	
008F₁₆	Bus collision detection(UART2) interrupt control register	BCN2IC	
0090₁₆	UART0 transmit interrupt control register	S0TIC	
0091₁₆	Bus collision detection(UART4) interrupt control register	BCN4IC	
0092₁₆	UART1 transmit interrupt control register	S1TIC	
0093₁₆	Key input interrupt control register	KUPIC	
0094₁₆	Timer B0 interrupt control register	TB0IC	
0095₁₆			
0096₁₆	Timer B2 interrupt control register	TB2IC	63
0097₁₆			
0098₁₆	Timer B4 interrupt control register	TB4IC	63
0099₁₆			
009A₁₆	INT4 interrupt control register	INT4IC	63
009B₁₆			
009C₁₆	INT2 interrupt control register	INT2IC	63
009D₁₆			
009E₁₆	INT0 interrupt control register	INT0IC	63
009F₁₆	Exit priority register	RLVL	49
00A0₁₆			
00A1₁₆			
00A2₁₆			
00A3₁₆			
00A4₁₆			

Blank spaces are reserved. No access is allowed.

Quick Reference by Address

Address	Register	Symbol	page
02C0₁₆ 02C1₁₆	X0 register ,Y0 register	X0R,Y0R	181
02C2₁₆ 02C3₁₆	X1 register, Y1 register	X1R,Y1R	
02C4₁₆ 02C5₁₆	X2 register ,Y2 register	X2R,Y2R	
02C6₁₆ 02C7₁₆	X3 register,Y3 register	X3R,Y3R	
02C8₁₆ 02C9₁₆	X4 register , Y4 register	X4R,Y4R	
02CA₁₆ 02CB₁₆	X5 register , Y5 register	X5R,Y5R	
02CC₁₆ 02CD₁₆	X6 register ,Y6 register	X6R,Y6R	
02CE₁₆ 02CF₁₆	X7 register ,Y7 register	X7R,Y7R	
02D0₁₆ 02D1₁₆	X8 register , Y8 register	X8R,Y8R	
02D2₁₆ 02D3₁₆	X9 register,Y9 register	X9R,Y9R	
02D4₁₆ 02D5₁₆	X10 register,Y10 register	X10R,Y10R	
02D6₁₆ 02D7₁₆	X11 register, Y11 register	X11R,Y11R	
02D8₁₆ 02D9₁₆	X12 register, Y12 register	X12R,Y12R	
02DA₁₆ 02DB₁₆	X13 register,Y13 register	X13R,Y13R	
02DC₁₆ 02DD₁₆	X14 register,Y14 register	X14R,Y14R	
02DE₁₆ 02DF₁₆	X15 register, Y15 register	X15R,Y15R	
02E0₁₆	XY control register	XYC	180
02E1₁₆			
02E2₁₆			
02E3₁₆			
02E4₁₆			
02E5₁₆			
02E6₁₆			
02E7₁₆			
02E8₁₆			
02E9₁₆			
02EA₁₆			
02EB₁₆			
02EC₁₆			
02ED₁₆			
02EE₁₆			
02EF₁₆			
02F0₁₆			
02F1₁₆			
02F2₁₆			
02F3₁₆			
02F4₁₆			
02F5₁₆	UART4 special mode register 3	U4SMR3	136
02F6₁₆	UART4 special mode register 2	U4SMR2	135
02F7₁₆	UART4 special mode register	U4SMR	134
02F8₁₆	UART4 transmit/receive mode register	U4MR	130
02F9₁₆	UART4 bit rate generator	U4BRG	129
02FA₁₆ 02FB₁₆	UART4 transmit buffer register	U4TB	
02FC₁₆	UART4 transmit/receive control register 0	U4C0	132
02FD₁₆	UART4 transmit/receive control register 1	U4C1	133
02FE₁₆ 02FF₁₆	UART4 receive buffer register	U4RB	129

Address	Register	Symbol	page
0300₁₆	Timer B3, 4, 5 count start flag	TBSR	107
0301₁₆			
0302₁₆ 0303₁₆	Timer A1-1 register	TA11	114
0304₁₆ 0305₁₆	Timer A2-1 register	TA21	
0306₁₆ 0307₁₆	Timer A4-1 register	TA41	
0308₁₆	Three-phase PWM control register 0	INVC0	112
0309₁₆	Three-phase PWM control register 1	INVC1	
030A₁₆	Thrree-phase output buffer register 0	IDB0	113
030B₁₆	Thrree-phase output buffer register 1	IDB1	
030C₁₆	Dead time timer	DTT	
030D₁₆	Timer B2 interrupt occurrence frequency set counter	ICTB2	
030E₁₆			
030F₁₆			
0310₁₆ 0311₁₆	Timer B3 register	TB3	107
0312₁₆ 0313₁₆	Timer B4 register	TB4	
0314₁₆ 0315₁₆	Timer B5 register	TB5	
0316₁₆			
0317₁₆			
0318₁₆			
0319₁₆			
031A₁₆			
031B₁₆	Timer B3 mode register	TB3MR	106
031C₁₆	Timer B4 mode register	TB4MR	
031D₁₆	Timer B5 mode register	TB5MR	
031E₁₆			
031F₁₆	Interrupt cause select register	IFSR	71
0320₁₆			
0321₁₆			
0322₁₆ 0323₁₆			
0324₁₆			
0325₁₆	UART3 special mode register 3	U3SMR3	136
0326₁₆	UART3 special mode register 2	U3SMR2	135
0327₁₆	UART3 special mode register	U3SMR	134
0328₁₆	UART3 transmit/receive mode register	U3MR	130
0329₁₆	UART3 bit rate generator	U3BRG	129
032A₁₆ 032B₁₆	UART3 transmit buffer register	U3TB	129
032C₁₆	UART3 transmit/receive control register 0	U3C0	132
032D₁₆	UART3 transmit/receive control register 1	U3C1	133
032E₁₆ 032F₁₆	UART3 receive buffer register	U3RB	129
0330₁₆			
0331₁₆			
0332₁₆			
0333₁₆			
0334₁₆			
0335₁₆	UART2 special mode register 3	U2SMR3	136
0336₁₆	UART2 special mode register 2	U2SMR2	135
0337₁₆	UART2 special mode register	U2SMR	134
0338₁₆	UART2 transmit/receive mode register	U2MR	130
0339₁₆	UART2 bit rate generator	U2BRG	129
033A₁₆ 033B₁₆	UART2 transmit buffer register	U2TB	
033C₁₆	UART2 transmit/receive control register 0	U2C0	131
033D₁₆	UART2 transmit/receive control register 1	U2C1	133
033E₁₆ 033F₁₆	UART2 receive buffer register	U2RB	129

Blank spaces are reserved. No access is allowed.

Quick Reference by Address

Address	Register	Symbol	page
0340₁₆	Count start flag	TABSR	95
0341₁₆	Clock prescaler reset flag	CPSRF	96
0342₁₆	One-shot start flag	ONSF	
0343₁₆	Trigger select register	TRGSR	
0344₁₆	Up-down flag	UDF	95
0345₁₆			
0346₁₆ 0347₁₆	Timer A0 register	TA0	95
0348₁₆ 0349₁₆	Timer A1 register	TA1	
034A₁₆ 034B₁₆	Timer A2 register	TA2	
034C₁₆ 034D₁₆	Timer A3 register	TA3	
034E₁₆ 034F₁₆	Timer A4 register	TA4	
0350₁₆ 0351₁₆	Timer B0 register	TB0	107
0352₁₆ 0353₁₆	Timer B1 register	TB1	
0354₁₆ 0355₁₆	Timer B2 register	TB2	
0356₁₆	Timer A0 mode register	TA0MR	94
0357₁₆	Timer A1 mode register	TA1MR	
0358₁₆	Timer A2 mode register	TA2MR	
0359₁₆	Timer A3 mode register	TA3MR	
035A₁₆	Timer A4 mode register	TA4MR	
035B₁₆	Timer B0 mode register	TB0MR	106
035C₁₆	Timer B1 mode register	TB1MR	
035D₁₆	Timer B2 mode register	TB2MR	
035E₁₆			
035F₁₆			
0360₁₆	UART0 transmit/receive mode register	U0MR	130
0361₁₆	UART0 bit rate generator	U0BRG	129
0362₁₆ 0363₁₆	UART0 transmit buffer register	U0TB	129
0364₁₆	UART0 transmit/receive control register 0	U0C0	131
0365₁₆	UART0 transmit/receive control register 1	U0C1	133
0366₁₆ 0367₁₆	UART0 receive buffer register	U0RB	129
0368₁₆	UART1 transmit/receive mode register	U1MR	130
0369₁₆	UART1 bit rate generator	U1BRG	129
036A₁₆ 036B₁₆	UART1 transmit buffer register	U1TB	
036C₁₆	UART1 transmit/receive control register 0	U1C0	131
036D₁₆	UART1 transmit/receive control register 1	U1C1	133
036E₁₆ 036F₁₆	UART1 receive buffer register	U1RB	129
0370₁₆	UART transmit/receive control register 2	UCON	134
0371₁₆			
0372₁₆			
0373₁₆			
0374₁₆			
0375₁₆			
0376₁₆	Flash memory control register 1	FMR1	276
0377₁₆	Flash memory control register 0	FMR0	
0378₁₆	DMA0 request cause select register	DM0SL	82
0379₁₆	DMA1 request cause select register	DM1SL	
037A₁₆	DMA2 request cause select register	DM2SL	
037B₁₆	DMA3 request cause select register	DM3SL	
037C₁₆ 037D₁₆	CRC data register	CRCD	178
037E₁₆	CRC input register	CRCIN	
037F₁₆			

Address	Register	Symbol	page
0380₁₆ 0381₁₆	A/D register 0	AD0	169
0382₁₆ 0383₁₆	A/D register 1	AD1	
0384₁₆ 0385₁₆	A/D register 2	AD2	
0386₁₆ 0387₁₆	A/D register 3	AD3	
0388₁₆ 0389₁₆	A/D register 4	AD4	
038A₁₆ 038B₁₆	A/D register 5	AD5	
038C₁₆ 038D₁₆	A/D register 6	AD6	
038E₁₆ 038F₁₆	A/D register 7	AD7	
0390₁₆			
0391₁₆			
0392₁₆			
0393₁₆			
0394₁₆	A/D control register 2	ADCON2	169
0395₁₆			
0396₁₆	A/D control register 0	ADCON0	168
0397₁₆	A/D control register 1	ADCON1	
0398₁₆	D/A register 0	DA0	177
0399₁₆			
039A₁₆	D/A register 1	DA1	177
039B₁₆			
039C₁₆	D/A control register	DACON	177
039D₁₆			
039E₁₆			
039F₁₆			
03A0₁₆			
03A1₁₆			
03A2₁₆			
03A3₁₆			
03A4₁₆			
03A5₁₆			
03A6₁₆			
03A7₁₆			
03A8₁₆			
03A9₁₆			
03AA₁₆			
03AB₁₆			
03AC₁₆			
03AD₁₆			
03AE₁₆			
03AF₁₆	Function select register C	PSC	203
03B0₁₆	Function select register A0	PS0	200
03B1₁₆	Function select register A1	PS1	
03B2₁₆	Function select register B0	PSL0	202
03B3₁₆	Function select register B1	PSL1	
03B4₁₆	Function select register A2	PS2	201
03B5₁₆	Function select register A3	PS3	
03B6₁₆	Function select register B2	PSL2	202
03B7₁₆	Function select register B3	PSL3	203
03B8₁₆			
03B9₁₆			
03BA₁₆			
03BB₁₆			
03BC₁₆			
03BD₁₆			
03BE₁₆			
03BF₁₆			

Blank spaces are reserved. No access is allowed.

Quick Reference by Address

<100-pin version>

Address	Register	Symbol	page
03C0₁₆	Port P6	P6	197
03C1₁₆	Port P7	P7	
03C2₁₆	Port P6 direction register	PD6	195
03C3₁₆	Port P7 direction register	PD7	
03C4₁₆	Port P8	P8	197
03C5₁₆	Port P9	P9	
03C6₁₆	Port P8 direction register	PD8	195
03C7₁₆	Port P9 direction register	PD9	
03C8₁₆	Port P10	P10	197
03C9₁₆			
03CA₁₆	Port P10 direction register	PD10	195
03CB₁₆			
03CC₁₆			
03CD₁₆			
03CE₁₆			
03CF₁₆			
03D0₁₆			
03D1₁₆			
03D2₁₆			
03D3₁₆			
03D4₁₆			
03D5₁₆			
03D6₁₆			
03D7₁₆			
03D8₁₆			
03D9₁₆			
03DA₁₆	Pull-up control register 2	PUR2	204
03DB₁₆	Pull-up control register 3	PUR3	205
03DC₁₆			
03DD₁₆			
03DE₁₆			
03DF₁₆			
03E0₁₆	Port P0	P0	197
03E1₁₆	Port P1	P1	
03E2₁₆	Port P0 direction register	PD0	195
03E3₁₆	Port P1 direction register	PD1	
03E4₁₆	Port P2	P2	197
03E5₁₆	Port P3	P3	
03E6₁₆	Port P2 direction register	PD2	195
03E7₁₆	Port P3 direction register	PD3	
03E8₁₆	Port P4	P4	197
03E9₁₆	Port P5	P5	
03EA₁₆	Port P4 direction register	PD4	195
03EB₁₆	Port P5 direction register	PD5	
03EC₁₆			
03ED₁₆			
03EE₁₆			
03EF₁₆			
03F0₁₆	Pull-up control register 0	PUR0	204
03F1₁₆	Pull-up control register 1	PUR1	
03F2₁₆			
03F3₁₆			
≈			≈
03FC₁₆			
03FD₁₆			
03FE₁₆			
03FF₁₆	Port control register	PCR	206

<144-pin version>

Address	Register	Symbol	page
03C0₁₆	Port P6	P6	197
03C1₁₆	Port P7	P7	
03C2₁₆	Port P6 direction register	PD6	195
03C3₁₆	Port P7 direction register	PD7	
03C4₁₆	Port P8	P8	197
03C5₁₆	Port P9	P9	
03C6₁₆	Port P8 direction register	PD8	195
03C7₁₆	Port P9 direction register	PD9	
03C8₁₆	Port P10	P10	197
03C9₁₆	Port P11	P11	198
03CA₁₆	Port P10 direction register	PD10	195
03CB₁₆	Port P11 direction register	PD11	196
03CC₁₆	Port P12	P12	197
03CD₁₆	Port P13	P13	
03CE₁₆	Port P12 direction register	PD12	195
03CF₁₆	Port P13 direction register	PD13	
03D0₁₆	Port P14	P14	198
03D1₁₆	Port P15	P15	197
03D2₁₆	Port P14 direction register	PD14	196
03D3₁₆	Port P15 direction register	PD15	195
03D4₁₆			
03D5₁₆			
03D6₁₆			
03D7₁₆			
03D8₁₆			
03D9₁₆			
03DA₁₆	Pull-up control register 2	PUR2	204
03DB₁₆	Pull-up control register 3	PUR3	205
03DC₁₆	Pull-up control register 4	PUR4	
03DD₁₆			
03DE₁₆			
03DF₁₆			
03E0₁₆	Port P0	P0	197
03E1₁₆	Port P1	P1	
03E2₁₆	Port P0 direction register	PD0	195
03E3₁₆	Port P1 direction register	PD1	
03E4₁₆	Port P2 (P2)	P2	197
03E5₁₆	Port P3 (P3)	P3	
03E6₁₆	Port P2 direction register	PD2	195
03E7₁₆	Port P3 direction register	PD3	
03E8₁₆	Port P4	P4	197
03E9₁₆	Port P5	P5	
03EA₁₆	Port P4 direction register	PD4	195
03EB₁₆	Port P5 direction register	PD5	
03EC₁₆			
03ED₁₆			
03EE₁₆			
03EF₁₆			
03F0₁₆	Pull-up control register 0	PUR0	204
03F1₁₆	Pull-up control register 1	PUR1	
03F2₁₆			
03F3₁₆			
≈			≈
03FC₁₆			
03FD₁₆			
03FE₁₆			
03FF₁₆	Port control register	PCR	206

Blank spaces are reserved. No access is allowed.

1. Overview

The M16C/80 group of single-chip microcomputers are built using the high-performance silicon gate CMOS process using a M16C/80 Series CPU core and are packaged in a 100-pin and 144-pin plastic molded QFP. The peripheral functions of 100-pin and 144-pin are common. These single-chip microcomputers operate using sophisticated instructions featuring a high level of instruction efficiency. With 16M bytes of address space, they are capable of executing instructions at high speed. They also feature a built-in multiplier and DMAC, making them ideal for controlling office, communications, industrial equipment, and other high-speed processing applications.

1.1 Features

- Memory capacity ..... ROM (See ROM expansion figure.)
  RAM 10 to 24 Kbytes
- Shortest instruction execution time ..... 50ns (f(X_{IN})=20MHz)
- Supply voltage ..... 4.2 to 5.5V (f(X_{IN})=20MHz)
  Mask ROM, external ROM and flash memory versions
  2.7 to 5.5V (f(X_{IN})=10MHz)
  Mask ROM, external ROM and flash memory versions
- Low power consumption 45mA (M30800MC-XXXFP)
  (f(X_{IN}) = 20MHz without software wait,Vcc=5V)
- Interrupts ..... 29 internal and 8 external interrupt sources, 5 software interrupt sources; 7 levels (including key input interrupt)
- Multifunction 16-bit timer ..... 5 output timers + 6 input timers
- Serial I/O ..... 5 channels for UART or clock synchronous
- DMAC ..... 4 channels (trigger: 31 sources)
- DRAMC ..... Used for EDO, FP, CAS before RAS refresh, self-refresh
- A/D converter ..... 10 bits X 8 channels (Expandable up to 10 channels)
- D/A converter ..... 8 bits X 2 channels
- CRC calculation circuit ..... 1 circuit
- XY converter ..... 1 circuit
- Watchdog timer ..... 1 line
- Programmable I/O ..... 87 lines:100-pin version, 123 lines:144-pin version
- Input port ..... 1 line ($P8_5$ shared with $\overline{NMI}$ pin)
- Memory expansion ..... Available (16M bytes)
- Chip select output ..... 4 lines
- Clock generating circuit ..... 2 built-in clock generation circuits
  (built-in feedback resistance, and external ceramic or quartz oscillator)

1.2 Applications

Audio, cameras, office equipment, communications equipment, portable equipment, etc.

1.3 Pin Configuration

Figures 1.1 and 1.2 show the pin configuration (top view) for 100-pin and Figure 1.3 shows the pin configuration (top view) for 144-pin.

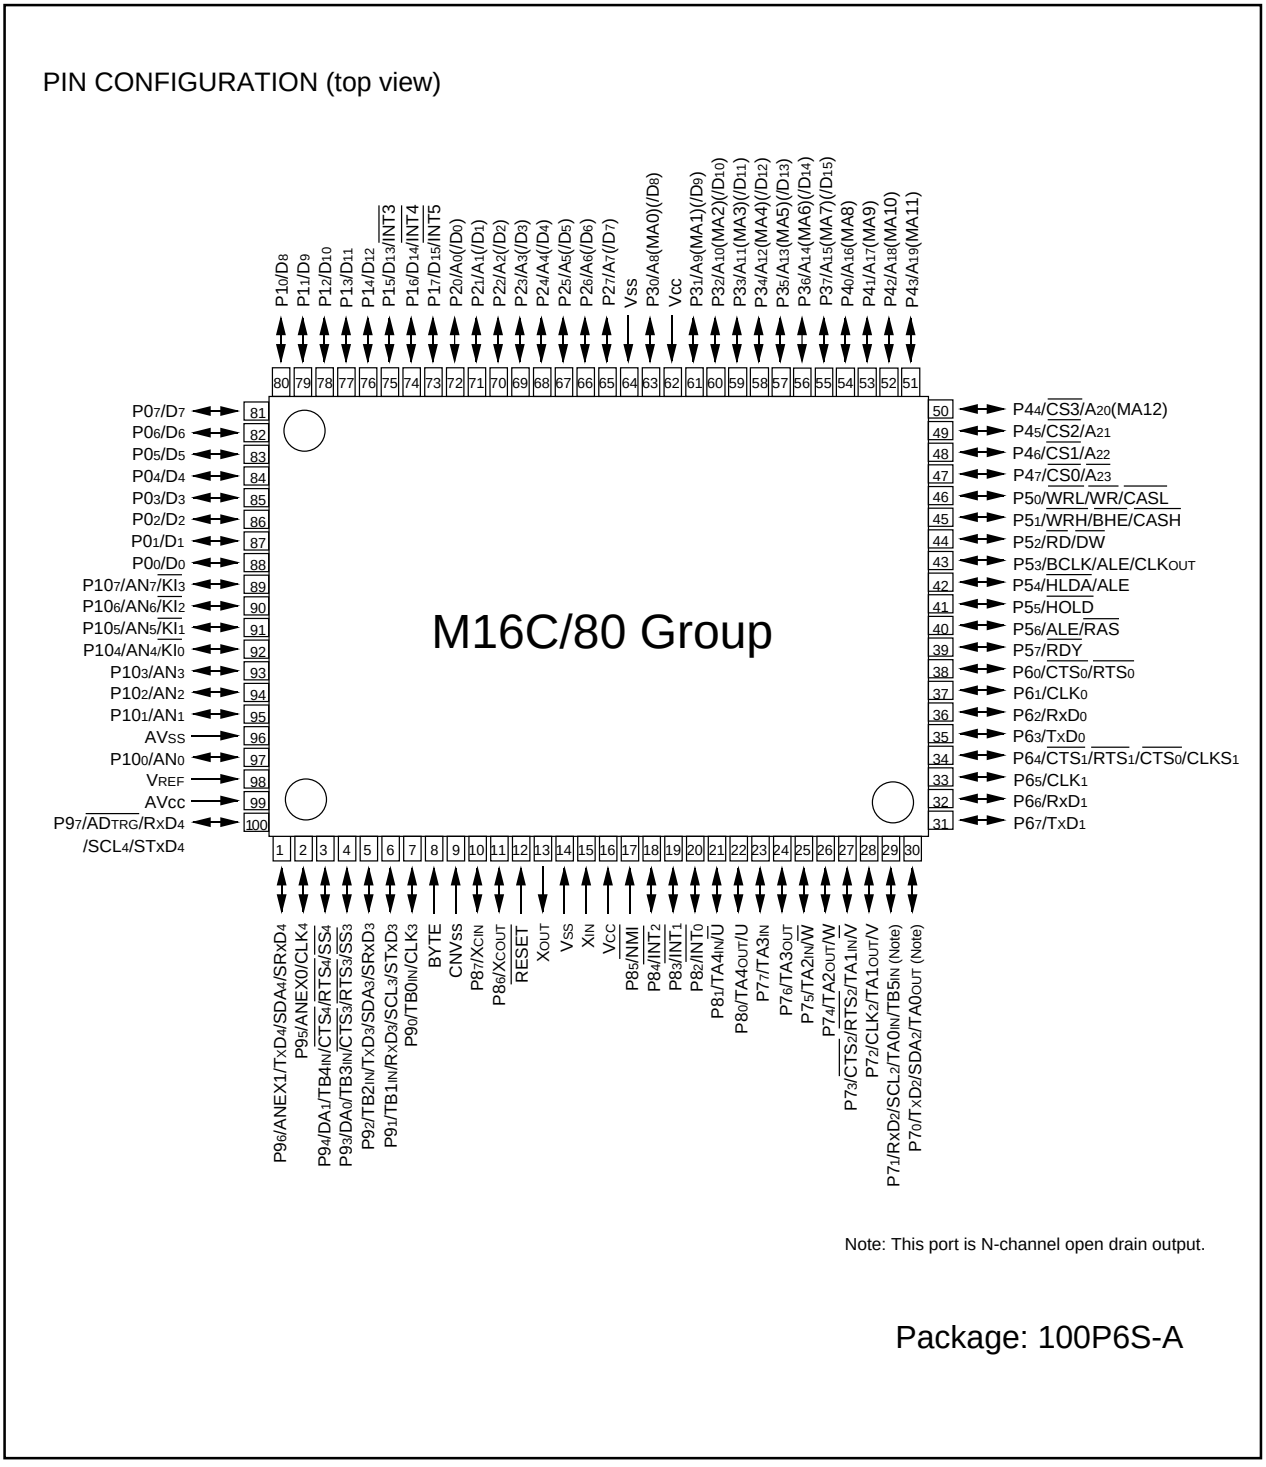

Figure 1.1 Pin configuration for 100-pin version (top view) (1)

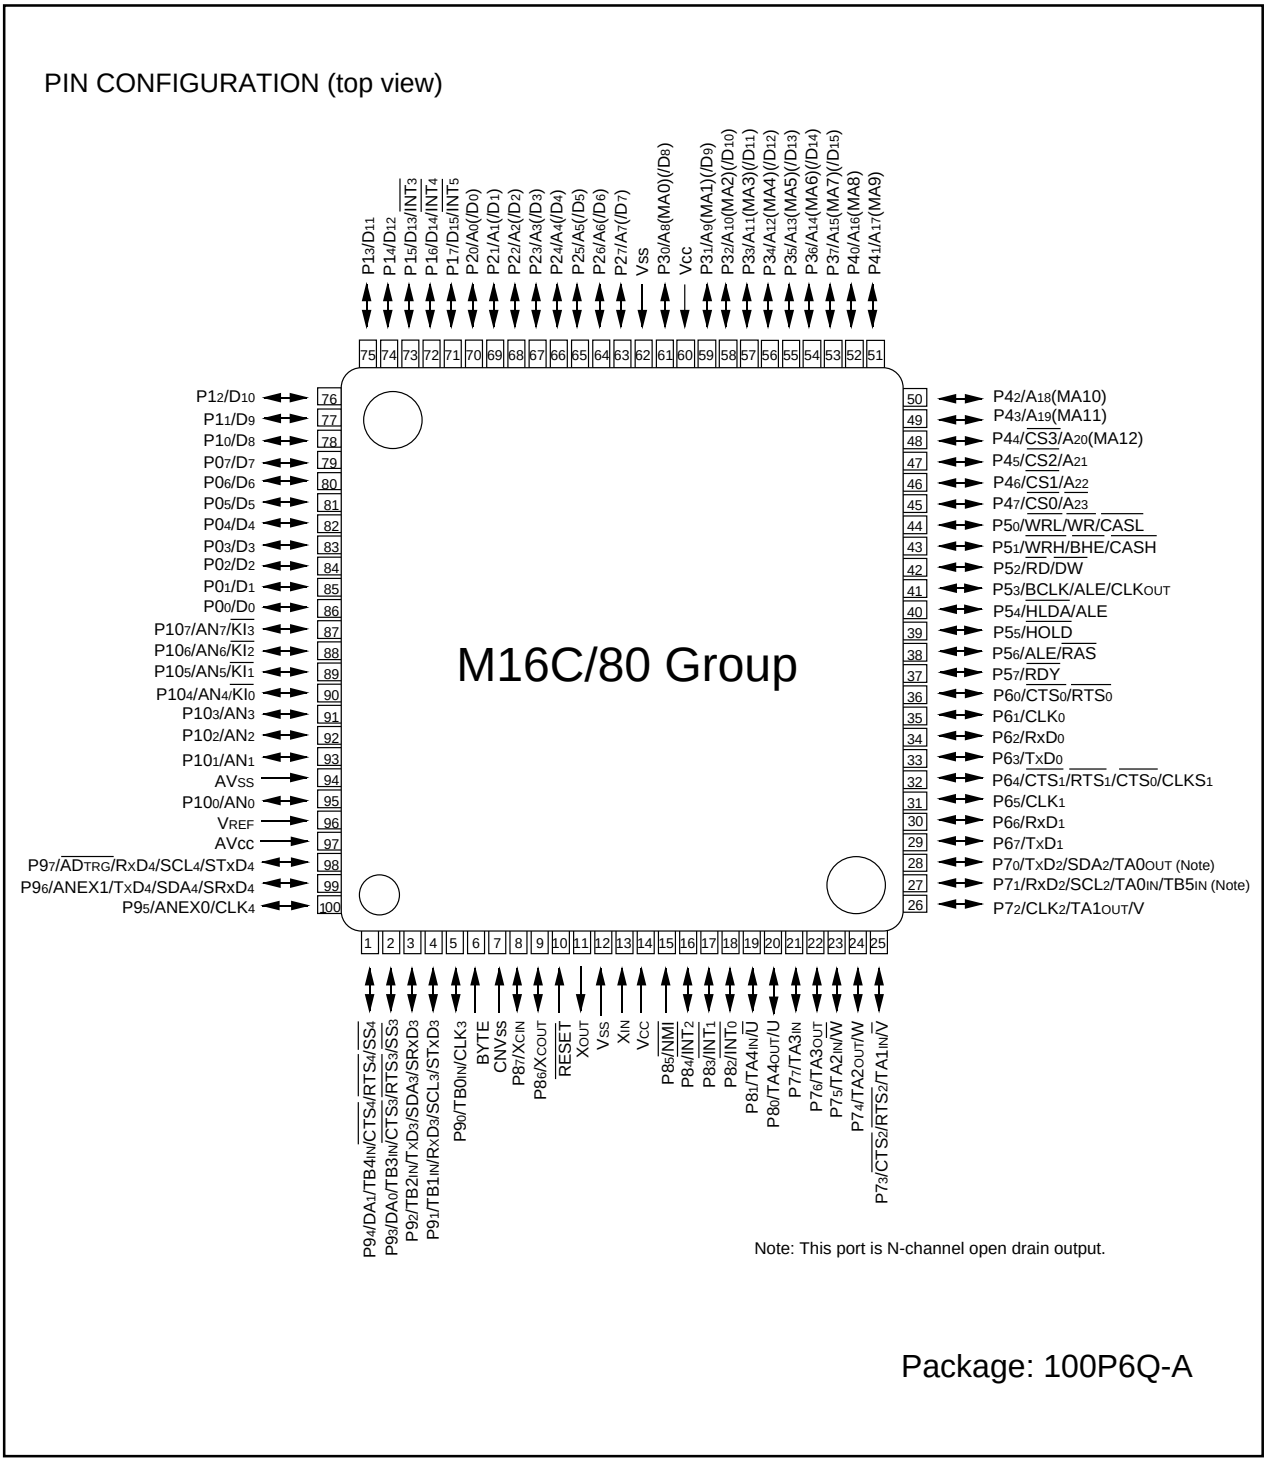

Figure 1.2 Pin configuration for 100-pin version (top view) (2)

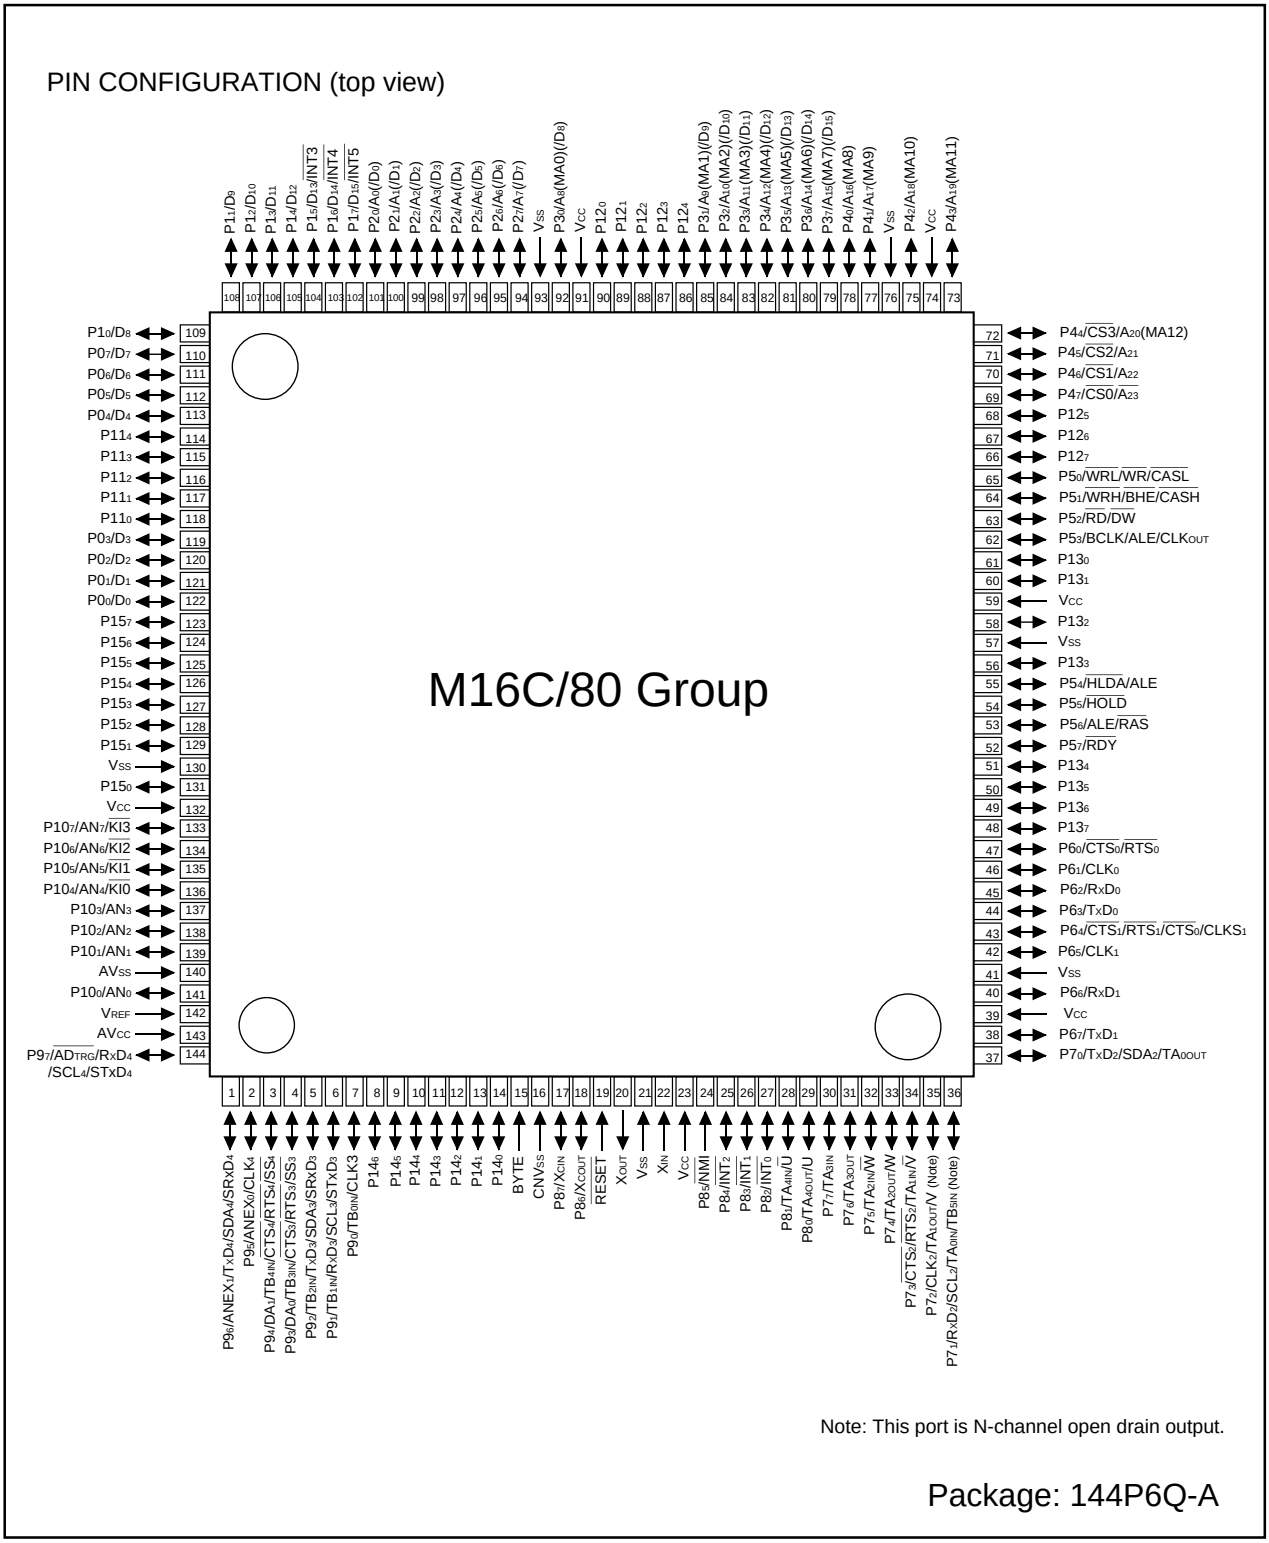

Figure 1.3 Pin configuration for 144-pin version (top view)

1.4 Block Diagram

Figure 1.4 is a block diagram of the M16C/80 group.

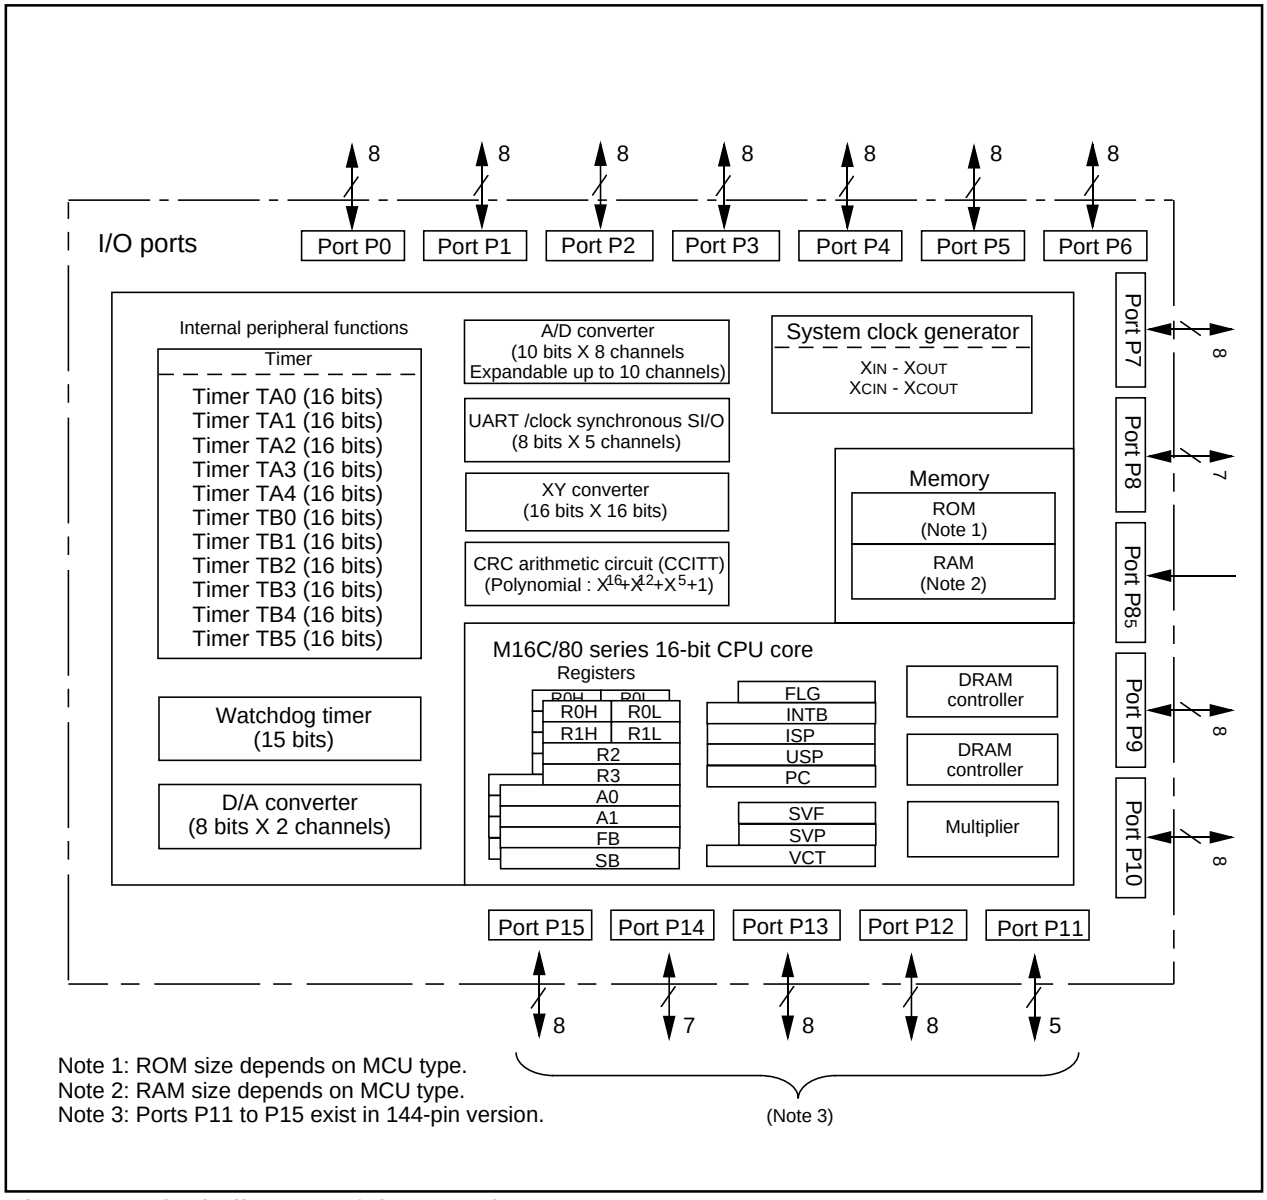

Figure 1.4 Block diagram of the M16C/80 group

1.5 Performance Outline

Table 1.1 is a performance outline of M16C/80 group.

Table 1.1 Performance outline of M16C/80 group

Item		Performance
Number of basic instructions		106 instructions
Shortest instruction execution time		50ns(f(XIN)=20MHz)
Memory capacity	ROM	See ROM expansion figure.
	RAM	10 to 24 K bytes
I/O port	100-pin	P0 to P10 (except P85) 8-bit x 10, 7-bit x 1
	144-pin	P0 to P15 (except P85) 8-bit x 13, 7-bit x 2, 5-bit x 1
Input port	P85	1 bit x 1
Multifunction timer	TA0, TA1, TA2, TA3,TA4 TB0, TB1, TB2, TB3, TB4, TB5	16 bits x 5 16 bits x 6
Serial I/O	UART0, UART1, UART2, UART3, UART4	(UART or clock synchronous) x 5
A/D converter		10 bits x (8 + 2) channels
D/A converter		8 bits x 2
DMAC		4 channels
DRAM controller		CAS before RAS refresh, self-refresh, EDO, FP
CRC calculation circuit		CRC-CCITT
XY converter		16 bits X 16 bits
Watchdog timer		15 bits x 1 (with prescaler)
Interrupt		29 internal and 8 external sources, 5 software sources, 7 levels
Clock generating circuit		2 built-in clock generation circuits (built-in feedback resistance, and external ceramic or quartz oscillator)
Supply voltage		4.2 to 5.5V (f(XIN)=20MHz) Mask ROM, external ROM and flash memory versions 2.7 to 5.5V (f(XIN)=10MHz) Mask ROM, external ROM and flash memory versions
Power consumption		45mA (f(XIN) = 20MHz without software wait,Vcc=5V) Mask ROM 128 Kbytes version
I/O characteristics	I/O withstand voltage	5V
	Output current	5mA
Memory expansion		Available (up to 16M bytes)
Operating ambient temperature		–40 to 85°C
Device configuration		CMOS high performance silicon gate
Package		100-pin and 144-pin plastic mold QFP

Renesas plans to release the following products in the M16C/80 group:

(1) Support for mask ROM version, external ROM version and flash memory version

(2) ROM capacity

(3) Package

100P6S-A : Plastic molded QFP (mask ROM version and flash memory version)

100P6Q-A : Plastic molded QFP (mask ROM version and flash memory version)

144P6Q-A : Plastic molded QFP (mask ROM version and flash memory version)

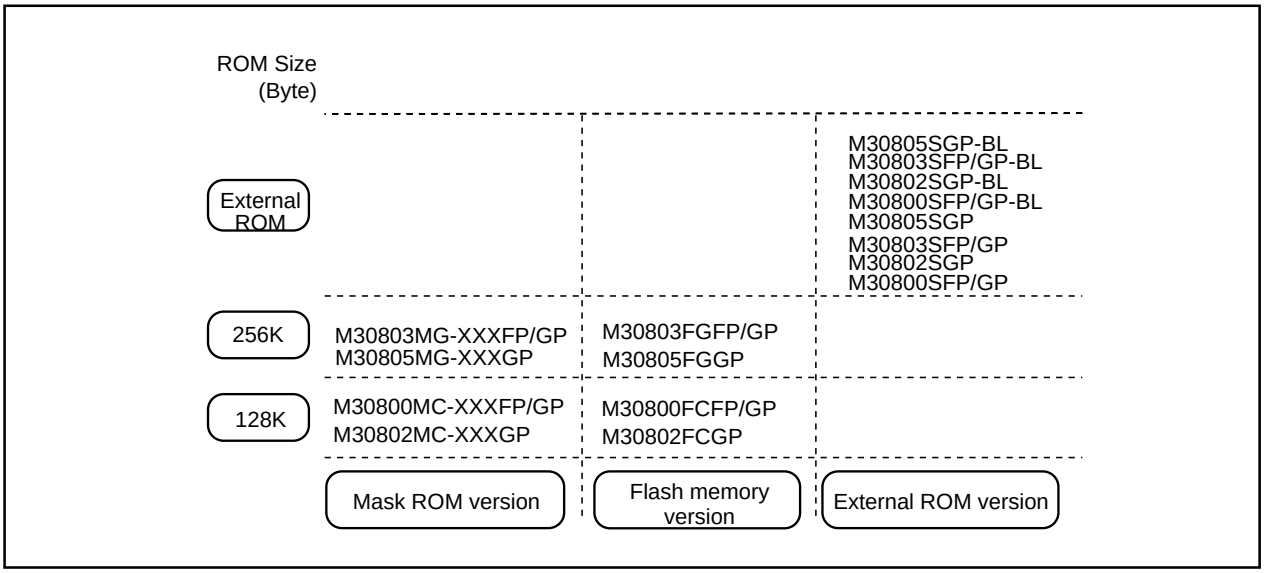

Figure 1.5 ROM expansion

The M16C/80 group products currently supported are listed in Table 1.2.

Table 1.2 M16C/80 group

Type No	ROM capacity	RAM capacity	Package type	Remarks
M30800MC-XXXFP	128K bytes	10K bytes	100P6S-A	Mask ROM version
M30800MC-XXXGP			100P6Q-A	
M30802MC-XXXGP			144P6Q-A	
M30803MG-XXXFP	256K bytes	20K bytes	100P6S-A	
M30803MG-XXXGP			100P6Q-A	
M30805MG-XXXGP			144P6Q-A	
M30800FCFP	128K bytes	10K bytes	100P6S-A	Flash memory version
M30800FCGP			100P6Q-A	
M30802FCGP			144P6Q-A	
M30803FGFP	256K bytes	20K bytes	100P6S-A	
M30803FGGP			100P6Q-A	
M30805FGGP			144P6Q-A	
M30800SFP	———	10K bytes	100P6S-A	External ROM version
M30800SGP			100P6Q-A	
M30802SGP			144P6Q-A	
M30803SFP	———	24K bytes	100P6S-A	
M30803SGP			100P6Q-A	
M30805SGP			144P6Q-A	
M30800SFP-BL	———	10K bytes	100P6S-A	External ROM version with built-in boot loader
M30800SGP-BL			100P6Q-A	
M30802SGP-BL			144P6Q-A	
M30803SFP-BL	———	24K bytes	100P6S-A	
M30803SGP-BL			100P6Q-A	
M30805SGP-BL			144P6Q-A	

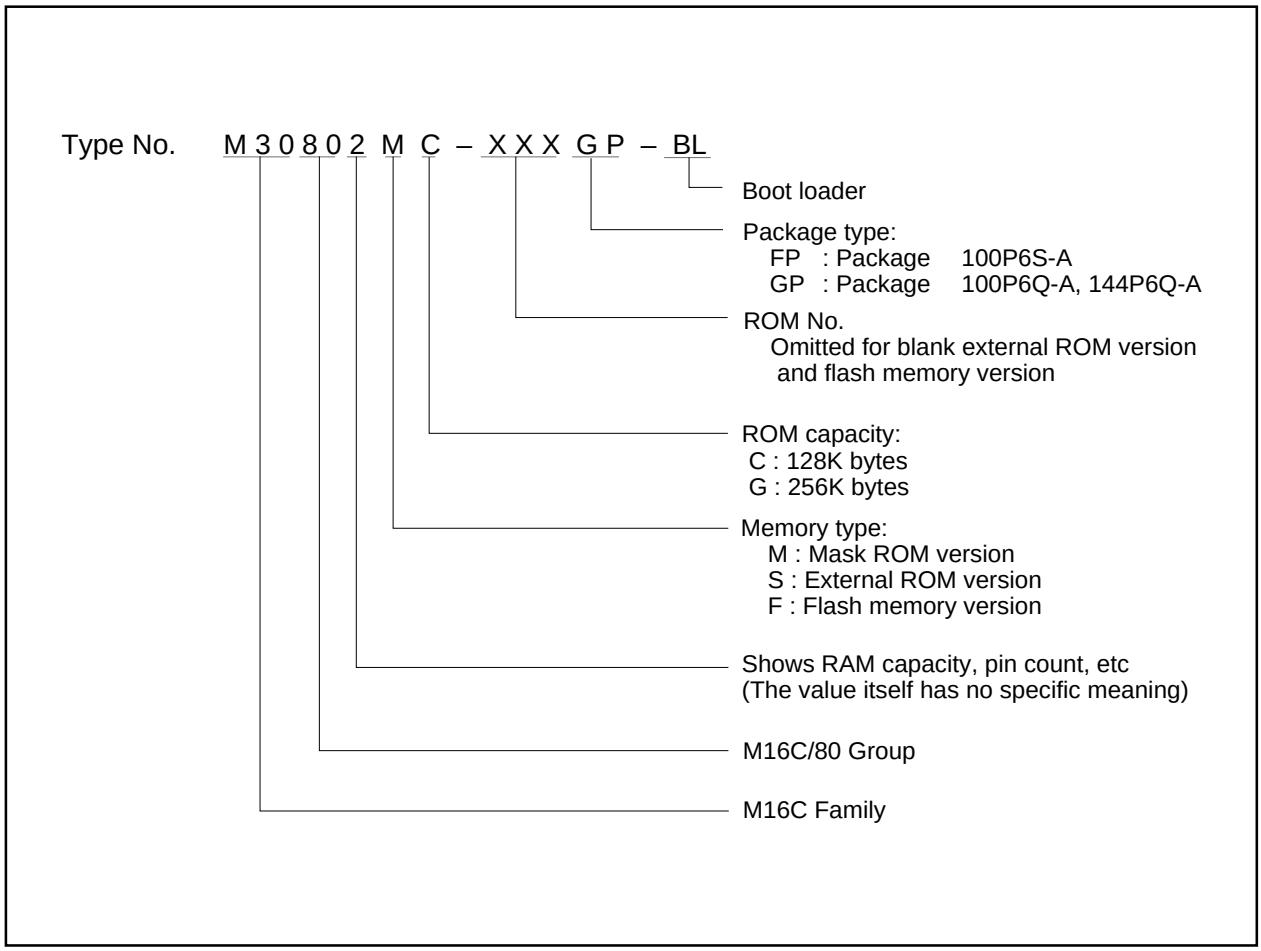

Figure 1.6 Product Numbering System

1.6 Pin Description (1)

Pin name	Signal name	I/O type	Function
V_{CC}, V_{SS}	Power supply input		Supply 4.2 (2.7) to 5.5 V to the V_{CC} pin. Supply 0 V to the V_{SS} pin.
CNV_{SS}	CNV_{SS}	I	This pin switches between processor modes. Connect it to the V_{SS} when operating in single-chip or memory expansion mode after reset. Connect it to the V_{CC} when in microprocessor mode after reset.
$\overline{RESET}$	Reset input	I	An “L” on this input resets the microcomputer.
X_{IN} X_{OUT}	Clock input Clock output	I O	These pins are provided for the main clock generating circuit. Connect a ceramic resonator or crystal between the X_{IN} and the X_{OUT} pins. To use an externally derived clock, input it to the X_{IN} pin and leave the X_{OUT} pin open.
BYTE	External data bus width select input	I	This pin selects the width of an data bus in the external area 3. A 16--bit width is selected when this input is “L”; an 8-bit width is selected when this input is “H”. This input must be fixed to either “H” or “L”. When not using the external bus, connect this pin to V_{SS}.
AV_{CC}	Analog power supply input		This pin is a power supply input for the A/D converter. Connect this pin to V_{CC}.
AV_{SS}	Analog power supply input		This pin is a power supply input for the A/D converter. Connect this pin to V_{SS}.
V_{REF}	Reference voltage input	I	This pin is a reference voltage input for the A/D converter.
$P0_0$ to $P0_7$	I/O port P0	I/O	This is an 8-bit CMOS I/O port. It has an input/output port direction register that allows the user to set each pin for input or output individually. When set for input in single chip mode, the user can specify in units of four bits via software whether or not they are tied to a pull-up resistance. In memory expansion and microprocessor mode, an built-in pull-up resistance cannot be used. However, it is possible to select pull-up resistance presence to the usable port as I/O port by setting.
D_0 to D_7		I/O	When set as a separate bus, these pins input and output data (D_0–D_7).
$P1_0$ to $P1_7$	I/O port P1	I/O	This is an 8-bit I/O port equivalent to P0. $P1_5$ to $P1_7$ also function as external interrupt pins as selected by software.
D_8 to D_{15}		I/O	When set as a separate bus, these pins input and output data (D_8–D_{15}).
$P2_0$ to $P2_7$	I/O port P2	I/O	This is an 8-bit I/O port equivalent to P0.
A_0 to A_7		O	These pins output 8 low-order address bits (A_0–A_7).
A_0/D_0 to A_7/D_7		I/O	If a multiplexed bus is set, these pins input and output data (D_0–D_7) and output 8 low-order address bits (A_0–A_7) separated in time by multiplexing.
$P3_0$ to $P3_7$	I/O port P3	I/O	This is an 8-bit I/O port equivalent to P0.
A_8 to A_{15}		O	These pins output 8 middle-order address bits (A_8–A_{15}).
A_8/D_8 to A_{15}/D_{15}		I/O	If the external bus is set as a 16-bit wide multiplexed bus, these pins input and output data (D_8–D_{15}) and output 8 middle-order address bits (A_8–A_{15}) separated in time by multiplexing.
MA0 to MA7		O	If accessing to DRAM area, these pins output row address and column address separated in time by multiplexing.

Pin Description (2)

Pin name	Signal name	I/O type	Function
P40 to P47	I/O port P4	I/O	This is an 8-bit I/O port equivalent to P0.
A16 to A22, A23		O	These pins output 8 high-order address bits (A16–A22, A23). Highest address bit (A23) outputs inversely.
CS0 to CS3		O	These pins output CS0–CS3 signals. CS0–CS3 are chip select signals used to specify an access space.
MA8 to MA12		O	If accessing to DRAM area, these pins output row address and column address separated in time by multiplexing.
P50 to P57	I/O port P5	I/O	This is an 8-bit I/O port equivalent to P0. P53 in this port outputs a divide-by-8 or divide-by-32 clock of XIN or a clock of the same frequency as XCIN as selected by software.
WRL / WR, WRH / BHE, RD, BCLK, HLDA, HOLD, ALE, RDY		O O O O O I O I	Output WRL, WRH (WR and BHE), RD, BCLK, HLDA, and ALE signals. WRL and WRH, and BHE and WR can be switched using software control. ■ WRL, WRH, and RD selected With a 16-bit external data bus, data is written to even addresses when the WRL signal is “L” and to the odd addresses when the WRH signal is “L”. Data is read when RD is “L”. ■ WR, BHE, and RD selected Data is written when WR is “L”. Data is read when RD is “L”. Odd addresses are accessed when BHE is “L”. Use this mode when using an 8-bit external data bus. While the input level at the HOLD pin is “L”, the microcomputer is placed in the hold state. While in the hold state, HLDA outputs an “L” level. ALE is used to latch the address. While the input level of the RDY pin is “L”, the bus of microcomputer is in the wait state.
DW, CASL, CASH, RAS		O O O O	When accessing to DRAM area while DW signal is “L”, write to DRAM. CASL and CASH show timing when latching to line address. When CASL accesses to even address, and CASH to odd, these two pins become “L”. RAS signal shows timing when latching to row address.
P60 to P67	I/O port P6	I/O	This is an 8-bit I/O port equivalent to P0. When set for input in single chip mode, microprocessor mode and memory expansion mode the user can specify in units of four bits via software whether or not they are tied to a pull-up resistance. Pins in this port also function as UART0 and UART1 I/O pins as selected by software.
P70 to P77	I/O port P7	I/O	This is an 8-bit I/O port equivalent to P6 (P70 and P71 are N-channel open drain output). Pins in this port also function as timer A0–A3, timer B5 or UART2 I/O pins as selected by software.
P80 to P84, P86, P87, P85	I/O port P8 I/O port P85	I/O I/O I/O I	P80 to P84, P86, and P87 are I/O ports with the same functions as P6. Using software, they can be made to function as the I/O pins for timer A4 and the input pins for external interrupts. P86 and P87 can be set using software to function as the I/O pins for a sub clock generation circuit. In this case, connect a quartz oscillator between P86 (XCOUT pin) and P87 (XCIN pin). P85 is an input-only port that also functions for NMI. The NMI interrupt is generated when the input at this pin changes from “H” to “L”. The NMI function cannot be canceled using software. The pull-up cannot be set for this pin.
P90 to P97	I/O port P9	I/O	This is an 8-bit I/O port equivalent to P6. Pins in this port also function as UART3 and UART4 I/O pins, Timer B0–B4 input pins, D/A converter output pins, A/D converter extended input pins, or A/D trigger input pins as selected by software.
P100 to P107	I/O port P10	I/O	This is an 8-bit I/O port equivalent to P6. Pins in this port also function as A/D converter input pins. Furthermore, P104–P107 also function as input pins for the key input interrupt function.

Pin Description (3)

Pin name	Signal name	I/O type	Function
$P11_0$ to $P11_4$ (Note)	I/O port P11	II/O	This is an 5-bit I/O port equivalent to P6.
$P12_0$ to $P12_7$ (Note)	I/O port P12	II/O	This is an 8-bit I/O port equivalent to P6.
$P13_0$ to $P13_7$ (Note)	I/O port P13	II/O	This is an 8-bit I/O port equivalent to P6.
$P14_0$ to $P14_6$ (Note)	I/O port P14	II/O	This is an 7-bit I/O port equivalent to P6.
$P15_0$ to $P15_7$ (Note)	I/O port P15	II/O	This is an 8-bit I/O port equivalent to P6.

Note : Port P11 to P15 exist in 144-pin version.

Operation of Functional Blocks

The M16C/80 group accommodates certain units in a single chip. These units include ROM and RAM to store instructions and data and the central processing unit (CPU) to execute arithmetic/logic operations. Also included are peripheral units such as timers, serial I/O, D/A converter, DMAC, CRC calculation circuit, A/D converter, DRAM controller and I/O ports.

The following explains each unit.

2. Memory

Figure 2.1 is a memory map of the M16C/80 group. The address space extends the 16 Mbytes from address 000000$_{16}$ to FFFFFF$_{16}$. From FFFFFF$_{16}$ down is ROM. For example, in the M30800MC-XXXFP, there is 128K bytes of internal ROM from FE0000$_{16}$ to FFFFFF$_{16}$. The vector table for fixed interrupts such as the reset and $\overline{\text{NMI}}$ are mapped to FFFFDC$_{16}$ to FFFFFF$_{16}$. The starting address of the interrupt routine is stored here. The address of the vector table for timer interrupts, etc., can be set as desired using the internal register (INTB). See the section on interrupts for details.

From 000400$_{16}$ up is RAM. For example, in the M30800MC-XXXFP, 10 Kbytes of internal RAM is mapped to the space from 000400$_{16}$ to 002BFF$_{16}$. In addition to storing data, the RAM also stores the stack used when calling subroutines and when interrupts are generated.

The SFR area is mapped to 000000$_{16}$ to 0003FF$_{16}$. This area accommodates the control registers for peripheral devices such as I/O ports, A/D converter, serial I/O, and timers, etc. Figures 5.1 to 5.4 are location of peripheral unit control registers. Any part of the SFR area that is not occupied is reserved and cannot be used for other purposes.

The special page vector table is mapped to FFFE00$_{16}$ to FFFFDB$_{16}$. If the starting addresses of subroutines or the destination addresses of jumps are stored here, subroutine call instructions and jump instructions can be used as 2-byte instructions, reducing the number of program steps.

In memory expansion mode and microprocessor mode, a part of the spaces are reserved and cannot be used. For example, in the M30800MC-XXXFP, the following spaces cannot be used.

- The space between 002C00$_{16}$ and 008000$_{16}$ (Memory expansion and microprocessor modes)
- The space between F00000$_{16}$ and FDFFFF$_{16}$ (Memory expansion mode)

<100-pin version>

Type No.	Address XXXXXX$_{16}$	Address YYYYYY$_{16}$
M30800MC/FC	002BFF$_{16}$	FE0000$_{16}$
M30803MG/FG	0053FF$_{16}$	FC0000$_{16}$
M30800S		
M30803S		

<144-pin version>

Type No.	Address XXXXXX$_{16}$	Address YYYYYY$_{16}$
M30802MC/FC	002BFF$_{16}$	FE0000$_{16}$
M30805MG/FG	0053FF$_{16}$	FC0000$_{16}$
M30802S	002BFF$_{16}$	———
M30805S	0063FF$_{16}$	———

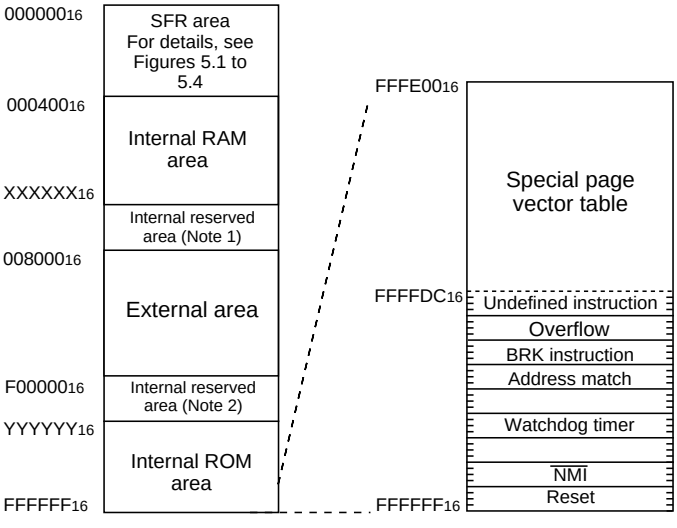

Note 1: During memory expansion and microprocessor modes, can not be used.
Note 2: In memory expansion mode, can not be used.

Figure 2.1 Memory map

3. Central Processing Unit (CPU)

The CPU has a total of 28 registers shown in Figure 3.1. Eight of these registers (R0, R1, R2, R3, A0, A1, SB and FB) come in two sets; therefore, these have two register banks.

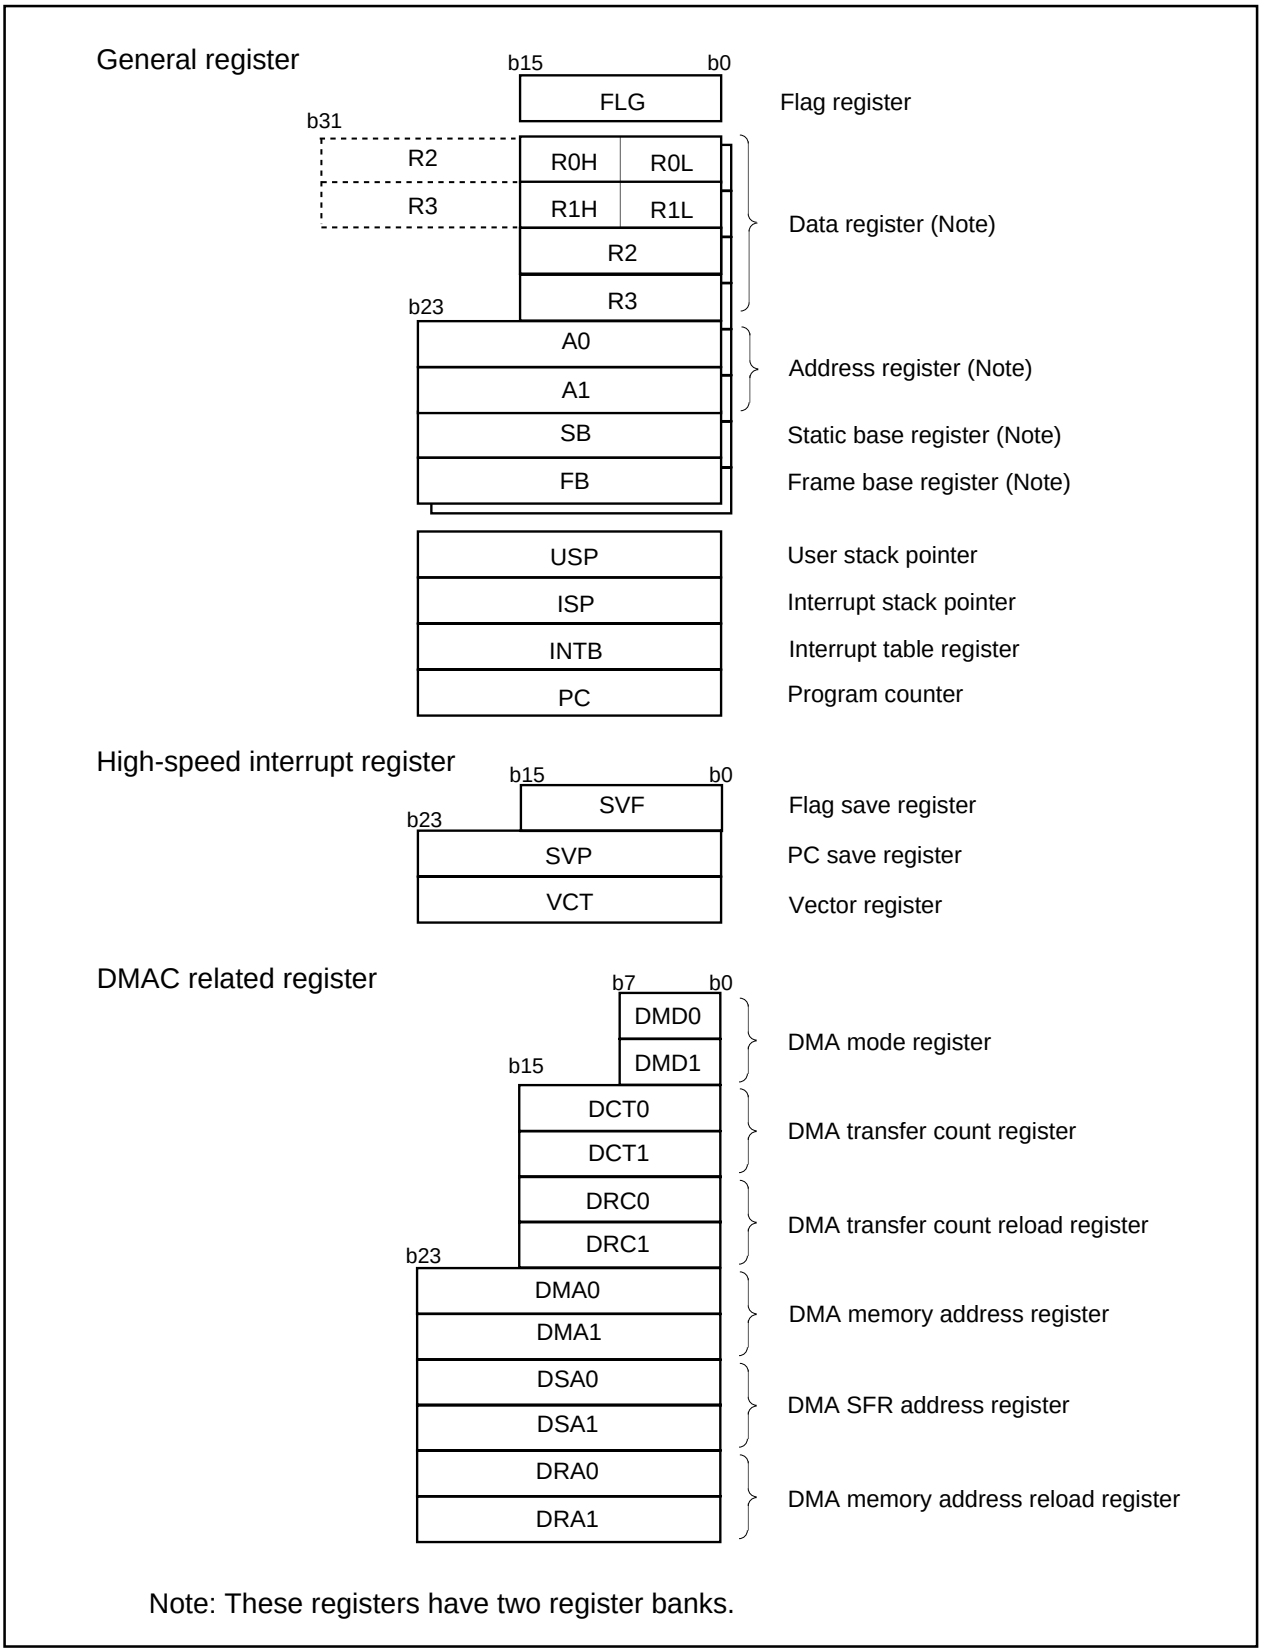

Figure 3.1 Central processing unit register

(1) Data registers (R0, R0H, R0L, R1, R1H, R1L, R2, R3, R2R0 and R3R1)

Data registers (R0, R1, R2, and R3) are configured with 16 bits, and are used primarily for transfer and arithmetic/logic operations.

Registers R0 and R1 each can be used as separate 8-bit data registers, high-order bits as (R0H/R1H), and low-order bits as (R0L/R1L). Registers R2 and R0, as well as R3 and R1 can use as 32-bit data registers (R2R0/R3R1).

(2) Address registers (A0 and A1)

Address registers (A0 and A1) are configured with 24 bits, and have functions equivalent to those of data registers. These registers can also be used for address register indirect addressing and address register relative addressing.

(3) Static base register (SB)

Static base register (SB) is configured with 24 bits, and is used for SB relative addressing.

(4) Frame base register (FB)

Frame base register (FB) is configured with 24 bits, and is used for FB relative addressing.

(5) Program counter (PC)

Program counter (PC) is configured with 24 bits, indicating the address of an instruction to be executed.

(6) Interrupt table register (INTB)

Interrupt table register (INTB) is configured with 24 bits, indicating the start address of an interrupt vector table.

(7) User stack pointer (USP), interrupt stack pointer (ISP)

Stack pointer comes in two types: user stack pointer (USP) and interrupt stack pointer (ISP), each configured with 24 bits.

Your desired type of stack pointer (USP or ISP) can be selected by a stack pointer select flag (U flag). This flag is located at the position of bit 7 in the flag register (FLG).

Set USP and ISP to an even number so that execution efficiency is increased.

(8) Save flag register (SVF)

This register consists of 16 bits and is used to save the flag register when a high-speed interrupt is generated.

(9) Save PC register (SVP)

This register consists of 24 bits and is used to save the program counter when a high-speed interrupt is generated.

(10) Vector register (VCT)

This register consists of 24 bits and is used to indicate the jump address when a high-speed interrupt is generated.

(11) DMA mode registers (DMD0/DMD1)

These registers consist of 8 bits and are used to set the transfer mode, etc. for DMA.

(12) DMA transfer count registers (DCT0/DCT1)

These registers consist of 16 bits and are used to set the number of DMA transfers performed.

(13) DMA transfer count reload registers (DRC0/DRC1)

These registers consist of 16 bits and are used to reload the DMA transfer count registers.

(14) DMA memory address registers (DMA0/DMA1)

These registers consist of 24 bits and are used to set a memory address at the source or destination of DMA transfer.

(15) DMA SFR address registers (DSA0/DSA1)

These registers consist of 24 bits and are used to set a fixed address at the source or destination of DMA transfer.

(16) DMA memory address reload registers (DRA0/DRA1)

These registers consist of 24 bits and are used to reload the DMA memory address registers.

(17) Flag register (FLG)

Flag register (FLG) is configured with 11 bits, each bit is used as a flag. Figure 3.2 shows the flag register (FLG). The following explains the function of each flag:

- **Bit 0: Carry flag (C flag)**
  This flag retains a carry, borrow, or shift-out bit that has occurred in the arithmetic/logic unit.

- **Bit 1: Debug flag (D flag)**
  This flag enables a single-step interrupt.
  When this flag is "1", a single-step interrupt is generated after instruction execution. This flag is cleared to "0" when the interrupt is acknowledged.

- **Bit 2: Zero flag (Z flag)**
  This flag is set to "1" when an arithmetic operation resulted in 0; otherwise, cleared to "0".

- **Bit 3: Sign flag (S flag)**
  This flag is set to "1" when an arithmetic operation resulted in a negative value; otherwise, cleared to "0".

- **Bit 4: Register bank select flag (B flag)**
  This flag chooses a register bank. Register bank 0 is selected when this flag is "0" ; register bank 1 is selected when this flag is "1".

- **Bit 5: Overflow flag (O flag)**
  This flag is set to "1" when an arithmetic operation resulted in overflow; otherwise, cleared to "0".

- **Bit 6: Interrupt enable flag (I flag)**
  This flag enables a maskable interrupt.
  An interrupt is disabled when this flag is "0", and is enabled when this flag is "1". This flag is cleared to "0" when the interrupt is acknowledged.

- **Bit 7: Stack pointer select flag (U flag)**
  Interrupt stack pointer (ISP) is selected when this flag is "0" ; user stack pointer (USP) is selected when this flag is "1".
  This flag is cleared to "0" when a hardware interrupt is acknowledged or an INT instruction of software interrupt Nos. 0 to 31 is executed.

- **Bits 8 to 11: Reserved area**

- **Bits 12 to 14: Processor interrupt priority level (IPL)**
  Processor interrupt priority level (IPL) is configured with three bits, for specification of up to eight processor interrupt priority levels from level 0 to level 7.
  If a requested interrupt has priority greater than the processor interrupt priority level (IPL), the interrupt is enabled.

- **Bit 15: Reserved area**

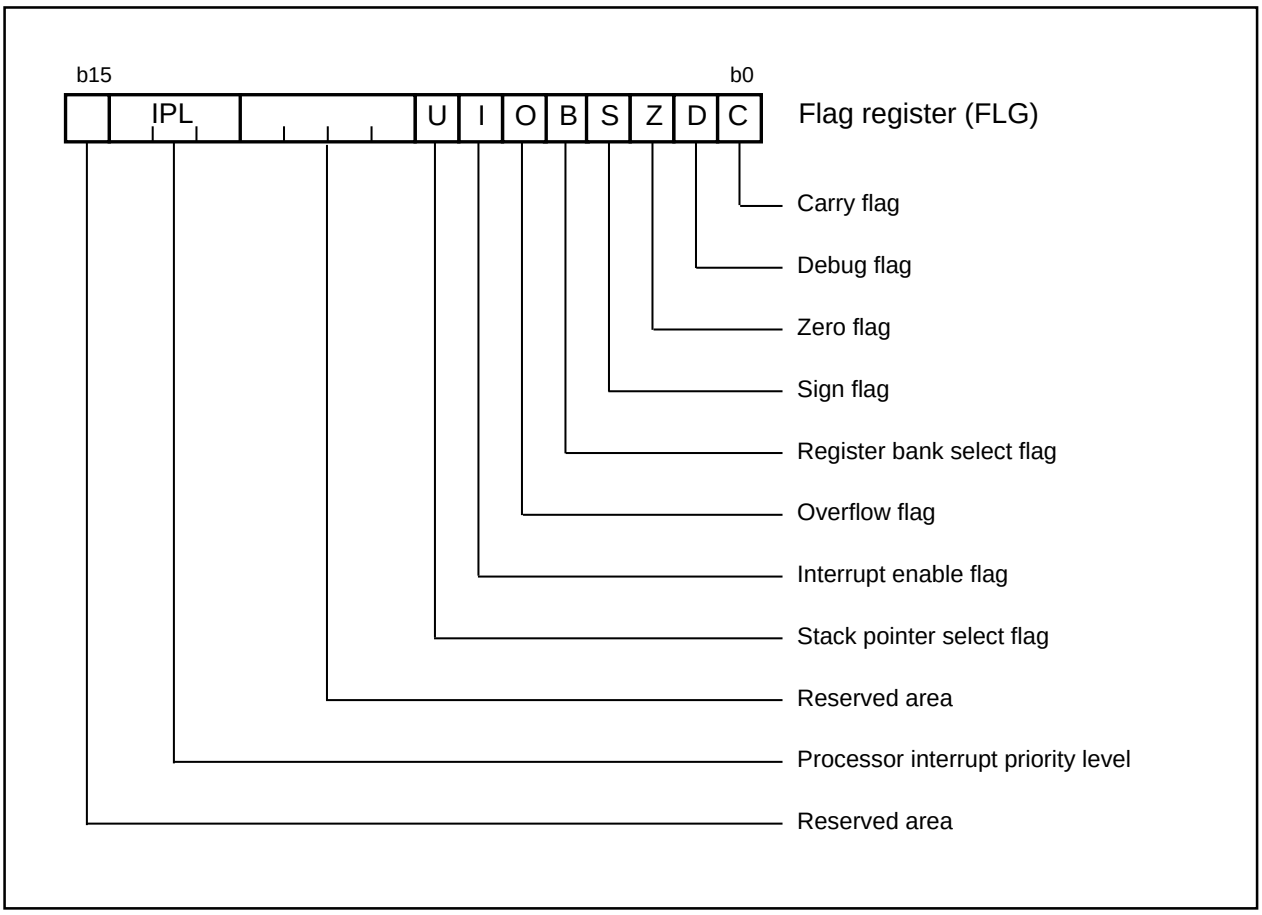

Figure 3.2 Flag register (FLG)

4. Reset

There are two kinds of resets; hardware and software. In both cases, operation is the same after the reset. (See “Software Reset” for details of software resets.) This section explains on hardware resets.

When the supply voltage is in the range where operation is guaranteed, a reset is effected by holding the reset pin level “L” (0.2VCC max.) for at least 20 cycles. When the reset pin level is then returned to the “H” level while main clock is stable, the reset status is cancelled and program execution resumes from the address in the reset vector table.

Figure 4.1 shows the example reset circuit. Figure 4.2 shows the reset sequence.

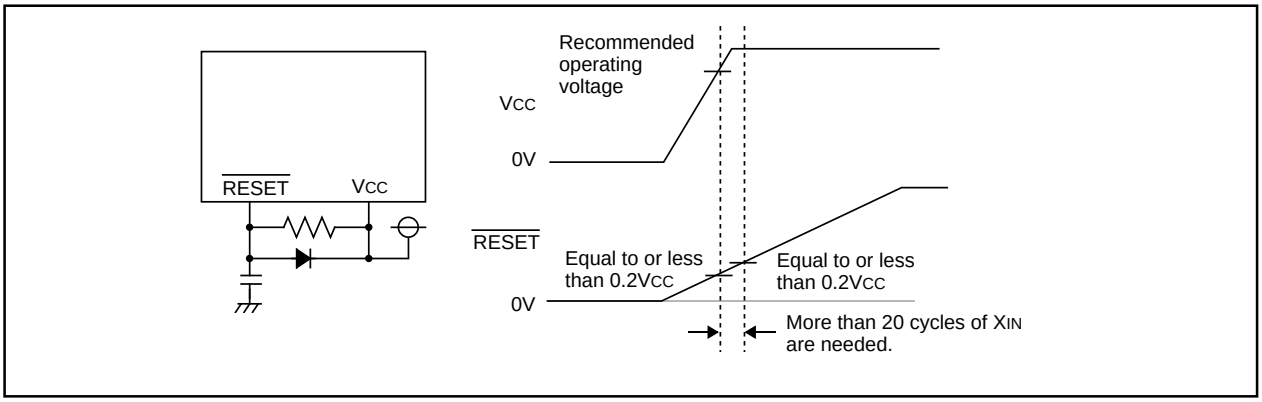

Figure 4.1 Example reset circuit

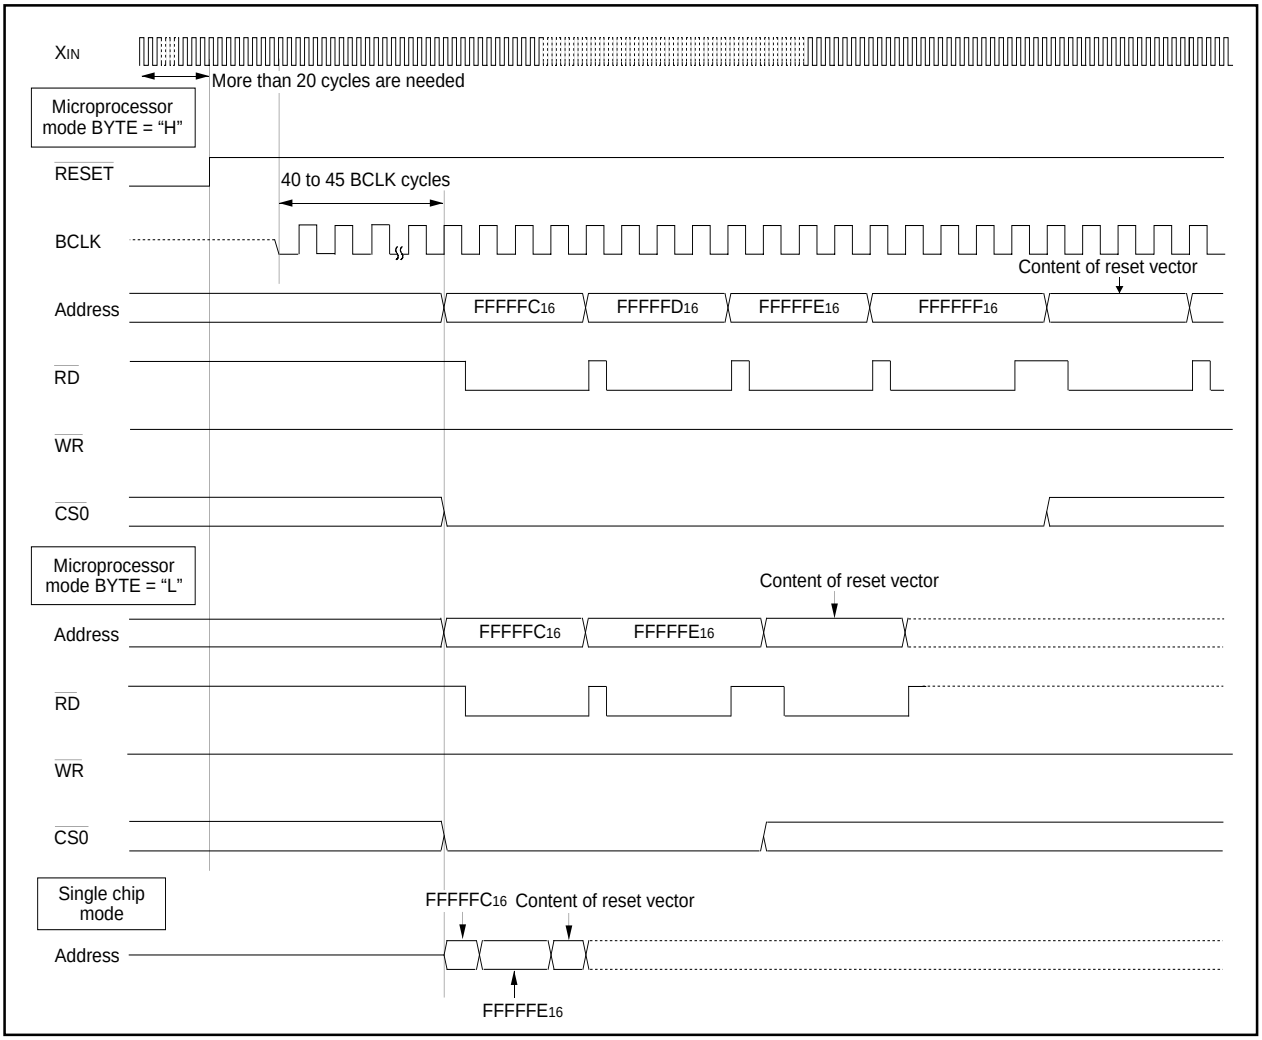

Figure 4.2 Reset sequence

Table 4.1 shows the statuses of the other pins while the $\overline{\text{RESET}}$ pin level is “L”. Figures 4.3 and 4.4 show the internal status of the microcomputer immediately after the reset is cancelled.

Table 4.1 Pin status when $\overline{\text{RESET}}$ pin level is “L”

Pin name	Status		
	CNVSS = VSS	CNVSS = VCC	
		BYTE = VSS	BYTE = VCC
P0	Input port (floating)	Data input (floating)	Data input (floating)
P1	Input port (floating)	Data input (floating)	Input port (floating)
P2, P3, P4	Input port (floating)	Address output (undefined)	Address output (undefined)
P5$_0$	Input port (floating)	$\overline{\text{WR}}$ output (“H” level is output)	$\overline{\text{WR}}$ output (“H” level is output)
P5$_1$	Input port (floating)	$\overline{\text{BHE}}$ output (undefined)	$\overline{\text{BHE}}$ output (undefined)
P5$_2$	Input port (floating)	$\overline{\text{RD}}$ output (“H” level is output)	$\overline{\text{RD}}$ output (“H” level is output)
P5$_3$	Input port (floating)	BCLK output	BCLK output
P5$_4$	Input port (floating)	$\overline{\text{HLDA}}$ output (The output value depends on the input to the $\overline{\text{HOLD}}$ pin)	$\overline{\text{HLDA}}$ output (The output value depends on the input to the $\overline{\text{HOLD}}$ pin)
P5$_5$	Input port (floating)	$\overline{\text{HOLD}}$ input (floating)	$\overline{\text{HOLD}}$ input (floating)
P5$_6$	Input port (floating)	$\overline{\text{RAS}}$ output	$\overline{\text{RAS}}$ output
P5$_7$	Input port (floating)	$\overline{\text{RDY}}$ input (floating)	$\overline{\text{RDY}}$ input (floating)
P6, P7, P8$_0$ to P8$_4$, P8$_6$, P8$_7$, P9, P10,	Input port (floating)	Input port (floating)	Input port (floating)
P11, P12, P13, P14, P15 (Note)	Input port (floating)	Input port (floating)	Input port (floating)

Note :Port P11 to P15 exist in 144-pin vrsion.

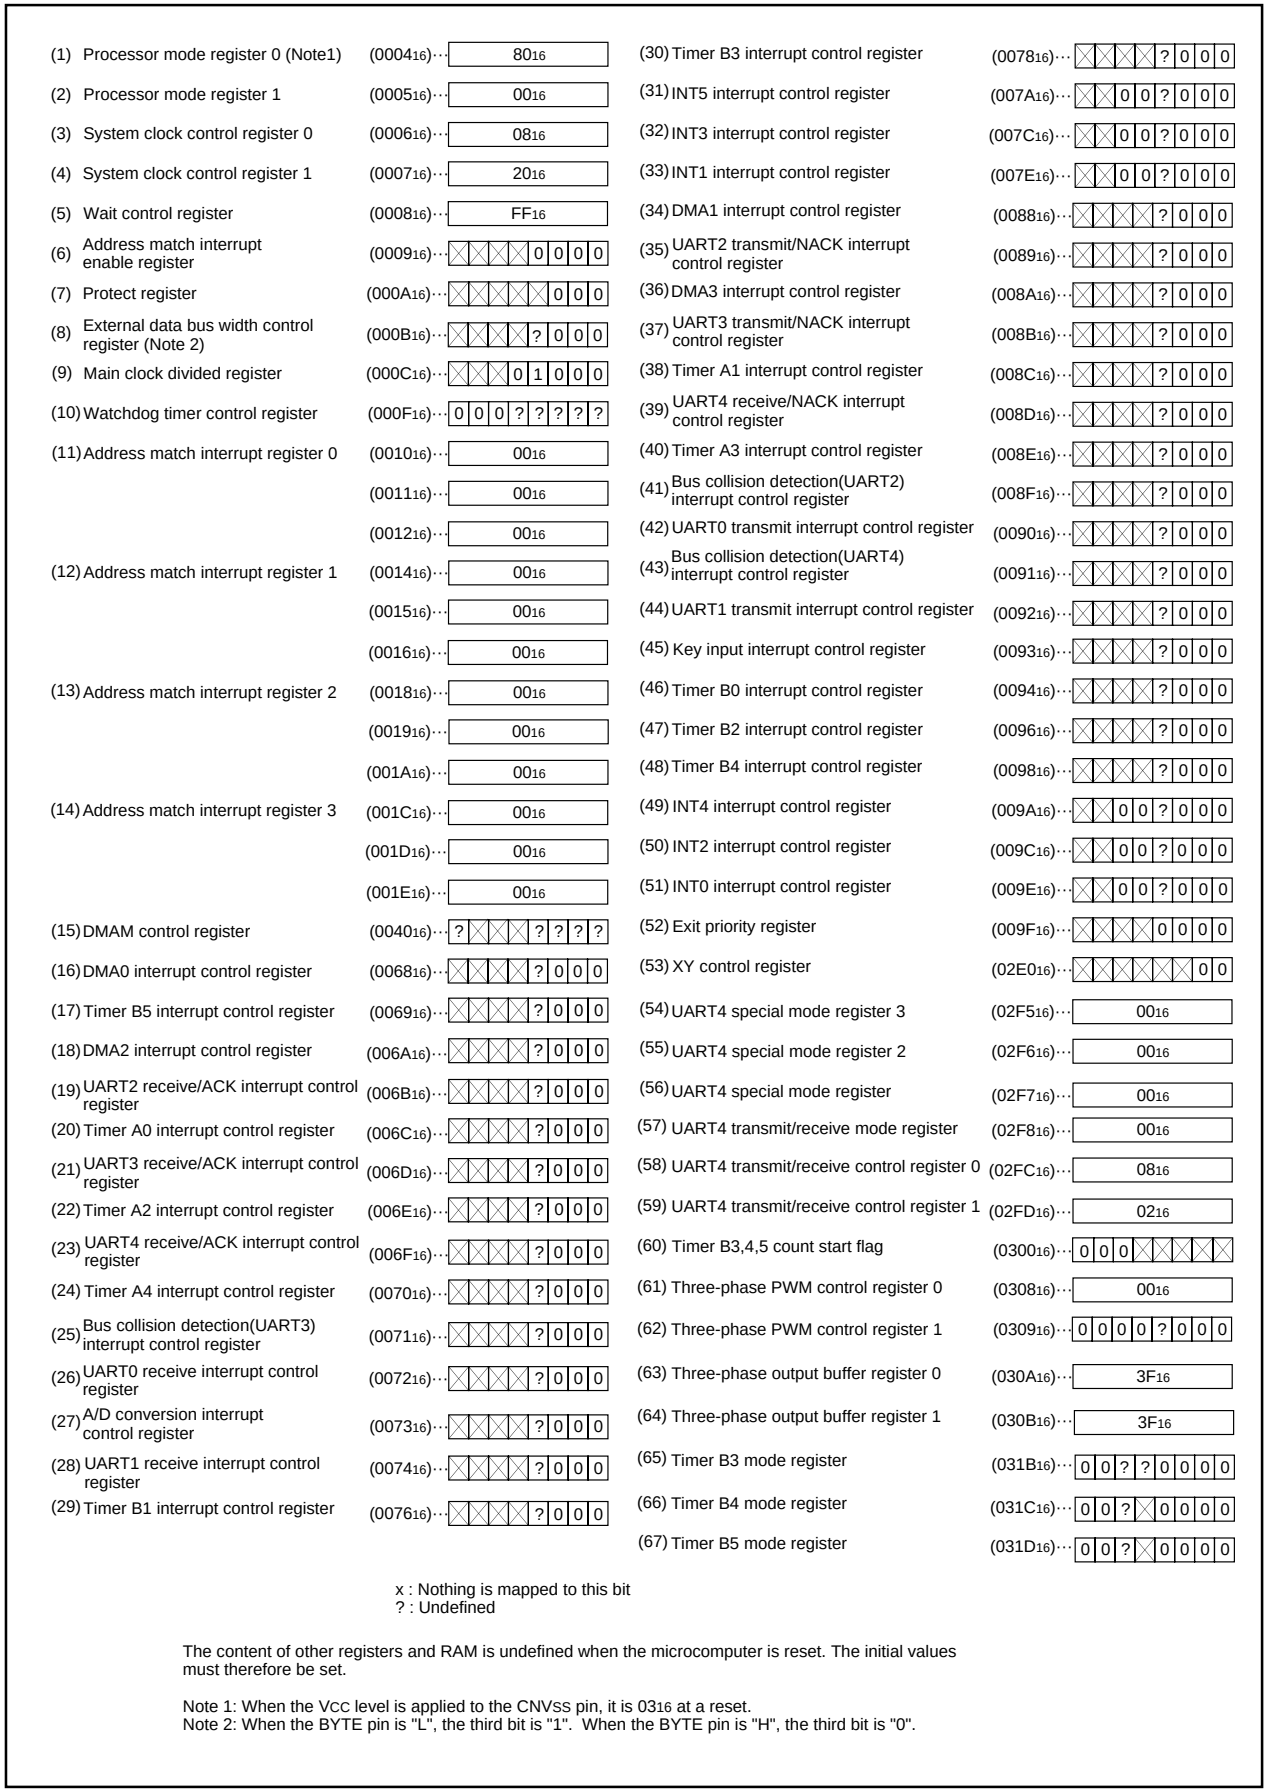

x : Nothing is mapped to this bit
? : Undefined

The content of other registers and RAM is undefined when the microcomputer is reset. The initial values must therefore be set.

Note 1: When the V_{CC} level is applied to the CNV_{SS} pin, it is 03_{16} at a reset.
Note 2: When the BYTE pin is "L", the third bit is "1". When the BYTE pin is "H", the third bit is "0".

Figure 4.3 Device's internal status after a reset is cleared

(68) Interrupt cause select register	(031F16)···	0 0 0 0 0 0	
(69) UART3 special mode register 3	(032516)···	00₁₆	
(70) UART3 special mode register 2	(032616)···	00₁₆	
(71) UART3 special mode register	(032716)···	00₁₆	
(72) UART3 transmit/receive mode register	(032816)···	00₁₆	
(73) UART3 transmit/receive control register 0	(032C16)···	08₁₆	
(74) UART3 transmit/receive control register 1	(032D16)···	02₁₆	
(75) UART2 special mode register 3	(033516)···	0 0 0	
(76) UART2 special mode register 2	(033616)···	00₁₆	
(77) UART2 special mode register	(033716)···	00₁₆	
(78) UART2 transmit/receive mode register	(033816)···	00₁₆	
(79) UART2 transmit/receive control register 0	(033C16)···	0 0 0 1 0 0 0	
(80) UART2 transmit/receive control register 1	(033D16)···	02₁₆	
(81) Count start flag	(034016)···	00₁₆	
(82) Clock prescaler reset flag	(034116)···	0	
(83) One-shot start flag	(034216)···	00₁₆	
(84) Trigger select flag	(034316)···	00₁₆	
(85) Up-down flag	(034416)···	00₁₆	
(86) Timer A0 mode register	(035616)···	0 0 0 0 0 ? 0 0	
(87) Timer A1 mode register	(035716)···	0 0 0 0 0 ? 0 0	
(88) Timer A2 mode register	(035816)···	0 0 0 0 0 ? 0 0	
(89) Timer A3 mode register	(035916)···	0 0 0 0 0 ? 0 0	
(90) Timer A4 mode register	(035A16)···	0 0 0 0 0 ? 0 0	
(91) Timer B0 mode register	(035B16)···	0 0 ? ? 0 0 0 0	
(92) Timer B1 mode register	(035C16)···	0 0 ? 0 0 0 0	
(93) Timer B2 mode register	(035D16)···	0 0 ? 0 0 0 0	
(94) UART0 transmit/receive mode register	(036016)···	00₁₆	
(95) UART0 transmit/receive control register 0	(036416)···	08₁₆	
(96) UART0 transmit/receive control register 1	(036516)···	02₁₆	
(97) UART1 transmit/receive mode register	(036816)···	00₁₆	
(98) UART1 transmit/receive control register 0	(036C16)···	08₁₆	
(99) UART1 transmit/receive control register 1	(036D16)···	02₁₆	
(100) UART transmit/receive control register 2	(037016)···	0 0 0 0 0 0	
(101) Flash memory control register 1 (Note 1)	(037616)···	? ? ? ? 0 ? ? ?	
(102) Flash memory control register 0 (Note 1)	(037716)···	0 0 0 0 0 0 1	
(103) DMA0 cause select register	(037816)···	0 0 0 0 0 0 0 0	
(104) DMA1 cause select register	(037916)···	0 0 0 0 0 0 0 0	
(105) DMA2 cause select register	(037A16)···	0 0 0 0 0 0 0 0	
(106) DMA3 cause select register	(037B16)···	0 0 0 0 0 0 0 0	
(107) A/D control register 2	(039416)···	0 0 0 0 0	
(108) A/D control register 0	(039616)···	0 0 0 0 0 ? ? ?	
(109) A/D control register 1	(039716)···	00₁₆	
(110) D/A control register	(039C16)···	00₁₆	
(111) Function select register C	(03AF16)···	0 0	
(112) Function select register A0	(03B016)···	0 0 0 0 0 0	
(113) Function select register A1	(03B116)···	0 0 0 0 0 0 0	
(114) Function select register B0	(03B216)···	0	
(115) Function select register B1	(03B316)···	0 0 0 0	
(116) Function select register A2	(03B416)···	0 0	
(117) Function select register A3	(03B516)···	00₁₆	
(118) Function select register B2	(03B616)···	0	
(119) Function select register B3	(03B716)···	0 0 0 0 0 0	
(120) Port P6 direction register	(03C216)···	00₁₆	
(121) Port P7 direction register	(03C316)···	00₁₆	
(122) Port P8 direction register	(03C616)···	0 0 0 0 0 0 0	
(123) Port P9 direction register	(03C716)···	00₁₆	
(124) Port P10 direction register	(03CA16)···	00₁₆	
(125) Port P11 direction register (Note 2)	(03CB16)···	0 0 0 0 0	
(126) Port P12 direction register (Note 2)	(03CE16)···	00₁₆	
(127) Port P13 direction register (Note 2)	(03CF16)···	00₁₆	
(128) Port P14 direction register (Note 2)	(03D216)···	0 0 0 0 0 0 0	
(129) Port P15 direction register (Note 2)	(03D316)···	00₁₆	
(130) Pull-up control register 2	(03DA16)···	00₁₆	
(131) Pull-up control register 3 (Note 2)	(03DB16)···	00₁₆	
(132) Pull-up control register 4 (Note 2)	(03DC16)···	X0₁₆	
(133) Port P0 direction register	(03E216)···	00₁₆	
(132) Port P1 direction register	(03E316)···	00₁₆	
(135) Port P2 direction register	(03E616)···	00₁₆	
(136) Port P3 direction register	(03E716)···	00₁₆	
(137) Port P4 direction register	(03EA16)···	00₁₆	
(138) Port P5 direction register	(03EB16)···	00₁₆	
(139) Pull-up control register 0	(03F016)···	00₁₆	
(140) Pull-up control register 1	(03F116)···	X0₁₆	
(141) Port control register	(03FF16)···	0	
(142) Data registers (R0/R1/R2/R3)		0000₁₆	
(143) Address registers (A0/A1)		000000₁₆	
(144) Static base register (SB)		000000₁₆	
(145) Frame base register (FB)		000000₁₆	
(146) Interrupt table register (INTB)		000000₁₆	
(147) User stack pointer (USP)		000000₁₆	
(148) Interrupt stack pointer (ISP)		000000₁₆	
(149) Flag register (FLG)		0000₁₆	
(150) DMA mode register (DMD0/DMD1)		00₁₆	
(151) DMA transfer count register (DCT0/DCT1)		??	
(152) DMA transfer count reload register (DRC0/DRC1)		??	
(153) DMA memory address register (DMA0/DMA1)		??	
(154) DMA SFR address register (DSA0/DSA1)		??	
(155) DMA memory address reload register (DRA0/DRA1)		??	

The content of other registers and RAM is undefined when the microcomputer is reset. The initial values must therefore be set.

x : Nothing is mapped to this bit
? : Undefined

Note 1:This register exists in the flash memory version.
Note 2:This register exists in 144-pin version.

Figure 4.4 Device's internal status after a reset is cleared

5. SFR

0000₁₆	
0001₁₆	
0002₁₆	
0003₁₆	
0004₁₆	Processor mode register 0 (PM0)
0005₁₆	Processor mode register 1(PM1)
0006₁₆	System clock control register 0 (CM0)
0007₁₆	System clock control register 1 (CM1)
0008₁₆	Wait control register (WCR)
0009₁₆	Address match interrupt enable register (AIER)
000A₁₆	Protect register (PRCR)
000B₁₆	External data bus width control register (DS)
000C₁₆	Main clock division register (MCD)
000D₁₆	
000E₁₆	Watchdog timer start register (WDTS)
000F₁₆	Watchdog timer control register (WDC)
0010₁₆	Address match interrupt register 0 (RMAD0)
0011₁₆	
0012₁₆	
0013₁₆	
0014₁₆	Address match interrupt register 1 (RMAD1)
0015₁₆	
0016₁₆	
0017₁₆	
0018₁₆	Address match interrupt register 2 (RMAD2)
0019₁₆	
001A₁₆	
001B₁₆	
001C₁₆	Address match interrupt register 3 (RMAD3)
001D₁₆	
001E₁₆	
001F₁₆	
0020₁₆	Emulator interrupt vector table register (EIAD) *
0021₁₆	
0022₁₆	
0023₁₆	Emulator interrupt detect register (EITD) *
0024₁₆	Emulator protect register (EPRR) *
0025₁₆	
0026₁₆	
0027₁₆	
0028₁₆	
0029₁₆	
002A₁₆	
002B₁₆	
002C₁₆	
002D₁₆	
002E₁₆	
002F₁₆	
0030₁₆	ROM areaset register (ROA) *
0031₁₆	Debug monitor area set register (DBA) *
0032₁₆	Expansion area set register 0 (EXA0) *
0033₁₆	Expansion area set register 1 (EXA1) *
0034₁₆	Expansion area set register 2 (EXA2) *
0035₁₆	Expansion area set register 3 (EXA3) *
0036₁₆	
0037₁₆	
0038₁₆	
0039₁₆	
003A₁₆	
003B₁₆	
003C₁₆	
003D₁₆	
003E₁₆	
003F₁₆	
0040₁₆	DRAM control register (DRAMCONT)
0041₁₆	DRAM refresh interval set register (REFCNT)
0042₁₆	
0043₁₆	
0044₁₆	

0060₁₆	
0061₁₆	
0062₁₆	
0063₁₆	
0064₁₆	
0065₁₆	
0066₁₆	
0067₁₆	
0068₁₆	DMA0 interrupt control register (DM0IC)
0069₁₆	Timer B5 interrupt control register (TB5IC)
006A₁₆	DMA2 interrupt control register (DM2IC)
006B₁₆	UART2 receive/ACK interrupt control register (S2RIC)
006C₁₆	Timer A0 interrupt control register (TA0IC)
006D₁₆	UART3 receive/ACK interrupt control register (S3RIC)
006E₁₆	Timer A2 interrupt control register (TA2IC)
006F₁₆	UART4 receive/ACK interrupt control register (S4RIC)
0070₁₆	Timer A4 interrupt control register (TA4IC)
0071₁₆	Bus collision detection(UART3) interrupt control register (BCN3IC)
0072₁₆	UART0 receive interrupt control register (S0RIC)
0073₁₆	A/D conversion interrupt control register (ADIC)
0074₁₆	UART1 receive interrupt control register (S1RIC)
0075₁₆	
0076₁₆	Timer B1 interrupt control register (TB1IC)
0077₁₆	
0078₁₆	Timer B3 interrupt control register (TB3IC)
0079₁₆	
007A₁₆	INT5 interrupt control register (INT5IC)
007B₁₆	
007C₁₆	INT3 interrupt control register (INT3IC)
007D₁₆	
007E₁₆	INT1 interrupt control register (INT1IC)
007F₁₆	
0080₁₆	
0081₁₆	
0082₁₆	
0083₁₆	
0084₁₆	
0085₁₆	
0086₁₆	
0087₁₆	
0088₁₆	DMA1 interrupt control register (DM1IC)
0089₁₆	UART2 transmit/NACK interrupt control register (S2TIC)
008A₁₆	DMA3 interrupt control register (DM3IC)
008B₁₆	UART3 transmit/NACK interrupt control register (S3TIC)
008C₁₆	Timer A1 interrupt control register (TA1IC)
008D₁₆	UART4 transmit/NACK interrupt control register (S4TIC)
008E₁₆	Timer A3 interrupt control register (TA3IC)
008F₁₆	Bus collision detection(UART2) interrupt control register (BCN2IC)
0090₁₆	UART0 transmit interrupt control register (S0TIC)
0091₁₆	Bus collision detection(UART4) interrupt control register (BCN4IC)
0092₁₆	UART1 transmit interrupt control register (S1TIC)
0093₁₆	Key input interrupt control register (KUPIC)
0094₁₆	Timer B0 interrupt control register (TB0IC)
0095₁₆	
0096₁₆	Timer B2 interrupt control register (TB2IC)
0097₁₆	
0098₁₆	Timer B4 interrupt control register (TB4IC)
0099₁₆	
009A₁₆	INT4 interrupt control register (INT4IC)
009B₁₆	
009C₁₆	INT2 interrupt control register (INT2IC)
009D₁₆	
009E₁₆	INT0 interrupt control register (INT0IC)
009F₁₆	Exit priority register (RLVL)
00A0₁₆	
00A1₁₆	
00A2₁₆	
00A3₁₆	
00A4₁₆	

* As this register is used exclusively for debugger purposes, user cannot use this. Do not access to the register.
(The blank area is reserved and cannot be used by user.)

Figure 5.1 Location of peripheral unit control registers (1)

02C0₁₆ 02C1₁₆	X0 register (X0R) Y0 register (Y0R)
02C2₁₆ 02C3₁₆	X1 register (X1R) Y1 register (Y1R)
02C4₁₆ 02C5₁₆	X2 register (X2R) Y2 register (Y2R)
02C6₁₆ 02C7₁₆	X3 register (X3R) Y3 register (Y3R)
02C8₁₆ 02C9₁₆	X4 register (X4R) Y4 register (Y4R)
02CA₁₆ 02CB₁₆	X5 register (X5R) Y5 register (Y5R)
02CC₁₆ 02CD₁₆	X6 register (X6R) Y6 register (Y6R)
02CE₁₆ 02CF₁₆	X7 register (X7R) Y7 register (Y7R)
02D0₁₆ 02D1₁₆	X8 register (X8R) Y8 register (Y8R)
02D2₁₆ 02D3₁₆	X9 register (X9R) Y9 register (Y9R)
02D4₁₆ 02D5₁₆	X10 register (X10R) Y10 register (Y10R)
02D6₁₆ 02D7₁₆	X11 register (X11R) Y11 register (Y11R)
02D8₁₆ 02D9₁₆	X12 register (X12R) Y12 register (Y12R)
02DA₁₆ 02DB₁₆	X13 register (X13R) Y13 register (Y13R)
02DC₁₆ 02DD₁₆	X14 register (X14R) Y14 register (Y14R)
02DE₁₆ 02DF₁₆	X15 register (X15R) Y15 register (Y15R)
02E0₁₆	XY control register (XYC)
02E1₁₆	
02E2₁₆	
02E3₁₆	
02E4₁₆	
02E5₁₆	
02E6₁₆	
02E7₁₆	
02E8₁₆	
02E9₁₆	
02EA₁₆	
02EB₁₆	
02EC₁₆	
02ED₁₆	
02EE₁₆	
02EF₁₆	
02F0₁₆	
02F1₁₆	
02F2₁₆	
02F3₁₆	
02F4₁₆	
02F5₁₆	UART4 special mode register 3 (U4SMR3)
02F6₁₆	UART4 special mode register 2 (U4SMR2)
02F7₁₆	UART4 special mode register (U4SMR)
02F8₁₆	UART4 transmit/receive mode register (U4MR)
02F9₁₆	UART4 bit rate generator (U4BRG)
02FA₁₆ 02FB₁₆	UART4 transmit buffer register (U4TB)
02FC₁₆	UART4 transmit/receive control register 0 (U4C0)
02FD₁₆	UART4 transmit/receive control register 1 (U4C1)
02FE₁₆ 02FF₁₆	UART4 receive buffer register (U4RB)

0300₁₆	Timer B3, 4, 5 count start flag (TBSR)
0301₁₆	
0302₁₆ 0303₁₆	Timer A1-1 register (TA11)
0304₁₆ 0305₁₆	Timer A2-1 register (TA21)
0306₁₆ 0307₁₆	Timer A4-1 register (TA41)
0308₁₆	Three-phase PWM control register 0(INVC0)
0309₁₆	Three-phase PWM control register 1(INVC1)
030A₁₆	Thrree-phase output buffer register 0(IDB0)
030B₁₆	Thrree-phase output buffer register 1(IDB1)
030C₁₆	Dead time timer(DTT)
030D₁₆	Timer B2 interrupt occurrence frequency set counter(ICTB2)
030E₁₆	
030F₁₆	
0310₁₆ 0311₁₆	Timer B3 register (TB3)
0312₁₆ 0313₁₆	Timer B4 register (TB4)
0314₁₆ 0315₁₆	Timer B5 register (TB5)
0316₁₆	
0317₁₆	
0318₁₆	
0319₁₆	
031A₁₆	
031B₁₆	Timer B3 mode register (TB3MR)
031C₁₆	Timer B4 mode register (TB4MR)
031D₁₆	Timer B5 mode register (TB5MR)
031E₁₆	
031F₁₆	Interrupt cause select register (IFSR)
0320₁₆	
0321₁₆	
0322₁₆ 0323₁₆	
0324₁₆	
0325₁₆	UART3 special mode register 3 (U3SMR3)
0326₁₆	UART3 special mode register 2 (U3SMR2)
0327₁₆	UART3 special mode register (U3SMR)
0328₁₆	UART3 transmit/receive mode register (U3MR)
0329₁₆	UART3 bit rate generator (U3BRG)
032A₁₆ 032B₁₆	UART3 transmit buffer register (U3TB)
032C₁₆	UART3 transmit/receive control register 0 (U3C0)
032D₁₆	UART3 transmit/receive control register 1 (U3C1)
032E₁₆ 032F₁₆	UART3 receive buffer register (U3RB)
0330₁₆	
0331₁₆	
0332₁₆	
0333₁₆	
0334₁₆	
0335₁₆	UART2 special mode register 3 (U2SMR3)
0336₁₆	UART2 special mode register 2 (U2SMR2)
0337₁₆	UART2 special mode register (U2SMR)
0338₁₆	UART2 transmit/receive mode register (U2MR)
0339₁₆	UART2 bit rate generator (U2BRG)
033A₁₆ 033B₁₆	UART2 transmit buffer register (U2TB)
033C₁₆	UART2 transmit/receive control register 0 (U2C0)
033D₁₆	UART2 transmit/receive control register 1 (U2C1)
033E₁₆ 033F₁₆	UART2 receive buffer register (U2RB)

(The blank area is reserved and cannot be used by user.)

Figure 5.2 Location of peripheral unit control registers (2)

0340₁₆	Count start flag (TABSR)
0341₁₆	Clock prescaler reset flag (CPSRF)
0342₁₆	One-shot start flag (ONSF)
0343₁₆	Trigger select register (TRGSR)
0344₁₆	Up-down flag (UDF)
0345₁₆	
0346₁₆	Timer A0 register (TA0)
0347₁₆	
0348₁₆	Timer A1 register (TA1)
0349₁₆	
034A₁₆	Timer A2 register (TA2)
034B₁₆	
034C₁₆	Timer A3 register (TA3)
034D₁₆	
034E₁₆	Timer A4 register (TA4)
034F₁₆	
0350₁₆	Timer B0 register (TB0)
0351₁₆	
0352₁₆	Timer B1 register (TB1)
0353₁₆	
0354₁₆	Timer B2 register (TB2)
0355₁₆	
0356₁₆	Timer A0 mode register (TA0MR)
0357₁₆	Timer A1 mode register (TA1MR)
0358₁₆	Timer A2 mode register (TA2MR)
0359₁₆	Timer A3 mode register (TA3MR)
035A₁₆	Timer A4 mode register (TA4MR)
035B₁₆	Timer B0 mode register (TB0MR)
035C₁₆	Timer B1 mode register (TB1MR)
035D₁₆	Timer B2 mode register (TB2MR)
035E₁₆	
035F₁₆	
0360₁₆	UART0 transmit/receive mode register (U0MR)
0361₁₆	UART0 bit rate generator (U0BRG)
0362₁₆	UART0 transmit buffer register (U0TB)
0363₁₆	
0364₁₆	UART0 transmit/receive control register 0 (U0C0)
0365₁₆	UART0 transmit/receive control register 1 (U0C1)
0366₁₆	UART0 receive buffer register (U0RB)
0367₁₆	
0368₁₆	UART1 transmit/receive mode register (U1MR)
0369₁₆	UART1 bit rate generator (U1BRG)
036A₁₆	UART1 transmit buffer register (U1TB)
036B₁₆	
036C₁₆	UART1 transmit/receive control register 0 (U1C0)
036D₁₆	UART1 transmit/receive control register 1 (U1C1)
036E₁₆	UART1 receive buffer register (U1RB)
036F₁₆	
0370₁₆	UART transmit/receive control register 2 (UCON)
0371₁₆	
0372₁₆	
0373₁₆	
0374₁₆	
0375₁₆	
0376₁₆	Flash memory control register 1 (FMR1) (Note)
0377₁₆	Flash memory control register 0 (FMR0) (Note)
0378₁₆	DMA0 request cause select register (DM0SL)
0379₁₆	DMA1 request cause select register (DM1SL)
037A₁₆	DMA2 request cause select register (DM2SL)
037B₁₆	DMA3 request cause select register (DM3SL)
037C₁₆	CRC data register (CRCD)
037D₁₆	
037E₁₆	CRC input register (CRCIN)
037F₁₆	

Note :This register exists in the flash memory version.

0380₁₆	A/D register 0 (AD0)
0381₁₆	
0382₁₆	A/D register 1 (AD1)
0383₁₆	
0384₁₆	A/D register 2 (AD2)
0385₁₆	
0386₁₆	A/D register 3 (AD3)
0387₁₆	
0388₁₆	A/D register 4 (AD4)
0389₁₆	
038A₁₆	A/D register 5 (AD5)
038B₁₆	
038C₁₆	A/D register 6 (AD6)
038D₁₆	
038E₁₆	A/D register 7 (AD7)
038F₁₆	
0390₁₆	
0391₁₆	
0392₁₆	
0393₁₆	
0394₁₆	A/D control register 2 (ADCON2)
0395₁₆	
0396₁₆	A/D control register 0 (ADCON0)
0397₁₆	A/D control register 1 (ADCON1)
0398₁₆	D/A register 0 (DA0)
0399₁₆	
039A₁₆	D/A register 1 (DA1)
039B₁₆	
039C₁₆	D/A control register (DACON)
039D₁₆	
039E₁₆	
039F₁₆	
03A0₁₆	
03A1₁₆	
03A2₁₆	
03A3₁₆	
03A4₁₆	
03A5₁₆	
03A6₁₆	
03A7₁₆	
03A8₁₆	
03A9₁₆	
03AA₁₆	
03AB₁₆	
03AC₁₆	
03AD₁₆	
03AE₁₆	
03AF₁₆	Function select register C(PSC)
03B0₁₆	Function select register A0 (PS0)
03B1₁₆	Function select register A1 (PS1)
03B2₁₆	Function select register B0 (PSL0)
03B3₁₆	Function select register B1 (PSL1)
03B4₁₆	Function select register A2 (PS2)
03B5₁₆	Function select register A3 (PS3)
03B6₁₆	Function select register B2 (PSL2)
03B7₁₆	Function select register B3 (PSL3)
03B8₁₆	
03B9₁₆	
03BA₁₆	
03BB₁₆	
03BC₁₆	
03BD₁₆	
03BE₁₆	
03BF₁₆	

(The blank area is reserved and cannot be used by user.)

Figure 5.3 Location of peripheral unit control registers (3)

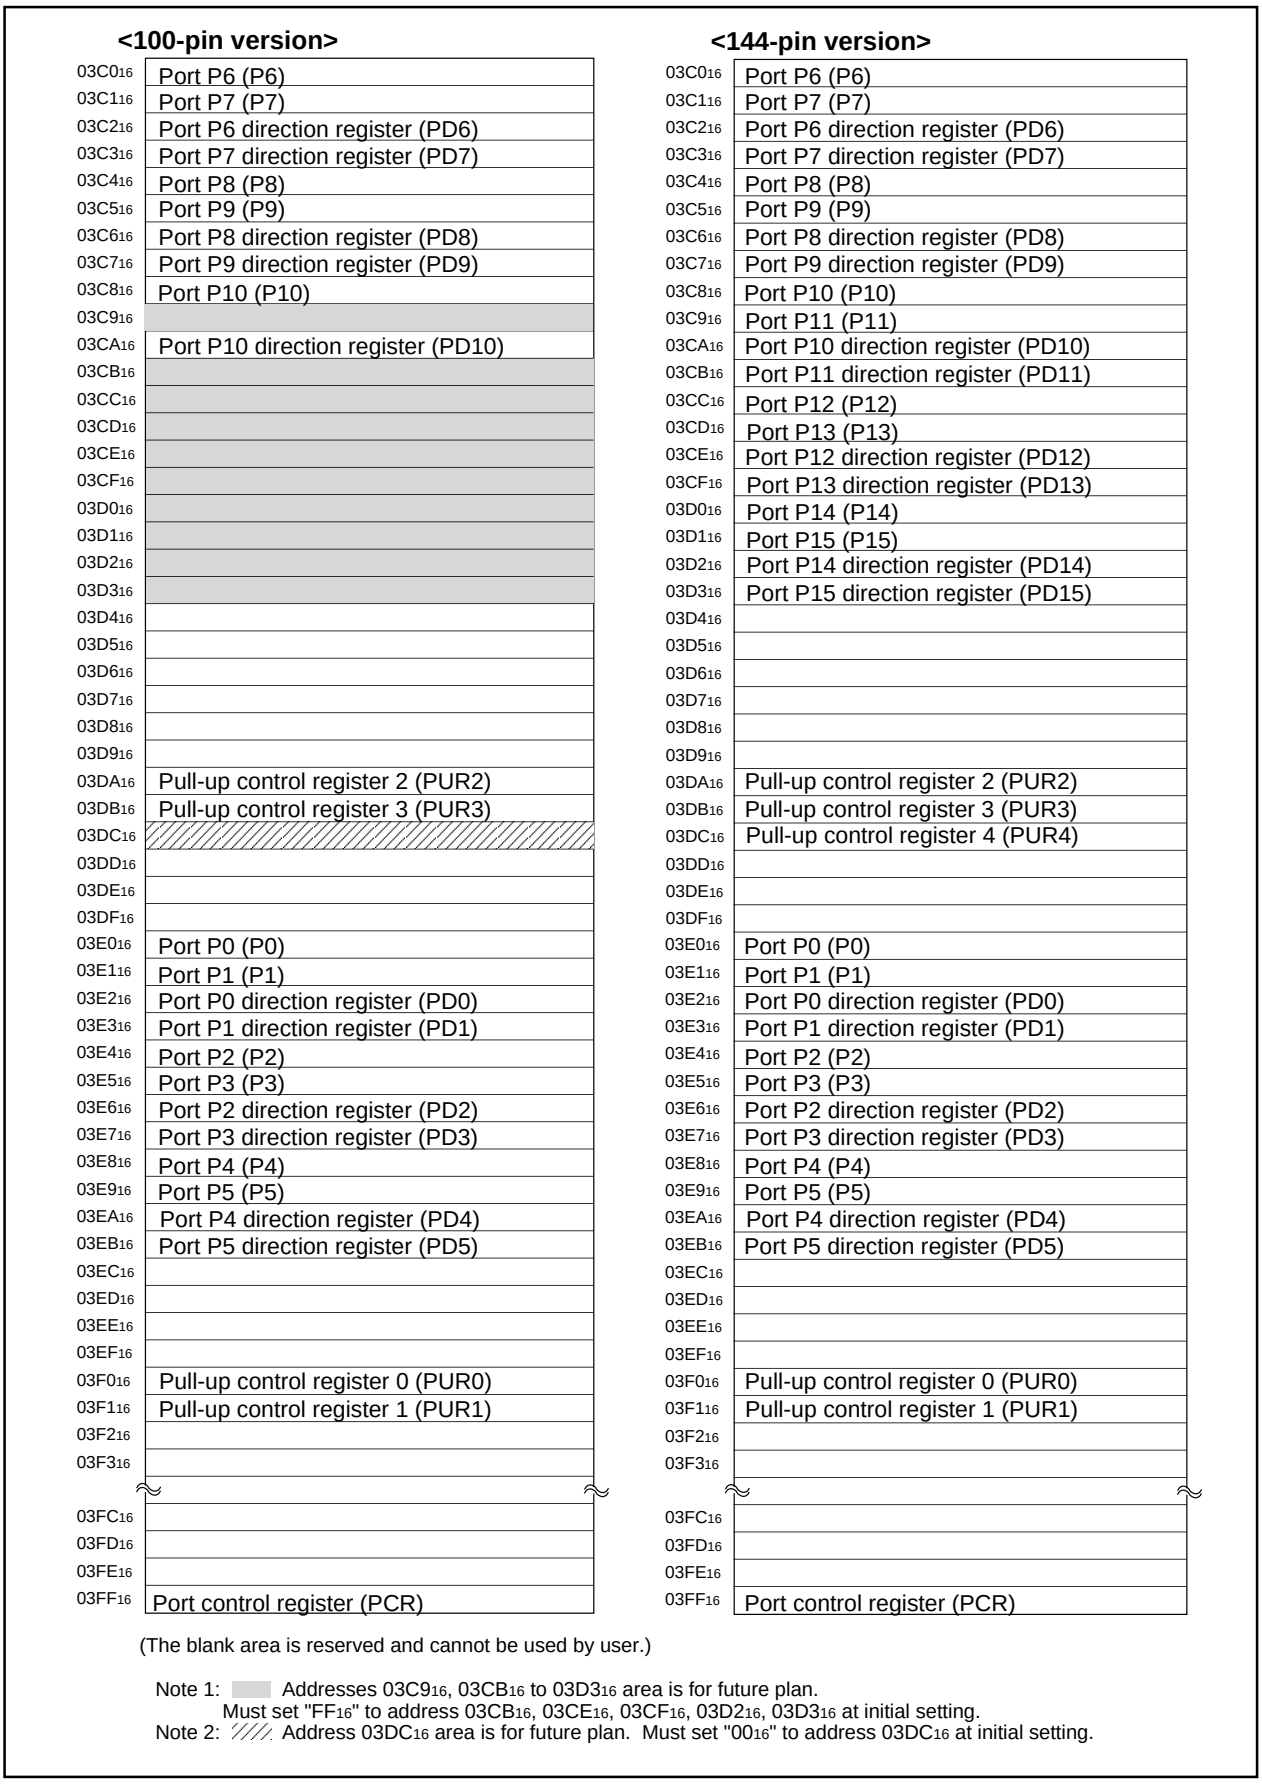

(The blank area is reserved and cannot be used by user.)

Note 1: Addresses 03C9$_{16}$, 03CB$_{16}$ to 03D3$_{16}$ area is for future plan.
Must set "FF$_{16}$" to address 03CB$_{16}$, 03CE$_{16}$, 03CF$_{16}$, 03D2$_{16}$, 03D3$_{16}$ at initial setting.
Note 2: Address 03DC$_{16}$ area is for future plan. Must set "00$_{16}$" to address 03DC$_{16}$ at initial setting.

Figure 5.4 Location of peripheral unit control registers (4)

Software Reset

Writing “1” to bit 3 of the processor mode register 0 (address 0004_{16}) applies a (software) reset to the microcomputer. A software reset has the same effect as a hardware reset. The contents of internal RAM are preserved.

Carry out a software reset after oscillation of main clock is fully stable.

6. Processor Mode

(1) Types of Processor Mode

One of three processor modes can be selected: single-chip mode, memory expansion mode, and microprocessor mode. The functions of some pins, the memory map, and the access space differ according to the selected processor mode.

- **Single-chip mode**

  In single-chip mode, only internal memory space (SFR, internal RAM, and internal ROM) can be accessed. However, after the reset has been released and the operation of shifting from the microprocessor mode has started ("H" applied to the CNVSS pin), the internal ROM area cannot be accessed even if the CPU shifts to the single-chip mode.

  Ports P0 to P10 can be used as programmable I/O ports or as I/O ports for the internal peripheral functions.

- **Memory expansion mode**

  In memory expansion mode, external memory can be accessed in addition to the internal memory space (SFR, internal RAM, and internal ROM). However, after the reset has been released and the operation of shifting from the microprocessor mode has started ("H" applied to the CNVSS pin), the internal ROM area cannot be accessed even if the CPU shifts to the memory expansion mode.

  In this mode, some of the pins function as the address bus, the data bus, and as control signals. The number of pins assigned to these functions depends on the bus and register settings. (See “Bus Settings” for details.)

- **Microprocessor mode**

  In microprocessor mode, the SFR, internal RAM, and external memory space can be accessed. The internal ROM area cannot be accessed.

  In this mode, some of the pins function as the address bus, the data bus, and as control signals. The number of pins assigned to these functions depends on the bus and register settings. (See “Bus Settings” for details.)

(2) Setting Processor Modes

The processor mode is set using the CNVSS pin and the processor mode bits (bits 1 and 0 at address 0004_{16}). Do not set the processor mode bits to “10_2”.

Regardless of the level of the CNVSS pin, changing the processor mode bits selects the mode. Therefore, never change the processor mode bits when changing the contents of other bits. Do not change the processor mode bits simultaneously with other bits when changing the processor mode bits "01_2" or "11_2". Change the processor mode bits after changeing the other bits. Also do not attempt to shift to or from the microprocessor mode within the program stored in the internal ROM area.

- **Applying V_{SS} to CNVSS pin**

  The microcomputer begins operation in single-chip mode after being reset. Memory expansion mode is selected by writing “01_2” to the processor mode is selected bits.

- **Applying V_{CC} to CNVSS pin**

  The microcomputer starts to operate in microprocessor mode after being reset.

Figures 6.1 and 6.2 show the processor mode register 0 and 1.

Figure 6.3 shows the memory maps applicable for each processor modes.

Processor mode register 0 (Note 1)

b7	b6	b5	b4	b3	b2	b1	b0
	0						

Symbol: PM0 — Address: 0004$_{16}$ — When reset: 80$_{16}$ (Note 2)

Bit symbol	Bit name	Function	R	W
PM00	Processor mode bit (Note 8)	b1 b0 0 0: Single-chip mode 0 1: Memory expansion mode 1 0: Must not be set 1 1: Microprocessor mode	○	○
PM01			○	○
PM02	R/W mode select bit (Note 7)	0 : $\overline{RD}$,$\overline{BHE}$,$\overline{WR}$ 1 : RD,WRH,WRL	○	○
PM03	Software reset bit	The device is reset when this bit is set to “1”. The value of this bit is “0” when read.	○	○
PM04	Multiplexed bus space select bit (Note 3)	b5 b4 0 0 : Multiplexed bus is not used 0 1 : Allocated to CS2 space 1 0 : Allocated to CS1 space 1 1 : Allocated to entire space (Note4)	○	○
PM05			○	○
Reserved bit		Must always be set to “0”	○	○
PM07	BCLK output disable bit (Note 5)	0 : BCLK is output (Note 6) 1 : Function set by bit 0,1 of system clock control register 0	○	○

Note 1: Set bit 1 of the protect register (address 000A$_{16}$) to “1” when writing new values to this register.
Note 2: If the V_{CC} voltage is applied to the CNV_{SS}, the value of this register when reset is 03$_{16}$. (PM00 is set to “1” and PM07 is set to “0”.)
Note 3: Valid in microprocessor and memory expansion modes 1, 2 and 3. Do not use multiplex bus when mode 0 is selected. Do not set to allocated to CS2 space when mode 2 is selected.
Note 4: After the reset has been released, the M16C/80 group MCU operates using the separate bus. As a result, in microprocessor mode, you cannot select the full $\overline{CS}$ space multiplex bus.
When you select the full $\overline{CS}$ space multiplex bus in memory expansion mode, the address bus operates with 64 Kbytes boundaries for each chip select.
Mode 0: Multiplexed bus cannot be used.
Mode 1: $\overline{CS0}$ to $\overline{CS2}$ when you select full $\overline{CS}$ space.
Mode 2: $\overline{CS0}$ to $\overline{CS1}$ when you select full $\overline{CS}$ space.
Mode 3: $\overline{CS0}$ to $\overline{CS3}$ when you select full $\overline{CS}$ space.
Note 5: No BCLK is output in single chip mode even when "0" is set in PM07. When stopping clock output in microprocessor or memory expansion mode, make the following settings: PM07="1", bit 0 (CM00) and bit 1 (CM01) of system clock control register 0 (address 0006$_{16}$) = "0". "L" is now output from P5$_3$.
Note 6: When selecting BCLK, set bits 0 and 1 of system clock control register 0 (CM00, CM01) to "0".
Note 7: When using 16-bit bus width in DRAM controller, set this bit to "1".
Note 8: Do not set the processor mode bits and other bits simultaneously when setting the processor mode bits to “01$_2$” or “11$_2$”. Set the other bits first, and then change the processor mode bits.

Figure 6.1 Processor mode register 0

Processor mode register 1 (Note 1) :Mask ROM version ROMless version (144-pin version)

b7	b6	b5	b4	b3	b2	b1	b0
				0			

Symbol	Address	When reset
PM1	0005$_{16}$	00$_{16}$

Bit symbol	Bit name	Function	R	W
PM10	External memory area mode bit (Note 3)	b1 b0 0 0 : Mode 0 (P4$_4$ to P4$_7$: A$_{20}$ to $\overline{A_{23}}$) 0 1 : Mode 1 (P4$_4$: A$_{20}$, P4$_5$ to P4$_7$: $\overline{CS2}$ to $\overline{CS0}$) 1 0 : Mode 2 (P4$_4$, P4$_5$: A$_{20}$, A$_{21}$, P4$_6$, P4$_7$: $\overline{CS1}$, $\overline{CS0}$) 1 1 : Mode 3 (Note 2) (P4$_4$ to P4$_7$: $\overline{CS3}$ to $\overline{CS0}$)	○	○
PM11				
PM12	Internal memory wait bit	0 : No wait state 1 : Wait state inserted	–	–
Reserved bit		Must always be set to “0”	–	○
PM14	ALE pin select bit (Note 3)	b5 b4 0 0 : No ALE 0 1 : P5$_3$/BCLK (Note 4) 1 0 : P5$_6$/$\overline{RAS}$ 1 1 : P5$_4$/HLDA	○	○
PM15			○	○
Nothing is assinged. When read, the content is indeterminate.			–	–

Note 1: Set bit 1 of the protect register (address 000A$_{16}$) to “1” when writing new values to this register.
Note 2: When mode 3 is selected, DRAMC is not used.
Note 3: Valid in memory expansion mode or in microprocessor mode.
Note 4: When selecting P5$_3$/BCLK, set bits 0 and 1 of system clock control register 0 (CM00, CM01) to "0".

Processor mode register 1 (Note 1) :Flash memory version

b7	b6	b5	b4	b3	b2	b1	b0
				0			

Symbol	Address	When reset
PM1	0005$_{16}$	00$_{16}$

Bit symbol	Bit name	Function	R	W
PM10	External memory area mode bit (Note 3)	b1 b0 0 0 : Mode 0 (P4$_4$ to P4$_7$: A$_{20}$ to $\overline{A_{23}}$) 0 1 : Mode 1 (P4$_4$: A$_{20}$, P4$_5$ to P4$_7$: $\overline{CS2}$ to $\overline{CS0}$) 1 0 : Mode 2 (P4$_4$, P4$_5$: A$_{20}$, A$_{21}$, P4$_6$, P4$_7$: $\overline{CS1}$, $\overline{CS0}$) 1 1 : Mode 3 (Note 2) (P4$_4$ to P4$_7$: $\overline{CS3}$ to $\overline{CS0}$)	○	○
PM11				
PM12	Internal memory wait bit	0 : No wait state 1 : Wait state inserted	–	–
Reserved bit		Must always be set to “0”	–	○
PM14	ALE pin select bit (Note 3)	b5 b4 0 0 : No ALE 0 1 : P5$_3$/BCLK (Note 4) 1 0 : P5$_6$/$\overline{RAS}$ 1 1 : P5$_4$/HLDA	○	○
PM15			○	○
Reserved bit		Must always be set to “1” (Note 5)	○	○

Note 1: Set bit 1 of the protect register (address 000A$_{16}$) to “1” when writing new values to this register.
Note 2: When mode 3 is selected, DRAMC is not used.
Note 3: Valid in memory expansion mode or in microprocessor mode.
Note 4: When selecting P5$_3$/BCLK, set bits 0 and 1 of system clock control register 0 (CM00, CM01) to "0".
Note 5: Rewrite this bit when the main clock is in division by 8 mode.

Figure 6.2 Processor mode register 1

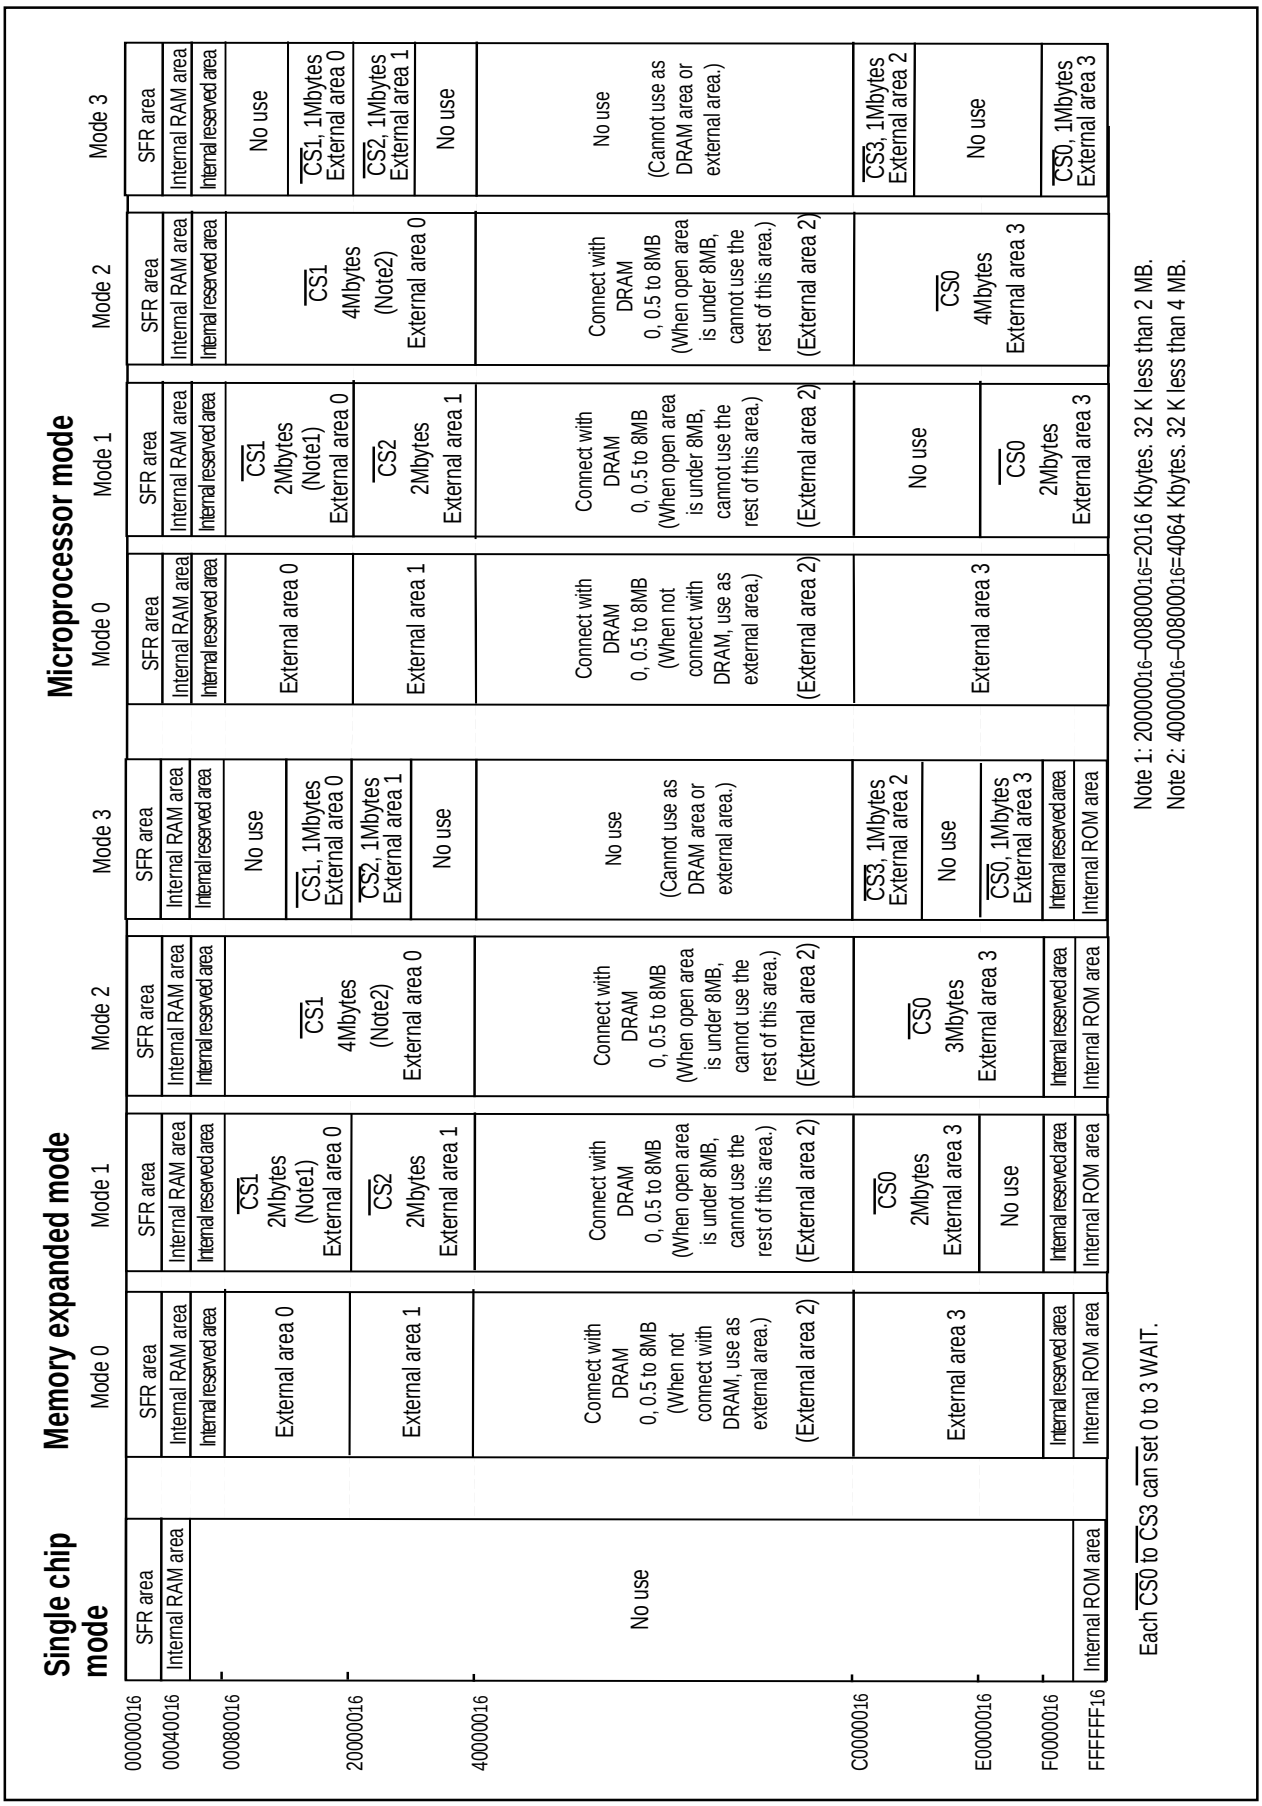

Figure 6.3 Memory maps in each processor mode

7. Bus

7.1 Bus Settings

The BYTE pin, bit 0 to 3 of the external data bus width control register (address $000B_{16}$), bits 4 and 5 of the processor mode register 0 (address 0004_{16}) and bit 0 and 1 of the processor mode register 1 (address 0005_{16}) are used to change the bus settings.

Table 7.1 shows the factors used to change the bus settings, Figure 7.1 shows external data bus width control register and Table 7.2 shows external area 0 to 3 and external area mode.

Table 7.1 Factors for switching bus settings

Bus setting	Switching factor
Switching external address bus width	External data bus width control register
Switching external data bus width	BYTE pin (external area 3 only)
Switching between separate and multiplex bus	Bits 4 and 5 of processor mode register 0

(1) Selecting external address bus width

You can select the width of the address bus output externally from the 16 Mbytes address space, the number of chip select signals, and the address area of the chip select signals. (Note, however, that when you select “Full $\overline{CS}$ space multiplex bus”, addresses A_0 to A_{15} are output.) The combination of bits 0 and 1 of the processor mode register 1 allow you to set the external area mode.

When using DRAM controller, the DRAM area is output by multiplexing of the time splitting of the row and column addresses.

(2) Selecting external data bus width

You can select 8-bit or 16-bit for the width of the external data bus for external areas 0, 1, 2, and 3. When the data bus width bit of the external data bus width control register is “0”, the data bus width is 8 bits; when “1”, it is 16 bits. The width can be set for each of the external areas. The default bus width for external area 3 is 16 bits when the BYTE pin is “L” after a reset, or 8 bits when the BYTE pin is “H” after a reset. The bus width selection is valid only for the external bus (the internal bus width is always 16 bits). During operation, fix the level of the BYTE pin to “H” or “L”.

(3) Selecting separate/multiplex bus

The bus format can be set to multiplex or separate bus using bits 4 and 5 of the processor mode register 0.

- **Separate bus**

  In this bus configuration, input and output is performed on separate data and address buses. The data bus width can be set to 8 bits or 16 bits using the external data bus width control register. For all programmable external areas, P0 is the data bus when the external data bus is set to 8 bits, and P1 is a programmable IO port. When the external data bus width is set to 16 bits for any of the external areas, P0 and P1 (although P1 is undefined for any 8-bit bus areas) are the data bus.

  When accessing memory using the separate bus configuration, you can select a software wait using the wait control register.

- **Multiplex bus**

  In this bus configuration, data and addresses are input and output on a time-sharing basis. For areas for which 8-bit has been selected using the external data bus width control register, the 8 bits D_0 to D_7 are multiplexed with the 8 bits A_0 to A_7. For areas for which 16-bit has been selected using the external data bus width control register, the 16 bits D_0 to D_{15} are multiplexed with the 16 bits A_0 to A_{15}. When accessing memory using the multiplex bus configuration, two waits are inserted regardless of whether you select “No wait” or “1 wait’ in the appropriate bit of the wait control register.

The default after a reset is the separate bus configuration, and the full $\overline{CS}$ space multiplex bus configuration cannot be selected in microprocessor mode. If you select “Full $\overline{CS}$ space multiplex bus”, the 16 bits from A0 to A15 are output for the address.

External data bus width control register



Symbol: DS | Address: 000B16 | When reset: XXXXX0002

Bit symbol	Bit name	Function	R	W
DS0	External area 0 data bus width bit	0 : 8 bits data bus width 1 : 16 bits data bus width	○	○
DS1	External area 1 data bus width bit	0 : 8 bits data bus width 1 : 16 bits data bus width	○	○
DS2	External area 2 data bus width bit	0 : 8 bits data bus width 1 : 16 bits data bus width	○	○
DS3	External area 3 data bus width bit (Note)	0 : 8 bits data bus width 1 : 16 bits data bus width	○	○
Nothing is assigned. When write, set "0". When read, their contents are indeterminate.			—	—

Note: The value after a reset is determined by the input via the BYTE pin.

Figure 7.1 External data bus width control register

Table 7.2 External area 0 to 3 and external area mode

	External area mode (Note 2)	Mode 0	Mode 1	Mode 2	Mode 3
External area 0	Memory expansion mode, Microprocessor mode	008000$_{16}$ to 1FFFFF$_{16}$	<CS1 area> 008000$_{16}$ to 1FFFFF$_{16}$	<CS1 area> 008000$_{16}$ to 1FFFFF$_{16}$	<CS1 area> 100000$_{16}$ to 1FFFFF$_{16}$
External area 1	Memory expansion mode, Microprocessor mode	200000$_{16}$ to 3FFFFF$_{16}$	<CS2 area> 200000$_{16}$ to 3FFFFF$_{16}$	No area is selected.	<CS2 area> 200000$_{16}$ to 2FFFFF$_{16}$
External area 2	Memory expansion mode, Microprocessor mode	400000$_{16}$ to BFFFFF$_{16}$ (Note 1)	<DRAMC area> 400000$_{16}$ to BFFFFF$_{16}$	<DRAMC area> 400000$_{16}$ to BFFFFF$_{16}$	<CS3 area> C00000$_{16}$ to CFFFFF$_{16}$
External area 3	Memory expansion mode	C00000$_{16}$ to EFFFFF$_{16}$	<CS0 area> C00000$_{16}$ to EFFFFF$_{16}$	<CS0 area> C00000$_{16}$ to EFFFFF$_{16}$	<CS0 area> E00000$_{16}$ to EFFFFF$_{16}$
	Microprocessor mode	C00000$_{16}$ to FFFFFF$_{16}$	<CS0 area> E00000$_{16}$ to FFFFFF$_{16}$	<CS0 area> C00000$_{16}$ to FFFFFF$_{16}$	<CS0 area> F00000$_{16}$ to FFFFFF$_{16}$

Note 1: DRAMC area when using DRAMC.

Note 2: Set the external area mode (modes 0, 1, 2, and 3) using bits 0 and 1 of the processor mode register 1 (address 0005$_{16}$).

Table 7.3 Each processor mode and port function

Processor mode	Single-chip mode	Memory expansion mode/microprocessor modes				Memory expansion mode	
Multiplexed bus space select bit		"01", "10" CS1 or CS2 : multiplexed bus, and the other : separate bus		"00" Separate bus		"11" (Note 1) All space multiplexed bus	
Data bus width BYTE pin level		All external area is 8 bits	Some external area is 16 bits	All external area is 8 bits	Some external area is 16 bits	All external area is 8 bits	Some external area is 16 bits
P00 to P07	I/O port	Data bus	Data bus	Data bus	Data bus	I/O port	I/O port
P10 to P17	I/O port	I/O port	Data bus	I/O port	Data bus	I/O port	I/O port
P20 to P27	I/O port	Address bus /data bus (Note 2)	Address bus /data bus (Note 2)	Address bus	Address bus	Address bus /data bus	Address bus /data bus
P30 to P37	I/O port	Address bus	Address bus /data bus (Note 2)	Address bus	Address bus	Address bus	Address bus /data bus
P40 to P43	I/O port	Address bus	Address bus	Address bus	Address bus	I/O port	I/O port
P44 to P46	I/O port	$\overline{CS}$ (chip select) or address bus (A20 to A22) (For details, refer to "Bus control") (Note 5)					
P47	I/O port	$\overline{CS}$ (chip select) or address bus ($\overline{A23}$) (For details, refer to "Bus control") (Note 5)					
P50 to P53	I/O port	Outputs $\overline{RD}$, $\overline{WRL}$, $\overline{WRH}$ and BCLK, or $\overline{RD}$, $\overline{BHE}$, $\overline{WR}$ and BCLK (For details, refer to "Bus control") (Note 3,4)					
P54	I/O port	$\overline{HLDA}$(Note 3)	$\overline{HLDA}$(Note 3)	$\overline{HLDA}$(Note 3)	$\overline{HLDA}$(Note 3)	$\overline{HLDA}$(Note 3)	$\overline{HLDA}$(Note 3)
P55	I/O port	$\overline{HOLD}$	$\overline{HOLD}$	$\overline{HOLD}$	$\overline{HOLD}$	$\overline{HOLD}$	$\overline{HOLD}$
P56	I/O port	RAS (Note 3)	RAS (Note 3)	RAS (Note 3)	RAS (Note 3)	RAS (Note 3)	RAS (Note 3)
P57	I/O port	$\overline{RDY}$	$\overline{RDY}$	$\overline{RDY}$	$\overline{RDY}$	$\overline{RDY}$	$\overline{RDY}$

Note 1: The default after a reset is the separate bus configuration, and "Full $\overline{CS}$ space multiplex bus" cannot be selected in microprocessor mode. When you select "Full $\overline{CS}$ space multiplex bus" in extended memory mode, the address bus operates with 64 Kbytes boundaries for each chip select.
Note 2: Address bus in separate bus configuration.
Note 3: The ALE output pin is selected using bits 4 and 5 of the processor mode register 1.
Note 4: When you have selected use of the DRAM controller and you access the DRAM area, these are $\overline{CASL}$, $\overline{CASH}$, $\overline{DW}$, and BCLK outputs.
Note 5: The $\overline{CS}$ signal and address bus selection are set by the external area mode.

7.2 Bus Control

The following explains the signals required for accessing external devices and software waits. The signals required for accessing the external devices are valid when the processor mode is set to memory expansion mode and microprocessor mode.

(1) Address bus/data bus

There are 24 pins, A_0 to A_{22} and $\overline{A_{23}}$ for the address bus for accessing the 16 Mbytes address space. $\overline{A_{23}}$ is an inverted output of the MSB of the address.

The data bus consists of pins for data IO. The external data bus control register (address $000B_{16}$) selects the 8-bit data bus, D_0 to D_7 for each external area, or the 16-bit data bus, D_0 to D_{15}. After a reset, there is by default an 8-bit data bus for the external area 3 when the BYTE pin is “H”, or a 16-bit data bus when the BYTE pin is “L”.

When shifting from single-chip mode to extended memory mode, the value on the address bus is undefined until an external area is accessed.

When accessing a DRAM area with DRAM control in use, a multiplexed signal consisting of row address and column address is output to A_8 to A_{20}.

(2) Chip select signals

The chip select signals share A_0 to A_{22} and $\overline{A_{23}}$. You can use bits 0 and 1 of the processor mode register 1 (address 0005_{16}) to set the external area mode, then select the chip select area and number of address outputs.

In microprocessor mode, external area mode 0 is selected after a reset. The external area can be split into a maximum of four using the chip select signals. Table 7.4 shows the external areas specified by the chip select signals.

Table 7.4 External areas specified by the chip select signals

Memory space expansion mode		Processor mode	Chip select signal			
			$\overline{CS0}$	$\overline{CS1}$	$\overline{CS2}$	$\overline{CS3}$
Specified address range	Mode 0		$\overline{(A23)}$	$\overline{(A22)}$	$\overline{(A21)}$	$\overline{(A20)}$
	Mode 1	Memory expansion mode	$C00000_{16}$ to $DFFFFF_{16}$ (2 Mbytes)	008000_{16} to $1FFFFF_{16}$ (2016 Kbytes)	200000_{16} to $3FFFFF_{16}$ (2 Mbytes)	$\overline{(A20)}$
		Microprocessor mode	$E00000_{16}$ to $FFFFFF_{16}$ (2 Mbytes)			
	Mode 2	Memory expansion mode	$C00000_{16}$ to $EFFFFF_{16}$ (3 Mbytes)	008000_{16} to $3FFFFF_{16}$ (4064 Kbytes)	$\overline{(A21)}$	$\overline{(A20)}$
		Microprocessor mode	$C00000_{16}$ to $FFFFFF_{16}$ (4 Mbytes)			
	Mode 3	Memory expansion mode	$E00000_{16}$ to $EFFFFF_{16}$ (1 Mbytes)	100000_{16} to $1FFFFF_{16}$ (1 Mbytes)	200000_{16} to $2FFFFF_{16}$ (1 Mbytes)	$C00000_{16}$ to $CFFFFF_{16}$ (1 Mbytes)
		Microprocessor mode	$F00000_{16}$ to $FFFFFF_{16}$ (1 Mbytes)			

The chip select signal turns “L” (active) in synchronize with the address bus. However, its turning “H” depends on the area accessed in the next cycle. Figure 7.2 shows the output examples of the address bus and chip select signals.

(Example 1) After accessing the external area, the address bus and chip select signal both are changed in the next cycle.

The following example shows the other chip select signal accessing area (j) in the cycle after having accessed external area (i). In this case, the address bus and chip select signal both change between the two cycles.

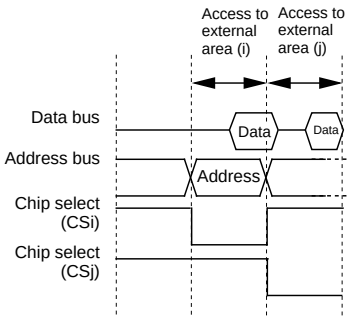

(Example 2) After accessing the external area, only the chip select signal is changed in the next cycle. (The address bus does not change.)

The following example shows the CPU accesses the internal ROM/RAM area in the cycle after having accessed external area. In this case, the chip select signal changes between the two cycles but the address bus does not.

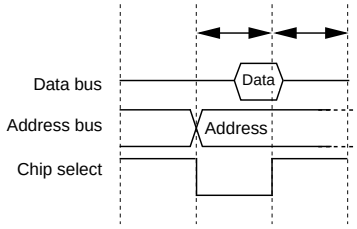

(Example 3) After accessing the external area, only the address bus is changed in the next cycle. (The chip select signal does not change.)

The following example shows the same chip select signal accessing area (i) in the cycle after having accessed external area (i). In this case, the address bus changes between the two cycles, but the chip select signal does not.



(Example 4) After accessing the external area, the address bus and chip select signal both are not changed in the next cycle.

The following example shows CPU does not access any area in the cycle after having accessed external area (no instruction pre-fetch is occurred). In this case, the address bus and the chip select signal do not change between the two cycles.



Note: These examples show the address bus and chip select signal for two consecutive cycles. By combining these examples, chip select signal can be extended beyond two cycles.

Figure 7.2 Example of address bus and chip select signal outputs (Separate bus)

(3) Read/write signals

With a 16-bit data bus, bit 2 of the processor mode register 0 (address 0004$_{16}$) select the combinations of $\overline{RD}$, $\overline{BHE}$, and $\overline{WR}$ signals or $\overline{RD}$, $\overline{WRL}$, and $\overline{WRH}$ signals. With a 8-bit full space data bus, use the combination of $\overline{RD}$, $\overline{WR}$, and $\overline{BHE}$ signals as read/write signals. (Set "0" to bit 2 of the processor mode register 0 (address 0004$_{16}$).) When using both 8-bit and 16-bit data bus widths and you access an 8-bit data bus area, the $\overline{RD}$, $\overline{WR}$ and $\overline{BHE}$ signals combination is selected regardless of the value of bit 2 of the processor mode register 0 (address 0004$_{16}$).

Tables 7.5 and 7.6 show the operation of these signals.

After a reset has been cancelled, the combination of $\overline{RD}$, $\overline{WR}$, and $\overline{BHE}$ signals is automatically selected. When switching to the $\overline{RD}$, $\overline{WRL}$, and $\overline{WRH}$ combination, do not write to external memory until bit 2 of the processor mode register 0 (address 0004$_{16}$) has been set (Note).

Note 1: Before attempting to change the contents of the processor mode register 0, set bit 1 of the protect register (address 000A$_{16}$) to “1”.

Note 2: When using 16-bit data bus width for DRAM controller, select $\overline{RD}$, $\overline{WRL}$, and $\overline{WRH}$ signals.

Table 7.5 Operation of $\overline{RD}$, $\overline{WRL}$, and $\overline{WRH}$ signals

Data bus width	$\overline{RD}$	$\overline{WRL}$	$\overline{WRH}$	Status of external data bus
16-bit	L	H	H	Read data
	H	L	H	Write 1 byte of data to even address
	H	H	L	Write 1 byte of data to odd address
	H	L	L	Write data to both even and odd addresses
8-bit	H	L (Note)	Not used	Write 1 byte of data
	L	H (Note)	Not used	Read 1 byte of data

Note: It becomes $\overline{WR}$ signal.

Table 7.6 Operation of $\overline{RD}$, $\overline{WR}$, and $\overline{BHE}$ signals

Data bus width	$\overline{RD}$	$\overline{WR}$	$\overline{BHE}$	A0	Status of external data bus
16-bit	H	L	L	H	Write 1 byte of data to odd address
	L	H	L	H	Read 1 byte of data from odd address
	H	L	H	L	Write 1 byte of data to even address
	L	H	H	L	Read 1 byte of data from even address
	H	L	L	L	Write data to both even and odd addresses
	L	H	L	L	Read data from both even and odd addresses
8-bit	H	L	Not used	H / L	Write 1 byte of data
	L	H	Not used	H / L	Read 1 byte of data

(4) ALE signal

The ALE signal latches the address when accessing the multiplex bus space. Latch the address when the ALE signal falls. The ALE output pin is selected using bits 4 and 5 of the processor mode register 1 (address 0005_{16}).

The ALE signal is occurred regardless of internal area and external area.

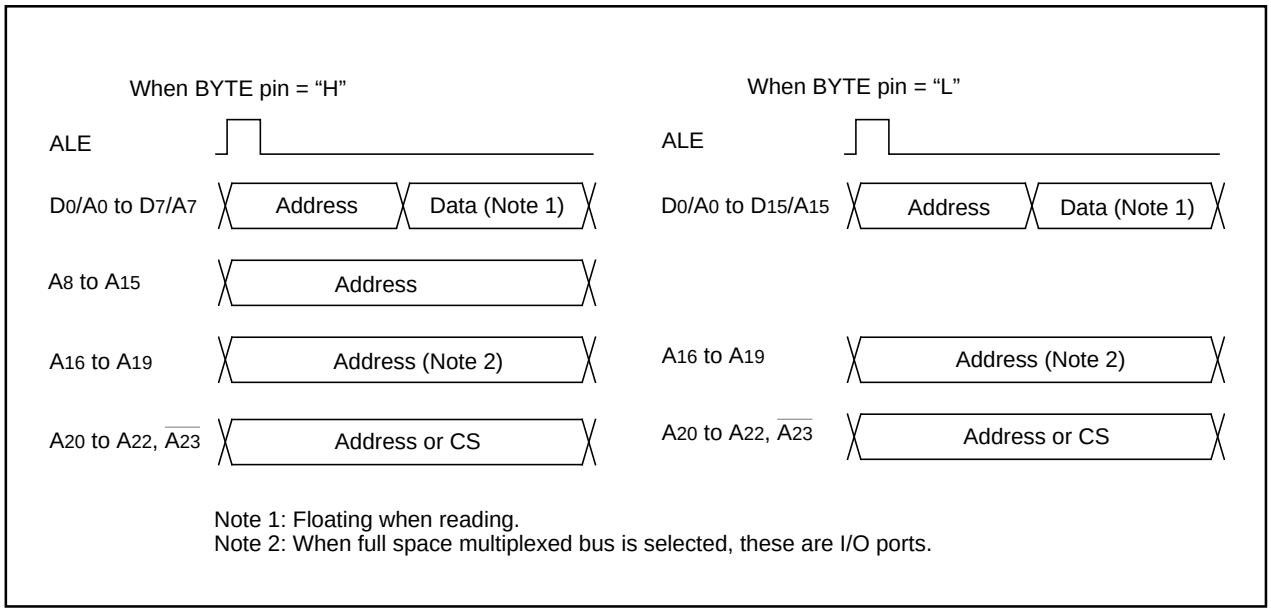

Figure 7.3 ALE signal and address/data bus

(5) Ready signal

The ready signal facilitates access of external devices that require a long time for access. As shown in Figure 7.2, inputting "L" to the $\overline{RDY}$ pin at the falling edge of BCLK causes the microcomputer to enter the ready state. Inputting "H" to the $\overline{RDY}$ pin at the falling edge of BCLK cancels the ready state. Table 7.7 shows the microcomputer status in the ready state. Figure 7.4 shows the example of the $\overline{RD}$ signal being extended using the $\overline{RDY}$ signal.

Ready is valid when accessing the external area during the bus cycle in which the software wait is applied. When no software wait is operating, the $\overline{RDY}$ signal is ignored, but even in this case, unused pins must be pulled up.

Table 7.7 Microcomputer status in ready state (Note)

Item	Status
Oscillation	On
$\overline{RD}$/$\overline{WR}$ signal, address bus, data bus, $\overline{CS}$ ALE signal, $\overline{HLDA}$, programmable I/O ports	Maintain status when ready signal received
Internal peripheral circuits	On

Note: The ready signal cannot be received immediately prior to a software wait.

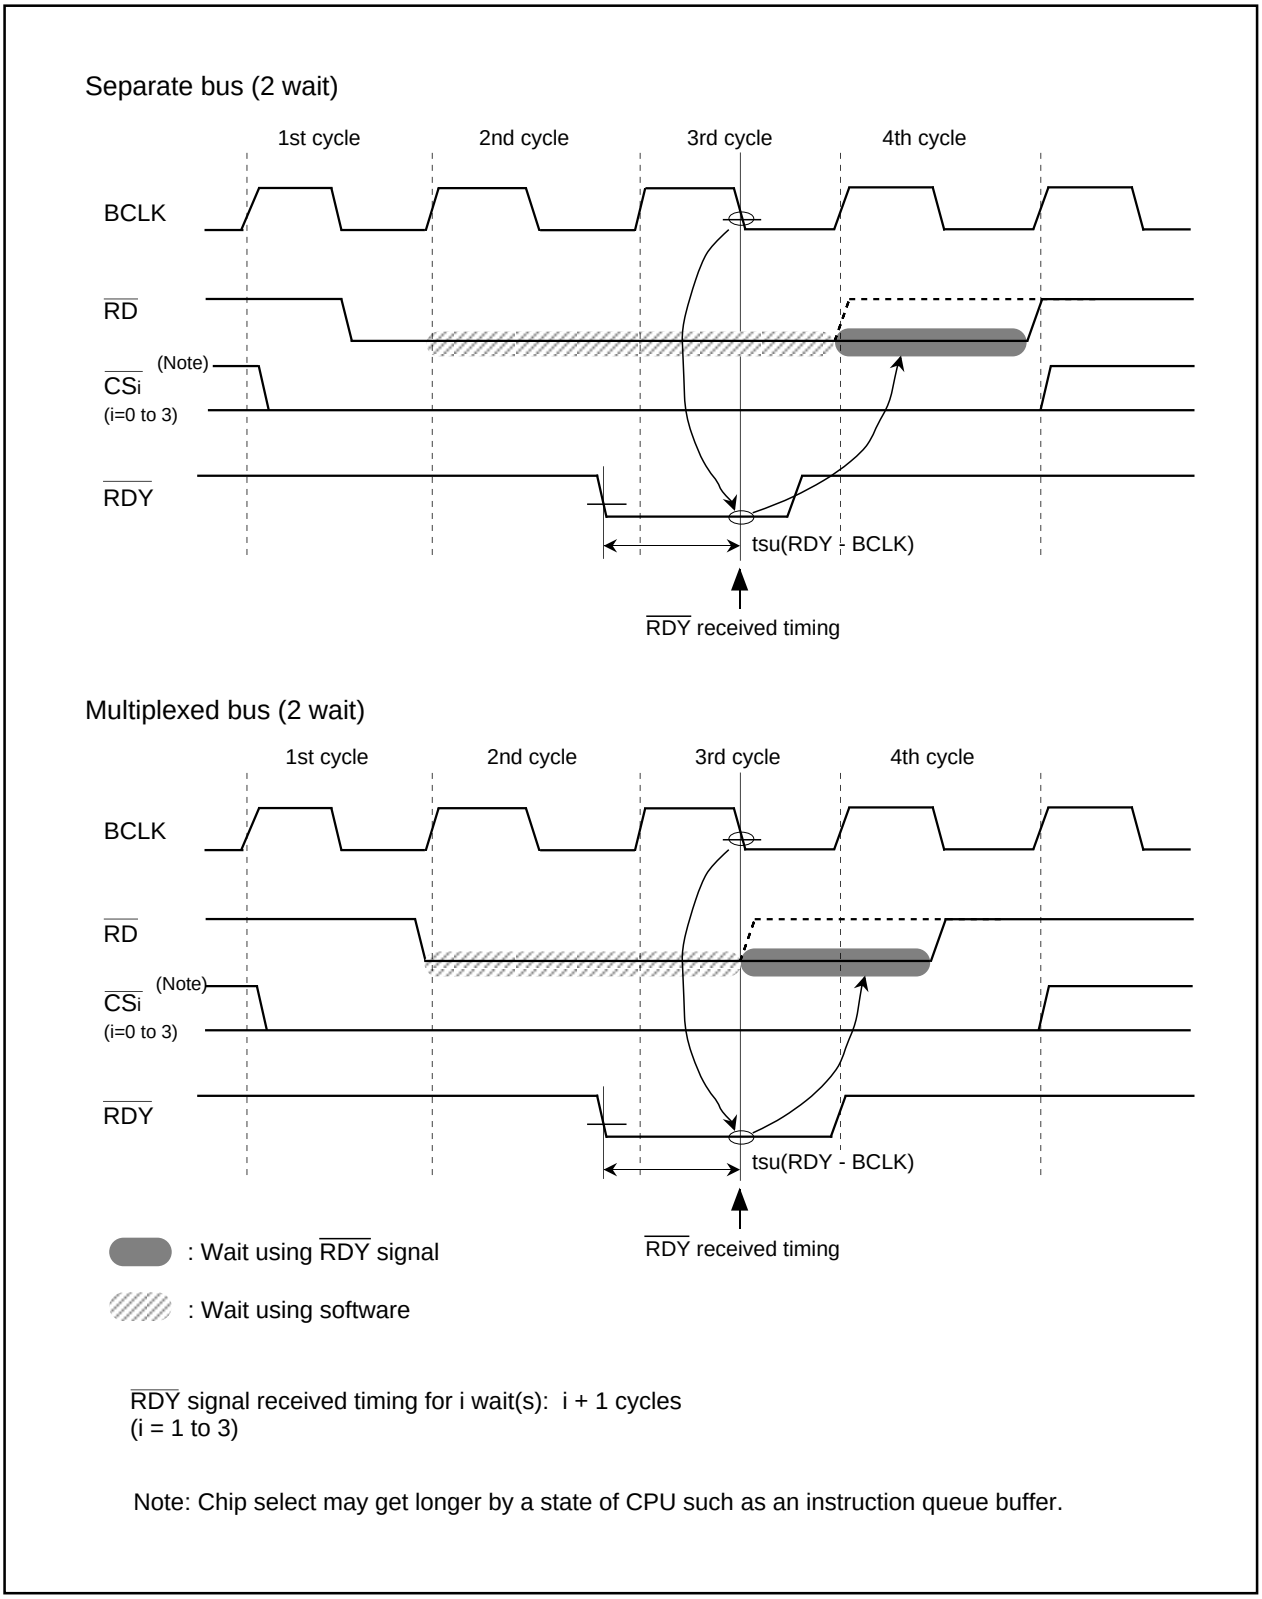

Figure 7.4 Example of RD signal extended by RDY signal

(6) Hold signal

The hold signal is used to transfer the bus privileges from the CPU to the external circuits. Inputting “L” to the $\overline{\text{HOLD}}$ pin places the microcomputer in the hold state at the end of the current bus access. This status is maintained and “L” is output from the $\overline{\text{HLDA}}$ pin as long as “L” is input to the $\overline{\text{HOLD}}$ pin. Table 7.8 shows the microcomputer status in the hold state. The bus is used in the following descending order of priority: $\overline{\text{HOLD}}$, DMAC, CPU.

$\overline{\text{HOLD}}$ > DMAC > CPU

Figure 7.5 Example of $\overline{\text{RD}}$ signal extended by $\overline{\text{RDY}}$ signal

Table 7.8 Microcomputer status in hold state

Item		Status
Oscillation		ON
$\overline{\text{RD}}$/$\overline{\text{WR}}$ signal, address bus, data bus, $\overline{\text{CS}}$, $\overline{\text{BHE}}$		Floating
Programmable I/O ports	P0, P1, P2, P3, P4, P5 P6, P7, P8, P9, P10 P11, P12, P13, P14, P15 (Note)	Maintains status when hold signal is received
$\overline{\text{HLDA}}$		Output “L”
Internal peripheral circuits		ON (but watchdog timer stops)
ALE signal		Undefined

Note: Ports P11 to P15 exist in 144-pin version.

(7) External bus status when accessing to internal area

Table 7.9 shows external bus status when accessing to internal area

Table 7.9 External bus status when accessing to internal area

Item		SFR accessing status	Internal ROM/RAM accessing status
Address bus		Remain address of external area accessed immediately before	
Data bus	When read	Floating	
	When write	Floating	
$\overline{\text{RD}}$, $\overline{\text{WR}}$, $\overline{\text{WRL}}$, $\overline{\text{WRH}}$		Output "H"	
$\overline{\text{BHE}}$		Remain external area status accessed immediately before	
$\overline{\text{CS}}$		Output "H"	
ALE		ALE output	

(8) BCLK output

BCLK output can be selected by bit 7 of the processor mode register 0 (address 0004_{16} :PM07) and bit 1 and bit 0 of the system clock select register 0 (address 0006_{16} :CM01, CM00). Setting PM07 to “0” and CM01 and CM00 to “00” outputs the BCLK signal from $P5_3$. However, in single chip mode, BCLK signal is not output. When setting PM07 to “1”, the function is as set by CM01 and CM00.

(9) DRAM controller signals ($\overline{RAS}$, $\overline{CASL}$, $\overline{CASH}$, and $\overline{DW}$)

Bits 1, 2, and 3 of the DRAM control register (address 0004_{16}) select the DRAM space and enable the DRAM controller. The DRAM controller signals are then output when the DRAM area is accessed. Table 7.10 shows the operation of the respective signals.

Table 7.10 Operation of $\overline{RAS}$, $\overline{CASL}$, $\overline{CASH}$, and $\overline{DW}$ signals

Data bus width	$\overline{RAS}$	$\overline{CASL}$	$\overline{CASH}$	$\overline{DW}$	Status of external data bus
16-bit	L	L	L	H	Read data from both even and odd addresses
	L	L	L	H	Read 1 byte of data from even address
	L	H	H	H	Read 1 byte of data from odd address
	L	L	L	L	Write data to both even and odd addresses
	L	L	H	L	Write 1 byte of data to even address
	L	H	L	L	Write 1 byte of data to odd address
8-bit	L	L	Not used	H	Read 1 byte of data
	L	L	Not used	L	Write 1 byte of data

(10) Software wait

A software wait can be inserted by setting the wait control register (address 0008_{16}). Figure 7.6 shows wait control register

You can use the external area I wait bits (where I = 0 to 3) of the wait control register to specify from “No wait” to “3 waits” for the external memory area. When you select “No wait”, the read cycle is executed in the BCLK1 cycle. The write cycle is executed in the BCLK2 cycle (which has 1 wait). When accessing external memory using the multiplex bus, access has two waits regardless of whether you specify “No wait” or “1 wait” in the appropriate external area i wait bits in the wait control register.

Software waits in the internal memory (internal RAM and internal ROM) can be set using the internal memory wait bits of the processor mode register 1 (address 0005_{16}). Setting the internal memory wait bit = “0” sets “No wait”. Setting the internal memory wait bit = “1” specifies a wait.

The SFR area is not affected by the setting of the internal memory wait bit and is always accessed in the BCLK2 cycle.

Table 7.11 shows the software waits and bus cycles. Figures 7.7 and 7.8 show example bus timings when using software waits.

Wait control register

b7	b6	b5	b4	b3	b2	b1	b0

Symbol	Address	When reset
WCR	0008$_{16}$	FF$_{16}$

Bit symbol	Bit name	Function	R	W
WCR0	External area 0 wait bit	b1 b0 0 0: Without wait 0 1: With 1 wait 1 0: With 2 wait 1 1: With 3 wait	○	○
WCR1			○	○
WCR2	External area 1 wait bit	b3 b2 0 0: Without wait 0 1: With 1 wait 1 0: With 2 wait 1 1: With 3 wait	○	○
WCR			○	○
WCR4	External area 2 wait bit	b5 b4 0 0: Without wait 0 1: With 1 wait 1 0: With 2 wait 1 1: With 3 wait	○	○
WCR5			○	○
WCR6	External area 3 wait bit	b7 b6 0 0: Without wait 0 1: With 1 wait 1 0: With 2 wait 1 1: With 3 wait	○	○
WCR7			○	○

Note 1: When using the multiplex bus configuration, there are two waits regardless of whether you have specified "No wait" or "1 wait". However, you can specify "2 wait" or "3 wait".
Note 2: When using the separate bus configuration, the read bus cycle is executed in the BCLK1 cycle, and the write cycle is executed in the BCLK2 cycle (with 1 wait).

Figure 7.6 Wait control register

Table 7.11 Software waits and bus cycles

Area	Bus status	Internal memory wait bit	External memory area i wait bit	Bus cycle
SFR	———	———	———	2 BCLK cycles
Internal ROM/RAM	———	0	———	1 BCLK cycle
	———	1	———	2 BCLK cycles
External memory area	Separate bus	———	00$_2$	Read :1 BCLK cycle Write : 2 BCLK cycles
			01$_2$	2 BCLK cycles
			10$_2$	3 BCLK cycles
			11$_2$	4 BCLK cycles
	Multiplex bus	———	00$_2$	3 BCLK cycle
			01$_2$	3 BCLK cycles
			10$_2$	3 BCLK cycles
			11$_2$	4 BCLK cycles

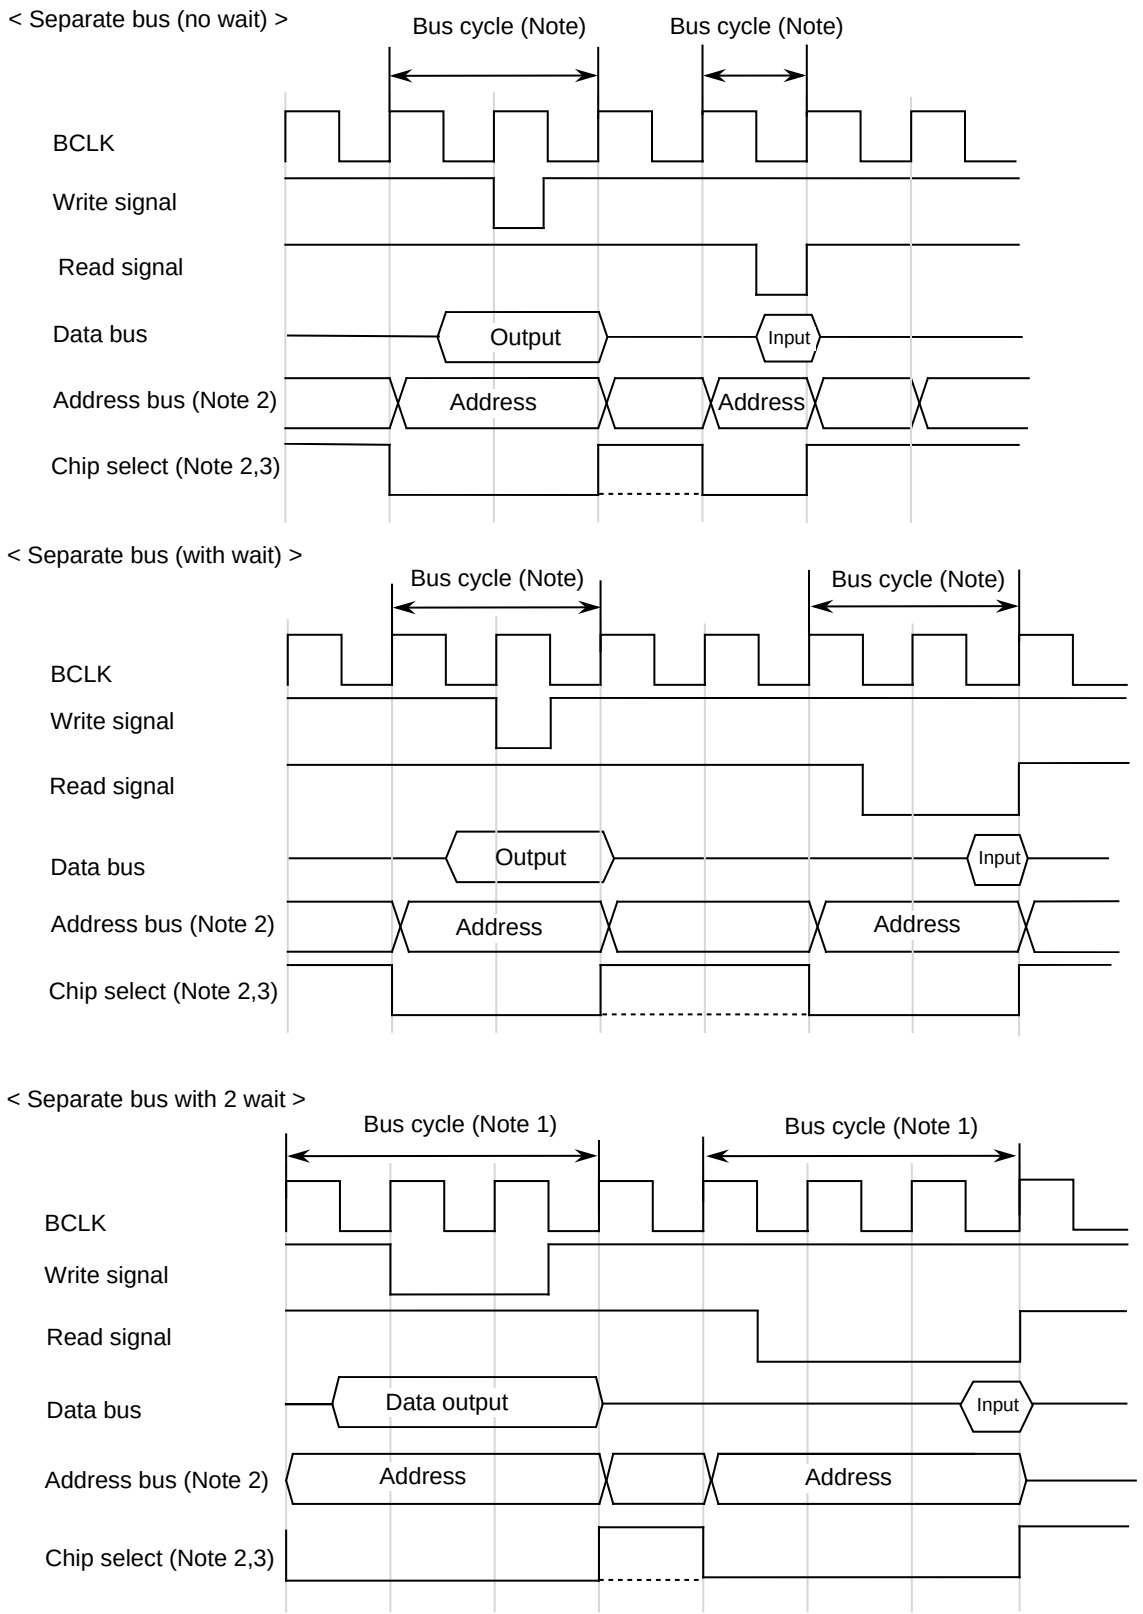

Note 1: This timing example shows bus cycle length. Read cycle and write cycle may be continued after this bus cycle.
Note 2: Address bus and chip select may get longer by a state of CPU such as an instruction queue buffer.
Note 3: When accessing same external area (same $\overline{CS}$ area) continuously, chip select may output continuously.

Figure 7.7 Typical bus timings using software wait

< Separate bus (with 3 wait) >

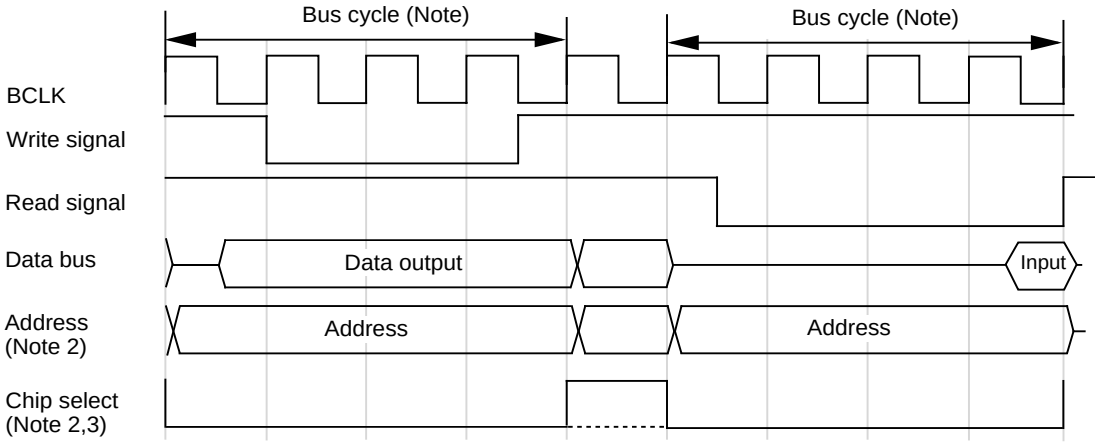

< Multiplexed bus (with 2 wait) >

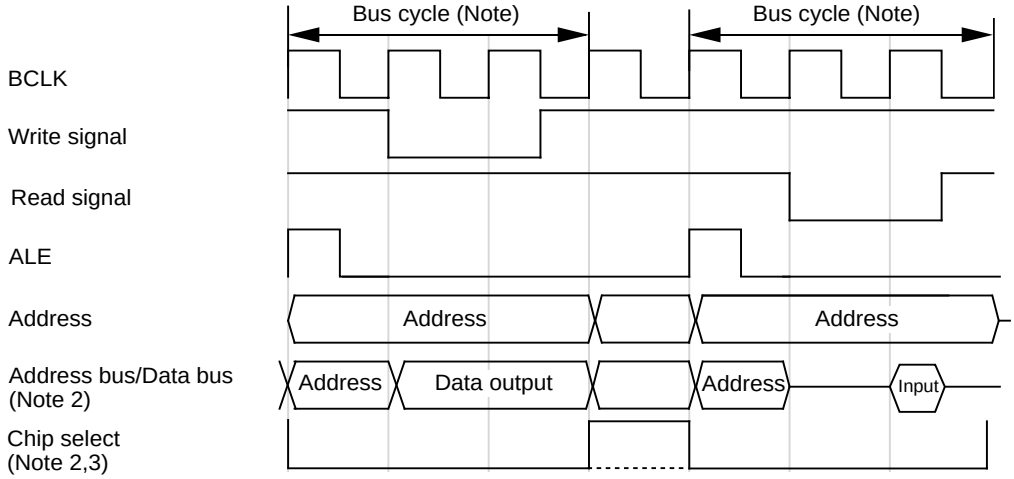

< Multiplexed bus (with 3 wait) >

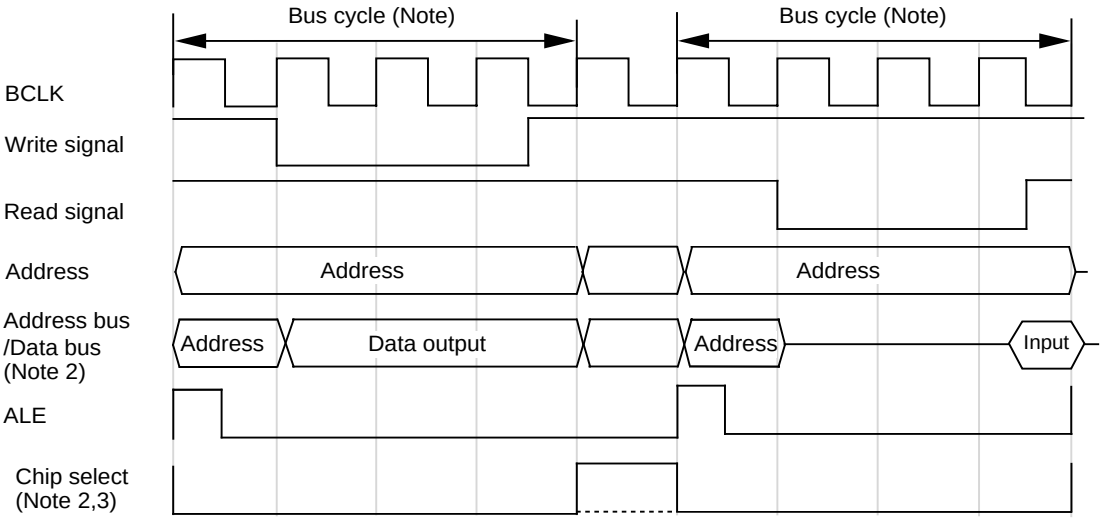

Note 1: This timing example shows bus cycle length. Read cycle and write cycle may be continued after this bus cycle.
Note 2: Address bus and chip select may get longer by a state of CPU such as an instruction queue buffer.
Note 3: When accessing same external area (same $\overline{CS}$ area) continuously, chip select may output continuously.

Figure 7.8 Typical bus timings using software wait

8. Clock Generating Circuit

The clock generating circuit contains two oscillator circuits that supply the operating clock sources to the CPU and internal peripheral units.

Table 8.1 Main clock and sub clock generating circuits

	Main clock generating circuit	Sub clock generating circuit
Use of clock	• CPU's operating clock source • Internal peripheral units' operating clock source	• CPU's operating clock source • Timer A/B's count clock source
Usable oscillator	Ceramic or crystal oscillator	Crystal oscillator
Pins to connect oscillator	XIN, XOUT	XCIN, XCOUT
Oscillation stop/restart function	Available	Available
Oscillator status immediately after reset	Oscillating	Stopped
Other	Externally derived clock can be input	

8.1 Example of oscillator circuit

Figure 8.1 shows some examples of the main clock circuit, one using an oscillator connected to the circuit, and the other one using an externally derived clock for input. Figure 8.2 shows some examples of sub clock circuits, one using an oscillator connected to the circuit, and the other one using an externally derived clock for input. Circuit constants in Figures 8.1 and 8.2 vary with each oscillator used. Use the values recommended by the manufacturer of your oscillator.

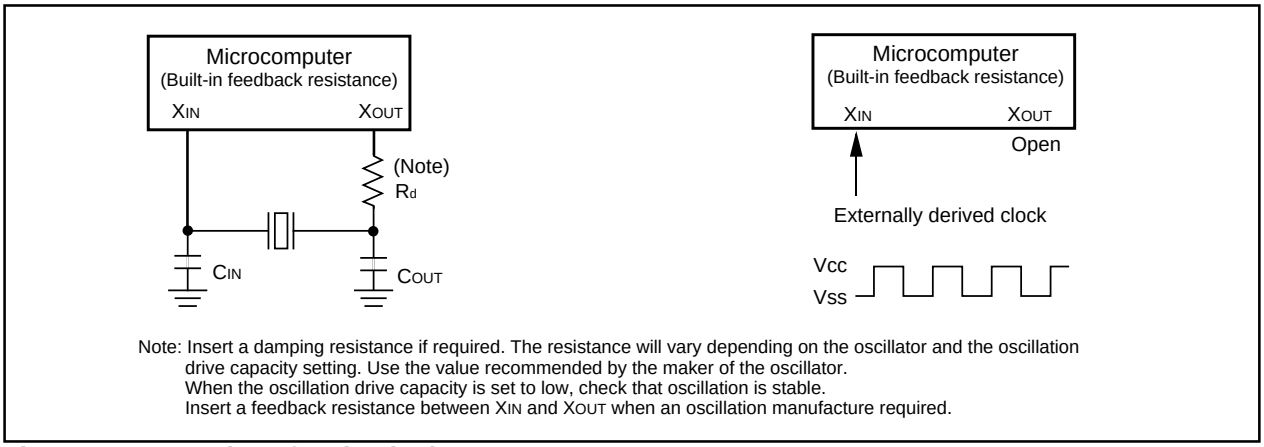

Note: Insert a damping resistance if required. The resistance will vary depending on the oscillator and the oscillation drive capacity setting. Use the value recommended by the maker of the oscillator.
When the oscillation drive capacity is set to low, check that oscillation is stable.
Insert a feedback resistance between XIN and XOUT when an oscillation manufacture required.

Figure 8.1 Examples of main clock

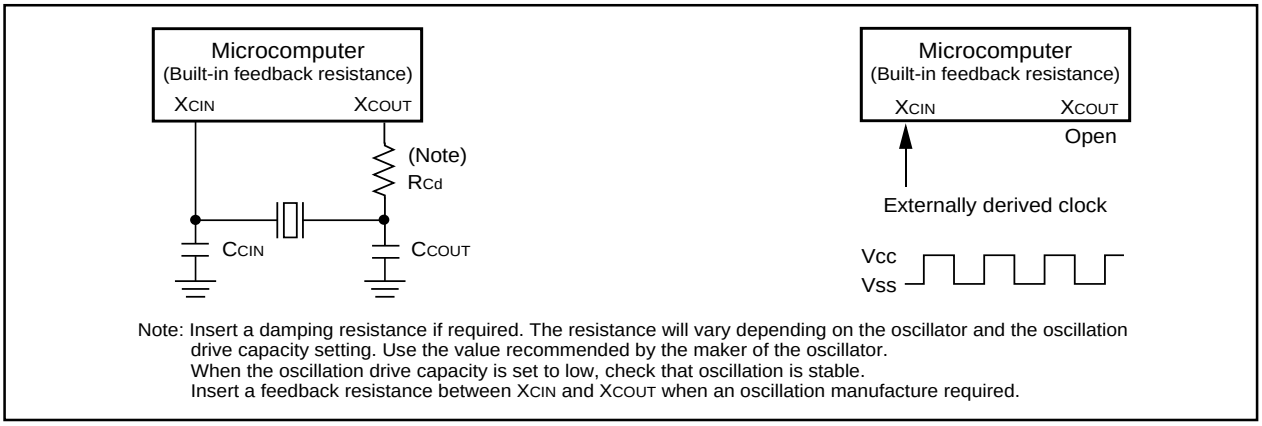

Note: Insert a damping resistance if required. The resistance will vary depending on the oscillator and the oscillation drive capacity setting. Use the value recommended by the maker of the oscillator.
When the oscillation drive capacity is set to low, check that oscillation is stable.
Insert a feedback resistance between XCIN and XCOUT when an oscillation manufacture required.

Figure 8.2 Examples of sub clock

8.2 Clock Control

Figure 8.3 shows the block diagram of the clock generating circuit.

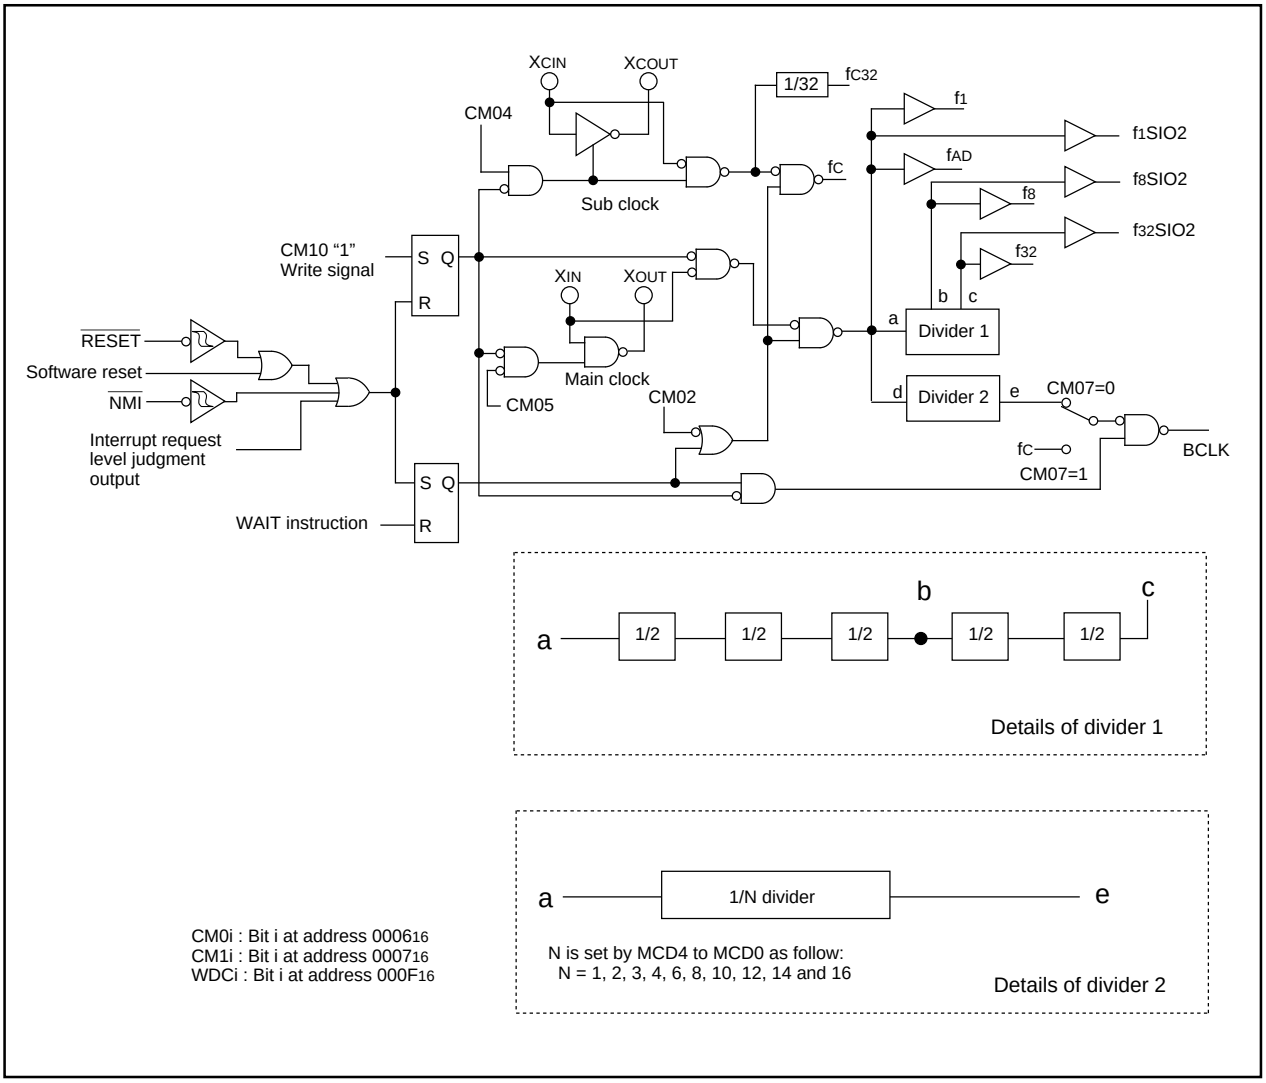

Figure 8.3 Clock generating circuit

The following paragraphs describes the clocks generated by the clock generating circuit.

(1) Main clock

The main clock is generated by the main clock oscillation circuit. After a reset, the clock is divided by 8 to the BCLK. The clock can be stopped using the main clock stop bit (bit 5 at address 0006_{16}). Switching to the sub clock oscillation as CPU operating clock source before stopping the clock reduces the power dissipation.

When the main clock is stoped (bit 5 at address 0006_{16} =1) or the mode is shifted to stop mode (bit 0 at address 0007_{16} =1), the main clock division register (address $000C_{16}$) is set to the division by 8 ("08_{16}"). After the oscillation of the main clock oscillation circuit has stabilized, the drive capacity of the main clock oscillation circuit can be reduced using the XIN-XOUT drive capacity select bit (bit 5 at address 0007_{16}). Reducing the drive capacity of the main clock oscillation circuit reduces the power dissipation. This bit defaults to “1” when shifting from high-speed or middle-speed mode to stop mode and after a reset.

This bit remains in low-speed and low power dissipation mode.

(2) Sub clock

The sub clock is generated by the sub clock oscillation circuit. No sub clock is generated after a reset. After oscillation is started using the port Xc select bit (bit 4 at address 0006_{16}), the sub clock can be selected as the BCLK by using the system clock select bit (bit 7 at address 0006_{16}). However, be sure that the sub clock oscillation has fully stabilized before switching.

After the oscillation of the sub clock oscillation circuit has stabilized, the drive capacity of the sub clock oscillation circuit can be reduced using the XCIN-XCOUT drive capacity select bit (bit 3 at address 0006_{16}). Reducing the drive capacity of the sub clock oscillation circuit reduces the power dissipation. This bit changes to “1” when shifting to stop mode and at a reset.

When the sub clock is used, set ports $P8_6$ and $P8_7$ to no pull-up resistance with the input port.

(3) BCLK

The BCLK is the clock that drives the CPU, and is either fc or is derived by dividing the main clock by 1, 2, 3, 4, 6, 8, 10, 12, 14 or 16. The BCLK is derived by dividing the main clock by 8 after a reset.

This signal is output from BCLK pin using CM01, CM00 and PM07 in memory expansion mode and microprocessor mode.

When main clock is stoped or shifting to stop mode, the main clock division register (address $000C_{16}$) is set to the division by 8 ("08_{16}").

(4) Peripheral function clock

- f_1, f_8, f_{32}, f_{1SIO2}, f_{8SIO2}, f_{32SIO2}

The clock for the peripheral devices is derived from the main clock or by dividing it by 8 or 32. The peripheral function clock is stopped by stopping the main clock or by setting the WAIT peripheral function clock stop bit (bit 2 at 0006_{16}) to “1” and then executing a WAIT instruction.

- f_{AD}

This clock has the same frequency as the main clock and is used for A/D conversion.

(5) f_{C32}

This clock is derived by dividing the sub clock by 32. It is used for the timer A and timer B counts.

(6) f_C

This clock has the same frequency as the sub clock. It is used for BCLK and for the watchdog timer.

Figure 8.4 shows the system clock control registers 0 and 1 and Figure 8.5 shows main clock division register.

System clock control register 0 (Note 1)

b7	b6	b5	b4	b3	b2	b1	b0

Symbol: CM0 | Address: 0006$_{16}$ | When reset: 08$_{16}$

Bit symbol	Bit name	Function	R	W
CM00	Clock output function select bit (Note 2)	b1 b0 0 0 : I/O port P53 0 1 : fC output (Note 3) 1 0 : f8 output (Note 3) 1 1 : f32 output (Note 3)	O	O
CM01			O	O
CM02	WAIT peripheral function clock stop bit	0 : Do not stop peripheral clock in wait mode 1 : Stop peripheral clock in wait mode (Note 10)	O	O
CM03	XCIN-XCOUT drive capacity select bit (Note 4)	0 : LOW 1 : HIGH	O	O
CM04	Port XC select bit	0 : I/O port 1 : XCIN-XCOUT generation (Note 11)	O	O
CM05	Main clock (XIN-XOUT) stop bit (Note 5, 6)	0 : On 1 : Off (Note 7)	O	O
CM06	Watchdog timer function select bit	0 : Watchdog timer interrupt 1 : Reset (Note 8)	O	O
CM07	System clock select bit (Note 9)	0 : XIN, XOUT 1 : XCIN, XCOUT	O	O

Note 1: Set bit 0 of the protect register (address 000A$_{16}$) to “1” before writing to this register.
Note 2: When outputting BCLK (bit 7 of processor mode register 0 is "0"), set these bits to "00". When outputting ALE to P5$_3$ (bit 5 and 4 of processor mode register 0 is "01"), set these bits to "00". The port P5$_3$ function is not selected even when you set "00" in microprocessor or memory expansion mode and bit 7 of the processor mode register 0 is "1".
Note 3: When selecting fC, f8 or f32 in single chip mode, must use P5$_7$ as input port.
Note 4: Changes to “1” when shifting to stop mode or reset.
Note 5: When entering the power saving mode, the main clock is stopped using this bit. To stop the main clock, set system clock stop bit (CM07) to "1" while an oscillation of sub clock is stable. Then set this bit to "1".
Note 6: When this bit is "1", XOUT is "H". Also, the internal feedback resistance remains ON, so XIN is pulled up to XOUT ("H" level) via the feedback resistance.
Note 7: When the main clock is stopped, the main clock division register (address 000C$_{16}$) is set to the division by 8 mode.
Note 8: When "1" has been set once, "0" cannot be written by software.
Note 9: To set CM07 "1" from "0", first set CM04 to "1", and an oscillation of sub clock is stable. Then set CM07. Also, to set CM07 "0" from "1", first set CM05 to "1", and an oscillation of main clock is stable. Then set CM07. Do not rewrite CM04 and CM05 simultaneously.
Note 10: fc$_{32}$ is not included.
Note 11: When XCIN-XCOUT is used, set port P8$_6$ and P8$_7$ to no pull-up resistance with the input port.

System clock control register 1 (Note 1)

b7	b6	b5	b4	b3	b2	b1	b0
0	0		0	0	0	0	

Symbol: CM1 | Address: 0007$_{16}$ | When reset: 20$_{16}$

Bit symbol	Bit name	Function	R	W
CM10	All clock stop control bit (Note 3)	0 : Clock on 1 : All clocks off (stop mode) (Note 4)	O	O
Reserved bit		Always set to “0”	O	O
CM15	XIN-XOUT drive capacity select bit (Note 2)		O	O
Reserved bit		Always set to “0”	O	O

Note 1: Set bit 0 of the protect register (address 000A$_{16}$) to “1” before writing to this register.
Note 2: Changes to “1” when shifting from high-speed or middle-speed mode to stop mode or reset. This bit is remained in low speed or low power dissipation mode.
Note 3: When this bit is "1", XOUT is "H", and the internal feedback resistance is disabled. XCIN and XCOUT are high-inpedance.
Note 4: When the main clock is stopped, the main clock division register (address 000C$_{16}$) is set to the division by 8 mode.

Figure 8.4 System clock control registers 0 and 1

Main clock division register (Note 1)

b7	b6	b5	b4	b3	b2	b1	b0

Symbol	Address	When reset
MCD	$000C_{16}$	$XXX01000_2$

Bit symbol	Bit name	Function	R	W
MCD0	Main clock division select bit (Note 2)	b4 b3 b2 b1 b0 1 0 0 1 0 : No division mode 0 0 0 1 0 : Division by 2 mode 0 0 0 1 1 : Division by 3 mode 0 0 1 0 0 : Division by 4 mode 0 0 1 1 0 : Division by 6 mode 0 1 0 0 0 : Division by 8 mode 0 1 0 1 0 : Division by 10 mode 0 1 1 0 0 : Division by 12 mode 0 1 1 1 0 : Division by 14 mode 0 0 0 0 0 : Division by 16 mode	○	○
MCD1			○	○
MCD2			○	○
MCD3			○	○
MCD4			○	○
Nothing is assigned. When write, set "0". When read, their contents are indeterminate.			—	—

Note 1: Set bit 0 of the protect register (address $000A_{16}$) to “1” before writing to this register.
Note 2: These bits are "01000_2" (8-division mode) when main clock is stopped or you shift to stop mode.
Note 3: Do not attempt to set combinations of values other than those shown in this figure.

Figure 8.5 Main clock division register

8.3 Clock Output

In single chip mode, when the BCLK output function select bit (bit 7 at address 0004_{16} :PM07) is “1”, you can output f_8, f_{32}, or fc from the $P5_3$/BCLK/ALE/CLKOUT pins by setting the clock output function select bits (bits 1 and 0 at address 0006_{16} :CM01, CM00).(Note)

Even when you set PM07 to “0” and CM01 and CM00 to “00_2”, no BCLK is output.

In memory expansion mode or microprocessor mode, when the ALE pin select bits (bits 5 and 4 at address 0005_{16} :PM15, PM14) are other than “01_2($P5_3$/BCLK)” and PM07 is “1”, you can output f_8, f_{32}, or fc from the $P5_3$/BCLK/ALE/CLKOUT pins by setting CM01 and CM00.

In memory expansion mode or microprocessor mode, when PM15 and PM14 are other than “01_2($P5_3$/BCLK)” and PM07 is “0” and CM01 and CM00 to “00_2”, BCLK is output from the $P5_3$/BCLK/ALE/CLKOUT pins.

When stopping clock output in memory expansion mode or microprocessor mode, set PM07 to “1” and CM01 and CM00 to “00_2” (IO port $P5_3$). The $P5_3$ function is not selected. When PM15 and PM14 are “01_2 ($P5_3$/BCLK)” and CM01 and CM00 are “00_2”, PM07 is ignored and the $P5_3$ pin is set for ALE output.

When the WAIT peripheral function clock stop bit (bit 2 at address 0006_{16}) is set to “1”, f_8 or f_{32} clock output is stopped when a WAIT command is executed.

Table 8.2 shows clock output setting (single chip mode) and Table 8.3 shows clock output setting (memory expansion/microprocessor mode).

Note :When outputting the f_8, f_{32} or fc from port $P5_3$/BCLK/ALE/CLKOUT pin in single chip mode, use port $P5_7$/$\overline{RDY}$ as an input only port.

Table 8.2 Clock output setting (single chip mode)

BCLK output function select bit	Clock output function select bit		ALE pin select bit		P53/BCLK/ALE/CLKOUT pin function
PM07	CM01	CM00	PM15	PM14	
0/1	0	0	Ignored	Ignored	P53 I/O port
1	0	1	Ignored	Ignored	fc output (Note)
1	1	0	Ignored	Ignored	f8 output (Note)
1	1	1	Ignored	Ignored	f32 output (Note)

Note :Must use P57 as input port.

Table 8.3 Clock output setting (memory expansion/microprocessor mode)

BCLK output function select bit	Clock output function select bit		ALE pin select bit		P53/BCLK/ALE/CLKOUT pin function
PM07	CM01	CM00	PM15	PM14	
0	0	0	0 1 1	0 0 1	BCLK output
1	0	0			"L" output (not P53)
1	0	1			fc output
1	1	0			f8 output
1	1	1			f32 output
Ignored	0	0	0	1	ALE output

8.4 Stop Mode

Writing “1” to the all-clock stop control bit (bit 0 at address 0007$_{16}$) stops all oscillation and the microcomputer enters stop mode. In stop mode, the content of the internal RAM is retained provided that V_{CC} remains above 2V.

Because the oscillation of BCLK, f_1 to f_{32}, f_{1SIO2} to f_{32SIO2}, fc, f_{C32}, and f_{AD} stops in stop mode, peripheral functions such as the A/D converter and watchdog timer do not function. However, timer A and timer B operate provided that the event counter mode is set to an external pulse, and UARTi(i = 0 to 2) functions provided an external clock is selected. Table 8.4 shows the status of the ports in stop mode.

Stop mode is cancelled by a hardware reset or interrupt.

When using an interrupt to exit stop mode, the relevant interrupt must have been enabled and set to a priority level above the level set by the interrupt priority set bits (bits 2, 1, and 0 at address 009F$_{16}$) for exiting a stop/wait state. Set the interrupt priority set bits for the exit from a stop/wait state to the same level as the flag register (FLG) processor interrupt level (IPL). Figure 8.6 shows the exit priority register.

The priority level of the interrupt which is not used to cancel stop mode, must have been changed to 0.

When exiting stop mode using an interrupt, the relevant interrupt routine is executed.

If only a hardware reset or an $\overline{NMI}$ interrupt is used to cancel stop mode, change the priority level of all interrupt to 0, then shift to stop mode.

When shifting to stop mode and reset, the main clock division register (000C$_{16}$) is set to “08$_{16}$”.

Table 8.4 Port status during stop mode

Pin		Memory expansion mode Microprocessor mode	Single-chip mode
Address bus, data bus, $\overline{CS0}$ to $\overline{CS3}$, $\overline{BHE}$		Retains status before stop mode	
$\overline{RD}$, $\overline{WR}$, $\overline{WRL}$, $\overline{WRH}$, $\overline{DW}$, $\overline{CASL}$, $\overline{CASH}$		"H" (Note)	
$\overline{RAS}$		"H" (Note)	
$\overline{HLDA}$, BCLK		"H"	
ALE		"H"	
Port		Retains status before stop mode	Retains status before stop mode
CLK_{OUT}	When fc selected	"H"	"H"
	When f_8, f_{32} selected	Retains status before stop mode	Retains status before stop mode

Note :When self-refresh is done in operating DRAM control, $\overline{CAS}$ and $\overline{RAS}$ becomes "L".

Exit priority register

b7	b6	b5	b4	b3	b2	b1	b0
✕	✕	✕	✕				

Symbol: RLVL
Address: 009F16
When reset: XXXX00002

Bit symbol	Bit	Function	R	W
RLVL0	Interrupt priority set bit for exiting Stop/Wait state (Note 1,2)	b2 b1 b0 0 0 0 : Level 0 0 0 1 : Level 1 0 1 0 : Level 2 0 1 1 : Level 3 1 0 0 : Level 4 1 0 1 : Level 5 1 1 0 : Level 6 1 1 1 : Level 7	○	○
RLVL1			○	○
RLVL2			○	○
FSIT	High-speed interrupt set bit (Note 3)	0: Interrupt priority level 7 = normal interrupt 1: Interrupt priority level 7 = high-speed interrupt	○	○
Nothing is assigned. When write, set "0". When read, their contents are indeterminate.			—	—

Note 1: Exits the Stop or Wait mode when the requested interrupt priority level is higher than that set in the exit priority register.
Note 2: Set to the same value as the processor interrupt priority level (IPL) set in the flag register (FLG).
Note 3: The high-speed interrupt can only be specified for interrupts with interrupt priority level 7. Specify interrupt priority level 7 for only one interrupt.

Figure 8.6 Exit priority register

8.5 Wait Mode

When a WAIT instruction is executed, the BCLK stops and the microcomputer enters the wait mode. In this mode, oscillation continues but the BCLK and watchdog timer stop. Writing “1” to the WAIT peripheral function clock stop bit and executing a WAIT instruction stops the clock being supplied to the internal peripheral functions, allowing power dissipation to be reduced. Table 8.5 shows the status of the ports in wait mode.

Wait mode is cancelled by a hardware reset or interrupt. If an interrupt is used to cancel wait mode, the microcomputer restarts using as BCLK the clock that had been selected when the WAIT instruction was executed.

When using an interrupt to exit Wait mode, the relevant interrupt must have been enabled and set to a priority level above the level set by the interrupt priority set bits for exiting a stop/wait state (bits 2, 1, and 0 at address $009F_{16}$). Set the interrupt priority set bits for the exit from a stop/wait state to the same level as the flag register (FLG) processor interrupt level (IPL).

The priority level of the interrupt which is not used to cancel wait mode, must have been changed to 0.

When using an interrupt to exit Wait mode, the microcomputer resumes operating the clock that was operating when the WAIT command was executed as BCLK from the interrupt routine.

If only a hardware reset or an $\overline{NMI}$ interrupt is used to cancel stop mode, change the priority level of all interrupt to 0, then shift to wait mode.

Table 8.5 Port status during wait mode

Pin		Memory expansion mode Microprocessor mode	Single-chip mode
Address bus, data bus, $\overline{CS0}$ to $\overline{CS3}$, $\overline{BHE}$		Retains status before wait mode	
$\overline{RD}$, $\overline{WR}$, $\overline{WRL}$, $\overline{WRH}$, $\overline{DW}$, $\overline{CASL}$, $\overline{CASH}$		“H” (Note)	
$\overline{RAS}$		“H” (Note)	
$\overline{HLDA}$,BCLK		“H”	
ALE		“L”	
Port		Retains status before wait mode	Retains status before wait mode
CLKOUT	When fC selected	Does not stop	
	When f8, f32 selected	Does not stop when the WAIT peripheral function clock stop bit is “0”. When the WAIT peripheral function clock stop bit is “1”, the status immediately prior to entering wait mode is maintained.	

Note :When self-refresh is done in operating DRAM control, $\overline{CAS}$ and $\overline{RAS}$ becomes “L”.

8.6 Status Transition of BCLK

Power dissipation can be reduced and low-voltage operation achieved by changing the count source for BCLK. Table 8.6 shows the operating modes corresponding to the settings of system clock control registers 0 and main clock division register.

After a reset, operation defaults to division by 8 mode. When shifting to stop mode, reset or stopping main clock, the main clock division register (address $000C_{16}$) is set to "08_{16}".

(1) Division by 2 mode

The main clock is divided by 2 to obtain the BCLK.

(2) Division by 3 mode

The main clock is divided by 3 to obtain the BCLK.

(3) Division by 4 mode

The main clock is divided by 4 to obtain the BCLK.

(4) Division by 6 mode

The main clock is divided by 6 to obtain the BCLK.

(5) Division by 8 mode

The main clock is divided by 8 to obtain the BCLK. After reset, this mode is executed. Note that oscillation of the main clock must have stabilized before transferring from this mode to no-division, division by 2, 6, 10, 12, 14 and 16 mode.

Oscillation of the sub clock must have stabilized before transferring to low-speed and low power dissipation mode.

(6) Division by 10 mode

The main clock is divided by 10 to obtain the BCLK.

(7) Division by 12 mode

The main clock is divided by 12 to obtain the BCLK.

(8) Division by 14 mode

The main clock is divided by 14 to obtain the BCLK.

(9) Division by 16 mode

The main clock is divided by 16 to obtain the BCLK.

(10) No-division mode

The main clock is divided by 1 to obtain the BCLK.

(11) Low-speed mode

f_C is used as BCLK. Note that oscillation of both the main and sub clocks must have stabilized before transferring from this mode to another or vice versa. At least 2 to 3 seconds are required after the sub clock starts. Therefore, the program must be written to wait until this clock has stabilized immediately after powering up and after stop mode is cancelled.

(12) Low power dissipation mode

f_C is the BCLK and the main clock is stopped.

When the main clock is stoped, the main clock division register (address $000C_{16}$) is set to the division by 8 mode.

Note: When count source of BCLK is changed from clock A to clock B (XIN to XCIN or XCIN to XIN), clock B needs to be stable before changing. Please wait to change modes until after oscillation has stabilized.

Table 8.6 Operating modes dictated by settings of system clock control register 0 and main clock division register

CM07	CM05	CM04	MCD4	MCD3	MCD2	MCD1	MCD0	Operating mode of BCLK
0	0	Invalid	1	0	0	1	0	No division
0	0	Invalid	0	0	0	1	0	Division by 2 mode
0	0	Invalid	0	0	0	1	1	Division by 3 mode
0	0	Invalid	0	0	1	0	0	Division by 4 mode
0	0	Invalid	0	0	1	1	0	Division by 6 mode
0	0	Invalid	0	1	0	0	0	Division by 8 mode
0	0	Invalid	0	1	0	1	0	Division by 10 mode
0	0	Invalid	0	1	1	0	0	Division by 12 mode
0	0	Invalid	0	1	1	1	0	Division by 14 mode
0	0	Invalid	0	0	0	0	0	Division by 16 mode
1	0	1	Invalid	Invalid	Invalid	Invalid	Invalid	Low-speed mode
1	1	1	Invalid	Invalid	Invalid	Invalid	Invalid	Low power dissipation mode

CM0i: Clock control register 0 (address 0006_{16}) bit i

MCDi: Main clock division register (address $000C_{16}$) bit i

8.7 Power Saving

In Power Save modes, the CPU and oscillator stop and the operating clock is slowed to minimize power dissipation by the CPU. The following outlines the Power Save modes.
There are three power save modes.

(1) Normal operating mode

- **High-speed mode**
  In this mode, one main clock cycle forms BCLK. The CPU operates on the selected internal clock. The peripheral functions operate on the clocks specified for each respective function.
- **Medium-speed mode**
  In this mode, the main clock is divided into 2, 3, 4, 6, 8, 10, 12, 14, or 16 to form BCLK. The CPU operates on the selected internal clock. The peripheral functions operated on the clocks specified for each respective function.
- **Low-speed mode**
  In this mode, fc forms BCLK. The CPU operates on the fc clock. fc is the clock supplied by the subclock. The peripheral functions operate on the clocks specified for each respective function.
- **Low power-dissipation mode**
  This mode is selected when the main clock is stopped from low-speed mode. The CPU operates on the fc clock. fc is the clock supplied by the subclock. Only the peripheral functions for which the subclock was selected as the count source continue to run.

(2) Wait mode

CPU operation is halted in this mode. The oscillator continues to run.

(3) Stop mode

All oscillators stop in this mode. The CPU and internal peripheral functions all stop. Of all 3 power saving modes, power savings are greatest in this mode.

Figure 8.7 shows the clock transition between each of the three modes, (1), (2), and (3).

Transition of stop mode, wait mode

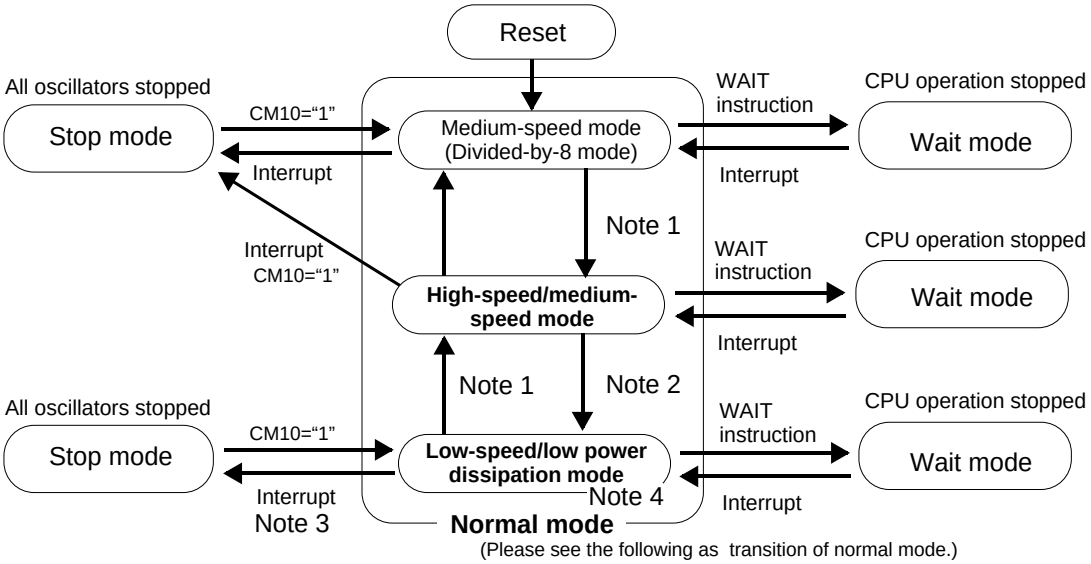

(Please see the following as transition of normal mode.)

Note 1: Switch clocks after oscillation of main clock is fully stable. After stop mode or when main clock oscillation is stopped, transferred to the middle speed mode.
Note 2: Switch clocks after oscillation of sub clock is fully stable.
Note 3: The main ckock devision register is set to the division by 8 mode (MCD="08_{16}").
Note 4: When shifting to low power dissipation mode, the main ckock devision register is set to the division by 8 mode (MCD="08_{16}").

Transition of normal mode

Please change according to a direction of an arrow.

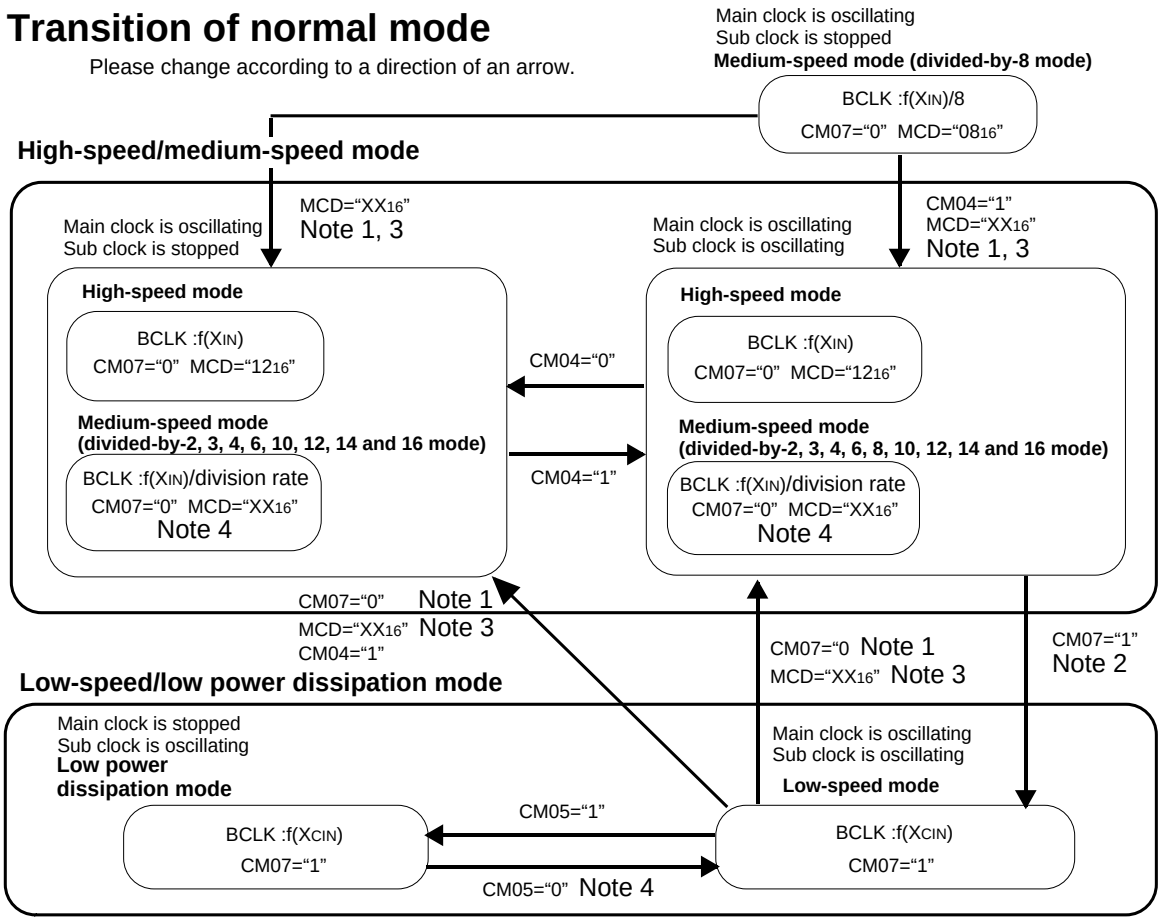

Note 1: Switch clocks after oscillation of main clock is fully stable.
Note 2: Switch clocks after oscillation of sub clock is fully stable.
Note 3: Set the desired division to the main clock division register (MCD).
Note 4: When shifting to division by 8 mode, MCD is set to "08_{16}".

Figure 8.7 Clock transition

8.8 Protection

The protection function is provided so that the values in important registers cannot be changed in the event that the program runs out of control. Figure 8.8 shows the protect register. The values in the processor mode register 0 (address 0004_{16}), processor mode register 1 (address 0005_{16}), system clock control register 0 (address 0006_{16}), system clock control register 1 (address 0007_{16}), main clock division register (address $000C_{16}$), port P9 direction register (address $03C7_{16}$) and function select register A3 (address $03B5_{16}$) can only be changed when the respective bit in the protect register is set to “1”. Therefore, important outputs can be allocated to port P9.

If, after “1” (write-enabled) has been written to the PRC2 (bit 2 at address $000A_{16}$), a value is written to any address, the bit automatically reverts to “0” (write-inhibited). Change port P9 input/output and function select register A3 immediately after setting "1" to PRC2. Interrupt and DMA transfer should not be inserted between instructions. However, the PRC0 (bit 0 at address $000A_{16}$) and PRC1 (bit 1 at address $000A_{16}$) do not automatically return to “0” after a value has been written to an address. The program must therefore be written to return these bits to “0”.

Protect register

b7	b6	b5	b4	b3	b2	b1	b0
✕	✕	✕	✕	✕			

Symbol: PRCR
Address: $000A_{16}$
When reset: $XXXXX000_2$

Bit symbol	Bit name	Function	R	W
PRC0	Enables writing to system clock control registers 0 and 1 (addresses 0006_{16} and 0007_{16}) and main clock division register (address $000C_{16}$)	0 : Write-inhibited 1 : Write-enabled	○	○
PRC1	Enables writing to processor mode registers 0 and 1 (addresses 0004_{16} and 0005_{16})	0 : Write-inhibited 1 : Write-enabled	○	○
PRC2	Enables writing to port P9 direction register (address $03C7_{16}$) and function select register A3 (address $03B5_{16}$) (Note)	0 : Write-inhibited 1 : Write-enabled	○	○
Nothing is assigned. When write, set "0". When read, their contents are indeterminate.			–	–

Note: Writing a value to an address after “1” is written to this bit returns the bit to “0”. Other bits do not automatically return to “0” and they must therefore be reset by the program.

Figure 8.8 Protect register

9. Interrupt Outline

9.1 Types of Interrupts

Figure 9.1 lists the types of interrupts.

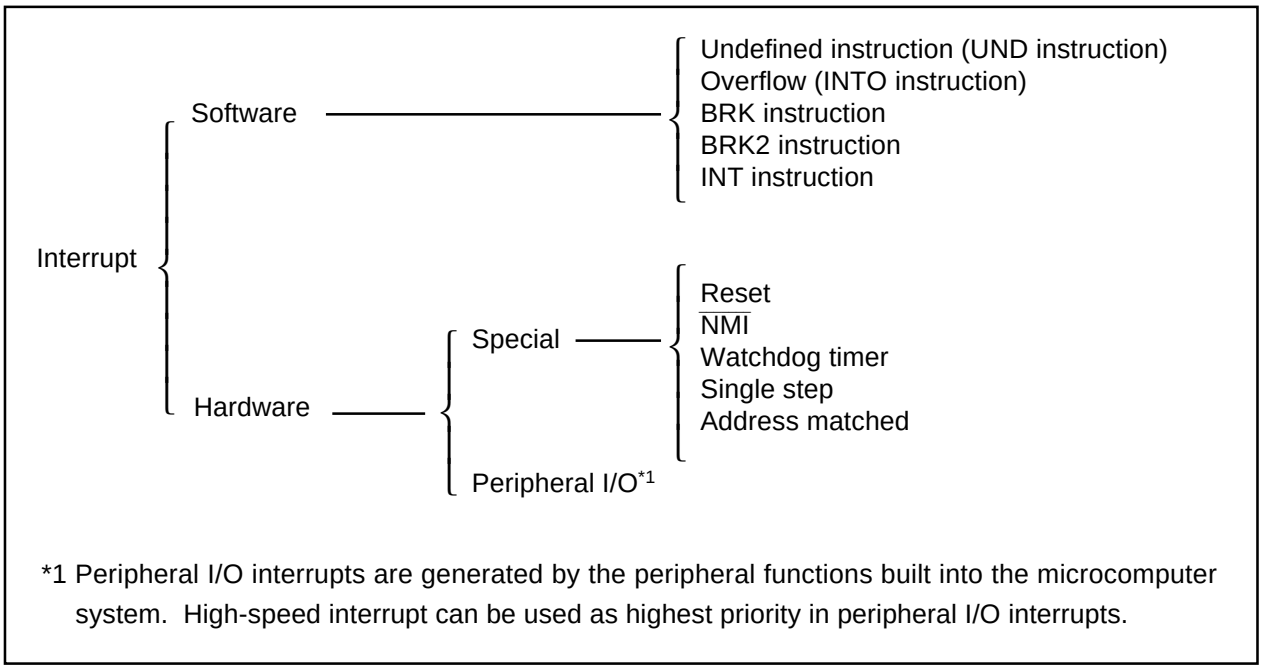

Figure 9.1 Classification of interrupts

- Maskable interrupt : An interrupt which can be enabled (disabled) by the interrupt enable flag (I flag) or whose interrupt priority **can be changed** by priority level.
- Non-maskable interrupt : An interrupt which cannot be enabled (disabled) by the interrupt enable flag (I flag) or whose interrupt priority **cannot be changed** by priority level.

9.2 Software Interrupts

Software interrupts are generated by some instruction that generates an interrupt request when executed. Software interrupts are nonmaskable interrupts.

(1) Undefined-instruction interrupt

This interrupt occurs when the UND instruction is executed.

(2) Overflow interrupt

This interrupt occurs if the INTO instruction is executed when the O flag is 1.

The following lists the instructions that cause the O flag to change:

ABS, ADC, ADCF, ADD, ADDX, CMP, CMPX, DIV, DIVU, DIVX, NEG, RMPA, SBB, SCMPU, SHA, SUB, SUBX

(3) BRK interrupt

This interrupt occurs when the BRK instruction is executed.

(4) BRK2 interrupt

This interrupt occurs when the BRK2 instruction is executed. This interrupt is used exclusively for debugger purposes. You normally do not need to use this interrupt.

(5) INT instruction interrupt

This interrupt occurs when the INT instruction is executed after specifying a software interrupt number from 0 to 63. Note that software interrupt numbers 0 to 43 are assigned to peripheral I/O interrupts. This means that by executing the INT instruction, you can execute the same interrupt routine as used in peripheral I/O interrupts.

The stack pointer used in INT instruction interrupt varies depending on the software interrupt number. For software interrupt numbers 0 to 31, the U flag is saved when an interrupt occurs and the U flag is cleared to 0 to choose the interrupt stack pointer (ISP) before executing the interrupt sequence. The previous U flag before the interrupt occurred is restored when control returns from the interrupt routine. For software interrupt numbers 32 to 63, such stack pointer switchover does not occur.

However, in peripheral I/O interrupts, the U flag is saved when an interrupt occurs and the U flag is cleared to 0 to choose ISP.

Therefore movement of U flag is different by peripheral I/O interrupt or INT instruction in software interrupt number 32 to 43.

9.3 Hardware Interrupts

There are Two types in hardware Interrupts; special interrupts and Peripheral I/O interrupts.

(1) Special interrupts

Special interrupts are nonmaskable interrupts.

- Reset
  A reset occurs when the $\overline{\text{RESET}}$ pin is pulled low.
- **$\overline{\text{NMI}}$ interrupt**
  This interrupt occurs when the $\overline{\text{NMI}}$ pin is pulled low.
- **Watchdog timer interrupt**
  This interrupt is caused by the watchdog timer.
- **Address-match interrupt**
  This interrupt occurs immediately before the instruction at the address indicated by the address match interrupt register is executed while the address match interrupt enable bit is set to “1”.
  This interrupt does not occur if any address other than the start address of an instruction is set in the address match register.
- **Single-step interrupt**
  This interrupt is used exclusively for debugger purposes, do not use it in other circumstances. A single-step interrupt occurs when the D flag is set (= 1); in this case, an interrupt is generated after one instruction is executed.

(2) Peripheral I/O interrupts

A peripheral I/O interrupt is generated by one of built-in peripheral functions. Built-in peripheral functions are dependent on classes of products, so the interrupt factors too are dependent on classes of products. The interrupt vector table is the same as the one for software interrupt numbers 0 through 43 the INT instruction uses. Peripheral I/O interrupts are maskable interrupts.

- **Bus collision detection, start/stop condition detection interrupts (UART2, UART3, UART4), fault error interrupts (UART3, 4)**
  This is an interrupt that the serial I/O bus collision detection generates. When I^2C mode is selected, start, stop condition interrupt is selected. When $\overline{\text{SS}}$ pin is selected, fault error interrupt is selected.
- **DMA0 through DMA3 interrupts**
  These are interrupts that DMA generates.
- **Key-input interrupt**
  A key-input interrupt occurs if an “L” is input to the $\overline{\text{KI}}$ pin.
- **A/D conversion interrupt**
  This is an interrupt that the A/D converter generates.
- **UART0, UART1, UART2/NACK, UART3/NACK and UART4/NACK transmission interrupt**
  These are interrupts that the serial I/O transmission generates.
- **UART0, UART1, UART2/ACK, UART3/ACK and UART4/ACK reception interrupt**
  These are interrupts that the serial I/O reception generates.
- **Timer A0 interrupt through timer A4 interrupt**
  These are interrupts that timer A generates
- **Timer B0 interrupt through timer B5 interrupt**
  These are interrupts that timer B generates.
- **$\overline{\text{INT0}}$ interrupt through $\overline{\text{INT5}}$ interrupt**
  An $\overline{\text{INT}}$ interrupt selects a edge sense or a level sense. In edge sense, an $\overline{\text{INT}}$ interrupt occurs if either a rising edge or a falling edge or a both edge is input to the $\overline{\text{INT}}$ pin. In level sense, an $\overline{\text{INT}}$ interrupt occurs if either an "H" level or an "L" level is input to the $\overline{\text{INT}}$ pin.

9.4 High-speed interrupts

High-speed interrupts are interrupts in which the response is executed at 5 cycles and the return is 3 cycles.

When a high-speed interrupt is received, the flag register (FLG) and program counter (PC) are saved to the save flag register (SVF) and save PC register (SVP) and the program is executed from the address shown in the vector register (VCT).

Execute a FREIT instruction to return from the high-speed interrupt routine.

High-speed interrupts can be set by setting “1” in the high-speed interrupt specification bit allocated to bit 3 of the exit priority register. Setting “1” in the high-speed interrupt specification bit makes the interrupt set to level 7 in the interrupt control register into a high-speed interrupt.

You can only set one interrupt as a high-speed interrupt. When using a high-speed interrupt, do not set multiple interrupts as level 7 interrupts.

The interrupt vector for a high-speed interrupt must be set in the vector register (VCT).

When using a high-speed interrupt, you can use a maximum of two DMAC channels.

The execution speed is improved when register bank 1 is used with high speed interrupt register selected by not saving registers to the stack but to the switching register bank. In this case, switch register bank mode for high-speed interrupt routine.

9.5 Interrupts and Interrupt Vector Tables

If an interrupt request is accepted, a program branches to the interrupt routine set in the interrupt vector table. Set the first address of the interrupt routine in each vector table. Figure 9.2 shows the format for specifying the address.

Two types of interrupt vector tables are available — fixed vector table in which addresses are fixed and variable vector table in which addresses can be varied by the setting.

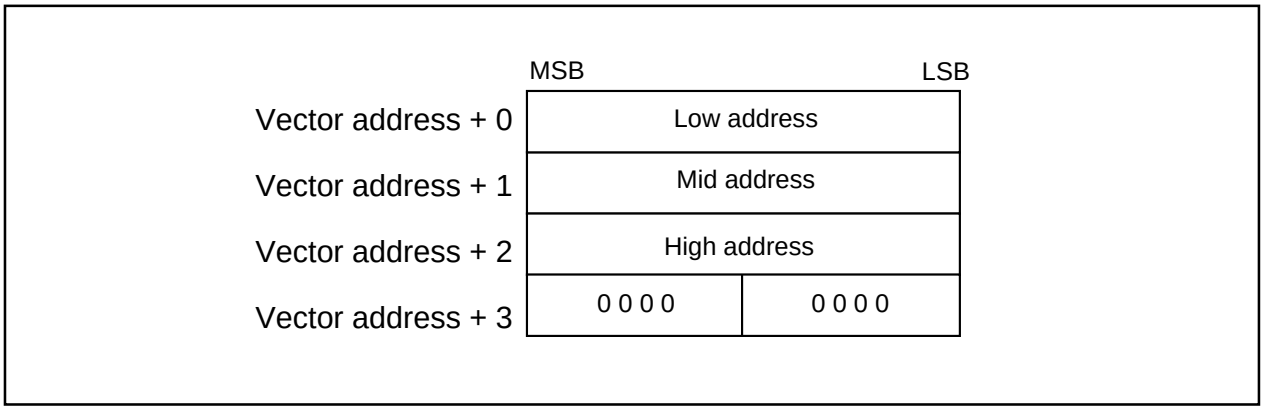

Figure 9.2 Format for specifying interrupt vector addresses

• **Fixed vector tables**

The fixed vector table is a table in which addresses are fixed. The vector tables are located in an area extending from FFFFDC16 to FFFFFF16. One vector table comprises four bytes. Set the first address of interrupt routine in each vector table. Table 9.1 shows the interrupts assigned to the fixed vector tables and addresses of vector tables.

Table 9.1 Interrupt factors (fixed interrupt vector addresses)

Interrupt source	Vector table addresses Address (L) to address (H)	Remarks
Undefined instruction	FFFFDC16 to FFFFDF16	Interrupt on UND instruction
Overflow	FFFFE016 to FFFFE316	Interrupt on INTO instruction
BRK instruction execution	FFFFE416 to FFFFE716	If content of FFFFE716 is filled with FF16, program starts from the address shown by the vector in the variable vector table
Address match	FFFFE816 to FFFFEB16	There is an address-matching interrupt enable bit
Watchdog timer	FFFFF016 to FFFFF316	
$\overline{\text{NMI}}$	FFFFF816 to FFFFFB16	External interrupt by input to $\overline{\text{NMI}}$ pin
Reset	FFFFFC16 to FFFFFF16	

• **Vector table dedicated for emulator**

Table 9.2 shows interrupt vector address which is vector table register dedicated for emulator (address 0000216 to 0000216). These instructions are not effected with interrupt enable flag (I flag) (non maskable interrupt).

This interrupt is used exclusively for debugger purposes. You normally do not need to use this interrupt. Do not access to the interrupt vector table register dedicated for emulator (address 0000216 to 0000216).

Table 9.2 Interrupt vector table register for emulator

Interrupt source	Vector table addresses Address (L) to address (H)	Remarks
BRK2 instruction	Interrupt vector table register for emulator 0000216 to 0000216	Interrupt for debugger
Single step	Interrupt vector table register for emulator 0000216 to 0000216	Interrupt for debugger

• **Variable vector tables**

The addresses in the variable vector table can be modified, according to the user's settings. Indicate the first address using the interrupt table register (INTB). The 256-byte area subsequent to the address the INTB indicates becomes the area for the variable vector tables. One vector table comprises four bytes. Set the first address of the interrupt routine in each vector table. Table 9.3 shows the interrupts assigned to the variable vector tables and addresses of vector tables.

Set an even address to the start address of vector table setting in INTB so that operating efficiency is increased.

Table 9.3 Interrupt causes (variable interrupt vector addresses)

Software interrupt number	Vector table address Address (L) to address (H)	Interrupt source	Remarks
Software interrupt number 0	+0 to +3 (Note 1)	BRK instruction	Cannot be masked I flag
Software interrupt number 8	+32 to +35 (Note 1)	DMA0	
Software interrupt number 9	+36 to +39 (Note 1)	DMA1	
Software interrupt number 10	+40 to +43 (Note 1)	DMA2	
Software interrupt number 11	+44 to +47 (Note 1)	DMA3	
Software interrupt number 12	+48 to +51 (Note 1)	Timer A0	
Software interrupt number 13	+52 to +55 (Note 1)	Timer A1	
Software interrupt number 14	+56 to +59 (Note 1)	Timer A2	
Software interrupt number 15	+60 to +63 (Note 1)	Timer A3	
Software interrupt number 16	+64 to +67 (Note 1)	Timer A4	
Software interrupt number 17	+68 to +71 (Note 1)	UART0 transmit	
Software interrupt number 18	+72 to +75 (Note 1)	UART0 receive	
Software interrupt number 19	+76 to +79 (Note 1)	UART1 transmit	
Software interrupt number 20	+80 to +83 (Note 1)	UART1 receive	
Software interrupt number 21	+84 to +87 (Note 1)	Timer B0	
Software interrupt number 22	+88 to +91 (Note 1)	Timer B1	
Software interrupt number 23	+92 to +95 (Note 1)	Timer B2	
Software interrupt number 24	+96 to +99 (Note 1)	Timer B3	
Software interrupt number 25	+100 to +103 (Note 1)	Timer B4	
Software interrupt number 26	+104 to +107 (Note 1)	$\overline{\text{INT5}}$	
Software interrupt number 27	+108 to +111 (Note 1)	$\overline{\text{INT4}}$	
Software interrupt number 28	+112 to +115 (Note 1)	$\overline{\text{INT3}}$	
Software interrupt number 29	+116 to +119 (Note 1)	$\overline{\text{INT2}}$	
Software interrupt number 30	+120 to +123 (Note 1)	$\overline{\text{INT1}}$	
Software interrupt number 31	+124 to +127 (Note 1)	$\overline{\text{INT0}}$	
Software interrupt number 32	+128 to +131 (Note 1)	Timer B5	
Software interrupt number 33	+132 to +135 (Note 1)	UART2 transmit/NACK (Note 2)	
Software interrupt number 34	+136 to +139 (Note 1)	UART2 receive/ACK (Note 2)	
Software interrupt number 35	+140 to +143 (Note 1)	UART3 transmit/NACK (Note 2)	
Software interrupt number 36	+144 to +147 (Note 1)	UART3 receive/ACK (Note 2)	
Software interrupt number 37	+148 to +151 (Note 1)	UART4 transmit/NACK (Note 2)	
Software interrupt number 38	+152 to +155 (Note 1)	UART4 receive/ACK (Note 2)	
Software interrupt number 39	+156 to +159 (Note 1)	Bus collision detection, start/stop condition detection (UART2) (Note 2)	
Software interrupt number 40	+160 to +163 (Note 1)	Bus collision detection, start/stop condition detection, fault error (UART3) (Note 2, 3)	
Software interrupt number 41	+164 to +167 (Note 1)	Bus collision detection, start/stop condition detection, fault error (UART4) (Note 2, 3)	
Software interrupt number 42	+168 to +171 (Note 1)	A/D	
Software interrupt number 43	+172 to +175 (Note 1)	Key input interrupt	
Software interrupt number 44 to Software interrupt number 63	+176 to +179 (Note 1) to +252 to +255 (Note 1)	Software interrupt	Cannot be masked I flag

Note 1: Address relative to address in interrupt table register (INTB).
Note 2: When I^2C mode is selected, NACK/ACK, start/stop condition detection interrupts are selected.
Note 3: The fault error interrupt is selected when $\overline{SS}$ pin is selected.

9.6 Interrupt control registers

Peripheral I/O interrupts have their own interrupt control registers. Figure 9.3 shows the interrupt control registers.

When using an interrupt to exit Stop mode or Wait mode, the relevant interrupt must have been enabled and set to a priority level above the level set by the interrupt priority set bits for exit a stop/wait state (bits 2, 1, and 0 at address $009F_{16}$). Set the interrupt priority set bits for the exit from a stop/wait state to the same level as the flag register (FLG) processor interrupt level (IPL).

Figure 9.4 shows the exit priority register.

Interrupt control register

Symbol	Address	When reset
ADIC	0073₁₆	XXXXX000₂
BCNiIC(i=2 to 4)	008F₁₆, 0071₁₆, 0091₁₆	XXXXX000₂
DMiIC(i=0 to 3)	0068₁₆, 0088₁₆, 006A₁₆, 008A₁₆	XXXXX000₂
KUPIC	0093₁₆	XXXXX000₂
TAiIC(i=0 to 4)	006C₁₆, 008C₁₆, 006E₁₆, 008E₁₆, 0070₁₆	XXXXX000₂
TBiIC(i=0 to 5)	0094₁₆, 0076₁₆, 0096₁₆, 0078₁₆, 0098₁₆, 0069₁₆	XXXXX000₂
SiTIC(i=0 to 4)	0090₁₆, 0092₁₆, 0089₁₆, 008B₁₆, 008D₁₆	XXXXX000₂
SiRIC(i=0 to 4)	0072₁₆, 0074₁₆, 006B₁₆, 006D₁₆, 006F₁₆	XXXXX000₂

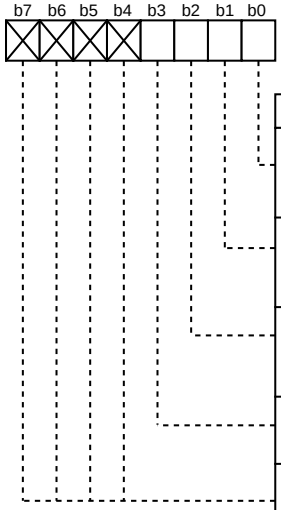

Bit symbol	Bit name	Function	R	W
ILVL0	Interrupt priority level select bit	b2 b1 b0 0 0 0 : Level 0 (interrupt disabled) 0 0 1 : Level 1 0 1 0 : Level 2 0 1 1 : Level 3 1 0 0 : Level 4 1 0 1 : Level 5 1 1 0 : Level 6 1 1 1 : Level 7	○	○
ILVL1			○	○
ILVL2			○	○
IR	Interrupt request bit	0 : Interrupt not requested 1 : Interrupt requested	○	○ (Note)
Nothing is assigned. When write, set "0". When read, their contents are indeterminate.			–	–

Note: This bit can only be accessed for reset (= 0), but cannot be accessed for set (= 1).



Symbol	Address	When reset
INTiIC(i=0 to 5)	009E₁₆, 007E₁₆, 009C₁₆, 007C₁₆, 009A₁₆, 007A₁₆	XX00X000₂

Bit symbol	Bit name	Function	R	W
ILVL0	Interrupt priority level select bit	b2 b1 b0 0 0 0 : Level 0 (interrupt disabled) 0 0 1 : Level 1 (Note 2) 0 1 0 : Level 2 0 1 1 : Level 3 1 0 0 : Level 4 1 0 1 : Level 5 1 1 0 : Level 6 1 1 1 : Level 7	○	○
ILVL1			○	○
ILVL2			○	○
IR	Interrupt request bit	0: Interrupt not requested 1: Interrupt requested	○	○ (Note 1)
POL	Polarity select bit	0 : Selects falling edge or L level 1 : Selects rising edge or H level	○	○
LVS	Level sense/edge sense select bit	0 : Edge sense 1 : Level sense (Note 3)	○	○
Nothing is assigned. When write, set "0". When read, their contents are indeterminate.			–	–

Note 1: This bit can only be accessed for reset (= 0), but cannot be accessed for set (= 1).
Note 2: When INT3 to INT5 are used for data bus in microprocessor mode or memory expansion mode, set the interrupt disabled to INT3IC, INT4IC and INT5IC.
Note 3: When level sense is selected, set related bit of interrupt cause select register (address 031F₁₆) to one edge.

Figure 9.3 Interrupt control register

Exit priority register



Symbol RLVL | Address 009F16 | When reset XXXX00002

Bit symbol	Bit	Function	R	W
RLVL0	Interrupt priority set bit for exiting Stop/Wait state (Note 1,2)	b2 b1 b0 0 0 0 : Level 0 0 0 1 : Level 1 0 1 0 : Level 2 0 1 1 : Level 3 1 0 0 : Level 4 1 0 1 : Level 5 1 1 0 : Level 6 1 1 1 : Level 7	○	○
RLVL1			○	○
RLVL2			○	○
FSIT	High-speed interrupt set bit (Note 3)	0: Interrupt priority level 7 = normal interrupt 1: Interrupt priority level 7 = high-speed interrupt	○	○
Nothing is assigned. When write, set "0". When read, their contents are indeterminate.			–	–

Note 1: Exits the Stop or Wait mode when the requested interrupt priority level is higher than that set in the exit priority register.
Note 2: Set to the same value as the processor interrupt priority level (IPL) set in the flag register (FLG).
Note 3: The high-speed interrupt can only be specified for interrupts with interrupt priority level 7. Specify interrupt priority level 7 for only one interrupt.

Figure 9.4 Exit priority register

9.7 Interrupt Enable Flag (I Flag)

The interrupt enable flag (I flag) is used to disable/enable maskable interrupts. When this flag is set (= 1), all maskable interrupts are enabled; when the flag is cleared to 0, they are disabled. This flag is automatically cleared to 0 after a reset is cleared.

9.8 Interrupt Request Bit

This bit is set (= 1) by hardware when an interrupt request is generated. The bit is cleared to 0 by hardware when the interrupt request is acknowledged and jump to the interrupt vector.

This bit can be cleared to 0 (but cannot be set to 1) in software.

9.9 Interrupt Priority Level Select Bit and Processor Interrupt Priority Level (IPL)

Interrupt priority levels are set by the interrupt priority select bit in an interrupt control register. When an interrupt request is generated, the interrupt priority level of this interrupt is compared with the processor interrupt priority level (IPL). This interrupt is enabled only when its interrupt priority level is greater than the processor interrupt priority level (IPL). This means that you can disable any particular interrupt by setting its interrupt priority level to 0.

Table 9.4 shows how interrupt priority levels are set. Table 9.5 shows interrupt enable levels in relation to the processor interrupt priority level (IPL).

The following lists the conditions under which an interrupt request is acknowledged:

- Interrupt enable flag (I flag) = 1
- Interrupt request bit = 1
- Interrupt priority level > Processor interrupt priority level (IPL)

The interrupt enable flag (I flag), interrupt request bit, interrupt priority level select bit, and the processor interrupt priority level (IPL) all are independent of each other, so they do not affect any other bit.

Table 9.4 Interrupt Priority Levels

Interrupt priority level select bit			Interrupt priority level	Priority order
b2	b1	b0		
0	0	0	Level 0 (interrupt disabled)	———
0	0	1	Level 1	Low
0	1	0	Level 2	↓
0	1	1	Level 3	↓
1	0	0	Level 4	↓
1	0	1	Level 5	↓
1	1	0	Level 6	↓
1	1	1	Level 7	High

Table 9.5 IPL and Interrupt Enable Levels

Processor interrupt priority level (IPL)			Enabled interrupt priority levels
IPL_2	IPL_1	IPL_0	
0	0	0	Interrupt levels 1 and above are enabled.
0	0	1	Interrupt levels 2 and above are enabled.
0	1	0	Interrupt levels 3 and above are enabled.
0	1	1	Interrupt levels 4 and above are enabled.
1	0	0	Interrupt levels 5 and above are enabled.
1	0	1	Interrupt levels 6 and above are enabled.
1	1	0	Interrupt levels 7 and above are enabled.
1	1	1	All maskable interrupts are disabled.

9.10 Rewrite the interrupt control register

When a instruction to rewrite the interrupt control register is executed but the interrupt is disabled, the interrupt request bit is not set sometimes even if the interrupt request for that register has been generated. This will depend on the instruction. If this creates problems, use the below instructions to change the register.

Instructions : AND, OR, BCLR, BSET

9.11 Interrupt Sequence

An interrupt sequence — what are performed over a period from the instant an interrupt is accepted to the instant the interrupt routine is executed — is described here.

If an interrupt occurs during execution of an instruction, the processor determines its priority when the execution of the instruction is completed, and transfers control to the interrupt sequence from the next cycle. If an interrupt occurs during execution of either the SCMPU, SIN, SMOVB, SMOVF, SMOVU, SSTR, SOUT or RMPA instruction, the processor temporarily suspends the instruction being executed, and transfers control to the interrupt sequence.

In the interrupt sequence, the processor carries out the following in sequence given:

(1) CPU gets the interrupt information (the interrupt number and interrupt request level) by reading address 000000_{16} (address 000002_{16} when high-speed interrupt). After this, the related interrupt request bit is "0".

(2) Saves the content of the flag register (FLG) as it was immediately before the start of interrupt sequence in the temporary register (Note) within the CPU.

(3) Sets the interrupt enable flag (I flag), the debug flag (D flag), and the stack pointer select flag (U flag) to “0” (the U flag, however does not change if the INT instruction, in software interrupt numbers 32 through 63, is executed)

(4) Saves the content of the temporary register (Note 1) within the CPU in the stack area. Saves in the flag save register (SVF) in high-speed interrupt.

(5) Saves the content of the program counter (PC) in the stack area. Saves in the PC save register (SVP) in high-speed interrupt.

(6) Sets the interrupt priority level of the accepted instruction in the IPL.

After the interrupt sequence is completed, the processor resumes executing instructions from the first address of the interrupt routine.

Note: This register cannot be utilized by the user.

9.12 Interrupt Response Time

'Interrupt response time' is the period between the instant an interrupt occurs and the instant the first instruction within the interrupt routine has been executed. This time comprises the period from the occurrence of an interrupt to the completion of the instruction under execution at that moment (a) and the time required for executing the interrupt sequence (b). Figure 9.5 shows the interrupt response time.

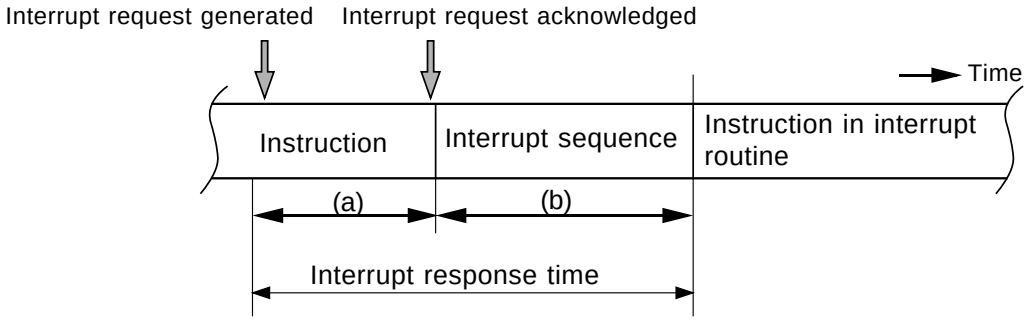

(a) The period from the occurrence of an interrupt to the completion of the instruction under execution.

(b) The time required for executing the interrupt sequence.

Figure 9.5 Interrupt response time

Time (a) varies with each instruction being executed. The DIVX instruction requires a maximum time that consists of 24* cycles.
Time (b) is shown in Table 9.6.

* It is when the divisor is immediate or register. When the divisor is memory, the following value is added.
  - Normal addressing : 2 + X
  - Index addressing : 3 + X
  - Indirect addressing : 5 + X + 2Y
  - Indirect index addressing : 6 + X + 2Y

X is number of wait of the divisor area. Y is number of wait of the indirect address stored area. When X and Y are in odd address or in 8 bits bus area, double the value of X and Y.

Table 9.6 Interrupt Sequence Execution Time

Interrupt	Interrupt vector address	16 bits data bus	8 bits data bus
Peripheral I/O	Even address	14 cycles	16 cycles
	Odd address (Note 1)	16 cycles	16 cycles
INT instruction	Even address	12 cycles	14 cycles
	Odd address (Note 1)	14 cycles	14 cycles
$\overline{\text{NMI}}$ Watchdog timer Undefined instruction Address match	Even address (Note 2)	13 cycles	15 cycles
Overflow	Even address (Note 2)	14 cycles	16 cycles
BRK instruction (Variable vector table)	Even address	17 cycles	19 cycles
	Odd address (Note 1)	19 cycles	19 cycles
Single step BRK2 instruction BRK instruction (Fixed vector table)	Even address (Note 2)	19 cycles	21 cycles
High-speed interrupt (Note 3)	Vector table is internal register	5 cycles	

Note 1: Allocate interrupt vector addresses in even addresses, if possible.
Note 2: The vector table is fixed to even address.
Note 3: The high-speed interrupt is independent of these conditions.

9.13 Changes of IPL When Interrupt Request Acknowledged

When an interrupt request is acknowledged, the interrupt priority level of the acknowledged interrupt is set to the processor interrupt priority level (IPL).

If an interrupt request is acknowledged that does not have an interrupt priority level, the value shown in Table 9.7 is set to the IPL.

Table 9.7 Relationship between Interrupts without Interrupt Priority Levels and IPL

Interrupt sources without interrupt priority levels	Value that is set to IPL
Watchdog timer, $\overline{\text{NMI}}$	7
Reset	0
Other	Not changed

9.14 Saving Registers

In an interrupt sequence, only the contents of the flag register (FLG) and program counter (PC) are saved to the stack area.

The order in which these contents are saved is as follows: First, the FLG register is saved to the stack area. Next, the 16 high-order bits and 16 low-order bits of the program counter expanded to 32-bit are saved. Figure 9.6 shows the stack status before an interrupt request is acknowledged and the stack status after an interrupt request is acknowledged.

In a high-speed interrupt sequence, the contents of the flag register (FLG) is saved to the flag save register (SVF) and program counter (PC) is saved to PC save register (SVP).

If there are any other registers you want to be saved, save them in software at the beginning of the interrupt routine. The PUSHM instruction allows you to save all registers except the stack pointer (SP) by a single instruction.

The execution speed is improved when register bank 1 is used with high speed interrupt register selected by not saving registers to the stack but to the switching register bank. In this case, switch register bank mode for high-speed interrupt routine.

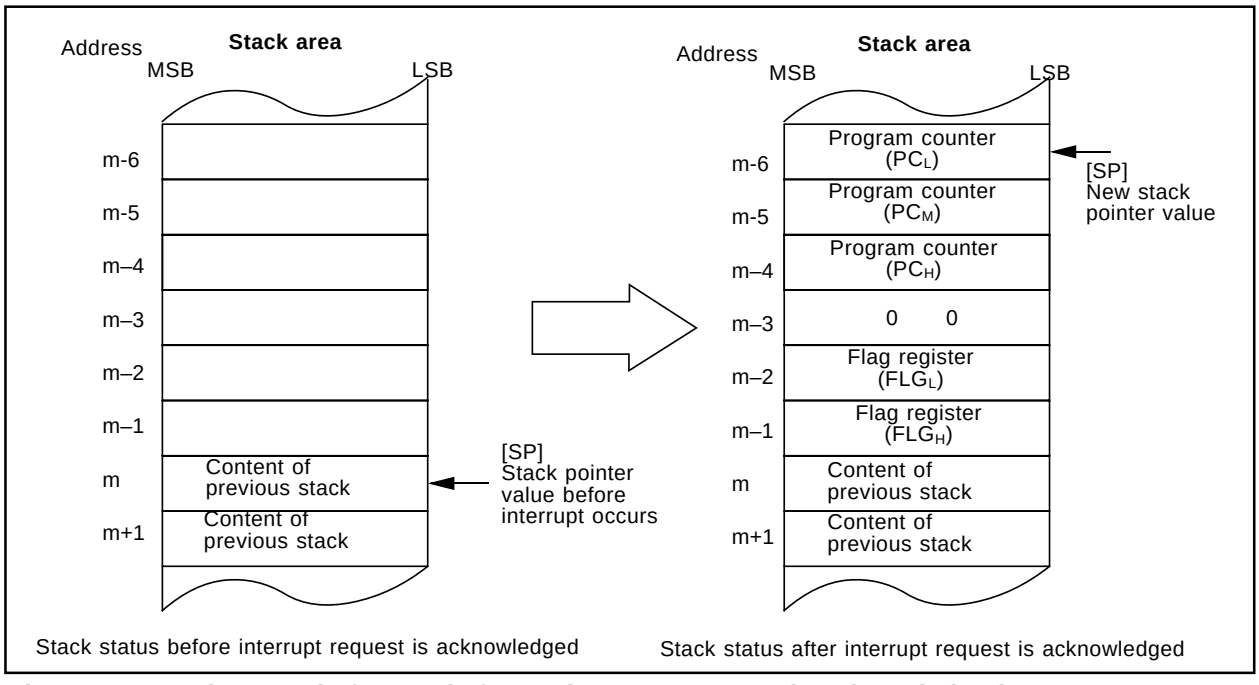

Figure 9.6 Stack status before and after an interrupt request is acknowledged

9.15 Return from Interrupt Routine

As you execute the REIT instruction at the end of the interrupt routine, the contents of the flag register (FLG) and program counter (PC) that have been saved to the stack area immediately preceding the interrupt sequence are automatically restored. In high-speed interrupt, as you execute the FREIT instruction at the end of the interrupt routine, the contents of the flag register (FLG) and program counter (PC) that have been saved to the save registers immediately preceding the interrupt sequence are automatically restored.

Then control returns to the routine that was under execution before the interrupt request was acknowledged, and processing is resumed from where control left off.

If there are any registers you saved via software in the interrupt routine, be sure to restore them using an instruction (e.g., POPM instruction) before executing the REIT or FREIT instruction.

When switching the register bank before executing REIT and FREIT instruction, switched to the register bank immediately before the interrupt sequence.

9.16 Interrupt Priority

If two or more interrupt requests are sampled active at the same time, whichever interrupt request is acknowledged that has the highest priority.

Maskable interrupts (Peripheral I/O interrupts) can be assigned any desired priority by setting the interrupt priority level select bit accordingly. If some maskable interrupts are assigned the same priority level, the priority between these interrupts is resolved by the priority that is set in hardware.

Certain nonmaskable interrupts such as a reset (reset is given the highest priority) and watchdog timer interrupt have their priority levels set in hardware. Figure 9.7 lists the hardware priority levels of these interrupts.

Software interrupts are not subjected to interrupt priority. They always cause control to branch to an interrupt routine whenever the relevant instruction is executed.

9.17 Interrupt Resolution Circuit

Interrupt resolution circuit selects the highest priority interrupt when two or more interrupt requests are sampled active at the same time.

Figure 9.8 shows the interrupt resolution circuit.

Reset > $\overline{\text{NMI}}$ > Watchdog > Peripheral I/O > Single step > Address match

Figure 9.7 Interrupt priority that is set in hardware

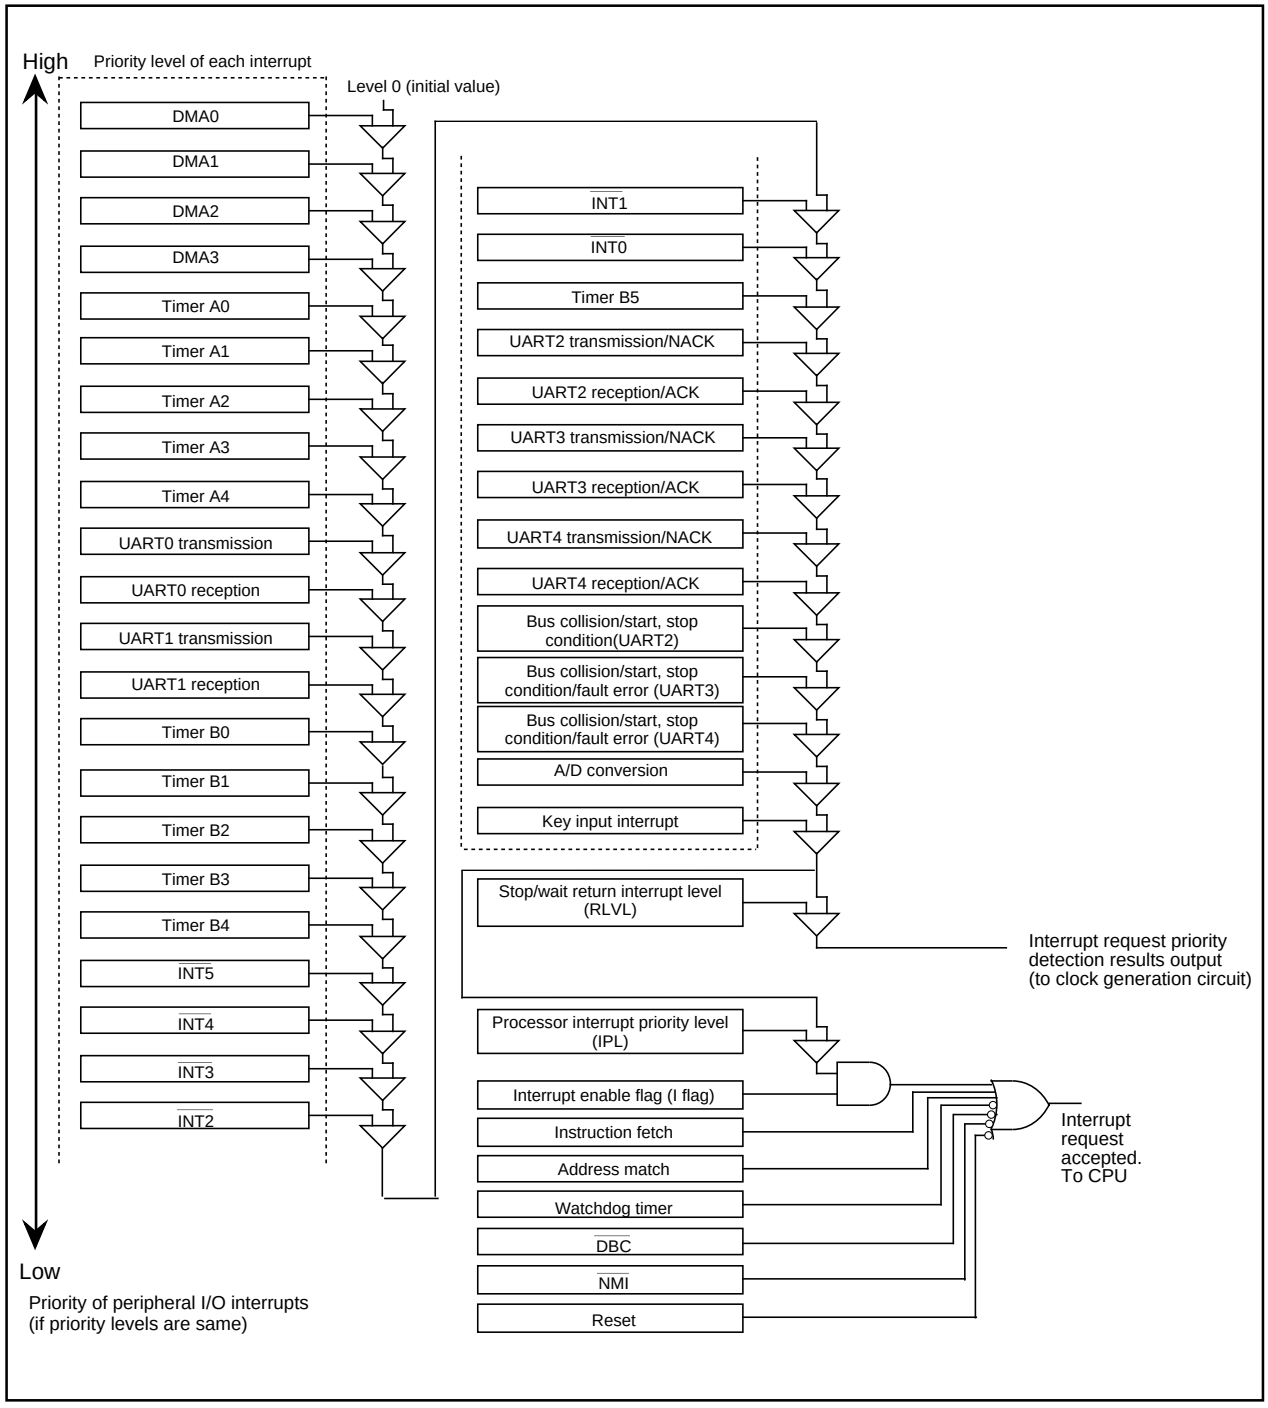

Figure 9.8 Interrupt resolution circuit

9.18 $\overline{\text{INT}}$ Interrupts

$\overline{\text{INT0}}$ to $\overline{\text{INT5}}$ are external input interrupts. The level sense/edge sense switching bits of the interrupt control register select the input signal level and edge at which the interrupt can be set to occur on input signal level and input signal edge. The polarity bit selects the polarity.

With the external interrupt input edge sense, the interrupt can be set to occur on both rising and falling edges by setting the INTi interrupt polarity switch bit of the interrupt request select register (address $031F_{16}$) to “1”. When you select both edges, set the polarity switch bit of the corresponding interrupt control register to the falling edge (“0”).

When you select level sense, the INTi interrupt polarity switch bit of the interrupt request select register (address $031F_{16}$) to “0”.

Figure 9.9 shows the interrupt request select register.

Interrupt request cause select register

b7	b6	b5	b4	b3	b2	b1	b0

Symbol	Address	When reset
IFSR	$031F_{16}$	$XX000000_2$

Bit symbol	Bit name	Fumction	R	W
IFSR0	INT0 interrupt polarity swiching bit (Note)	0 : One edge 1 : Two edges	○	○
IFSR1	INT1 interrupt polarity swiching bit (Note)	0 : One edge 1 : Two edges	○	○
IFSR2	INT2 interrupt polarity swiching bit (Note)	0 : One edge 1 : Two edges	○	○
IFSR3	INT3 interrupt polarity swiching bit (Note)	0 : One edge 1 : Two edges	○	○
IFSR4	INT4 interrupt polarity swiching bit (Note)	0 : One edge 1 : Two edges	○	○
IFSR5	INT5 interrupt polarity swiching bit (Note)	0 : One edge 1 : Two edges	○	○
Nothing is assigned. When write, set "0". When read, their contents are indeterminate.			–	–

Note :When level sense is selected, set this bit to "0".

Figure 9.9 Interrupt request cause select register

9.19 $\overline{NMI}$ Interrupt

An $\overline{NMI}$ interrupt is generated when the input to the P8$_5$/$\overline{NMI}$ pin changes from “H” to “L”. The $\overline{NMI}$ interrupt is a non-maskable external interrupt. The pin level can be checked in the port P8$_5$ register (bit 5 at address 03C4$_{16}$).

This pin cannot be used as a normal port input.

Notes:

When not intending to use the $\overline{NMI}$ function, be sure to connect the $\overline{NMI}$ pin to V_{CC} (pulled-up). The $\overline{NMI}$ interrupt is non-maskable. Because it cannot be disabled, the pin must be pulled up.

9.20 Key Input Interrupt

If the direction register of any of P10$_4$ to P10$_7$ is set for input and a falling edge is input to that port, a key input interrupt is generated. A key input interrupt can also be used as a key-on wakeup function for cancelling the wait mode or stop mode. However, if you intend to use the key input interrupt, do not use P10$_4$ to P10$_7$ as A/D input ports. Figure 9.10 shows the block diagram of the key input interrupt. Note that if an “L” level is input to any pin that has not been disabled for input, inputs to the other pins are not detected as an interrupt.

Setting the key input interrupt disable bit (bit 7 at address 03AF$_{16}$) to “1” disables key input interrupts from occurring regardless of the setting in the interrupt control register. When “1” is set in the key input interrupt disable register, there is no input via the port pin even when the direction register is set to input.

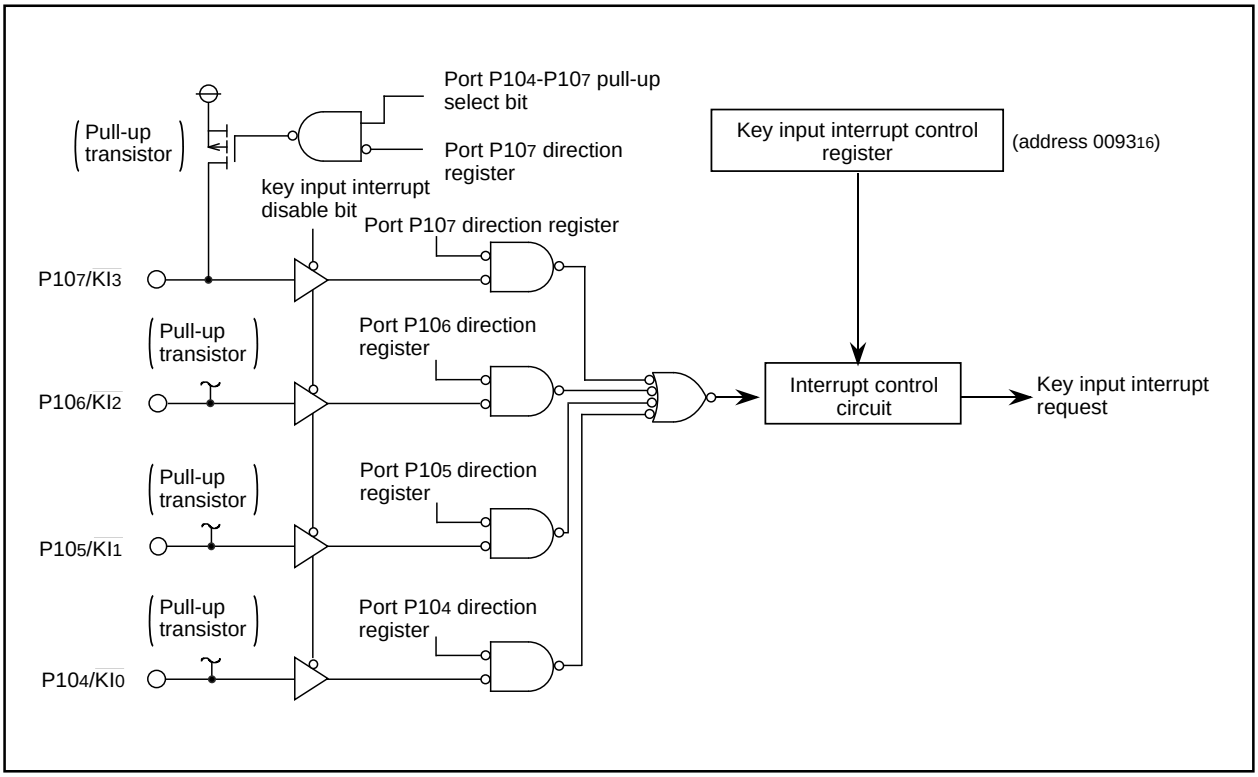

Figure 9.10 Block diagram of key input interrupt

9.21 Address Match Interrupt

An address match interrupt is generated when the address match interrupt address register contents match the program counter value. Four address match interrupts can be set, each of which can be enabled and disabled by an address match interrupt enable bit. Address match interrupts are not affected by the interrupt enable flag (I flag) and processor interrupt priority level (IPL).

Figure 9.11 shows the address match interrupt-related registers.

Set the start address of an instruction to the address match interrupt register.

Address match interrupt is not generated when address such as the middle of instruction or table data is set.

Address match interrupt enable register

b7	b6	b5	b4	b3	b2	b1	b0
✕	✕	✕	✕				

Symbol	Address	When reset
AIER	0009_{16}	$XXXX0000_2$

Bit symbol	Bit name	Function	R	W
AIER0	Address match interrupt 0 enable bit	0 : Interrupt disabled 1 : Interrupt enabled	○	○
AIER1	Address match interrupt 1 enable bit	0 : Interrupt disabled 1 : Interrupt enabled	○	○
AIER2	Address match interrupt 2 enable bit	0 : Interrupt disabled 1 : Interrupt enabled	○	○
AIER3	Address match interrupt 3 enable bit	0 : Interrupt disabled 1 : Interrupt enabled	○	○
Nothing is assigned. When write, set "0". When read, their contents are indeterminate.			—	—

Address match interrupt register i (i = 0 ot 3)

(b23) b7	(b16)(b15) b0 b7	(b8) b0 b7	b0

Symbol	Address	When reset
RMAD0	0012_{16} to 0010_{16}	000000_{16}
RMAD1	0016_{16} to 0014_{16}	000000_{16}
RMAD2	$001A_{16}$ to 0018_{16}	000000_{16}
RMAD3	$001E_{16}$ to $001C_{16}$	000000_{16}

Function	Values that can be set	R	W
Address setting register for address match interrupt	000000_{16} to $FFFFFF_{16}$	○	○

Figure 9.11 Address match interrupt-related registers

9.22 Precautions for Interrupts

(1) Reading addresses 000000$_{16}$ and 000002$_{16}$

- When maskable interrupt is occurred, CPU read the interrupt information (the interrupt number and interrupt request level) in the interrupt sequence from address 000000$_{16}$. When high-speed interrupt is occurred, CPU read from address 000002$_{16}$.
  The interrupt request bit of the certain interrupt will then be set to “0”.
  However, reading addresses 000000$_{16}$ and 000002$_{16}$ by software does not set request bit to “0”.

(2) Setting the stack pointer

- The value of the stack pointer immediately after reset is initialized to 000000$_{16}$. Accepting an interrupt before setting a value in the stack pointer may become a factor of runaway. Be sure to set a value in the stack pointer before accepting an interrupt. When using the $\overline{\text{NMI}}$ interrupt, initialize the stack point at the beginning of a program. Any interrupt including the $\overline{\text{NMI}}$ interrupt is generated immediately after executing the first instruction after reset. Set an even address to the stack pointer so that the operating efficiency of accessign memory is increased.

(3) The $\overline{\text{NMI}}$ interrupt

- As for the $\overline{\text{NMI}}$ interrupt pin, an interrupt cannot be disabled. Connect it to the Vcc pin via a resistance (pull-up) if unused. Be sure to work on it.
- The $\overline{\text{NMI}}$ pin also serves as P8$_5$, which is exclusively input. Reading the contents of the P8 register allows reading the pin value. Use the reading of this pin only for establishing the pin level at the time when the $\overline{\text{NMI}}$ interrupt is input.
- Signals input to the $\overline{\text{NMI}}$ pin require "L" level and "H" level of 2 clock + 300ns or more, from the operation clock of CPU.

(4) External interrupt

- Edge sense
  Either an “L” level or an “H” level of at least 250 ns width is necessary for the signal input to pins INT$_0$ to INT$_5$ regardless of the CPU operation clock.
- Level sense
  Either an “L” level or an “H” level of 1 cycle of BCLK + at least 200 ns width is necessary for the signal input to pins INT$_0$ to INT$_5$ regardless of the CPU operation clock. (When X_{IN}=20MHz and no division mode, at least 250 ns width is necessary.)
- When the polarity of the INT$_0$ to INT$_5$ pins is changed, the interrupt request bit is sometimes set to "1". After changing the polarity, set the interrupt request bit to "0". Figure 9.12 shows the procedure for changing the $\overline{\text{INT}}$ interrupt generate factor.

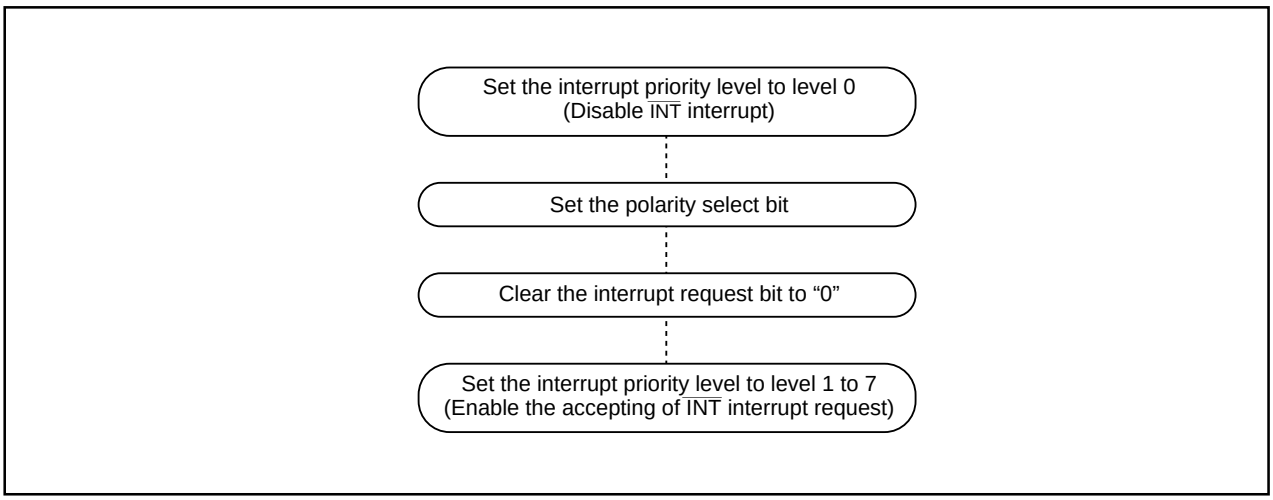

Figure 9.12 Switching condition of $\overline{\text{INT}}$ interrupt request

(5) Rewrite the interrupt control register

- When a instruction to rewrite the interrupt control register is executed but the interrupt is disabled, the interrupt request bit is not set sometimes even if the interrupt request for that register has been generated. This will depend on the instruction. If this creates problems, use the below instructions to change the register.
  Instructions : AND, OR, BCLR, BSET

- When attempting to clear the interrupt request bit of an interrupt control register, the interrupt request bit is not cleared sometimes. This will depend on the instruction. If this creates problems, use the below instructions to change the register.
  Instructions : MOV

(6) Address match interrupt

- Do not set the following addresses to the address match interrupt register.

1. The address of the starting instruction in an interrupt routine.
2. Any of the next 7 instructions addresses immediately after an instruction to clear an interrupt request bit of an interrupt control register or an instruction to rewrite an interrupt priority level to a smaller value.
3. Any of the next 3 instructions addresses immediately after an instruction to set the interrupt enable flag (I flag).
4. Any of the next 3 instructions addresses immediately after an instruction to rewrite a processor interrupt priority level (IPL) to a smaller value.

Example 1)

```
Interrupt_A:                          ; Interrupt A routine
        pushm   R0,R1,R2,R3,A0,A1     ; <----  Do not set address match interrupt to the
        ••••                          ;        start address of an interrupt instruction
```

Example 2)

```
mov.b    #0,TA0IC          ;Change TA0 interrupt priority level to a smaller value
nop                        ; 1st instruction
nop                        ; 2nd instruction
nop                        ; 3rd instruction
nop                        ; 4th instruction   } Do not set address match interrupt
nop                        ; 5th instruction     during this period
nop                        ; 6th instruction
nop                        ; 7th instruction
```

Example 3)

```
fset    I                  ; Set I flag ( interrupt enabled)
nop                        ; 1st instruction
nop                        ; 2nd instruction   } Do not set address match interrupt
nop                        ; 3rd instruction     during this period
```

Example 4)

```
ldipl   #0                 ; Rewrite IPL to a smaller value
nop                        ; 1st instruction
nop                        ; 2nd instruction   } Do not set address match interrupt
nop                        ; 3rd instruction     during this period
```

- To return from an interrupt to the address set in an address match interrupt register using return instruction (reit or freit)

  To rewrite the interrupt control register within the interrupt routine, add the below processing to the end of the routine (immediately before the reit or freit instruction). Also, if multiple interrupts are enabled with other interrupts, add the below processing to the end of the interrupt that enables the multiple interrupts.

  If the interrupt control register is being rewritten within the non-maskable interrupt routine, add the below processing to the end of all interrupts.

Additional process

```
                           ; Execute after the register reset instruction (popm instruction)
fclr    U                  ; Select ISP (Unnecessary if the ISP has been selected)
pushm R0                   ; Store R0 register
mov.w 6[SP],R0             ; Read FLG on stack (use "stc SVF,R0" when high-speed
                           ;                    interrupt)
ldc     R0,FLG             ; Set in FLG
popm    R0                 ; Restore R0 register
nop                        ; Dummy
reit                       ; Interrupt completed (use freit when high-speed interrupt)
```

Example 5)

If rewriting the interrupt control register for interrupt B with the interrupt A routine and enabling multiple interrupts with interrupt C, the above processing is required at the end of the interrupt A and interrupt C routines.

```
            Interrupt A routine
Interrupt_A:
    pushm R0,R1,R2,R3,A0,A1     ; Store registers
    ••••
    bclr  3,TA0IC               ; Rewrite interrupt control register of interrupt B
    ••••
    popm  R0,R1,R2,R3,A0,A1     ; Restore registers
    fclr  U                     ; Select ISP (Unnecessary if the ISP has been selected)
    pushm R0                    ; Store R0 register
    mov.w 6[SP],R0              ; Read FLG on stack
    ldc   R0,FLG                ; Set in FLG
    popm  R0                    ; Restore R0 register
    nop                         ; Dummy
    reit                        ; Interrupt completed


            Interrupt C routine
Interrupt_C:
    pushm R0,R1,R2,R3,A0,A1     ; Store registers
    fset  I                     ; Multiple interrupt enabled
    ••••
    ••••
    popm  R0,R1,R2,R3,A0,A1     ;Restore registers
    fclr  U                     ; Select ISP (Unnecessary if the ISP has been selected)
    pushm R0                    ; Store R0 register
    mov.w 6[SP],R0              ; Read FLG on stack
    ldc   R0,FLG                ; Set in FLG
    popm  R0                    ; Restore R0 register
    nop                         ; Dummy
    reit                        ; Interrupt completed
```

10. Watchdog Timer

The watchdog timer has the function of detecting when the program is out of control. Therefore, we recommend using the watchdog timer to improve reliability of a system. The watchdog timer is a 15-bit counter which down-counts the clock derived by dividing the BCLK using the prescaler. Whether a watchdog timer interrupt is generated or reset is selected when an underflow occurs in the watchdog timer. Watchdog timer interrupt is selected when bit 6 of the system control register 0 (address 0008_{16} :CM06) is "0" and reset is selected when CM06 is "1". No value other than "1" can be written in CM06. Once when reset is selected (CM06="1"), watchdog timer interrupt cannot be selected by software.
When X_{IN} is selected for the BCLK, bit 7 of the watchdog timer control register (address $000F_{16}$) selects the prescaler division ratio (by 16 or by 128). When X_{CIN} is selected as the BCLK, the prescaler is set for division by 2 regardless of bit 7 of the watchdog timer control register (address $000F_{16}$). Therefore, the watchdog timer cycle can be calculated as follows. However, errors can arise in the watchdog timer cycle due to the prescaler.

When X_{IN} is selected in BCLK

$$\text{Watchdog timer cycle} = \frac{\text{Prescaler division ratio (16 or 128) x watchdog timer count (32768)}}{\text{BCLK}}$$

When X_{CIN} is selected in BCLK

$$\text{Watchdog timer cycle} = \frac{\text{Prescaler division ratio (2) x watchdog timer count (32768)}}{\text{BCLK}}$$

For example, when BCLK is 20MHz and the prescaler division ratio is set to 16, the monitor timer cycle is approximately 26.2 ms.

The watchdog timer is initialized by writing to the watchdog timer start register (address $000E_{16}$) and when a watchdog timer interrupt request is generated. The prescaler is initialized only when the microcomputer is reset. After a reset is cancelled, the watchdog timer and prescaler are both stopped. The count is started by writing to the watchdog timer start register (address $000E_{16}$). CM06 is initialized only at reset. After reset, watchdog timer interrupt is selected.
The watchdog timer and the prescaler stop in stop mode, wait mode and hold status. After exiting these modes and status, counting starts from the value remained before.
In the stop mode, wait mode and hold state, the watchdog timer and prescaler are stopped. Counting is resumed from the held value when the modes or state are released. Figure 10.1 shows the block diagram of the watchdog timer. Figure 10.2 shows the watchdog timer-related registers.

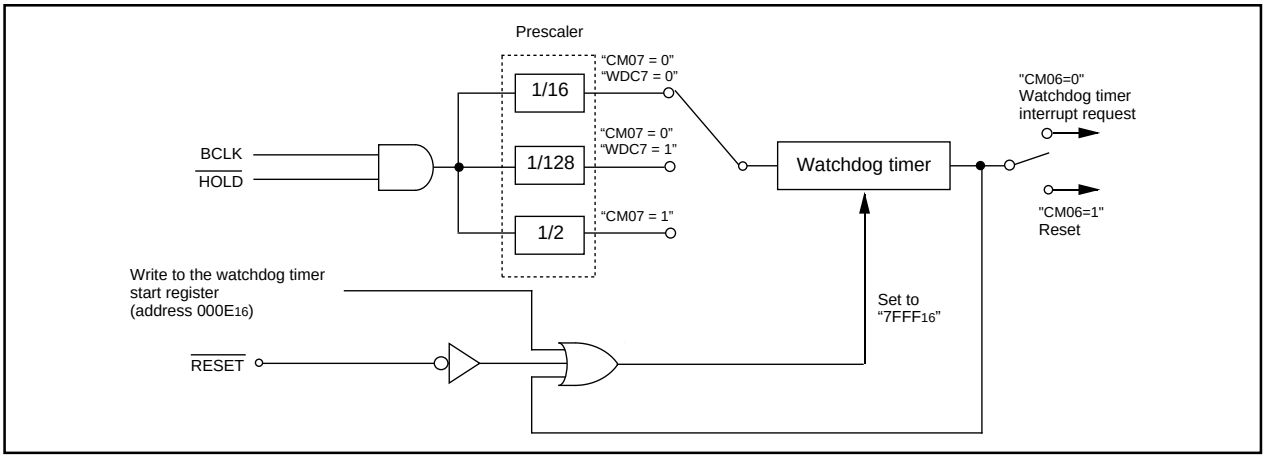

Figure 10.1 Block diagram of watchdog timer

Watchdog timer control register

b7	b6	b5	b4	b3	b2	b1	b0
	0	0					

Symbol: WDC | Address: 000F16 | When reset: 000XXXXX2

Bit symbol	Bit name	Function	R	W
	High-order bit of watchdog timer		O	X
	Reserved bit	Must always be set to “0”	O	O
WDC7	Prescaler select bit	0 : Divided by 16 1 : Divided by 128	O	O

Watchdog timer start register

b7	b0

Symbol: WDTS | Address: 000E16 | When reset: Indeterminate

Function	R	W
The watchdog timer is initialized and starts counting after a write instruction to this register. The watchdog timer value is always initialized to “7FFF16” regardless of whatever value is written.	X	O

System clock control register 0 (Note 1)

b7	b6	b5	b4	b3	b2	b1	b0

Symbol: CM0 | Address: 000616 | When reset: 0816

Bit symbol	Bit name	Function	R	W
CM00	Clock output function select bit (Note 2)	b1 b0 0 0 : I/O port P53 0 1 : fC output (Note 3) 1 0 : f8 output (Note 3) 1 1 : f32 output (Note 3)	O	O
CM01			O	O
CM02	WAIT peripheral function clock stop bit	0 : Do not stop peripheral clock in wait mode 1 : Stop peripheral clock in wait mode (Note 10)	O	O
CM03	XCIN-XCOUT drive capacity select bit (Note 4)	0 : LOW 1 : HIGH	O	O
CM04	Port XC select bit	0 : I/O port 1 : XCIN-XCOUT generation (Note 11)	O	O
CM05	Main clock (XIN-XOUT) stop bit (Note 5, 6)	0 : On 1 : Off (Note 7)	O	O
CM06	Watchdog timer function select bit	0 : Watchdog timer interrupt 1 : Reset (Note 8)	O	O
CM07	System clock select bit (Note 9)	0 : XIN, XOUT 1 : XCIN, XCOUT	O	O

Note 1: Set bit 0 of the protect register (address 000A16) to “1” before writing to this register.
Note 2: When outputting BCLK (bit 7 of processor mode register 0 is "0"), set these bits to "00". When outputting ALE to P53 (bit 5 and 4 of processor mode register 0 is "01"), set these bits to "00". The port P53 function is not selected even when you set "00" in microprocessor or memory expansion mode and bit 7 of the processor mode register 0 is "1".
Note 3: When selecting fC, f8 or f32 in single chip mode, must use P57 as input port.
Note 4: Changes to “1” when shifting to stop mode or reset.
Note 5: When entering the power saving mode, the main clock is stopped using this bit. To stop the main clock, set system clock stop bit (CM07) to "1" while an oscillation of sub clock is stable. Then set this bit to "1".
Note 6: When this bit is "1", XOUT is "H". Also, the internal feedback resistance remains ON, so XIN is pulled up to XOUT ("H" level) via the feedback resistance.
Note 7: When the main clock is stopped, the main clock division register (address 000C16) is set to the division by 8 mode.
Note 8: When "1" has been set once, "0" cannot be written by software.
Note 9: To set CM07 "1" from "0", first set CM04 to "1", and an oscillation of sub clock is stable. Then set CM07. Also, to set CM07 "0" from "1", first set CM05 to "1", and an oscillation of main clock is stable. Then set CM07. Do not rewrite CM04 and CM05 simultaneously.
Note 10: fc32 is not included.
Note 11: When XCIN-XCOUT is used, set port P86 and P87 to no pull-up resistance with the input port.

Figure 10.2 Watchdog timer control and start registers

11. DMAC

This microcomputer has four DMAC (direct memory access controller) channels that allow data to be sent to memory without using the CPU. DMAC is a function that to transmit 1 data of a source address (8 bits / 16 bits) to a destination address when transmission request occurs. When using three or more DMAC channels, the register bank 1 register and high-speed interrupt register are used as DMAC registers. If you are using three or more DMAC channels, you cannot, therefore, use high-speed interrupts. The CPU and DMAC use the same data bus, but the DMAC has a higher bus access privilege than the CPU, and because of the use of cycle-steeling, operations are performed at high-speed from the occurrence of a transfer request until one word (16 bits) or 1 byte (8 bits) of data have been sent. Figure 11.1 shows the mapping of registers used by the DMAC. Table 11.1 shows DMAC specifications. Figures 11.2 to 11.5 show the structures of the registers used.

As the registers shown in Figure 11.1 is allocated in CPU, use LDC instruction when writing. When writing to DCT2, DCT3, DRC2, DRC3, DMA2 and DMA3, set register bank select flag (B flag) to "1" and use MOV instruction to set R0 to R3, A0 and A1 registers. When writing to DSA2 and DSA3, set register bank select flag (B flag) to "1" and use LDC instruction to set SB and FB registers.

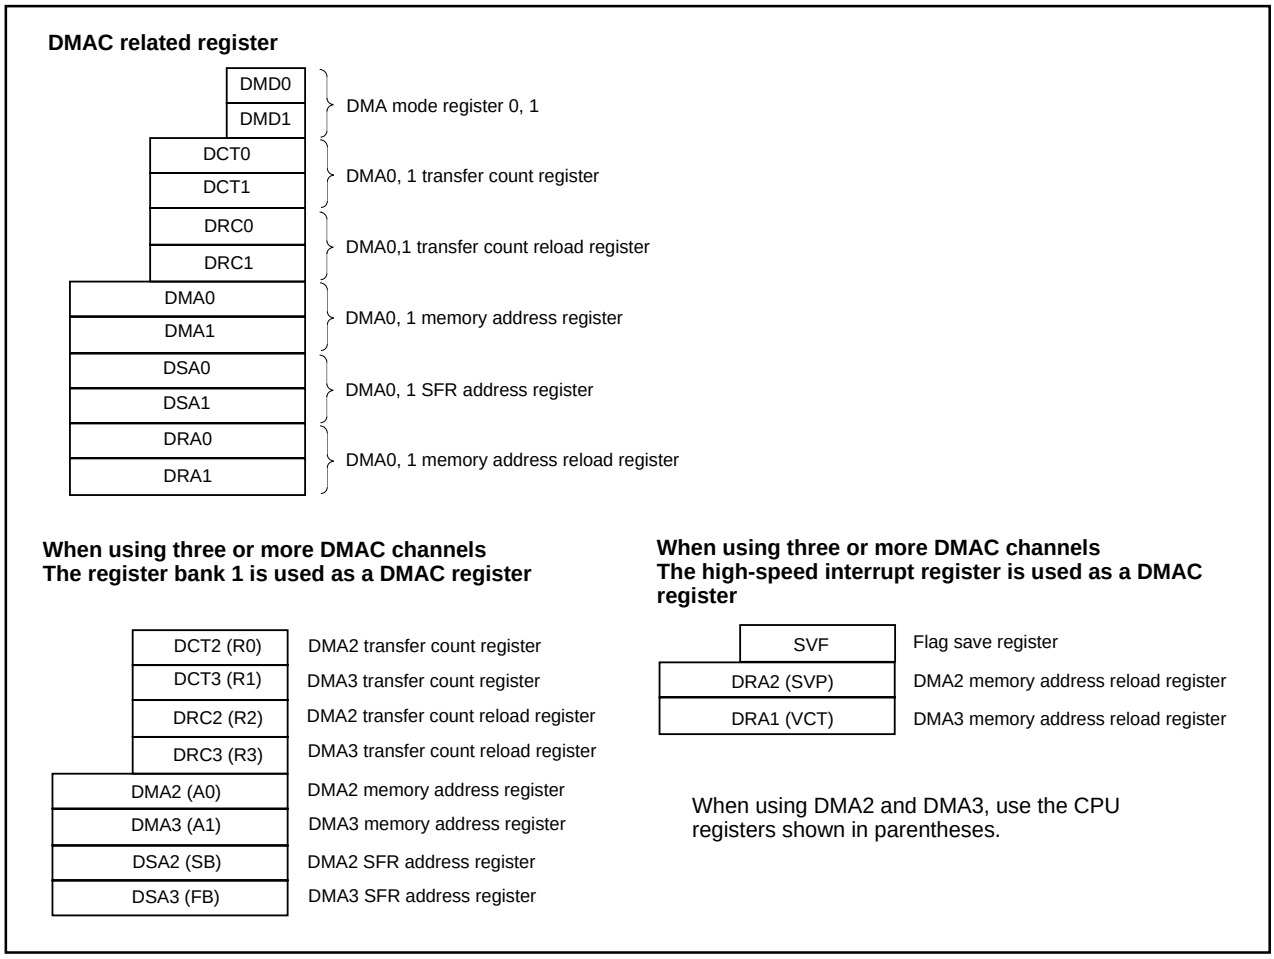

Figure 11.1 Register map using DMAC

In addition to writing to the software DMA request bit to start DMAC transfer, the interrupt request signals output from the functions specified in the DMA request factor select bits are also used. However, in contrast to the interrupt requests, repeated DMA requests can be received, regardless of the interrupt flag.

(Note, however, that the number of actual transfers may not match the number of transfer requests if the DMA request cycle is shorter than the DMR transfer cycle. For details, see the description of the DMAC request bit.)

Table 11.1 DMAC specifications

Item	Specification
No. of channels	4 (cycle steal method)
Transfer memory space	• From any address in the 16 Mbytes space to a fixed address (16 Mbytes space) • From a fixed address (16 Mbytes space) to any address in the 16 M bytes space
Maximum No. of bytes transferred	128 Kbytes (with 16-bit transfers) or 64 Kbytes (with 8-bit transfers)
DMA request factors (Note)	Falling edge of $\overline{INT0}$ to $\overline{INT3}$ or both edge Timer A0 to timer A4 interrupt requests Timer B0 to timer B5 interrupt requests UART0 to UART4 transmission and reception interrupt requests A/D conversion interrupt requests Software triggers
Channel priority	DMA0 > DMA1 > DMA2 > DMA3 (DMA0 is the first priority)
Transfer unit	8 bits or 16 bits
Transfer address direction	forward/fixed (forward direction cannot be specified for both source and destination simultaneously)
Transfer mode	• Single transfer Transfer ends when the transfer count register is "0000_{16}". • Repeat transfer When the transfer counter is "0000_{16}", the value in the transfer counter reload register is reloaded into the transfer counter and the DMA transfer is continued
DMA interrupt request generation timing	When the transfer counter register changes from "0001_{16}" to "0000_{16}".
DMA startup	• Single transfer Transfer starts when DMA transfer count register is more than "0001_{16}" and the DMA is requested after "01_2" is written to the channel i transfer mode select bits • Repeat transfer Transfer starts when the DMA is requested after "11_2" is written to the channel i transfer mode select bits
DMA shutdown	• Single transfer When "00_2" is written to the channel i transfer mode select bits and DMA transfer count register becomes "0000_{16}" by DMA transfer or write • Repeat transfer When "00_2" is written to the channel i transfer mode select bits
Reload timing	When the transfer counter register changes from "0001_{16}" to "0000_{16}" in repeat transfer mode.
Reading / writing the register	Registers are always read/write enabled.
Number of DMA transfer cycles	Between SFR and internal RAM : 3 cycles Between external I/O and external memory : minimum 3 cycles

Note: DMA transfer is not effective to any interrupt.

DMAi request cause select register (i = 0 to 3)(Note 1)



Symbol	Address	When reset
DMiSL	0378$_{16}$ to 037B$_{16}$	0X000000$_2$

Bit symbol	Bit name	Function	R	W
DSEL0	DMA request cause select bit (Note 2)	b4 b3 b2 b1 b0 0 0 0 0 0 : Software trigger 0 0 0 0 1 : Falling edge of INTi pin (Note 3) 0 0 0 1 0 : Two edges of INTi pin (Note 3) 0 0 0 1 1 : Timer A0 0 0 1 0 0 : Timer A1 0 0 1 0 1 : Timer A2 0 0 1 1 0 : Timer A3 0 0 1 1 1 : Timer A4 0 1 0 0 0 : Timer B0 0 1 0 0 1 : Timer B1 0 1 0 1 0 : Timer B2 0 1 0 1 1 : Timer B3 0 1 1 0 0 : Timer B4 0 1 1 0 1 : Timer B5 0 1 1 1 0 : UART0 transmit 0 1 1 1 1 : UART0 receive 1 0 0 0 0 : UART1 transmit 1 0 0 0 1 : UART1 receive 1 0 0 1 0 : UART2 transmit 1 0 0 1 1 : UART2 receive/ACK (Note 4) 1 0 1 0 0 : UART3 transmit 1 0 1 0 1 : UART3 receive/ACK (Note 4) 1 0 1 1 0 : UART4 transmit 1 0 1 1 1 : UART4 receive/ACK (Note 4) 1 1 0 0 0 : A/D conversion 1 1 0 0 1 to 1 1 1 1 1 : Inhibit	○	○
DSEL1			○	○
DSEL2			○	○
DSEL3			○	○
DSEL4			○	○
DSR	Software DMA request bit (Note 5)	If software trigger is selected, a DMA request is generated by setting this bit to “1” (When read, the value of this bit is always “0”)	○	○
Nothing is assigned. When write, set "0". When read, its content is indeterminate.			–	–
DRQ	DMA request bit (Note 5,6)	0 : Not requested 1 : Requested	○	○

Note 1: Please refer to DMAC precautions.
Note 2: Set DMA inhibit before changing the DMA request cause. Set DRQ to "1" simultaneously.
e.g.) MOV.B #083h, DMiSL ; Set timer A0
Note 3: DMA0-INT0, DMA1-INT1, DMA2-INT2, and DMA3-INT3 correspond to DMAi and INTi. However, when INT3 pin becomes data bus in microprocessor mode, DMA3-INT3 cannot be used.
Note 4: UARTi reception and ACK switching are effected using the UARTi special mode register and UARTi special mode register 2.
Note 5: When setting DSR to "1", set DRQ to "1" using OR instruction etc. simultaneously.
e.g.) OR.B #0A0h, DMiSL
Note 6: Do not write "0" to this bit. There is no need to clear the DMA request bit.

Figure 11.2 DMAC register (1)

DMA mode register 0
(CPU internal register)

b7	b6	b5	b4	b3	b2	b1	b0

Symbol: DMD0

When reset: 00_{16}

Bit symbol	Bit name	Function	R	W
MD00	Channel 0 transfer mode select bit	b1 b0 0 0 : DMA inhibit 0 1 : Single transfer 1 0 : Reserved 1 1 : Repeat transfer	○	○
MD01			○	○
BW0	Channel 0 transfer unit select bit	0 : 8 bits 1 : 16 bits	○	○
RW0	Channel 0 transfer direction select bit	0 : Fixed address to memory (forward direction) 1 : Memory (forward direction) to fixed address	○	○
MD10	Channel 1 transfer mode select bit	b5 b4 0 0 : DMA inhibit 0 1 : Single transfer 1 0 : Reserved 1 1 : Repeat transfer	○	○
MD11			○	○
BW1	Channel 1 transfer unit select bit	0 : 8 bits 1 : 16 bits	○	○
RW1	Channel 1 transfer direction select bit	0 : Fixed address to memory (forward direction) 1 : Memory (forward direction) to fixed address	○	○

DMA mode register 1
(CPU internal register)

b7	b6	b5	b4	b3	b2	b1	b0

Symbol: DMD1

When reset: 00_{16}

Bit symbol	Bit name	Function	R	W
MD20	Channel 2 transfer mode select bit	b1 b0 0 0 : DMA inhibit 0 1 : Single transfer 1 0 : Reserved 1 1 : Repeat transfer	○	○
MD21			○	○
BW2	Channel 2 transfer unit select bit	0 : 8 bits 1 : 16 bits	○	○
RW2	Channel 2 transfer direction select bit	0 : Fixed address to memory (forward direction) 1 : Memory (forward direction) to fixed address	○	○
MD30	Channel 3 transfer mode select bit	b5 b4 0 0 : DMA inhibit 0 1 : Single transfer 1 0 : Reserved 1 1 : Repeat transfer	○	○
MD31			○	○
BW3	Channel 3 transfer unit select bit	0 : 8 bits 1 : 16 bits	○	○
RW3	Channel 3 transfer direction select bit	0 : Fixed address to memory (forward direction) 1 : Memory (forward direction) to fixed address	○	○

Figure 11.3 DMAC register (2)

DMAi transfer count register (i = 0 to 3)
(CPU internal register)

Symbol	When reset
DCT0	XXXX16
DCT1	XXXX16
DCT2 (bank 1;R0) (Note 1)	000016
DCT3 (bank 1;R1) (Note 1)	000016

b15 b0

Function	Transfer count specification	R	W
• Transfer counter Set transfer number	000016 to FFFF16	○	○

Note 1: When setting DCT2 and DCT3, set "1" to the register bank select flag (B flag) of flag register (FLG), and then set desired value to R0 and R1 of register bank 1.
Note 2: When "0" is set to this register, data transfer is not done even if DMA is requested.

DMAi transfer count reload register (i = 0 to 3)
(CPU internal register)

Symbol	When reset
DRC0	XXXX16
DRC1	XXXX16
DRC2 (bank 1;R2) (Note 1)	000016
DRC3 (bank 1;R3) (Note 1)	000016

b15 b0

Function	Transfer count specification	R	W
• Transfer count register reload value Set transfer number	000016 to FFFF16	○	○

Note: When setting DRC2 and DRC3, set "1" to the register bank select flag (B flag) of flag register (FLG), and then set desired value to R2 and R3 of register bank 1.

Figure 11.4 DMAC register (3)

DMAi memory address register (i = 0 to 3)
(CPU internal register)

Symbol	When reset
DMA0	XXXXXX16
DMA1	XXXXXX16
DMA2 (bank 1;A0) (Note 1)	000000 16
DMA3 (bank 1;A1) (Note 1)	000000 16

b23 b0

Function	Transfer address specification area	R	W
• Memory address (Note 2) Set source or destination memory address	000000 16 to FFFFFF 16 (16 Mbytes area)	O	O

Note 1: When setting DMA2 and DMA3, set "1" to the register bank select flag (B flag) of flag register (FLG), and set desired value to A0 and A1 of register bank 1.
Note 2: When the transfer direction select bit is "0" (fixed address to memory), this register is destination memory address.
When the transfer direction select bit is "1" (memory to fixed address), this register is source memory address.

DMAi SFR address register (i = 0 to 3)
(CPU internal register)

Symbol	When reset
DSA0	XXXXXX16
DSA1	XXXXXX16
DSA2 (bank 1;SB) (Note 1)	000000 16
DSA3 (bank 1;FB) (Note 1)	000000 16

b23 b0

Function	Transfer address specification area	R	W
• SFR address (Note 2) Set source or destination fixed address	000000 16 to FFFFFF 16 (16 Mbytes area)	O	O

Note 1: When setting DSA2, set "1" to the register bank select flag (B flag) of flag register (FLG), and set desired value to SB of register bank 1.
When setting DSA3, set "1" to the register bank select flag (B flag) of flag register (FLG), and set desired value to FB of register bank 1.
Note 2: When the transfer direction select bit is "0" (fixed address to memory), this register is source fixed address.
When the transfer direction select bit is "1" (memory to fixed address), this register is destination fixed address.

DMAi memory address reload register (i = 0 to 3)
(CPU internal register)

Symbol	When reset
DRA0	XXXXXX16
DRA1	XXXXXX16
DRA2 (SVP) (Note)	XXXXXX16
DRA3 (VCT) (Note)	XXXXXX16

b23 b0

Function	Transfer address specification area	R	W
• Memory address register reload value Set source or destination memory address	000000 16 to FFFFFF 16 (16 Mbytes area)	O	O

Note: When setting DRA2, set desired value to save PC register (SVP).
When setting DRA3, set desired value to vector register (VCT).

Figure 11.5 DMAC register (4)

(1) Transfer cycle

The transfer cycle consists of the bus cycle in which data is read from memory or from the SFR area (source read) and the bus cycle in which the data is written to memory or to the SFR area (destination write). The number of read and write bus cycles depends on the source and destination addresses. In memory expansion mode and microprocessor mode, the number of read and write bus cycles also depends on the level of the BYTE pin. Also, the bus cycle itself is longer when software waits are inserted.

(a) Effect of source and destination addresses

When 16-bit data is transferred on a 16-bit data bus, and the source and destination both start at odd addresses, there are one more source read cycle and destination write cycle than when the source and destination both start at even addresses.

(b) Effect of external data bus width control register

When in memory expansion mode or microprocessor mode, the transfer cycle changes according to the data bus width at the source and destination.

1. When transferring 16 bits of data and the data bus width at the source and at the destination is 8 bits (data bus width bit = “0”), there are two 8-bit data transfers. Therefore, two bus cycles are required for reading and two cycles for writing.
2. When transferring 16 bits of data and the data bus width at the source is 8 bits (data bus width bit = “0”) and the data bus width at the destination is 16 bits (data bus width bit = “1”), the data is read in two 8-bit blocks and written as 16-bit data. Therefore, two bus cycles are required for reading and one cycle for writing.
3. When transferring 16 bits of data and the data bus width at the source is 16 bits (data bus width bit = “1”) and the data bus width at the destination is 8 bits (data bus width bit = “0”), 16 bits of data are read and written as two 8-bit blocks. Therefore, one bus cycle is required for reading and two cycles for writing.

(c) Effect of software wait

When the SFR area or a memory area with a software wait is accessed, the number of cycles is increased for the wait by 1 bus cycle. The length of the cycle is determined by BCLK.

Figure 11.6 shows the example of the transfer cycles for a source read. Figure 11.6 shows the destination is external area, the destination write cycle is shown as two cycle (one bus cycle) and the source read cycles for the different conditions. In reality, the destination write cycle is subject to the same conditions as the source read cycle, with the transfer cycle changing accordingly. When calculating the transfer cycle, remember to apply the respective conditions to both the destination write cycle and the source read cycle. For example (2) in Figure 11.6, if data is being transferred in 16-bit units on an 8-bit bus, two bus cycles are required for both the source read cycle and the destination write cycle.

(1) •When 8-bit data is transferred
•When 16-bit data is transferred on a 16-bit data bus and the source address is even

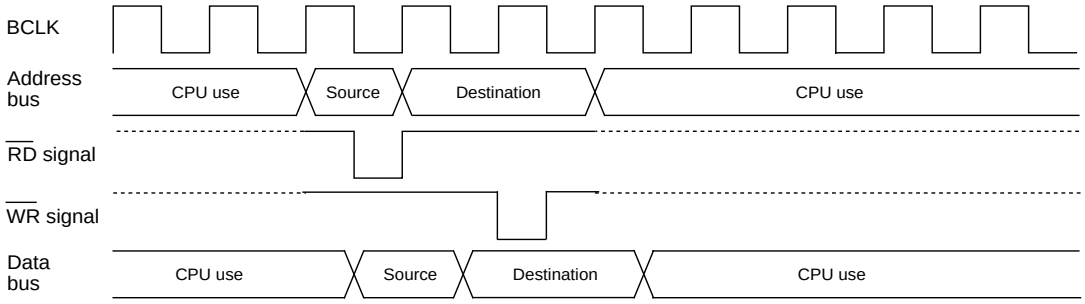

(2) •When 16-bit data is transferred and the source address is odd
•When 16-bit data is transferred and the width of data bus at the source is 8-bit
(When the width of data bus at the destination is 8-bit, there are also two destination write cycles).

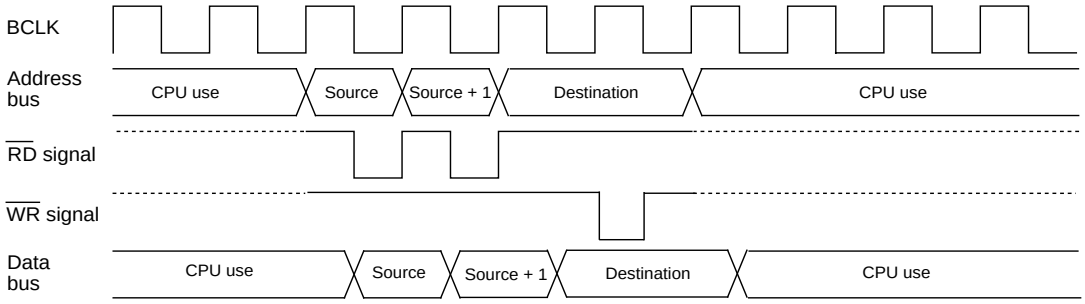

(3) •When one wait is inserted into the source read under the conditions in (1)

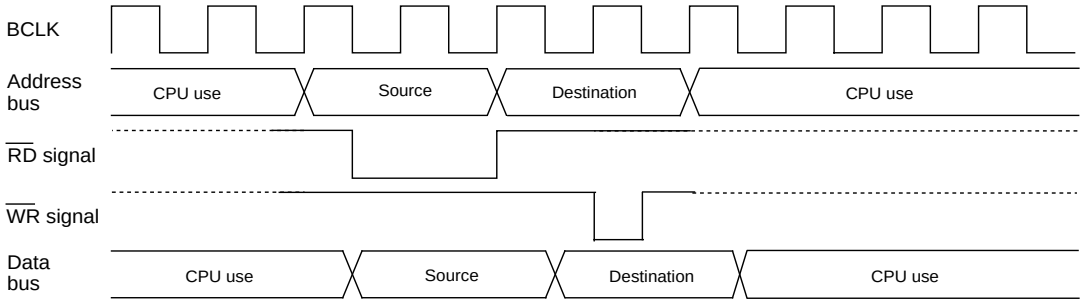

(4) •When one wait is inserted into the source read under the conditions in (2)
(When 16-bit data is transferred and the width of data but at the destination is 8-bit, there are two destination write cycles).

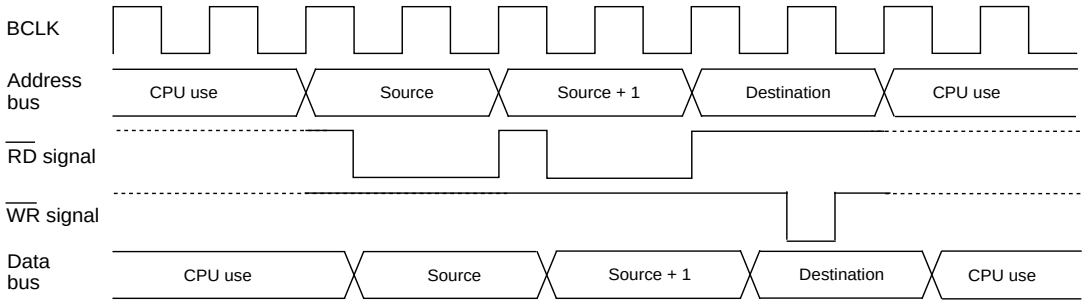

Note: The same timing changes occur with the respective conditions at the destination as at the source.

Figure 11.6 Example of the transfer cycles for a source read

(2) DMAC transfer cycles

Any combination of even or odd transfer read and write addresses is possible. Table 11.2 shows the number of DMAC transfer cycles.

The number of DMAC transfer cycles can be calculated as follows:

No. of transfer cycles per transfer unit = No. of read cycles x j + No. of write cycles x k

Table 11.2 No. of DMAC transfer cycles

Transfer unit	Bus width	Access address	Single-chip mode		Memory expansion mode Microprocessor mode	
			No. of read cycles	No. of write cycles	No. of read cycles	No. of write cycles
8-bit transfers (BWi = "0")	16-bit (DSi = "1")	Even	1	1	1	1
		Odd	1	1	1	1
	8-bit (DSi = "0")	Even	—	—	1	1
		Odd	—	—	1	1
16-bit transfers (BWi = "1")	16-bit (DSi = "1")	Even	1	1	1	1
		Odd	2	2	2	2
	8-bit (DSi = "0")	Even	—	—	2	2
		Odd	—	—	2	2

Coefficient j, k

Internal Memory			External Memory					
Internal ROM/RAM		SFR area	Separate bus				Multiplex bus	
No wait	With wait		No wait	One wait	Two waits	Three waits	Two waits	Three waits
j=1 k=1	j=2 k=2	j=2 k=2	j=1 k=2	j=2 k=2	j=3 k=3	j=4 k=4	j=3 k=3	j=4 k=4

DMA Request Bit

The DMAC can issue DMA requests using preselected DMA request factors for each channel as triggers.

The DMA transfer request factors include the reception of DMA request signals from the internal peripheral functions, software DMA factors generated by the program, and external factors using input from external interrupt signals.

See the description of the DMAi factor selection register for details of how to select DMA request factors.

DMA requests are received as DMA requests when the DMAi request bit is set to "1" and the channel i transfer mode select bits are "01" or "11". Therefore, even if the DMAi request bit is "1", no DMA request is received if the channel i transfer mode select bit is "00". In this case, DMAi request bit is cleared.

Because the channel i transfer mode select bits default to "00" after a reset, remember to set the channel i transfer mode select bit for the channel to be activated after setting the DMAC related registers. This enables receipt of the DMA requests for that channel, and DMA transfers are then performed when the DMAi request bit is set.

The following describes when the DMAi request bit is set and cleared.

(1) Internal factors

The DMAi request flag is set to “1” in response to internal factors at the same time as the interrupt request bit of the interrupt control register for each factor is set. This is because, except for software trigger DMA factors, they use the interrupt request signals output by each function.

The DMAi request bit is cleared to "0" when the DMA transfer starts or the DMA transfer is in disable state (channel i transfer mode select bits are "00" and the DMAi transfer count register is "0").

(2) External factors

These are DMA request factors that are generated by the input edge from the $\overline{\text{INTi}}$ pin (where i indicates the DMAC channel). When the $\overline{\text{INTi}}$ pin is selected by the DMAi request factor select bit as an external factor, the inputs from these pins become the DMA request signals.

When an external factor is selected, the DMAi request bit is set, according to the function specified in the DMA request factor select bit, on either the falling edge of the signal input via the $\overline{\text{INTi}}$ pins, or both edges.

When an external factor is selected, the DMAi request bit is cleared, in the same way as the DMAi request bit is cleared for internal factors, when the DMA transfer starts or the DMA transfer is in disable state.

(3) Relationship between external factor request input and DMAi request flag, and DMA transfer timing

When the request inputs to DMAi occur in the same sampling cycle (between the falling edge of BCLK and the next falling edge), the DMAi request bits are set simultaneously, but if the DMAi enable bits are all set, DMA0 takes priority and the transfer starts. When one transfer unit is complete, the bus privilege is returned to the CPU. When the CPU has completed one bus access, DMA1 transfer starts, and, when one transfer unit is complete, the privilege is again returned to the CPU.

The priority is as follows: DMA0 > DMA1 > DMA2 > DMA3.

Figure 11.7. DMA transfer example by external factors shows what happens when DMA0 and DMA1 requests occur in the same sampling cycle.

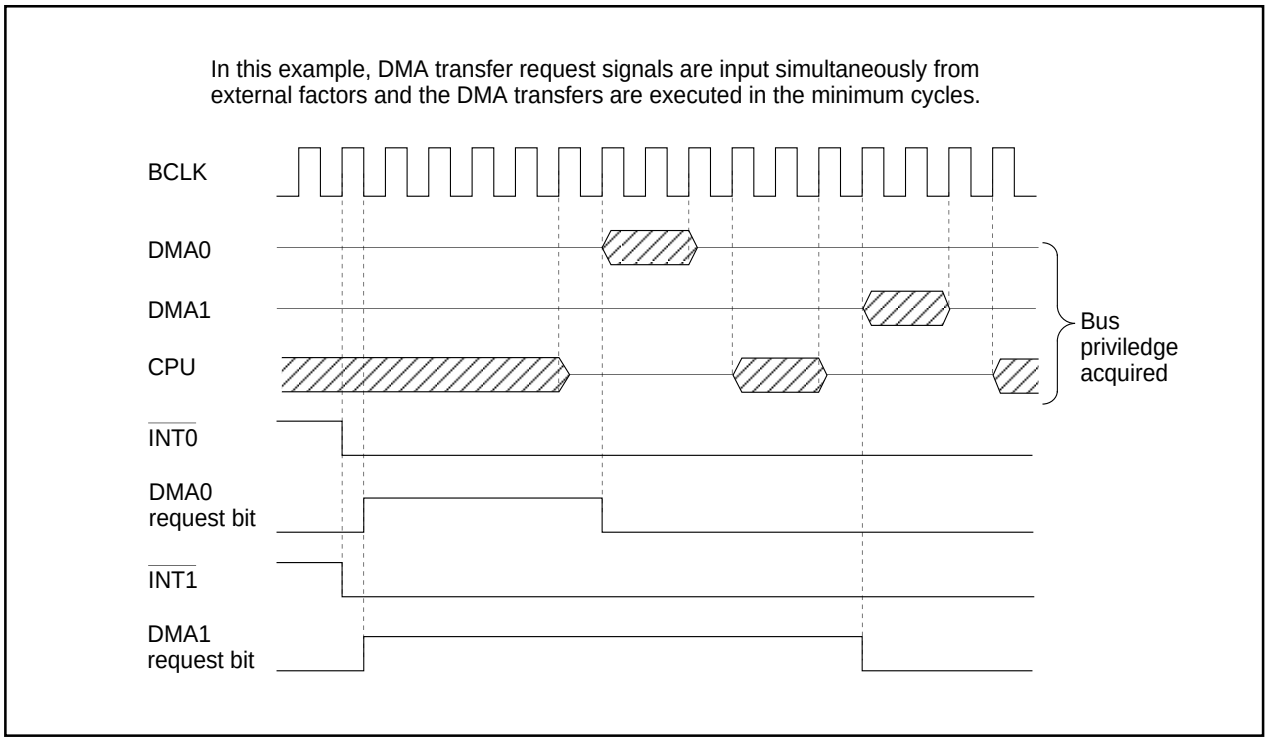

Figure 11.7 DMA transfer example by external factors

Precautions for DMAC

(1) Do not clear the DMA request bit of the DMAi request cause select register.
In M16C/80, when a DMA request is generated while the channel is disabled (Note), the DMA transfer is not executed and the DMA request bit is cleared automatically.
Note :The DMA is disabled or the transfer count register is "0".

(2) When DMA transfer is done by a software trigger, set DSR and DRQ of the DMAi request cause select register to "1" simultaneously using the OR instruction.
e.g.) OR.B #0A0h, DMiSL ; DMiSL is DMAi request cause select register

(3) When changing the DMAi request cause select bit of the DMAi request cause select register, set "1" to the DMA request bit, simultaneously. In this case, set the corresponding DMA channel to disabled before changing the DMAi request cause select bit. At least 26 cycles are needed from the instruction to write to the DMAi request cause select register to enable DMA.

Example) When DMA request cause is changed to timer A0 and using DMA0 in single transfer after DMA initial setting

```
        push.w    R0                ; Store R0 register
        stc       DMD0, R0          ; Read DMA mode register 0
        and.b     #11111100b, R0L   ; Clear DMA0 transfer mode select bit to "00"
        ldc       R0, DMD0          ; DMA0 disabled
        mov.b     #10000011b, DM0SL ; Select timer A0
                                    ; (Write "1" to DMA request bit simultaneously)
        push.w    R0                ; Store R0 register
        mov.w     #6,R0             ;
dummy_loop:
        sbjnz.w   #1,R0,dummy_loop  ; Dummy cycle
        pop.w     R0                ; Restore R0 register
        or.b      #00000001b, R0L   ; Set DMA0 single transfer
        ldc       R0, DMD0          ; DMA0 enabled
        pop.w     R0                ; Restore R0 register
```

At least 26 cycles are needed until DMA enabled.

(4) Recommended procedure for starting DMA transfer

•When writing to the DMAi request cause register including overwriting the same value to the DMAi request cause register;

1. Disable the corresponding channel i DMA in DMA mode registers 0 and 1.
2. Set up the peripheral used as the source of the DMA transfer. However, the peripheral should remain disabled at this time. For example, when using UART0 transmit, disable UART0 transmit.
3. Set the DMAi request cause select register. At this time, write a '1' to the DMA request bit (bit 7)

4. Set the following SFR registers:
   •DMAiSFR address register
   •DMAI memory address reload register
   •DMAi memory address register
   •DMAi transfer count reload register
   •DMAi transfer count register
5. At this point, if the number of elapsed cycles are less than 26, add code (NOP's or other processing) to make up some time.
6. Enable the corresponding channel i DMA in the DMA mode registers 0 and 1.
7. Enable the peripheral used as the source of the DMA transfer. For example, when using UART0 transmit, enable UART0 transmit.

•When not writing to the DMAi request cause register;
1. Disable the corresponding channel i DMA in the DMA mode registers 0 and 1.
2. Set up the peripheral used as the source of the DMA transfer. However, the peripheral should remain disabled at this time. For example, when using UART0 transmit, disable UART0 transmit.
3. Set up the following SFR registers:
   •DMAiSFR address register
   •DMAI memory address reload register
   •DMAi memory address register
   •DMAi transfer count reload register
   •DMAi transfer count register
4. Enable the corresponding channel i DMA in the DMA mode registers 0 and 1.
5. Enable the peripheral used as the source of the DMA transfer. For example, when using UART0 transmit, enable UART0 transmit.

(5) Recommended procedure after completing DMA transfer

•Disable the peripheral used as source of the DMA transfer to prevent generating a DMA request.
•Disable the corresponding channel i DMA in the DMA mode registers 0 and 1.

12. Timer

There are eleven 16-bit timers. These timers can be classified by function into timers A (five) and timers B (six). All these timers function independently. Count source for each timer becomes an operation clock for timer operation as counting and reloading, etc. Figures 12.1 and 12.2 show the block diagram of timers.

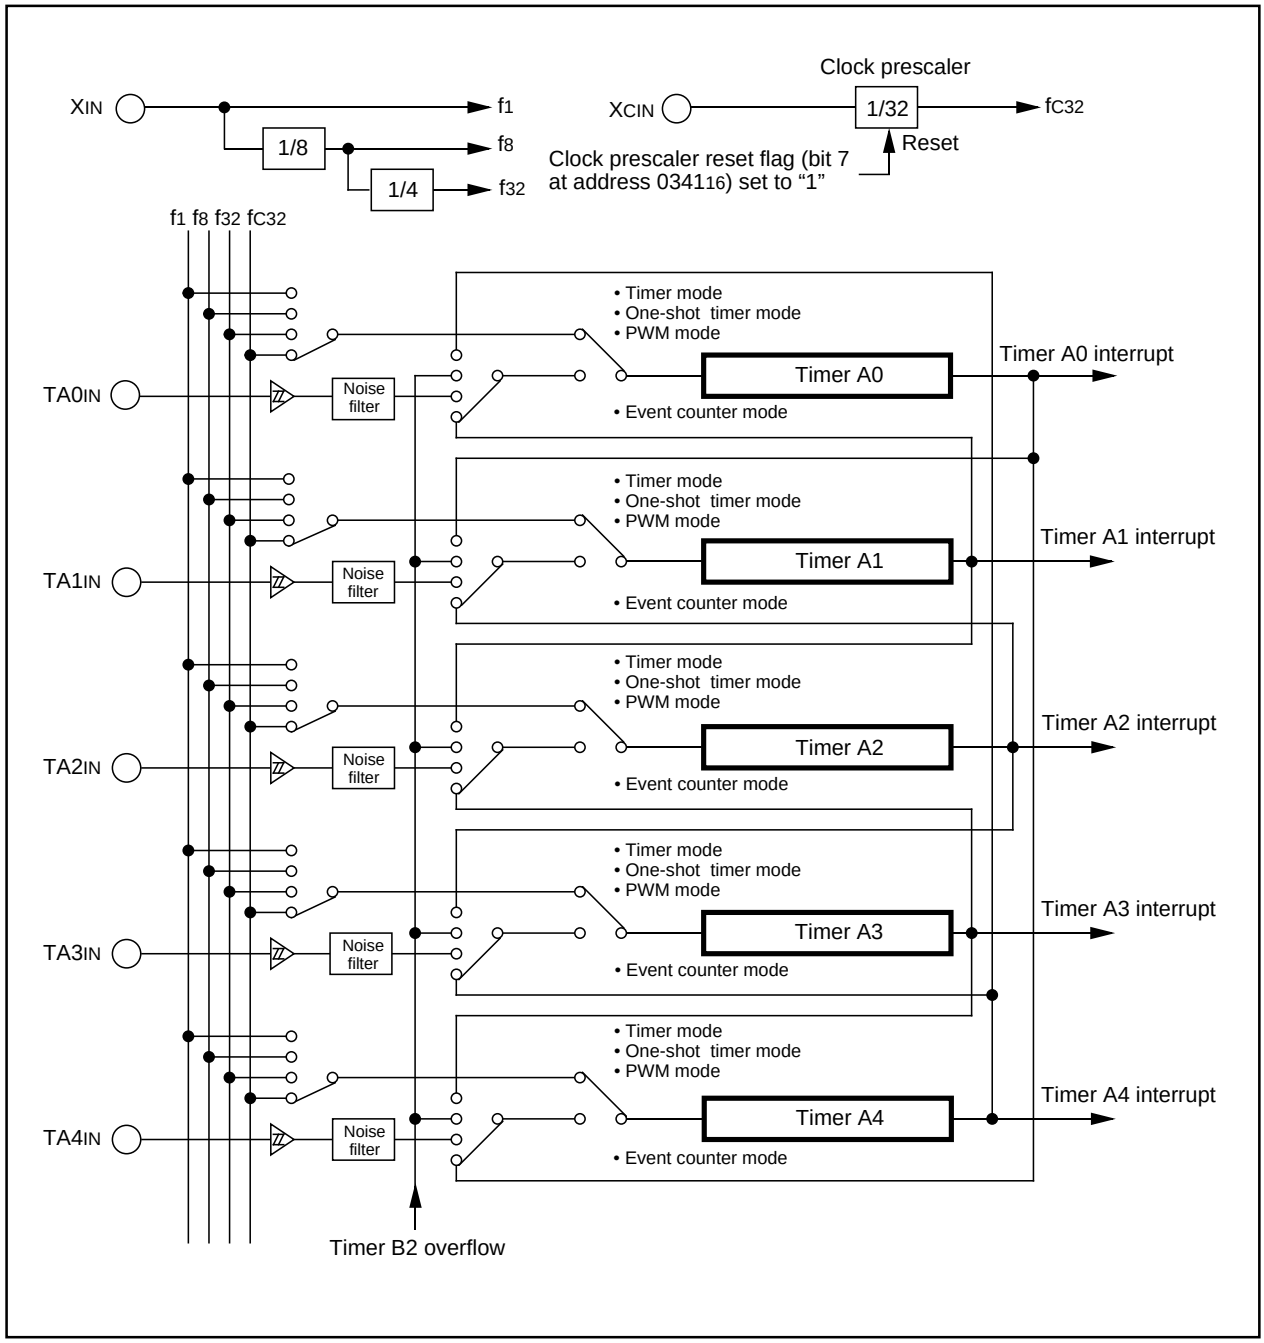

Figure 12.1 Timer A block diagram

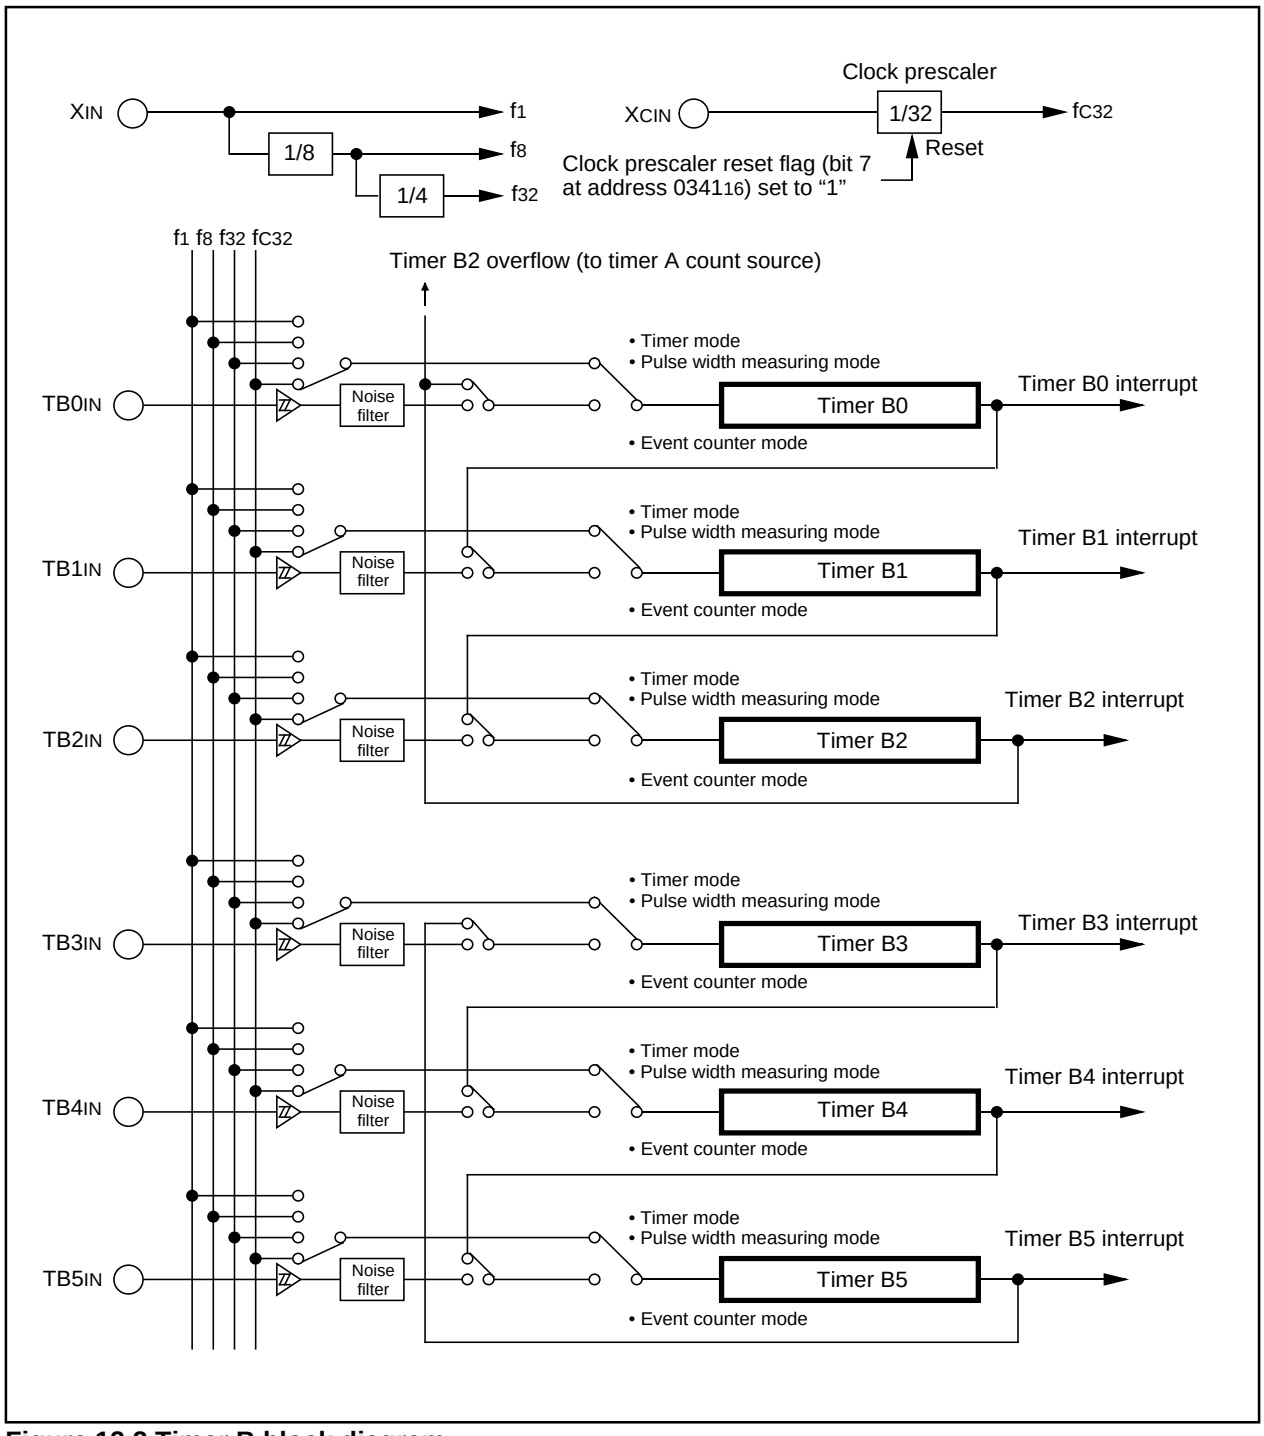

Figure 12.2 Timer B block diagram

13. Timer A

Figure 13.1 shows the block diagram of timer A. Figures 13.2 to 13.4 show the timer A-related registers.

Except in event counter mode, timers A0 through A4 all have the same function. Use the timer Ai mode register (i = 0 to 4) bits 0 and 1 to choose the desired mode.

Timer A has the four operation modes listed as follows:

- Timer mode: The timer counts an internal count source.
- Event counter mode: The timer counts pulses from an external source or a timer over flow.
- One-shot timer mode: The timer stops counting when the count reaches "0000_{16}".
- Pulse width modulation (PWM) mode: The timer outputs pulses of a given width.

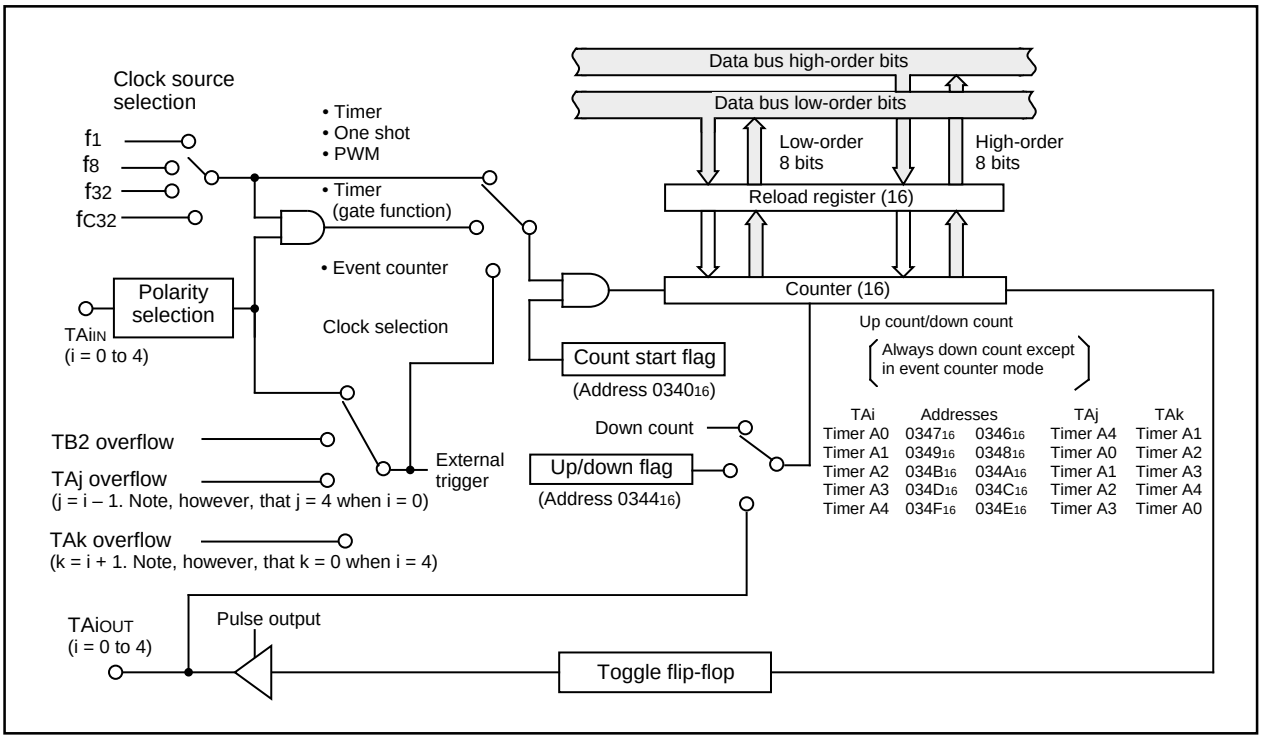

Figure 13.1 Block diagram of timer A

Timer Ai mode register

Symbol: TAiMR(i=0 to 4) Address: 035616 to 035A16 When reset: 00000X002

b7 b6 b5 b4 b3 b2 b1 b0

Bit symbol	Bit name	Function	R	W
TMOD0	Operation mode select bit	b1 b0 0 0 : Timer mode 0 1 : Event counter mode 1 0 : One-shot timer mode 1 1 : Pulse width modulation (PWM) mode	○	○
TMOD1			○	○
MR0	This bit is invalid in M16C/80 series. Port output control is set by the function select registers A and B.		–	–
MR1	Function varies with each operation mode		○	○
MR2			○	○
MR3			○	○
TCK0	Count source select bit (Function varies with each operation mode)		○	○
TCK1			○	○

Figure 13.2 Timer A-related registers (1)

Timer Ai register (Note 1)



Symbol	Address	When reset
TA0	034716,034616	Indeterminate
TA1	034916,034816	Indeterminate
TA2	034B16,034A16	Indeterminate
TA3	034D16,034C16	Indeterminate
TA4	034F16,034E16	Indeterminate

Function	Values that can be set	R	W
• Timer mode Counts an internal count source	000016 to FFFF16	○	○
• Event counter mode Counts pulses from an external source or timer overflow	000016 to FFFF16	○	○
• One-shot timer mode (Note 2, 3) Counts a one shot width	000016 to FFFF16	×	○
• Pulse width modulation mode (16-bit PWM) (Note 2, 4) Functions as a 16-bit pulse width modulator	000016 to FFFE16	×	○
• Pulse width modulation mode (8-bit PWM) (Note 2, 4) Timer low-order address functions as an 8-bit prescaler and high-order address functions as an 8-bit pulse width modulator	0016 to FE16 (High-order address) 0016 to FF16 (Low-order address)	×	○

Note 1: Read and write data in 16-bit units.
Note 2: Use MOV instruction to write to this register.
Note 3: When the timer Ai register is set to "000016", the counter does not operate and the timer Ai interrupt request is not generated. When the pulse is set to output, the pulse does not output from the TAiOUT pin.
Note 4: When the timer Ai register is set to "000016", the pulse width modulator does not operate and the output level of the TAiOUT pin remains "L" level, therefore the timer Ai interrupt request is not generated. This also occurs in the 8-bit pulse width modulator mode when the significant 8 high-order bits in the timer Ai register are set to "0016".

Count start flag

Symbol	Address	When reset
TABSR	034016	0016

Bit symbol	Bit name	Function	R	W
TA0S	Timer A0 count start flag	0 : Stops counting 1 : Starts counting	○	○
TA1S	Timer A1 count start flag		○	○
TA2S	Timer A2 count start flag		○	○
TA3S	Timer A3 count start flag		○	○
TA4S	Timer A4 count start flag		○	○
TB0S	Timer B0 count start flag		○	○
TB1S	Timer B1 count start flag		○	○
TB2S	Timer B2 count start flag		○	○

Up/down flag (Note 1)



Symbol	Address	When reset
UDF	034416	0016

Bit symbol	Bit name	Function	R	W
TA0UD	Timer A0 up/down flag	0 : Down count 1 : Up count This specification becomes valid when the up/down flag content is selected for up/down switching cause	○	○
TA1UD	Timer A1 up/down flag		○	○
TA2UD	Timer A2 up/down flag		○	○
TA3UD	Timer A3 up/down flag		○	○
TA4UD	Timer A4 up/down flag		○	○
TA2P	Timer A2 two-phase pulse signal processing select bit	0 : two-phase pulse signal processing disabled 1 : two-phase pulse signal processing enabled (Note 2) When not using the two-phase pulse signal processing function, set the select bit to “0”	×	○
TA3P	Timer A3 two-phase pulse signal processing select bit		×	○
TA4P	Timer A4 two-phase pulse signal processing select bit		×	○

Note 1: Use MOV instruction to write to this register.
Note 2: Set the corresponding port function select register A to I/O port, and port direction register to "0".

Figure 13.3 Timer A-related registers (2)

One-shot start flag

Symbol	Address	When reset
ONSF	034216	0016

Bit symbol	Bit name	Function	R	W
TA0OS	Timer A0 one-shot start flag	1 : Timer start When read, the value is “0”	○	○
TA1OS	Timer A1 one-shot start flag		○	○
TA2OS	Timer A2 one-shot start flag		○	○
TA3OS	Timer A3 one-shot start flag		○	○
TA4OS	Timer A4 one-shot start flag		○	○
TAZIE	Z phase input enable bit	0 : Invalid 1 : Valid	○	○
TA0TGL	Timer A0 event/trigger select bit	b7 b6 0 0 : Input on TA0IN is selected (Note) 0 1 : TB2 overflow is selected 1 0 : TA4 overflow is selected 1 1 : TA1 overflow is selected	○	○
TA0TGH			○	○

Note: Set the corresponding function select register A to I/O port, and port direction register to “0”.

Trigger select register

Symbol	Address	When reset
TRGSR	034316	0016

Bit symbol	Bit name	Function	R	W
TA1TGL	Timer A1 event/trigger select bit	b1 b0 0 0 : Input on TA1IN is selected (Note) 0 1 : TB2 overflow is selected 1 0 : TA0 overflow is selected 1 1 : TA2 overflow is selected	○	○
TA1TGH			○	○
TA2TGL	Timer A2 event/trigger select bit	b3 b2 0 0 : Input on TA2IN is selected (Note) 0 1 : TB2 overflow is selected 1 0 : TA1 overflow is selected 1 1 : TA3 overflow is selected	○	○
TA2TGH			○	○
TA3TGL	Timer A3 event/trigger select bit	b5 b4 0 0 : Input on TA3IN is selected (Note) 0 1 : TB2 overflow is selected 1 0 : TA2 overflow is selected 1 1 : TA4 overflow is selected	○	○
TA3TGH			○	○
TA4TGL	Timer A4 event/trigger select bit	b7 b6 0 0 : Input on TA4IN is selected (Note) 0 1 : TB2 overflow is selected 1 0 : TA3 overflow is selected 1 1 : TA0 overflow is selected	○	○
TA4TGH			○	○

Note: Set the corresponding function select register A to I/O port, and port direction register to “0”.

Clock prescaler reset flag

Symbol	Address	When reset
CPSRF	034116	0XXXXXXX2

Bit symbol	Bit name	Function	R	W
Nothing is assigned. When write, set "0". When read, their contents are indeterminate.			–	–
CPSR	Clock prescaler reset flag	0 : No effect 1 : Prescaler is reset (When read, the value is “0”)	○	○

Figure 13.4 Timer A-related registers (3)

(1) Timer mode

In this mode, the timer counts an internally generated count source. (See Table 13.1) Figure 13.5 shows the timer Ai mode register in timer mode.

Table 13.1 Specifications of timer mode

Item	Specification
Count source	f_1, f_8, f_{32}, fc_{32}
Count operation	• Down count • When the timer underflows, it reloads the reload register contents before continuing counting
Divide ratio	1/(n+1) n : Set value
Count start condition	Count start flag is set (= 1)
Count stop condition	Count start flag is reset (= 0)
Interrupt request generation timing	When the timer underflows
TAiIN pin function	Programmable I/O port or gate input
TAiOUT pin function	Programmable I/O port or pulse output (Setting by the corresponding function select registers A and B)
Read from timer	Count value can be read out by reading timer Ai register
Write to timer	• When not counting Value written to timer Ai register is written to both reload register and counter • When counting Value written to timer Ai register is written to only reload register (Transferred to counter at next reload time)
Select function	• Gate function Counting can be started and stopped by the TAiIN pin's input signal • Pulse output function Each time the timer underflows, the TAiOUT pin's polarity is reversed

Timer Ai mode register

b7	b6	b5	b4	b3	b2	b1	b0
		0				0	0

Symbol: TAiMR(i=0 to 4) Address: 0356_{16} to $035A_{16}$ When reset: $00000X00_2$

Bit symbol	Bit name	Function	R	W
TMOD0	Operation mode select bit	b1 b0 0 0 : Timer mode	○	○
TMOD1			○	○
MR0	This bit is invalid in M16C/80 series. Port output control is set by the function select registers A and B.		–	–
MR1	Gate function select bit	b4 b3 0 X (Note 1): Gate function not available (TAiIN pin is a normal port pin) 1 0 : Timer counts only when TAiIN pin is held "L" (Note 2) 1 1 : Timer counts only when TAiIN pin is held "H" (Note 2)	○	○
MR2			○	○
MR3	0 (Set to "0" in timer mode)		○	○
TCK0	Count source select bit	b7 b6 0 0 : f_1 0 1 : f_8 1 0 : f_{32} 1 1 : fc_{32}	○	○
TCK1			○	○

Note 1: The bit can be "0" or "1".
Note 2: Set the corresponding port function select register to I/O port, and port direction register to "0".

Figure 13.5 Timer Ai mode register in timer mode

(2) Event counter mode

In this mode, the timer counts an external signal or an internal timer's overflow. Timers A0 and A1 can count a single-phase external signal. Timers A2, A3, and A4 can count a single-phase and a two-phase external signal. Table 13.2 lists timer specifications when counting a single-phase external signal. Figure 13.6 shows the timer Ai mode register in event counter mode. Table 13.3 lists timer specifications when counting a two-phase external signal. Figure 13.7 shows the timer Ai mode register in event counter mode.

Table 13.2 Timer specifications in event counter mode (when not processing two-phase pulse signal)

Item	Specification
Count source	• External signals input to TAiIN pin (effective edge can be selected by software) • TB2 overflows or underflows, TAj overflows or underflows
Count operation	• Up count or down count can be selected by external signal or software • When the timer overflows or underflows, it reloads the reload register contents before continuing counting (Note)
Divide ratio	• 1/ (FFFF16 - n + 1) for up count • 1/ (n + 1) for down count n : Set value
Count start condition	Count start flag is set (= 1)
Count stop condition	Count start flag is reset (= 0)
Interrupt request generation timing	The timer overflows or underflows
TAiIN pin function	Programmable I/O port or count source input
TAiOUT pin function	Programmable I/O port, pulse output, or up/down count select input (Setting by the corresponding function select registers A and B)
Read from timer	Count value can be read out by reading timer Ai register
Write to timer	• When not counting Value written to timer Ai register is written to both reload register and counter • When counting Value written to timer Ai register is written to only reload register (Transferred to counter at next reload time)
Select function	• Free-run count function Even when the timer overflows or underflows, the reload register content is not reloaded to it • Pulse output function Each time the timer overflows or underflows, the TAiOUT pin's polarity is reversed

Note: This does not apply when the free-run function is selected.

Timer Ai mode register
(When not using two-phase pulse signal processing)

b7	b6	b5	b4	b3	b2	b1	b0
		0				0	1

Symbol: TAiMR(i=0 to 4) Address: 035616 to 035A16 When reset: 00000X002

Bit symbol	Bit name	Function	R	W
TMOD0	Operation mode select bit	b1 b0 0 1 : Event counter mode	○	○
TMOD1			○	○
MR0	This bit is invalid in M16C/80 series. Port output control is set by the function select registers A and B.		—	—
MR1	Count polarity select bit (Note 1)	0 : Counts external signal's falling edges 1 : Counts external signal's rising edges	○	○
MR2	Up/down switching cause select bit	0 : Up/down flag's content 1 : TAiOUT pin's input signal (Note 2)	○	○
MR3	0 : (Set to "0" in event counter mode)		○	○
TCK0	Count operation type select bit	0 : Reload type 1 : Free-run type	○	○
TCK1	Two-phase pulse signal processing operation select bit	When not using two-phase pulse signal processing, set this bit to "0"	○	○

Note 1: This bit is valid when only counting an external signal.
Note 2: Set the corresponding function select register A to I/O port, and port direction register to "0".

Figure 13.6 Timer Ai mode register in event counter mode

Table 13.3 Timer specifications in event counter mode

(when processing two-phase pulse signal with timers A2, A3, and A4)

Item	Specification
Count source	• Two-phase pulse signals input to TAiIN or TAiOUT pins (i=2 to 4)
Count operation	• Up count or down count can be selected by two-phase pulse signal • When the timer overflows or underflows, the reload register content is reloaded and the timer starts over again (Note)
Divide ratio	• 1/ (FFFF16 - n + 1) for up count • 1/ (n + 1) for down count n : Set value
Count start condition	Count start flag is set (= 1)
Count stop condition	Count start flag is reset (= 0)
Interrupt request generation timing	Timer overflows or underflows
TAiIN pin function	Two-phase pulse input (Set the corresponding function select registers A to I/O port, and port direction register to "0")
TAiOUT pin function	Two-phase pulse input (Set the corresponding function select registers A to I/O port, and port direction register to "0")
Read from timer	Count value can be read out by reading timer A2, A3, or A4 register
Write to timer	• When not counting Value written to timer Ai register is written to both reload register and counter • When counting Value written to timer Ai register is written to only reload register (Transferred to counter at next reload time)
Select function (Note 2)	• Normal processing operation (TimerA2 and timer A3) The timer counts up rising edges or counts down falling edges on the TAiIN pin when input signal on the TAiOUT pin is “H” 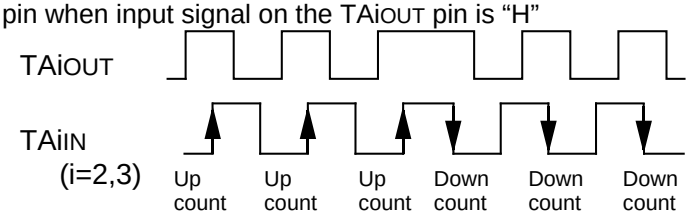 • Multiply-by-4 processing operation (TimerA3 and timer A4) If the phase relationship is such that the TAiIN pin goes “H” when the input signal on the TAiOUT pin is “H”, the timer counts up rising and falling edges on the TAiOUT and TAiIN pins. If the phase relationship is such that the TAiIN pin goes “L” when the input signal on the TAiOUT pin is “H”, the timer counts down rising and falling edges on the TAiOUT and TAiIN pins. 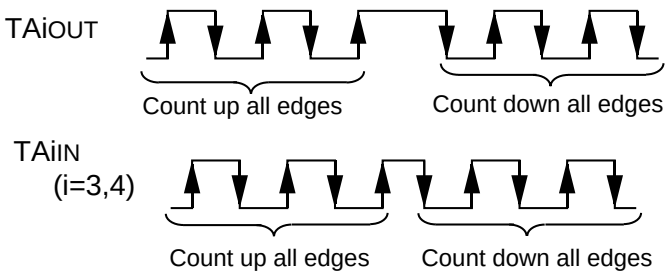

Note 1: This does not apply when the free-run function is selected.

Note 2: Timer A3 is selectable. Timer A2 is fixed to normal processing operation and timer A4 is fixed to multiply-by-4 operation.

Timer Ai mode register
(When using two-phase pulse signal processing)

b7	b6	b5	b4	b3	b2	b1	b0
		0	1	0		0	1

Symbol	Address	When reset
TAiMR(i=2 to 4)	0358_{16} to $035A_{16}$	$00000X00_2$

Bit symbol	Bit name	Function	R	W
TMOD0	Operation mode select bit	b1 b0 0 1 : Event counter mode	O	O
TMOD1			O	O
MR0	This bit is invalid in M16C/80 series. (Note 1) Port output control is set by the function select registers A and B.		–	–
MR1	0 (Set to “0” when using two-phase pulse signal processing)		O	O
MR2	1 (Set to “1” when using two-phase pulse signal processing)		O	O
MR3	0 (Set to “0” when using two-phase pulse signal processing)		O	O
TCK0	Count operation type select bit	0 : Reload type 1 : Free-run type	O	O
TCK1	Two-phase pulse processing operation select bit (Note 2)(Note 3)	0 : Normal processing operation 1 : Multiply-by-4 processing operation	O	O

Note 1: Set the corresponding function select register A to I/O port.
Note 2: This bit is valid for timer A3 mode register.
Timer A2 is fixed to normal processing operation and timer A4 is fixed to multiply-by-4 processing operation.
Note 3: When performing two-phase pulse signal processing, make sure the two-phase pulse signal processing operation select bit (address 0344_{16}) is set to “1”. Also, always be sure to set the event/trigger select bit (addresses 0343_{16}) to “00”.

Figure 13.7 Timer Ai mode register in event counter mode

• **Counter Resetting by Two-Phase Pulse Signal Processing**

This function resets the timer counter to “0” when the Z-phase (counter reset) is input during two-phase pulse signal processing.

This function can only be used in timer A3 event counter mode, two-phase pulse signal processing, free-run type, and multiply-by-4 processing. The Z phase is input to the INT2 pin.

When the Z-phase input enable bit (bit 5 at address 0342_{16}) is set to “1”, the counter can be reset by Z-phase input. For the counter to be reset to “0” by Z-phase input, you must first write “0000_{16}” to the timer A3 register (address $034D_{16}$ and $034C_{16}$).

The Z-phase is input when the INT2 input edge is detected. The edge polarity is selected by the INT2 polarity switch bit (bit 4 at address $009C_{16}$). The Z-phase must have a pulse width greater than 1 cycle of the timer A3 count source. Figure 13.8 shows the relationship between the two-phase pulse (A phase and B phase) and the Z phase.

The counter is reset at the count source following Z-phase input. Figure 13.9 shows the timing at which the counter is reset to “0”.

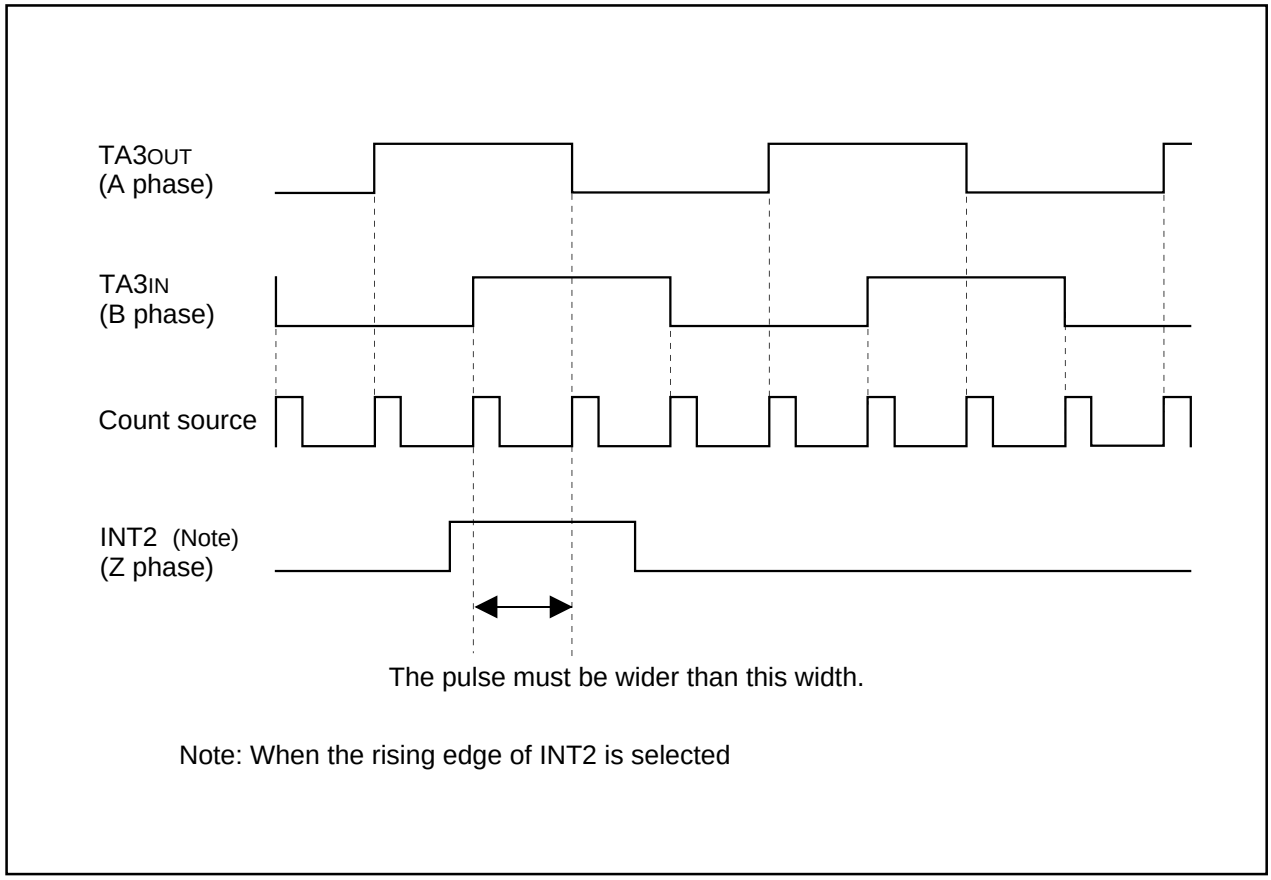

Figure 13.8 The relationship between the two-phase pulse (A phase and B phase) and the Z phase

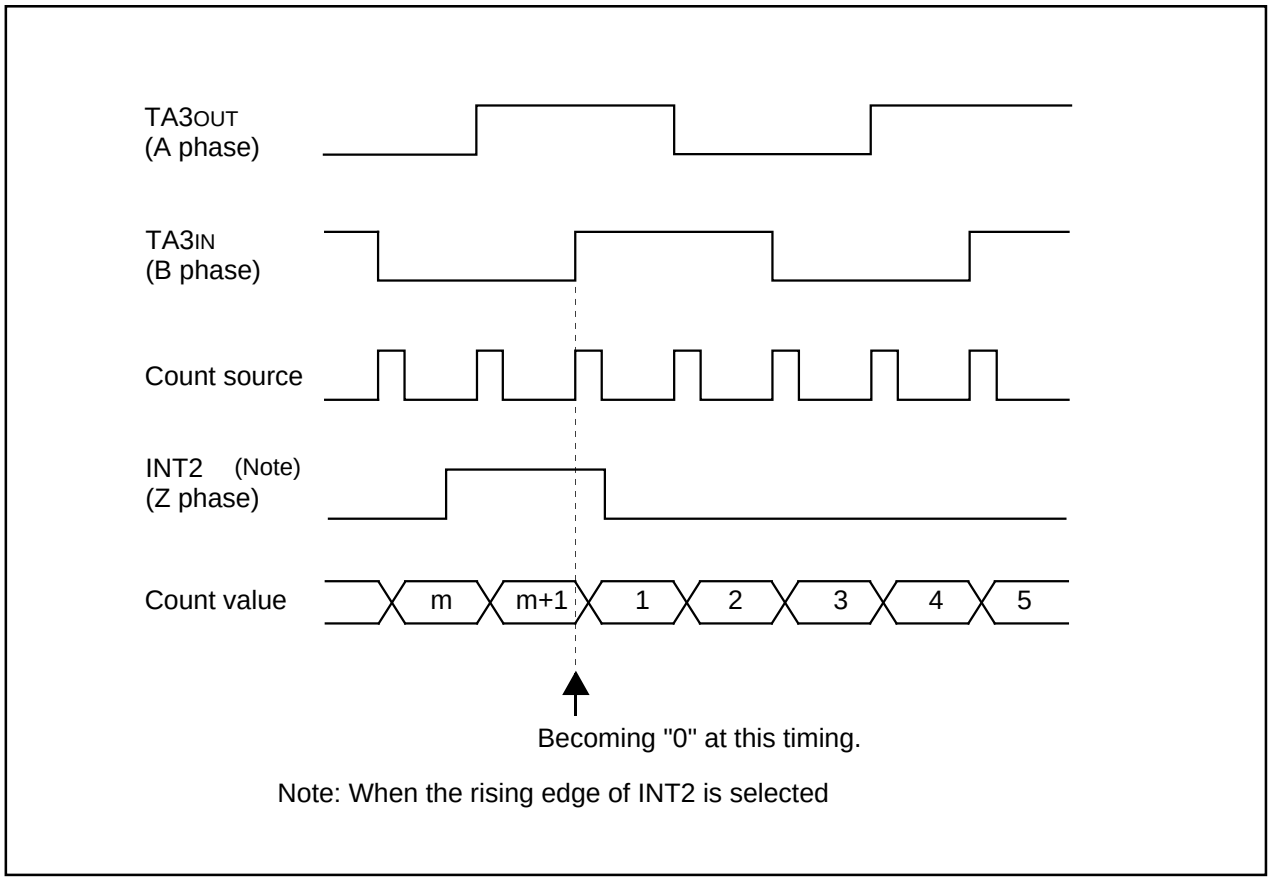

Figure 13.9 The counter reset timing

Note that timer A3 interrupt requests occur successively two times when timer A3 underflow and INT2 input reload are happened at the same timing.
Do not use timer A3 interrupt request when this function is used.

(3) One-shot timer mode

In this mode, the timer operates only once. (See Table 13.4) When a trigger occurs, the timer starts up and continues operating for a given period. Figure 13.10 shows the timer Ai mode register in one-shot timer mode.

Table 13.4 Timer specifications in one-shot timer mode

Item	Specification
Count source	f_1, f_8, f_{32}, f_{C32}
Count operation	• The timer counts down • When the count reaches 0000_{16}, the timer stops counting after reloading a new count • If a trigger occurs when counting, the timer reloads a new count and restarts counting
Divide ratio	1/n n : Set value
Count start condition	• An external trigger is input • The timer overflows • The one-shot start flag is set (= 1)
Count stop condition	• A new count is reloaded after the count has reached 0000_{16} • The count start flag is reset (= 0)
Interrupt request generation timing	The count reaches 0000_{16}
TAiIN pin function	Programmable I/O port or trigger input
TAiOUT pin function	Programmable I/O port or pulse output (Setting by the corresponding function select registers A and B)
Read from timer	When timer Ai register is read, it indicates an indeterminate value
Write to timer	• When not counting Value written to timer Ai register is written to both reload register and counter • When counting Value written to timer Ai register is written to only reload register (Transferred to counter at next reload time)

Timer Ai mode register

b7	b6	b5	b4	b3	b2	b1	b0
		0				1	0

Symbol	Address	When reset
TAiMR(i=0 to 4)	0356_{16} to $035A_{16}$	$00000X00_2$

Bit symbol	Bit name	Function	R	W
TMOD0	Operation mode select bit	b1 b0 1 0 : One-shot timer mode	○	○
TMOD1			○	○
MR0	This bit is invalid in M16C/80 series. Port output control is set by the function select registers A and B.		–	–
MR1	External trigger select bit (Note 1)	0 : Falling edge of TAiIN pin's input signal (Note 2) 1 : Rising edge of TAiIN pin's input signal (Note 2)	○	○
MR2	Trigger select bit	0 : One-shot start flag is valid 1 : Selected by event/trigger select bit	○	○
MR3	0 (Set to "0" in one-shot timer mode)		○	○
TCK0	Count source select bit	b7 b6 0 0 : f_1 0 1 : f_8 1 0 : f_{32} 1 1 : f_{C32}	○	○
TCK1			○	○

Note 1: Valid only when the TAiIN pin is selected by the event/trigger select bit (addresses 0342_{16} and 0343_{16}). If timer overflow is selected, this bit can be "1" or "0".
Note 2: Set the corresponding port function select register to I/O port, and port direction register to "0".

Figure 13.10 Timer Ai mode register in one-shot timer mode

(4) Pulse width modulation (PWM) mode

In this mode, the timer outputs pulses of a given width in succession. (See Table 13.5) In this mode, the counter functions as either a 16-bit pulse width modulator or an 8-bit pulse width modulator. Figure 13.11 shows the timer Ai mode register in pulse width modulation mode. Figure 13.12 shows the example of how a 16-bit pulse width modulator operates. Figure 13.13 shows the example of how an 8-bit pulse width modulator operates.

Table 13.5 Timer specifications in pulse width modulation mode

Item	Specification
Count source	f_1, f_8, f_{32}, f_{C32}
Count operation	• The timer counts down (operating as an 8-bit or a 16-bit pulse width modulator) • The timer reloads a new count at a rising edge of PWM pulse and continues counting • The timer is not affected by a trigger that occurs when counting
16-bit PWM	• High level width n / fi n : Set value • Cycle time $(2^{16}-1)$ / fi fixed
8-bit PWM	• High level width n×(m+1) / fi n : values set to timer Ai register's high-order address • Cycle time $(2^{8}-1)$×(m+1) / fi m:values set to timer Ai register's low-order address
Count start condition	• External trigger is input • The timer overflows • The count start flag is set (= 1)
Count stop condition	• The count start flag is reset (= 0)
Interrupt request generation timing	PWM pulse goes "L"
TAiIN pin function	Programmable I/O port or trigger input
TAiOUT pin function	Pulse output (TAiOUT output is selected by the corresponding function select registers A and B)
Read from timer	When timer Ai register is read, it indicates an indeterminate value
Write to timer	• When not counting Value written to timer Ai register is written to both reload register and counter • When counting Value written to timer Ai register is written to only reload register (Transferred to counter at next reload time)

Timer Ai mode register

b7	b6	b5	b4	b3	b2	b1	b0
						1	1

Symbol	Address	When reset
TAiMR(i=0 to 4)	0356_{16} to $035A_{16}$	$00000X00_2$

Bit symbol	Bit name	Function	R	W
TMOD0	Operation mode select bit	b1 b0 1 1 : Pulse width modulaten (PWM) mode	○	○
TMOD1			○	○
MR0	This bit is invalid in M16C/80 series. Port output control is set by the function select registers A and B.		–	–
MR1	External trigger select bit (Note 1)	0: Falling edge of TAiIN pin's input signal (Note 2) 1: Rising edge of TAiIN pin's input signal (Note 2)	○	○
MR2	Trigger select bit	0: Count start flag is valid 1: Selected by event/trigger select bit	○	○
MR3	16/8-bit PWM mode select bit	0: Functions as a 16-bit pulse width modulator 1: Functions as an 8-bit pulse width modulator	○	○
TCK0	Count source select bit	b7 b6 0 0 : f_1 0 1 : f_8 1 0 : f_{32} 1 1 : f_{C32}	○	○
TCK1			○	○

Note 1: Valid only when the TAiIN pin is selected by the event/trigger select bit (addresses 0342_{16} and 0343_{16}). If timer overflow is selected, this bit can be "1" or "0".
Note 2: Set the corresponding function select register A to I/O port, and port direction register to "0".

Figure 13.11 Timer Ai mode register in pulse width modulation mode

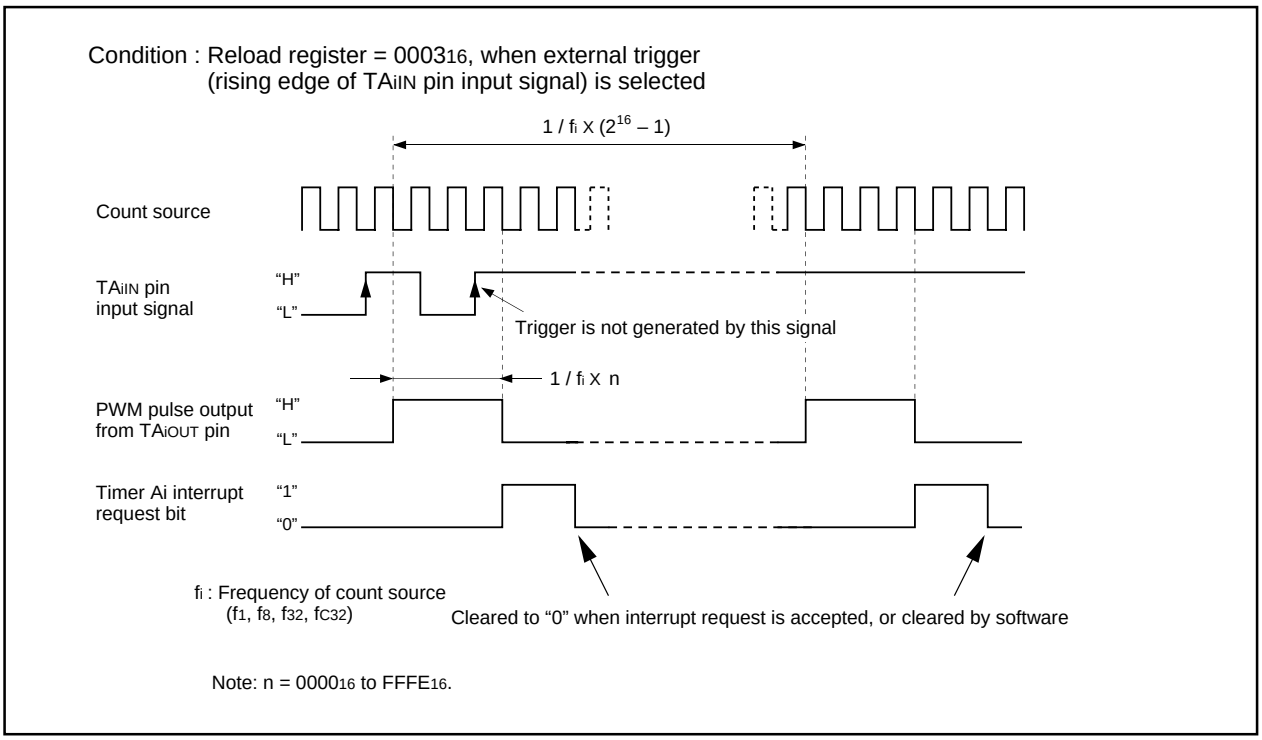

Figure 13.12 Example of how a 16-bit pulse width modulator operates

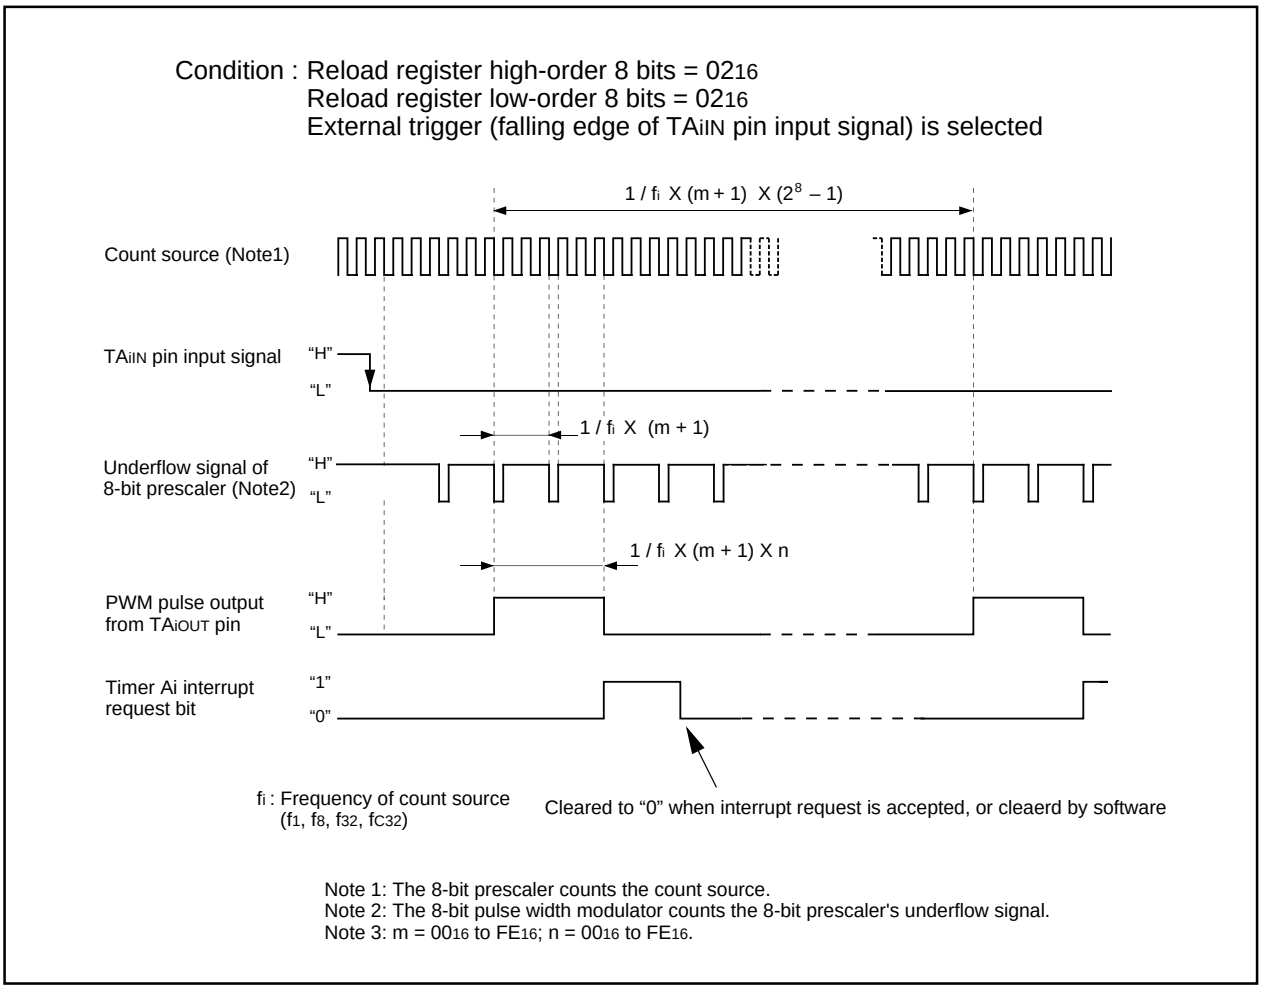

Figure 13.13 Example of how an 8-bit pulse width modulator operates

14. Timer B

Figure 14.1 shows the block diagram of timer B. Figures 14.2 and 14.3 show the timer B-related registers.

Use the timer Bi mode register (i = 0 to 5) bits 0 and 1 to choose the desired mode.

Timer B has three operation modes listed as follows:

- Timer mode: The timer counts an internal count source.
- Event counter mode: The timer counts pulses from an external source or a timer overflow.
- Pulse period/pulse width measuring mode: The timer measures an external signal's pulse period or pulse width.

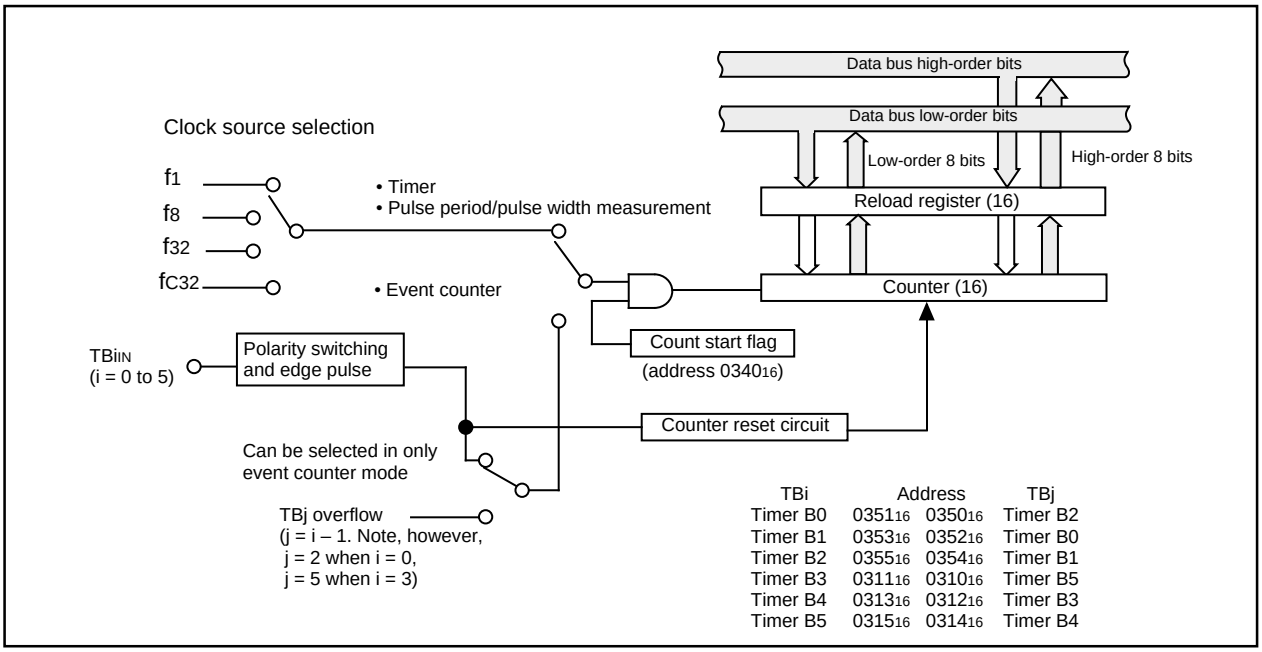

Figure 14.1 Block diagram of timer B

Timer Bi mode register

b7 b6 b5 b4 b3 b2 b1 b0

Symbol	Address	When reset
TBiMR(i = 0 to 5)	035B16 to 035D16	00XX00002
	031B16 to 031D16	00XX00002

Bit symbol	Bit name	Function	R	W
TMOD0	Operation mode select bit	b1 b0 0 0 : Timer mode 0 1 : Event counter mode 1 0 : Pulse period/pulse width measurement mode 1 1 : Must not be set	○	○
TMOD1			○	○
MR0	Function varies with each operation mode		○	○
MR1			○	○
MR2			○ (Note 1)	○
			× (Note 2)	×
MR3			○	×
TCK0	Count source select bit (Function varies with each operation mode)		○	○
TCK1			○	○

Note 1: Timer B0, timer B3.
Note 2: Timer B1, timer B2, timer B4, timer B5.

Figure 14.2 Timer B-related registers (1)

Timer Bi register (Note)



Symbol	Address	When reset
TB0	0351$_{16}$, 0350$_{16}$	Indeterminate
TB1	0353$_{16}$, 0352$_{16}$	Indeterminate
TB2	0355$_{16}$, 0354$_{16}$	Indeterminate
TB3	0311$_{16}$, 0310$_{16}$	Indeterminate
TB4	0313$_{16}$, 0312$_{16}$	Indeterminate
TB5	0315$_{16}$, 0314$_{16}$	Indeterminate

Function	Values that can be set	R	W
• Timer mode Counts the timer's period	0000$_{16}$ to FFFF$_{16}$	○	○
• Event counter mode Counts external pulses input or a timer overflow	0000$_{16}$ to FFFF$_{16}$	○	○
• Pulse period / pulse width measurement mode Measures a pulse period or width	——	○	×

Note: Read and write data in 16-bit units.

Count start flag



Symbol	Address	When reset
TABSR	0340$_{16}$	00$_{16}$

Bit symbol	Bit name	Function	R	W
TA0S	Timer A0 count start flag	0 : Stops counting 1 : Starts counting	○	○
TA1S	Timer A1 count start flag		○	○
TA2S	Timer A2 count start flag		○	○
TA3S	Timer A3 count start flag		○	○
TA4S	Timer A4 count start flag		○	○
TB0S	Timer B0 count start flag		○	○
TB1S	Timer B1 count start flag		○	○
TB2S	Timer B2 count start flag		○	○

Timer B3, 4, 5 count start flag



Symbol	Address	When reset
TBSR	0300$_{16}$	000XXXXX$_2$

Bit symbol	Bit name	Function	R	W
Nothing is assigned. When write, set "0". When read, the value of these bits is indeterminate.			—	—
TB3S	Timer B3 count start flag	0 : Stops counting 1 : Starts counting	○	○
TB4S	Timer B4 count start flag		○	○
TB5S	Timer B5 count start flag		○	○

Clock prescaler reset flag



Symbol	Address	When reset
CPSRF	0341$_{16}$	0XXXXXXX$_2$

Bit symbol	Bit name	Function	R	W
Nothing is assigned. When write, set "0". When read, the value of these bits is indeterminate.			—	—
CPSR	Clock prescaler reset flag	0 : No effect 1 : Prescaler is reset (When read, the value is “0”)	○	○

Figure 14.3 Timer B-related registers (2)

(1) Timer mode

In this mode, the timer counts an internally generated count source. (See Table 14.1) Figure 14.4 shows the timer Bi mode register in timer mode.

Table 14.1 Timer specifications in timer mode

Item	Specification
Count source	f1, f8, f32, fC32
Count operation	• Counts down • When the timer underflows, it reloads the reload register contents before continuing counting
Divide ratio	1/(n+1) n : Set value
Count start condition	Count start flag is set (= 1)
Count stop condition	Count start flag is reset (= 0)
Interrupt request generation timing	The timer underflows
TBiIN pin function	Programmable I/O port
Read from timer	Count value is read out by reading timer Bi register
Write to timer	• When not counting Value written to timer Bi register is written to both reload register and counter • When counting Value written to timer Bi register is written to only reload register (Transferred to counter at next reload time)

Timer Bi mode register

b7	b6	b5	b4	b3	b2	b1	b0
						0	0

Symbol	Address	When reset
TBiMR(i = 0 to 5)	035B16 to 035D16	00XX00002
	031B16 to 031D16	00XX00002

Bit symbol	Bit name	Function	R	W
TMOD0	Operation mode select bit	b1 b0 0 0 : Timer mode	○	○
TMOD1			○	○
MR0	Invalid in timer mode Can be “0” or “1”		○	○
MR1			○	○
MR2	0 (Set to “0” in timer mode ; i = 0, 3)		○ (Note 1)	○
	Nothing is assiigned (i = 1, 2, 4, 5). When write, set "0". When read, its content is indeterminate.		× (Note 2)	×
MR3	Invalid in timer mode. When write, set "0". When read in timer mode, its content is indeterminate.		○	×
TCK0	Count source select bit	b7 b6 0 0 : f1 0 1 : f8 1 0 : f32 1 1 : fc32	○	○
TCK1			○	○

Note 1: Timer B0, timer B3.
Note 2: Timer B1, timer B2, timer B4, timer B5.

Figure 14.4 Timer Bi mode register in timer mode

(2) Event counter mode

In this mode, the timer counts an external signal or an internal timer's overflow. (See Table 14.2) Figure 14.5 shows the timer Bi mode register in event counter mode.

Table 14.2 **Timer specifications in event counter mode**

Item	Specification
Count source	• External signals input to TBiIN pin Effective edge of count source can be a rising edge, a falling edge, or falling and rising edges as selected by software • TBi overflows or underflows
Count operation	• Counts down • When the timer underflows, it reloads the reload register contents before continuing counting
Divide ratio	1/(n+1) n : Set value
Count start condition	Count start flag is set (= 1)
Count stop condition	Count start flag is reset (= 0)
Interrupt request generation timing	The timer underflows
TBiIN pin function	Programable I/O port or Count source input (Set the corresponding function select register A to I/O port.)
Read from timer	Count value can be read out by reading timer Bi register
Write to timer	• When not counting Value written to timer Bi register is written to both reload register and counter • When counting Value written to timer Bi register is written to only reload register (Transferred to counter at next reload time)

Timer Bi mode register

b7	b6	b5	b4	b3	b2	b1	b0
						0	1

Symbol	Address	When reset
TBiMR(i = 0 to 5)	035B16 to 035D16	00XX00002
	031B16 to 031D16	00XX00002

Bit symbol	Bit name	Function	R	W
TMOD0	Operation mode select bit	b1 b0 0 1 : Event counter mode	○	○
TMOD1			○	○
MR0	Count polarity select bit (Note 1)	b3 b2 0 0 : Counts external signal's falling edges 0 1 : Counts external signal's rising edges 1 0 : Counts external signal's falling and rising edges 1 1 : Must not be set	○	○
MR1			○	○
MR2	0 (Set to "0" in event counter mode; i = 0, 3)		○ (Note 2)	○
	Nothing is assigned (i = 1, 2, 4, 5). When write, set "0". When read, its content is indeterminate.		× (Note 3)	×
MR3	Invalid in event counter mode. When write, set "0". When read in event counter mode, its content is indeterminate.		○	×
TCK0	Invalid in event counter mode. Can be "0" or "1".		○	○
TCK1	Event clock select	0 : Input from TBiIN pin (Note 4) 1 : TBj overflow (j = i – 1; however, j = 2 when i = 0, j = 5 when i = 3)	○	○

Note 1: Valid only when input from the TBiIN pin is selected as the event clock.
If timer's overflow is selected, this bit can be "0" or "1".
Note 2: Timer B0, timer B3.
Note 3: Timer B1, timer B2, timer B4, timer B5.
Note 4: Set the corresponding function select register A to I/O port, and port direction register to "0".

Figure 14.5 Timer Bi mode register in event counter mode

(3) Pulse period/pulse width measurement mode

In this mode, the timer measures the pulse period or pulse width of an external signal. (See Table 14.3) Figure 14.6 shows the timer Bi mode register in pulse period/pulse width measurement mode. Figure 14.7 shows the operation timing when measuring a pulse period. Figure 14.8 shows the operation timing when measuring a pulse width.

Table 14.3 Timer specifications in pulse period/pulse width measurement mode

Item	Specification
Count source	f1, f8, f32, fc32
Count operation	• Up count • Counter value "0000$_{16}$" is transferred to reload register at measurement pulse's effective edge and the timer continues counting
Count start condition	Count start flag is set (= 1)
Count stop condition	Count start flag is reset (= 0)
Interrupt request generation timing	• When measurement pulse's effective edge is input (Note 1) • Timer overflow. When an overflow occurs, the timer Bi overflow flag set to "1" simultaneously. The timer Bi overflow flag cleared to "0" by writing to the timer mode register at the next count timing or later after the timer Bi overflow flag was set to "1". At this time, make sure the timer start flag is set to "1".
TBiIN pin function	Measurement pulse input (Set the corresponding function select register A to I/O port.)
Read from timer	When timer Bi register is read, it indicates the reload register's content (measurement result) (Note 2)
Write to timer	Cannot be written to

Note 1: An interrupt request is not generated when the first effective edge is input after the timer has started counting.
Note 2: The value read out from the timer Bi register is indeterminate until the second effective edge is input after the timer.

Timer Bi mode register

b7	b6	b5	b4	b3	b2	b1	b0
						1	0

Symbol	Address	When reset
TBiMR(i = 0 to 5)	035B$_{16}$ to 035D$_{16}$ 031B$_{16}$ to 031D$_{16}$	00XX0000$_2$ 00XX0000$_2$

Bit symbol	Bit name	Function	R	W
TMOD0	Operation mode select bit	b1 b0 1 0 : Pulse period / pulse width measurement mode	○	○
TMOD1			○	○
MR0	Measurement mode select bit	b3 b2 0 0 : Pulse period measurement (Interval between measurement pulse's falling edge to falling edge) 0 1 : Pulse period measurement (Interval between measurement pulse's rising edge to rising edge) 1 0 : Pulse width measurement (Interval between measurement pulse's falling edge to rising edge, and between rising edge to falling edge) 1 1 : Must not be set	○	○
MR1			○	○
MR2	0 (Set to "0" in pulse period/pulse width measurement mode; i = 0, 3)		○ (Note 2)	○
	Nothing is assigned (i = 1, 2, 4, 5). When write, set "0". When read, its content is indeterminate.		× (Note 3)	×
MR3	Timer Bi overflow flag (Note 1)	0 : Timer did not overflow 1 : Timer has overflowed	○	×
TCK0	Count source select bit	b7 b6 0 0 : f1 0 1 : f8 1 0 : f32 1 1 : fc32	○	○
TCK1			○	○

Note 1: This flag is indeterminate after reset. When the timer Bi start flag = 1, the timer Bi overflow flag is cleared to "0" by writing to the timer Bi mode register at the next count timing or later after the timer Bi overflow flag was set to "1". The Timer Bi overflow flag cannot be set to "1" in a program.
Note 2: Timer B0, timer B3.
Note 3: Timer B1, timer B2, timer B4, timer B5.

Figure 14.6 Timer Bi mode register in pulse period/pulse width measurement mode

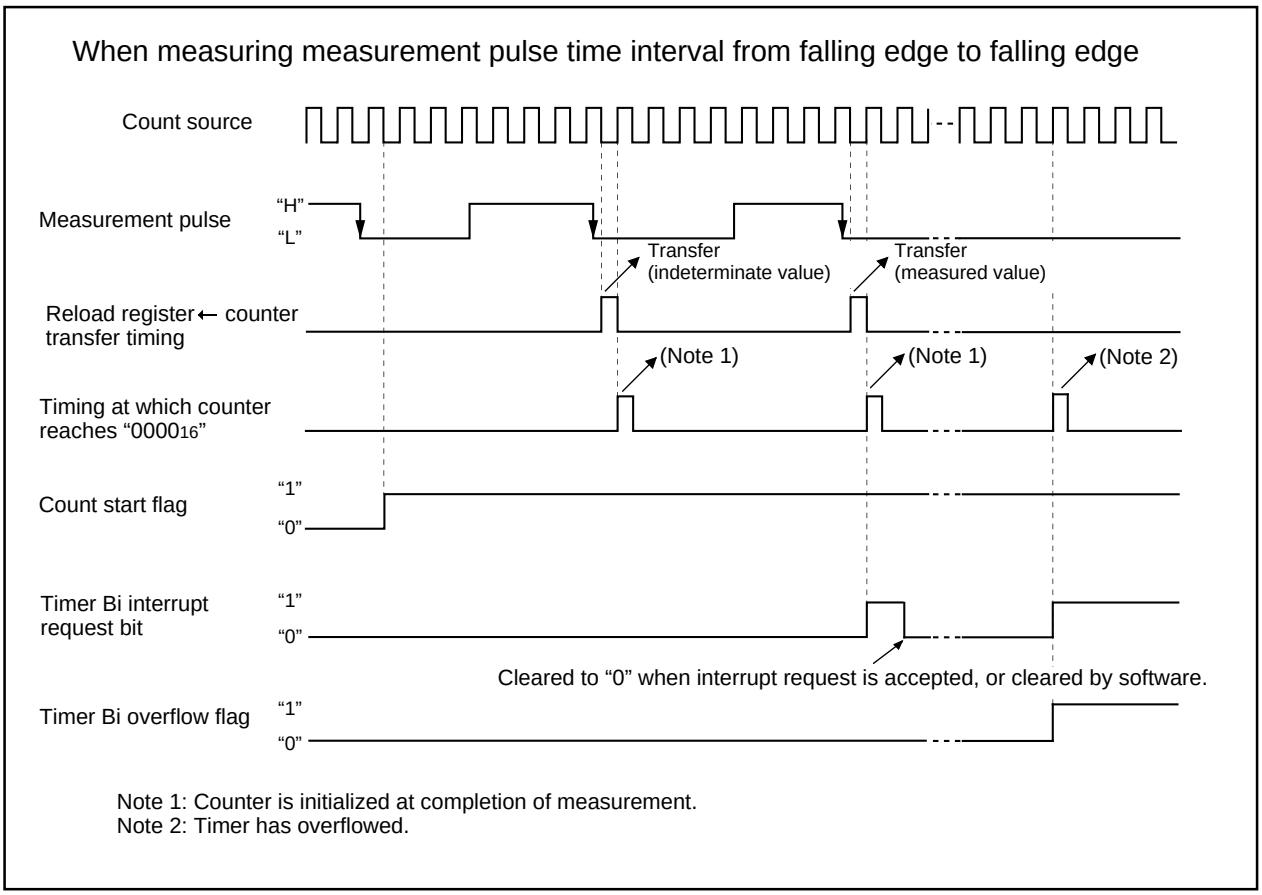

Figure 14.7 Operation timing when measuring a pulse period

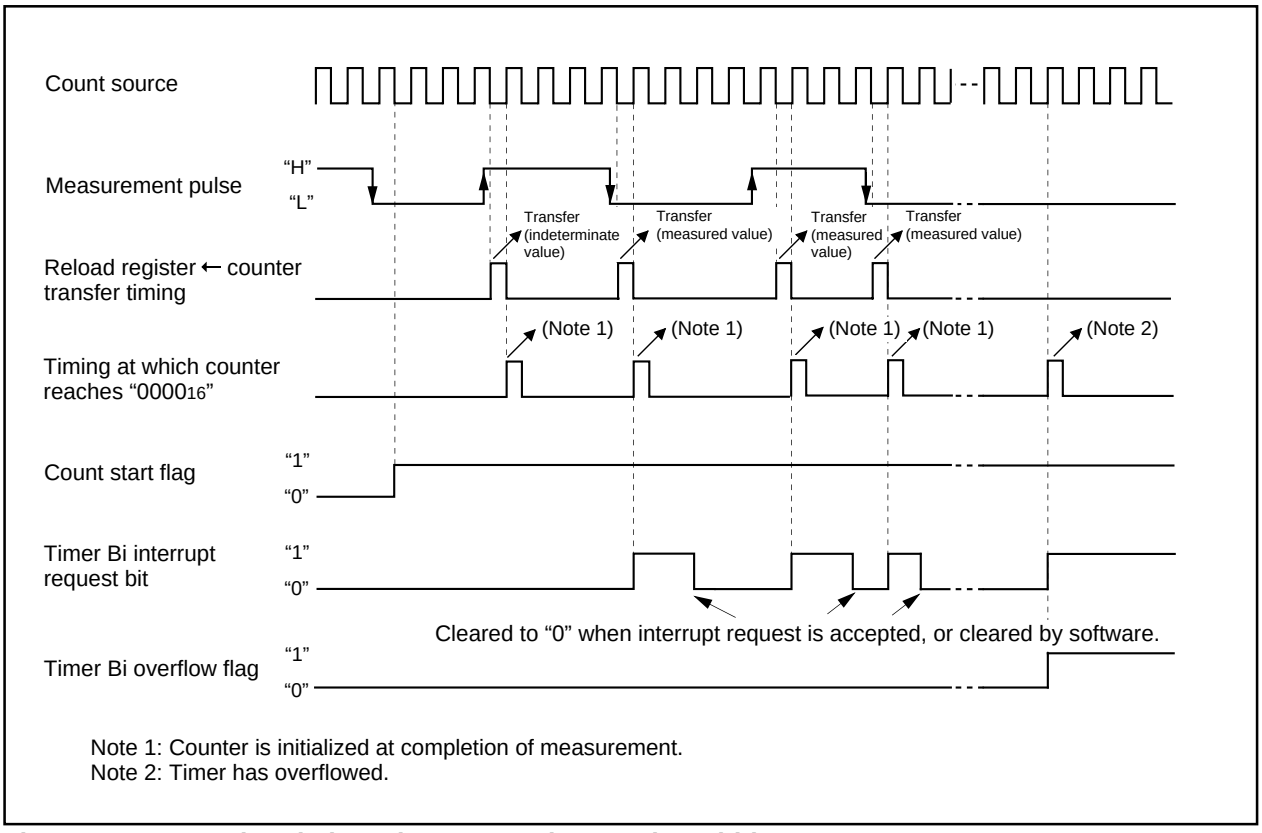

Figure 14.8 Operation timing when measuring a pulse width

15. Three-phase motor control timers' functions

Use of more than one built-in timer A and timer B provides the means of outputting three-phase motor driving waveforms.

Figures 15.1 through 15.3 show registers related to timers for three-phase motor control.

Three-phase PWM control register 0 (Note 5)

b7	b6	b5	b4	b3	b2	b1	b0

Symbol	Address	When reset
INVC0	0308_{16}	00_{16}

Bit symbol	Bit name	Description	R	W
INV0$_0$	Effective interrupt output polarity select bit	0: A timer B2 interrupt occurs when the timer A1 reload control signal is "0". 1: A timer B2 interrupt occurs when the timer A1 reload control signal is "1". **Effective only in three-phase mode 1**	○	○
INV0$_1$	Effective interrupt output specification bit (Note 4)	0: Not specified. 1: Selected by the effective interrupt output polarity selection bit. **Effective only in three-phase mode 1**	○	○
INV0$_2$	Mode select bit (Note 2)	0: Normal mode 1: Three-phase PWM output mode	○	○
INV0$_3$	Output control bit	0: Output disabled 1: Output enabled	○	○
INV0$_4$	Positive and negative phases concurrent L output disable function enable bit	0: Feature disabled 1: Feature enabled	○	○
INV0$_5$	Positive and negative phases concurrent L output detect flag	0: Not detected yet 1: Already detected	○	○ (Note 1)
INV0$_6$	Modulation mode select bit (Note 3)	0: Triangular wave modulation mode 1: Sawtooth wave modulation mode	○	○
INV0$_7$	Software trigger bit	1: Trigger generated The value, when read, is "0".	○	○

Note 1: No value other than "0" can be written.

Note 2: Selecting three-phase PWM output mode causes the dead time timer, the U, V, W phase output control circuits, and the timer B2 interrupt occurrences frequency set circuit works.
For U, $\overline{U}$, V, $\overline{V}$, W and $\overline{W}$ output from P8$_0$, P8$_1$, and P7$_2$ through P7$_5$, setting of function select registers A, B and C is required.

Note 3: **In triangular wave modulation mode:** The dead time timer starts in synchronization with the falling edge of timer Ai output. The data transfer from the three-phase buffer register to the three-phase output shift register is made only once in synchronization with the transfer trigger signal after writing to the three-phase output buffer register.
In sawtooth wave modulation mode: The dead time timer starts in synchronization with the falling edge of timer A output and with the transfer trigger signal. The data transfer from the three-phase output buffer register to the three-phase output shift register is made with respect to every transfer trigger.

Note 4: Set bit 1 of this register to "1" after setting timer B2 interrupt frequency set counter.

Note 5: Rewrite the INV00 to INV02 and INV06 bits when the timers A1,A2,A4 and B stop.

Three-phase PWM control register 1

b7	b6	b5	b4	b3	b2	b1	b0
✕	✕	✕					

Symbol	Address	When reset
INVC1	0309_{16}	$XXX0X000_2$

Bit symbol	Bit name	Description	R	W
INV1$_0$	Timer Ai start trigger signal select bit	0: Timer B2 overflow signal 1: Timer B2 overflow signal, signal for writing to timer B2	○	○
INV1$_1$	Timer A1-1, A2-1, A4-1 control bit	0: Three-phase mode 0 1: Three-phase mode 1	○	○
INV1$_2$	Dead time timer count source select bit	0 : f_1 1 : $f_1/2$	○	○
INV1$_3$	Carrier wave detect flag (Note)	0: Rising edge of triangular waveform 1: Falling edge of triangular waveform	○	X
INV1$_4$	Output porality control bit	0 : Low active 1 : High active	○	○
Noting is assigned. When write, set "0". When read, their contents are "0".			–	–

Note : INV1$_3$ is valid when INV0$_6$ = 0 and INV1$_1$ = 1.

Figure 15.1 Registers related to timers for three-phase motor control

Three-phase output buffer register 0

b7 b6 b5 b4 b3 b2 b1 b0

Symbol	Address	When reset
IDB0	030A16	3F16

Bit Symbol	Bit name	Function	R	W
DU0	U phase output buffer 0	Setting in U phase output buffer 0	Note	○
DUB0	$\overline{U}$ phase output buffer 0	Setting in $\overline{U}$ phase output buffer 0	Note	○
DV0	V phase output buffer 0	Setting in V phase output buffer 0	Note	○
DVB0	$\overline{V}$ phase output buffer 0	Setting in $\overline{V}$ phase output buffer 0	Note	○
DW0	W phase output buffer 0	Setting in W phase output buffer 0	Note	○
DWB0	$\overline{W}$ phase output buffer 0	Setting in $\overline{W}$ phase output buffer 0	Note	○
Nothing is assigned. When write, set "0". When read, its content is "0".			—	—

Note: When executing read instruction of this register, the contents of three-phase shift register is read out.

Three-phase output buffer register 1

b7 b6 b5 b4 b3 b2 b1 b0

Symbol	Address	When reset
IDB1	030B16	3F16

Bit Symbol	Bit name	Function	R	W
DU1	U phase output buffer 1	Setting in U phase output buffer 1	Note	○
DUB1	$\overline{U}$ phase output buffer 1	Setting in $\overline{U}$ phase output buffer 1	Note	○
DV1	V phase output buffer 1	Setting in V phase output buffer 1	Note	○
DVB1	$\overline{V}$ phase output buffer 1	Setting in $\overline{V}$ phase output buffer 1	Note	○
DW1	W phase output buffer 1	Setting in W phase output buffer 1	Note	○
DWB1	$\overline{W}$ phase output buffer 1	Setting in $\overline{W}$ phase output buffer 1	Note	○
Nothing is assigned. When write, set "0". When read, its content is "0".			—	—

Note: When executing read instruction of this register, the contents of three-phase shift register is read out.

Dead time timer (Note)

b7 b0

Symbol	Address	When reset
DTT	030C16	Indeterminate

Function	Values that can be set	R	W
Set dead time timer	1 to 255	—	○

Note: Use MOV instruction to write to this register.

Timer B2 interrupt occurrences frequency set counter (Note 1 to 4)

b3 b0

Symbol	Address	When reset
ICTB2	030D16	Indeterminate

Function	Values that can be set	R	W
Set occurrence frequency of timer B2 interrupt request	1 to 15	—	○

Note 1: When the effective interrupt output specification bit (INV01: bit 1 at 030816) is set to "1" and three-phase motor control timer is operating, do not rewrite to this register.
Note 2: Do not write to this register at the timing of timer B2 overflow.
Note 3: Use MOV instruction to write to this register.
Note 4: Setting of this register is valid only when bit 2(INV02) of three-phase PWM control register 0 is set to "1".

Figure 15.2 Registers related to timers for three-phase motor control

Timer Ai register (Note1)



Symbol	Address	When reset
TA1	0349₁₆,0348₁₆	Indeterminate
TA2	034B₁₆,034A₁₆	Indeterminate
TA4	034F₁₆,034E₁₆	Indeterminate
TB2	0355₁₆,0354₁₆	Indeterminate

Function	Values that can be set	R	W
• Timer mode Counts an internal count source	0000₁₆ to FFFF₁₆	○	○
• One-shot timer mode Counts a one shot width	0000₁₆ to FFFF₁₆ (Note 2, 3)	×	○

Note 1: Read and write data in 16-bit units.
Note 2: When the timer Ai register is set to "0000₁₆", the counter does not operate and a timer Ai interrupt does not occur.
Note 3: When writing to this register, use MOV instruction.

Timer Ai-1 register (Note 1 to 2)



Symbol	Address	When reset
TA11	0303₁₆,0302₁₆	Indeterminate
TA21	0305₁₆,0304₁₆	Indeterminate
TA41	0307₁₆,0306₁₆	Indeterminate

Function	Values that can be set	R	W
Counts an internal count source	0000₁₆ to FFFF₁₆	○	○

Note 1: Read and write data in 16-bit units.
Note 2: Do not write to these register at the timing of timer B2 overflow.

Trigger select register



Symbol: TRGSR — Address: 0343₁₆ — When reset: 00₁₆

Bit symbol	Bit name	Function	R	W
TA1TGL	Timer A1 event/trigger select bit	b1 b0 0 0 : Input on TA1IN is selected (Note) 0 1 : TB2 overflow is selected 1 0 : TA0 overflow is selected 1 1 : TA2 overflow is selected	○	○
TA1TGH			○	○
TA2TGL	Timer A2 event/trigger select bit	b3 b2 0 0 : Input on TA2IN is selected (Note) 0 1 : TB2 overflow is selected 1 0 : TA1 overflow is selected 1 1 : TA3 overflow is selected	○	○
TA2TGH			○	○
TA3TGL	Timer A3 event/trigger select bit	b5 b4 0 0 : Input on TA3IN is selected (Note) 0 1 : TB2 overflow is selected 1 0 : TA2 overflow is selected 1 1 : TA4 overflow is selected	○	○
TA3TGH			○	○
TA4TGL	Timer A4 event/trigger select bit	b7 b6 0 0 : Input on TA4IN is selected (Note) 0 1 : TB2 overflow is selected 1 0 : TA3 overflow is selected 1 1 : TA0 overflow is selected	○	○
TA4TGH			○	○

Note: Set the corresponding port function select register to I/O port, and port direction register to "0".

Count start flag



Symbol: TABSR — Address: 0340₁₆ — When reset: 00₁₆

Bit symbol	Bit name	Function	R	W
TA0S	Timer A0 count start flag	0 : Stops counting 1 : Starts counting	○	○
TA1S	Timer A1 count start flag		○	○
TA2S	Timer A2 count start flag		○	○
TA3S	Timer A3 count start flag		○	○
TA4S	Timer A4 count start flag		○	○
TB0S	Timer B0 count start flag		○	○
TB1S	Timer B1 count start flag		○	○
TB2S	Timer B2 count start flag		○	○

Figure 15.3 Registers related to timers for three-phase motor control

Three-phase motor driving waveform output mode (three-phase PWM output mode)

Setting "1" in the mode select bit (bit 2 at 0308_{16}) shown in Figure 15.1 causes three-phase PWM output mode that uses four timers A1, A2, A4, and B2 to be selected. As shown in Figure 15.4, set timers A1, A2, and A4 in one-shot timer mode, set the trigger in timer B2, and set timer B2 in timer mode using the respective timer mode registers.

Timer Ai mode register

Symbol	Address	When reset
TA1MR	0357_{16}	$00000X00_2$
TA2MR	0358_{16}	$00000X00_2$
TA3MR	$035A_{16}$	$00000X00_2$

b7	b6	b5	b4	b3	b2	b1	b0
		0	1			1	0

Bit symbol	Bit name	Function	R	W
TMOD0	Operation mode select bit	b1 b0 1 0 : One-shot timer mode	○	○
TMOD1			○	○
MR0	This bit is invalid in M16C/80 series. Port output control is set by the function select registers A and B.		–	–
MR1	External trigger select bit	Invalid in three-phase PWM output mode.	○	○
MR2	Trigger select bit	1 : Selected by event/trigger select register	○	○
MR3	0 (Set to "0" in one-shot timer mode)		○	○
TCK0	Count source select bit	b7 b6 0 0 : f_1 0 1 : f_8 1 0 : f_{32} 1 1 : fc_{32}	○	○
TCK1			○	○

Timer B2 mode register

Symbol	Address	When reset
TB2MR	$035D_{16}$	$00XX0000_2$

b7	b6	b5	b4	b3	b2	b1	b0
			0			0	0

Bit symbol	Bit name	Function	R	W
TMOD0	Operation mode select bit	b1 b0 0 0 : Timer mode	○	○
TMOD1			○	○
MR0	Invalid in timer mode Can be "0" or "1"		○	○
MR1			○	○
MR2	0 (Set to "0" in timer mode)		○	○
MR3	Invalid in timer mode. When write, set "0". When read in timer mode, its content is indeterminate.		○	×
TCK0	Count source select bit	b7 b6 0 0 : f_1 0 1 : f_8 1 0 : f_{32} 1 1 : fc_{32}	○	○
TCK1			○	○

Figure 15.4 Timer mode registers in three-phase PWM output mode

Figure 15.5 shows the block diagram for three-phase waveform mode. In "L" active output polarity in three-phase waveform mode, the positive-phase waveforms (U phase, V phase, and W phase) and negative waveforms ($\overline{U}$ phase, $\overline{V}$ phase, and $\overline{W}$ phase), six waveforms in total, are output from $P8_0$, $P8_1$, $P7_2$, $P7_3$, $P7_4$, and $P7_5$ as active on the "L" level. Of the timers used in this mode, timer A4 controls the U phase and $\overline{U}$ phase, timer A1 controls the V phase and $\overline{V}$ phase, and timer A2 controls the W phase and $\overline{W}$ phase respectively; timer B2 controls the periods of one-shot pulse output from timers A4, A1, and A2. In outputting a waveform, dead time can be set so as to cause the "L" level of the positive waveform output (U phase, V phase, and W phase) not to lap over the "L" level of the negative waveform output ($\overline{U}$ phase, $\overline{V}$ phase, and $\overline{W}$ phase).

To set short circuit time, use three 8-bit timers sharing the reload register for setting dead time. A value from 1 through 255 can be set as the count of the timer for setting dead time. The timer for setting dead time works as a one-shot timer. If a value is written to the dead timer ($030C_{16}$), the value is written to the reload register shared by the three timers for setting dead time.

Any of the timers for setting dead time takes the value of the reload register into its counter, if a start trigger comes from its corresponding timer, and performs a down count in line with the clock source selected by the dead time timer count source select bit (bit 2 at 0309_{16}). The timer can receive another trigger again before the workings due to the previous trigger are completed. In this instance, the timer performs a down count from the reload register's content after its transfer, provoked by the trigger, to the timer for setting dead time.

Since the timer for setting dead time works as a one-shot timer, it starts outputting pulses if a trigger comes; it stops outputting pulses as soon as its content becomes 00_{16}, and waits for the next trigger to come.

The positive waveforms (U phase, V phase, and W phase) and the negative waveforms ($\overline{U}$ phase, $\overline{V}$ phase, and $\overline{W}$ phase) in three-phase waveform mode are output from respective ports by means of setting "1" in the output control bit (bit 3 at 0308_{16}). Setting "0" in this bit causes the ports to be the high-impedance state. This bit can be set to "0" not only by use of the applicable instruction, but by entering a falling edge in the $\overline{NMI}$ terminal or by resetting. Also, if "1" is set in the positive and negative phases concurrent L output disable function enable bit (bit 4 at 0308_{16}) causes one of the pairs of U phase and $\overline{U}$ phase, V phase and $\overline{V}$ phase, and W phase and $\overline{W}$ phase concurrently go to "L", as a result, the output control bit becomes the high-impedance state.

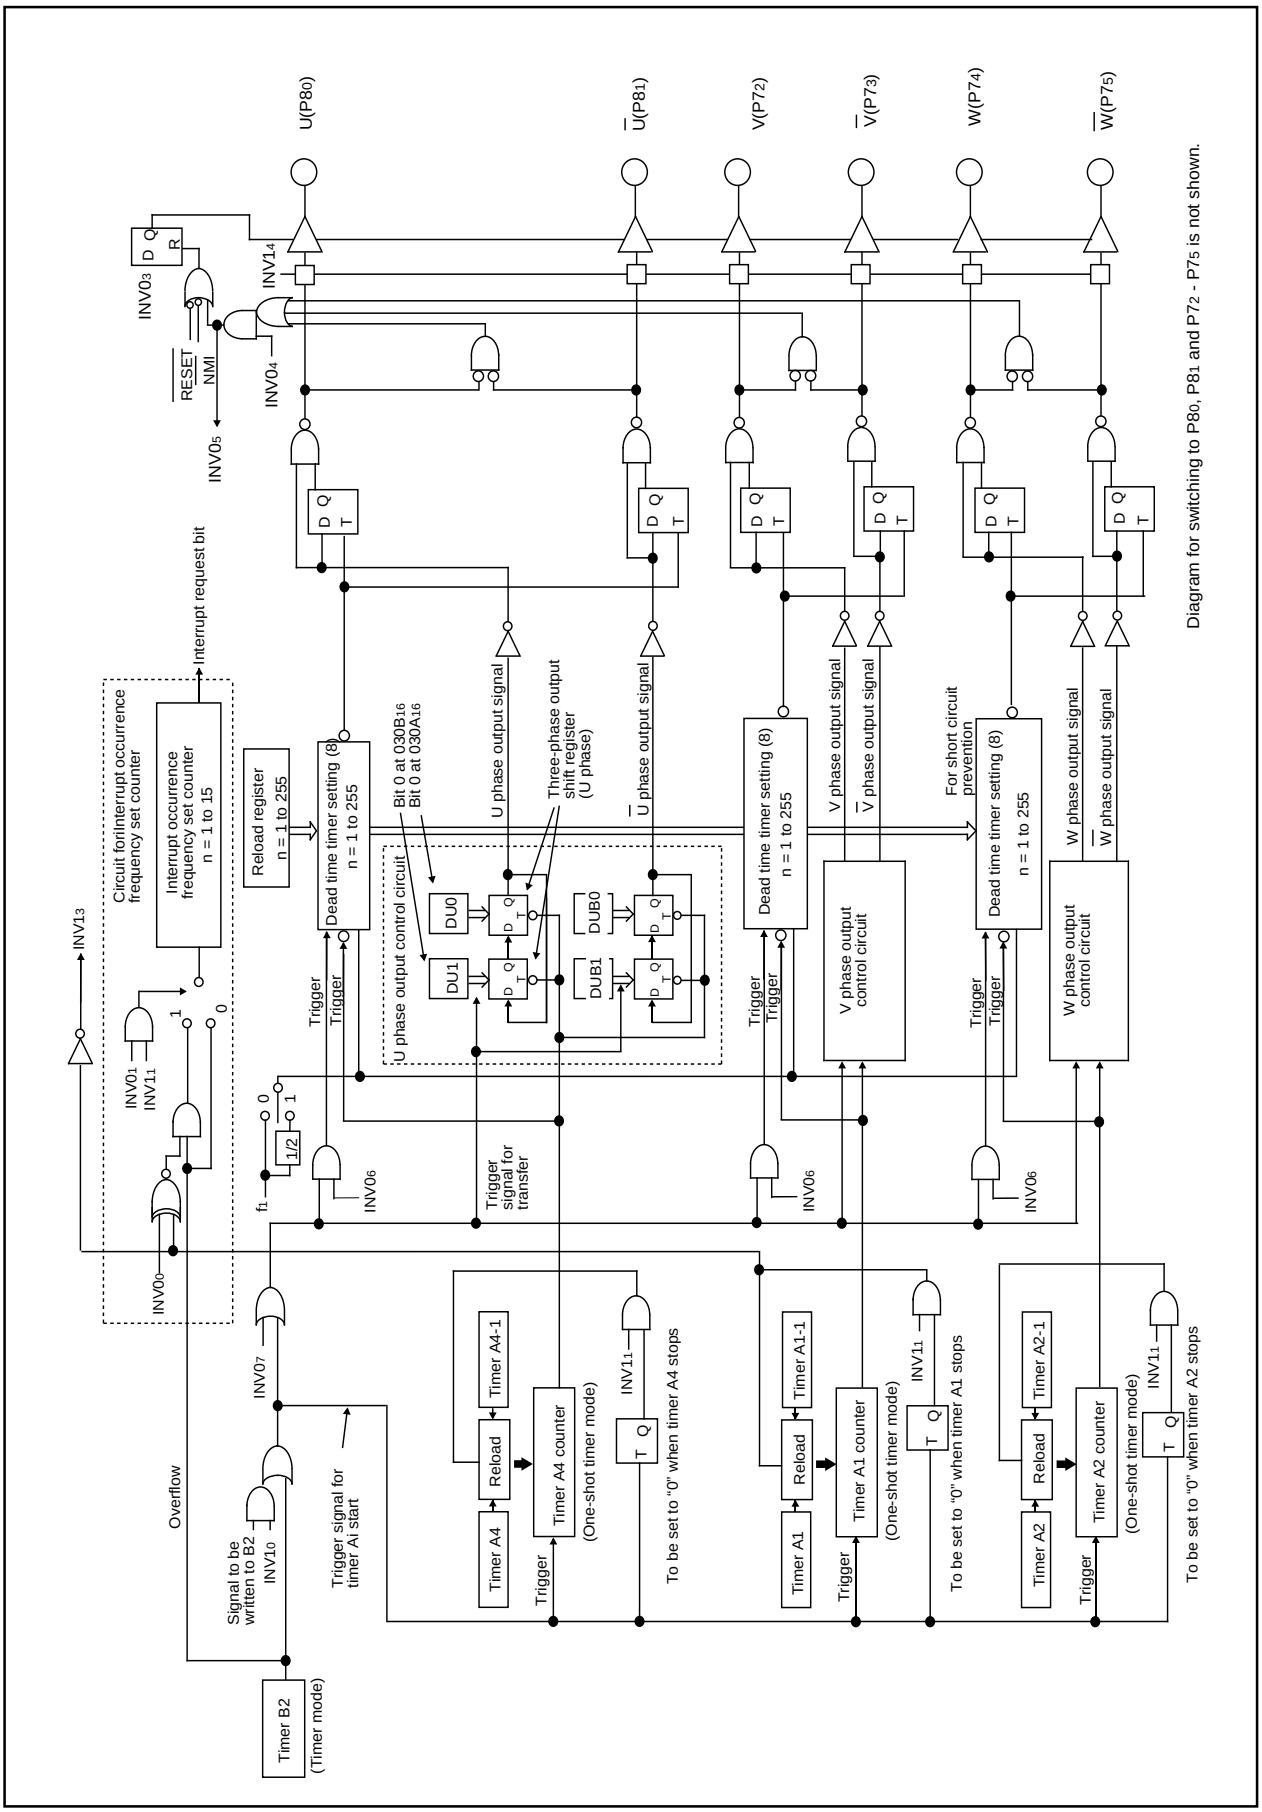

Figure 15.5 Block diagram for three-phase waveform mode

Triangular wave modulation

To generate a PWM waveform of triangular wave modulation, set "0" in the modulation mode select bit (bit 6 at 0308_{16}). Also, set "1" in the timers A4-1, A1-1, A2-1 control bit (bit 1 at 0309_{16}). In this mode, each of timers A4, A1, and A2 has two timer registers, and alternately reloads the timer register's content to the counter every time timer B2 counter's content becomes 0000_{16}. If "0" is set to the effective interrupt output specification bit (bit 1 at 0308_{16}), the frequency of interrupt requests that occur every time the timer B2 counter's value becomes 0000_{16} can be set by use of the timer B2 counter ($030D_{16}$) for setting the frequency of interrupt occurrences. The frequency of occurrences is given by (setting; setting π 0).

Setting "1" in the effective interrupt output specification bit (bit 1 at 0308_{16}) provides the means to choose which value of the timer A1 reload control signal to use, "0" or "1", to cause timer B2's interrupt request to occur. To make this selection, use the effective interrupt output polarity selection bit (bit 0 at 0308_{16}).

An example of U phase waveform is shown in Figure 15.6, and the description of waveform output workings is given below. Set "1" in DU0 (bit 0 at $030A_{16}$). And set "0" in DUB0 (bit 1 at $030A_{16}$). In addition, set "0" in DU1 (bit 0 at $030B_{16}$) and set "1" in DUB1 (bit 1 at $030B_{16}$). Also, set "0" in the effective interrupt output specification bit (bit 1 at 0308_{16}) to set a value in the timer B2 interrupt occurrence frequency set counter. By this setting, a timer B2 interrupt occurs when the timer B2 counter's content becomes 0000_{16} as many as (setting) times. Furthermore, set "1" in the effective interrupt output specification bit (bit 1 at 0308_{16}), set in the effective interrupt polarity select bit (bit 0 at 0308_{16}) and set "1" in the interrupt occurrence frequency set counter ($030D_{16}$). These settings cause a timer B2 interrupt to occur every other interval when the U phase output goes to "H".

When the timer B2 counter's content becomes 0000_{16}, timer A4 starts outputting one-shot pulses. In this instance, the content of DU1 (bit 0 at $030B_{16}$) and that of DU0 (bit 0 at $030A_{16}$) are set in the three-phase output shift register (U phase), the content of DUB1 (bit 1 at $030B_{16}$) and that of DUB0 (bit 1 at $030A_{16}$) are set in the three-phase shift register ($\overline{U}$ phase). After triangular wave modulation mode is selected, however, no setting is made in the shift register even though the timer B2 counter's content becomes 0000_{16}.

The value of DU0 and that of DUB0 are output to the U terminal ($P8_0$) and to the $\overline{U}$ terminal ($P8_1$) respectively. When the timer A4 counter counts the value written to timer A4 ($034F_{16}$, $034E_{16}$) and when timer A4 finishes outputting one-shot pulses, the three-phase shift register's content is shifted one position, and the value of DU1 and that of DUB1 are output to the U phase output signal and to $\overline{U}$ phase output signal respectively. At this time, one-shot pulses are output from the timer for setting dead time used for setting the time over which the "L" level of the U phase waveform doesn't lap over the "L" level of the $\overline{U}$ phase waveform, which has the opposite phase of the former. The U phase waveform output that started from the "H" level keeps its level until the timer for setting dead time finishes outputting one-shot pulses even though the three-phase output shift register's content changes from "1" to "0" by the effect of the one-shot pulses. When the timer for setting dead time finishes outputting one-shot pulses, "0" already shifted in the three-phase shift register goes effective, and the U phase waveform changes to the "L" level. When the timer B2 counter's content becomes 0000_{16}, the timer A4 counter starts counting the value written to timer A4-1 (0307_{16}, 0306_{16}), and starts outputting one-shot pulses. When timer A4 finishes outputting one-shot pulses, the three-phase shift register's content is shifted one position, but if the three-phase output shift register's content changes from "0" to "1" as a result of the shift, the output level changes from "L" to "H" without waiting for the timer for setting dead time to finish outputting one-shot pulses. A U phase waveform is generated by these workings repeatedly. With the exception that the three-phase output shift register on the U phase side is used, the workings in generating a U phase waveform, which has the opposite phase of the U phase waveform, are the same as in generating a U

phase waveform. In this way, a waveform can be picked up from the applicable terminal in a manner in which the "L" level of the U phase waveform doesn't lap over that of the U phase waveform, which has the opposite phase of the U phase waveform. The width of the "L" level too can be adjusted by varying the values of timer B2, timer A4, and timer A4-1. In dealing with the V and W phases, and $\overline{V}$ and $\overline{W}$ phases, the latter are of opposite phase of the former, have the corresponding timers work similarly to dealing with the U and $\overline{U}$ phases to generate an intended waveform.

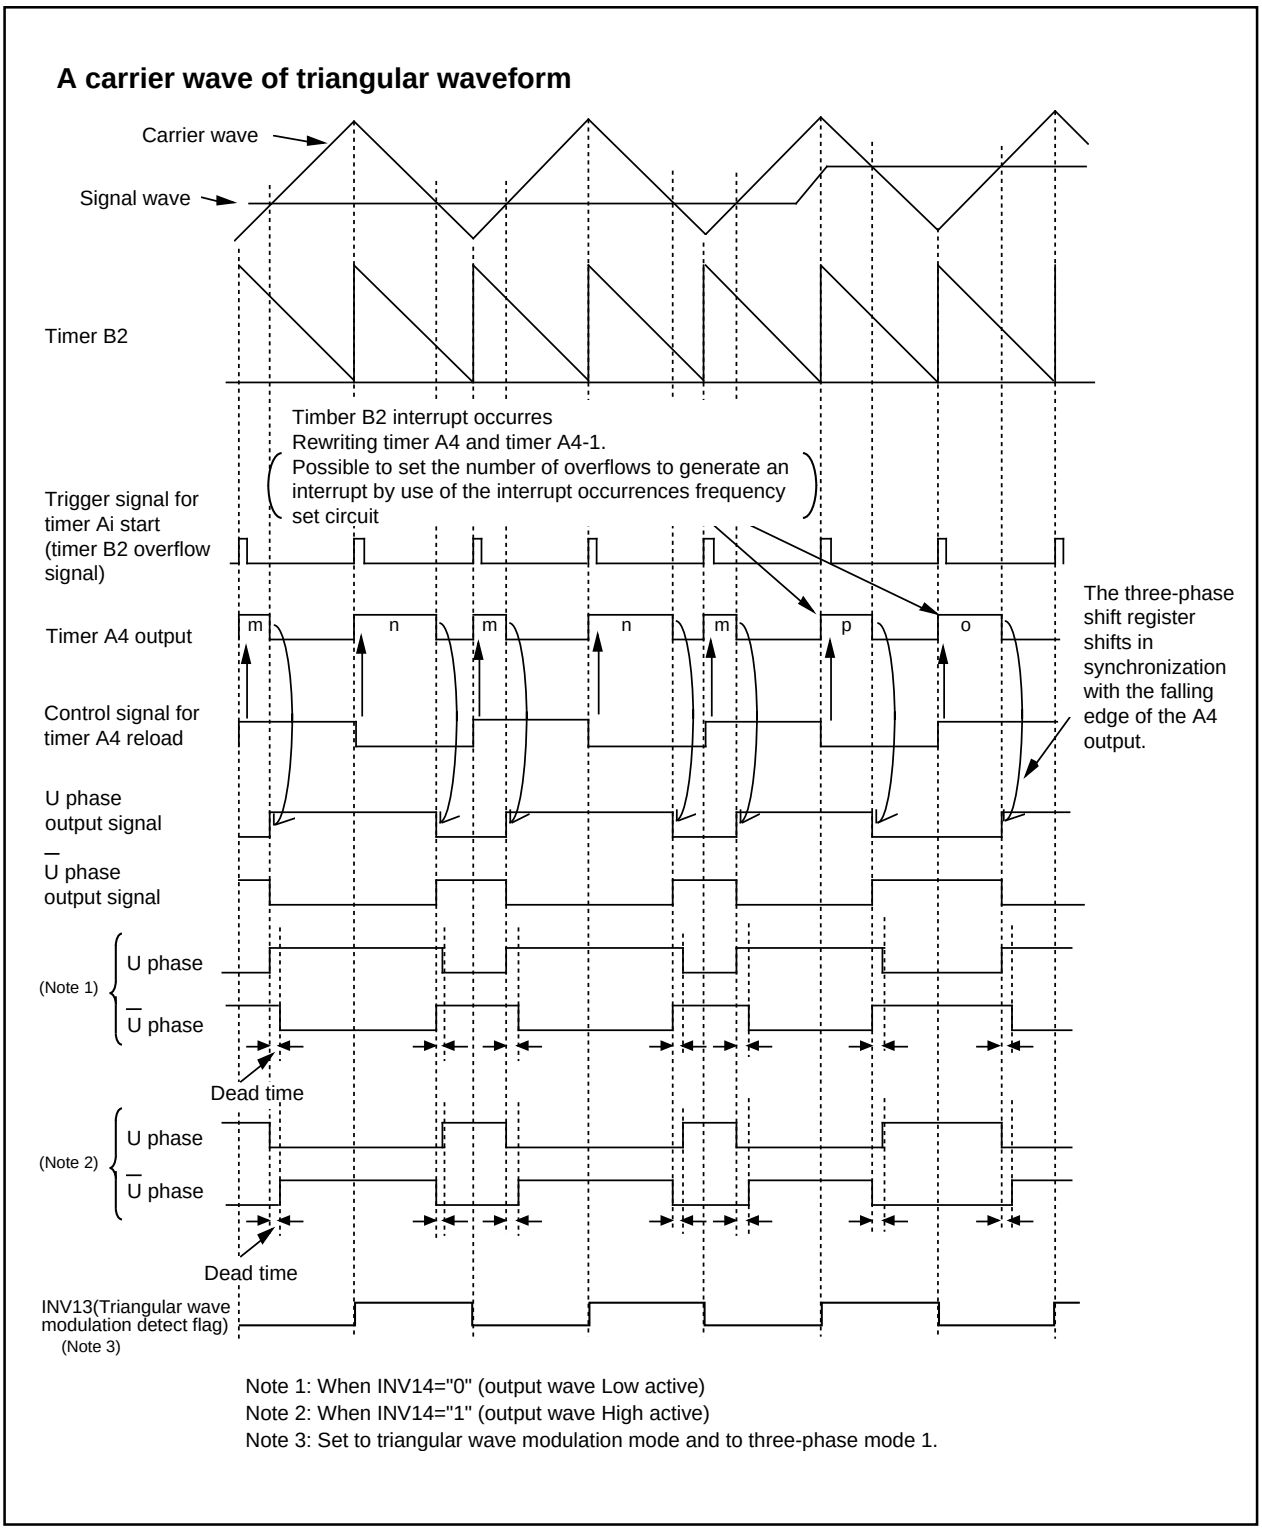

Figure 15.6 Timing chart of operation (1)

Assigning certain values to DU0 (bit 0 at 030A16) and DUB0 (bit 1 at 030A16), and to DU1 (bit 0 at 030B16) and DUB1 (bit 1 at 030B16) allows you to output the waveforms as shown in Figure 15.7, that is, to output the U phase alone, to fix $\overline{U}$ phase to "H", to fix the U phase to "H," or to output the $\overline{U}$ phase alone.

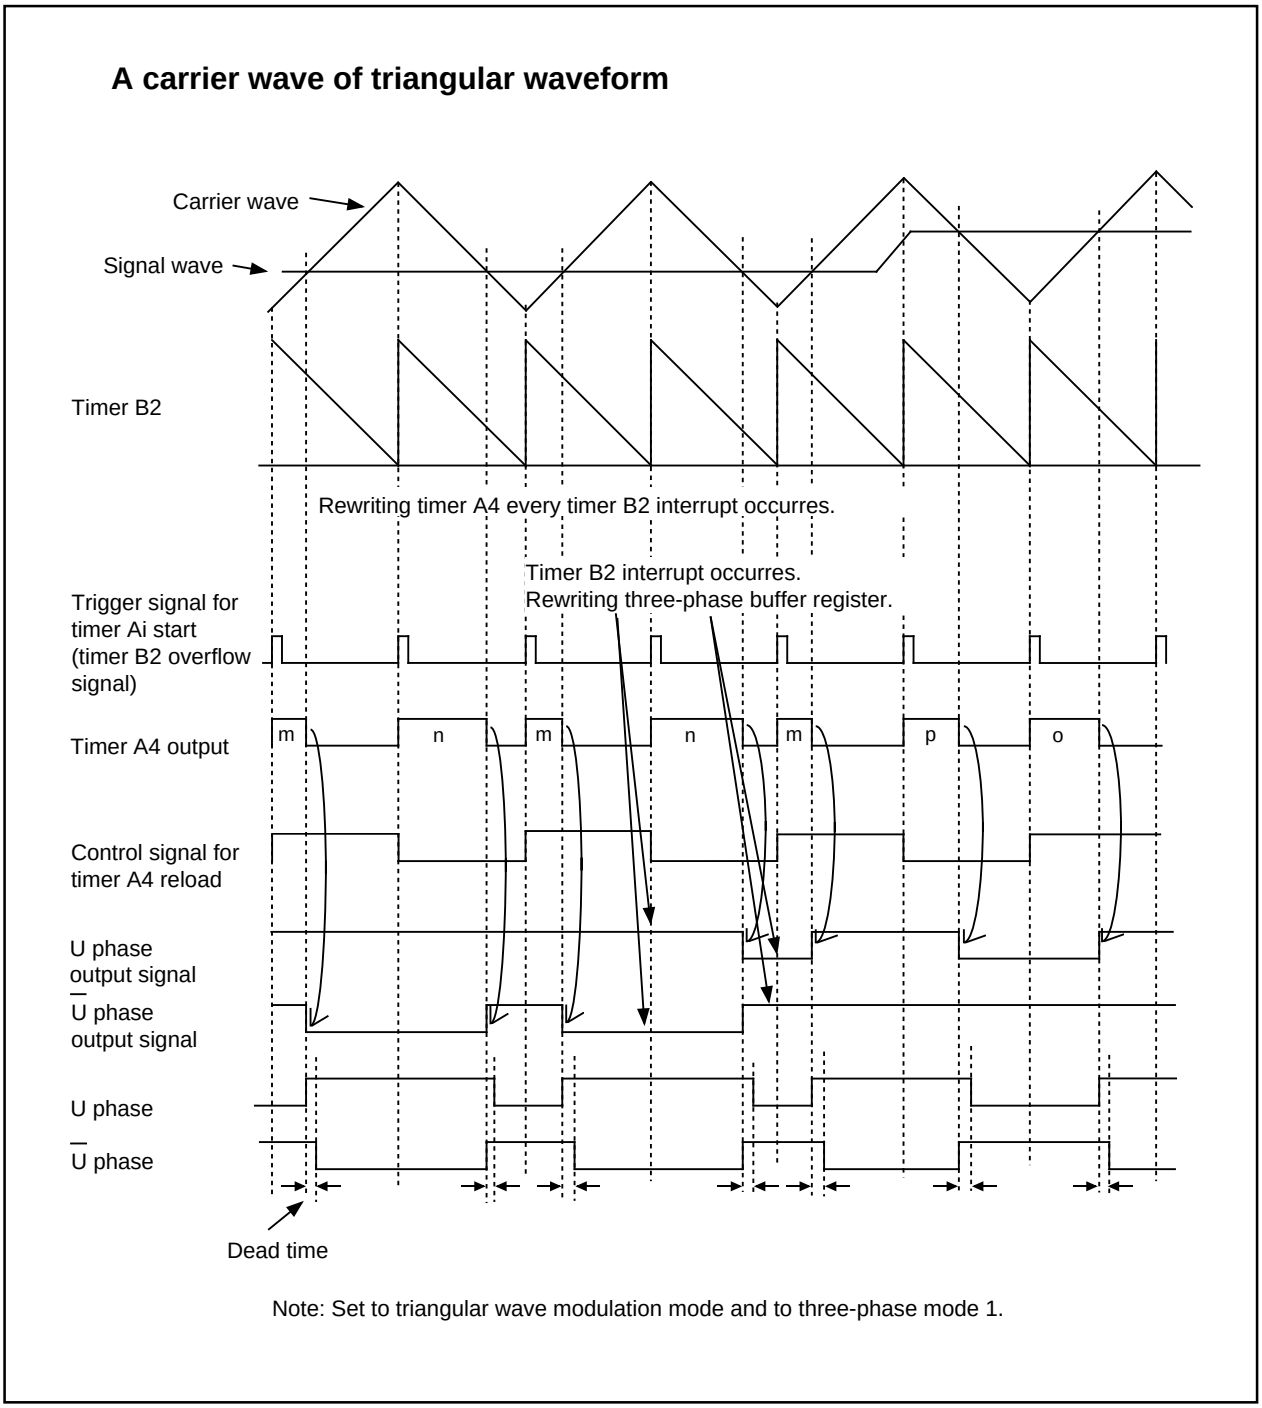

Figure 15.7 Timing chart of operation (2)

Sawtooth modulation

To generate a PWM waveform of sawtooth wave modulation, set "1" in the modulation mode select bit (bit 6 at 0308_{16}). Also, set "0" in the timers A4, A1, and A2-1 control bit (bit 1 at 0309_{16}). In this mode, the timer registers of timers A4, A1, and of A2 comprise conventional timers A4, A1, and A2 alone, and reload the corresponding timer register's content to the counter every time the timer B2 counter's content becomes 0000_{16}. The effective interrupt output specification bit (bit 1 at 0308_{16}) and the effective interrupt output polarity select bit (bit 0 at 0308_{16}) go nullified.

An example of U phase waveform is shown in Figure 15.8, and the description of waveform output workings is given below. Set "1" in DU0 (bit 0 at $030A_{16}$), and set "0" in DUB0 (bit 1 at $030A_{16}$). In addition, set "0" in DU1 (bit 0 at $030B_{16}$) and set "1" in DUB1 (bit 1 at $030B_{16}$).

When the timber B2 counter's content becomes 0000_{16}, timer B2 generates an interrupt, and timer A4 starts outputting one-shot pulses at the same time. In this instance, the contents of the three-phase buffer registers DU1 and DU0 are set in the three-phase output shift register (U phase), and the contents of DUB1 and DUB0 are set in the three-phase output register (U phase). After this, the three-phase buffer register's content is set in the three-phase shift register every time the timer B2 counter's content becomes 0000_{16}.

The value of DU0 and that of DUB0 are output to the U terminal ($P8_0$) and to the $\overline{U}$ terminal ($P8_1$) respectively. When the timer A4 counter counts the value written to timer A4 ($034F_{16}$, $034E_{16}$) and when timer A4 finishes outputting one-shot pulses, the three-phase output shift register's content is shifted one position, and the value of DU1 and that of DUB1 are output to the U phase output signal and to the $\overline{U}$ output signal respectively. At this time, one-shot pulses are output from the timer for setting dead time used for setting the time over which the "L" level of the U phase waveform doesn't lap over the "L" level of the $\overline{U}$ phase waveform, which has the opposite phase of the former. The U phase waveform output that started from the "H" level keeps its level until the timer for setting dead time finishes outputting one-shot pulses even though the three-phase output shift register's content changes from "1" to "0 "by the effect of the one-shot pulses. When the timer for setting dead time finishes outputting one-shot pulses, 0 already shifted in the three-phase shift register goes effective, and the U phase waveform changes to the "L" level. When the timer B2 counter's content becomes 0000_{16}, the contents of the three-phase buffer registers DU1 and DU0 are set in the three-phase shift register (U phase), and the contents of DUB1 and DUB0 are set in the three-phase shift register ($\overline{U}$ phase) again.

A U phase waveform is generated by these workings repeatedly. With the exception that the three-phase output shift register on the $\overline{U}$ phase side is used, the workings in generating a $\overline{U}$ phase waveform, which has the opposite phase of the U phase waveform, are the same as in generating a U phase waveform. In this way, a waveform can be picked up from the applicable terminal in a manner in which the "L" level of the U phase waveform doesn't lap over that of the U phase waveform, which has the opposite phase of the U phase waveform. The width of the "L" level too can be adjusted by varying the values of timer B2 and timer A4. In dealing with the V and W phases, and $\overline{V}$ and $\overline{W}$ phases, the latter are of opposite phase of the former, have the corresponding timers work similarly to dealing with the U and $\overline{U}$ phases to generate an intended waveform.

A carrier wave of sawtooth waveform

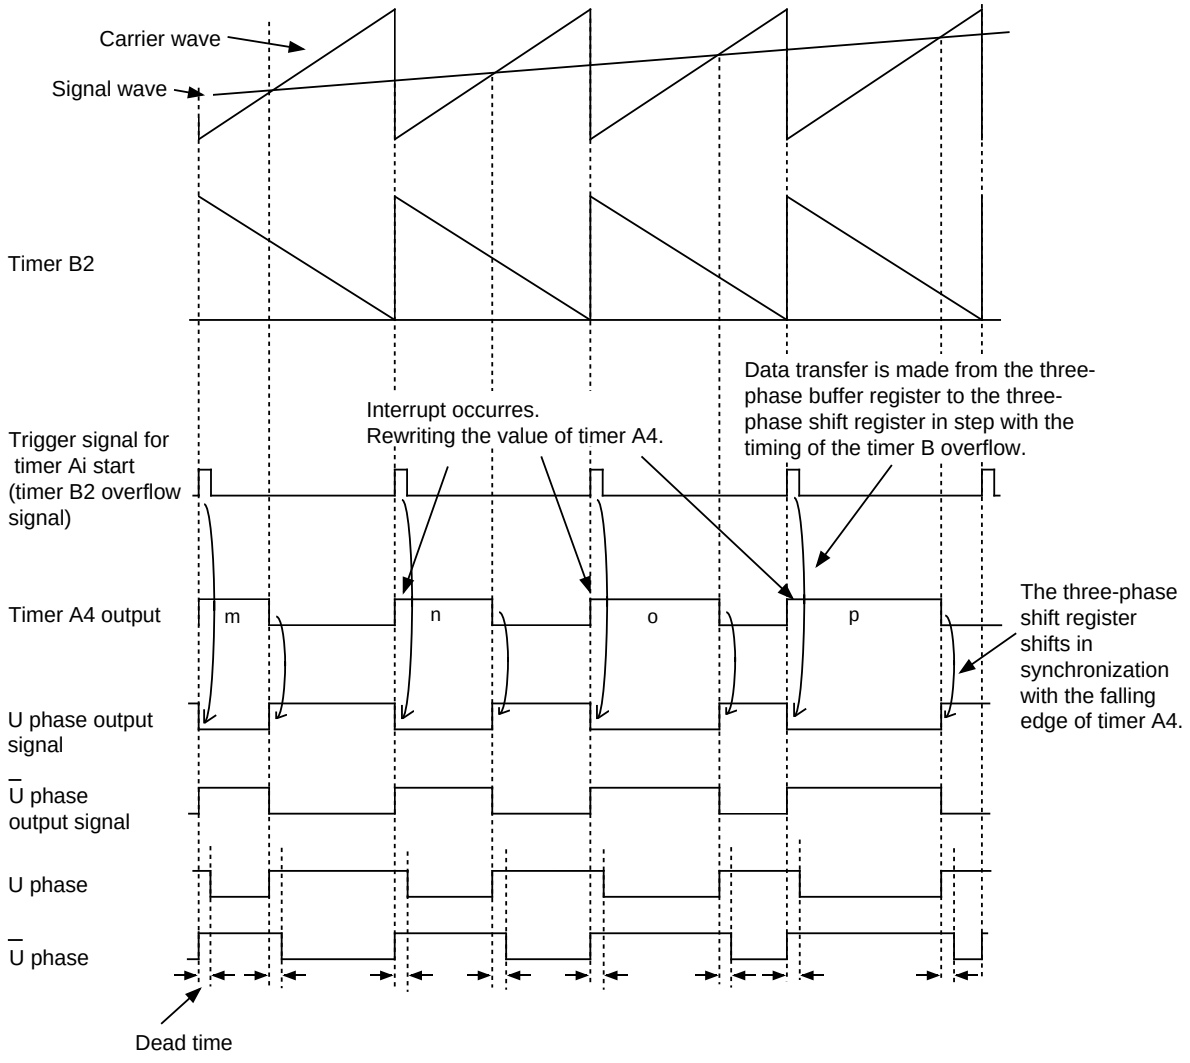

Note: Set to sawtooth modulation mode and to three-phase mode 0.

Figure 15.8 Timing chart of operation (3)

Setting "1" both in DUB0 and in DUB1 provides a means to output the U phase alone and to fix the $\overline{U}$ phase output to "H" as shown in Figure 15.9.

A carrier wave of sawtooth waveform

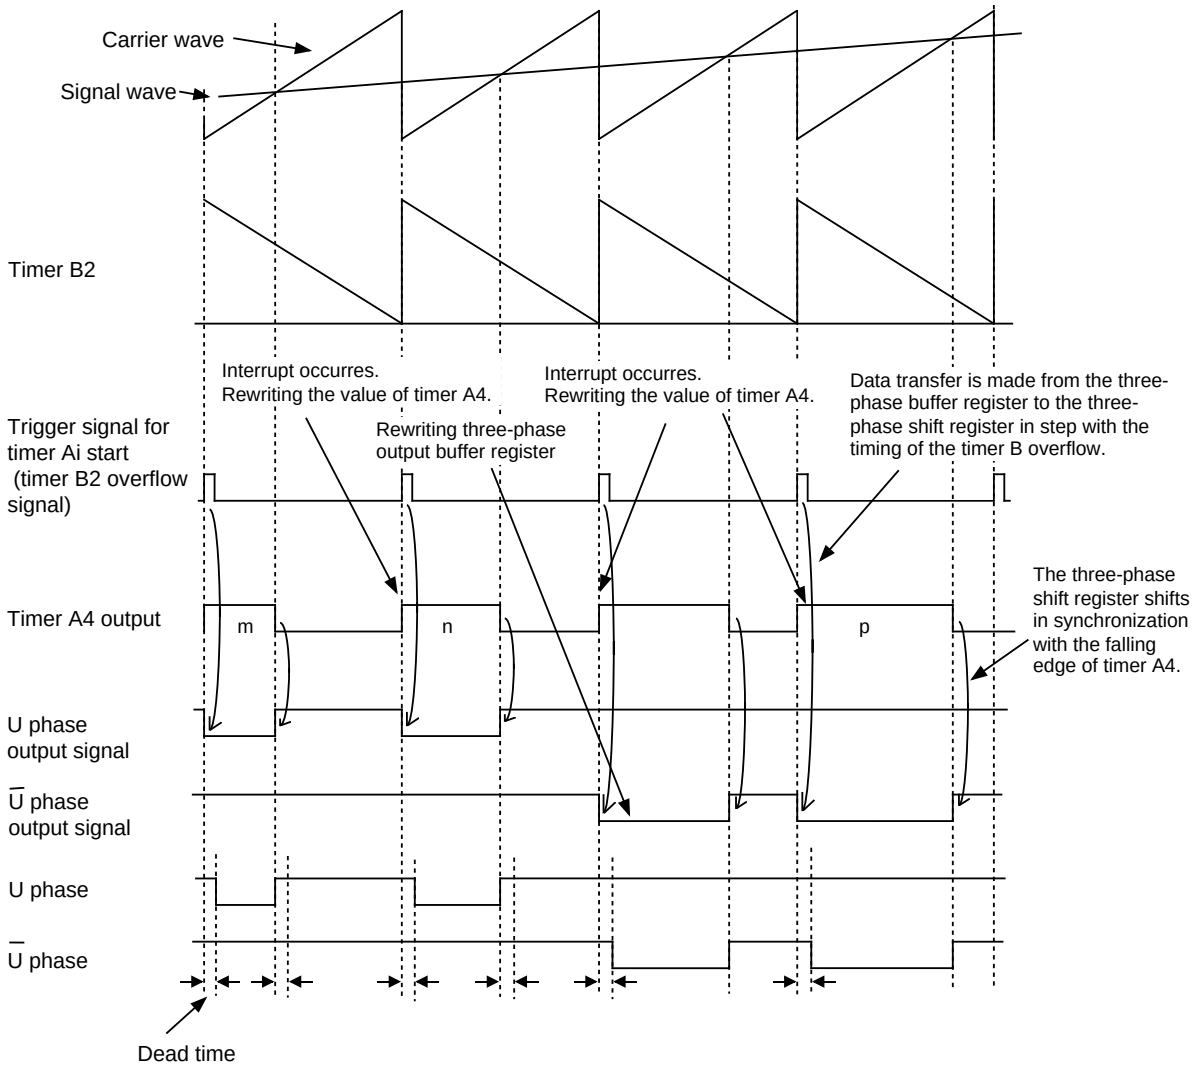

Note: Set to sawtooth modulation mode and to three-phase mode 0.

Figure 15.9 Timing chart of operation (4)

16. Serial I/O

Serial I/O is configured as five channels: UART0 to UART4.

UART0 to 4

UART0 to UART4 each have an exclusive timer to generate a transfer clock, so they operate independently of each other.

Figures 16.1 and 16.2 show the block diagram of UARTi (i=0 to 4). Figures 16.3 and 16.4 show the block diagram of the transmit/receive unit.

UARTi has two operation modes: a clock synchronous serial I/O mode and a clock asynchronous serial I/O mode (UART mode). The contents of the serial I/O mode select bits (bits 0 to 2 at addresses 0360_{16}, 0368_{16}, 0338_{16}, 0328_{16} and $02F8_{16}$) determine whether UARTi is used as a clock synchronous serial I/O or as a UART.

Although a few functions are different, UART0 to UART4 have almost the same functions.

UART2 to UART4, in particular, are compliant with the SIM interface with some extra settings added in clock-asynchronous serial I/O mode (Note). It also has the bus collision detection function that generates an interrupt request if the TxD pin and the RxD pin are different in level.

Table 16.1 shows the comparison of functions of UART0 to UART4, and Figures 16.5 through 16.11 show the registers related to UARTi.

Note: SIM : Subscriber Identity Module

Table 16.1 Comparison of functions of UART0 to UART4

Function	UART0	UART1	UART2	UART3	UART4
CLK polarity selection	Possible(Note 1)	Possible(Note 1)	Possible(Note 1)	Possible(Note 1)	Possible(Note 1)
LSB first / MSB first selection	Possible(Note 1)	Possible(Note 1)	Possible(Note 2)	Possible(Note 2)	Possible(Note 2)
Continuous receive mode selection	Possible(Note 1)	Possible(Note 1)	Possible(Note 1)	Possible(Note 1)	Possible(Note 1)
Transfer clock output from multiple pins selection	Impossible	Possible(Note 1)	Impossible	Impossible	Impossible
Separate $\overline{CTS}$/$\overline{RTS}$ pins	Possible	Impossible	Impossible	Impossible	Impossible
Serial data logic switch	Impossible	Impossible	Possible(Note 4)	Possible(Note 4)	Possible(Note 4)
Sleep mode selection	Possible(Note 3)	Possible(Note 3)	Impossible	Impossible	Impossible
TxD, RxD I/O polarity switch	Impossible	Impossible	Possible	Possible	Possible
TxD, RxD port output format	CMOS output	CMOS output	N-channel open drain output	CMOS output	CMOS output
Parity error signal output	Impossible	Impossible	Possible(Note 4)	Possible(Note 4)	Possible(Note 4)
Bus collision detection	Impossible	Impossible	Possible	Possible	Possible

Note 1: Only when clock synchronous serial I/O mode.
Note 2: Only when clock synchronous serial I/O mode and 8-bit UART mode.
Note 3: Only when UART mode.
Note 4: Using for SIM interface.

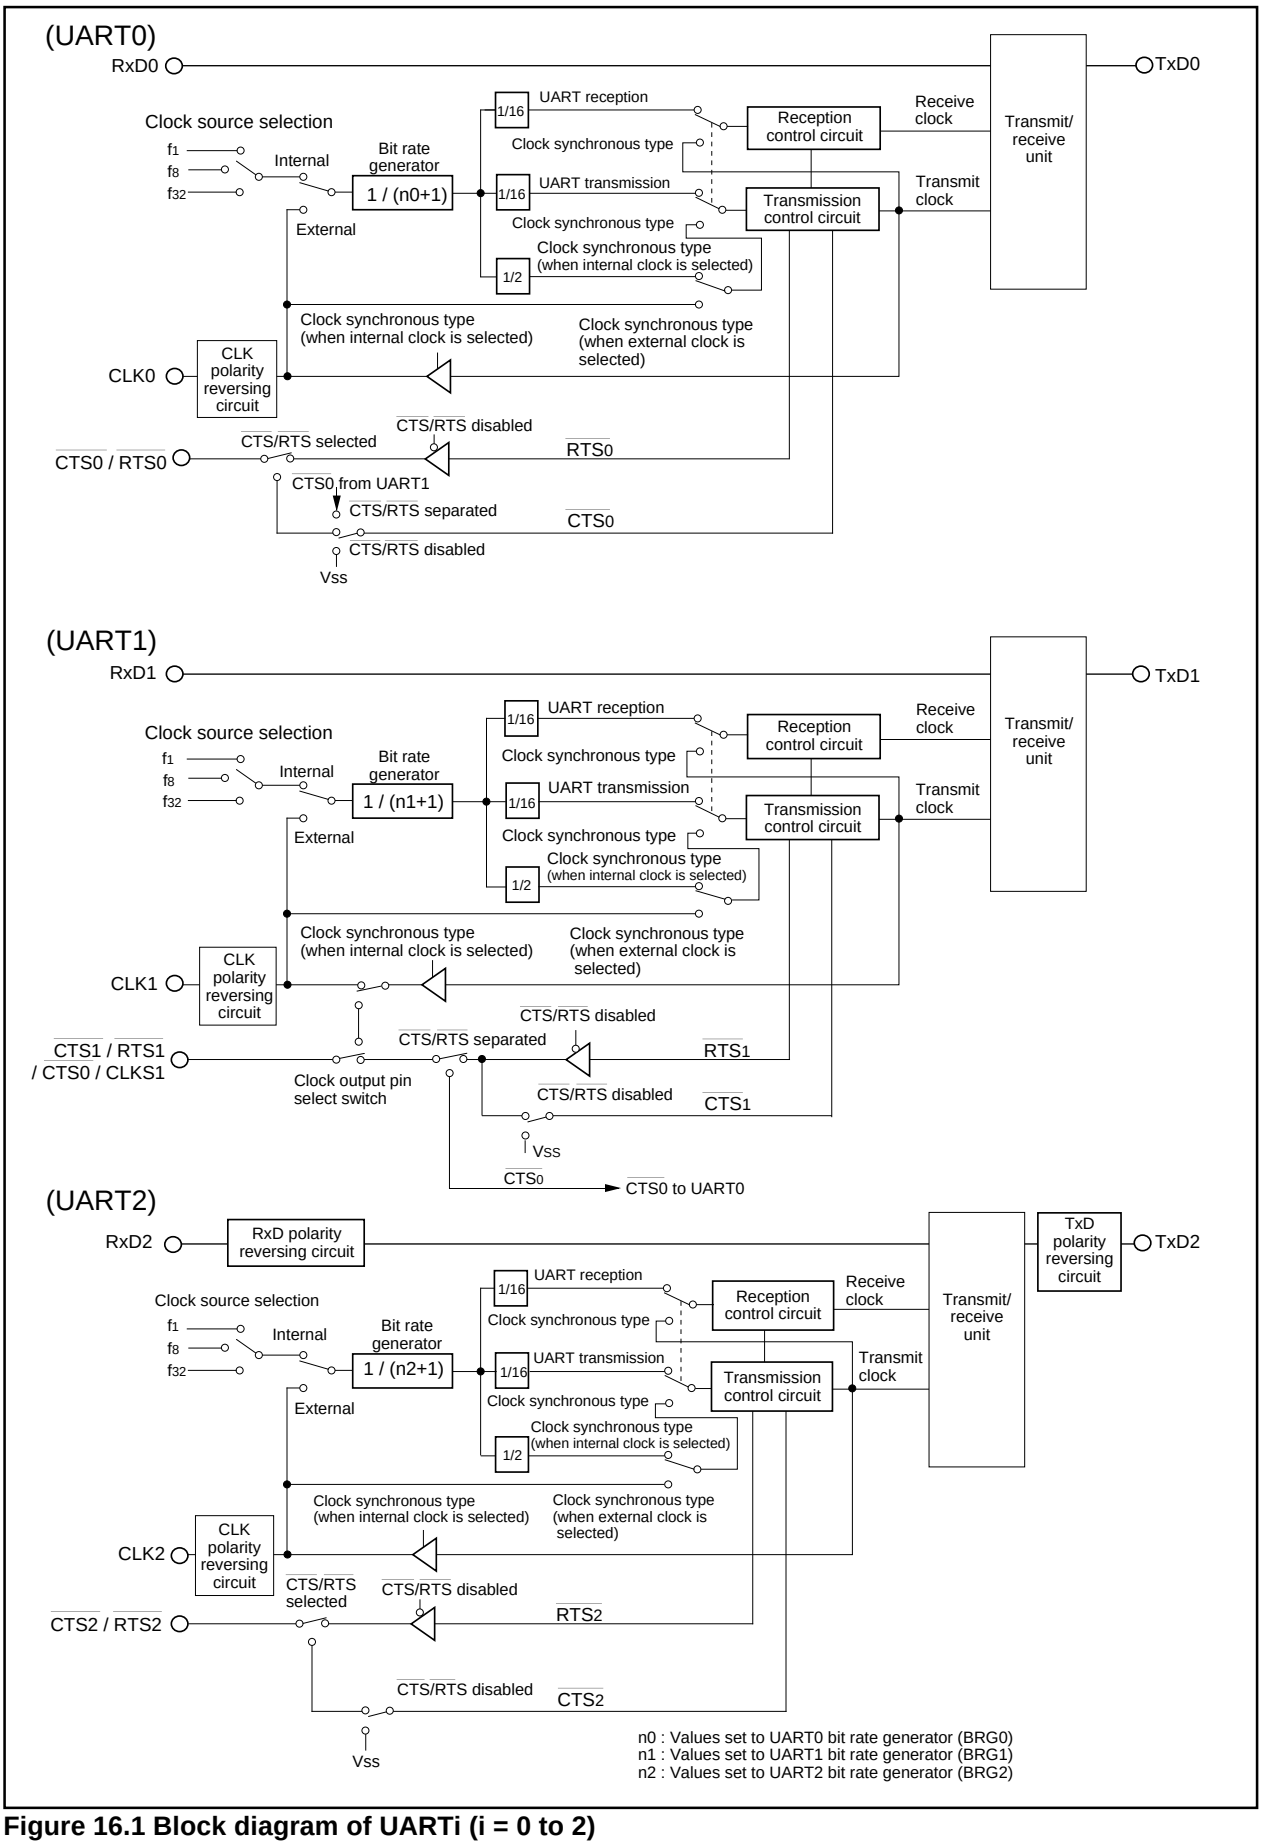

Figure 16.1 Block diagram of UARTi (i = 0 to 2)

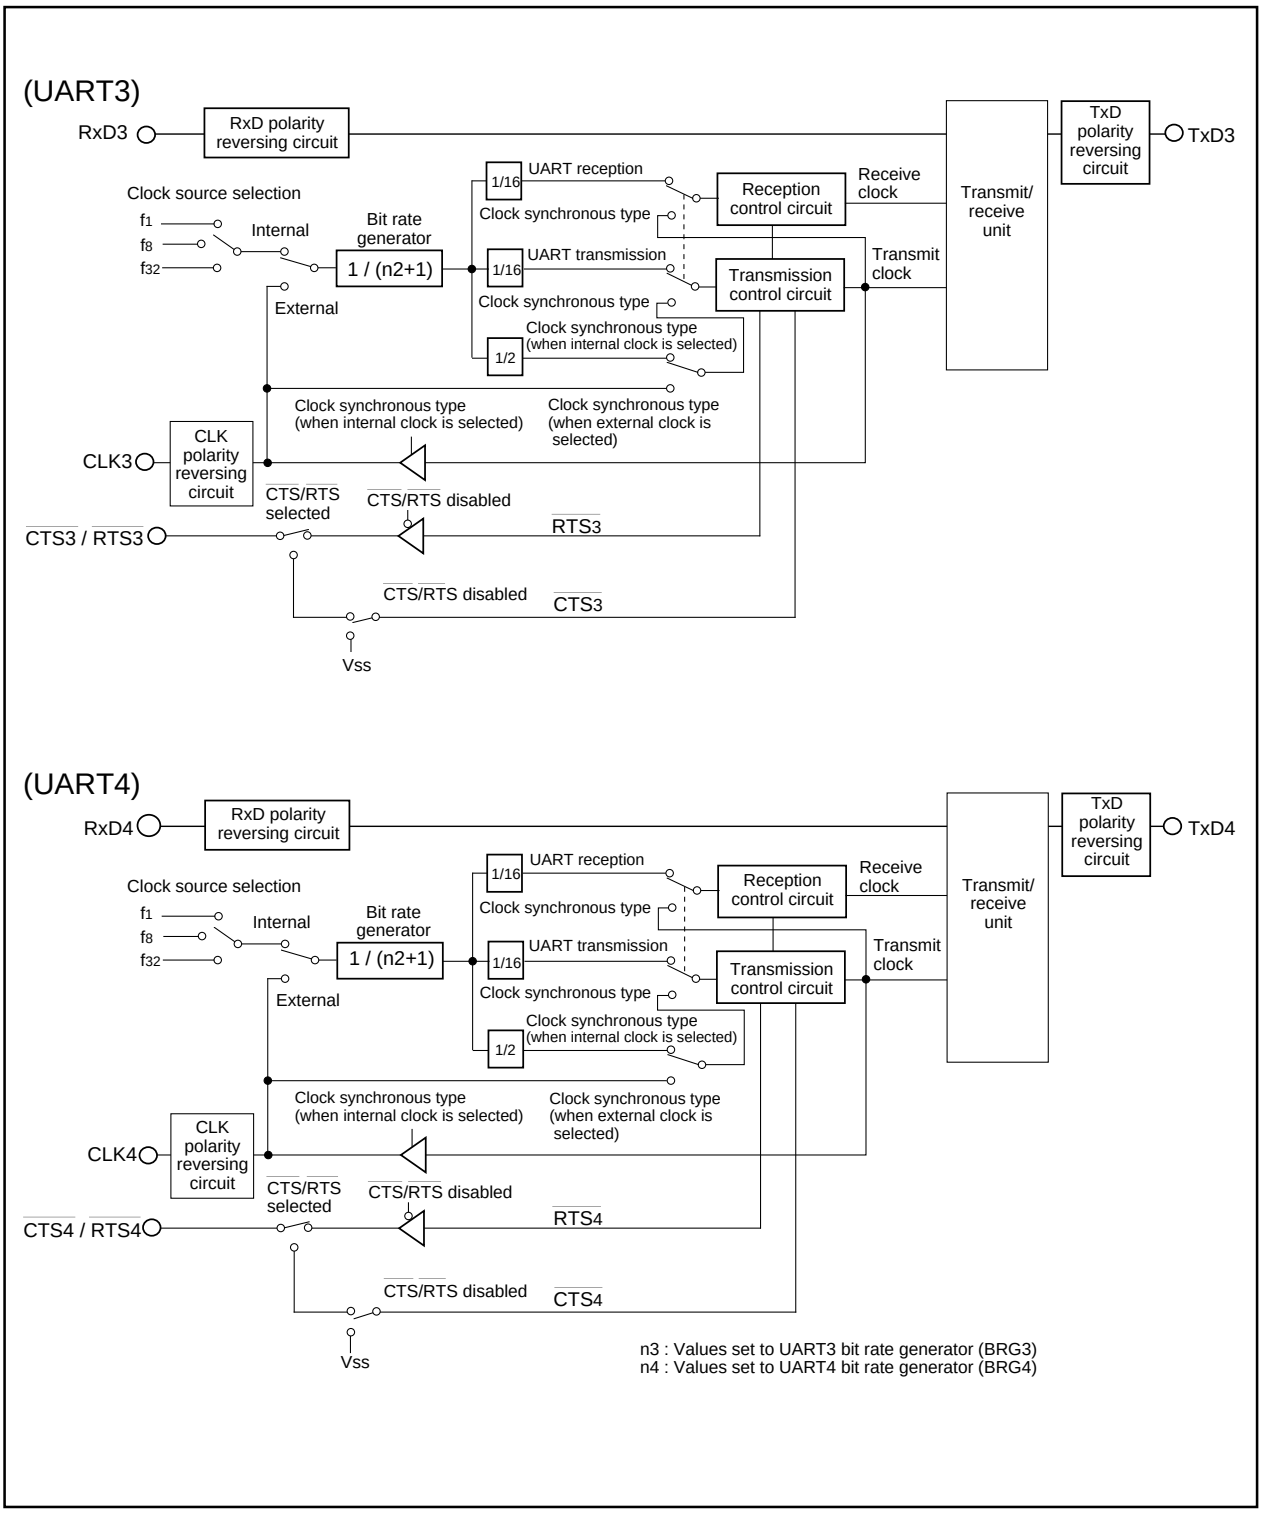

Figure 16.2 Block diagram of UARTi (i = 3, 4)

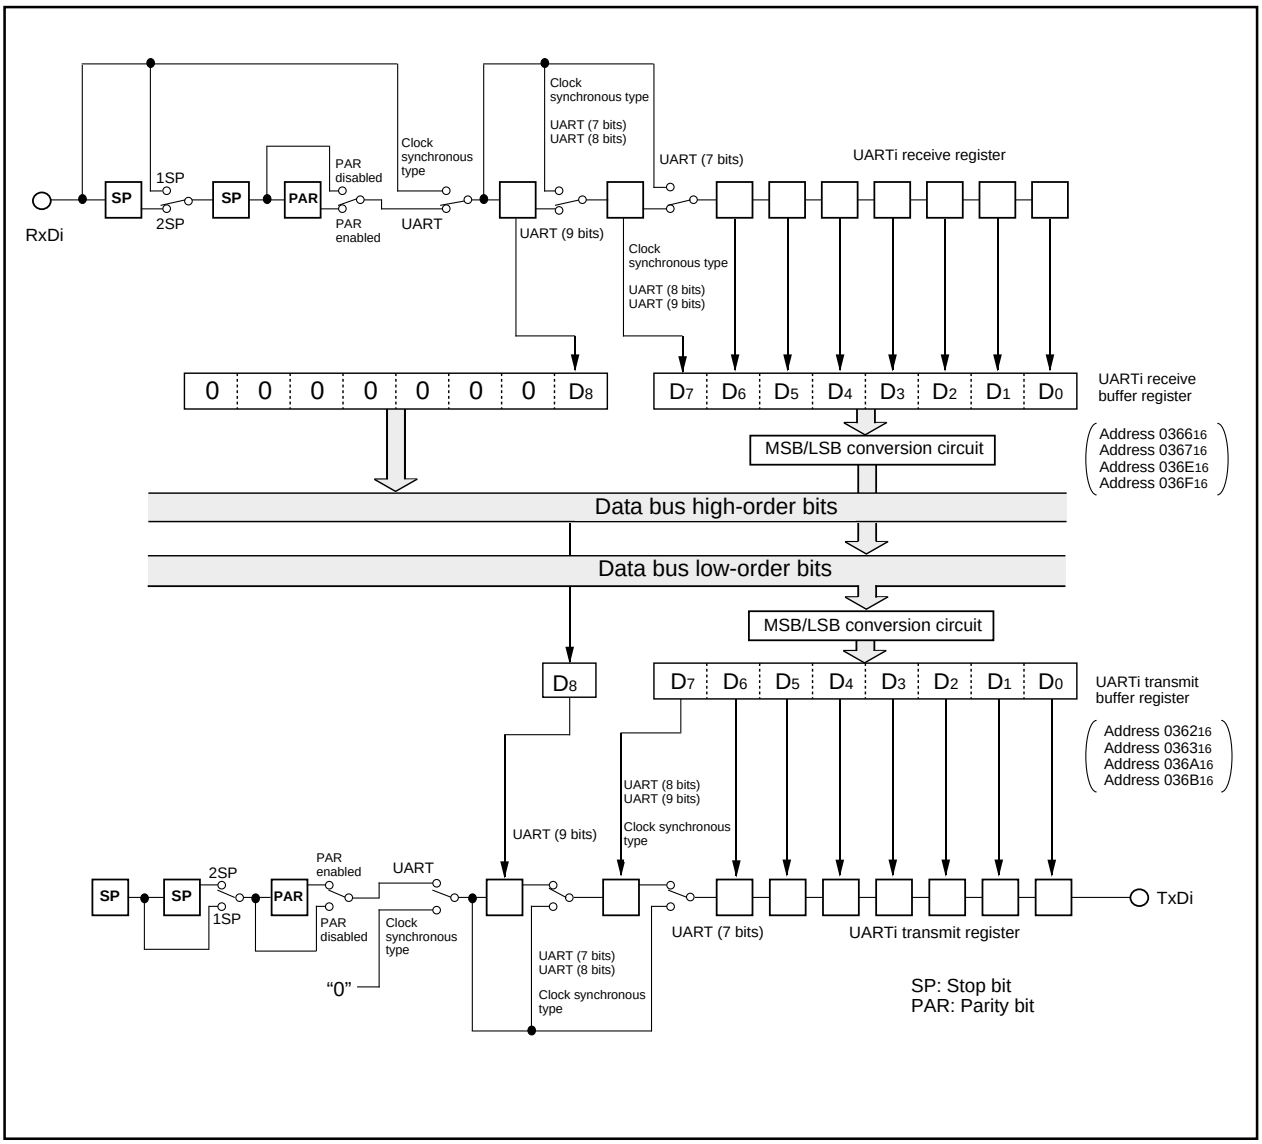

Figure 16.3 Block diagram of UARTi (i = 0, 1) transmit/receive unit

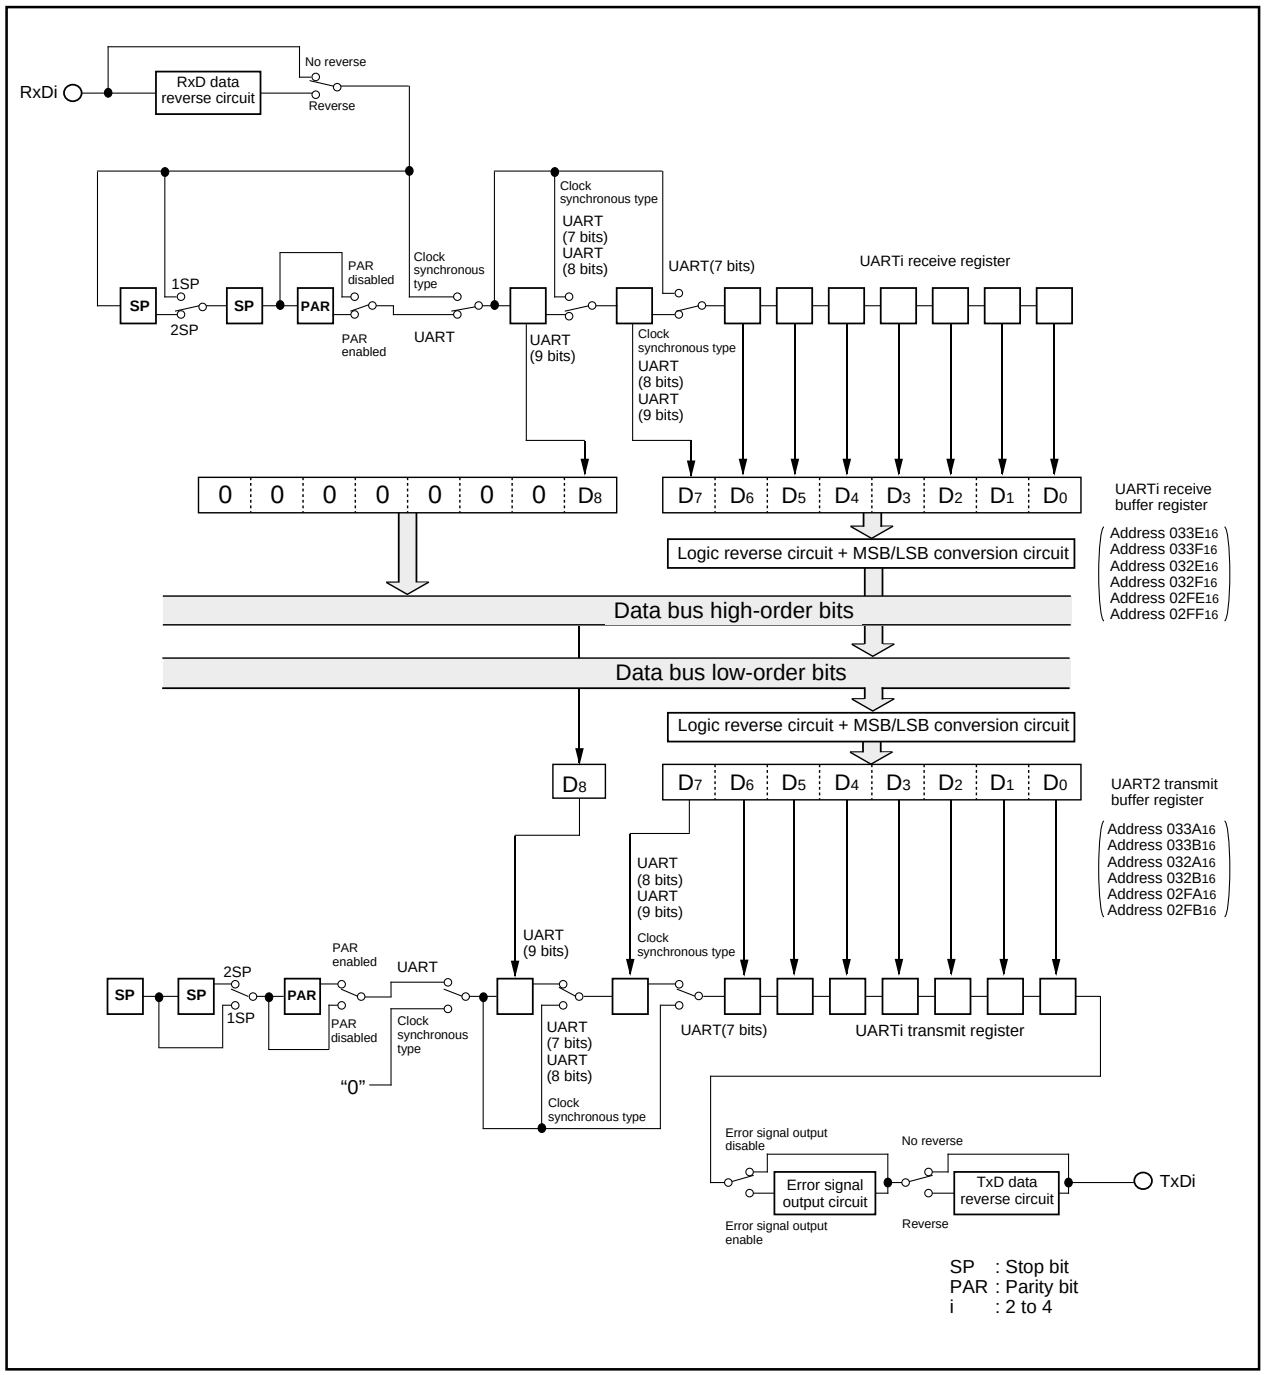

Figure 16.4 Block diagram of UARTi (i = 2 to 4) transmit/receive unit

UARTi transmit buffer register (Note)



Symbol	Address	When reset
U0TB	0363_{16}, 0362_{16}	Indeterminate
U1TB	$036B_{16}$, $036A_{16}$	Indeterminate
U2TB	$033B_{16}$, $033A_{16}$	Indeterminate
U3TB	$032B_{16}$, $032A_{16}$	Indeterminate
U4TB	$02FB_{16}$, $02FA_{16}$	Indeterminate

Function	R	W
Transmit data	×	○
Nothing is assigned. When write, set "0". When read, their contents are indeterminate.	—	—

Note: Use MOV instruction to write to this register.

UARTi receive buffer register



Symbol	Address	When reset
U0RB	0367_{16}, 0366_{16}	Indeterminate
U1RB	$036F_{16}$, $036E_{16}$	Indeterminate
U2RB	$033F_{16}$, $033E_{16}$	Indeterminate
U3RB	$032F_{16}$, $032E_{16}$	Indeterminate
U4RB	$02FF_{16}$, $02FE_{16}$	Indeterminate

Bit symbol	Bit name	Function (During clock synchronous serial I/O mode)	Function (During UART mode)	R	W
—	———	Receive data	Receive data	○	×
Nothing is assigned. When write, set "0". When read, the value of these bits is "0".				—	—
ABT	Arbitration lost detecting flag (Note 2)	0 : Not detected 1 : Detected	Invalid	○	○
OER	Overrun error flag (Note 1)	0 : No overrun error 1 : Overrun error found	0 : No overrun error 1 : Overrun error found	○	×
FER	Framing error flag (Note 1)	Invalid	0 : No framing error 1 : Framing error found	○	×
PER	Parity error flag (Note 1)	Invalid	0 : No parity error 1 : Parity error found	○	×
SUM	Error sum flag (Note 1)	Invalid	0 : No error 1 : Error found	○	×

Note 1: Bits 15 through 12 are set to "0" when the serial I/O mode select bit (bits 2 to 0 at addresses 0360_{16}, 0368_{16}, 0338_{16}, 0328_{16} and $02F8_{16}$) are set to "000_2" or the receive enable bit is set to "0".
(Bit 15 is set to "0" when bits 14 to 12 all are set to "0".) Bits 14 and 13 are also set to "0" when the lower byte of the UARTi receive buffer register (addresses 0366_{16}, $036E_{16}$, $033E_{16}$, $032E_{16}$ and $02FE_{16}$) is read out.
Note 2: Arbitration lost detecting flag is allocated to U2RB, U3RB and U4RB and nothing but "0" may be written. Nothing is assigned in bit 11 of U0RB and U1RB. When write, set "0". When read, the value of this bit is "0".

UARTi bit rate generator (Note 1, 2)



Symbol	Address	When reset
U0BRG	0361_{16}	Indeterminate
U1BRG	0369_{16}	Indeterminate
U2BRG	0339_{16}	Indeterminate
U3BRG	0329_{16}	Indeterminate
U4BRG	$02F9_{16}$	Indeterminate

Function	Values that can be set	R	W
Assuming that set value = n, BRGi divides the count source by n + 1	00_{16} to FF_{16}	×	○

Note 1: Use MOV instruction to write to this register.
Note 2: Write a value to this register while transmit/receive halts.

Figure 16.5 Serial I/O-related registers (1)

UARTi transmit/receive mode register

b7 b6 b5 b4 b3 b2 b1 b0

Symbol: UiMR(i=0,1) | Address: 0360₁₆, 0368₁₆ | When reset: 00₁₆

Bit symbol	Bit name	Function (During clock synchronous serial I/O mode)	Function (During UART mode)	R	W
SMD0	Serial I/O mode select bit	Must be fixed to 001	b2 b1 b0 1 0 0 : Transfer data 7 bits long 1 0 1 : Transfer data 8 bits long 1 1 0 : Transfer data 9 bits long 0 0 0 : Serial I/O invalid 0 1 0 : Must not be set 0 1 1 : Must not be set 1 1 1 : Must not be set	○	○
SMD1		b2 b1 b0 0 0 0 : Serial I/O invalid 0 1 0 : Must not be set 0 1 1 : Must not be set 1 1 1 : Must not be set		○	○
SMD2				○	○
CKDIR	Internal/external clock select bit	0 : Internal clock (Note 1) 1 : External clock (Note 2)	0 : Internal clock 1 : External clock (Note 2)	○	○
STPS	Stop bit length select bit	Invalid	0 : One stop bit 1 : Two stop bits	○	○
PRY	Odd/even parity select bit	Invalid	Valid when bit 6 = "1" 0 : Odd parity 1 : Even parity	○	○
PRYE	Parity enable bit	Invalid	0 : Parity disabled 1 : Parity enabled	○	○
SLEP	Sleep select bit	Set to "0"	0 : Sleep mode deselected 1 : Sleep mode selected	○	○

Note 1: Select CLK output by the corresponding function select registers A, B and C.
Note 2: Set the corresponding function select register A to the I/O port.

UARTi transmit/receive mode register

b7 b6 b5 b4 b3 b2 b1 b0

Symbol: UiMR (i=2 to 4) | Address: 0338₁₆, 0328₁₆, 02F8₁₆ | When reset: 00₁₆

Bit symbol	Bit name	Function (During clock synchronous serial I/O mode)	Function (During UART mode)	R	W
SMD0	Serial I/O mode select bit	Must be fixed to 001	b2 b1 b0 1 0 0 : Transfer data 7 bits long 1 0 1 : Transfer data 8 bits long 1 1 0 : Transfer data 9 bits long 0 0 0 : Serial I/O invalid 0 1 0 : Must not be set 0 1 1 : Must not be set 1 1 1 : Must not be set	○	○
SMD1		b2 b1 b0 0 0 0 : Serial I/O invalid 0 1 0 : (Note) 0 1 1 : Must not be set 1 1 1 : Must not be set		○	○
SMD2				○	○
CKDIR	Internal/external clock select bit	0 : Internal clock (Note 2) 1 : External clock (Note 3)	0 : Internal clock 1 : External clock (Note 3)	○	○
STPS	Stop bit length select bit	Invalid	0 : One stop bit 1 : Two stop bits	○	○
PRY	Odd/even parity select bit	Invalid	Valid when bit 6 = "1" 0 : Odd parity 1 : Even parity	○	○
PRYE	Parity enable bit	Invalid	0 : Parity disabled 1 : Parity enabled	○	○
IOPOL	TxD, RxD I/O polarity reverse bit	0 : No reverse 1 : Reverse Usually set to "0"	0 : No reverse 1 : Reverse Usually set to "0"	○	○

Note 1: Bit 2 to bit 0 are set to "010₂" when I^2C mode is used.
Note 2: Select CLK output by the corresponding function select registers A, B and C.
Note 3: Set the corresponding function select register A to the I/O port.

Figure 16.6 Serial I/O-related registers (2)

UARTi transmit/receive control register 0

b7 b6 b5 b4 b3 b2 b1 b0

Symbol	Address	When reset
UiC0(i=0,1)	0364$_{16}$, 036C$_{16}$	08$_{16}$

Bit symbol	Bit name	Function (During clock synchronous serial I/O mode)	Function (During UART mode)	R	W
CLK0	BRG count source select bit	b1 b0 0 0 : f_1 is selected 0 1 : f_8 is selected 1 0 : f_{32} is selected 1 1 : Must not be set	b1 b0 0 0 : f_1 is selected 0 1 : f_8 is selected 1 0 : f_{32} is selected 1 1 : Must not be set	○	○
CLK1				○	○
CRS	$\overline{CTS}$/$\overline{RTS}$ function select bit	Valid when bit 4 = “0” 0 : $\overline{CTS}$ function is selected (Note 1) 1 : $\overline{RTS}$ function is selected (Note 2)	Valid when bit 4 = “0” 0 : $\overline{CTS}$ function is selected (Note 1) 1 : $\overline{RTS}$ function is selected (Note 2)	○	○
TXEPT	Transmit register empty flag	0 : Data present in transmit register (during transmission) 1 : No data present in transmit register (transmission completed)	0 : Data present in transmit register (during transmission) 1 : No data present in transmit register (transmission completed)	○	×
CRD	$\overline{CTS}$/$\overline{RTS}$ disable bit	0 : $\overline{CTS}$/$\overline{RTS}$ function enabled 1 : $\overline{CTS}$/$\overline{RTS}$ function disabled	0 : $\overline{CTS}$/$\overline{RTS}$ function enabled 1 : $\overline{CTS}$/$\overline{RTS}$ function disabled	○	○
NCH	Data output select bit	0 : TXDi pin is CMOS output 1 : TXDi pin is N-channel open drain output	0: TXDi pin is CMOS output 1: TXDi pin is N-channel open drain output	○	○
CKPOL	CLK polarity select bit	0 : Transmit data is output at falling edge of transfer clock and receive data is input at rising edge 1 : Transmit data is output at rising edge of transfer clock and receive data is input at falling edge	Set to “0”	○	○
UFORM	Transfer format select bit	0 : LSB first 1 : MSB first	Set to “0”	○	○

Note 1: Set the corresponding function select register A to I/O port, and port direction register to “0”.
Note 2: Select $\overline{RTS}$ output using the corresponding function select registers A and B.

UART2 transmit/receive control register 0

b7 b6 b5 b4 b3 b2 b1 b0

Symbol	Address	When reset
U2C0	033C$_{16}$	08$_{16}$

Bit symbol	Bit name	Function (During clock synchronous serial I/O mode)	Function (During UART mode)	R	W
CLK0	BRG count source select bit	b1 b0 0 0 : f_1 is selected 0 1 : f_8 is selected 1 0 : f_{32} is selected 1 1 : Must not be set	b1 b0 0 0 : f_1 is selected 0 1 : f_8 is selected 1 0 : f_{32} is selected 1 1 : Must not be set	○	○
CLK1				○	○
CRS	$\overline{CTS}$/$\overline{RTS}$ function select bit	Valid when bit 4 = “0” 0 : $\overline{CTS}$ function is selected (Note 1) 1 : $\overline{RTS}$ function is selected (Note 2)	Valid when bit 4 = “0” 0 : $\overline{CTS}$ function is selected (Note 1) 1 : $\overline{RTS}$ function is selected (Note 2)	○	○
TXEPT	Transmit register empty flag	0 : Data present in transmit register (during transmission) 1 : No data present in transmit register (transmission completed)	0 : Data present in transmit register (during transmission) 1 : No data present in transmit register (transmission completed)	○	×
CRD	$\overline{CTS}$/$\overline{RTS}$ disable bit	0 : $\overline{CTS}$/$\overline{RTS}$ function enabled 1 : $\overline{CTS}$/$\overline{RTS}$ function disabled	0 : $\overline{CTS}$/$\overline{RTS}$ function enabled 1 : $\overline{CTS}$/$\overline{RTS}$ function disabled	○	○
Nothing is assigned. When write, set “0”. When read, the value of this bit is “0”.				–	–
CKPOL	CLK polarity select bit	0 : Transmit data is output at falling edge of transfer clock and receive data is input at rising edge 1 : Transmit data is output at rising edge of transfer clock and receive data is input at falling edge	Set to “0”	○	○
UFORM	Transfer format select bit (Note 3)	0 : LSB first 1 : MSB first	0 : LSB first 1 : MSB first	○	○

Note 1: Set the corresponding function select register A to I/O port, and port direction register to “0”.
Note 2: Select $\overline{RTS}$ output using the corresponding function select registers A and B.
Note 3: Only clock synchronous serial I/O mode and 8-bit UART mode are valid.

Figure 16.7 Serial I/O-related registers (3)

UARTi transmit/receive control register 0

b7	b6	b5	b4	b3	b2	b1	b0

Symbol	Address	When reset
UiC0(i=3,4)	032C16, 02FC16	0816

Bit symbol	Bit name	Function (During clock synchronous serial I/O mode)	Function (During UART mode)	R	W
CLK0	BRG count source select bit	b1 b0 0 0 : f1 is selected 0 1 : f8 is selected 1 0 : f32 is selected 1 1 : Must not be set	b1 b0 0 0 : f1 is selected 0 1 : f8 is selected 1 0 : f32 is selected 1 1 : Must not be set	○	○
CLK1				○	○
CRS	$\overline{\text{CTS}}$/$\overline{\text{RTS}}$ function select bit	Valid when bit 4 = "0" 0 : $\overline{\text{CTS}}$ function is selected (Note 1) 1 : $\overline{\text{RTS}}$ function is selected (Note 2)	Valid when bit 4 = "0" 0 : $\overline{\text{CTS}}$ function is selected (Note 1) 1 : $\overline{\text{RTS}}$ function is selected (Note 2)	○	○
TXEPT	Transmit register empty flag	0 : Data present in transmit register (during transmission) 1 : No data present in transmit register (transmission completed)	0 : Data present in transmit register (during transmission) 1 : No data present in transmit register (transmission completed)	○	×
CRD	$\overline{\text{CTS}}$/$\overline{\text{RTS}}$ disable bit	0 : $\overline{\text{CTS}}$/$\overline{\text{RTS}}$ function enabled 1 : $\overline{\text{CTS}}$/$\overline{\text{RTS}}$ function disabled	0 : $\overline{\text{CTS}}$/$\overline{\text{RTS}}$ function enabled 1 : $\overline{\text{CTS}}$/$\overline{\text{RTS}}$ function disabled	○	○
NCH	Data output select bit	0 : TXDi pin is CMOS output 1 : TXDi pin is N-channel open drain output	0: TXDi pin is CMOS output 1: TXDi pin is N-channel open drain output	○	○
CKPOL	CLK polarity select bit	0 : Transmit data is output at falling edge of transfer clock and receive data is input at rising edge 1 : Transmit data is output at rising edge of transfer clock and receive data is input at falling edge	Set to "0"	○	○
UFORM	Transfer format select bit (Note 3)	0 : LSB first 1 : MSB first	0 : LSB first 1 : MSB first	○	○

Note 1: Set the corresponding function select register A to I/O port, and port direction register to "0".
Note 2: Select $\overline{\text{RTS}}$ output using the corresponding function select registers A and B.
Note 3: Valid only in clock syncronous serial I/O mode and 8 bits UART mode.

Figure 16.8 Serial I/O-related registers (4)

UARTi transmit/receive control register 1



Symbol: UiC1(i=0,1) Address: 0365₁₆,036D₁₆ When reset: 02₁₆

Bit symbol	Bit name	Function (During clock synchronous serial I/O mode)	Function (During UART mode)	R	W
TE	Transmit enable bit	0 : Transmission disabled 1 : Transmission enabled	0 : Transmission disabled 1 : Transmission enabled	O	O
TI	Transmit buffer empty flag	0 : Data present in transmit buffer register 1 : No data present in transmit buffer register	0 : Data present in transmit buffer register 1 : No data present in transmit buffer register	O	X
RE	Receive enable bit	0 : Reception disabled 1 : Reception enabled	0 : Reception disabled 1 : Reception enabled	O	O
RI	Receive complete flag	0 : No data present in receive buffer register 1 : Data present in receive buffer register	0 : No data present in receive buffer register 1 : Data present in receive buffer register	O	X
Nothing is assigned. When write, set "0". When read, the value of these bits is “0”.				–	–

UARTi transmit/receive control register 1



Symbol: UiC1 (i=2 to 4) Address: 033D₁₆, 032D₁₆, 02FD₁₆ When reset: 02₁₆

Bit symbol	Bit name	Function (During clock synchronous serial I/O mode)	Function (During UART mode)	R	W
TE	Transmit enable bit	0 : Transmission disabled 1 : Transmission enabled	0 : Transmission disabled 1 : Transmission enabled	O	O
TI	Transmit buffer empty flag	0 : Data present in transmit buffer register 1 : No data present in transmit buffer register	0 : Data present in transmit buffer register 1 : No data present in transmit buffer register	O	X
RE	Receive enable bit	0 : Reception disabled 1 : Reception enabled	0 : Reception disabled 1 : Reception enabled	O	O
RI	Receive complete flag	0 : No data present in receive buffer register 1 : Data present in receive buffer register	0 : No data present in receive buffer register 1 : Data present in receive buffer register	O	X
UiIRS	UARTi transmit interrupt cause select bit	0 : Transmit buffer empty (TI = 1) 1 : Transmit is completed (TXEPT = 1)	0 : Transmit buffer empty (TI = 1) 1 : Transmit is completed (TXEPT = 1)	O	O
UiRRM	UARTi continuous receive mode enable bit	0 : Continuous receive mode disabled 1 : Continuous receive mode enabled	Set to “0”	O	O
UiLCH	Data logic select bit	0 : No reverse 1 : Reverse	0 : No reverse 1 : Reverse	O	O
UiERE	Error signal output enable bit	Set to “0”	0 : Output disabled 1 : Output enabled	O	O

Figure 16.9 Serial I/O-related registers (5)

UART transmit/receive control register 2



Symbol: UCON | Address: 0370₁₆ | When reset: X0XX0000₂

Bit symbol	Bit name	Function (During clock synchronous serial I/O mode)	Function (During UART mode)	R	W
U0IRS	UART0 transmit interrupt cause select bit	0 : Transmit buffer empty (TI = 1) 1 : Transmission completed (TXEPT = 1)	0 : Transmit buffer empty (TI = 1) 1 : Transmission completed (TXEPT = 1)	○	○
U1IRS	UART1 transmit interrupt cause select bit	0 : Transmit buffer empty (TI = 1) 1 : Transmission completed (TXEPT = 1)	0 : Transmit buffer empty (TI = 1) 1 : Transmission completed (TXEPT = 1)	○	○
U0RRM	UART0 continuous receive mode enable bit	0 : Continuous receive mode disabled 1 : Continuous receive mode enable	Set to “0”	○	○
U1RRM	UART1 continuous receive mode enable bit	0 : Continuous receive mode disabled 1 : Continuous receive mode enabled	Set to “0”	○	○
Nothing is assigned. When write, set "0". When read, its content is indeterminate.				—	—
RCSP	Separate $\overline{\text{CTS}}/\overline{\text{RTS}}$ bit	0 : $\overline{\text{CTS}}/\overline{\text{RTS}}$ shared pin 1 : $\overline{\text{CTS}}/\overline{\text{RTS}}$ separated	0 : $\overline{\text{CTS}}/\overline{\text{RTS}}$ shared pin 1 : CTS/RTS separated	○	○
Nothing is assigned. When write, set "0". When read, its content is indeterminate.				—	—

UARTi special mode register



Symbol: UiSMR (i=2 to 4) | Address: 033716, 032716, 02F716 | When reset: 00₁₆

Bit symbol	Bit name	Function (During clock synchronous serial I/O mode)	Function (During UART mode)	R	W
IICM	IIC mode select bit	0 : Normal mode 1 : IIC mode	Set to “0”	○	○
ABC	Arbitration lost detecting flag control bit	0 : Update per bit 1 : Update per byte	Set to “0”	○	○
BBS	Bus busy flag	0 : STOP condition detected 1 : START condition detected	Set to “0”	○ (Note1)	○
LSYN	SCLL sync output enable bit	0 : Disabled 1 : Enabled	Set to “0”	○	○
ABSCS	Bus collision detect sampling clock select bit	Set to “0”	0 : Rising edge of transfer clock 1 : Underflow signal of timer Ai (Note 2)	○	○
ACSE	Auto clear function select bit of transmit enable bit	Set to “0”	0 : No auto clear function 1 : Auto clear at occurrence of bus collision	○	○
SSS	Transmit start condition select bit	Set to “0”	0 : Ordinary 1 : Falling edge of RxDi	○	○
Nothing is assigned. When write, set "0". When read, its content is indeterminate.				—	—

Note 1: Nothing but "0" may be written.
Note 2: UART2 : timer A0 underflow signal, UART3 : timer A3 underflow signal, UART4 : timer A4 underflow signal.

Figure 16.10 Serial I/O-related registers (6)

UARTi special mode register 2

b7	b6	b5	b4	b3	b2	b1	b0

Symbol: UiSMR2 (i=2 to 4)
Address: 0336$_{16}$, 0326$_{16}$, 02F6$_{16}$
When reset: 00$_{16}$

Bit symbol	Bit name	Function	R	W
IICM2	IIC mode select bit 2	0 : NACK/ACK interrupt DMA source - ACK Transfer to receive buffer at the rising edge of last bit of receive clock Receive interrupt is occurred at the rising edge of last bit of receive clock 1 : UART transfer/receive interrupt DMA source - UART receive Transfer to receive buffer at the falling edge of last bit of receive clock Receive interrupt is occurred at the falling edge of last bit of receive clock	○	○
CSC	Clock synchronous bit	0 : Disabled 1 : Enabled	○	○
SWC	SCL wait output bit	0 : Disabled 1 : Enabled	○	○
ALS	SDA output stop flag	0 : Disabled 1 : Enabled	○	○
STC	UARTi initialize bit	0 : Disabled 1 : Enabled	○	○
SWC2	SCL wait output bit 2	0 : UARTi clock 1 : 0 output	○	○
SDHI	SDA output inhibit bit	0 : Enabled 1 : Disabled (high impedance)	○	○
SHTC	Start/stop condition control bit	Must set to "1" in selecting IIC mode.	○	○

Figure 16.11 Serial I/O-related registers (7)

UART2 special mode register 3



Symbol	Address	When reset
U2SMR3	033516	$000XXXXX_2$

Bit symbol	Bit name	Function	R	W
	Nothing is assigned. These bits can neither be set nor reset. When read, their contents are indeterminate.		—	—
DL0	$SDA_2(TxD_2)$ digital delay time set bit (Note 1,2)	b7 b6 b5 000:Without delay 001:1 to 2 cycles of 1/f(X_{IN}) 010:2 to 3 cycles of 1/f(X_{IN}) 011:3 to 4 cycles of 1/f(X_{IN}) 100:4 to 5 cycles of 1/f(X_{IN}) 101:5 to 6 cycles of 1/f(X_{IN}) 110:6 to 7 cycles of 1/f(X_{IN}) 111:7 to 8 cycles of 1/f(X_{IN})	○	○
DL1			○	○
DL2			○	○

Note 1: These bits are used for $SDA_2(TxD_2)$ output digital delay when using UART2 for IIC interface. Otherwise, must set to "000".
Note 2: When external clock is selected, delay is increased approx. 100ns.

UARTi special mode register 3 (i=3,4)



Symbol	Address	When reset
U3SMR3	032516	00000000_2
U4SMR3	$02F516$	00000000_2

Bit symbol	Bit name	Function	R	W
SSE	$\overline{SS}$ port function enable bit (Note 3)	0: $\overline{SS}$ function disable 1: $\overline{SS}$ function enable	○	○
CKPH	Clock phase set bit	0: Without clock delay 1: With clock delay	○	○
DINC	Serial input port set bit	0: Select TxDi and RxDi (master mode) (Note 5) 1: Select STxDi and SRxDi (slave mode) (Note 6)	○	○
NODC	Clock output select bit	0: CLKi is CMOS output 1: CLKi is N-channel open drain output	○	○
ERR	Fault error flag	0: Without fault error 1: With fault error	○	○ (Note 4)
DL0	$SDAi(TxD_2)$ digital delay time set bit (Note 1,2)	b7 b6 b5 000 :Without delay 001 :1 to 2 cycles of 1/f(X_{IN}) 010 :2 to 3 cycles of 1/f(X_{IN}) 011 :3 to 4 cycles of 1/f(X_{IN}) 100 :4 to 5 cycles of 1/f(X_{IN}) 101 :5 to 6 cycles of 1/f(X_{IN}) 110 :6 to 7 cycles of 1/f(X_{IN}) 111 :7 to 8 cycles of 1/f(X_{IN})	○	○
DL1			○	○
DL2			○	○

Note 1: These bits are used for SDAi(TxDi) output digital delay when using UARTi for IIC interface. Otherwise, must set to "000".
Note 2: When external clock is selected, delay is increased approx. 100ns.
Note 3: Set $\overline{SS}$ function after setting $\overline{CTS}/\overline{RTS}$ disable bit (bit 4 of UARTi transfer/receive control register 0) to "1".
Note 4: Nothing but "0" may be written.
Note 5: Set CLKi and TxDi both for output using the CLKi and TxDi function select register A. Set the RxDi function select register A for input/output port and the port direction register to "0".
Note 6: Set STxDi for output using the STxDi function select registers A and B. Set the CLKi and SRxDi function select register A for input/output port and the port direction register to "0".

Figure 16.12 Serial I/O-related registers (8)

17. Clock synchronous serial I/O mode

The clock synchronous serial I/O mode uses a transfer clock to transmit and receive data. Tables 17.1 and 17.2 list the specifications of the clock synchronous serial I/O mode. Figure 17.1 shows the UARTi transmit/receive mode register.

Table 17.1 Specifications of clock synchronous serial I/O mode (1)

Item	Specification
Transfer data format	• Transfer data length: 8 bits
Transfer clock	• When internal clock is selected (bit 3 at addresses 0360_{16}, 0368_{16}, 0338_{16}, 0328_{16}, $02F8_{16}$ = "0") : fi/ 2(n+1) (Note) fi = f1, f8, f32 – CLK is selected by the corresponding port function select register, peripheral function select register and peripheral subfunction select register. • When external clock is selected (bit 3 at addresses 0360_{16}, 0368_{16}, 0338_{16} , 0328_{16}, $02F8_{16}$= "1") : Input from CLKi pin – Set the corresponding function select register A to I/O port
Transmission/reception control	• $\overline{CTS}$ function/$\overline{RTS}$ function/$\overline{CTS}$, $\overline{RTS}$ function chosen to be invalid
Transmission start condition	• To start transmission, the following requirements must be met: – Transmit enable bit (bit 0 at addresses 0365_{16}, $036D_{16}$, $033D_{16}$, $032D_{16}$, $02FD_{16}$) = "1" – Transmit buffer empty flag (bit 1 at addresses 0365_{16}, $036D_{16}$, $033D_{16}$, $032D_{16}$, $02FD_{16}$) = "0" – When $\overline{CTS}$ function selected, $\overline{CTS}$ input level = "L" – TxD output selected by the corresponding function select register A, B and C. • Furthermore, if external clock is selected, the following requirements must also be met: – CLKi polarity select bit (bit 6 at addresses 0364_{16}, $036C_{16}$, $033C_{16}$, $032C_{16}$, $02FC_{16}$) = "0": CLKi input level = "H" – CLKi polarity select bit (bit 6 at addresses 0364_{16}, $036C_{16}$, $033C_{16}$, $032C_{16}$, $02FC_{16}$) = "1": CLKi input level = "L"
Reception start condition	• To start reception, the following requirements must be met: – Receive enable bit (bit 2 at addresses 0365_{16}, $036D_{16}$, $033D_{16}$, $032D_{16}$, $02FD_{16}$) = "1" – Transmit enable bit (bit 0 at addresses 0365_{16}, $036D_{16}$, $033D_{16}$, $032D_{16}$, $02FD_{16}$) = "1" – Transmit buffer empty flag (bit 1 at addresses 0365_{16}, $036D_{16}$, $033D_{16}$, $032D_{16}$, $02FD_{16}$) = "0" • Furthermore, if external clock is selected, the following requirements must also be met: – CLKi polarity select bit (bit 6 at addresses 0364_{16}, $036C_{16}$, $033C_{16}$, $032C_{16}$, $02FC_{16}$) = "0": CLKi input level = "H" – CLKi polarity select bit (bit 6 at addresses 0364_{16}, $036C_{16}$, $033C_{16}$, $032C_{16}$, $02FC_{16}$) = "1": CLKi input level = "L"
Interrupt request generation timing	• When transmitting – Transmit interrupt cause select bit (bits 0, 1 at address 0370_{16}, bit 4 at address $033D_{16}$, $032D_{16}$, $02FD_{16}$) = "0": Interrupts requested when data transfer from UARTi transfer buffer register to UARTi transmit register is completed – Transmit interrupt cause select bit (bits 0, 1 at address 0370_{16}, bit 4 at address $033D_{16}$, $032D_{16}$, $02FD_{16}$) = "1": Interrupts requested when data transmission from UARTi transfer register is completed • When receiving – Interrupts requested when data transfer from UARTi receive register to UARTi receive buffer register is completed

Note : "n" denotes the value 00_{16} to FF_{16} that is set to the UART bit rate generator.

Table 17.2 Specifications of clock synchronous serial I/O mode (2)

Item	Specification
Error detection	• Overrun error (Note 1) This error occurs when the next data is ready before contents of UARTi receive buffer register are read out
Select function	• CLK polarity selection Whether transmit data is output/input at the rising edge or falling edge of the transfer clock can be selected • LSB first/MSB first selection Whether transmission/reception begins with bit 0 or bit 7 can be selected • Continuous receive mode selection Reception is enabled simultaneously by a read from the receive buffer register • Transfer clock output from multiple pins selection (UART1) (Note 2) UART1 transfer clock can be chosen by software to be output from one of the two pins set • Separate $\overline{CTS}$/$\overline{RTS}$ pins (UART0) (Note 2) UART0 $\overline{CTS}$ and $\overline{RTS}$ pins each can be assigned to separate pins • Switching serial data logic (UART2 to UART4) Whether to reverse data in writing to the transmission buffer register or reading the reception buffer register can be selected. • TxD, RxD I/O polarity reverse (UART2 to UART4) This function is reversing TxD port output and RxD port input. All I/O data level is reversed.

Note 1: If an overrun error occurs, the UARTi receive buffer will have the next data written in. Note also that the UARTi receive interrupt request bit will not change.

Note 2: The transfer clock output from multiple pins and the separate $\overline{CTS}$/$\overline{RTS}$ pins functions cannot be selected simultaneously.

UARTi transmit/receive mode registers

b7	b6	b5	b4	b3	b2	b1	b0
0					0	0	1

Symbol: UiMR(i=0,1) — Address: 0360_{16}, 0368_{16} — When reset: 00_{16}

Bit symbol	Bit name	Function	R	W
SMD0	Serial I/O mode select bit	b2 b1 b0 0 0 1 : Clock synchronous serial I/O mode	○	○
SMD1			○	○
SMD2			○	○
CKDIR	Internal/external clock select bit	0 : Internal clock (Note 1) 1 : External clock (Note 2)	○	○
STPS	Invalid in clock synchronous serial I/O mode		○	○
PRY			○	○
PRYE			○	○
SLEP	0 (Set to “0” in clock synchronous serial I/O mode)		○	○

Note 1: Select CLK output by the corresponding function select registers A, B and C.
Note 2: Set the corresponding function select register A to the I/O port.

UART2 transmit/receive mode register

b7	b6	b5	b4	b3	b2	b1	b0
0					0	0	1

Symbol: UiMR (i=2 to 4) — Address: 0338_{16}, 0328_{16}, $02F8_{16}$ — When reset: 00_{16}

Bit symbol	Bit name	Function	R	W
SMD0	Serial I/O mode select bit	b2 b1 b0 0 0 1 : Clock synchronous serial I/O mode	○	○
SMD1			○	○
SMD2			○	○
CKDIR	Internal/external clock select bit	0 : Internal clock (Note 2) 1 : External clock (Note 3)	○	○
STPS	Invalid in clock synchronous serial I/O mode		○	○
PRY			○	○
PRYE			○	○
IOPOL	TxD, RxD I/O polarity reverse bit (Note 1)	0 : No reverse 1 : Reverse	○	○

Note 1: Usually set to “0”.
Note 2: Select CLK output by the corresponding function select registers A, B and C.
Note 3: Set the corresponding function select register A to the I/O port.

Figure 17.1 UARTi transmit/receive mode register in clock synchronous serial I/O mode

Table 17.3 lists the functions of the input/output pins during clock synchronous serial I/O mode. This table shows the pin functions when the transfer clock output from multiple pins and the separate $\overline{CTS}$/$\overline{RTS}$ pins functions are not selected. Note that for a period from when the UARTi operation mode is selected to when transfer starts, the TxDi pin outputs a "H". (If the N-channel open drain is selected, this pin is in floating state.)

Table 17.3 Input/output pin functions in clock synchronous serial I/O mode

Pin name	Function	Method of selection
TxDi ($P6_3$, $P6_7$, $P7_0$, $P9_2$, $P9_6$)	Serial data output (Note 1)	(Outputs dummy data when performing reception only)
RxDi ($P6_2$, $P6_6$, $P7_1$, $P9_1$, $P9_7$)	Serial data input (Note 2)	Port $P6_2$, $P6_6$, $P7_1$, $P9_1$ and $P9_7$ direction register (bits 2 and 6 at address $03C2_{16}$, bit 1 at address $03C3_{16}$, bit 1 and 7 at address $03C7_{16}$)= "0" (Can be used as an input port when performing transmission only)
CLKi ($P6_1$, $P6_5$, $P7_2$, $P9_0$, $P9_5$)	Transfer clock output (Note 1)	Internal/external clock select bit (bit 3 at addresses 0360_{16}, 0368_{16}, 0338_{16}, 0328_{16}, $02F8_{16}$) = "0"
	Transfer clock input (Note 2)	Internal/external clock select bit (bit 3 at addresses 0360_{16}, 0368_{16}, 0338_{16}, 0328_{16}, $02F8_{16}$) = "1" Port $P6_1$, $P6_5$, $P7_2$, $P9_0$ and $P9_5$ direction register (bits 1 and 5 at address $03C2_{16}$, bit 2 at address $03C3_{16}$, bit 0 and 5 at address $03C7_{16}$) = "0"
$\overline{CTS}$i/$\overline{RTS}$i ($P6_0$, $P6_4$, $P7_3$, $P9_3$, $P9_4$)	$\overline{CTS}$ input (Note 2)	$\overline{CTS}$/$\overline{RTS}$ disable bit (bit 4 at addresses 0364_{16}, $036C_{16}$, $033C_{16}$, $032C_{16}$, $02FC_{16}$) ="0" $\overline{CTS}$/$\overline{RTS}$ function select bit (bit 2 at addresses 0364_{16}, $036C_{16}$, $033C_{16}$, $032C_{16}$, $02FC_{16}$) = "0" Port $P6_0$, $P6_4$, $P7_3$, $P9_3$ and $P9_4$ direction register (bits 0 and 4 at address $03C2_{16}$, bit 3 at address $03C3_{16}$, bits 3 and 4 at address $03C7_{16}$) = "0"
	$\overline{RTS}$ output (Note 1)	$\overline{CTS}$/$\overline{RTS}$ disable bit (bit 4 at addresses 0364_{16}, $036C_{16}$, $033C_{16}$, $032C_{16}$, $02FC_{16}$) = "0" CTS/RTS function select bit (bit 2 at addresses 0364_{16}, $036C_{16}$, $033C_{16}$, $032C_{16}$, $02FC_{16}$) = "1"
	Programmable I/O port (Note 2)	$\overline{CTS}$/$\overline{RTS}$ disable bit (bit 4 at addresses 0364_{16}, $036C_{16}$, $033C_{16}$, $032C_{16}$, $02FC_{16}$) = "1"

(when transfer clock output from multiple pins and separate $\overline{CTS}$/$\overline{RTS}$ pins functions are not selected)

Note 1: Select TxD output, CLK output and $\overline{RTS}$ output by the corresponding function select registers A, B and C.

Note 2: Select I/O port by the corresponding function select register A.

• Example of transmit timing (when internal clock is selected)

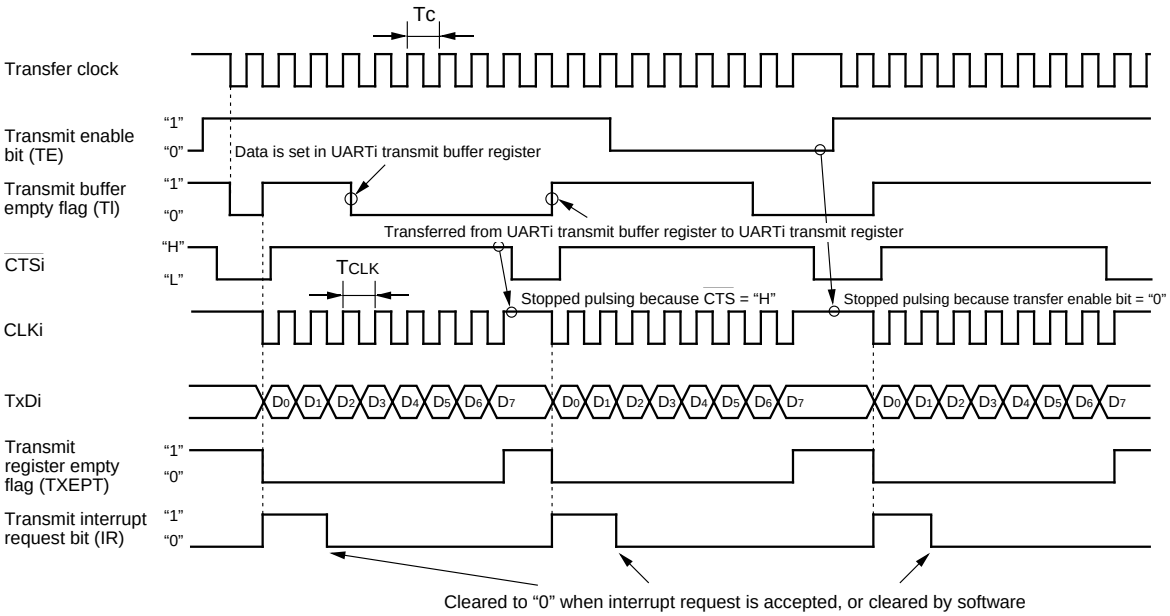

Shown in ( ) are bit symbols.

The above timing applies to the following settings:
- Internal clock is selected.
- CTS function is selected.
- CLK polarity select bit = "0".
- Transmit interrupt cause select bit = "0".

Tc = TCLK = 2(n + 1) / fi
fi: frequency of BRGi count source (f1, f8, f32)
n: value set to BRGi

• Example of receive timing (when external clock is selected)

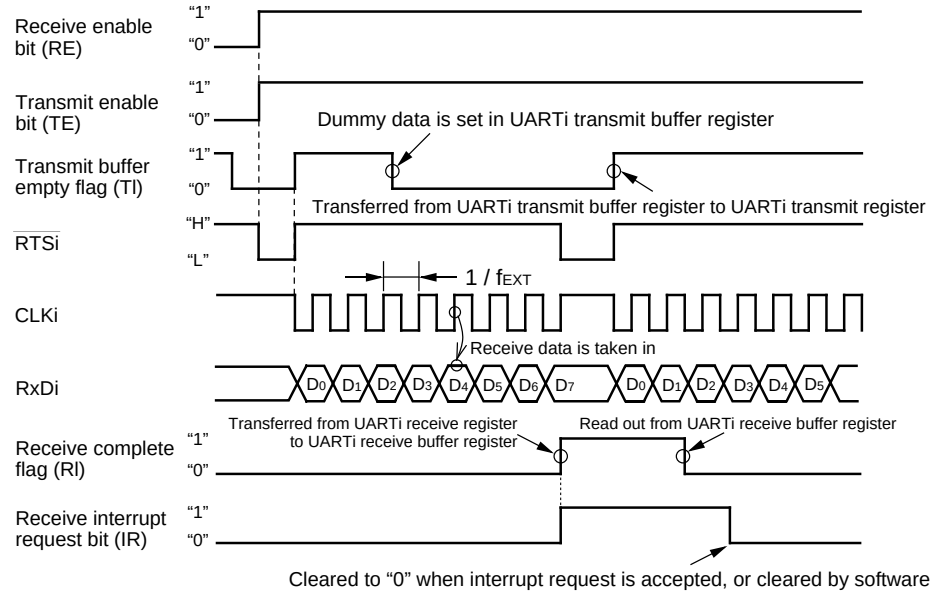

Shown in ( ) are bit symbols.

The above timing applies to the following settings:
- External clock is selected.
- RTS function is selected.
- CLK polarity select bit = "0".

fEXT: frequency of external clock

Meet the following conditions are met when the CLKi input before data reception = "H"
- Transmit enable bit → "1"
- Receive enable bit → "1"
- Dummy data write to UARTi transmit buffer register

Figure 17.2 Typical transmit/receive timings in clock synchronous serial I/O mode

(a) Polarity select function

As shown in Figure 17.3, the CLK polarity select bit (bit 6 at addresses 0364_{16}, $036C_{16}$, $033C_{16}$, $032C_{16}$, $02FC_{16}$) allows selection of the polarity of the transfer clock.

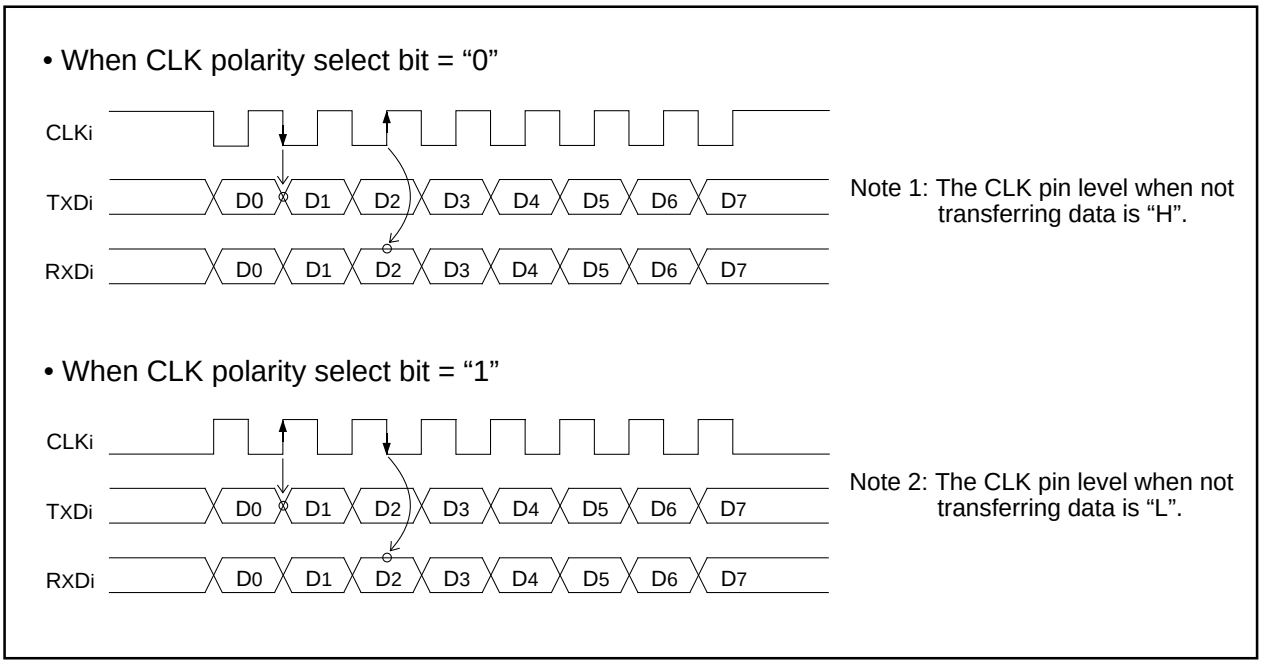

Figure 17.3 Polarity of transfer clock

(b) LSB first/MSB first select function

As shown in Figure 17.4, when the transfer format select bit (bit 7 at addresses 0364_{16}, $036C_{16}$, $033C_{16}$, $032C_{16}$, $02FC_{16}$) = “0”, the transfer format is “LSB first”; when the bit = “1”, the transfer format is “MSB first”.

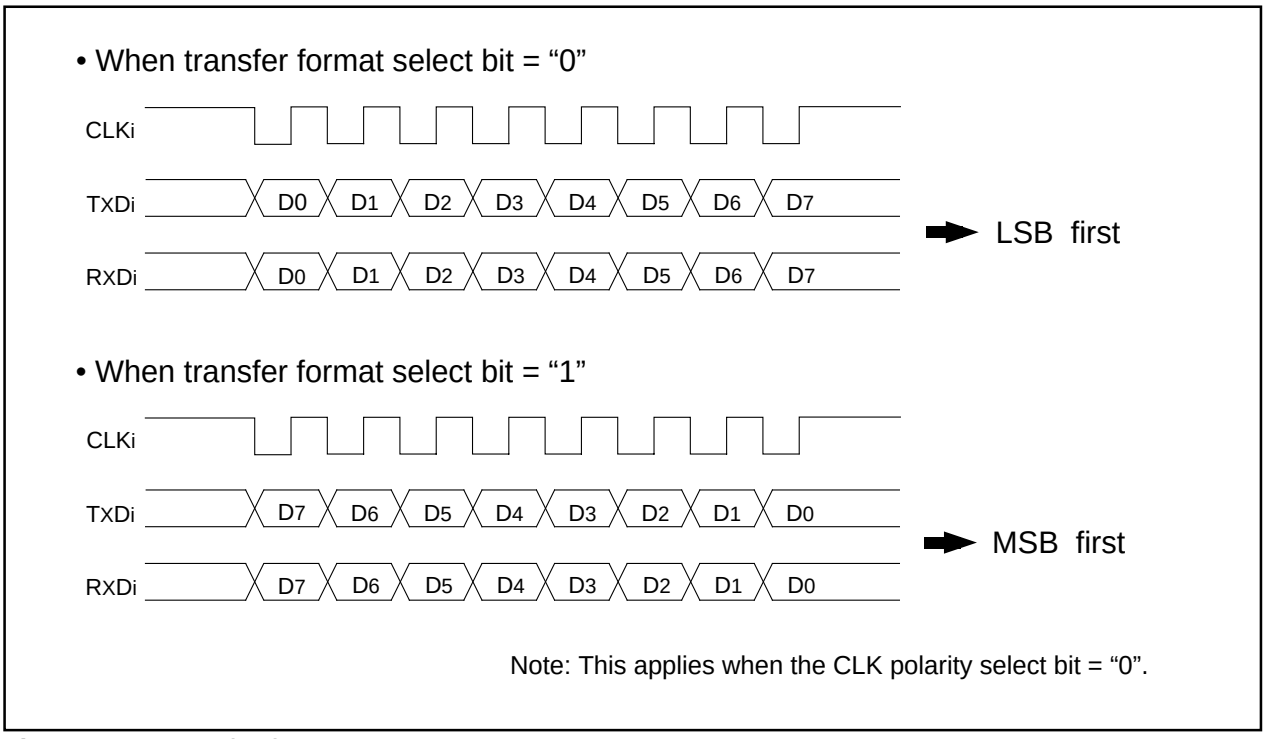

Figure 17.4 Transfer format

(c) Transfer clock output from multiple pins function (UART1)

This function allows the setting two transfer clock output pins and choosing one of the two to output a clock by using the port function select register (bits of related to-P6$_4$ and P6$_5$). (See Figure 17.5) The multiple pins function is valid only when the internal clock is selected for UART1. Note that when this function is selected, UART1 $\overline{CTS}$/$\overline{RTS}$ function cannot be used.

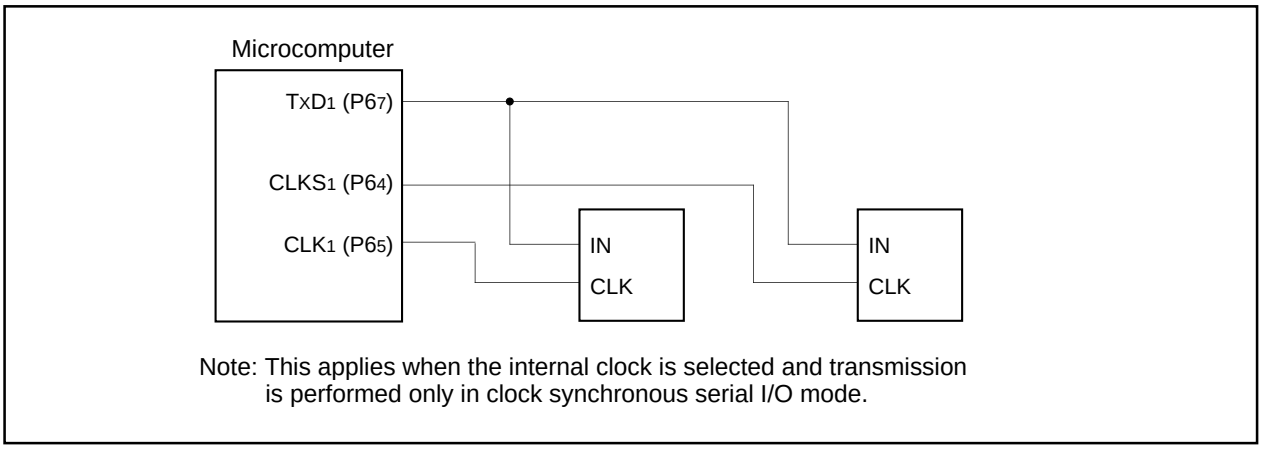

Figure 17.5 The transfer clock output from the multiple pins function usage

(d) Continuous receive mode

If the continuous receive mode enable bit (bits 2 and 3 at address 0370$_{16}$, bit 5 at address 033D$_{16}$, 032D$_{16}$, 02FD$_{16}$) is set to "1", the unit is placed in continuous receive mode. In this mode, when the receive buffer register is read out, the unit simultaneously goes to a receive enable state without having to set dummy data to the transmit buffer register back again.

(e) Separate $\overline{CTS}$/$\overline{RTS}$ pins function (UART0)

This function works the same way as in the clock asynchronous serial I/O (UART) mode. The method of setting and the input/output pin functions are both the same, so refer to select function in the next section, "(2) Clock asynchronous serial I/O (UART) mode." Note that this function is invalid if the transfer clock output from the multiple pins function is selected.

(f) Serial data logic switch function (UART2 to UART4)

When the data logic select bit (bit6 at address 033D$_{16}$, 032D$_{16}$, 02FD$_{16}$) = "1", and writing to transmit buffer register or reading from receive buffer register, data is reversed. Figure 17.6 shows the example of serial data logic switch timing.

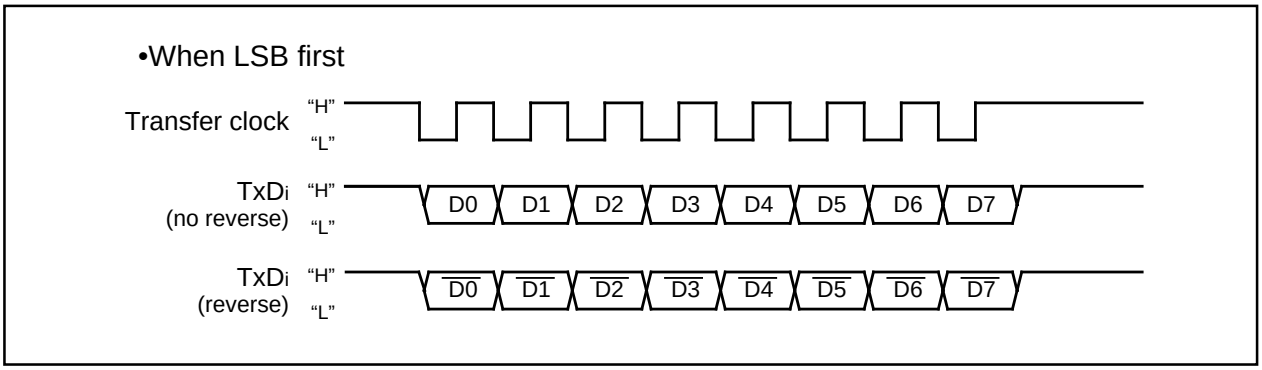

Figure 17.6 Serial data logic switch timing

18. Clock asynchronous serial I/O (UART) mode

The UART mode allows transmitting and receiving data after setting the desired transfer rate and transfer data format. Tables 18.1 and 18.2 list the specifications of the UART mode. Figure 18.1 shows the UARTi transmit/receive mode register.

Table 18.1 Specifications of UART Mode (1)

Item	Specification
Transfer data format	• Character bit (transfer data): 7 bits, 8 bits, or 9 bits as selected • Start bit: 1 bit • Parity bit: Odd, even, or nothing as selected • Stop bit: 1 bit or 2 bits as selected
Transfer clock	• When internal clock is selected (bit 3 at addresses 0360_{16}, 0368_{16}, 0338_{16}, 0328_{16}, $02F8_{16}$ = "0") : fi/16(n+1) (Note 1) fi = f_1, f_8, f_{32} • When external clock is selected (bit 3 at addresses 0360_{16}, 0368_{16}, 0338_{16}, 0328_{16}, $02F8_{16}$ ="1") : f_{EXT}/16(n+1)(Note 1) (Note 2)
Transmission/reception control	• $\overline{CTS}$ function/$\overline{RTS}$ function/$\overline{CTS}$, $\overline{RTS}$ function chosen to be invalid
Transmission start condition	• To start transmission, the following requirements must be met: - Transmit enable bit (bit 0 at addresses 0365_{16}, $036D_{16}$, $033D_{16}$, $032D_{16}$, $02FD_{16}$) = "1" - Transmit buffer empty flag (bit 1 at addresses 0365_{16}, $036D_{16}$, $033D_{16}$, $032D_{16}$, $02FD_{16}$) = "0" - When $\overline{CTS}$ function selected, $\overline{CTS}$ input level = "L" - TxD output is selected by the corresponding function select register A, B and C.
Reception start condition	• To start reception, the following requirements must be met: - Receive enable bit (bit 2 at addresses 0365_{16}, $036D_{16}$, $033D_{16}$, $032D_{16}$, $02FD_{16}$) = "1" - Start bit detection
Interrupt request generation timing	• When transmitting - Transmit interrupt cause select bits (bits 0,1 at address 0370_{16}, bit 4 at address $033D_{16}$, $032D_{16}$, $02FD_{16}$) = "0": Interrupts requested when data transfer from UARTi transfer buffer register to UARTi transmit register is completed - Transmit interrupt cause select bits (bits 0, 1 at address 0370_{16}, bit 4 at address $033D_{16}$, $032D_{16}$, $02FD_{16}$) = "1": Interrupts requested when data transmission from UARTi transfer register is completed • When receiving - Interrupts requested when data transfer from UARTi receive register to UARTi receive buffer register is completed

Note 1: 'n' denotes the value 00_{16} to FF_{16} that is set to the UARTi bit rate generator.

Note 2: f_{EXT} is input from the CLKi pin.

Table 18.2 Specifications of UART Mode (2)

Item	Specification
Error detection	• Overrun error (Note) This error occurs when the next data is ready before contents of UARTi receive buffer register are read out • Framing error This error occurs when the number of stop bits set is not detected • Parity error This error occurs when if parity is enabled, the number of 1's in parity and character bits does not match the number of 1's set • Error sum flag This flag is set (= 1) when any of the overrun, framing, and parity errors is encountered
Select function	• Separate $\overline{\text{CTS}}$/$\overline{\text{RTS}}$ pins (UART0) UART0 $\overline{\text{CTS}}$ and $\overline{\text{RTS}}$ pins each can be assigned to separate pins • Sleep mode selection (UART0, UART1) This mode is used to transfer data to and from one of multiple slave micro-computers • Serial data logic switch (UART2 to UART4) This function is reversing logic value of transferring data. Start bit, parity bit and stop bit are not reversed. • TxD, RxD I/O polarity switch (UART2 to UART4) This function is reversing TxD port output and RxD port input. All I/O data level is reversed.

Note: If an overrun error occurs, the UARTi receive buffer will have the next data written in. Note also that the UARTi receive interrupt request bit will not change.

UARTi transmit / receive mode registers



Symbol: UiMR(i=0,1) — Address: 036016, 036816 — When reset: 0016

Bit symbol	Bit name	Function	R	W
SMD0	Serial I/O mode select bit	b2 b1 b0 1 0 0 : Transfer data 7 bits long 1 0 1 : Transfer data 8 bits long 1 1 0 : Transfer data 9 bits long	○	○
SMD1			○	○
SMD2			○	○
CKDIR	Internal / external clock select bit	0 : Internal clock 1 : External clock (Note)	○	○
STPS	Stop bit length select bit	0 : One stop bit 1 : Two stop bits	○	○
PRY	Odd / even parity select bit	Valid when bit 6 = “1” 0 : Odd parity 1 : Even parity	○	○
PRYE	Parity enable bit	0 : Parity disabled 1 : Parity enabled	○	○
SLEP	Sleep select bit	0 : Sleep mode deselected 1 : Sleep mode selected	○	○

Note: Set the corresponding port function select register A to I/O port.

UARTi transmit / receive mode register



Symbol: UiMR (i=2 to 4) — Address: 033816, 032816, 02F816 — When reset: 0016

Bit symbol	Bit name	Function	R	W
SMD0	Serial I/O mode select bit	b2 b1 b0 1 0 0 : Transfer data 7 bits long 1 0 1 : Transfer data 8 bits long 1 1 0 : Transfer data 9 bits long	○	○
SMD1			○	○
SMD2			○	○
CKDIR	Internal / external clock select bit	0 : Internal clock 1 : External clock (Note 2)	○	○
STPS	Stop bit length select bit	0 : One stop bit 1 : Two stop bits	○	○
PRY	Odd / even parity select bit	Valid when bit 6 = “1” 0 : Odd parity 1 : Even parity	○	○
PRYE	Parity enable bit	0 : Parity disabled 1 : Parity enabled	○	○
IOPOL	TxD, RxD I/O polarity reverse bit (Note 1)	0 : No reverse 1 : Reverse	○	○

Note 1: Usually set to “0”.
Note 2: Set the corresponding port function select register A to I/O port.

Figure 18.1 UARTi transmit/receive mode register in UART mode

Table 18.3 lists the functions of the input/output pins during UART mode. This table shows the pin functions when the separate $\overline{CTS}/\overline{RTS}$ pins function is not selected. Note that for a period from when the UARTi operation mode is selected to when transfer starts, the TxDi pin outputs a "H". (If the N-channel open drain is selected, this pin is in floating state.)

Table 18.3 Input/output pin functions in UART mode

Pin name	Function	Method of selection
TxDi ($P6_3$, $P6_7$, $P7_0$, $P9_2$, $P9_6$)	Serial data output (Note 1)	
RxDi ($P6_2$, $P6_6$, $P7_1$, $P9_1$, $P9_7$)	Serial data input (Note 2)	Port $P6_2$, $P6_6$, $P7_1$, $P9_1$ and $P9_7$ direction register (bits 2 and 6 at address $03C2_{16}$, bit 1 at address $03C3_{16}$, bit 1 and 7 at address $03C7_{16}$)= "0" (Can be used as an input port when performing transmission only)
CLKi ($P6_1$, $P6_5$, $P7_2$, $P9_0$, $P9_5$)	Programmable I/O port (Note 2)	Internal/external clock select bit (bit 3 at addresses 0360_{16}, 0368_{16}, 0338_{16}, 0328_{16}, $02F8_{16}$) = "0"
	Transfer clock input (Note 2)	Internal/external clock select bit (bit 3 at addresses 0360_{16}, 0368_{16}, 0338_{16}, 0328_{16}, $02F8_{16}$) = "1" Port $P6_1$, $P6_5$, $P7_2$, $P9_0$ and $P9_5$ direction register (bits 1 and 5 at address $03C2_{16}$, bit 2 at address $03C3_{16}$, bits 0 and 5 at address $03C7_{16}$) = "0"
$\overline{CTSi}/\overline{RTSi}$ ($P6_0$, $P6_4$, $P7_3$, $P9_3$, $P9_4$)	$\overline{CTS}$ input (Note 2)	$\overline{CTS}/\overline{RTS}$ disable bit (bit 4 at addresses 0364_{16}, $036C_{16}$, $033C_{16}$, $032C_{16}$, $02FC_{16}$) ="0" $\overline{CTS}/\overline{RTS}$ function select bit (bit 2 at addresses 0364_{16}, $036C_{16}$, $033C_{16}$, $032C_{16}$, $02FC_{16}$) = "0" Port $P6_0$, $P6_4$, $P7_3$, $P9_3$ and $P9_4$ direction register (bits 0 and 4 at address $03C2_{16}$, bit 3 at address $03C3_{16}$, bits 3 and 4 at address $03C7_{16}$) = "0"
	$\overline{RTS}$ output (Note 1)	$\overline{CTS}/\overline{RTS}$ disable bit (bit 4 at addresses 0364_{16}, $036C_{16}$, $033C_{16}$, $032C_{16}$, $02FC_{16}$) = "0" $\overline{CTS}/\overline{RTS}$ function select bit (bit 2 at addresses 0364_{16}, $036C_{16}$, $033C_{16}$, $032C_{16}$, $02FC_{16}$) = "1"
	Programmable I/O port (Note 2)	$\overline{CTS}/\overline{RTS}$ disable bit (bit 4 at addresses 0364_{16}, $036C_{16}$, $033C_{16}$, $032C_{16}$, $02FC_{16}$) = "1"

(When separate $\overline{CTS}/\overline{RTS}$ pins function is not selected)

Note 1: Select TxD output, CLK output and $\overline{RTS}$ output by the corresponding function select registers A, B and C.

Note 2: Select I/O port by the corresponding function select register A.

• Example of transmit timing when transfer data is 8 bits long (parity enabled, one stop bit)

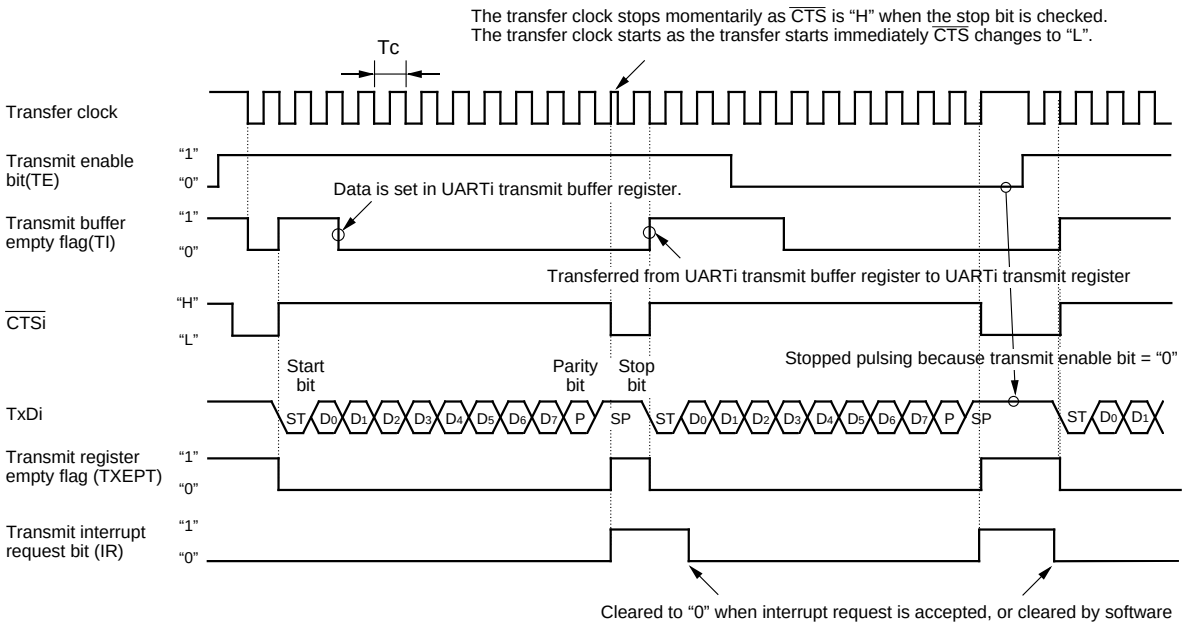

Shown in ( ) are bit symbols.

The above timing applies to the following settings :
- Parity is enabled.
- One stop bit.
- CTS function is selected.
- Transmit interrupt cause select bit = "1".

Tc = 16 (n + 1) / fi or 16 (n + 1) / fEXT
fi : frequency of BRGi count source (f1, f8, f32)
fEXT : frequency of BRGi count source (external clock)
n : value set to BRGi

• Example of transmit timing when transfer data is 9 bits long (parity disabled, two stop bits)

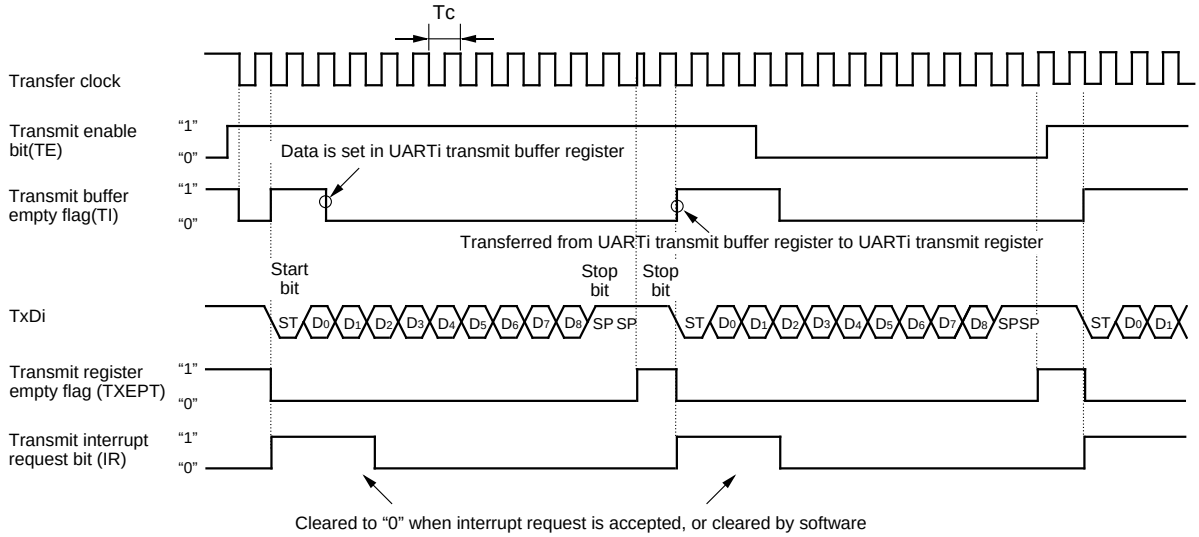

Shown in ( ) are bit symbols.

The above timing applies to the following settings :
- Parity is disabled.
- Two stop bits.
- CTS function is disabled.
- Transmit interrupt cause select bit = "0".

Tc = 16 (n + 1) / fi or 16 (n + 1) / fEXT
fi : frequency of BRGi count source (f1, f8, f32)
fEXT : frequency of BRGi count source (external clock)
n : value set to BRGi

Figure 18.2 Typical transmit timings in UART mode

• Example of receive timing when transfer data is 8 bits long (parity disabled, one stop bit)

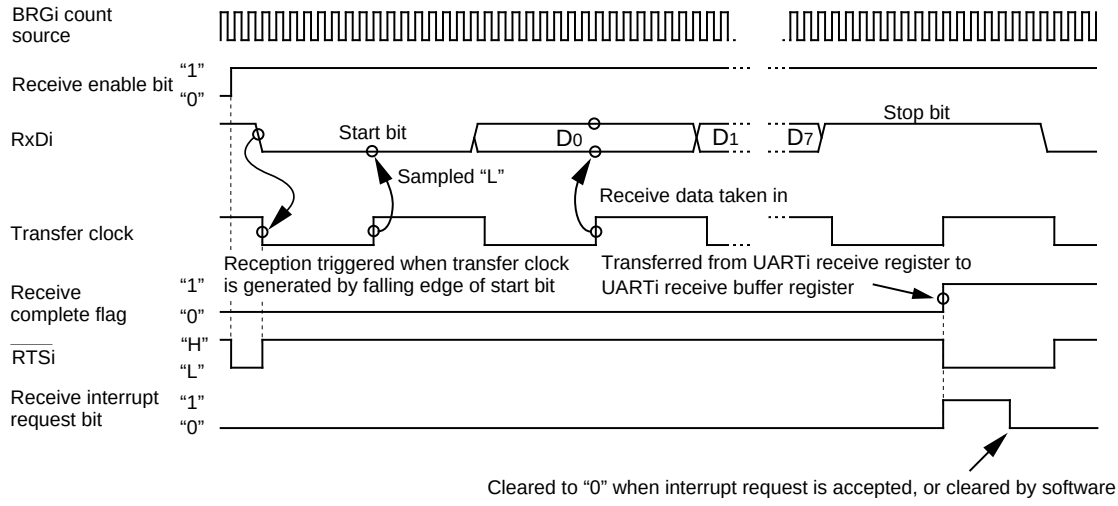

The above timing applies to the following settings :
- Parity is disabled.
- One stop bit.
- RTS function is selected.

Figure 18.3 Typical receive timing in UART mode

(a) Separate $\overline{CTS}/\overline{RTS}$ pins function (UART0)

With the separate $\overline{CTS}/\overline{RTS}$ bit (bit 6 at address 037_{16}) is set to "1", the unit outputs/inputs the $\overline{CTS}$ and $\overline{RTS}$ signals on different pins. (See Figure 18.4) This function is valid only for UART0. Note that if this function is selected, the $\overline{CTS}/\overline{RTS}$ function for UART1 cannot be used.

Set both $\overline{CTS}/\overline{RTS}$ function select bit (bit 2 at address $036C_{16}$) of UART1and $\overline{CTS}/\overline{RTS}$ disable bit (bit 4 at address $036C_{16}$)of UART1 to "0" and set $P6_4$ to input port by the function select register.

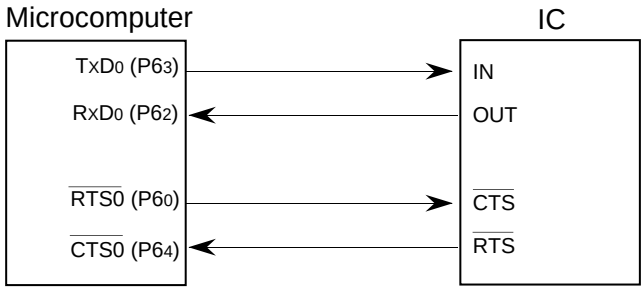

Figure 18.4 The separate $\overline{CTS}/\overline{RTS}$ pins function usage

(b) Sleep mode (UART0, UART1)

This mode is used to transfer data between specific microcomputers among multiple microcomputers connected using UARTi. The sleep mode is selected when the sleep select bit (bit 7 at addresses 0360_{16}, 0368_{16}) is set to "1" during reception. In this mode, the unit performs receive operation when the MSB of the received data = "1" and does not perform receive operation when the MSB = "0".

(c) Function for switching serial data logic (UART2 to UART4)

When the data logic select bit (bit 6 of address 033D16, 032D16, 02FD16) is assigned 1, data is inverted in writing to the transmission buffer register or reading the reception buffer register. Figure 18.5 shows the example of timing for switching serial data logic.

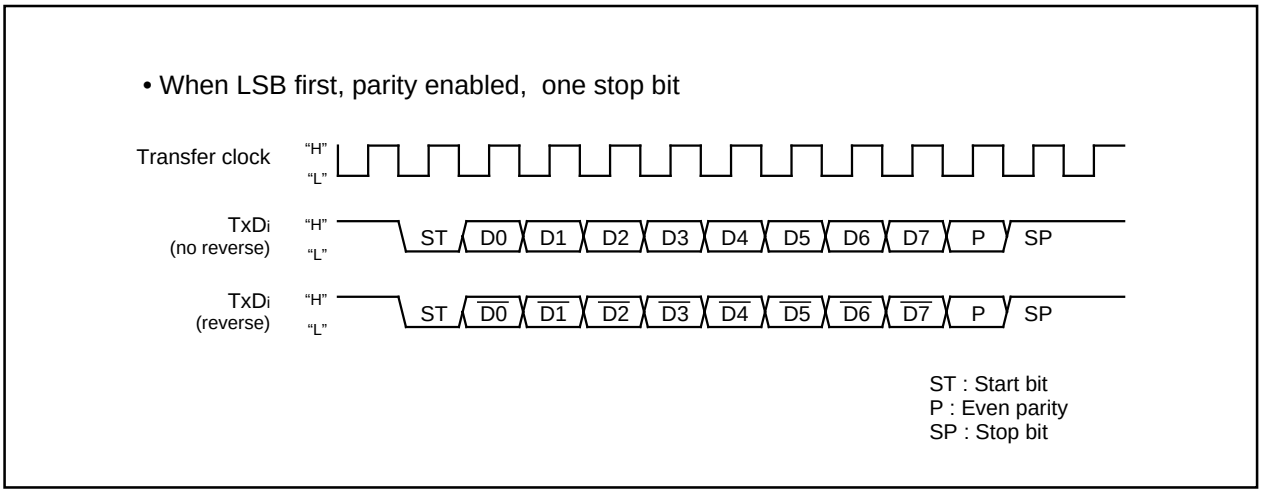

Figure 18.5 Timing for switching serial data logic

(d) TxD, RxD I/O polarity reverse function (UART2 to UART4)

This function is to reverse TxD pin output and RxD pin input. The level of any data to be input or output (including the start bit, stop bit(s), and parity bit) is reversed. Set this function to "0" (not to reverse) for usual use.

(e) Bus collision detection function (UART2 to UART4)

This function is to sample the output level of the TxD pin and the input level of the RxD pin at the rising edge of the transfer clock; if their values are different, then an interrupt request occurs. Figure 18.6 shows the example of detection timing of a buss collision (in UART mode).

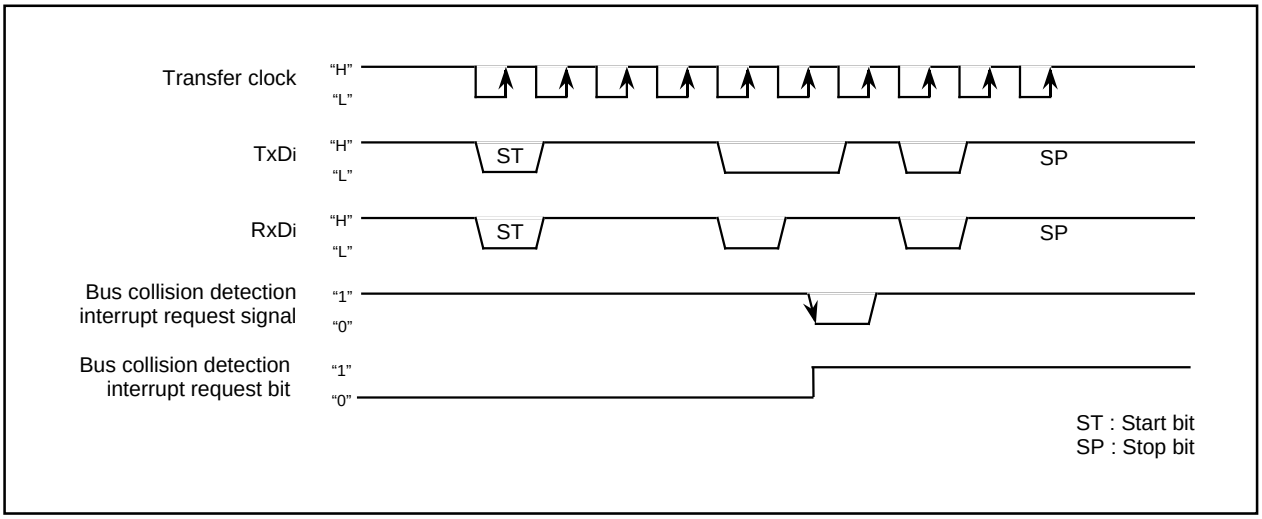

Figure 18.6 Detection timing of a bus collision (in UART mode)

19. Clock-asynchronous serial I/O mode (compliant with the SIM interface)

The SIM interface is used for connecting the microcomputer with a memory card I/C or the like; adding some extra settings in UART2 to UART4 clock-asynchronous serial I/O mode allows the user to effect this function. Table 19.1 shows the specifications of clock-asynchronous serial I/O mode (compliant with the SIM interface).

Table 19.1 Specifications of clock-asynchronous serial I/O mode (compliant with the SIM interface)

Item	Specification
Transfer data format	• Transfer data 8-bit UART mode (bit 2 to 0 of addresses 0338_{16}, 0328_{16}, $02F8_{16}$ = “101_2”) • One stop bit (bit 4 of addresses 0338_{16}, 0328_{16}, $02F8_{16}$ = “0”) • With the direct format chosen Set parity to “even” (bit 5 and 6 of addresses 0338_{16}, 0328_{16}, $02F8_{16}$ = “1” and “1” respectively) Set data logic to “direct” (bit 6 of address $033D_{16}$, $032D_{16}$, $02FD_{16}$ = “0”). Set transfer format to LSB (bit 7 of address $033C_{16}$, $032C_{16}$, $02FC_{16}$ = “0”). • With the inverse format chosen Set parity to “odd” (bit 5 and 6 of addresses 0338_{16}, 0328_{16}, $02F8_{16}$ = “0” and “1” respectively) Set data logic to “inverse” (bit 6 of address $033D_{16}$, $032D_{16}$, $02FD_{16}$ = “1”) Set transfer format to MSB (bit 7 of address $033C_{16}$, $032C_{16}$, $02FC_{16}$ = “1”)
Transfer clock	• With the internal clock chosen (bit 3 of addresses 0338_{16}, 0328_{16}, $02F8_{16}$ = “0”) : fi / 16 (n + 1) (Note 1) : fi=f_1, f_8, f_{32} • With an external clock chosen (bit 3 of addresses 0338_{16}, 0328_{16}, $02F8_{16}$ = “1”) : f_{EXT} / 16 (n+1) (Note 1) (Note 2)
Transmission / reception control	• Disable the $\overline{CTS}$ and $\overline{RTS}$ function (bit 4 of address $033C_{16}$, $032C_{16}$, $02FC_{16}$ = “1”)
Other settings	• The sleep mode select function is not available for UART2 and UART3 • Set transmission interrupt factor to “transmission completed” (bit 4 of address $033D_{16}$, $032D_{16}$, $02FD_{16}$ = “1”) • Set N-channel open drain output to TxD and RxD pins in UART3 and 4 (bit 5 of address $032C_{16}$, $02FC_{16}$ = “1”)
Transmission start condition	• To start transmission, the following requirements must be met: - Transmit enable bit (bit 0 of address $033D_{16}$, $032D_{16}$, $02FD_{16}$) = “1” - Transmit buffer empty flag (bit 1 of address $033D_{16}$, $032D_{16}$, $02FD_{16}$) = “0”
Reception start condition	• To start reception, the following requirements must be met: - Reception enable bit (bit 2 of address $033D_{16}$, $032D_{16}$, $02FD_{16}$) = “1” - Detection of a start bit
Interrupt request generation timing	• When transmitting When data transmission from the UART2 to UART4 transfer register is completed (bit 4 of address $033D_{16}$, $032D_{16}$, $02FD_{16}$ = “1”) • When receiving When data transfer from the UART2 to UART4 receive register to the UART2 to UART4 receive buffer register is completed
Error detection	• Overrun error (see the specifications of clock-asynchronous serial I/O) (Note 3) • Framing error (see the specifications of clock-asynchronous serial I/O) • Parity error (see the specifications of clock-asynchronous serial I/O) - On the reception side, an “L” level is output from the TxD_i pin by use of the parity error signal output function (bit 7 of address $033D_{16}$, $032D_{16}$, $02FD_{16}$ = “1”) when a parity error is detected - On the transmission side, a parity error is detected by the level of input to the RxD_i pin when a transmission interrupt occurs • The error sum flag (see the specifications of clock-asynchronous serial I/O)

Note 1: ‘n’ denotes the value 00_{16} to FF_{16} that is set to the UARTi bit rate generator.
Note 2: f_{EXT} is input from the CLKi pin.
Note 3: If an overrun error occurs, the UARTi receive buffer will have the next data written in. Note also that the UARTi receive interrupt request bit will not change.

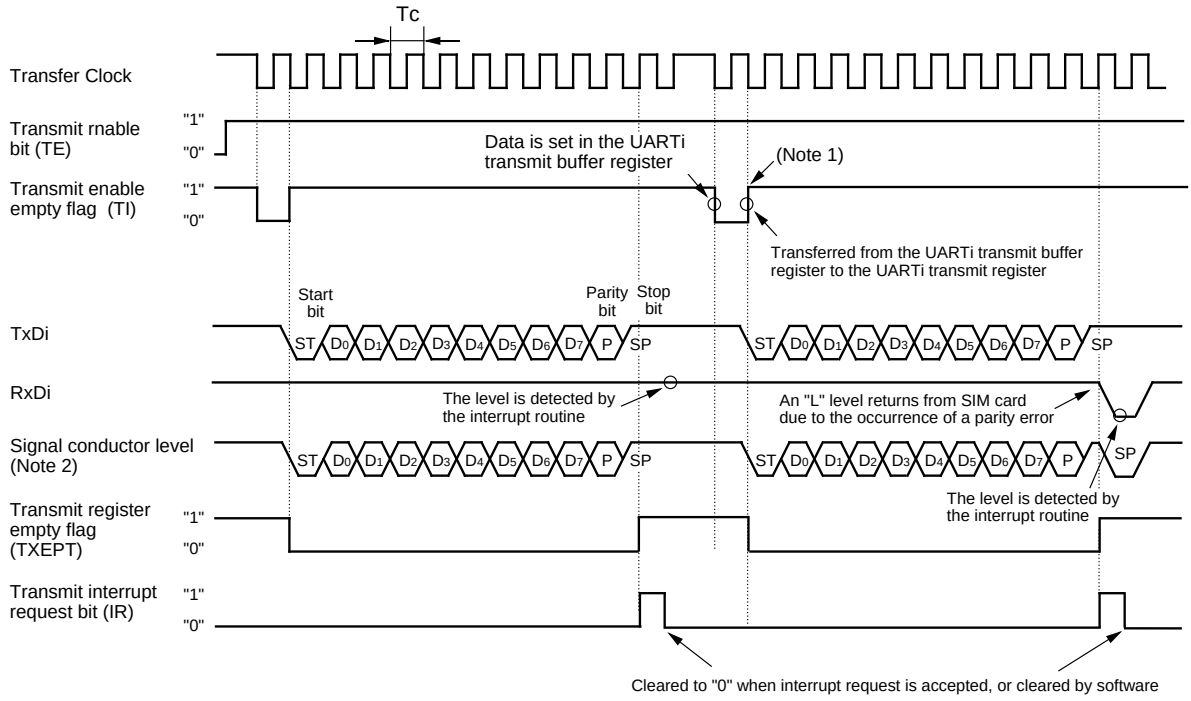

Shown in () are bit symbols.
The above timing applies to the following settings :
- Parity is enabled.
- One stop bit
- Transmit interrupt cause select bit = "1".

Tc = 16 (n + 1) / fi or 16 (n + 1) / fEXT
fi : frequency of BRGi rcount source (f1, f8, f32)
fEXT : frequency of BRGi rcount source (external clock)
n : value set to BRGi

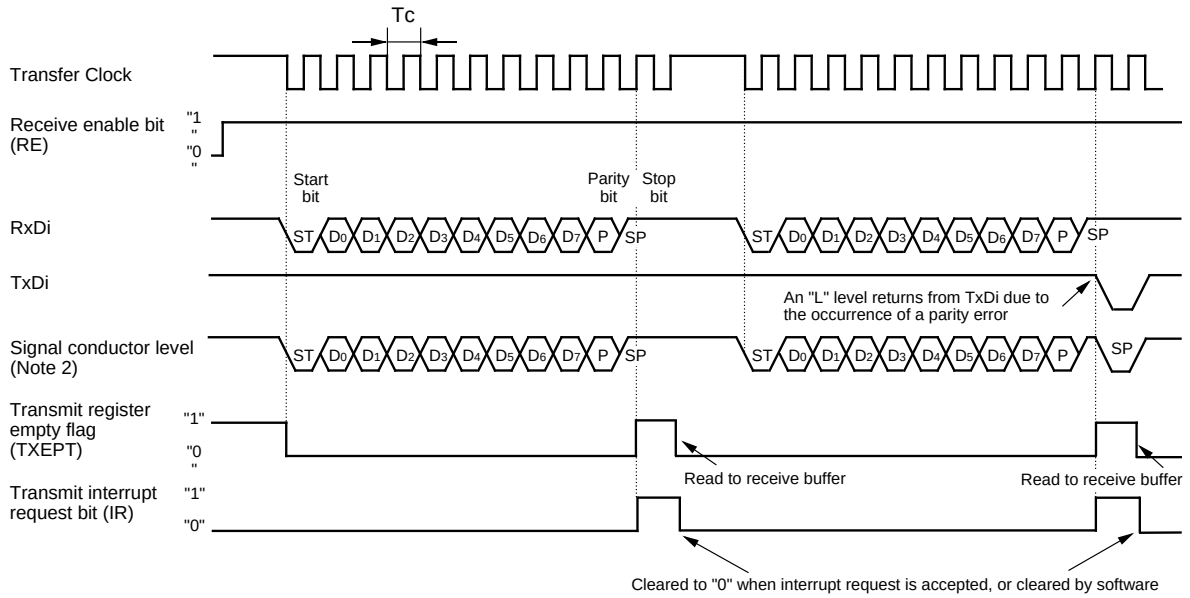

Shown in () are bit symbols.
The above timing applies to the following settings :
- Parity is enabled.
- One stop bit
- Transmit interrupt cause select bit = "0".

Tc = 16 (n + 1) / fi or 16 (n + 1) / fEXT
fi : frequency of BRGi rcount source (f1, f8, f32)
fEXT : frequency of BRGi rcount source (external clock)
n : value set to BRGi

Note 1: After writing to the transfer buffer at above timing, transmission starts at the timing of BRG overflow.
Note 2: Equal in waveform because TxDi and RxDi are connected.

Figure 19.1 Typical transmit/receive timing in UART mode (compliant with the SIM interface)

(a) Function for outputting a parity error signal

During reception, with the error signal output enable bit (bit 7 of address 033D16, 032D16, 02FD16) assigned “1”, you can output an “L” level from the TxDi pin when a parity error is detected. If the UARTi receive buffer register is read while outputting a parity error signal, the parity error flag is cleared to "0" and at the same time the TxDi output is returned high. And during transmission, comparing with the case in which the error signal output enable bit (bit 7 of address 033D16, 032D16, 02FD16) is assigned "0", the transmission completion interrupt occurs in the half cycle later of the transfer clock. Therefore parity error signals can be detected by a transmission completion interrupt program. Figure 19.2 shows the output timing of the parity error signal.

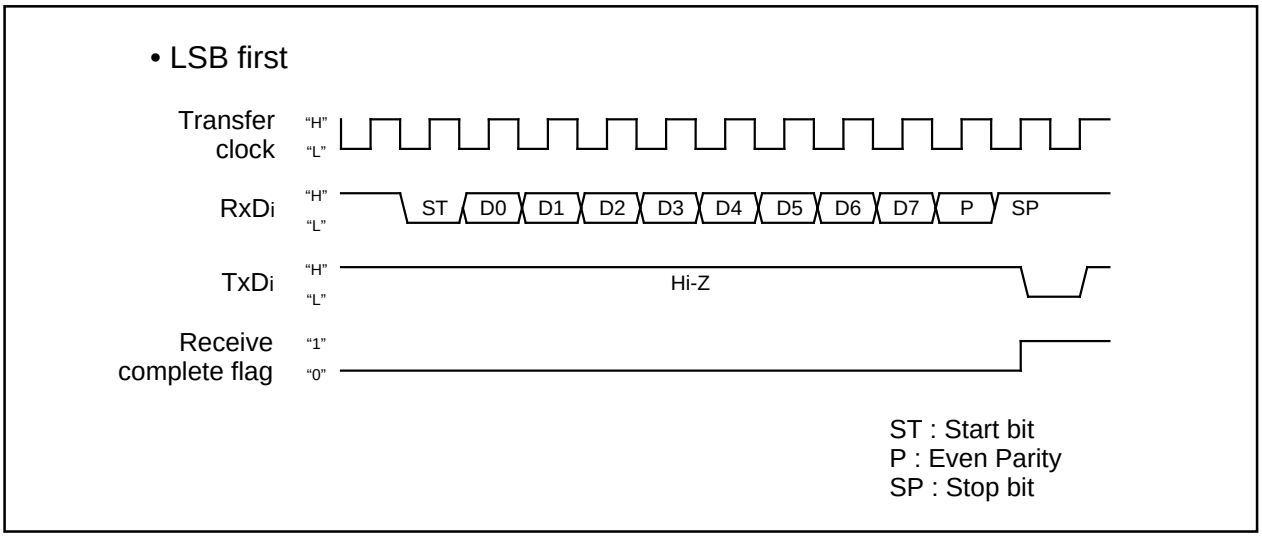

Figure 19.2 Output timing of the parity error signal

(b) Direct format/inverse format

Connecting the SIM card allows you to switch between direct format and inverse format. If you choose the direct format, D0 data is output from TxDi. If you choose the inverse format, D7 data is inverted and output from TxDi.

Figure 19.3 shows the SIM interface format.

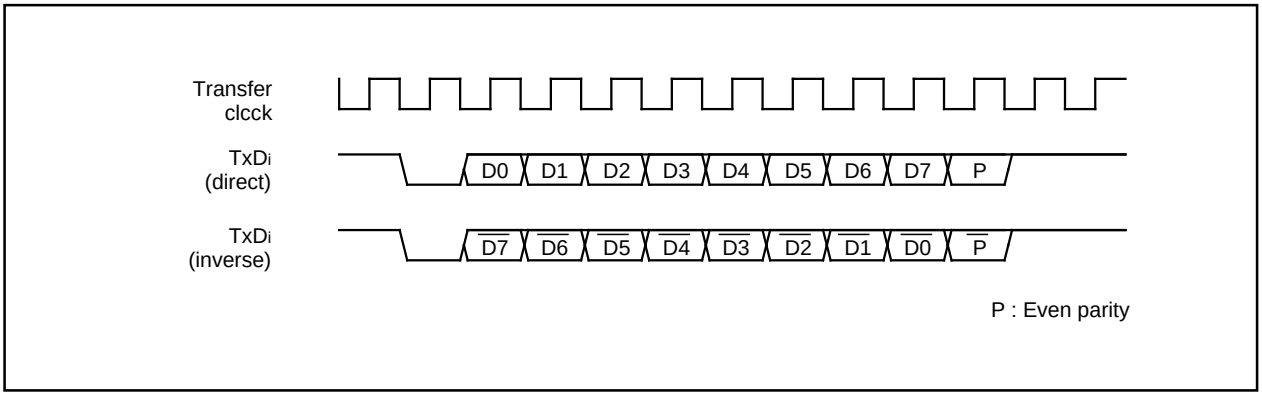

Figure 19.3 SIM interface format

Figure 19.4 shows the example of connecting the SIM interface. Connect TxDi and RxDi and apply pull-up.

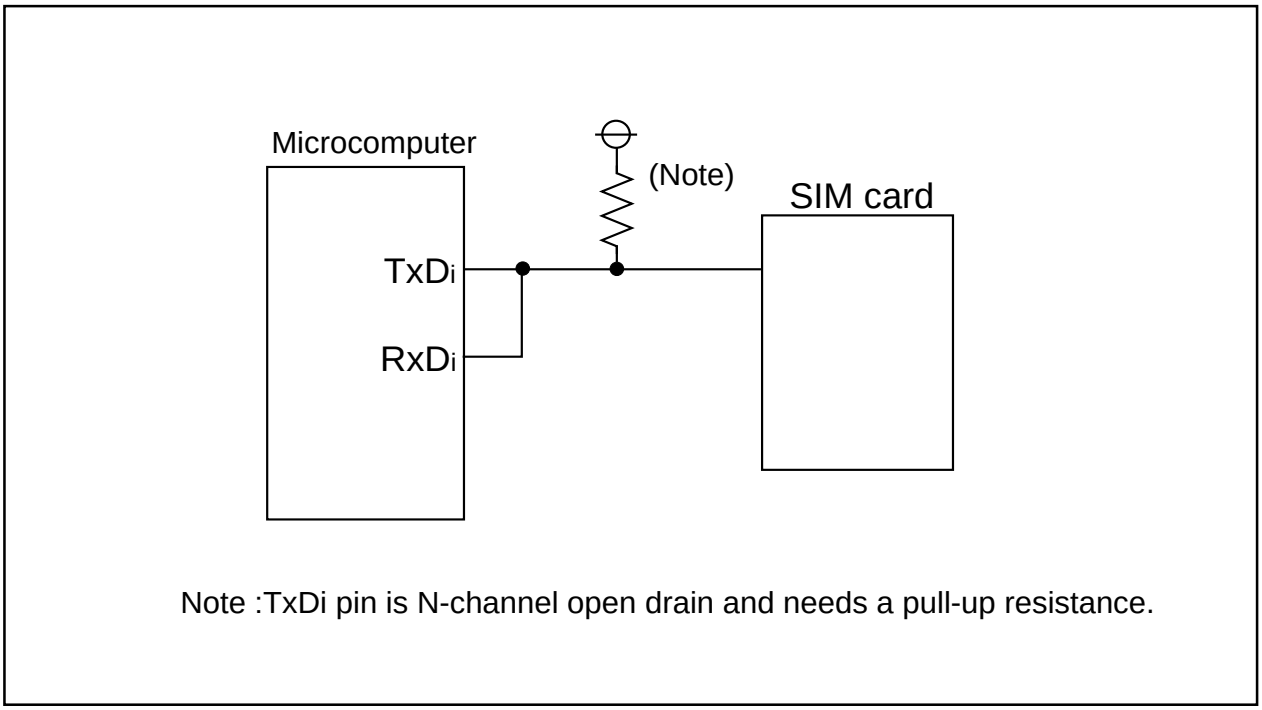

Figure 19.4 Connecting the SIM interface

20. UARTi Special Mode Register (i = 2 to 4)

UART2 to UART4 operate the IIC bus interface (simple IIC bus) using the UARTi special mode register (addresses 033616, 032616 and 02F616 [i = 2 to 4]) and UARTi special mode register 2 (addresses 033616, 032616 and 02F616 [i = 2 to 4]). UART3 and UART4 add special functions using UARTi special mode resister 3 (addresses 032516 and 02F516 [i = 3 or 4]).

(1) IIC Bus Interface Mode

The I^2C bus interface mode is provided with UART2 to UART4.

Table 20.1 shows the construction of the UARTi special mode register and UARTi special mode register 2.

When the I^2C mode select bit (bit 0 in addresses 033716, 032716 and 02F716) is set to "1", the I^2C bus (simple I^2C bus) interface circuit is enabled.

To use the I^2C bus, set the SCLi and the SDAi of both master and slave to output with the function select register. In UART3 and 4, set the data output select bit (bit 5 in address 032C16 and 02FC16) to N-channel open drain output.

Table 20.1 shows the relationship of the IIC mode select bit to control. To use the chip in the clock synchronized serial I/O mode or clock asynchronized serial I/O mode, always set this bit to "0".

Table 20.1 Features in I^2C mode

	Function	Normal mode	I^2C mode (Note 1)
1	Factor of interrupt number 39 to 41 (Note 2)	Bus collision detection	Start condition detection or stop condition detection
2	Factor of interrupt number 33, 35, 37 (Note 2)	UARTi transmission	No acknowledgment detection (NACK)
3	Factor of interrupt number 34, 36, 38 (Note 2)	UARTi reception	Acknowledgment detection (ACK)
4	UARTi transmission output delay	Not delayed	Delayed
5	P70, P92, P96 at the time when UARTi is in use	TxDi (output)	SDAi (input/output) (Note 3)
6	P71, P91, P97 at the time when UARTi is in use	RxDi (input)	SCLi (input/output)
7	P72, P90, P95 at the time when UARTi is in use	CLKi	P72, P90, P95
8	DMA1 factor at the time when 1 1 0 1 is assigned to the DMA request factor selection bits	UARTi reception	Acknowledgment detection (ACK)
9	Noise filter width	15ns	50ns
10	Reading P71, P91, P97	Reading the terminal when 0 is assigned to the direction register	Reading the terminal regardless of the value of the direction register
11	Initial value of UARTi output	H level (when 0 is assigned to the CLK polarity select bit)	The value set in latch P70, P92, P96 when the port is selected (Note 3)

Note 1: Make the settings given below when I^2C mode is in use.
Set 0 1 0 in bits 2, 1, 0 of the UARTi transmission/reception mode register.
Disable the $\overline{RTS}$/$\overline{CTS}$ function. Choose the MSB First function.

Note 2: Follow the steps given below to switch from a factor to another.
1. Disable the interrupt of the corresponding number.
2. Switch from a factor to another.
3. Reset the interrupt request flag of the corresponding number.
4. Set an interrupt level of the corresponding number.

Note 3: Set an initial value of SDA transmission output when IIC mode (IIC mode select bit = "1") is valid and serial I/O is invalid.

UARTi special mode register

b7 b6 b5 b4 b3 b2 b1 b0

Symbol: UiSMR (i=2 to 4) | Address: 033716, 032716, 02F716 | When reset: 0016

Bit symbol	Bit name	Function (During clock synchronous serial I/O mode)	Function (During UART mode)	R	W
IICM	I2C mode select bit	0 : Normal mode 1 : I2C mode	Set to “0”	○	○
ABC	Arbitration lost detecting flag control bit	0 : Update per bit 1 : Update per byte	Set to “0”	○	○
BBS	Bus busy flag	0 : STOP condition detected 1 : START condition detected	Set to “0”	○	○ (Note 1)
LSYN	SCLL sync output enable bit	0 : Disabled 1 : Enabled	Set to “0”	○	○
ABSCS	Bus collision detect sampling clock select bit	Set to “0”	0 : Rising edge of transfer clock (Note 2) 1 : Underflow signal of timer Ai	○	○
ACSE	Auto clear function select bit of transmit enable bit	Set to “0”	0 : No auto clear function 1 : Auto clear at occurrence of bus collision	○	○
SSS	Transmit start condition select bit	Set to “0”	0 : Ordinary 1 : Falling edge of RxDi	○	○
Nothing is assigned. When write, set "0". When read, the content is "0".				–	–

Note 1: Nothing but "0" may be written.
Note 2: UART2 : timer A0 underflow signal, UART3 : timer A3 underflow signal, UART4 : timer A4 underflow signal.

UARTi special mode register 2

b7 b6 b5 b4 b3 b2 b1 b0

Symbol: UiSMR2 (i=2 to 4) | Address: 033616, 032616, 02F616 | When reset: 0016

Bit symbol	Bit name	Function	R	W
IICM2	IIC mode select bit 2	Refer to Table 20.2	○	○
CSC	Clock synchronous bit	0 : Disabled 1 : Enabled	○	○
SWC	SCL wait output bit	0 : Disabled 1 : Enabled	○	○
ALS	SDA output stop flag	0 : Disabled 1 : Enabled	○	○
STC	UARTi initialize bit	0 : Disabled 1 : Enabled	○	○
SWC2	SCL wait output bit 2	0 : UARTi clock 1 : 0 output	○	○
SDHI	SDA output inhibit bit	0 : Enabled 1 : Disabled (high impedance)	○	○
SHTC	Start/stop condition control bit	Set to "1" in selecting IIC mode.	○	○

Figure 20.1 UART2 special mode register

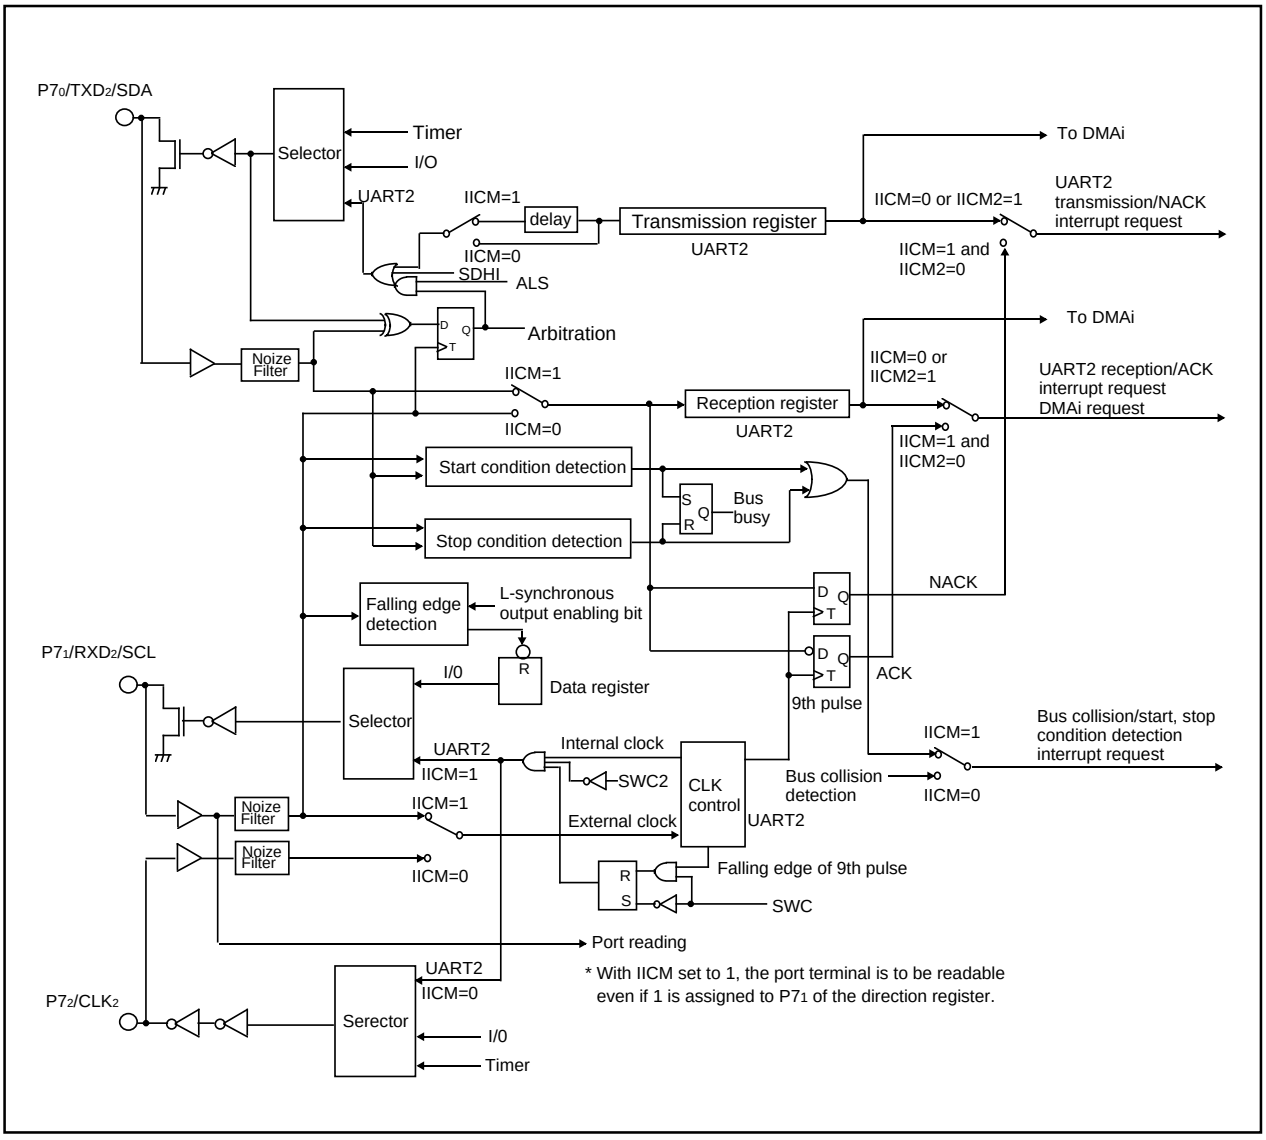

Figure 20.2 Functional block diagram for I²C mode

Figure 20.2 is a block diagram of the IIC bus interface.

To explain the control bit of the IIC bus interface, UART2 is used as an example.

UART2 Special Mode Register (Address 0337₁₆)

Bit 0 is the IIC mode select bit. When set to "1", ports P7₀, P7₁ and P7₂ operate respectively as the SDA2 data transmission-reception pin, SCL2 clock I/O pin and port P7₂. A delay circuit is added to SDA2 transmission output, therefore after SCL2 is sufficiently L level, SDA2 output changes. Port P7₁ (SCL2) is designed to read pin level regardless of the content of the port direction register. SDA2 transmission output is initially set to port P7₀ in this mode. Furthermore, interrupt factors for the bus collision detection interrupt, UART2 transmission interrupt and UART2 reception interrupt change respectively to the start/stop condition detection interrupts, acknowledge non-detection interrupt and acknowledge detection interrupt.

The start condition detection interrupt is generated when the fall at the SDA2 pin ($P7_0$) is detected while the SCL2 pin ($P7_1$) is in the H state. The stop condition detection interrupt is generated when the rise at the SDA2 pin ($P7_0$) is detected while the SCL2 pin ($P7_1$) is in the H state.
The acknowledge non-detection interrupt is generated when the H level at the SDA2 pin is detected at the 9th rise of the transmission clock.
The acknowledge detection interrupt is generated when the L level at the SDA2 pin is detected at the 9th rise of the transmission clock. Also, DMA transfer can be started when the acknowledge is detected if UART2 transmission is selected as the DMAi request factor.

Bit 2 is the bus busy flag. It is set to “1” when the start condition is detected, and reset to “0” when the stop condition is detected.

Bit 1 is the arbitration lost detection flag control bit. Arbitration detects a conflict between data transmitted at SCL2 rise and data at the SDA2 pin. This detection flag is allocated to bit 11 in UART2 transmission buffer register (address $033E_{16}$). It is set to “1” when a conflict is detected. With the arbitration lost detection flag control bit, it can be selected to update the flag in units of bits or bytes. When this bit is set to “1”, update is set to units of byte. If a conflict is then detected, the arbitration lost detection flag control bit will be set to “1” at the 9th rise of the clock. When updating in units of byte, always clear (“0” interrupt) the arbitration lost detection flag control bit after the 1st byte has been acknowledged but before the next byte starts transmitting.

Bit 3 is the SCL2 L synchronization output enable bit. When this bit is set to “1”, the $P7_1$ data register is set to “0” in sync with the L level at the SCL2 pin.

Bit 4 is the bus collision detection sampling clock select bit. The bus collision detection interrupt is generated when RxDi and TxDi level do not conflict with one another. When this bit is “0”, a conflict is detected in sync with the rise of the transfer clock. When this bit is “1”, detection is made when timer Ai (timer A0 with UART2, timer A3 with UART3 and timer A4 with UART4) underflows. Operation is shown in Figure 20.3.

Bit 5 is the transmission enable bit automatic clear select bit. By setting this bit to “1”, the transmission bit is automatically reset to “0” when the bus collision detection interrupt factor bit is “1” (when a conflict is detected).

Bit 6 is the transmission start condition select bit. By setting this bit to “1”, TxDi transmission starts in sync with the falling at the RxDi pin.

1. Bus collision detect sampling clock select bit (Bit 4 of the UARTi special mode register)

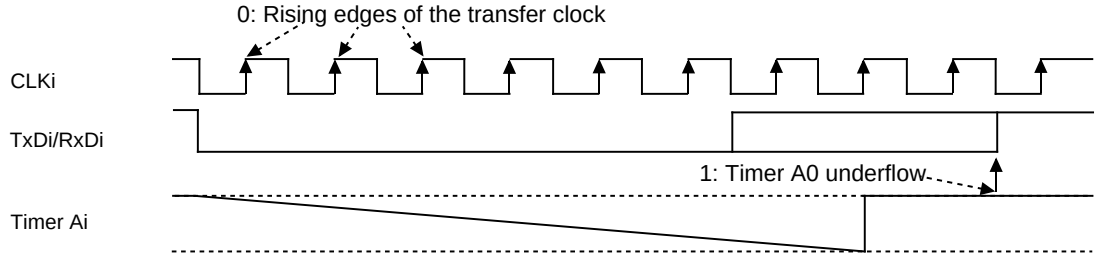

2. Auto clear function select bit of transmit enable bit (Bit 5 of the UARTi special mode register)

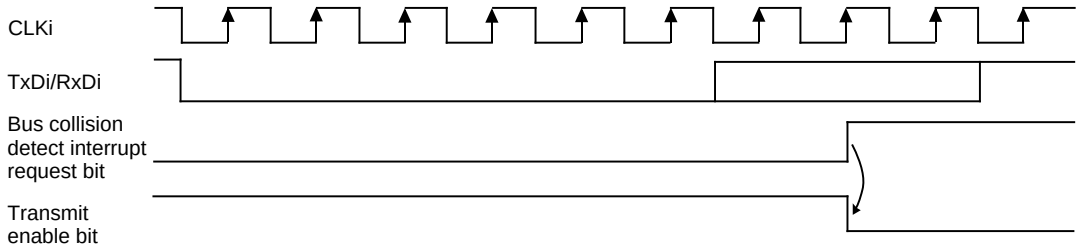

3. Transmit start condition select bit (Bit 6 of the UARTi special mode register)

0: In normal state

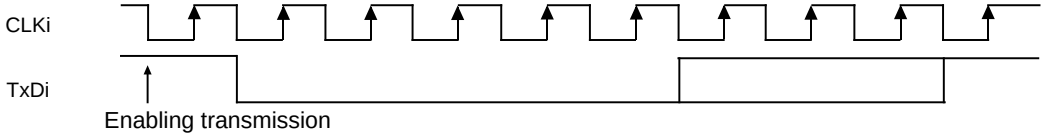

With "1: falling edge of RxDi" selected

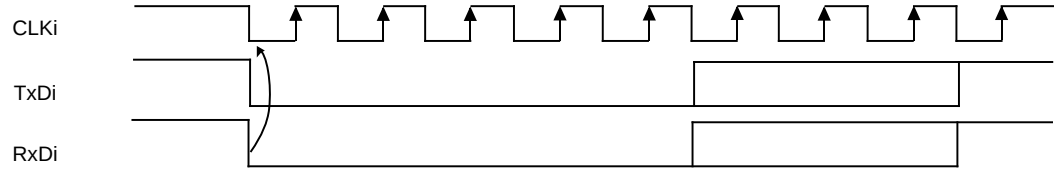

Figure 20.3 Some other functions added

UARTi Special Mode Register 2(i=2 to 4) (Address 0336$_{16}$,0326$_{16}$,02F6$_{16}$)

Bit 0 is the IIC mode select bit 2. Table 20.2 gives control changes by bit when the IIC mode select bit is “1”. Start and stop condition detection timing characteristics are shown in Figure 20.4. Always set bit 7 (start/stop condition control bit) to “1”.

Bit 1 is the clock synchronization bit. When this bit is set to “1”, if the rise edge is detected at pin SCLi while the internal SCL is H level, the internal SCL is changed to L level, the UARTi bit rate generator value is reloaded and the L sector count starts. Also, while the SCLi pin is L level, if the internal SCL changes from L level to H, the count stops. If the SCLi pin is H level, counting restarts. Because of this function, the UARTi transmission-reception clock takes the AND condition for the internal SCL and SCLi pin signals. This function operates from the clock half period before the 1st rise of the UARTi clock to the 9th rise. To use this function, select the internal clock as the transfer clock.

Bit 2 is the SCL wait output bit. When this bit is set to “1”, output from the SCLi pin is fixed to L level at the clock’s 9th rise. When set to “0”, the L output lock is released.

Bit 3 is the SDA output stop bit. When this bit is set to “1”, an arbitration lost is generated. If the arbitration lost detection flag is “1”, the SDAi pin simultaneously becomes high impedance.

Bit 4 is the UARTi initialize bit. While this bit is set to “1”, the following operations are performed when the start condition is detected.

1. The transmission shift register is initialized and the content of the transmission register is transmitted to the transmission shift register. As such, transmission starts with the 1st bit of the next input clock. However, the UARTi output value remains the same as when the start condition was detected, without changing from when the clock is input to when the 1st bit of data is output.
2. The reception shift register is initialized and reception starts with the 1st bit of the next input clock.
3. The SCL wait output bit is set to “1”. As such, the SCLi pin becomes L level at the rise of the 9th bit of the clock.

When UART transmission-reception has been started using this function, the content of the transmission buffer available flag does not change. Also, to use this function, select an external clock as the transfer clock.

Bit 5 is SCL wait output bit 2. When this bit is set to “1” and serial I/O has been selected, an L level can be forcefully output from the SCLi pin even during UART operation. When this bit is set to “0', the L output from the SCLi pin is canceled and the UARTi clock is input and output.

Bit 6 is the SDA output disable bit. When this bit is set to “1”, the SDAi pin is forcefully made high impedance. To overwrite this bit, do so at the rise of the UARTi transfer clock. The arbitration lost detection flag may be set.

Table 20.2 Functions changed by I²C mode select bit 2

Function	IICM2 = 0	IICM2 = 1
Interrupt no. 33, 35, 37 factor	Acknowrege not detect (NACK)	UART2 transfer (rising edge of)
Interrupt no. 34, 36, 38 factor	Acknowrege detect (ACK)	Acknowrege detect (ACK)
DMA factor	Acknowrege detect (ACK)	Acknowrege detect (ACK)
Data transfer timing from UARTi (i = 2 to 4) receive shift register to receive buffer	Rising edge of the last bit of receive clock	Rising edge of the last bit of receive clock
UARTi(i = 2 to 4) receive / ACK interrupt request generation timing	Rising edge of the last bit of receive clock	Rising edge of the last bit of receive clock

3 to 6 cycles < set up time (Note)
3 to 6 cycles < hold time (Note)

Note : Cycle number shows main clock input oscillation frequency f(XIN) cycle number.

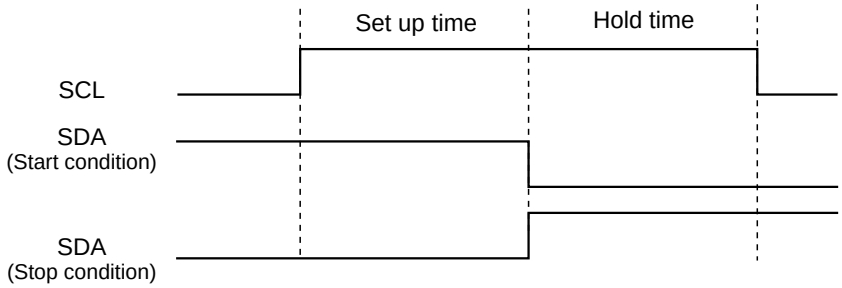

Figure 20.4 Start/stop condition detect timing characteristics

UARTi Special Mode Register 3(i=2 to 4)(Address 0335$_{16}$,0325$_{16}$,02F5$_{16}$)

Bits 5 to 7 are the SDAi digital delay setting bits. By setting these bits, it is possible to turn the SDAi delay OFF or set the f(XIN) delay to 2 to 8 cycles.

(2) Serial Interface Special Function

UART 3 and UART4 can control communications on the serial bus using the $\overline{SSi}$ input pins (Figure 20.5). The master outputting the transfer clock transfers data to the slave inputting the transfer clock. In this case, in order to prevent a data collision on the bus, the master floats the output pin of other slaves/ masters using the $\overline{SSi}$ input pins. Figure 20.6 shows the structure of UARTi special mode register 3 (addresses 0325_{16} and $02F5_{16}$ [i = 3 or 4]) which controls this mode.

$\overline{SSi}$ input pins function between the master and slave are as follows.

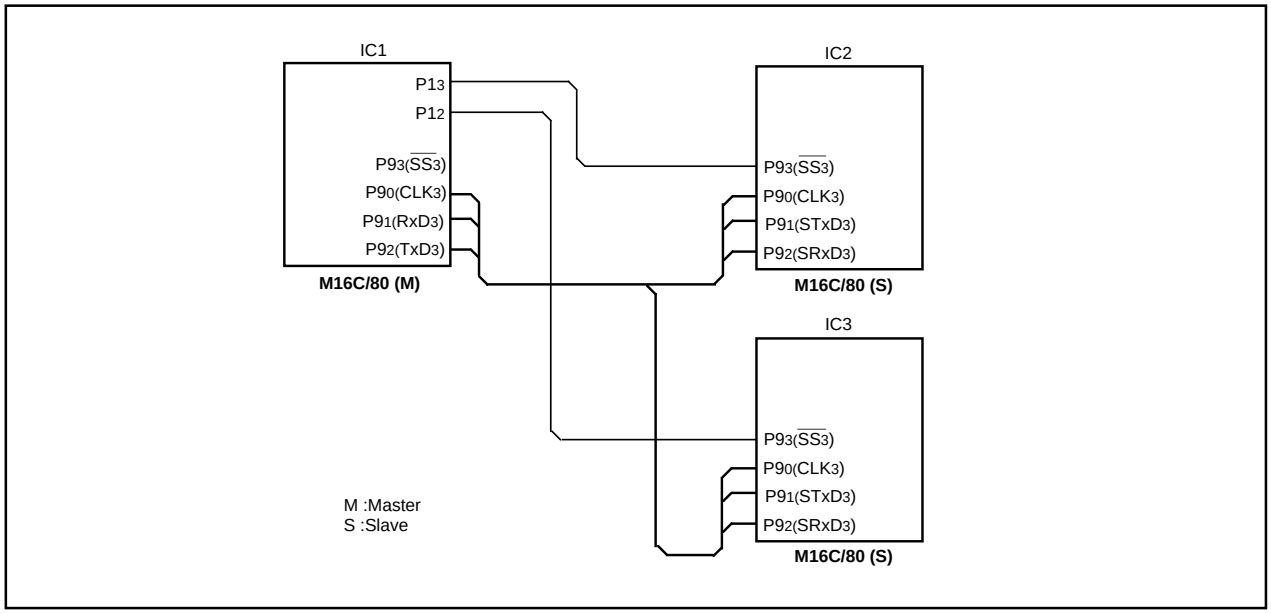

Figure 20.5 Serial bus communication control example using the SSi input pins

< Slave Mode (STxDi and SRxDi are selected, DINC = 1) >

When an H level signal is input to an $\overline{SSi}$ input pin, the STxDi and SRxDi pins both become high impedance, hence clock input is ignored. When an "L" level signal is input to an SSi input pin, clock input becomes effective and serial communications are enabled. (i = 3 or 4)

< Master Mode (TxDi and RxDi are selected, DINC = 0) >

The $\overline{SSi}$ input pins are used with a multiple master system. When an $\overline{SSi}$ input pin is H level, transmission has priority and serial communications are enabled. When an L signal is input to an $\overline{SSi}$ input pin, another master exists, and the TxDi, RxDi and CLKi pins all become high impedance. Moreover, the trouble error interrupt request bit becomes “1”. Communications do not stop even when a trouble error is generated during communications. To stop communications, set bits 0, 1 and 2 of the UARTi transmission-reception mode register (address 0328_{16} and $02F8_{16}$ [i = 3 or 4]) to “0”.

The trouble error interrupt is used by both the bus collision interrupt and start/stop condition detection interrupts, but the trouble error interrupt itself can be selected by setting bit 0 of UARTi special mode register 3 (address 0325_{16} and $02F5_{16}$ [i = 3 or 4]) to “1”.

When the trouble error flag is set to “0”, output is restored to the clock output and data output pins. In the master mode, if an $\overline{SSi}$ input pin is H level, “0” can be written for the trouble error flag. When an $\overline{SSi}$ input pin is L level, “0” cannot be written for the trouble error flag. In the slave mode, the “0” can be written for the trouble error flag regardless of the input to the $\overline{SSi}$ input pins.

UARTi special mode register 3 (i=3,4)



Symbol	Address	When reset
U3SMR3	032516	000000002
U4SMR3	$02F516$	000000002

Bit symbol	Bit name	Function	R	W
SSE	$\overline{SS}$ port function enable bit (Note 3)	0: $\overline{SS}$ function disable 1: $\overline{SS}$ function enable	○	○
CKPH	Clock phase set bit	0: Without clock delay 1: With clock delay	○	○
DINC	Serial input port set bit	0: Select TxDi and RxDi (master mode) (Note 5) 1: Select STxDi and SRxDi (slave mode) (Note 6)	○	○
NODC	Clock output select bit	0: CLKi is CMOS output 1: CLKi is N-channel open drain output	○	○
ERR	Fault error flag	0: Without fault error 1: With fault error (Note 4)	○	○
DL0	SDAi(TxD2) digital delay time set bit (Note 1,2)	b7 b6 b5 000 :Without delay 001 :1 to 2 cycles of 1/f(XIN) 010 :2 to 3 cycles of 1/f(XIN) 011 :3 to 4 cycles of 1/f(XIN) 100 :4 to 5 cycles of 1/f(XIN) 101 :5 to 6 cycles of 1/f(XIN) 110 :6 to 7 cycles of 1/f(XIN) 111 :7 to 8 cycles of 1/f(XIN)	○	○
DL1			○	○
DL2			○	○

Note 1: These bits are used for SDAi(TxDi) output digital delay when using UARTi for IIC interface. Otherwise, must set to "000".
Note 2: When external clock is selected, delay is increased approx. 100ns.
Note 3: Set $\overline{SS}$ function after setting $\overline{CTS}/\overline{RTS}$ disable bit (bit 4 of UARTi transfer/receive control register 0) to "1".
Note 4: Nothing but "0" may be written.
Note 5: Set CLKi and TxDi both for output using the CLKi and TxDi function select register A. Set the RxDi function select register A for input/output port and the port direction register to "0".
Note 6: Set STxDi for output using the STxDi function select registers A and B. Set the CLKi and SRxDi function select register A for input/output port and the port direction register to "0".

Figure 20.6 UARTi special mode register 3 (i=3,4)

Clock Phase Setting

With bit 1 of UARTi special mode register 3 (addresses 0325$_{16}$ and 02F5$_{16}$ [i = 3 or 4]) and bit 6 of UARTi transmission-reception control register 0 (addresses 032C$_{16}$ and 02FC$_{16}$ [i = 3 or 4]), four combinations of transfer clock phase and polarity can be selected.

Bit 6 of UARTi transmission-reception control register 0 (addresses 032C$_{16}$ and 02FC$_{16}$ [i = 3 or 4]) sets transfer clock polarity, whereas bit 1 of UARTi special mode register 3 (addresses 0325$_{16}$ and 02F5$_{16}$ [i = 3 or 4]) sets transfer clock phase.

Transfer clock phase and polarity must be the same between the master and slave involved in the transfer.

< Master (Internal Clock) (DINC = 0) >

Figure 20.7 shows the transmission and reception timing.

< Slave (External Clock) (DINC = 1) >

- With “0” for bit 1 (CKPH) of UARTi special mode register 3 (addresses 0325$_{16}$ and 02F5$_{16}$ [i = 3 or 4]), when an SSi input pin is H level, output data is high impedance. When an SSi input pin is L level, the serial transmission start condition is satisfied, though output is indeterminate. After that, serial transmission is synchronized with the clock. Figure 20.8 shows the timing.
- With “1” for bit 1 (CKPH) of UARTi special mode register 3 (addresses 0325$_{16}$ and 02F5$_{16}$ [i = 3 or 4]), when an SSi input pin is H level, output data is high impedance. When an SSi input pin is L level, the first data is output. After that, serial transmission is synchronized with the clock. Figure 20.9 shows the timing.

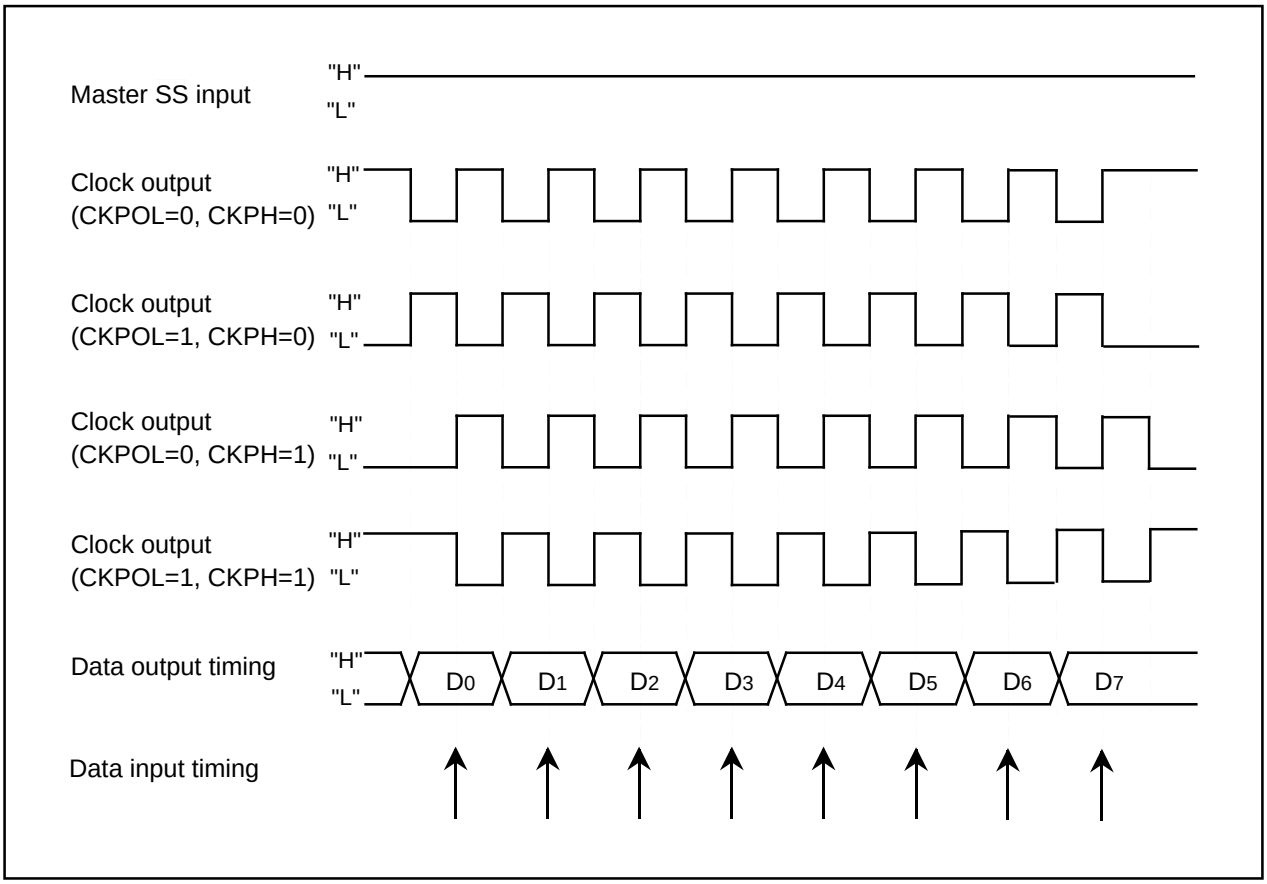

Figure 20.7 The transmission and reception timing in master mode (internal clock)

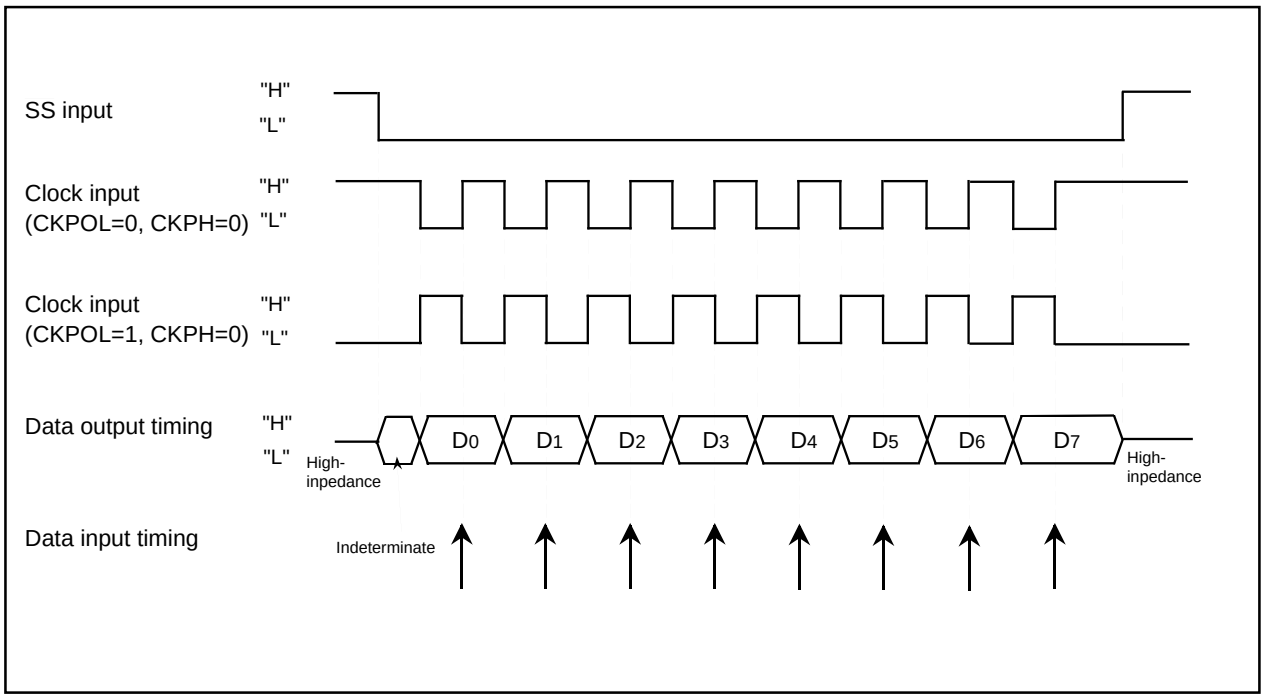

Figure 20.8 The transmission and reception timing (CKPH=0) in slave mode (external clock)

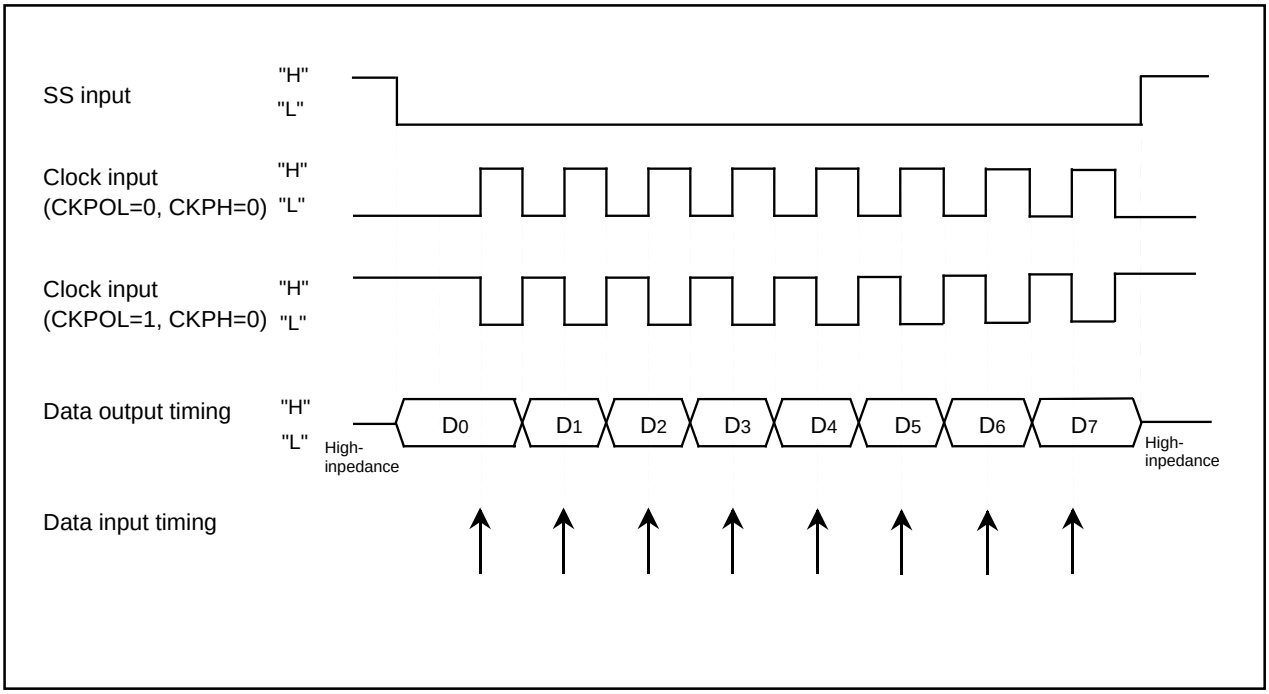

Figure 20.9 The transmission and reception timing (CKPH=1) in slave mode (external clock)

21. A/D Converter

The A/D converter consists of one 10-bit successive approximation A/D converter circuit with a capacitive coupling amplifier. Pins P10$_0$ to P10$_7$, P9$_5$, and P9$_6$ also function as the analog signal input pins. The direction registers of these pins for A/D conversion must therefore be set to input. The Vref connect bit (bit 5 at address 039$_{16}$) can be used to isolate the resistance ladder of the A/D converter from the reference voltage input pin (V_{REF}) when the A/D converter is not used. Doing so stops any current flowing into the resistance ladder from V_{REF}, reducing the power dissipation. When using the A/D converter, start A/D conversion only after setting bit 5 of 039$_{16}$ to connect V_{REF}.

The result of A/D conversion is stored in the A/D registers of the selected pins. When set to 10-bit precision, the low 8 bits are stored in the even addresses and the high 2 bits in the odd addresses. When set to 8-bit precision, the low 8 bits are stored in the even addresses.

Table 21.1 shows the performance of the A/D converter. Figure 21.1 shows the block diagram of the A/D converter, and Figures 21.2 and 21.3 show the A/D converter-related registers.

Table 21.1 Performance of A/D converter

Item	Performance
Method of A/D conversion	Successive approximation (capacitive coupling amplifier)
Analog input voltage (Note 1)	0V to AV$_{CC}$ (V_{CC})
Operating clock f_{AD} (Note 2)	V_{CC} = 5V f_{AD}, f_{AD}/2, f_{AD}/4 f_{AD}=f(X_{IN})
	V_{CC} = 3V f_{AD}/2, f_{AD}/4 f_{AD}=f(X_{IN})
Resolution	8-bit or 10-bit (selectable)
Absolute precision	V_{CC} = 5V • 8-bit resolution ±2LSB • 10-bit resolution ±3LSB However, when using AN$_0$ to AN$_7$ in the mode which external operation amp is connected : ±7LSB V_{CC} = 3V • Without sample and hold function (8-bit resolution) ±2LSB
Operating modes	One-shot mode, repeat mode, single sweep mode, repeat sweep mode 0, and repeat sweep mode 1
Analog input pins	8 pins (AN$_0$ to AN$_7$) + 2 pins (ANEX$_0$ and ANEX$_1$)
A/D conversion start condition	• Software trigger A/D conversion starts when the A/D conversion start flag changes to “1” • External trigger (can be retriggered) A/D conversion starts when the A/D conversion start flag is “1” and the $\overline{ADTRG}$/P9$_7$ input changes from “H” to “L”
Conversion speed per pin	• Without sample and hold function 8-bit resolution: 49 f_{AD} cycles, 10-bit resolution: 59 f_{AD} cycles • With sample and hold function 8-bit resolution: 28 f_{AD} cycles, 10-bit resolution: 33 f_{AD} cycles

Note 1: Does not depend on use of sample and hold function.

Note 2: When f(X_{IN}) is over 10 MHz, the f_{AD} frequency must be under 10 MHz by dividing.
Without sample and hold function, set the f_{AD} frequency to 250kHz min.
With the sample and hold function, set the f_{AD} frequency to 1MHz min.

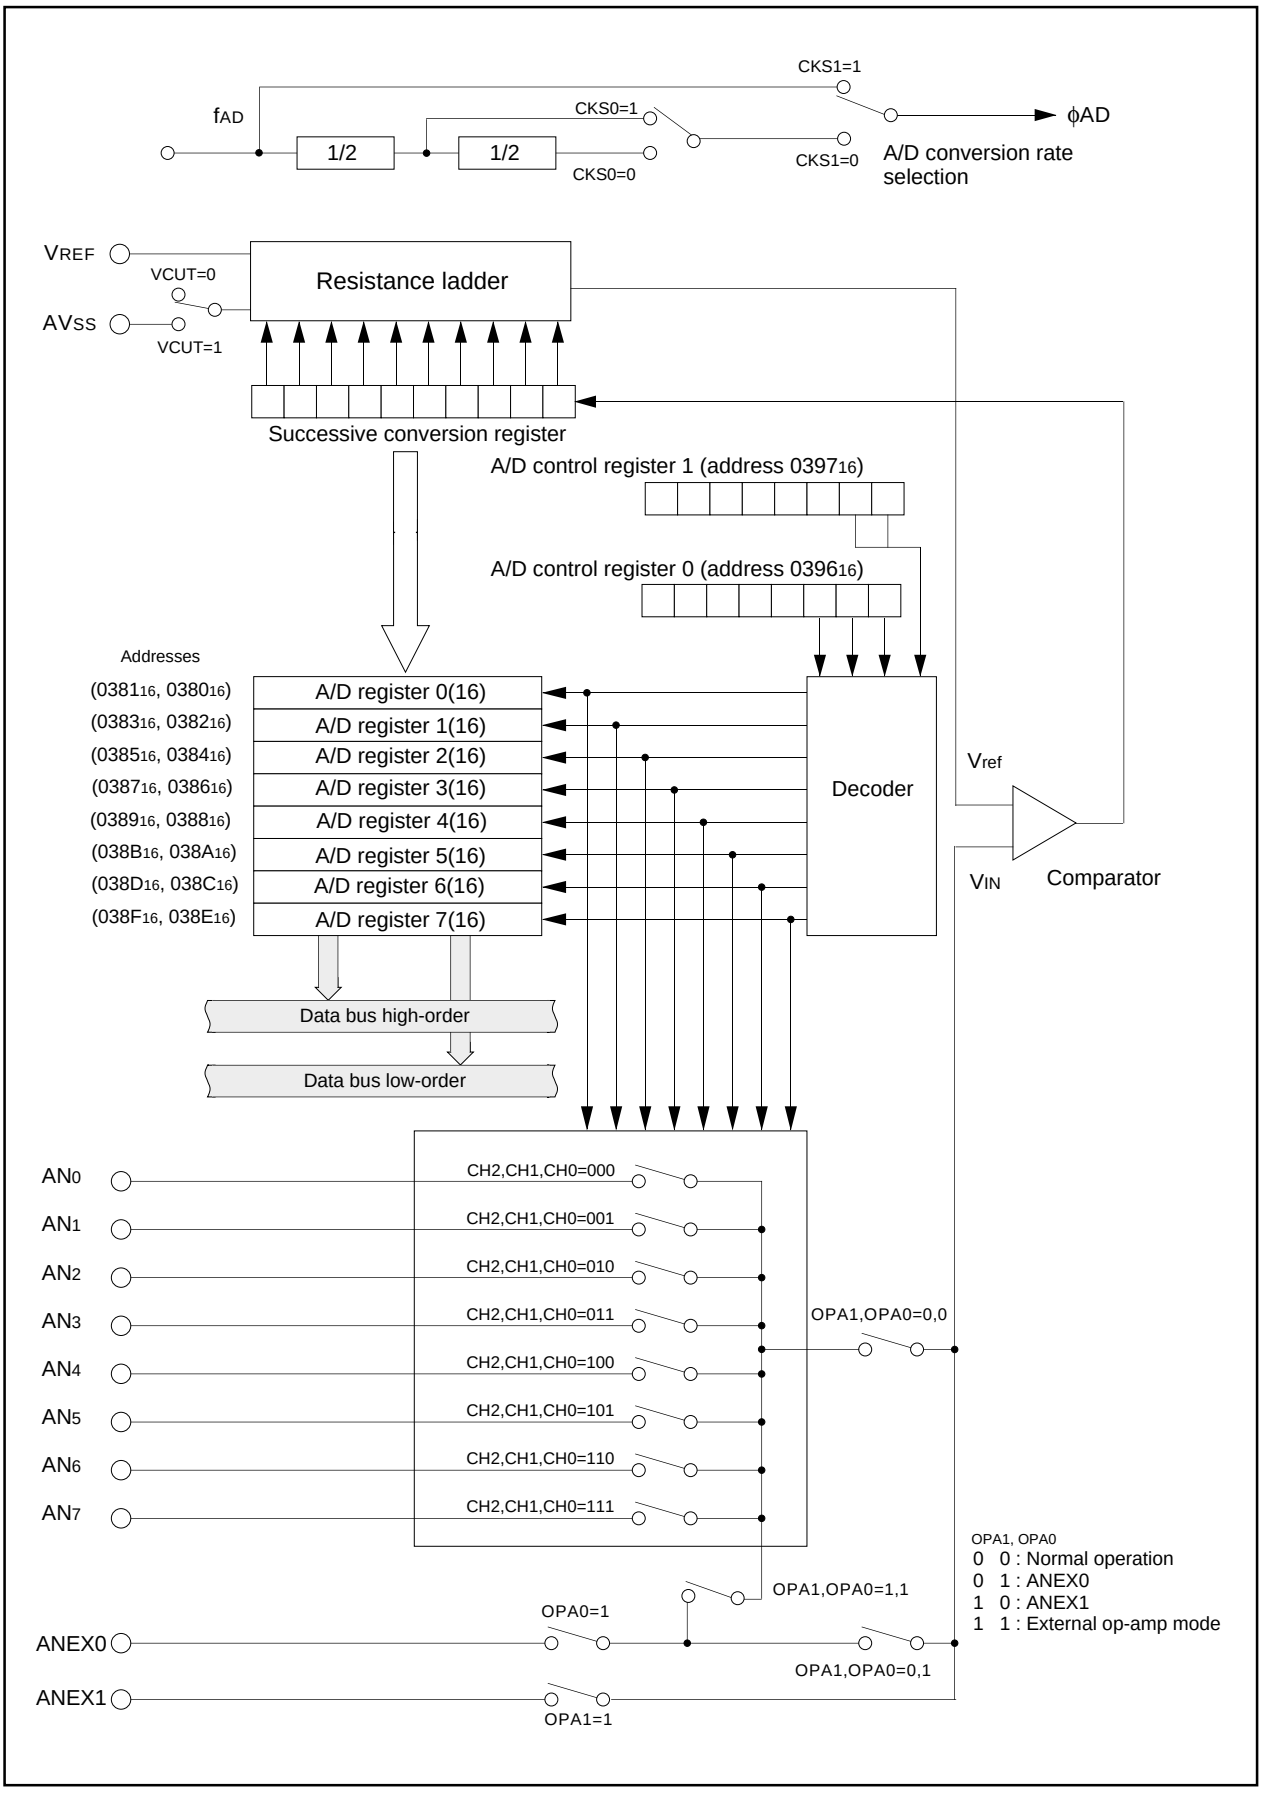

Figure 21.1 Block diagram of A/D converter

A/D control register 0 (Note 1)

b7	b6	b5	b4	b3	b2	b1	b0

Symbol	Address	When reset
ADCON0	039_{16}	$00000XXX_2$

Bit symbol	Bit name	Function	R	W
CH0	Analog input pin select bit	b2 b1 b0 0 0 0 : AN_0 is selected 0 0 1 : AN_1 is selected 0 1 0 : AN_2 is selected 0 1 1 : AN_3 is selected 1 0 0 : AN_4 is selected 1 0 1 : AN_5 is selected 1 1 0 : AN_6 is selected 1 1 1 : AN_7 is selected (Note 2)	○	○
CH1			○	○
CH2			○	○
MD0	A/D operation mode select bit 0	b4 b3 0 0 : One-shot mode 0 1 : Repeat mode 1 0 : Single sweep mode 1 1 : Repeat sweep mode 0 (Note 2) Repeat sweep mode 1	○	○
MD1			○	○
TRG	Trigger select bit	0 : Software trigger 1 : $\overline{AD_{TRG}}$ trigger	○	○
ADST	A/D conversion start flag	0 : A/D conversion disabled 1 : A/D conversion started	○	○
CKS0	Frequency select bit 0	0 : $f_{AD}/4$ is selected 1 : $f_{AD}/2$ is selected	○	○

Note 1: If the A/D control register is rewritten during A/D conversion, the conversion result is indeterminate.
Note 2: When changing A/D operation mode, set analog input pin again.

A/D control register 1 (Note 1)

b7	b6	b5	b4	b3	b2	b1	b0

Symbol	Address	When reset
ADCON1	039_{16}	00_{16}

Bit symbol	Bit name	Function	R	W
SCAN0	A/D sweep pin select bit	When single sweep and repeat sweep mode 0 are selected b1 b0 0 0 : AN_0, AN_1 (2 pins) 0 1 : AN_0 to AN_3 (4 pins) 1 0 : AN_0 to AN_5 (6 pins) 1 1 : AN_0 to AN_7 (8 pins)	○	○
SCAN1		When repeat sweep mode 1 is selected b1 b0 0 0 : AN_0 (1 pin) 0 1 : AN_0, AN_1 (2 pins) 1 0 : AN_0 to AN_2 (3 pins) 1 1 : AN_0 to AN_3 (4 pins)	○	○
MD2	A/D operation mode select bit 1	0 : Any mode other than repeat sweep mode 1 1 : Repeat sweep mode 1	○	○
BITS	8/10-bit mode select bit	0 : 8-bit mode 1 : 10-bit mode	○	○
CKS1	Frequency select bit 1 (Note 2)	0 : $f_{AD}/2$ or $f_{AD}/4$ is selected 1 : f_{AD} is selected	○	○
VCUT	Vref connect bit	0 : Vref not connected 1 : Vref connected	○	○
OPA0	External op-amp connection mode bit	b7 b6 0 0 : ANEX0 and ANEX1 are not used(Note 3) 0 1 : ANEX0 input is A/D converted(Note 4) 1 0 : ANEX1 input is A/D converted(Note 5) 1 1 : External op-amp connection mode(Note 6)	○	○
OPA1			○	○

Note 1: If the A/D control register is rewritten during A/D conversion, the conversion result is indeterminate.
Note 2: When f(X_{IN}) is over 10 MHz, the f_{AD} frequency must be under 10 MHz by dividing.
Note 3: Set "0" to PSL3_5 and PSL3_6 of the function select register B3.
Note 4: Set "1" to PSL3_5 of the function select register B3.
Note 5: Set "1" to PSL3_6 of the function select register B3.
Note 6: Set "1" to PSL3_5 and PSL3_6 of the function select register B3.

Figure 21.2 A/D converter-related registers (1)

A/D control register 2 (Note)

b7	b6	b5	b4	b3	b2	b1	b0
X	X	X	X	0	0	0	

Symbol	Address	When reset
ADCON2	039416	XXXXXXX02

Bit symbol	Bit name	Function	R	W
SMP	A/D conversion method select bit	0 : Without sample and hold 1 : With sample and hold	○	○
Reserved bit		Must always set to “0”	○	○
Nothing is assigned. When write, set "0". When read, their content is "0".			–	–

Note: If the A/D control register is rewritten during A/D conversion, the conversion result is indeterminate.

A/D register i

(b15) b7							(b8) b0	b7							b0
X	X	X	X	X	X	X									

Symbol	Address	When reset
ADi(i=0 to 7)	038016 to 038F16	Indeterminate

Function	R	W
Eight low-order bits of A/D conversion result	○	×
• During 10-bit mode Two high-order bits of A/D conversion result	○	×
• During 8-bit mode When read, the content is indeterminate	×	×
Nothing is assigned. When write, set "0". When read, their content is "0".	–	–

Figure 21.3 A/D converter-related registers (2)

(1) One-shot mode

In one-shot mode, the pin selected using the analog input pin select bit is used for one-shot A/D conversion. Table 21.2 shows the specifications of one-shot mode. Figure 21.4 shows the A/D control register in one-shot mode.

Table 21.2 One-shot mode specifications

Item	Specification
Function	The pin selected by the analog input pin select bit is used for one A/D conversion
Start condition	Writing "1" to A/D conversion start flag
Stop condition	• End of A/D conversion (A/D conversion start flag changes to "0", except when external trigger is selected) • Writing "0" to A/D conversion start flag
Interrupt request generation timing	End of A/D conversion
Input pin	One of AN_0 to AN_7, as selected
Reading of result of A/D converter	Read A/D register corresponding to selected pin

A/D control register 0 (Note 1)

b7	b6	b5	b4	b3	b2	b1	b0
			0	0			

Symbol ADCON0 — Address 039_{16} — When reset $00000XXX_2$

Bit symbol	Bit name	Function	R	W
CH0	Analog input pin select bit	b2 b1 b0 0 0 0 : AN_0 is selected 0 0 1 : AN_1 is selected 0 1 0 : AN_2 is selected 0 1 1 : AN_3 is selected 1 0 0 : AN_4 is selected 1 0 1 : AN_5 is selected 1 1 0 : AN_6 is selected 1 1 1 : AN_7 is selected (Note 2)	○	○
CH1			○	○
CH2			○	○
MD0	A/D operation mode select bit 0	b4 b3 0 0 : One-shot mode (Note 2)	○	○
MD1			○	○
TRG	Trigger select bit	0 : Software trigger 1 : $\overline{ADTRG}$ trigger	○	○
ADST	A/D conversion start flag	0 : A/D conversion disabled 1 : A/D conversion started	○	○
CKS0	Frequency select bit 0	0: $f_{AD}/4$ is selected 1: $f_{AD}/2$ is selected	○	○

Note 1: If the A/D control register is rewritten during A/D conversion, the conversion result is indeterminate.
Note 2: When changing A/D operation mode, set analog input pin again.

A/D control register 1 (Note)

b7	b6	b5	b4	b3	b2	b1	b0
		1			0		

Symbol ADCON1 — Address 039_{16} — When reset 00_{16}

Bit symbol	Bit name	Function	R	W
SCAN0	A/D sweep pin select bit	Invalid in one-shot mode	○	○
SCAN1			○	○
MD2	A/D operation mode select bit 1	0 : Any mode other than repeat sweep mode 1	○	○
BITS	8/10-bit mode select bit	0 : 8-bit mode 1 : 10-bit mode	○	○
CKS1	Frequency select bit 1 (Note 2)	0 : $f_{AD}/2$ or $f_{AD}/4$ is selected 1 : f_{AD} is selected	○	○
VCUT	Vref connect bit	1 : Vref connected	○	○
OPA0	External op-amp connection mode bit	b7 b6 0 0 : ANEX0 and ANEX1 are not used(Note 3) 0 1 : ANEX0 input is A/D converted(Note 4) 1 0 : ANEX1 input is A/D converted(Note 5) 1 1 : External op-amp connection mode(Note 6)	○	○
OPA1			○	○

Note 1: If the A/D control register is rewritten during A/D conversion, the conversion result is indeterminate.
Note 2: When f(X_{IN}) is over 10 MHz, the f_{AD} frequency must be under 10 MHz by dividing.
Note 3: Set "0" to PSL3_5 and PSL3_6 of the function select register B3.
Note 4: Set "1" to PSL3_5 of the function select register B3.
Note 5: Set "1" to PSL3_6 of the function select register B3.
Note 6: Set "1" to PSL3_5 and PSL3_6 of the function select register B3.

Figure 21.4 A/D conversion register in one-shot mode

(2) Repeat mode

In repeat mode, the pin selected using the analog input pin select bit is used for repeated A/D conversion. Table 21.3 shows the specifications of repeat mode. Figure 21.5 shows the A/D control register in repeat mode.

Table 21.3 Repeat mode specifications

Item	Specification
Function	The pin selected by the analog input pin select bit is used for repeated A/D conversion
Star condition	Writing “1” to A/D conversion start flag
Stop condition	Writing “0” to A/D conversion start flag
Interrupt request generation timing	None generated
Input pin	One of AN_0 to AN_7, as selected
Reading of result of A/D converter	Read A/D register corresponding to selected pin (at any time)

A/D control register 0 (Note 1)

b7	b6	b5	b4	b3	b2	b1	b0
			0	1			

Symbol ADCON0 — Address 039_{16} — When reset $00000XXX_2$

Bit symbol	Bit name	Function	R	W
CH0	Analog input pin select bit	b2 b1 b0 0 0 0 : AN_0 is selected 0 0 1 : AN_1 is selected 0 1 0 : AN_2 is selected 0 1 1 : AN_3 is selected 1 0 0 : AN_4 is selected 1 0 1 : AN_5 is selected 1 1 0 : AN_6 is selected 1 1 1 : AN_7 is selected (Note 2)	○	○
CH1			○	○
CH2			○	○
MD0	A/D operation mode select bit 0	b4 b3 0 1 : Repeat mode (Note 2)	○	○
MD1			○	○
TRG	Trigger select bit	0 : Software trigger 1 : AD_{TRG} trigger	○	○
ADST	A/D conversion start flag	0 : A/D conversion disabled 1 : A/D conversion started	○	○
CKS0	Frequency select bit 0	0 : $f_{AD}/4$ is selected 1 : $f_{AD}/2$ is selected	○	○

Note 1: If the A/D control register is rewritten during A/D conversion, the conversion result is indeterminate.
Note 2: When changing A/D operation mode, set analog input pin again.

A/D control register 1 (Note)

b7	b6	b5	b4	b3	b2	b1	b0
		1			0		

Symbol ADCON1 — Address 039_{16} — When reset 00_{16}

Bit symbol	Bit name	Function	R	W
SCAN0	A/D sweep pin select bit	Invalid in repeat mode	○	○
SCAN1			○	○
MD2	A/D operation mode select bit 1	0 : Any mode other than repeat sweep mode 1	○	○
BITS	8/10-bit mode select bit	0 : 8-bit mode 1 : 10-bit mode	○	○
CKS1	Frequency select bit 1 (Note 2)	0 : $f_{AD}/2$ or $f_{AD}/4$ is selected 1 : f_{AD} is selected	○	○
VCUT	Vref connect bit	1 : Vref connected	○	○
OPA0	External op-amp connection mode bit	b7 b6 0 0 : ANEX0 and ANEX1 are not used(Note 3) 0 1 : ANEX0 input is A/D converted(Note 4) 1 0 : ANEX1 input is A/D converted(Note 5) 1 1 : External op-amp connection mode(Note 6)	○	○
OPA1			○	○

Note 1: If the A/D control register is rewritten during A/D conversion, the conversion result is indeterminate.
Note 2: When f(X_{IN}) is over 10 MHz, the f_{AD} frequency must be under 10 MHz by dividing.
Note 3: Set "0" to PSL3_5 and PSL3_6 of the function select register B3.
Note 4: Set "1" to PSL3_5 of the function select register B3.
Note 5: Set "1" to PSL3_6 of the function select register B3.
Note 6: Set "1" to PSL3_5 and PSL3_6 of the function select register B3.

Figure 21.5 A/D conversion register in repeat mode

(3) Single sweep mode

In single sweep mode, the pins selected using the A/D sweep pin select bit are used for one-by-one A/D conversion. Table 21.4 shows the specifications of single sweep mode. Figure 21.6 shows the A/D control register in single sweep mode.

Table 21.4 Single sweep mode specifications

Item	Specification
Function	The pins selected by the A/D sweep pin select bit are used for one-by-one A/D conversion
Start condition	Writing “1” to A/D converter start flag
Stop condition	• End of A/D conversion (A/D conversion start flag changes to “0”, except when external trigger is selected) • Writing “0” to A/D conversion start flag
Interrupt request generation timing	End of A/D conversion
Input pin	AN0 and AN1 (2 pins), AN0 to AN3 (4 pins), AN0 to AN5 (6 pins), or AN0 to AN7 (8 pins)
Reading of result of A/D converter	Read A/D register corresponding to selected pin

A/D control register 0 (Note)

b7	b6	b5	b4	b3	b2	b1	b0
			1	0			

Symbol ADCON0 — Address 039616 — When reset 00000XXX2

Bit symbol	Bit name	Function	R	W
CH0	Analog input pin select bit	Invalid in single sweep mode	O	O
CH1			O	O
CH2			O	O
MD0	A/D operation mode select bit 0	b4 b3 1 0 : Single sweep mode	O	O
MD1			O	O
TRG	Trigger select bit	0 : Software trigger 1 : ADTRG trigger	O	O
ADST	A/D conversion start flag	0 : A/D conversion disabled 1 : A/D conversion started	O	O
CKS0	Frequency select bit 0	0 : fAD/4 is selected 1 : fAD/2 is selected	O	O

Note: If the A/D control register is rewritten during A/D conversion, the conversion result is indeterminate.

A/D control register 1 (Note 1)

b7	b6	b5	b4	b3	b2	b1	b0
		1			0		

Symbol ADCON1 — Address 039716 — When reset 0016

Bit symbol	Bit name	Function	R	W
SCAN0	A/D sweep pin select bit	When single sweep and repeat sweep mode 0 are selected b1 b0 0 0 : AN0, AN1 (2 pins) 0 1 : AN0 to AN3 (4 pins) 1 0 : AN0 to AN5 (6 pins) 1 1 : AN0 to AN7 (8 pins)	O	O
SCAN1			O	O
MD2	A/D operation mode select bit 1	0 : Any mode other than repeat sweep mode 1	O	O
BITS	8/10-bit mode select bit	0 : 8-bit mode 1 : 10-bit mode	O	O
CKS1	Frequency select bit 1 (Note 3)	0 : fAD/2 or fAD/4 is selected 1 : fAD is selected	O	O
VCUT	Vref connect bit	1 : Vref connected	O	O
OPA0	External op-amp connection mode bit (Note 2)	b7 b6 0 0 : ANEX0 and ANEX1 are not used(Note 4) 0 1 : ANEX0 input is A/D converted(Note 5) 1 0 : ANEX1 input is A/D converted(Note 6) 1 1 : External op-amp connection mode(Note 7)	O	O
OPA1			O	O

Note 1: If the A/D control register is rewritten during A/D conversion, the conversion result is indeterminate.
Note 2: Neither ‘01’ nor ‘10’ can be selected with the external op-amp connection mode bit.
Note 3: When f(XIN) is over 10 MHz, the fAD frequency must be under 10 MHz by dividing.
Note 4: Set "0" to PSL3_5 and PSL3_6 of the function select register B3.
Note 5: Set "1" to PSL3_5 of the function select register B3.
Note 6: Set "1" to PSL3_6 of the function select register B3.
Note 7: Set "1" to PSL3_5 and PSL3_6 of the function select register B3.

Figure 21.6 A/D conversion register in single sweep mode

(4) Repeat sweep mode 0

In repeat sweep mode 0, the pins selected using the A/D sweep pin select bit are used for repeat sweep A/D conversion. Table 21.5 shows the specifications of repeat sweep mode 0. Figure 21.7 shows the A/D control register in repeat sweep mode 0.

Table 21.5 Repeat sweep mode 0 specifications

Item	Specification
Function	The pins selected by the A/D sweep pin select bit are used for repeat sweep A/D conversion
Start condition	Writing “1” to A/D conversion start flag
Stop condition	Writing “0” to A/D conversion start flag
Interrupt request generation timing	None generated
Input pin	AN0 and AN1 (2 pins), AN0 to AN3 (4 pins), AN0 to AN5 (6 pins), or AN0 to AN7 (8 pins)
Reading of result of A/D converter	Read A/D register corresponding to selected pin (at any time)

A/D control register 0 (Note)

b7	b6	b5	b4	b3	b2	b1	b0
			1	1			

Symbol: ADCON0 — Address: 039616 — When reset: 00000XXX2

Bit symbol	Bit name	Function	R	W
CH0	Analog input pin select bit	Invalid in repeat sweep mode 0	O	O
CH1			O	O
CH2			O	O
MD0	A/D operation mode select bit 0	b4 b3 1 1 : Repeat sweep mode 0	O	O
MD1			O	O
TRG	Trigger select bit	0 : Software trigger 1 : ADTRG trigger	O	O
ADST	A/D conversion start flag	0 : A/D conversion disabled 1 : A/D conversion started	O	O
CKS0	Frequency select bit 0	0 : fAD/4 is selected 1 : fAD/2 is selected	O	O

Note: If the A/D control register is rewritten during A/D conversion, the conversion result is indeterminate.

A/D control register 1 (Note 1)

b7	b6	b5	b4	b3	b2	b1	b0
		1			0		

Symbol: ADCON1 — Address: 039716 — When reset: 0016

Bit symbol	Bit name	Function	R	W
SCAN0	A/D sweep pin select bit	When single sweep and repeat sweep mode 0 are selected b1 b0 0 0 : AN0, AN1 (2 pins) 0 1 : AN0 to AN3 (4 pins) 1 0 : AN0 to AN5 (6 pins) 1 1 : AN0 to AN7 (8 pins)	O	O
SCAN1			O	O
MD2	A/D operation mode select bit 1	0 : Any mode other than repeat sweep mode 1	O	O
BITS	8/10-bit mode select bit	0 : 8-bit mode 1 : 10-bit mode	O	O
CKS1	Frequency select bit 1 (Note 3)	0 : fAD/2 or fAD/4 is selected 1 : fAD is selected	O	O
VCUT	Vref connect bit	1 : Vref connected	O	O
OPA0	External op-amp connection mode bit (Note 2)	b7 b6 0 0 : ANEX0 and ANEX1 are not used(Note 4) 0 1 : ANEX0 input is A/D converted(Note 5) 1 0 : ANEX1 input is A/D converted(Note 6) 1 1 : External op-amp connection mode(Note 7)	O	O
OPA1			O	O

Note 1: If the A/D control register is rewritten during A/D conversion, the conversion result is indeterminate.
Note 2: Neither ‘01’ nor ‘10’ can be selected with the external op-amp connection mode bit.
Note 3: When f(XIN) is over 10 MHz, the fAD frequency must be under 10 MHz by dividing.
Note 4: Set "0" to PSL3_5 and PSL3_6 of the function select register B3.
Note 5: Set "1" to PSL3_5 of the function select register B3.
Note 6: Set "1" to PSL3_6 of the function select register B3.
Note 7: Set "1" to PSL3_5 and PSL3_6 of the function select register B3.

Figure 21.7 A/D conversion register in repeat sweep mode 0

(5) Repeat sweep mode 1

In repeat sweep mode 1, all pins are used for A/D conversion with emphasis on the pin or pins selected using the A/D sweep pin select bit. Table 21.6 shows the specifications of repeat sweep mode 1. Figure 21.8 shows the A/D control register in repeat sweep mode 1.

Table 21.6 Repeat sweep mode 1 specifications

Item	Specification
Function	All pins perform repeat sweep A/D conversion, with emphasis on the pin or pins selected by the A/D sweep pin select bit Example : AN0 selected AN0 → AN1 → AN0 → AN2 → AN0 → AN3, etc
Start condition	Writing "1" to A/D conversion start flag
Stop condition	Writing "0" to A/D conversion start flag
Interrupt request generation timing	None generated
Input pin	AN0 to AN7
With emphasis on the pin	AN0 (1 pin), AN0 and AN1 (2 pins), AN0 to AN2 (3 pins), AN0 to AN3 (4 pins)
Reading of result of A/D converter	Read A/D register corresponding to selected pin (at any time)

A/D control register 0 (Note)

b7	b6	b5	b4	b3	b2	b1	b0
			1	1			

Symbol ADCON0 — Address 039616 — When reset 00000XXX2

Bit symbol	Bit name	Function	R	W
CH0	Analog input pin select bit	Invalid in repeat sweep mode 1	O	O
CH1			O	O
CH2			O	O
MD0	A/D operation mode select bit 0	b4 b3 1 1 : Repeat sweep mode 1	O	O
MD1			O	O
TRG	Trigger select bit	0 : Software trigger 1 : ADTRG trigger	O	O
ADST	A/D conversion start flag	0 : A/D conversion disabled 1 : A/D conversion started	O	O
CKS0	Frequency select bit 0	0 : fAD/4 is selected 1 : fAD/2 is selected	O	O

Note: If the A/D control register is rewritten during A/D conversion, the conversion result is indeterminate.

A/D control register 1 (Note 1)

b7	b6	b5	b4	b3	b2	b1	b0
		1			1		

Symbol ADCON1 — Address 039716 — When reset 0016

Bit symbol	Bit name	Function	R	W
SCAN0	A/D sweep pin select bit	When repeat sweep mode 1 is selected b1 b0 0 0 : AN0 (1 pin) 0 1 : AN0, AN1 (2 pins) 1 0 : AN0 to AN2 (3 pins) 1 1 : AN0 to AN3 (4 pins)	O	O
SCAN1			O	O
MD2	A/D operation mode select bit 1	1 : Repeat sweep mode 1	O	O
BITS	8/10-bit mode select bit	0 : 8-bit mode 1 : 10-bit mode	O	O
CKS1	Frequency select bit 1 (Note 3)	0 : fAD/2 or fAD/4 is selected 1 : fAD is selected	O	O
VCUT	Vref connect bit	1 : Vref connected	O	O
OPA0	External op-amp connection mode bit (Note 2)	b7 b6 0 0 : ANEX0 and ANEX1 are not used(Note 4) 0 1 : ANEX0 input is A/D converted(Note 5) 1 0 : ANEX1 input is A/D converted(Note 6) 1 1 : External op-amp connection mode(Note 7)	O	O
OPA1			O	O

Note 1: If the A/D control register is rewritten during A/D conversion, the conversion result is indeterminate.
Note 2: Neither '01' nor '10' can be selected with the external op-amp connection mode bit.
Note 3: When f(XIN) is over 10 MHz, the fAD frequency must be under 10 MHz by dividing.
Note 4: Set "0" to PSL3_5 and PSL3_6 of the function select register B3.
Note 5: Set "1" to PSL3_5 of the function select register B3.
Note 6: Set "1" to PSL3_6 of the function select register B3.
Note 7: Set "1" to PSL3_5 and PSL3_6 of the function select register B3.

Figure 21.8 A/D conversion register in repeat sweep mode 1

(a) Sample and hold

Sample and hold is selected by setting bit 0 of the A/D control register 2 (address 0394_{16}) to “1”. When sample and hold is selected, the rate of conversion of each pin increases. As a result, a 28 f_{AD} cycle is achieved with 8-bit resolution and 33 f_{AD} with 10-bit resolution. Sample and hold can be selected in all modes. However, in all modes, be sure to specify before starting A/D conversion whether sample and hold is to be used.

(b) Extended analog input pins

In one-shot mode and repeat mode, the input via the extended analog input pins $ANEX_0$ and $ANEX_1$ can also be converted from analog to digital.

When bit 6 of the A/D control register 1 (address 0397_{16}) is “1” and bit 7 is “0”, input via $ANEX_0$ is converted from analog to digital. The result of conversion is stored in A/D register 0.

When bit 6 of the A/D control register 1 (address 0397_{16}) is “0” and bit 7 is “1”, input via $ANEX_1$ is converted from analog to digital. The result of conversion is stored in A/D register 1.

Set the related input peripheral function of the function select register B3 to disabled.

(c) External operation amp connection mode

In this mode, multiple external analog inputs via the extended analog input pins, $ANEX_0$ and $ANEX_1$, can be amplified together by just one operation amp and used as the input for A/D conversion.

When bit 6 of the A/D control register 1 (address 0397_{16}) is “1” and bit 7 is “1”, input via AN_0 to AN_7 is output from $ANEX_0$. The input from $ANEX_1$ is converted from analog to digital and the result stored in the corresponding A/D register. The speed of A/D conversion depends on the response of the external operation amp. Do not connect the $ANEX_0$ and $ANEX_1$ pins directly. Figure 21.9 is an example of how to connect the pins in external operation amp mode.

Set the related input peripheral function of the function select register B3 to disabled.

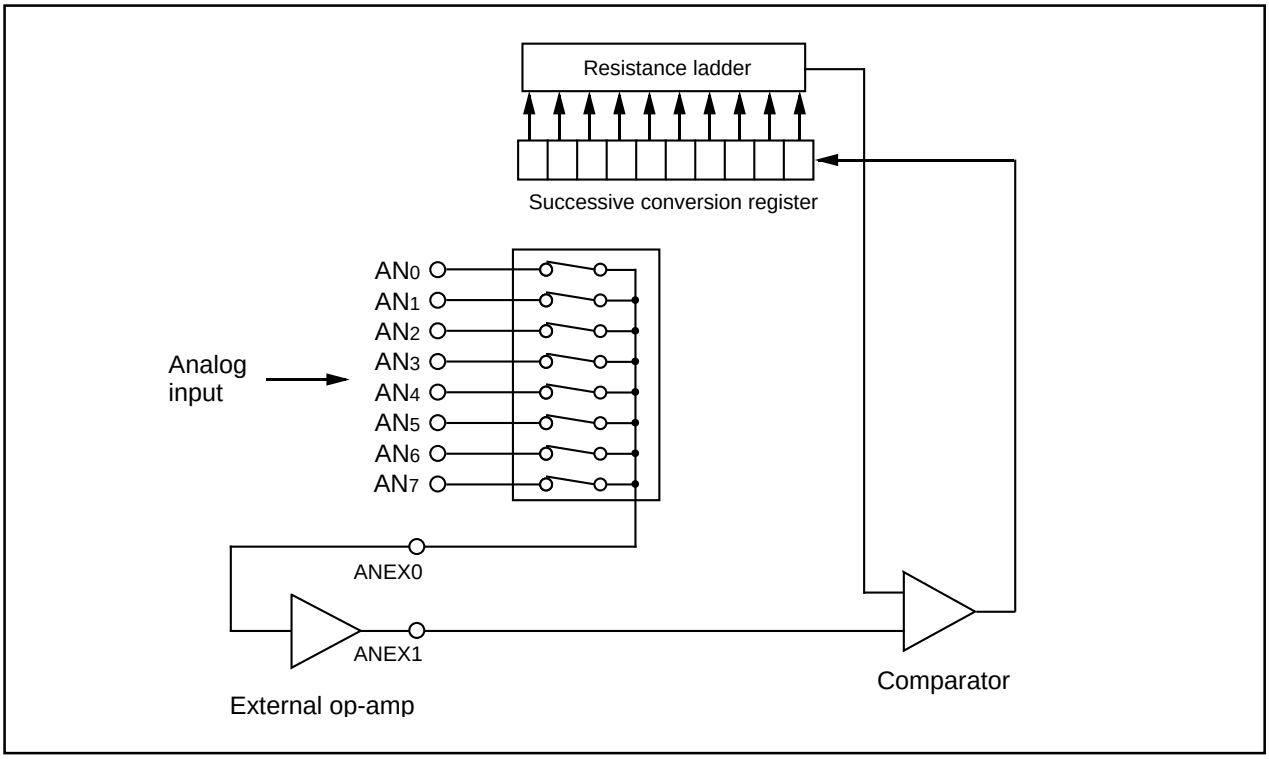

Figure 21.9 Example of external op-amp connection mode

22. D/A Converter

This is an 8-bit, R-2R type D/A converter. The microcomputer contains two independent D/A converters of this type. D/A conversion is performed when a value is written to the corresponding D/A register. Bits 0 and 1 (D/A output enable bits) of the D/A control register decide if the result of conversion is to be output. Set the function select register A3 to I/O port, the related input peripheral function of the function select register B3 to disabled and the direction register to input mode. When the D/A output is enabled, the pull-up function of the corresponding port is automatically disabled.

Output analog voltage (V) is determined by a set value (n : decimal) in the D/A register.

$V = V_{REF} \times n / 256$ (n = 0 to 255)

V_{REF} : reference voltage

Table 22.1 lists the performance of the D/A converter. Figure 22.1 shows the block diagram of the D/A converter. Figure 22.2 shows the D/A control register.

Table 22.1 Performance of D/A converter

Item	Performance
Conversion method	R-2R method
Resolution	8 bits
Analog output pin	2 channels

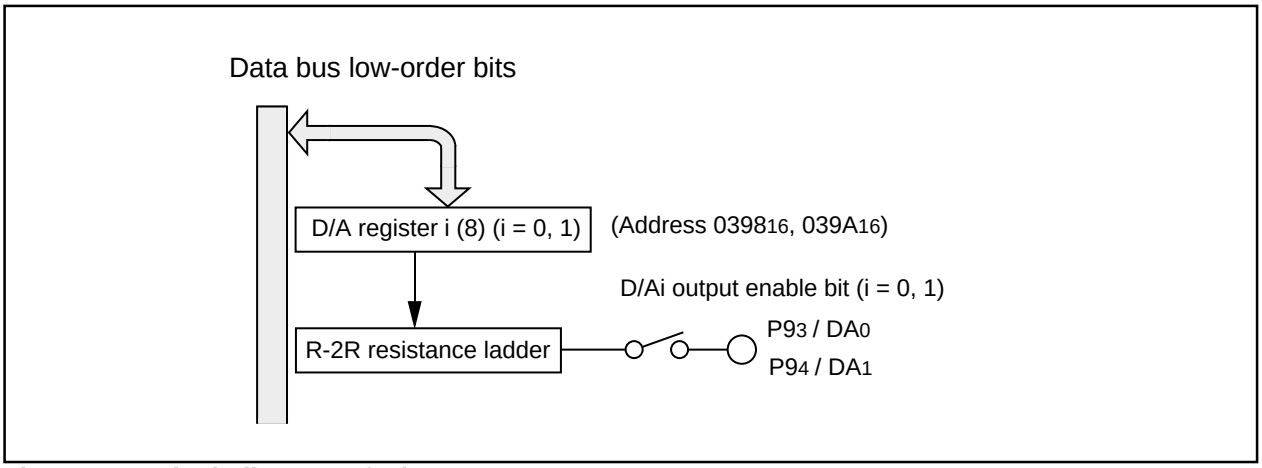

Figure 22.1 Block diagram of D/A converter

D/A control register

b7	b6	b5	b4	b3	b2	b1	b0
X	X	X	X	X	X		

Symbol	Address	When reset
DACON	039C16	0016

Bit symbol	Bit name	Function	R	W
DA0E	D/A0 output enable bit	0 : Output disabled 1 : Output enabled	○	○
DA1E	D/A1 output enable bit	0 : Output disabled 1 : Output enabled	○	○
Nothing is assigned. When write, set "0". When read, the value of these bits is "0".			—	—

D/A register i

b7	b0

Symbol	Address	When reset
DAi (i = 0,1)	039816, 039A16	Indeterminate

Function	R	W
Output value of D/A conversion	○	○

Figure 22.2 D/A control register

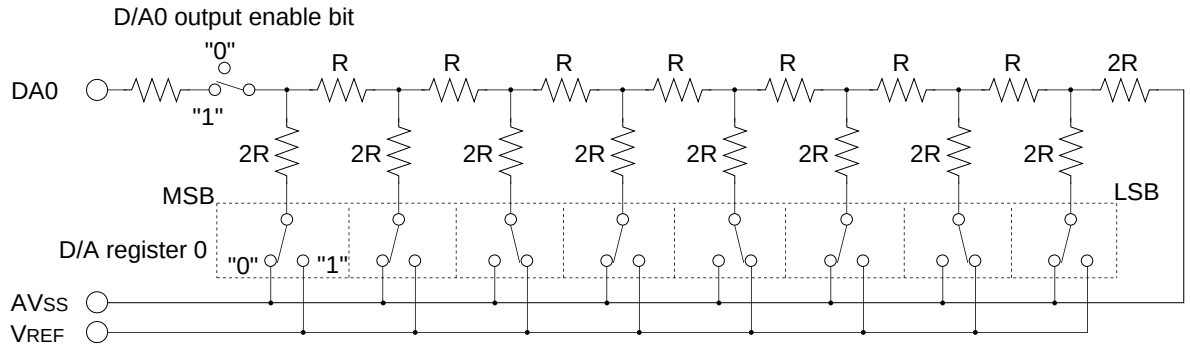

Note 1: In the above figure, the D/A register value is "2A16".
Note 2: This circuit is the same in D/A1.
Note 3: To save power when not using the D/A converter, set the D/A output enable bit to "0" and the D/A register to "0016", and prevent current flowing to the R-2R resistance.

Figure 22.3 D/A converter equivalent circuit

23. CRC Calculation Circuit

The Cyclic Redundancy Check (CRC) calculation circuit detects an error in data blocks. The microcomputer uses a generator polynomial of CRC_CCITT ($X^{16} + X^{12} + X^5 + 1$) to generate CRC code.

The CRC code is a 16-bit code generated for a block of a given data length in multiples of 8 bits. The CRC code is set in a CRC data register each time one byte of data is transferred to a CRC input register after writing an initial value into the CRC data register. Generation of CRC code for one byte of data is completed in two machine cycles.

Figure 23.1 shows the block diagram of the CRC circuit. Figure 23.2 shows the CRC-related registers.

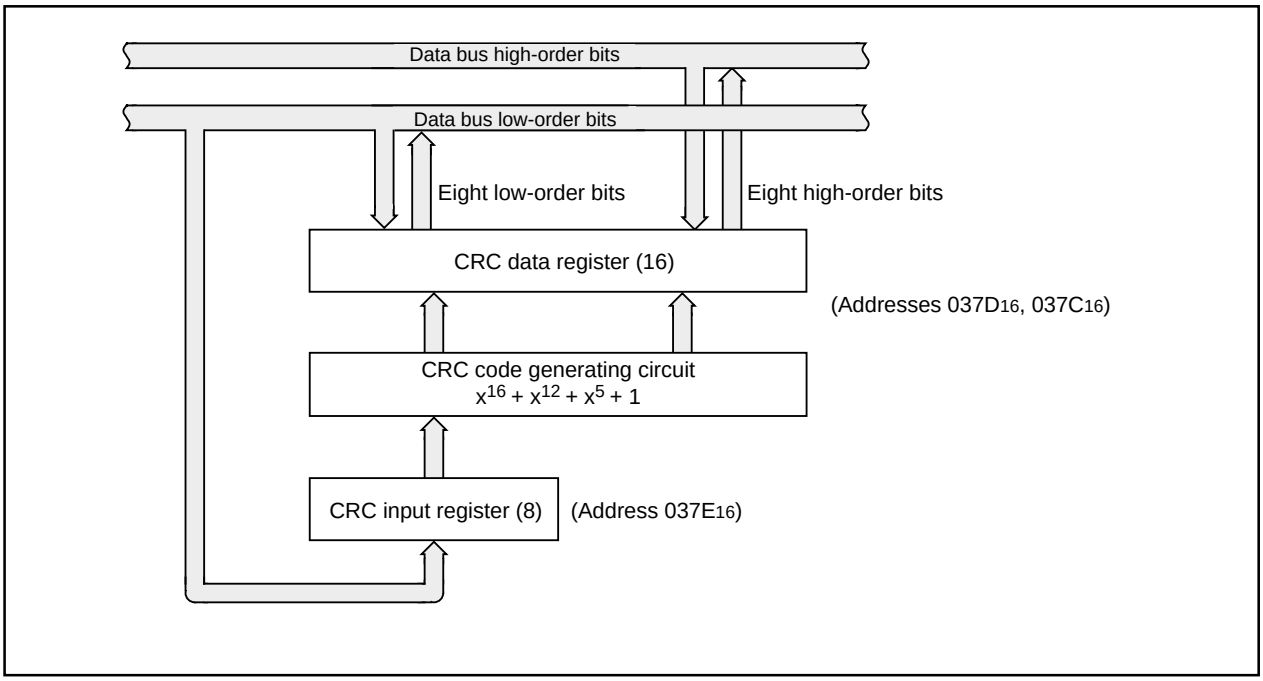

Figure 23.1 Block diagram of CRC circuit

CRC data register

(b15) b7 (b8) b0 b7 b0

Symbol	Address	When reset
CRCD	037D16, 037C16	Indeterminate

Function	Values that can be set	R	W
CRC calculation result output register	000016 to FFFF16	○	○

CRC input register

b7 b0

Symbo	Address	When reset
CRCIN	037E16	Indeterminate

Function	Values that can be set	R	W
Data input register	0016 to FF16	○	○

Figure 23.2 CRC-related registers

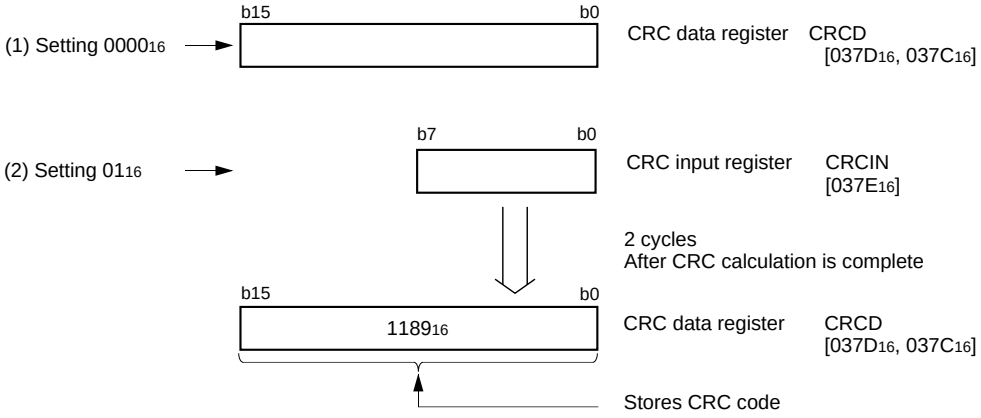

The code resulting from sending 01_{16} in LSB first mode is (1000 0000). Thus the CRC code in the generating polynomial, $(X^{16} + X^{12} + X^5 + 1)$, becomes the remainder resulting from dividing (1000 0000) X^{16} by (1 0001 0000 0010 0001) in conformity with the modulo-2 operation.

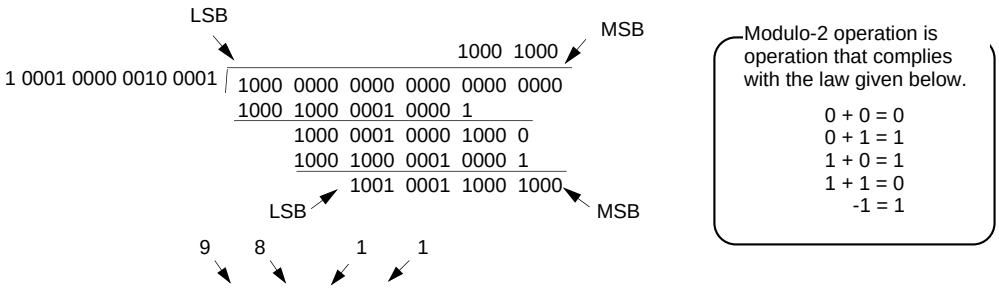

Thus the CRC code becomes (1001 0001 1000 1000). Since the operation is in LSB first mode, the (1001 0001 1000 1000) corresponds to 1189_{16} in hexadecimal notation. If the CRC operation in MSB first mode is necessary in the CRC operation circuit built in the M16C, switch between the LSB side and the MSB side of the input-holding bits, and carry out the CRC operation. Also switch between the MSB and LSB of the result as stored in CRC data.

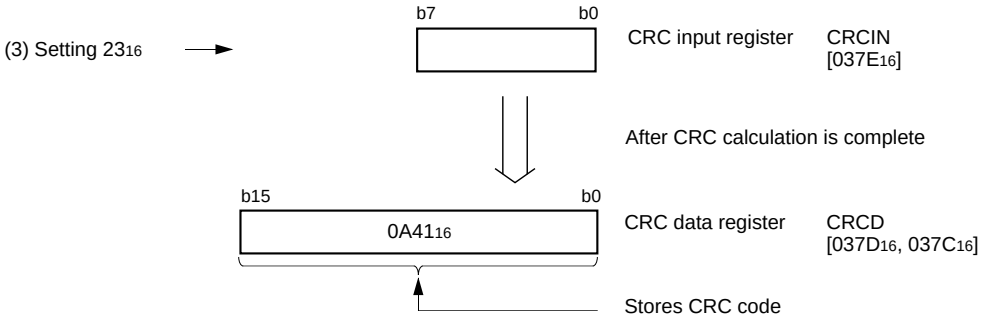

Figure 23.3 CRC example

24. XY Converter

XY conversion rotates the 16 x 16 matrix data by 90 degrees. It can also be used to invert the top and bottom of the 16-bit data. Figure 24.1 shows the XY control register.

The Xi and the Yi registers are 16-bit registers. There are 16 of each (where i= 0 to 15).

The Xi and Yi registers are mapped to the same address. The Xi register is a write-only register, while the Yi register is a read-only register. Be sure to access the Xi and Yi registers in 16-bit units from an even address. Operation cannot be guaranteed if you attempt to access these registers in 8-bit units.

XY control register



Symbol	Address	When reset
XYC	$02E0_{16}$	$XXXXXX00_2$

Bit symbol	Bit name	Function	R	W
XYC0	Read-mode set bit	0 : Data conversion 1 : No data conversion	○	○
XYC1	Write-mode set bit	0 : No bit mapping conversion 1 : Bit mapping conversion	○	○
Nothing is assigned. When write, set "0". When read, the value of these bits is indeterminate.			–	–

Figure 24.1 XY control register

The reading of the Yi register is controlled by the read-mode set bit (bit 0 at address 02E0$_{16}$).
When the read-mode set bit (bit 0 at address 02E0$_{16}$) is “0”, specific bits in the Xi register can be read at the same time as the Yi register is read.
For example, when you read the Y0 register, bit 0 is read as bit 0 of the X0 register, bit 1 is read as bit 0 of the X1 register, ..., bit 14 is read as bit 0 of the X14 register, bit 15 as bit 0 of the X15 register. Similarly, when you read the Y15 register, bit 0 is bit 15 of the X0 register, bit 1 is bit 15 of the X1 register, ..., bit 14 is bit 15 of the X14 register, bit 15 is bit 15 of the X15 register.
Figure 24.2 shows the conversion table when the read mode set bit = “0”. Figure 24.3 shows the XY conversion example.

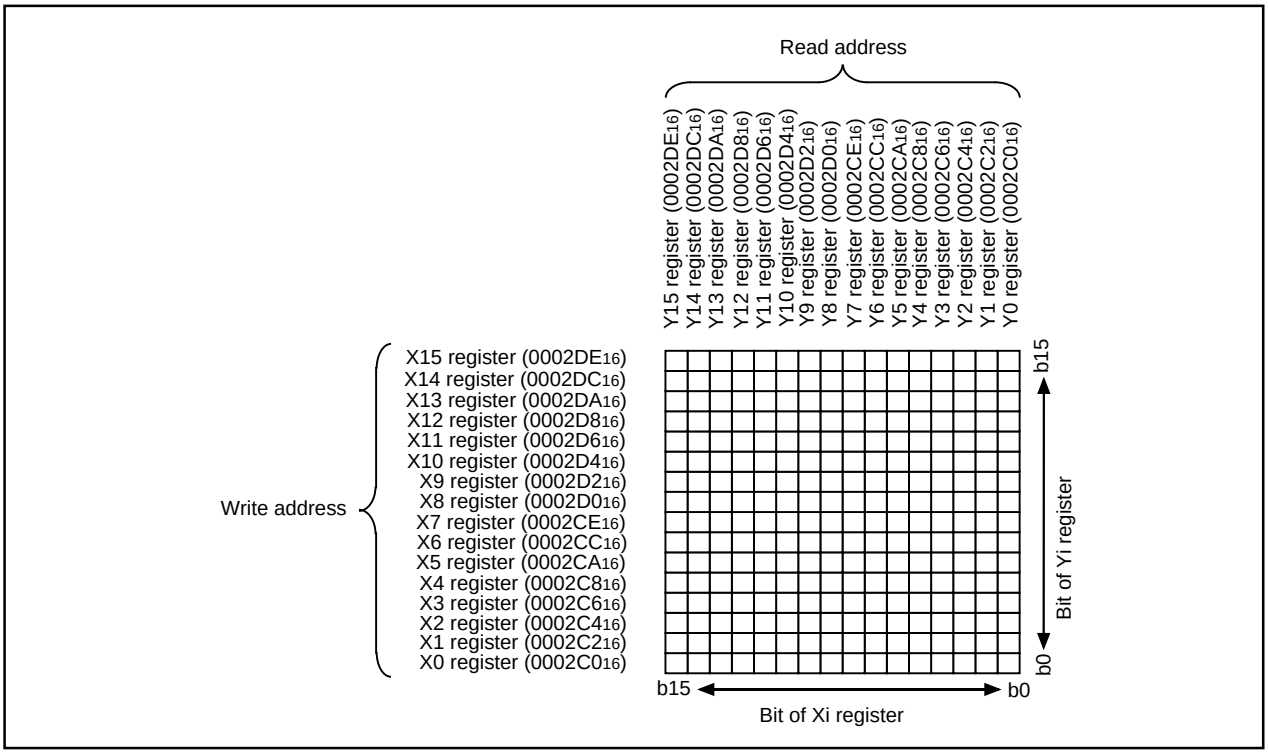

Figure 24.2 Conversion table when the read mode set bit = “0”

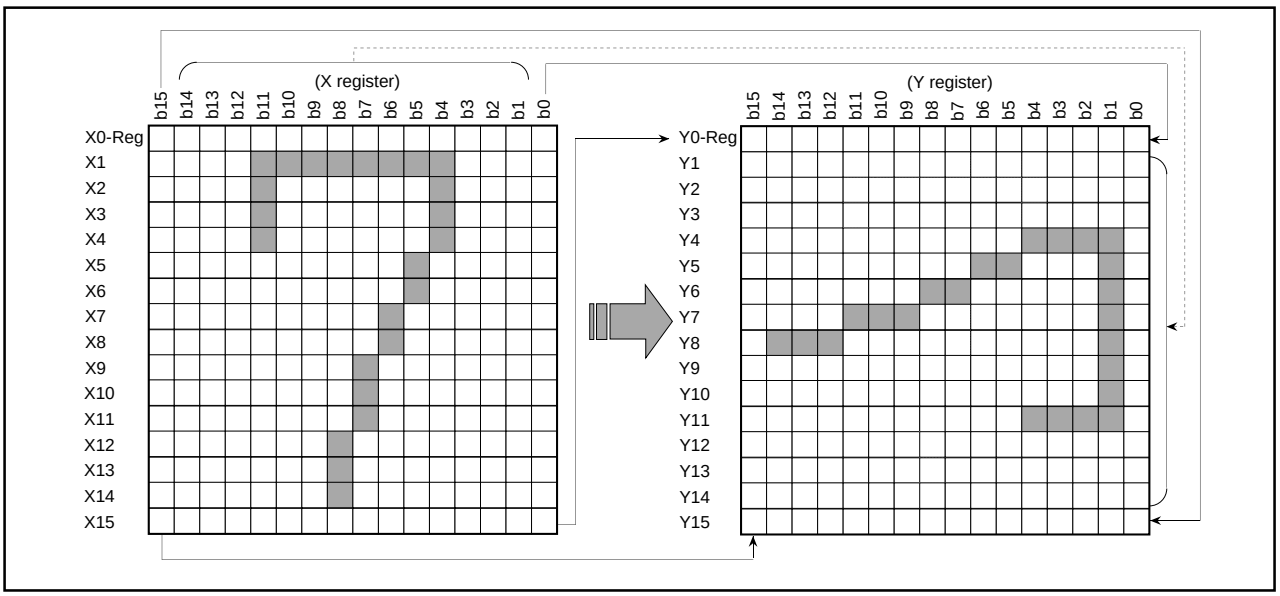

Figure 24.3 XY conversion example

When the read-mode set bit (bit 0 at address 02E0$_{16}$) is “1”, you can read the value written to the Xi register by reading the Yi register. Figure 24.4 shows the conversion table when the read mode set bit = “1”.

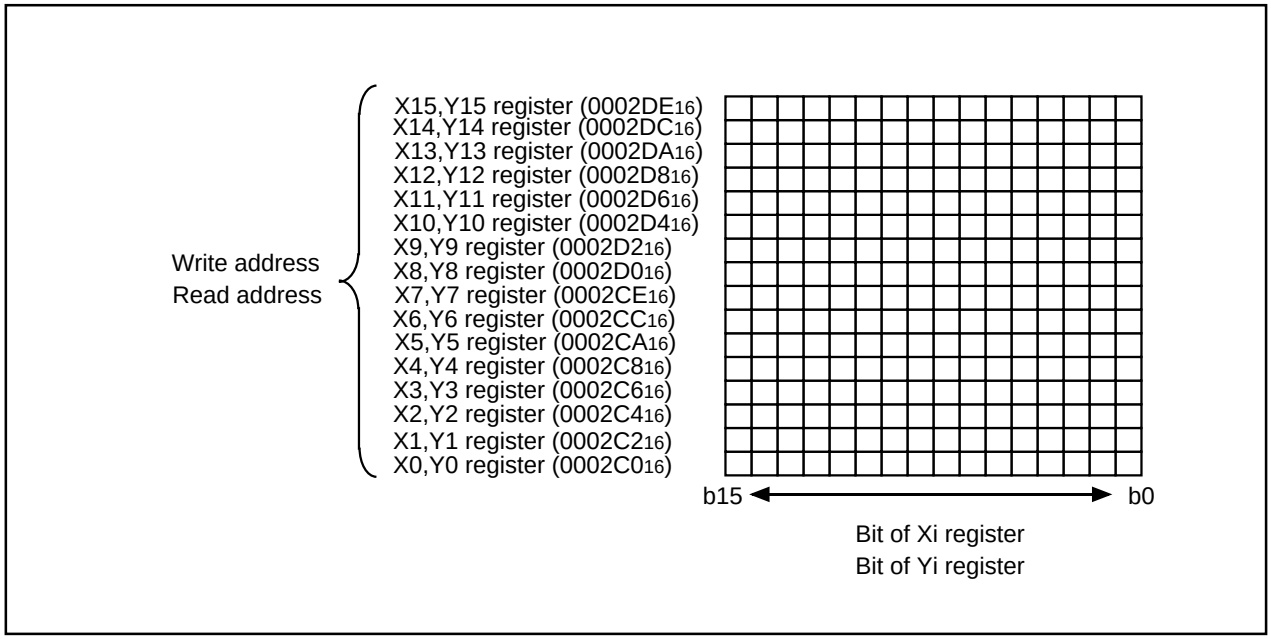

Figure 24.4 Conversion table when the read mode set bit = “1”

The value written to the Xi register is controlled by the write mode set bit (bit 1 at address 02E0$_{16}$).
When the write mode set bit (bit 1 at address 02E0$_{16}$) is “0” and data is written to the Xi register, the bit stream is written directly.
When the write mode set bit (bit 1 at address 02E0$_{16}$) is “1” and data is written to the Xi register, the bit sequence is reversed so that the high becomes low and vice versa. Figure 24.5 shows the conversion table when the write mode set bit = “1”.

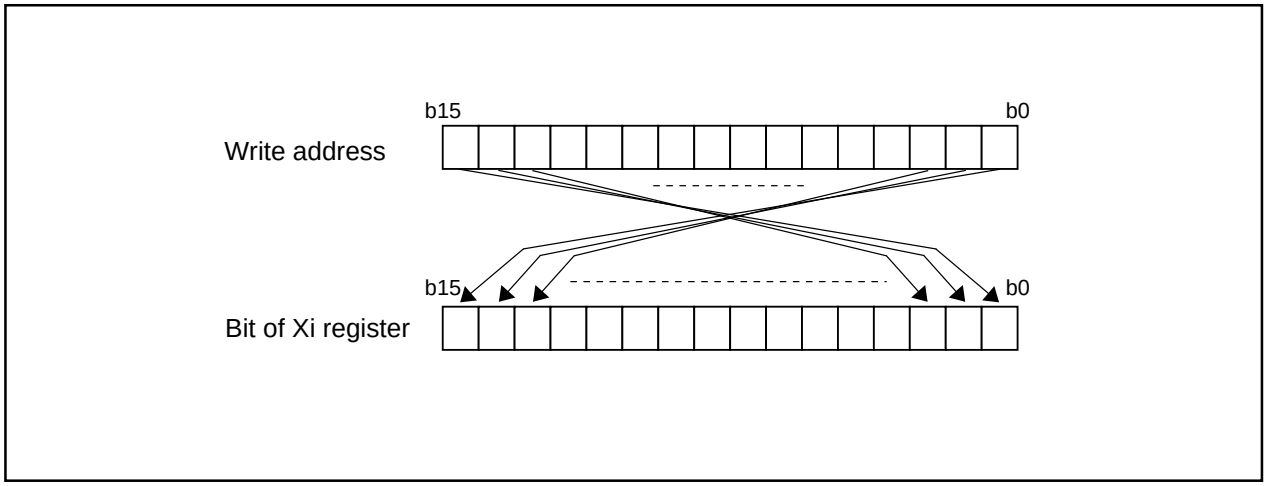

Figure 24.5 Conversion table when the write mode set bit = “1”

25. DRAM Controller

There is a built in DRAM controller to which it is possible to connect between 512 Kbytes and 8 Mbytes of DRAM. Table 25.1 shows the functions of the DRAM controller.

Table 25.1 DRAM Controller Functions

DRAM space	512KB, 1MB, 2MB, 4MB, 8MB
Bus control	2CAS/1W
Refresh	$\overline{CAS}$ before $\overline{RAS}$ refresh Self refresh-compatible
Function modes	EDO-compatible, fast page mode-compatible
Waits	1 wait or 2 waits, programmable

To use the DRAM controller, use the DRAM space select bit of the DRAM control register (address 0040_{16}) to specify the DRAM size. Figure 25.1 shows the DRAM control register.
The DRAM controller cannot be used in external memory mode 3 (bits 1 and 2 at address 0005_{16} are "11_2"). Always use the DRAM controller in external memory modes 0, 1, or 2.
When the data bus width is 16-bit in DRAM area, set "1" to R/W mode select bit (bit 2 at address 0004_{16}). Set wait time between after DRAM power ON and before memory processing, and processing necessary for dummy cycle to refresh DRAM by software.

DRAM control register



Symbol: DRAMCONT — Address: 0004_{16} — When reset: Indeterminate (Note 4)

Bit symbol	Bit name	Function	R	W
WT	Wait select bit (Note 1)	0 : Two wait 1 : One wait	○	○
AR0	DRAM space select bit	b3 b2 b1 0 0 0 : DRAM ignored 0 0 1 : Inhibit 0 1 0 : 0.5MB 0 1 1 : 1MB 1 0 0 : 2MB 1 0 1 : 4MB 1 1 0 : 8MB 1 1 1 : Inhibit	○	○
AR1			○	○
AR2			○	○
Nothing is assigned. When write, set "0". When read, the value of these bits is indeterminate.			–	–
SREF	Self-refresh mode bit (Note 2)	0: Self-refresh OFF 1: Self-refresh ON	○	○

Note 1: The number of cycles with 2 waits is 3-2-2. With 1 wait, it is 2-1-1.
Note 2: When you set "1", both $\overline{RAS}$ and $\overline{CAS}$ change to "L". When you set "0", $\overline{RAS}$ and $\overline{CAS}$ change to "H" and then normal operation (read/write, refresh) is resumed. In Stop mode, there is no control.
Note 3: Set the bus width using the external data bus width control register (address $000B_{16}$). When selecting 8-bit bus width, $\overline{CASH}$ is indeterminate.
Note 4: After reset, the content of this register is indeterminate.
DRAM controller starts the operation after writing to this register.

Figure 25.1 DRAM control register

• DRAM Controller Multiplex Address Output

The DRAM controller outputs the row addresses and column addresses as a multiplexed signal to the address bus A_8 to A_{20}. Figure 25.2 shows the output format for multiplexed addresses.

8-bit bus mode

Pin function	MA12 (A20)	MA11 (A19)	MA10 (A18)	MA9 (A17)	MA8 (A16)	MA7 (A15)	MA6 (A14)	MA5 (A13)	MA4 (A12)	MA3 (A11)	MA2 (A10)	MA1 (A9)	MA0 (A8)
Row address	(A20)	(A19)	A18	A17	A16	A15	A14	A13	A12	A11	A10	A9	–
Column address	(A22)	(A22)	A19	A8	A7	A6	A5	A4	A3	A2	A1	A0	–
	512KB, 1MB												
Row address	(A20)	A19	A18	A17	A16	A15	A14	A13	A12	A11	A10	A9	–
Column address	(A22)	A21	A20	A8	A7	A6	A5	A4	A3	A2	A1	A0	–
	2MB, 4MB												
Row address	A20	A19	A18	A17	A16	A15	A14	A13	A12	A11	A10	A9	–
Column address	(A22)	A22	A21	A8	A7	A6	A5	A4	A3	A2	A1	A0	–
	8MB												

16-bit bus mode

Pin function	MA12 (A20)	MA11 (A19)	MA10 (A18)	MA9 (A17)	MA8 (A16)	MA7 (A15)	MA6 (A14)	MA5 (A13)	MA4 (A12)	MA3 (A11)	MA2 (A10)	MA1 (A9)	MA0 (A8)
Row address	(A20)	(A19)	A18	A17	A16	A15	A14	A13	A12	A11	A10	(A9)	–
Column address	(A22)	(A20)	$\overline{A9}$	A8	A7	A6	A5	A4	A3	A2	A1	(A0)	–
	512KB												
Row address	(A20)	A19	A18	A17	A16	A15	A14	A13	A12	A11	A10	(A9)	–
Column address	(A22)	A20	$\overline{A9}$	A8	A7	A6	A5	A4	A3	A2	A1	(A0)	–
	1MB, 2MB												
Row address	A20	A19	A18	A17	A16	A15	A14	A13	A12	A11	A10	(A9)	–
Column address	A22	A21	$\overline{A9}$	A8	A7	A6	A5	A4	A3	A2	A1	(A0)	–
	4MB, 8MB (Note 2)												

Note 1: ( ) invalid bit: bits that change according to selected mode (8-bit/16-bit bus mode, DRAM space).
Note 2: The figure is for 4Mx1 or 4Mx4 memory configuration. If you are using a 4Mx16 configuration, use combinations of the following: For row addresses, MA0 to MA12; for column addresses MA2 to MA8, MA11, and MA12. Or for row addresses MA1 to MA12; for column addresses MA2 to MA9, MA11, MA12.
Note 3: "–" is indeterminate.

Figure 25.2 Output format for multiplexed addresses

- **Refresh**

The refresh method is $\overline{CAS}$ before $\overline{RAS}$. The refresh interval is set by the DRAM refresh interval set register (address 0041_{16}). The refresh signal is not output in HOLD state. Figure 25.3 shows the DRAM refresh interval set register.

Use the following formula to determine the value to set in the refresh interval set register.

Refresh interval set register value (0 to 255) = refresh interval time / (BCLK frequency X 32) - 1

DRAM refresh interval set register



Symbol	Address	When reset
REFCNT	0004_{16}	Indeterminate

Bit symbol	Bit name	Function	R	W
REFCNT0	Refresh interval set bit	b7 b6 b5 b4 b3 b2 b1 b0 0 0 0 0 0 0 0 0 : 1.6 µs 0 0 0 0 0 0 0 1 : 3.2 µs 0 0 0 0 0 0 1 0 : 4.8 µs • • • 1 1 1 1 1 1 1 1 : 409.6 µs (Note)	○	○
REFCNT1			○	○
REFCNT2			○	○
REFCNT3			○	○
REFCNT4			○	○
REFCNT5			○	○
REFCNT6			○	○
REFCNT7			○	○

Note: Refresh interval at 20 MHz operating (no division)
Refresh interval = BCLK frequency X (refresh interval set bit + 1) X 32

Figure 25.3 DRAM refresh interval set register

The DRAM self-refresh operates in STOP mode, etc.
When shifting to self-refresh, select DRAM ignored by the DRAM space select bit. In the next instruction, simultaneously set the DRAM space select bit and self-refresh ON by self-refresh mode bit. Also, insert two NOPs after the instruction that sets the self-refresh mode bit to "1".
Do not access external memory while operating in self-refresh. (All external memory space access is inhibited.)
When disabling self-refresh, simultaneously select DRAM ignored by the DRAM space select bit and self-refresh OFF by self-refresh mode bit. In the next instruction, set the DRAM space select bit.
Do not access the DRAM space immediately after setting the DRAM space select bit.

Example) One wait is selected by the wait select bit and 4MB is selected by the DRAM space select bit

Shifting to self-refresh

```
•••
mov.b   #00000001b,DRAMCONT     ;DRAM ignored, one wait is selected
mov.b   #10001011b,DRAMCONT     ;Set self-refresh, select 4MB and one wait
nop                             ;Two nops are needed
nop                             ;
•••
```

Disable self-refresh

```
•••
mov.b   #00000001b,DRAMCONT     ;Disable self-refresh, DRAM ignored, one wait is
                                ;selected
mov.b   #00001011b,DRAMCONT     ;Select 4MB and one wait
nop                             ;Inhibit instruction to access DRAM area
nop
•••
```

Figures 25.4 to 25.6 show the bus timing during DRAM access.

< Read cycle (wait control bit = 0) >

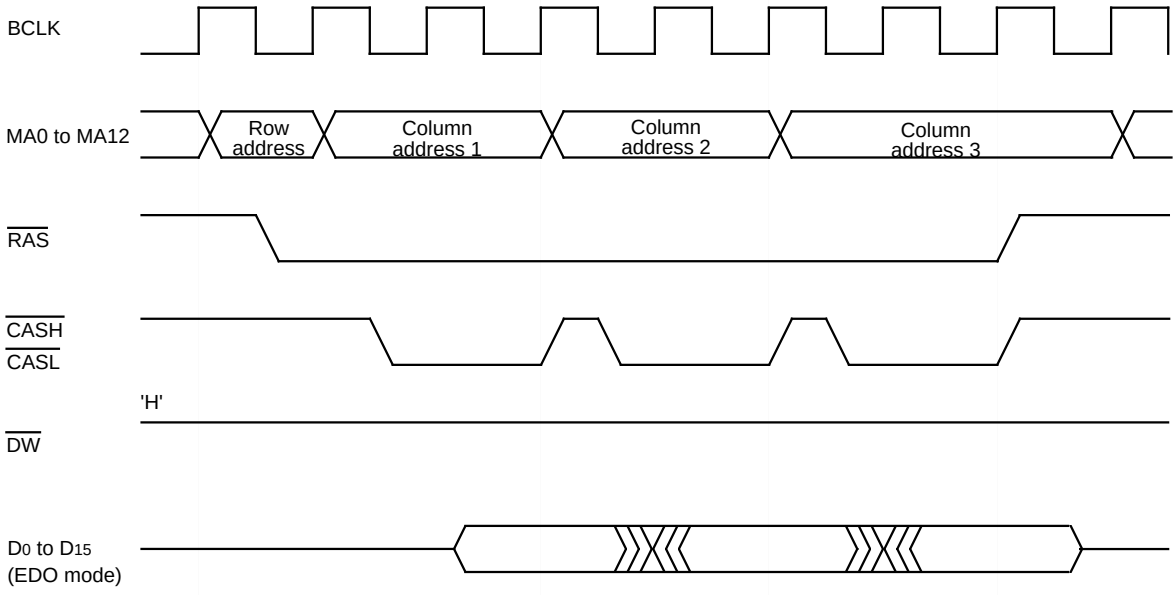

Note : Only $\overline{CASL}$ is operating in 8-bit data bus width.

< Write cycle (wait control bit = 0) >

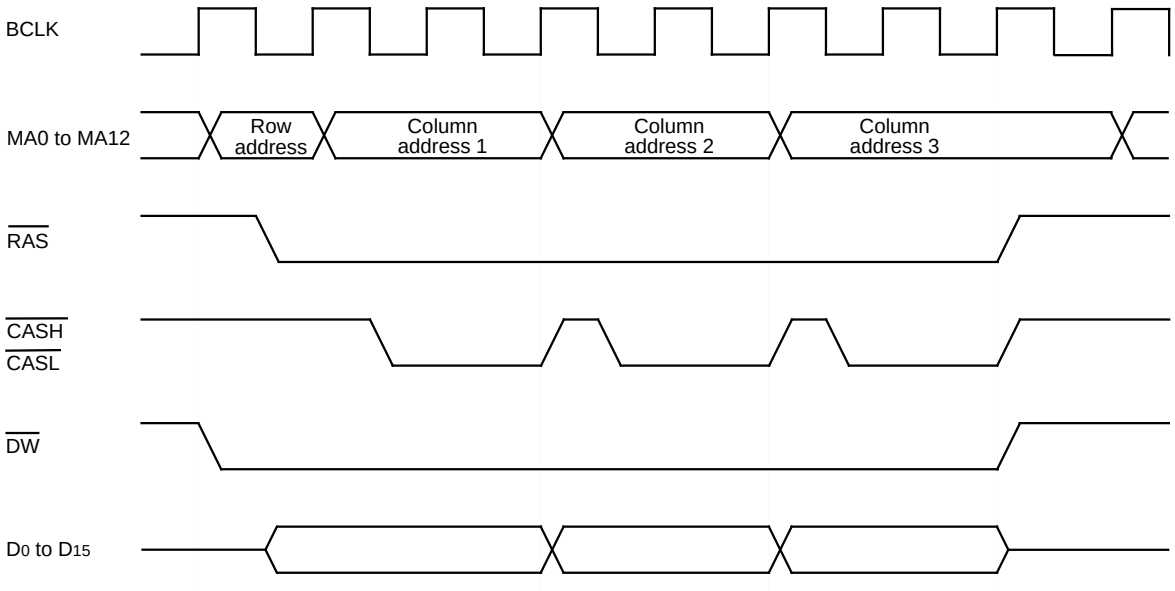

Note : Only $\overline{CASL}$ is operating in 8-bit data bus width.

Figure 25.4 The bus timing during DRAM access (1)

< Read cycle (wait control bit = 1) >

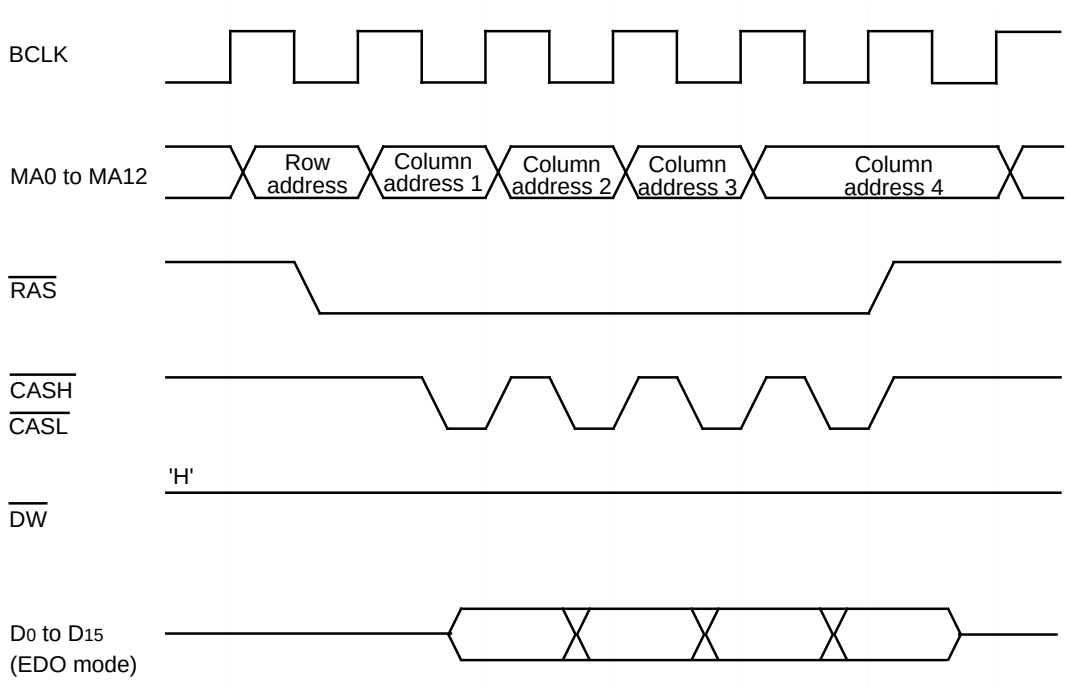

Note : Only $\overline{CASL}$ is operating in 8-bit data bus width.

< Write cycle (wait control bit = 1) >

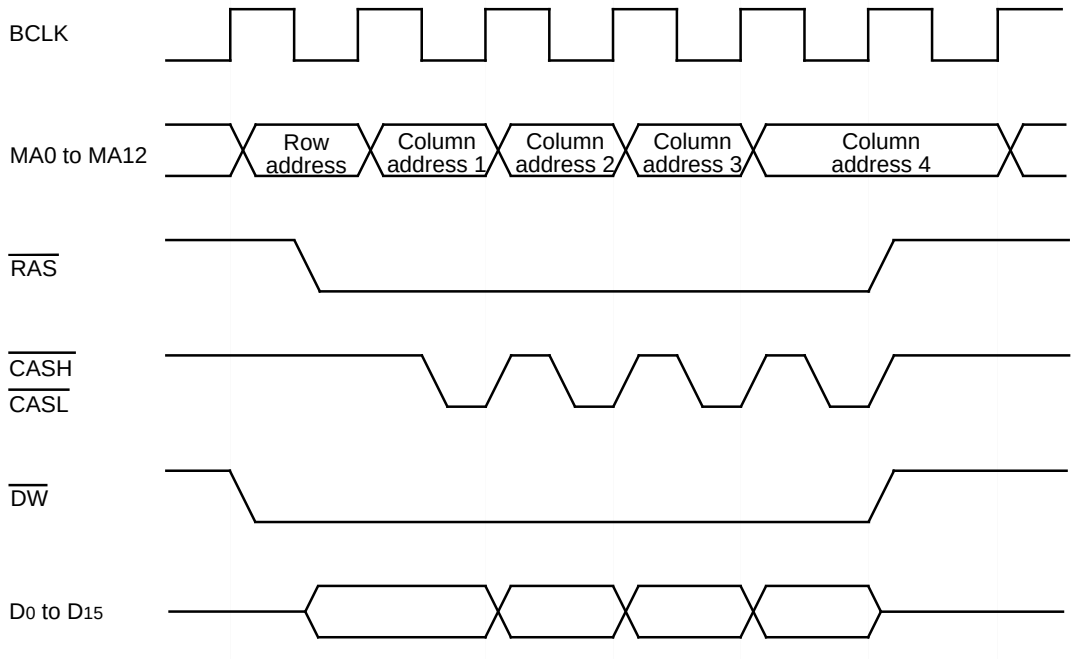

Note : Only $\overline{CASL}$ is operating in 8-bit data bus width.

Figure 25.5 The bus timing during DRAM access (2)

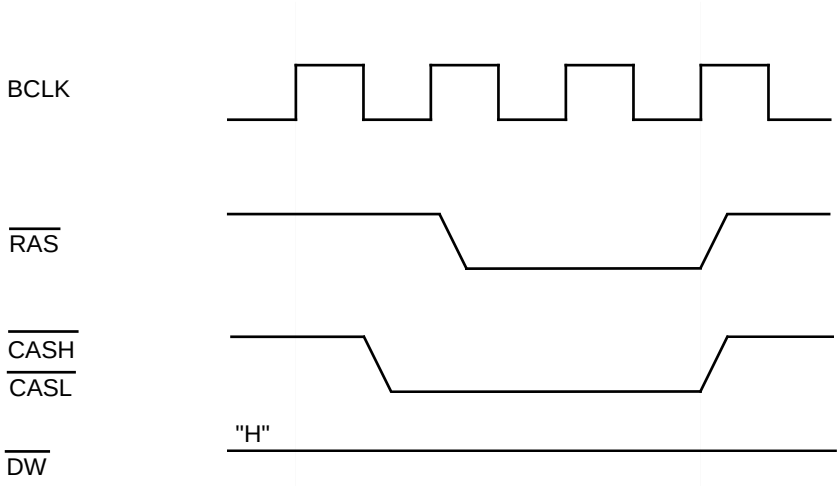

< $\overline{CAS}$ before $\overline{RAS}$ refresh cycle >

Note : Only $\overline{CASL}$ is operating in 8-bit data bus width.

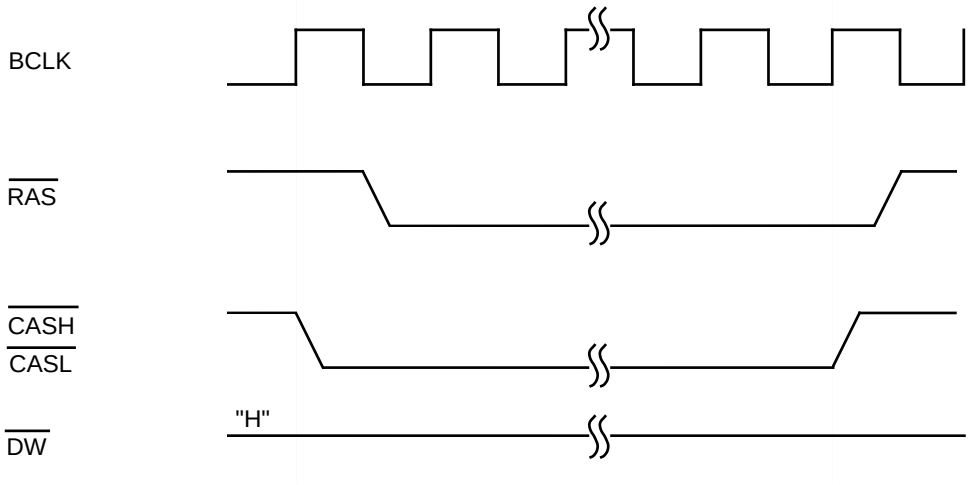

< Self refresh cycle >

Note : Only $\overline{CASL}$ is operating in 8-bit data bus width.

Figure 25.6 The bus timing during DRAM access (3)

26. Programmable I/O Ports

There are 87 programmable I/O ports for 100-pin version: P0 to P10 (excluding $P8_5$). There are 123 programmable I/O ports for 144-pin version: P0 to P15 (excluding $P8_5$). Each port can be set independently for input or output using the direction register. A pull-up resistance for each block of 4 ports can be set. $P8_5$ is an input-only port and has no built-in pull-up resistance.

Figures 26.1 to 26.3 show the programmable I/O ports.

Each pin functions as a programmable I/O port and as the I/O for the built-in peripheral devices.

To use the pins as the inputs for the built-in peripheral devices, set the direction register of each pin to input mode. When the pins are used as the outputs for the built-in peripheral devices (other than the D/A converter), set the corresponding function select registers A, B and C. When pins are to be used as the outputs for the D/A converter, set the function select register of each pin to I/O port, and set the direction registers to input mode.

Table 26.1 lists each port and peripheral function.

See the descriptions of the respective functions for how to set up the built-in peripheral devices.

(1) Direction registers

Figures 26.4 and 26.5 show the direction registers.

These registers are used to choose the direction of the programmable I/O ports. Each bit in these registers corresponds one for one to each I/O pin.

In memory expansion and microprocessor mode, the contents of corresponding direction register of pins A_0 to A_{22}, $\overline{A_{23}}$, D_0 to D_{15}, MA_0 to MA_{12}, $\overline{CS0}$ to $\overline{CS3}$, $\overline{WRL}/\overline{WR}/\overline{CASL}$, $\overline{WRH}/\overline{BHE}/\overline{CASH}$, $\overline{RD}/\overline{DW}$, BCLK/ALE/$CLK_{OUT}$, $\overline{HLDA}$/ALE, $\overline{HOLD}$, ALE/$\overline{RAS}$, and $\overline{RDY}$ are not changed.

Note: There is no direction register bit for $P8_5$.

(2) Port registers

Figures 26.6 and 26.7 show the port registers.

These registers are used to write and read data for input and output to and from an external device. A port register consists of a port latch to hold output data and a circuit to read the status of a pin. Each bit in port registers corresponds one for one to each I/O pin.

In memory expansion and microprocessor mode, the contents of corresponding port register of pins A_0 to A_{22}, $\overline{A_{23}}$, D_0 to D_{15}, MA_0 to MA_{12}, $\overline{CS0}$ to $\overline{CS3}$, $\overline{WRL}/\overline{WR}/\overline{CASL}$, $\overline{WRH}/\overline{BHE}/\overline{CASH}$, $\overline{RD}/\overline{DW}$, BCLK/ALE/$CLK_{OUT}$, $\overline{HLDA}$/ALE, $\overline{HOLD}$, ALE/$\overline{RAS}$, and $\overline{RDY}$ are not changed.

(3) Function select register A

Figures 26.8 and 26.9 show the function select registers A.

The register is used to select port output and peripheral function output when the port functions for both port output and peripheral function output.

Each bit of this register corresponds to each pin that functions for both port output and peripheral function output.

(4) Function select register B

Figures 26.10 and 26.11 show the function select registers B.

This register selects the 1st peripheral function output and second peripheral function output when multiple peripheral function outputs are assigned to a pin. For pins with a third peripheral function, this register selects whether to enable the function select register C, or output the second peripheral function.

Each bit of this register corresponds to each pin that has multiple peripheral function outputs assigned to it.

This register is enabled when the bits of the corresponding function select register A are set for peripheral functions.

The bit 3 to bit 6 of function select register B3 is ignored bit for input peripheral function. When using DA0/DA1 and ANEX0/ANEX1, set related bit to "1". When not using DA0/DA1 or ANEX0/ANEX1, set related bit to "0".

(5) Function select register C

Figure 26.12 shows the function select register C.

This register is used to select the first peripheral function output and the third peripheral function output when three peripheral function outputs are assigned to a pin.

This register is effective when the bits of the function select register A of the counterpart pin have selected a peripheral function and when the function select register B has made effective the function select register C.

The bit 7 (PSC_7) is assigned the key-in interrupt inhibit bit. Setting 1 in the key-in interrupt inhibit bit causes no key-in interrupts regardless of the settings in the interrupt control register even if L is entered in pins KI_0 to KI_3. With 1 set in the key-in interrupt inhibit bit, input from a port pin cannot be effected even if the port direction register is set to input mode.

(6) Pull-up control registers

Figures 26.13 and 26.14 show the pull-up control registers.

The pull-up control register can be set to apply a pull-up resistance to each block of 4 ports. When ports are set to have a pull-up resistance, the pull-up resistance is connected only when the direction register is set for input.

Since P0 to P5 operate as the bus in memory expansion mode and microprocessor mode, do not set the pull-up control register. However, it is possible to select pull-up resistance presence to the usable port as I/O port by setting.

(7) Port control register

Figure 26.15 shows the port control register.

This register is used to choose whether to make port P1 a CMOS port or an Nch open drain. In the Nch open drain, the port P1 has no function that a complete open drain but keeps the CMOS port's Pch always turned off. Thus the absolute maximum rating of the input voltage falls within the range from - 0.3 V to Vcc + 0.3 V.

The port control register functions similarly to the above also in the case in which port P1 can be used as a port when the bus width in the full external areas comprises 8 bits in either microprocessor mode or in memory expansion mode.

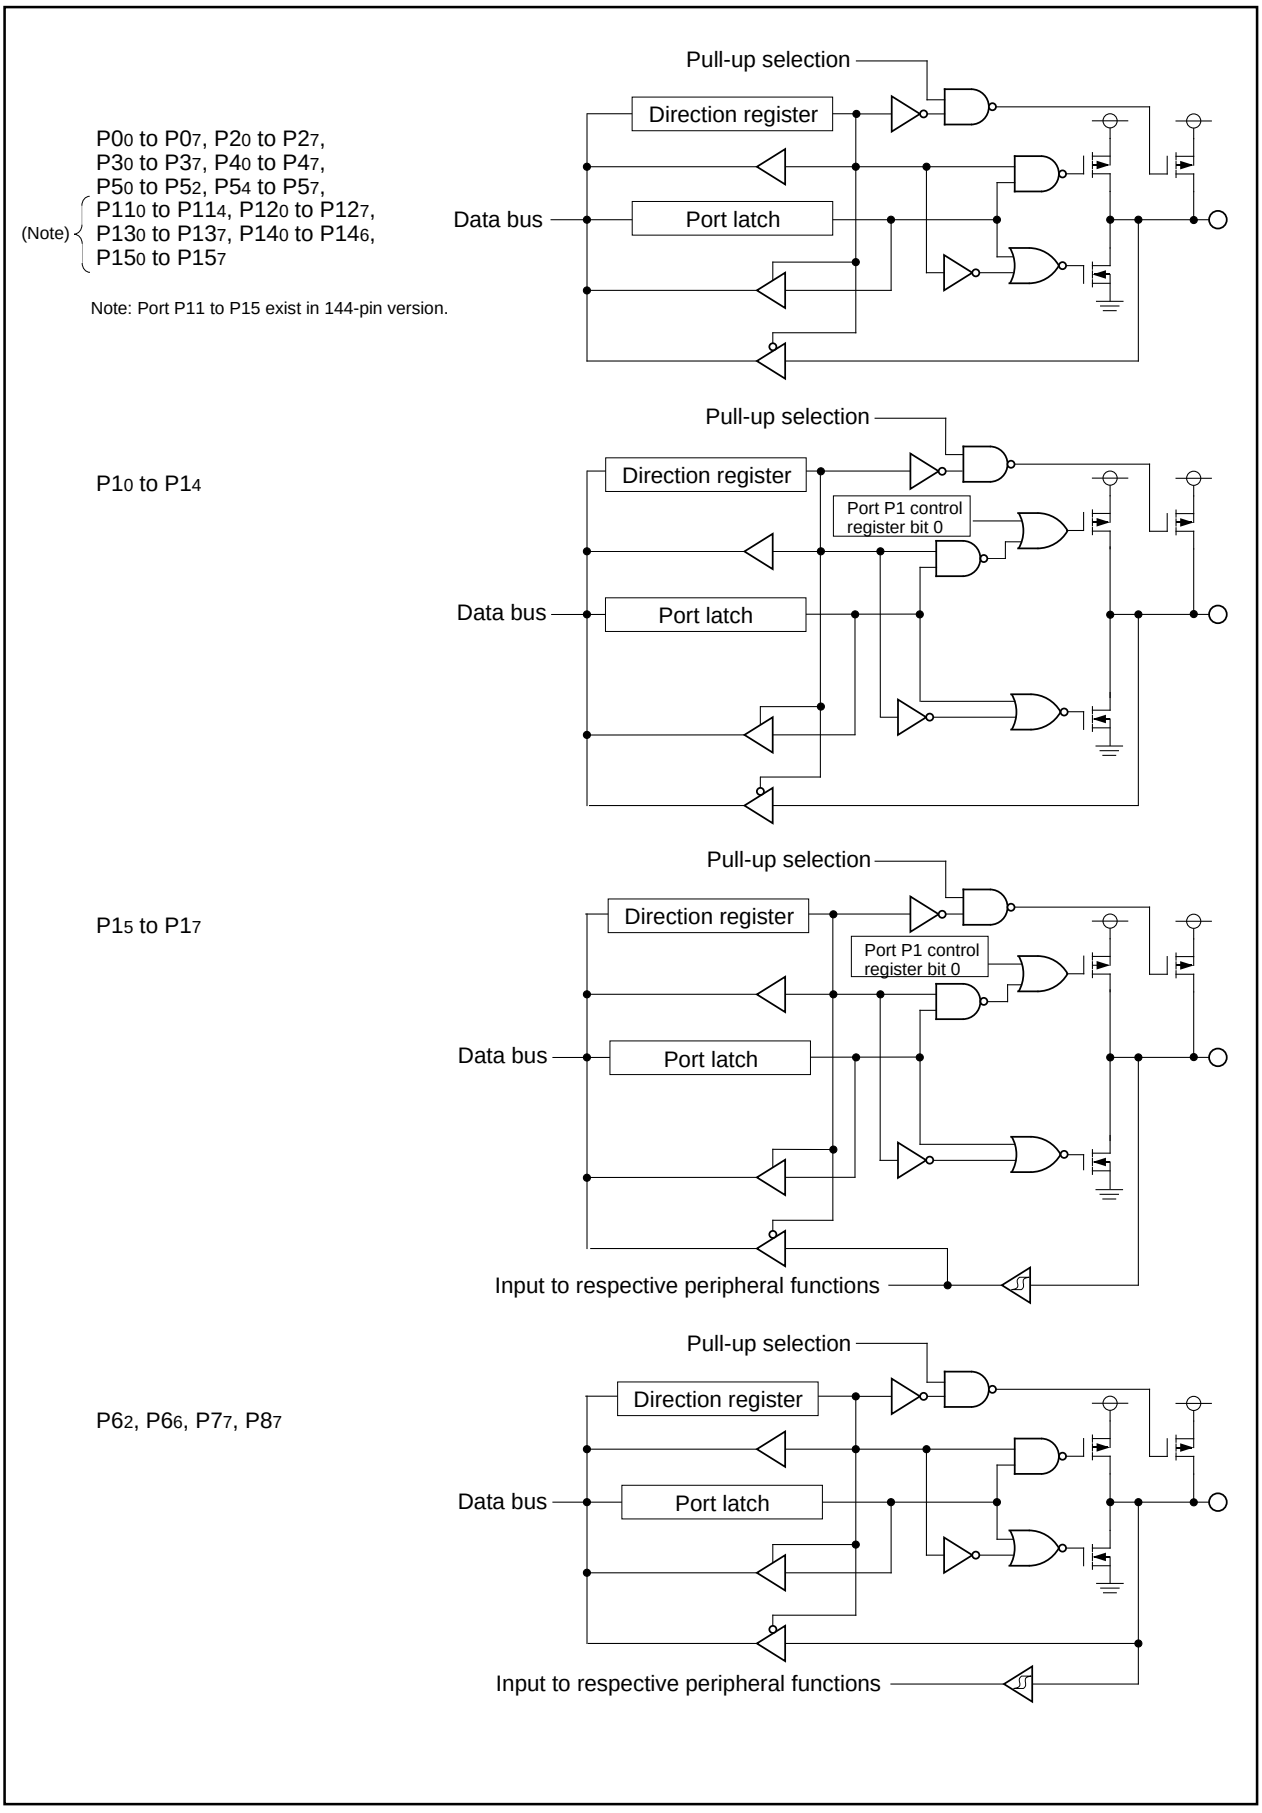

Figure 26.1 Programmable I/O ports (1)

P8$_2$ to P8$_4$

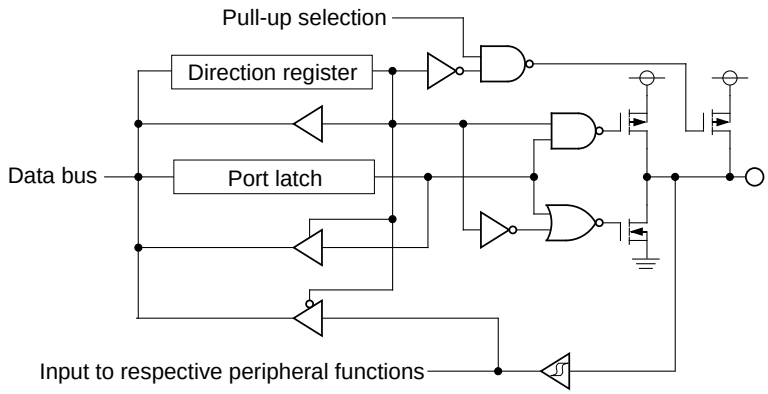

P6$_0$, P6$_1$, P6$_4$, P6$_5$, P7$_2$, P7$_3$
P7$_4$, P7$_5$, P7$_6$, P8$_0$, P8$_1$, P9$_0$, P9$_1$
P9$_2$, P9$_7$
(inside dotted-line included)
P5$_3$, P6$_3$, P6$_7$, P8$_6$
(inside dotted-line not included)

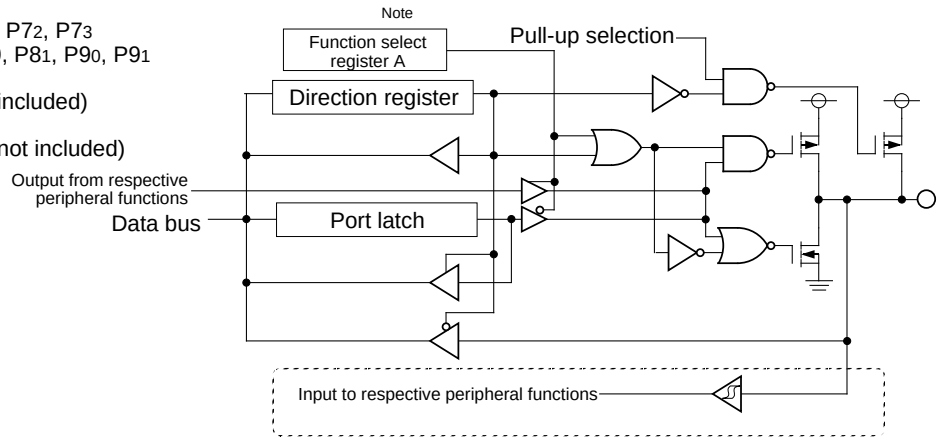

Note : P5$_3$ is connected to clock output function select bit.

P8$_5$



P7$_0$, P7$_1$

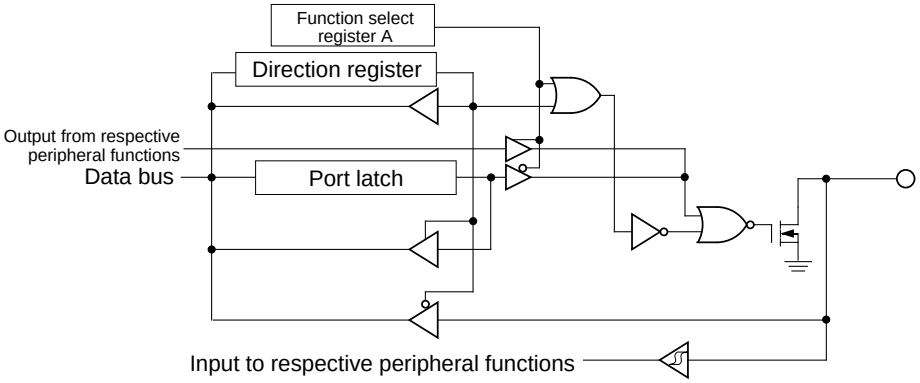

Figure 26.2 Programmable I/O ports (2)

P10$_0$ to P10$_3$

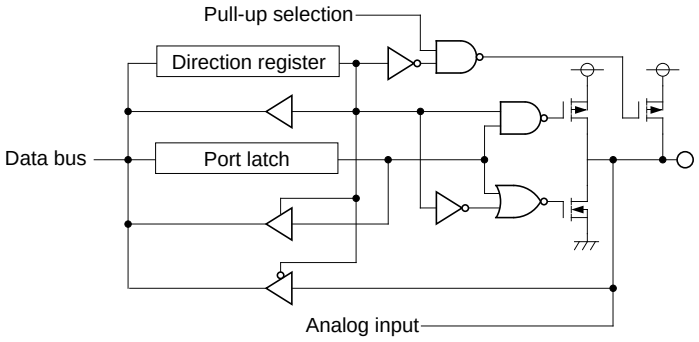

P10$_4$ to P10$_7$

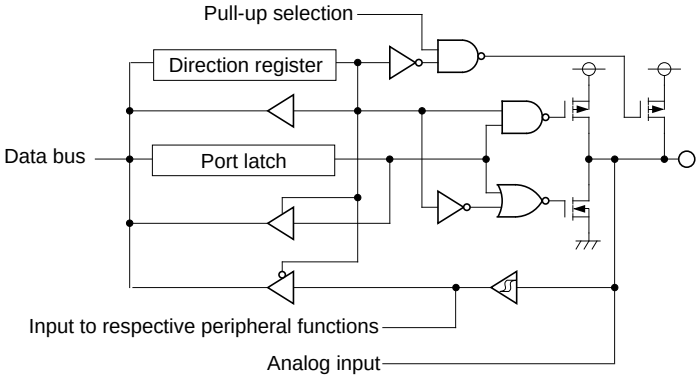

P9$_3$, P9$_4$

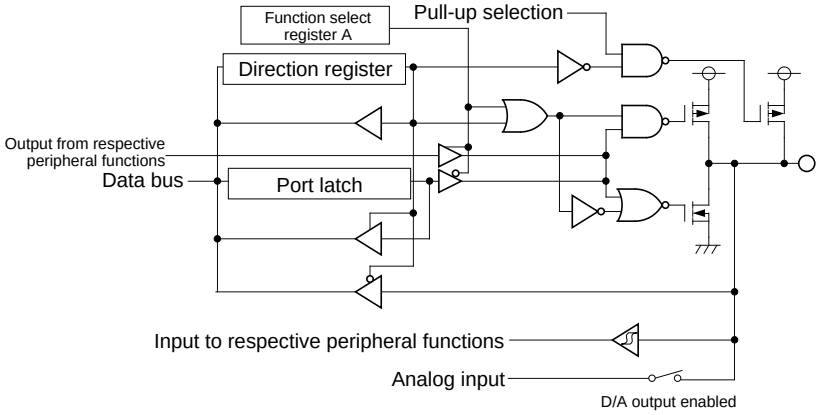

P9$_5$ (inside dotted-line included)
P9$_6$ (inside dotted-line not included)

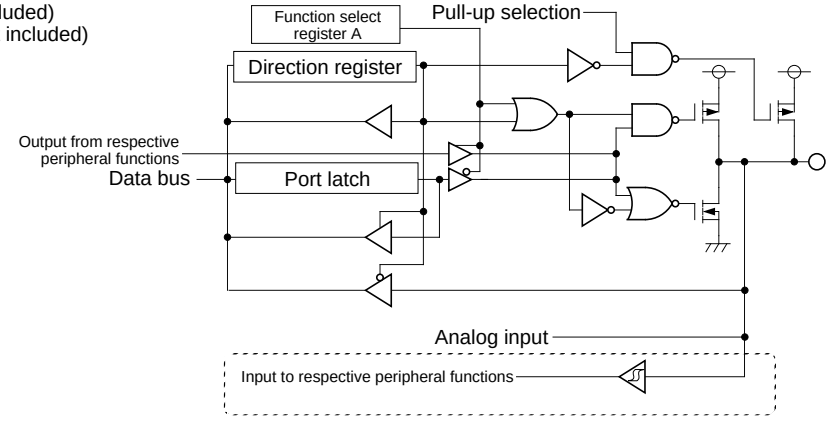

Figure 26.3 Programmable I/O ports (3)

Port Pi direction register (Note 1,2, 3)

Symbol	Address	When reset
PDi (i = 0 to 15, except 8, 11 and 14)	03E2$_{16}$, 03E3$_{16}$, 03E6$_{16}$, 03E7$_{16}$, 03EA$_{16}$, 03EB$_{16}$, 03C2$_{16}$, 03C3$_{16}$, 03C7$_{16}$, 03CA$_{16}$, 03CE$_{16}$, 03CF$_{16}$, 03D3$_{16}$	00$_{16}$

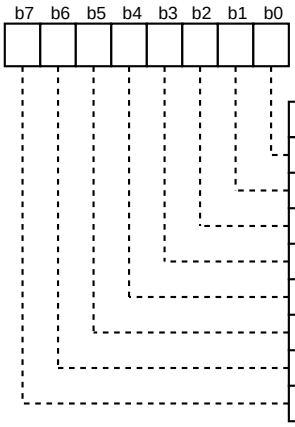

Bit symbol	Bit name	Function	R	W
PDi_0	Port Pi$_0$ direction register	0 : Input mode (Functions as an input port) 1 : Output mode (Functions as an output port) (i = 0 to 15 except 8, 11 and 14)	○	○
PDi_1	Port Pi$_1$ direction register		○	○
PDi_2	Port Pi$_2$ direction register		○	○
PDi_3	Port Pi$_3$ direction register		○	○
PDi_4	Port Pi$_4$ direction register		○	○
PDi_5	Port Pi$_5$ direction register		○	○
PDi_6	Port Pi$_6$ direction register		○	○
PDi_7	Port Pi$_7$ direction register		○	○

Note 1: Set bit 2 of protect register (address 000A$_{16}$) to “1” before rewriting to the port P9 direction register.
Note 2: In memory expansion and microprocessor mode, the contents of corresponding port direction register of pins A$_0$ to A$_{22}$, $\overline{A_{23}}$, D$_0$ to D$_{15}$, MA$_0$ to MA$_{12}$, $\overline{CS_0}$ to $\overline{CS}$ 3, $\overline{WRL}$/$\overline{WR}$/$\overline{CASL}$, $\overline{WRH}$/$\overline{BHE}$/$\overline{CASH}$, $\overline{RD}$/$\overline{DW}$, BCLK/ALE/CLKOUT, $\overline{HLDA}$/ALE, $\overline{HOLD}$, ALE/$\overline{RAS}$, and $\overline{RDY}$ are not changed.
Note 3: Port P12, P13 and P15 direction registers exist in 144-pin version.

Port P8 direction register

Symbol	Address	When reset
PD8	03C6$_{16}$	00X00000$_2$



Bit symbol	Bit name	Function	R	W
PD8_0	Port P8$_0$ direction register	0 : Input mode (Functions as an input port) 1 : Output mode (Functions as an output port)	○	○
PD8_1	Port P8$_1$ direction register		○	○
PD8_2	Port P8$_2$ direction register		○	○
PD8_3	Port P8$_3$ direction register		○	○
PD8_4	Port P8$_4$ direction register		○	○
	Nothing is assigned. When write, set "0". When read, its content is indeterminate.		–	–
PD8_6	Port P8$_6$ direction register	0 : Input mode (Functions as an input port) 1 : Output mode (Functions as an output port)	○	○
PD8_7	Port P8$_7$ direction register		○	○

Figure 26.4 Direction register (1)

Port P11 direction register (Note)



Symbol	Address	When reset
PD11	03CB16,	XXX000002

Bit symbol	Bit name	Function	R	W
PD11_0	Port P110 direction register	0 : Input mode (Functions as an input port) 1 : Output mode (Functions as an output port)	○	○
PD11_1	Port P111 direction register		○	○
PD11_2	Port P112 direction register		○	○
PD11_3	Port P113 direction register		○	○
PD11_4	Port P114 direction register		○	○
Nothing is assigned. When write, set "0". When read, its content is indeterminate.			—	—

Note: This register exists in 144-pin version.

Port P14 direction register (Note)



Symbol	Address	When reset
PD14	03D216	X00000002

Bit symbol	Bit name	Function	R	W
PD14_0	Port P140 direction register	0 : Input mode (Functions as an input port) 1 : Output mode (Functions as an output port)	○	○
PD14_1	Port P141 direction register		○	○
PD14_2	Port P142 direction register		○	○
PD14_3	Port P143 direction register		○	○
PD14_4	Port P144 direction register		○	○
PD14_5	Port P145 direction register		○	○
PD14_6	Port P146 direction register		○	○
Nothing is assigned. When write, set "0". When read, its content is indeterminate.			—	—

Note: This register exists in 144-pin version.

Figure 26.5 Direction register (2)

Port Pi register (Note 1, 3)

Symbol	Address	When reset
Pi (i = 0 to 15, except 8, 11 and 14)	03E0$_{16}$, 03E1$_{16}$, 03E4$_{16}$, 03E5$_{16}$, 03E8$_{16}$, 03E9$_{16}$, 03C0$_{16}$, 03C1$_{16}$, 03C5$_{16}$, 03C8$_{16}$, 03CC$_{16}$, 03CD$_{16}$, 03D1$_{16}$	Indeterminate

b7	b6	b5	b4	b3	b2	b1	b0

Bit symbol	Bit name	Function	R	W
PDi_0	Port Pi$_0$ register	Data is input and output to and from each pin by reading and writing to and from each corresponding bit 0 : “L” level data 1 : “H” level data (Note 2) (i = 0 to 15 except 8, 11 and 14)	○	○
PDi_1	Port Pi$_1$ register		○	○
PDi_2	Port Pi$_2$ register		○	○
PDi_3	Port Pi$_3$ register		○	○
PDi_4	Port Pi$_4$ register		○	○
PDi_5	Port Pi$_5$ register		○	○
PDi_6	Port Pi$_6$ register		○	○
PDi_7	Port Pi$_7$ register		○	○

Note 1: In memory expansion and microprocessor mode, the contents of corresponding port Pi direction register of pins A$_0$ to A$_{22}$, $\overline{A_{23}}$, D$_0$ to D$_{15}$, MA$_0$ to MA$_{12}$, $\overline{CS}$0 to $\overline{CS}$ 3, $\overline{WRL}$/$\overline{WR}$/$\overline{CASL}$, $\overline{WRH}$/$\overline{BHE}$/$\overline{CASH}$, $\overline{RD}$/$\overline{DW}$, BCLK/ ALE/CLK$_{OUT}$, $\overline{HLDA}$/ALE, $\overline{HOLD}$, ALE/$\overline{RAS}$, and $\overline{RDY}$ are not changed.
Note 2: P7$_0$ and P7$_1$ are N-channel open drain ports and high inpedance outputs.
Note 3: Port P12, P13 and P15 registers exist in 144-pin version.

Port P8 register

Symbol	Address	When reset
P8	03C4$_{16}$	Indeterminate

b7	b6	b5	b4	b3	b2	b1	b0

Bit symbol	Bit name	Function	R	W
PD8_0	Port P80 register	Data is input and output to and from each pin by reading and writing to and from each corresponding bit (except for P8$_5$) 0 : “L” level data 1 : “H” level data	○	○
PD8_1	Port P81 register		○	○
PD8_2	Port P82 register		○	○
PD8_3	Port P83 register		○	○
PD8_4	Port P84 register		○	○
PD8_5	Port P85 register		○	✕
PD8_6	Port P86 register		○	○
PD8_7	Port P87 register		○	○

Figure 26.6 Port register (1)

Port P11 register (Note)

Symbol	Address	When reset
P11	03C9$_{16}$	Indeterminate

b7	b6	b5	b4	b3	b2	b1	b0
✕	✕	✕					

Bit symbol	Bit name	Function	R	W
P11_0	Port P11$_0$ register	Data is input and output to and from each pin by reading and writing to and from each corresponding bit 0 : “L” level data 1 : “H” level data	○	○
P11_1	Port P11$_1$ register		○	○
P11_2	Port P11$_2$ register		○	○
P11_3	Port P11$_3$ register		○	○
P11_4	Port P11$_4$ register		○	○
Nothing is assigned. When write, set "0". When read, its content is indeterminate.			—	—

Note: This register exists in 144-pin version.

Port P14 register (Note)

Symbol	Address	When reset
P14	03D0$_{16}$	Indeterminate

b7	b6	b5	b4	b3	b2	b1	b0
✕							

Bit symbol	Bit name	Function	R	W
P14_0	Port P14$_0$ register	Data is input and output to and from each pin by reading and writing to and from each corresponding bit 0 : “L” level data 1 : “H” level data	○	○
P14_1	Port P14$_1$ register		○	○
P14_2	Port P14$_2$ register		○	○
P14_3	Port P14$_3$ register		○	○
P14_4	Port P14$_4$ register		○	○
P14_5	Port P14$_5$ register		○	○
P14_6	Port P14$_6$ register		○	○
Nothing is assigned. When set, write "0". When read, its content is indeterminate.			—	—

Note: This register exists in 144-pin version.

Figure 26.7 Port register (2)

Table 26.1 Each port and peripheral output function (Note 1)

Port	Periphral output function 1	Periphraloutput function 2	Periphral output function 3
P60	$\overline{RTS0}$ output	——	——
P61	CLK0 output	——	——
P62	——	——	——
P63	TXD0 output	——	——
P64	$\overline{RTS1}$ output	CLKS1 output	——
P65	CLK1 output	——	——
P66	——	——	——
P67	TXD1 output	——	——
P70(Note 2)	TXD2(SDA2) output	TA0OUT output	——
P71(Note 2)	SCL2 output	——	——
P72	CLK2 output	TA1OUT output	V phase output
P73	$\overline{RTS2}$ output	$\overline{V}$ phase output	——
P74	TA2OUT output	W phase output	——
P75	$\overline{W}$ phase output	——	——
P76	TA3OUT output	——	——
P77	——	——	——
P80	TA4OUT output	U phase output	——
P81	$\overline{U}$ phase output	——	——
P82	——	——	——
P83	——	——	——
P84	——	——	——
P85	——	——	——
P86	——	——	——
P87	——	——	——
P90	CLK3 output	——	——
P91	SCL3 output	STXD3 output	——
P92	TXD3(SDA3) output	——	——
P93	$\overline{RTS3}$ output	——	——
P94	$\overline{RTS4}$ output	——	——
P95	CLK4 output	——	——
P96	TXD4(SDA4) output	——	——
P97	SCL3 output	STXD4 output	——

Note 1: When using peripheral input function, set the corresponding function select register A to "0" (I/O port).

Note 2: N-channel open drain output.

Function select register A0



Symbol	Address	When reset
PS0	03B0$_{16}$	0X000X00$_2$

Bit symbol	Bit name	Function	R	W
PS0_0	Port P6$_0$ function select bit	0 : I/O port 1 : $\overline{\text{RTS}_0}$ output	○	○
PS0_1	Port P6$_1$ function select bit	0 : I/O port 1 : CLK$_0$ output	○	○
Nothing is assigned. When write, set "0". When read, the content is indeterminate.			–	–
PS0_3	Port P6$_3$ function select bit	0 : I/O port 1 : TXD$_0$ output	○	○
PS0_4	Port P6$_4$ function select bit	0 : I/O port 1 : Peripheral function output (PSL0_4 enabled)	○	○
PS0_5	Port P6$_5$ function select bit	0 : I/O port 1 : CLK$_1$ output	○	○
Nothing is assigned. When write, set "0". When read, the content is indeterminate.			–	–
PS0_7	Port P6$_7$ function select bit	0 : I/O port 1 : TXD$_1$ output	○	○

Function select register A1



Symbol	Address	When reset
PS1	03B1$_{16}$	X0000000$_2$

Bit symbol	Bit name	Function	R	W
PS1_0	Port P7$_0$ function select bit (Note)	0 : I/O port 1 : Peripheral function output (PSL1_0 enabled)	○	○
PS1_1	Port P7$_1$ function select bit (Note)	0 : I/O port 1 : SCL$_2$ output	○	○
PS1_2	Port P7$_2$ function select bit	0 : I/O port 1 : Peripheral function output (PSL1_2, PSC_0 enabled)	○	○
PS1_3	Port P7$_3$ function select bit	0 : I/O port 1 : Peripheral function output (PSL1_3 enabled)	○	○
PS1_4	Port P7$_4$ function select bit	0 : I/O port 1 : Peripheral function output (PSL1_4 enabled)	○	○
PS1_5	Port P7$_5$ function select bit	0 : I/O port 1 : $\overline{\text{W}}$ phase output	○	○
PS1_6	Port P7$_6$ function select bit	0 : I/O port 1 : TA$_{3OUT}$ output	○	○
Nothing is assigned. When write, set "0". When read, the content is indeterminate.			–	–

Note: This port is N-channel open drain output.

Figure 26.8 Function select register A (1)

Function select register A2



Symbol	Address	When reset
PS2	$03B4_{16}$	$XXXXXX00_2$

Bit symbol	Bit name	Function	R	W
PS2_0	Port $P8_0$ function select bit	0 : I/O port 1 : Peripheral function output (PSL2_0 enabled)	○	○
PS2_1	Port $P8_1$ function select bit	0 : I/O port 1 : $\overline{U}$ phase output	○	○
Nothing is assigned. When write, set "0". When read, the content is indeterminate.			–	–

Function select register A3 (Note)



Symbol	Address	When reset
PS3	$03B5_{16}$	00_{16}

Bit symbol	Bit name	Function	R	W
PS3_0	Port $P9_0$ function select bit	0 : I/O port 1 : CLK3 output	○	○
PS3_1	Port $P9_1$ function select bit	0 : I/O port 1 : Peripheral function output (PSL3_1 enabled)	○	○
PS3_2	Port $P9_2$ function select bit	0 : I/O port 1 : TxD_3(SDA_3) output	○	○
PS3_3	Port $P9_3$ function select bit	0 : I/O port 1 : RTS3 output	○	○
PS3_4	Port $P9_4$ function select bit	0 : I/O port 1 : RTS4 output	○	○
PS3_5	Port $P9_5$ function select bit	0 : I/O port 1 : CLK4 output	○	○
PS3_6	Port $P9_6$ function select bit	0 : I/O port 1 : TxD_4(SDA_4) output	○	○
PS3_7	Port $P9_7$ function select bit	0 : I/O port 1 : Peripheral function output (PSL3_7 enabled)	○	○

Note: Set bit 2 of protect register (address $000A_{16}$) to “1” before rewriting to this register.

Figure 26.9 Function select register A (2)

Function select register B0



Symbol	Address	When reset
PSL0	$03B2_{16}$	$XXX0XXXX_2$

Bit symbol	Bit name	Function	R	W
Nothing is assigned. When write, set "0". When read, the content is indeterminate.			—	—
PSL0_4	Port $P6_4$ peripheral function select bit (Enabled when PS0_4 = 1)	0 : $\overline{RTS1}$ output 1 : CLKS1 output	○	○
Nothing is assigned. When write, set "0". When read, the content is indeterminate.			—	—

Function select register B1



Symbol	Address	When reset
PSL1	$03B3_{16}$	$XXX000X0_2$

Bit symbol	Bit name	Function	R	W
PSL1_0	Port $P7_0$ peripheral function select bit (Enabled when PS1_0 = 1) (Note 2)	0 : TxD_2(SDA_2) port 1 : $TA0_{OUT}$ output	○	○
Nothing is assigned. When write, set "0". When read, the content is indeterminate.			—	—
PSL1_2	Port $P7_2$ peripheral function select bit (Enabled when PS1_2 = 1)	0 : Port $P7_2$ peripheral subfunction select bit (PSC_0) is enabled 1 : $TA1_{OUT}$ output (Note 1)	○	○
PSL1_3	Port $P7_3$ peripheral function select bit (Enabled when PS1_3 = 1)	0 : $\overline{RTS2}$ port 1 : $\overline{V}$ phase output	○	○
PSL1_4	Port $P7_4$ peripheral function select bit (Enabled when PS1_4 = 1)	0 : $TA2_{OUT}$ port 1 : W phase output	○	○
Nothing is assigned. When write, set "0". When read, the content is indeterminate.			—	—

Note 1: Set PSC_0 to “1”.
Note 2: This port is N-channel open drain output.

Function select register B2



Symbol	Address	When reset
PSL2	$03B6_{16}$	$XXXXXXX0_2$

Bit symbol	Bit name	Function	R	W
PSL2_0	Port $P8_0$ peripheral function select bit (Enabled when PS2_0 = 1)	0 : $TA4_{OUT}$ output 1 : U phase output	○	○
Nothing is assigned. When write, set "0". When read, the content is indeterminate.			—	—

Figure 26.10 Function select register B (1)

Function select register B3



Symbol	Address	When reset
PSL3	$03B7_{16}$	$00000X0X_2$

Bit symbol	Bit name	Function	R	W
Nothing is assigned. When write, set "0". When read, the content is indeterminate.			–	–
PSL3_1	Port $P9_1$ peripheral function select bit	0 : SCL_3 output 1 : $STxD_3$ output	○	○
Nothing is assigned. When write, set "0". When read, the content is indeterminate.			–	–
PSL3_3	Port $P9_3$ peripheral function	0 : Input peripheral function enabled (Except DA0 output) (Note) 1 : Input peripheral function disabled (DA0 output)	○	○
PSL3_4	Port $P9_4$ peripheral function	0 : Input peripheral function enabled (Except DA1 output) (Note) 1 : Input peripheral function disabled (DA1 output)	○	○
PSL3_5	Port $P9_5$ peripheral function	0 : Input peripheral function enabled (Except ANEX0 use) (Note) 1 : Input peripheral function disabled (ANEX0 use)	○	○
PSL3_6	Port $P9_6$ peripheral function	0 : Input peripheral function enabled (Except ANEX1 use) (Note) 1 : Input peripheral function disabled (ANEX1 use)	○	○
PSL3_7	Port $P9_7$ peripheral function select bit	0 : SCL_4 output 1 : $STxD_4$ output	○	○

Note: Although DA0, DA1 output and ANEX0, ANEX1 can be used when "0" is set in these bits, the power supply may be increased.

Figure 26.11 Function select register B (2)

Function select register C



Symbol	Address	When reset
PSC	$03AF_{16}$	$0XXXXXX0_2$

Bit symbol	Bit name	Function	R	W
PSC_0 (Note 1)	Port $P7_2$ peripheral subfunction select bit (Enabled when PS1_2 = 1 and PSL1_2 = 0)	0 : CLK2 output 1 : V phase output	○	○
Nothing is assigned. When write, set "0". When read, the content is indeterminate.			–	–
PSC_7 (Note 2)	Key input interrupt disable bit	0 : Enabled 1 : Disabled	○	○

Note 1: Set this bit to "0" when PSL1_2 = "1".
Note 2: When this bit is "1", key input interrupt for interrupt controller is disabled regardless of port input and setting of interrupt control register. When changing this bit, set key input interrupt disabled by key input interrupt control register.

Figure 26.12 Function select register C

Pull-up control register 0 (Note)



Symbol	Address	When reset
PUR0	03F0$_{16}$	00$_{16}$

Bit symbol	Bit name	Function	R	W
PU00	P0$_0$ to P0$_3$ pull-up	The corresponding port is pulled high with a pull-up resistance 0 : Not pulled high 1 : Pulled high	○	○
PU01	P0$_4$ to P0$_7$ pull-up		○	○
PU02	P1$_0$ to P1$_3$ pull-up		○	○
PU03	P1$_4$ to P1$_7$ pull-up		○	○
PU04	P2$_0$ to P2$_3$ pull-up		○	○
PU05	P2$_4$ to P2$_7$ pull-up		○	○
PU06	P3$_0$ to P3$_3$ pull-up		○	○
PU07	P3$_4$ to P3$_7$ pull-up		○	○

Note: Since P0 to P5 operate as the bus in memory expansion mode and microprocessor mode, do not set the pull-up control register. However, it is possible to select pull-up resistance presence to the usable port as I/O port by setting.

Pull-up control register 1 (Note)



Symbol	Address	When reset
PUR1	03F1$_{16}$	X0$_{16}$

Bit symbol	Bit name	Function	R	W
PU10	P4$_0$ to P4$_3$ pull-up	The corresponding port is pulled high with a pull-up resistance 0 : Not pulled high 1 : Pulled high	○	○
PU11	P4$_4$ to P4$_7$ pull-up		○	○
PU12	P5$_0$ to P5$_3$ pull-up		○	○
PU13	P5$_4$ to P5$_7$ pull-up		○	○
Nothing is assigned. When write, set "0". When read, their contents are indeterminate.			–	–

Note: Since P0 to P5 operate as the bus in memory expansion mode and microprocessor mode, do not set the pull-up control register. However, it is possible to select pull-up resistance presence to the usable port as I/O port by setting.

Pull-up control register 2



Symbol	Address	When reset
PUR2	03DA$_{16}$	00$_{16}$

Bit symbol	Bit name	Function	R	W
PU20	P6$_0$ to P6$_3$ pull-up	The corresponding port is pulled high with a pull-up resistance 0 : Not pulled high 1 : Pulled high	○	○
PU21	P6$_4$ to P6$_7$ pull-up		○	○
PU22	P7$_0$ to P7$_3$ pull-up (Note 1)		○	○
PU23	P7$_4$ to P7$_7$ pull-up		○	○
PU24	P8$_0$ to P8$_3$ pull-up		○	○
PU25	P8$_4$ to P8$_7$ pull-up (Note 2)		○	○
PU26	P9$_0$ to P9$_3$ pull-up		○	○
PU27	P9$_4$ to P9$_7$ pull-up		○	○

Note 1: Since P7$_0$ and P7$_1$ are N-channel open drain ports, pull-up is not available for them.
Note 2: Except port P8$_5$.

Figure 26.13 Pull-up control register (1)

100-pin version

Pull-up control register 3

b7	b6	b5	b4	b3	b2	b1	b0
0	0	0	0	0	0		

Symbol: PUR3 Address: $03DB_{16}$ When reset: 00_{16}

Bit symbol	Bit name	Function	R	W
PU30	$P10_0$ to $P10_3$ pull-up	The corresponding port is pulled high with a pull-up resistance 0 : Not pulled high 1 : Pulled high	○	○
PU31	$P10_4$ to $P10_7$ pull-up		○	○
Reserved bit		Must always be set to "0"	○	○

144-pin version

Pull-up control register 3

b7	b6	b5	b4	b3	b2	b1	b0

Symbol: PUR3 Address: $03DB_{16}$ When reset: 00_{16}

Bit	Bit	Function	R	W
PU30	$P10_0$ to $P10_3$ pull-up	The corresponding port is pulled high with a pull-up resistance 0 : Not pulled high 1 : Pulled high	○	○
PU31	$P10_4$ to $P10_7$ pull-up		○	○
PU32	$P11_0$ to $P11_3$ pull-up		○	○
PU33	$P11_4$ pull-up		○	○
PU34	$P12_0$ to $P12_3$ pull-up		○	○
PU35	$P12_4$ to $P12_7$ pull-up		○	○
PU36	$P13_0$ to $P13_3$ pull-up		○	○
PU37	$P13_4$ to $P13_7$ pull-up		○	○

Pull-up control register 4 (Note)

b7	b6	b5	b4	b3	b2	b1	b0
×	×	×	×				

Symbol: PUR4 Address: $03DC_{16}$ When reset: $XXXX0000_2$

Bit symbol	Bit name	Function	R	W
PU40	$P14_0$ to $P14_3$ pull-up	The corresponding port is pulled high with a pull-up resistance 0 : Not pulled high 1 : Pulled high	○	○
PU41	$P14_4$ to $P14_6$ pull-up		○	○
PU42	$P15_0$ to $P15_3$ pull-up		○	○
PU43	$P15_4$ to $P15_7$ pull-up		○	○
Nothing is assigned. When write, set "0". When read, their contents are “0”.			–	–

Note: This register exists in 144-pin version.

Figure 26.14 Pull-up control register (2)

Port control register (Note 1)



Symbpl: PCR
Address: 03FF16
When reset: XXXXXXX02

Bit symbol	Bit name	Function	R	W
PCR0	Port P1 control register	0 : Function as common CMOS port 1 : Function as N-ch open drain port (Note 2)	○	○
Nothing is assigned. When write, set "0". When read, their contents are indeterminate.			—	—

Note 1: Since P1 operates as the data bus in memory expansion mode and microprocessor mode, do not set the port control register. However, it is possible to select the CMOS port or N-channel open drain to the usable port as I/O port by setting.

Note 2: This function is designed to permanently turn OFF the Pch of the CMOS port. It does not make port 1 a full open drain. Therefore, the absolute maximum input voltage rating is [-3 to Vcc + 0.3V].

Figure 26.15 Port control register

Table 26.2 Example connection of unused pins in single-chip mode

Pin name	Connection
Ports P0 to P15 (excluding P8$_5$) (Note 1)	After setting for input mode, connect every pin to V_{SS} via a resistance (pull-down); or after setting for output mode, leave these pins open.
X_{OUT} (Note 2)	Open
$\overline{NMI}$	Connect via resistance to V_{CC} (pull-up)
AV_{CC}	Connect to V_{CC}
AV_{SS}, V_{REF}, BYTE	Connect to V_{SS}

Note 1: Port P11 to P15 exist in 144-pin version.
Note 2: With external clock input to X_{IN} pin.

Table 26.3 Example connection of unused pins in memory expansion mode and microprocessor mode

Pin name	Connection
Ports P6 to P15(excluding P8$_5$) (Note 1)	After setting for input mode, connect every pin to V_{SS} via a resistance (pull-down); or after setting for output mode, leave these pins open.
$\overline{BHE}$, ALE, $\overline{HLDA}$, X_{OUT}(Note 2), BCLK	Open
$\overline{HOLD}$, $\overline{RDY}$, $\overline{NMI}$	Connect via resistance to V_{CC} (pull-up)
AV_{CC}	Connect to V_{CC}
AV_{SS}, V_{REF}	Connect to V_{SS}

Note 1: Port P11 to P15 exist in 144-pin version.
Note 2: With external clock input to X_{IN} pin.

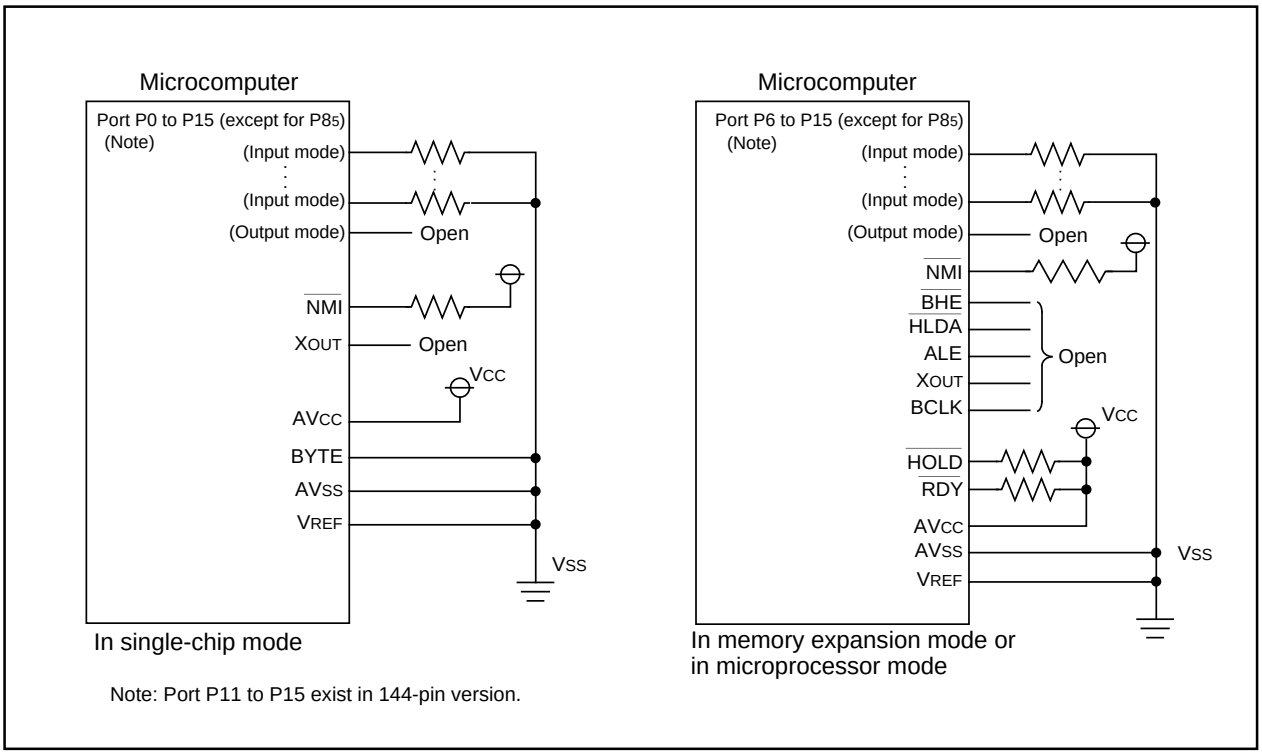

Figure 26.16 Example connection of unused pins

27. Usage Precaution

SFR (100-pin version)

(1) Addresses $03C9_{16}$, $03CB_{16}$ to $03D3_{16}$, $03DC_{16}$ area is for future plan. Must set "FF_{16}" to address $03CB_{16}$, $03CE_{16}$, $03CF_{16}$, $03D2_{16}$, $03D3_{16}$ and "00_{16}" to address $03DC_{16}$ at initial setting.

Timer

(1) A timer Ai register and a timer Bi register are unstable after MCU resetting. Please start a count after setting a value as the timer Ai register or timer Bi register to be used, when using a timer.

Timer A (timer mode)

(1) Reading the timer Ai register while a count is in progress allows reading, with arbitrary timing, the value of the counter. Reading the timer Ai register with the reload timing gets “$FFFF_{16}$”. Reading the timer Ai register after setting a value in the timer Ai register with a count halted but before the counter starts counting gets a proper value.

Timer A (event counter mode)

(1) Reading the timer Ai register while a count is in progress allows reading, with arbitrary timing, the value of the counter. Reading the timer Ai register with the reload timing gets “$FFFF_{16}$” by underflow or “0000_{16}” by overflow. Reading the timer Ai register after setting a value in the timer Ai register with a count halted but before the counter starts counting gets a proper value.

(2) When stop counting in free run type, set timer again.

(3) In the case of using as “Free-Run type”, the timer register contents may be unknown when counting begins. If the timer register is set before counting has started, then the starting value will be unknown.

- In the case where the up/down count will not be changed.

  Enable the “Reload” function and write to the timer register before counting begins. Rewrite the value to the timer register immediately after counting has started. If counting up, rewrite “0000_{16}” to the timer register. If counting down, rewrite “$FFFF_{16}$” to the timer register. This will cause the same operation as “Free-Run type” mode.

- In the case where the up/down count has changed.

  First set to “Reload type” operation. Once the first counting pulse has occurred, the timer may be changed to “Free-Run type”.

Timer A (one-shot timer mode)

(1) Setting the count start flag to “0” while a count is in progress causes as follows:

- The counter stops counting and a content of reload register is reloaded.
- The TAiOUT pin outputs “L” level.
- The interrupt request generated and the timer Ai interrupt request bit goes to “1”.

(2) The output from the one-shot timer synchronizes with the count source generated internally. Therefore, when an external trigger has been selected, a delay of one cycle of count source as maximum occurs between the trigger input to the TAiIN pin and the one-shot timer output.

(3) The timer Ai interrupt request bit goes to “1” if the timer's operation mode is set using any of the following procedures:

- Selecting one-shot timer mode after reset.
- Changing operation mode from timer mode to one-shot timer mode.
- Changing operation mode from event counter mode to one-shot timer mode.

Therefore, to use timer Ai interrupt (interrupt request bit), set timer Ai interrupt request bit to “0” after the above listed changes have been made.

(4) If a trigger occurs while a count is in progress, after the counter performs one down count following the reoccurrence of a trigger, the reload register contents are reloaded, and the count continues. To generate a trigger while a count is in progress, generate the second trigger after an elapse longer than one cycle of the timer's count source after the previous trigger occurred.

(5) If an external trigger input is used to start counting, the next external trigger input must be avoided within 300ns before the timer A reaches "0000h".

Timer A (pulse width modulation mode)

(1) The timer Ai interrupt request bit becomes “1” if setting operation mode of the timer in compliance with any of the following procedures:

- Selecting PWM mode after reset.
- Changing operation mode from timer mode to PWM mode.
- Changing operation mode from event counter mode to PWM mode.

Therefore, to use timer Ai interrupt (interrupt request bit), set timer Ai interrupt request bit to “0” after the above listed changes have been made.

(2) Setting the count start flag to “0” while PWM pulses are being output causes the counter to stop counting. If the TAiOUT pin is outputting an “H” level in this instance, the output level goes to “L”, and the timer Ai interrupt request bit goes to “1”. If the TAiOUT pin is outputting an “L” level in this instance, the level does not change, and the timer Ai interrupt request bit does not becomes “1”.

Timer B (timer mode, event counter mode)

(1) The TBi (i=0 to 5) register indicates the countervalue during counting at any given time. However, the counter is "FFFF$_{16}$" when reloading. The setting value can be read after setting the TBi register while the counter stops and before the counter starts counting.

Timer B (pulse period/pulse width measurement mode)

(1) If the measurement mode select bit setting is changed after counting is started, the timer Bi interrupt request bit is set to "1".

(2) Indeterminate values are transferred to the reload register during the first valid edge input after counting is started. The timer Bi interrupt request is not generated at this time.

(3) The counter value is indeterminate when counting is started. Therefore, the timer Bi overflow flag setting may change to "1" and causes the timer Bi interrupt requests to be generated until a valid edge is input after counting is started.

(4) The timer Bi overflow flag is set to "0" by writting to the timer Bi mode register at or after counting timing of the next count source, after the count start flag is set to "1" and the timer Bi overflow flag is set to "1".

Stop Mode and Wait Mode

(1) To exit stop mode by hardware reset, provide an "L" signal input to the RESET pin until main clock oscillation is stable.

(2) When entering wait mode, the instruction queue reads ahead to instructions following the WAIT instruction, and the program stops. Write at least 4 NOP instructions after the WAIT instruction.

(3) When entering stop mode, the instruction lined in the instruction queue is executed before the interrupt for recovery is done. Write the JMP.B instruction, as follows, after the instruction setting the all clock stop control bit to "1".

```
        bset 0,prcr          ; protection removed
        bset 0,cm1           ; all clocks stopped (entering stop mode)
        jmp.b LABEL_001      ; JMP.B instruction executed (Jump to the next instruction soon
LABEL_001:                   ; with no instruction between JMP.B and LABEL.)
        nop                  ; nop(1)
        nop                  ; nop(2)
        nop                  ; nop(3)
        nop                  ; nop(4)
        mov.b #0,prcr        ; protection set
```

(4) Use the following procedure to enter stop mode.

• Initial Setting

Set each interrupt priority level after setting the interrupt priority level required to exit stop mode, controlled by the RLVL2 to RLVL0 bits in the RLVL register, to "7".

• Before Entering Stop Mode

[1] Set the interrupt priority level of the interrupt being used to exit stop mode

[2] Set the interrupt priority levels of the interrupts, not being used to exit stop mode, to "0".

[3] Set the IPL in the FLG register. Then set the exit priority level to the same level as the IPL.
(Interrupt priority level of the interrupt used to exit stop mode > exit priority level
≥ interrupt priority level of the interrupts not used to exit stop mode)

[4] Set the I flag to "1"

[5] Set the CM10 bit in the CM1 register to "1" (all clocks stop) after setting the PRC0 bit in the PRCR register to "1" (write enabled)

• After Exiting Stop Mode

Set the exit priority level to "7" as soon as exiting stop mode.

(5) When microcomputer enters stop mode again after exiting from stop mode using the NMI interrupt, use the following procedure to set the CM10 bit to "1".

[1] Exit stop mode using the NMI interrupt

[2] Generate a dummy interrupt

[3] Set the CM10 bit to "1"

Example:

```
INT     #63         ;  Dummy interrupt
BSET    CM1         ;  All clocks stopped (in stop mode)

;   /*for dummy interrupt* /
DUMMY:
    REIT
```

(6) Use the following procedure to enter wait mode.

• Initial Setting

Set each interrupt priority level after setting the interrupt priority level required to exit wait mode, controlled by the RLVL2 to RLVL0 bits in the RLVL register, to "7".

• Before Entering Wait Mode

[1] Set the interrupt priority level of the interrupt being used to exit wait mode

[2] Set the interrupt priority levels of the interrupts, not being used to exit wait mode, to "0".

[3] Set the IPL in the FLG register. Then set the exit priority level to the same level as the IPL.
(Interrupt priority level of the interrupt used to exit wait mode > exit priority level
≥ interrupt priority level of the interrupts not used to exit wait mode)

[4] Set the I flag to "1"

[5] Execute the WAIT instruction

• After Exiting Wait Mode

Set the exit priority level to "7" as soon as exiting wait mode.

A/D Converter

(1) Write to each bit (except bit 6) of A/D control register 0, to each bit of A/D control register 1, and to bit 0 of A/D control register 2 when A/D conversion is stopped (before a trigger occurs).
In particular, when the Vref connection bit is changed from “0” to “1”, start A/D conversion after an elapse of 1 µs or longer.

(2) When changing A/D operation mode, select analog input pin again.

(3) Using one-shot mode or single sweep mode
Read the correspondence A/D register after confirming A/D conversion is finished. (It is known by A/D conversion interrupt request bit.)
Use the undivided main clock as the internal CPU clock.

(4) Using repeat mode, repeat sweep mode 0 or repeat sweep mode 1

(5) When f(X_{IN}) is faster than 10 MHz, make the frequency 10 MHz or less by dividing.

(6) If A/D conversion is stopped by program while in progress of A/D conversion, the conversion result of A/D converter becomes indeterminate. The contents of A/D registers irrelevant to A/D conversion may become indeterminate. If A/D conversion is stopped by program while in progress of A/D conversion, ignore the values of all A/D registers.

(7) Output impedance of sensor at A/D conversion (Reference value)
To carry out A/D conversion properly, charging the internal capacitor C shown in Figure 27.1 has to be completed within a specified period of time T. Let output impedance of sensor equivalent circuit be R0, microcomputer’s internal resistance be R, precision (error) of the A/D converter be X, and the A/D converter’s resolution be Y (Y is 1024 in the 10-bit mode, and 256 in the 8-bit mode).

Vc is generally $V_C = V_{IN} \{1 - e^{-\frac{t}{C(R0 + R)}}\}$

And when t = T, $V_C = V_{IN} - \frac{X}{Y} V_{IN} = V_{IN}(1 - \frac{X}{Y})$

$$e^{-\frac{T}{C(R0 + R)}} = \frac{X}{Y}$$

$$-\frac{T}{C(R0 + R)} = \ln \frac{X}{Y}$$

Hence, $R0 = -\frac{T}{C \cdot \ln \frac{X}{Y}} - R$

With the model shown in Figure 27.1 as an example, when the difference between V_{IN} and V_C becomes 0.1LSB, we find impedance R0 when voltage between pins V_C changes from 0 to V_{IN}-(0.1/1024) V_{IN} in time T. (0.1/1024) means that A/D precision drop due to insufficient capacitor charge is held to 0.1LSB at time of A/D conversion in the 10-bit mode. Actual error however is the value of absolute precision added to 0.1LSB. When f(X_{IN}) = 10 MHz, T = 0.3 us in the A/D conversion mode with sample & hold. Output impedance R0 for sufficiently charging capacitor C within time T is determined as follows.

T = 0.3 µs, R = 7.8 kΩ, C = 3 pF, X = 0.1, and Y = 1024 . Hence,

$$R0 = -\frac{0.3 \times 10^{-6}}{3.0 \times 10^{-12} \cdot \ln \frac{0.1}{1024}} \quad -7.8 \times 10^{3} \fallingdotseq 3.0 \times 10^{3}$$

Thus, the allowable output impedance of the sensor circuit capable of thoroughly driving the A/D converter turns out to be approximately 3.0 kΩ. Tables 27.1 and 27.2 show output impedance values based on the LSB values.

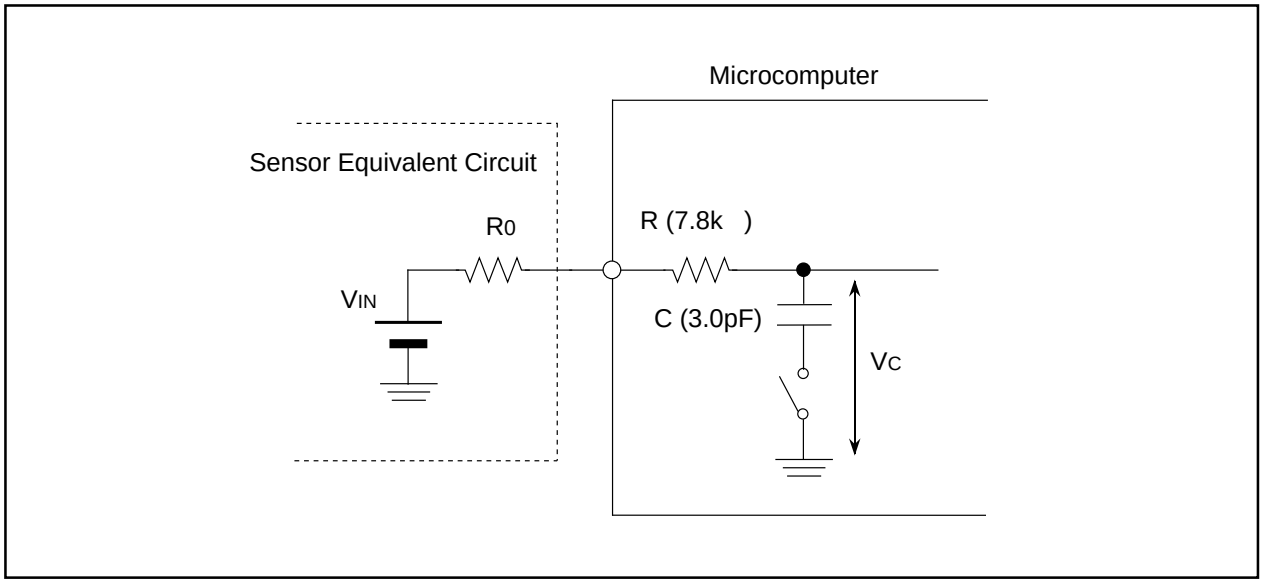

Figure 27.1 Anolog Input Pin and External Sensor Equivalent Circuit

Tables 27.1 Output impedance values based on the LSB values (10-bit mode) Reference value

f(XIN) (MHz)	Cycle (µs)	Sampling time (µs)	R (Kohm)	C (pF)	Resolution (LSB)	R0max (Kohm)
10	0.1	0.3 (3 X cycle, Sample & hold bit is enabled)	7.8	3.0	0.1	3.0
					0.3	4.5
					0.5	5.3
					0.7	5.9
					0.9	6.4
					1.1	6.8
					1.3	7.2
					1.5	7.5
					1.7	7.8
					1.9	8.1
10	0.1	0.2 (2 X cycle, Sample & hold bit is enabled)	7.8	3.0	0.3	0.4
					0.5	0.9
					0.7	1.3
					0.9	1.7
					1.1	2.0
					1.3	2.2
					1.5	2.4
					1.7	2.6
					1.9	2.8

Tables 27.2 Output impedance values based on the LSB values (8-bit mode) Reference value

f(XIN) (MHz)	Cycle (µs)	Sampling time (µs)	R (Kohm)	C (pF)	Resolution (LSB)	R0max (Kohm)
10	0.1	0.3 (3 X cycle, Sample & hold bit is enabled)	7.8	3.0	0.1	4.9
					0.3	7.0
					0.5	8.2
					0.7	9.1
					0.9	9.9
					1.1	10.5
					1.3	11.1
					1.5	11.7
					1.7	12.1
					1.9	12.6
10	0.1	0.2 (2 X cycle, Sample & hold bit is enabled)	7.8	3.0	0.1	0.7
					0.3	2.1
					0.5	2.9
					0.7	3.5
					0.9	4.0
					1.1	4.4
					1.3	4.8
					1.5	5.2
					1.7	5.5
					1.9	5.8

Interrupts

(1) Setting the stack pointer

- The value of the stack pointer is initialized to 000000$_{16}$ immediately after reset. Accepting an interrupt before setting a value in the stack pointer may cause runaway. Be sure to set a value in the stack pointer before accepting an interrupt.
  When using the $\overline{\text{NMI}}$ interrupt, initialize the stack pointer at the beginning of a program. Regarding the first instruction immediately after reset, generating any interrupts including the $\overline{\text{NMI}}$ interrupt is prohibited.
  Set an even address to the stack pointer so that operating efficiency is increased.

(2) The $\overline{\text{NMI}}$ interrupt

- As for the $\overline{\text{NMI}}$ interrupt pin, an interrupt cannot be prohibited. Connect it to the V_{CC} pin via a resistance (pulled-up) if unused.
- The $\overline{\text{NMI}}$ pin also serves as P8$_5$, which is exclusively input. Reading the contents of the P8 register allows reading the pin value. Use the reading of this pin only for establishing the pin level at the time when the $\overline{\text{NMI}}$ interrupt is input.
- Signals input to $\overline{\text{NMI}}$ pin require "L" level and "H" level of 2 clock + 300ns or more, from the operation clock of CPU.

(3) Address match interrupt

- Do not set the following addresses to the address match interrupt register.
  1. The address of the starting instruction in an interrupt routine.
  2. Any of the next 7 instructions addresses immediately after an instruction to clear an interrupt request bit of an interrupt control register or an instruction to rewrite an interrupt priority level to a smaller value.
  3. Any of the next 3 instructions addresses immediately after an instruction to set the interrupt enable flag (I flag).
  4. Any of the next 3 instructions addresses immediately after an instruction to rewrite a processor interrupt priority level (IPL) to a smaller value.

Example 1)

```
Interrupt_A:                          ; Interrupt A routine
        pushm   R0,R1,R2,R3,A0,A1     ; <---- Do not set address match interrupt to the
        ••••                          ;       start address of an interrupt instruction
```

Example 2)

```
mov.b   #0,TA0IC        ;Change TA0 interrupt priority level to a smaller value
nop                     ; 1st instruction  ┐
nop                     ; 2nd instruction  │
nop                     ; 3rd instruction  │
nop                     ; 4th instruction  ├ Do not set address match interrupt
nop                     ; 5th instruction  │ during this period
nop                     ; 6th instruction  │
nop                     ; 7th instruction  ┘
```

Example 3)

```
fset    I       ; Set I flag ( interrupt enabled)
nop             ; 1st instruction  ┐
nop             ; 2nd instruction  ├ Do not set address match interrupt
nop             ; 3rd instruction  ┘ during this period
```

Example 4)

```
ldipl   #0      ; Rewrite IPL to a smaller value
nop             ; 1st instruction
nop             ; 2nd instruction
nop             ; 3rd instruction
```

} Do not set address match interrupt during this period

- To return from an interrupt to the address set in an address match interrupt register using return instruction (reit or freit)

  To rewrite the interrupt control register within the interrupt routine, add the below processing to the end of the routine (immediately before the reit or freit instruction). Also, if multiple interrupts are enabled with other interrupts, add the below processing to the end of the interrupt that enables the multiple interrupts.

  If the interrupt control register is being rewritten within the non-maskable interrupt routine, add the below processing to the end of all interrupts.

Additional process

```
                                ; Execute after the register reset instruction (popm instruction)
fclr    U                       ; Select ISP (Unnecessary if the ISP has been selected)
pushm   R0                      ; Store R0 register
mov.w   6[SP],R0                ; Read FLG on stack (use "stc SVF,R0" when high-speed
                                ;                    interrupt)
ldc     R0,FLG                  ; Set in FLG
popm    R0                      ; Restore R0 register
nop                             ; Dummy
reit                            ; Interrupt completed (use freit when high-speed interrupt)
```

Example 5)

If rewriting the interrupt control register for interrupt B with the interrupt A routine and enabling multiple interrupts with interrupt C, the above processing is required at the end of the interrupt A and interrupt C routines.

```
        Interrupt A routine
Interrupt_A:
    pushm   R0,R1,R2,R3,A0,A1   ; Store registers
    ••••
    bclr    3,TA0IC             ; Rewrite interrupt control register of interrupt B
    ••••
    popm    R0,R1,R2,R3,A0,A1   ; Restore registers
    fclr    U                   ; Select ISP (Unnecessary if the ISP has been selected)
    pushm   R0                  ; Store R0 register
    mov.w   6[SP],R0            ; Read FLG on stack
    ldc     R0,FLG              ; Set in FLG
    popm    R0                  ; Restore R0 register
    nop                         ; Dummy
    reit                        ; Interrupt completed
```

```
                Interrupt C routine
Interrupt_C:
    pushm R0,R1,R2,R3,A0,A1      ; Store registers
    fset  I                      ; Multiple interrupt enabled
    ••••
    ••••
    popm  R0,R1,R2,R3,A0,A1      ;Restore registers
    fclr  U                      ; Select ISP (Unnecessary if the ISP has been selected)
    pushm R0                     ; Store R0 register
    mov.w 6[SP],R0               ; Read FLG on stack
    ldc   R0,FLG                 ; Set in FLG
    popm  R0                     ; Restore R0 register
    nop                          ; Dummy
    reit                         ; Interrupt completed
```

(4) External interrupt

• Edge sense

Either an “L” level or an “H” level of at least 250 ns width is necessary for the signal input to pins INT_0 to INT_5 regardless of the CPU operation clock.

• Level sense

Either an “L” level or an “H” level of 1 cycle of BCLK + at least 200 ns width is necessary for the signal input to pins INT_0 to INT_5 regardless of the CPU operation clock. (When X_{IN}=20MHz and no division mode, at least 250 ns width is necessary.)

• When the polarity of the INT_0 to INT_5 pins is changed, the interrupt request bit is sometimes set to "1". After changing the polarity, set the interrupt request bit to "0". Figure 27.2 shows the procedure for changing the $\overline{INT}$ interrupt generate factor.

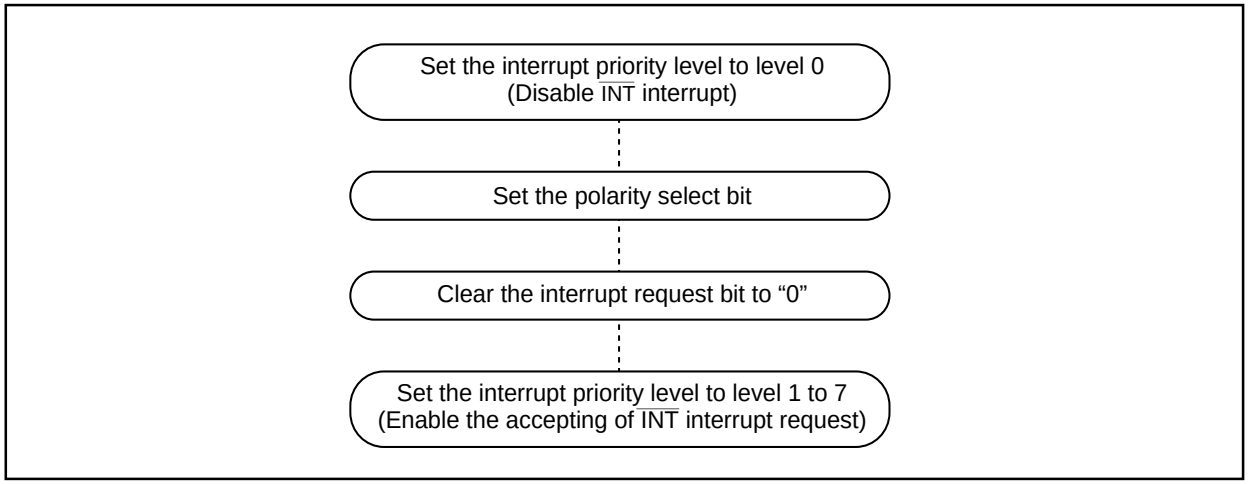

Figure 27.2 Switching condition of $\overline{INT}$ interrupt request

(5) Rewrite the interrupt control register

- When a instruction to rewrite the interrupt control register is executed but the interrupt is disabled, the interrupt request bit is not set sometimes even if the interrupt request for that register has been generated. This will depend on the instruction. If this creates problems, use the below instructions to change the register.
  Instructions : AND, OR, BCLR, BSET

- When attempting to clear the interrupt request bit of an interrupt control register, the interrupt request bit is not cleared sometimes. This will depend on the instruction. If this creates problems, use the below instructions to change the register.
  Instructions : MOV

DMAC

(1) Do not clear the DMA request bit of the DMAi request cause select register.
In M16C/80, when a DMA request is generated while the channel is disabled (Note), the DMA transfer is not executed and the DMA request bit is cleared automatically.
Note :The DMA is disabled or the transfer count register is "0".

(2) When DMA transfer is done by a software trigger, set DSR and DRQ of the DMAi request cause select register to "1" simultaneously using the OR instruction.
e.g.) OR.B #0A0h, DMiSL ; DMiSL is DMAi request cause select register

(3) When changing the DMAi request cause select bit of the DMAi request cause select register, set "1" to the DMA request bit, simultaneously. In this case, set the corresponding DMA channel to disabled before changing the DMAi request cause select bit. At least 26 cycles are needed from the instruction to write to the DMAi request cause select register to enable DMA.

Example) When DMA request cause is changed to timer A0 and using DMA0 in single transfer after DMA initial setting

```
        push.w    R0                ; Store R0 register
        stc       DMD0, R0          ; Read DMA mode register 0
        and.b     #11111100b, R0L   ; Clear DMA0 transfer mode select bit to "00"
        ldc       R0, DMD0          ; DMA0 disabled
        mov.b     #10000011b, DM0SL ; Select timer A0
                                    ; (Write "1" to DMA request bit simultaneously)
        push.w    R0                ; Sotre R0 register
        mov.w     #6,R0             ;
dummy_loop:
        sbjnz.w   #1,R0,dummy_loop  ; Dummy cycle
        pop.w     R0                ; Restore R0 register
        or.b      #00000001b, R0L   ; Set DMA0 single transfer
        ldc       R0, DMD0          ; DMA0 enabled
        pop.w     R0                ; Restore R0 register
```

At least 26 cycles are needed until DMA enabled.

(4) Recommended procedure for starting DMA transfer

•When writing to the DMAi request cause register including overwriting the same value to the DMAi request cause register;

1. Disable the corresponding channel i DMA in DMA mode registers 0 and 1.
2. Set up the peripheral used as the source of the DMA transfer. However, the peripheral should remain disabled at this time. For example, when using UART0 transmit, disable UART0 transmit.
3. Set the DMAi request cause select register. At this time, write a '1' to the DMA request bit (bit 7)
4. Set the following SFR registers:
   - •DMAiSFR address register
   - •DMAI memory address reload register
   - •DMAi memory address register
   - •DMAi transfer count reload register
   - •DMAi transfer count register
5. At this point, if the number of elapsed cycles are less than 26, add code (NOP's or other processing) to make up some time.
6. Enable the corresponding channel i DMA in the DMA mode registers 0 and 1.
7. Enable the peripheral used as the source of the DMA transfer. For example, when using UART0 transmit, enable UART0 transmit.

•When not writing to the DMAi request cause register;

1. Disable the corresponding channel i DMA in the DMA mode registers 0 and 1.
2. Set up the peripheral used as the source of the DMA transfer. However, the peripheral should remain disabled at this time. For example, when using UART0 transmit, disable UART0 transmit.
3. Set up the following SFR registers:
   - •DMAiSFR address register
   - •DMAI memory address reload register
   - •DMAi memory address register
   - •DMAi transfer count reload register
   - •DMAi transfer count register
4. Enable the corresponding channel i DMA in the DMA mode registers 0 and 1.
5. Enable the peripheral used as the source of the DMA transfer. For example, when using UART0 transmit, enable UART0 transmit.

(5) Recommended procedure after completing DMA transfer

•Disable the peripheral used as source of the DMA transfer to prevent generating a DMA request.

•Disable the corresponding channel i DMA in the DMA mode registers 0 and 1.

Noise

(1) A bypass capacitor should be inserted between Vcc-Vss line for reducing noise and latch-up

Connect a bypass capacitor (approx. 0.1µF) between the Vcc and Vss pins using short wiring and thicker circuit traces.

Precautions for using CLKOUT pin

When using the Clock Output function of P53/CLKOUT pin (f_8, f_{32} or fc output) in single chip mode, use port P57 as an input only port (port P57 direction register is "0").

Although port P57 may be set as an output port, it will become high impedance and will not output "H" or "L" levels.

$\overline{\text{HOLD}}$ signal

When P40 to P47 and P50 to P52 are set to output port (the direction register is "1") in single-chip mode, then the MCU is changed to microprocessor mode or memory expansion mode.

Although the $\overline{\text{HOLD}}$ pin may be held "L", P40 to P47 (A16 to $\overline{\text{A23}}$, $\overline{\text{CS0}}$ to $\overline{\text{CS3}}$, MA8 to MA12) and P50 to P52 ($\overline{\text{RD}}$/$\overline{\text{WR}}$/$\overline{\text{BHE}}$, $\overline{\text{RD}}$/$\overline{\text{WRL}}$/$\overline{\text{WRH}}$, $\overline{\text{CASL}}$/$\overline{\text{CASH}}$/$\overline{\text{DW}}$) will not become high-impedance ports.

When using the $\overline{\text{HOLD}}$ input while P40 to P47 and P50 to P52 are set as output ports in single-chip mode, you must first set all pins for P40 to P47 and P50 to P52 as input ports, then shift to microprocessor mode or memory expansion mode.

Reducing power consumption

(1) When A/D conversion is not performed, select the Vref not connected with the Vref connect bit of A/D control register 1. When A/D conversion is performed, start the A/D conversion at least 1 µs or longer after connecting Vref.

(2) When using AN4 ($P10_4$) to AN7 ($P10_7$), select the input disable of the key input interrupt signal with the key input interrupt disable bit of the function select register C .

When selecting the input disable of the key input interrupt signal, the key input interrupt cannot be used. Also, the port cannot be input even if the direction register of $P10_4$ to $P10_7$ is set to input (the input result becomes undefined). When the input disable of the key input interrupt signal is selected, use all AN4 to AN7 as A/D inputs.

(3) When ANEX0 and ANEX1 are used, select the input peripheral function disable with port $P9_5$ and $P9_6$ input peripheral function select bit of the function select register B3.

When the input peripheral function disable is selected, the port cannot be input even if the port direction register is set to input (the input result becomes undefined).

Also, it is not possible to input a peripheral function except ANEX0 and ANEX1.

(4) When D/A converter is not used, set output disabled with the D/A output enable bit of D/A control register and set the D/A register to "00_{16}".

(5) When D/A conversion is used, select the input peripheral function disabled with port $P9_3$ and $P9_4$ input peripheral function select bit of the function select register B3.

When the input peripheral function disabled is selected, the port cannot be input even if the port direction register is set to input (the input result becomes undefined).

Also, it is not possible to input a peripheral function.

DRAM controller

When shifting to self-refresh, select DRAM ignored by the DRAM space select bit. In the next instruction, simultaneously set the DRAM space select bit and self-refresh ON by self-refresh mode bit. Also, insert two NOPs after the instruction that sets the self-refresh mode bit to "1".

Do not access external memory while operating in self-refresh. (All external memory space access is inhibited.)

When disabling self-refresh, simultaneously select DRAM ignored by the DRAM space select bit and self-refresh OFF by self-refresh mode bit. In the next instruction, set the DRAM space select bit.

Do not access the DRAM space immediately after setting the DRAM space select bit.

Example) One wait is selected by the wait select bit and 4MB is selected by the DRAM space select bit

Shifting to self-refresh

```
•••
mov.b   #00000001b,DRAMCONT     ;DRAM ignored, one wait is selected
mov.b   #10001011b,DRAMCONT     ;Set self-refresh, select 4MB and one wait
nop                             ;Two nops are needed
nop                             ;
•••
```

Disable self-refresh

```
•••
mov.b   #00000001b,DRAMCONT     ;Disable self-refresh, DRAM ignored, one wait is
                                ;selected
mov.b   #00001011b,DRAMCONT     ;Select 4MB and one wait
nop                             ;Inhibit instruction to access DRAM area
nop
•••
```

Setting the registers

The registers shown in Table 27.3 include indeterminate bit when read. Set immidiate to these registers. Store the content of the frequently used register to RAM, change the content of RAM, then transfer to the register.

Table 27.3 The object registers

Register name	Symbol	Address
UART4 bit rate generator	U4BRG	02F9$_{16}$
UART4 transfer buffer register	U4TB	02FB$_{16}$, 02FA$_{16}$
Dead time timer	DTT	030C$_{16}$
Timer B2 interrupt occurrence frequency set counter	ICTB2	030D$_{16}$
UART3 bit rate generator	U3BRG	0329$_{16}$
UART3 transfer buffer register	U3TB	032B$_{16}$, 032A$_{16}$
UART2 bit rate generator	U2BRG	0339$_{16}$
UART2 transfer buffer register	U2TB	033B$_{16}$, 033A$_{16}$
Up-down flag	UDF	0344$_{16}$
Timer A0 register (Note)	TA0	0347$_{16}$, 0346$_{16}$
Timer A1 register (Note)	TA1	0349$_{16}$, 0348$_{16}$
Timer A2 register (Note)	TA2	034B$_{16}$, 034A$_{16}$
Timer A3 register (Note)	TA3	034D$_{16}$, 034C$_{16}$
Timer A4 register (Note)	TA4	034F$_{16}$, 034E$_{16}$
UART0 bit rate generator	U0BRG	0361$_{16}$
UART0 transfer buffer register	U0TB	0363$_{16}$, 0362$_{16}$
UART1 bit rate generator	U1BRG	0369$_{16}$
UART1 transfer buffer register	U1TB	036B$_{16}$, 036A$_{16}$

Note: In one-shot timer mode and pulse widt modulation mode.

External ROM version (144-pin version)

The external ROM version is operated only in microprocessor mode, so be sure to perform the following:

- Connect CNVss pin to Vcc.

Notes on CNVss pin reset at "H" level

When the CNVss pin is reset at "H" level, the contents of internal ROM cannot be read out.

Microprocesser mode or Memory expansion mode

When the MCU enters wait mode while operating in memory expansion mode or microprocessor mode, a pin functioning as part of the address or data bus retains it's state on the bus before wait mode is entered. Shift to single-chip mode and output an arbitrary value in order to reduce current consumption. By shifting to single-chip mode, a pin which was functioning as part of the bus becomes a general-purpose port and can output an arbitrary value. Set the port registers and direction registers after shifting to single-chip mode (this implies that any control pins ($\overline{CS}$,$\overline{WR}$,$\overline{RD}$,etc..) being used for access of an external device be changed as well).

If the port registers and direction registers are set while in memory expansion mode or microprocessor mode, the operation will be ignored.

This is similar when entering stop mode.

Setting procedure is following.

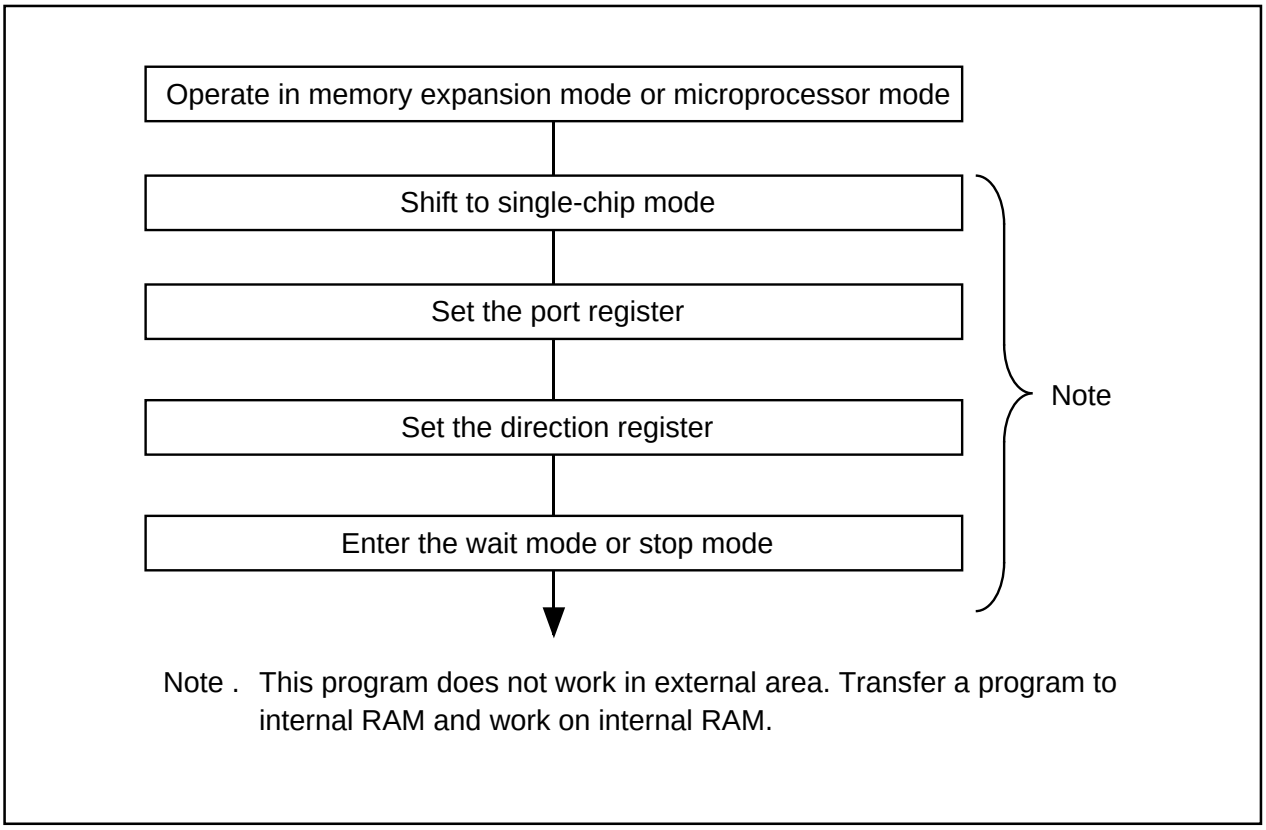

Figure 27.3 Setting procedure of the port register and direction register.

Microprocessor

If the software reset is executed when the CNVss pin is connected to Vcc to start up in microprocessor mode, write at least three NOP instructions following the writing instruction to the PM0 Register.

example:

```
mov.b #02H,PRCR
bset  3,PM0       ; or "mov.b #8BH,PM0" (instruction to execute software reset)
nop               ; write at least three NOP instructions
nop
nop
nop
```

Flash memory version

Bit 7 and bit 6 of the processor mode register 1 (address 0005_{16}) must be set to "11_2" and this setting should be done when the main clock is divided by 8.

Rewrite program of external ROM version with built-in boot loader

- Do not use interrupts in rewrite program.
- Do not use absolute address jump instructions (JMP.A, JMPI.A) and absolute address subroutine call instructions (JSR.A, JSRI.A) in rewrite program.

28. Electrical characteristics

Table 28.1 Absolute maximum ratings

Symbol	Parameter		Condition	Rated value	Unit
V_{CC}	Supply voltage		V_{CC}=AV$_{CC}$	-0.3 to 6.5	V
AVcc	Analog supply voltage		V_{CC}=AV$_{CC}$	-0.3 to 6.5	V
V_I	Input voltage	$\overline{RESET}$, (maskROM : CNV$_{SS}$, BYTE), P0$_0$-P0$_7$, P1$_0$-P1$_7$, P2$_0$-P2$_7$, P3$_0$-P3$_7$, P4$_0$-P4$_7$, P5$_0$-P5$_7$, P6$_0$-P6$_7$, P7$_2$-P7$_7$, P8$_0$-P8$_7$, P9$_0$-P9$_7$, P10$_0$-P10$_7$, P11$_0$-P11$_4$, P12$_0$-P12$_7$, P13$_0$-P13$_7$, P14$_0$-P14$_6$, P15$_0$-P15$_7$, V_{REF}, X_{IN} (Note 1)		-0.3 to Vcc+0.3	V
		P7$_0$, P7$_1$		-0.3 to 6.5	V
V_O	Output voltage	P0$_0$-P0$_7$, P1$_0$-P1$_7$, P2$_0$-P2$_7$, P3$_0$-P3$_7$,P4$_0$-P4$_7$, P5$_0$-P5$_7$, P6$_0$-P6$_7$,P7$_2$-P7$_7$, P8$_0$-P8$_4$, P8$_6$, P8$_7$, P9$_0$-P9$_7$, P10$_0$-P10$_7$, P11$_0$-P11$_4$, P12$_0$-P12$_7$, P13$_0$-P13$_7$, P14$_0$-P14$_6$, P15$_0$-P15$_7$, X_{OUT} (Note 1)		-0.3 to Vcc+0.3	V
		P7$_0$, P7$_1$		-0.3 to 6.5	V
P_d	Power dissipation		Topr=25°C	500	mW
T_{opr}	Operating ambient temperature			-20 to 85 / -40 to 85 (Note 2)	°C
T_{stg}	Storage temperature			-65 to 150	°C

Note 1: Port P11 to P15 exist in 144-pin version.
Note 2: Specify a product of -40 to 85°C to use it.

Table 28.2 Recommended operating conditions (referenced to V_{CC} = 2.7V to 5.5V at Topr = – 20 to 85°C / – 40 to 85°C(Note3) unless otherwise specified)

Symbol	Parameter			Standard			Unit
				Min	Typ.	Max.	
Vcc	Supply voltage			2.7	5.0	5.5	V
AVcc	Analog supply voltage				Vcc		V
Vss	Supply voltage				0		V
AVss	Analog supply voltage				0		V
V_{IH}	HIGH input voltage	$P4_0$-$P4_7$, $P5_0$-$P5_7$, $P6_0$-$P6_7$, $P7_2$-$P7_7$, $P8_0$-$P8_7$, $P9_0$-$P9_7$, $P10_0$-$P10_7$, $P11_0$-$P11_4$, $P12_0$-$P12_7$, $P13_0$-$P13_7$, $P14_0$-$P14_6$, $P15_0$-$P15_7$ (Note 5), X_{IN}, RESET, CNV_{SS}, BYTE		0.8Vcc		Vcc	V
		$P7_0$, $P7_1$		0.8Vcc		6.5	V
		$P0_0$-$P0_7$, $P1_0$-$P1_7$, $P2_0$-$P2_7$, $P3_0$-$P3_7$ (during single-chip mode)		0.8Vcc		Vcc	V
		$P0_0$-$P0_7$, $P1_0$-$P1_7$, $P2_0$-$P2_7$, $P3_0$-$P3_7$ (data input function during memory expansion and microprocessor modes)		0.5Vcc		Vcc	V
V_{IL}	LOW input voltage	$P4_0$-$P4_7$, $P5_0$-$P5_7$, $P6_0$-$P6_7$, $P7_0$-$P7_7$, $P8_0$-$P8_7$, $P9_0$-$P9_7$, $P10_0$-$P10_7$, $P11_0$-$P11_4$, $P12_0$-$P12_7$, $P13_0$-$P13_7$, $P14_0$-$P14_6$, $P15_0$-$P15_7$ (Note 5), X_{IN}, RESET, CNV_{SS}, BYTE		0		0.2Vcc	V
		$P0_0$-$P0_7$, $P1_0$-$P1_7$, $P2_0$-$P2_7$, $P3_0$-$P3_7$ (during single-chip mode)		0		0.2Vcc	V
		$P0_0$-$P0_7$, $P1_0$-$P1_7$, $P2_0$-$P2_7$, $P3_0$-$P3_7$ (data input function during memory expansion and microprocessor modes)		0		0.16Vcc	V
$I_{OH (peak)}$	HIGH peak output current	$P0_0$-$P0_7$, $P1_0$-$P1_7$, $P2_0$-$P2_7$, $P3_0$-$P3_7$ $P4_0$-$P4_7$, $P5_0$-$P5_7$, $P6_0$-$P6_7$, $P7_2$-$P7_7$, $P8_0$-$P8_4$, $P8_6$, $P8_7$, $P9_0$-$P9_7$, $P10_0$-$P10_7$, $P11_0$-$P11_4$, $P12_0$-$P12_7$, $P13_0$-$P13_7$, $P14_0$-$P14_6$, $P15_0$-$P15_7$ (Note 5)				-10.0	mA
$I_{OH (avg)}$	HIGH average output current	$P0_0$-$P0_7$, $P1_0$-$P1_7$, $P2_0$-$P2_7$, $P3_0$-$P3_7$ $P4_0$-$P4_7$, $P5_0$-$P5_7$, $P6_0$-$P6_7$, $P7_2$-$P7_7$, $P8_0$-$P8_4$, $P8_6$, $P8_7$, $P9_0$-$P9_7$, $P10_0$-$P10_7$, $P11_0$-$P11_4$, $P12_0$-$P12_7$, $P13_0$-$P13_7$, $P14_0$-$P14_6$, $P15_0$-$P15_7$ (Note 5)				-5.0	mA
$I_{OL (peak)}$	LOW peak output current	$P0_0$-$P0_7$, $P1_0$-$P1_7$, $P2_0$-$P2_7$, $P3_0$-$P3_7$ $P4_0$-$P4_7$, $P5_0$-$P5_7$, $P6_0$-$P6_7$, $P7_0$-$P7_7$, $P8_0$-$P8_4$, $P8_6$, $P8_7$, $P9_0$-$P9_7$, $P10_0$-$P10_7$, $P11_0$-$P11_4$, $P12_0$-$P12_7$, $P13_0$-$P13_7$, $P14_0$-$P14_6$, $P15_0$-$P15_7$ (Note 5)				10.0	mA
$I_{OL (avg)}$	LOW average output current	$P0_0$-$P0_7$, $P1_0$-$P1_7$, $P2_0$-$P2_7$, $P3_0$-$P3_7$ $P4_0$-$P4_7$, $P5_0$-$P5_7$, $P6_0$-$P6_7$, $P7_0$-$P7_7$, $P8_0$-$P8_4$, $P8_6$, $P8_7$, $P9_0$-$P9_7$, $P10_0$-$P10_7$, $P11_0$-$P11_4$, $P12_0$-$P12_7$, $P13_0$-$P13_7$, $P14_0$-$P14_6$, $P15_0$-$P15_7$ (Note 5)				5.0	mA
f (X_{IN})	Main clock input oscillation frequency		No wait	Vcc=4.2V to 5.5V	0		20	MHz
				Vcc=2.7V to 4.2V	0		10	MHz
f (X_{CIN})	Subclock oscillation frequency					32.768	50	kHz

Note 1: The mean output current is the mean value within 100ms.

Note 2: The total I_{OL} (peak) for ports P0, P1, P2, $P8_6$, $P8_7$, P9, P10, P11, P14 and P15 must be 80mA max. The total I_{OH} (peak) for ports P0, P1, P2, $P8_6$, $P8_7$, P9, P10, P11, P14 and P15 must be -80mA max. The total I_{OL} (peak) for ports P3, P4, P5, P6, P7,$P8_0$ to $P8_4$, P12 and P13 must be 80mA max. The total I_{OH} (peak) for ports P3, P4, P5, P6, $P7_2$ to $P7_7$, $P8_0$ to $P8_4$, P12 and P13 must be -80mA max.

Note 3: Specify a product of -40 to 85°C to use it.

Note 4: The specification of V_{IH} and V_{IL} of $P8_7$ is not when using as X_{CIN} but when using programmable input port.

Note 5: Port P11 to P15 exist in 144-pin version.

Table 28.3 A/D conversion characteristics (referenced to V_{CC} = AV_{CC} = V_{REF} = 5V, Vss = AV_{SS} = 0V at Topr = 25°C, f(X_{IN})=20MHz unless otherwise specified)

Symbol	Parameter		Measurement Condition		Standard			Unit
					Min.	Typ.	Max.	
-	Resolution		V_{REF}=V_{CC}				10	Bits
-	Absolute accuracy (10 bits)		V_{REF}=V_{CC} =5V	AN_0 to AN_7 input ANEX0, ANEX1 input			±3	LSB
				External op-amp connection mode			±7	LSB
	Absolute accuracy (8 bits)		V_{REF}=V_{CC}=5V				±2	LSB
	Absolute accuracy (8 bits)	Sample & hold function not available	V_{REF}=V_{CC}=3V, ∅AD=f_{AD}/2				±2	LSB
R_{LADDER}	Ladder tesistance		V_{REF}=V_{CC}		10		40	kΩ
t_{CONV}	Conversion time (10 bits)	Sample & hold function available	V_{REF}=V_{CC}=5V, ∅AD=10MHz		3.3			µs
t_{CONV}	Conversion time (8 bits)	Sample & hold function available	V_{REF}=V_{CC}=5V, ∅AD=10MHz		2.8			µs
t_{CONV}	Conversion time (8 bits)	Sample & hold function not available	V_{REF}=V_{CC}=3V, ∅AD=f_{AD}/2=5MHz		9.8			µs
t_{SAMP}	Sampling time				0.3			µs
V_{REF}	Reference voltage		V_{REF}=V_{CC}=4.2 to 5.5V		2.0			V
			V_{REF}=V_{CC}=2.7 to 5.5V		2.7			V
V_{IA}	Analog input voltage				0		V_{REF}	V

Note 1: DO f(X_{IN}) in range of main clock input oscillation frequency prescribed with recommended operating conditions of table 28.2. Divide the f_{AD} if f(X_{IN}) exceeds 10 MHz, and make AD operation clock frequency (ØAD) equal to or lower than 10 MHz. And divide the f_{AD} if VCC is less than 4.2V, and make AD operation clock frequency (ØAD) equal to or lower than f_{AD}/2.
Note 2 : A case without sample & hold function turn AD operation clock frequency (ØAD) into 250 kHz or more in addition to a limit of Note 1.
Note 3 : Connect AV_{CC} pin to V_{CC} pin and apply the same electric potential.

Table 28.4 D/A conversion characteristics (referenced to V_{CC} = V_{REF} = 5V, Vss = AV_{SS} = 0V at Topr = 25°C, f(X_{IN})=20MHz unless otherwise specified)

Symbol	Parameter	Measuring condition	Standard			Unit
			Min.	Typ.	Max.	
–	Resolution				8	Bits
–	Absolute accuracy				1.0	%
t_{su}	Setup time				3	µs
R_O	Output resistance		4	10	20	kΩ
I_{VREF}	Reference power supply input current	V_{REF} = V_{CC} = 5V(Note 1)			1.5	mA
		V_{REF} = V_{CC} = 3V(Note 1)			1.0	mA

Note 1: This applies when using one D/A converter, with the D/A register for the unused D/A converter set to "00$_{16}$".
The A/D converter's ladder resistance is not included.
Also, when D/A register contents are not "00$_{16}$" the current I_{VREF} always flows even though Vref may have been set to be unconnected by the A/D control register.

V_{CC} = 5V

Table 28.5 Electrical characteristics (referenced to V_{CC}=5V, V_{SS}=0V at Topr=25°C, f(X_{IN})=20MHz unless otherwise specified)

Symbol	Parameter		Measuring condition	Standard Min	Standard Typ.	Standard Max.	Unit
V_{OH}	HIGH output voltage	$P0_0$-$P0_7$, $P1_0$-$P1_7$, $P2_0$-$P2_7$, $P3_0$-$P3_7$, $P4_0$-$P4_7$, $P5_0$-$P5_7$, $P6_0$-$P6_7$, $P7_2$-$P7_7$, $P8_0$-$P8_4$, $P8_6$, $P8_7$, $P9_0$-$P9_7$, $P10_0$-$P10_7$, $P11_0$-$P11_4$, $P12_0$-$P12_7$, $P13_0$-$P13_7$, $P14_0$-$P14_6$, $P15_0$-$P15_7$ (Note 1)	I_{OH}= - 5mA, V_{CC}=5.0V	3.0			V
V_{OH}	HIGH output voltage	$P0_0$-$P0_7$, $P1_0$-$P1_7$, $P2_0$-$P2_7$, $P3_0$-$P3_7$, $P4_0$-$P4_7$, $P5_0$-$P5_7$, $P6_0$-$P6_7$, $P7_2$-$P7_7$, $P8_0$-$P8_4$, $P8_6$, $P8_7$, $P9_0$-$P9_7$, $P10_0$-$P10_7$, $P11_0$-$P11_4$, $P12_0$-$P12_7$, $P13_0$-$P13_7$, $P14_0$-$P14_6$, $P15_0$-$P15_7$ (Note 1)	I_{OH}= - 200µA, V_{CC}=5.0V	4.7			V
V_{OH}	HIGH output voltage	X_{OUT} HIGHPOWER	I_{OH}= - 1mA, V_{CC}=5.0V	3.0			V
		X_{OUT} LOWPOWER	I_{OH}= - 0.5mA, V_{CC}=5.0V	3.0			
	HIGH output voltage	X_{COUT} HIGHPOWER	With no load applied, V_{CC}=5.0V		3.0		V
		X_{COUT} LOWPOWER	With no load applied, V_{CC}=5.0V		1.6		
V_{OL}	LOW output voltage	$P0_0$-$P0_7$, $P1_0$-$P1_7$, $P2_0$-$P2_7$, $P3_0$-$P3_7$, $P4_0$-$P4_7$, $P5_0$-$P5_7$, $P6_0$-$P6_7$, $P7_0$-$P7_7$, $P8_0$-$P8_4$, $P8_6$, $P8_7$, $P9_0$-$P9_7$, $P10_0$-$P10_7$, $P11_0$-$P11_4$, $P12_0$-$P12_7$, $P13_0$-$P13_7$, $P14_0$-$P14_6$, $P15_0$-$P15_7$ (Note 1)	I_{OL}=5mA, V_{CC}=5.0V			2.0	V
V_{OL}	LOW output voltage	$P0_0$-$P0_7$, $P1_0$-$P1_7$, $P2_0$-$P2_7$, $P3_0$-$P3_7$, $P4_0$-$P4_7$, $P5_0$-$P5_7$, $P6_0$-$P6_7$, $P7_0$-$P7_7$, $P8_0$-$P8_4$, $P8_6$, $P8_7$, $P9_0$-$P9_7$, $P10_0$-$P10_7$, $P11_0$-$P11_4$, $P12_0$-$P12_7$, $P13_0$-$P13_7$, $P14_0$-$P14_6$, $P15_0$-$P15_7$ (Note 1)	I_{OL}=200µA, V_{CC}=5.0V			0.45	V
V_{OL}	LOW output voltage	X_{OUT} HIGHPOWER	I_{OL}=1mA, V_{CC}=5.0V			2.0	V
		X_{OUT} LOWPOWER	I_{OL}=0.5mA, V_{CC}=5.0V			2.0	
	LOW output voltage	X_{COUT} HIGHPOWER	With no load applied, V_{CC}=5.0V		0		V
		X_{COUT} LOWPOWER	With no load applied, V_{CC}=5.0V		0		
V_{T+}-V_{T-}	Hysteresis	$\overline{HOLD}$, $\overline{RDY}$, TA0$_{IN}$-TA4$_{IN}$, $\overline{TB0_{IN}}$-$\overline{TB5_{IN}}$, $\overline{INT0}$-$\overline{INT5}$, AD_{TRG}, $\overline{CTS0}$-$\overline{CTS4}$, CLK0-CLK4, TA0$_{OUT}$-TA4$_{OUT}$,$\overline{NMI}$, $\overline{KI0}$-$\overline{KI3}$,RxD0-RxD4, SCL2-SCL4, SDA2-SDA4	V_{CC}=5.0V	0.2		1.0	V
V_{T+}-V_{T-}	Hysteresis	$\overline{RESET}$	V_{CC}=5.0V	0.2		1.8	V
I_{IH}	HIGH input current	$P0_0$-$P0_7$, $P1_0$-$P1_7$, $P2_0$-$P2_7$, $P3_0$-$P3_7$, $P4_0$-$P4_7$, $P5_0$-$P5_7$, $P6_0$-$P6_7$, $P7_0$-$P7_7$, $P8_0$-$P8_7$, $P9_0$-$P9_7$,$P10_0$-$P10_7$, $P11_0$-$P11_4$, $P12_0$-$P12_7$,$P13_0$-$P13_7$, $P14_0$-$P14_6$, $P15_0$-$P15_7$, X_{IN}, $\overline{RESET}$, CNVss, BYTE (Note 1)	V_I=5V, V_{CC}=5.0V			5.0	µA
I_{IL}	LOW input current	$P0_0$-$P0_7$, $P1_0$-$P1_7$, $P2_0$-$P2_7$, $P3_0$-$P3_7$, $P4_0$-$P4_7$, $P5_0$-$P5_7$, $P6_0$-$P6_7$, $P7_0$-$P7_7$, $P8_0$-$P8_7$, $P9_0$-$P9_7$,$P10_0$-$P10_7$, $P11_0$-$P11_4$, $P12_0$-$P12_7$,$P13_0$-$P13_7$, $P14_0$-$P14_6$, $P15_0$-$P15_7$, X_{IN}, $\overline{RESET}$, CNVss, BYTE (Note 1)	V_I=0V, V_{CC}=5.0V			- 5.0	µA
R_{PULLUP}	Pull-up resistance	$P0_0$-$P0_7$, $P1_0$-$P1_7$, $P2_0$-$P2_7$, $P3_0$-$P3_7$, $P4_0$-$P4_7$, $P5_0$-$P5_7$, $P6_0$-$P6_7$, $P7_2$-$P7_7$, $P8_0$-$P8_4$, $P8_6$, $P8_7$, $P9_0$-$P9_7$,$P10_0$-$P10_7$, $P11_0$-$P11_4$, $P12_0$-$P12_7$, $P13_0$-$P13_7$, $P14_0$-$P14_6$, $P15_0$-$P15_7$ (Note 1)	V_I=0V, V_{CC}=5.0V	30.0	50.0	167.0	kΩ
R_{fXIN}	Feedback resistance X_{IN}				1.0		MΩ
R_{fXCIN}	Feedback resistance X_{CIN}				6.0		MΩ
V_{RAM}	RAM retention voltage		When clock is stopped	2.0			V
Icc	Power supply current	Measuring condition: In single-chip mode, the output pins are open and other pins are V_{SS}	f(X_{IN})=20MHz Square wave, no division — Mask ROM 128 KB version ROMless RAM 10 KB version(Note 2)		45.0	72.0	mA
			Mask ROM 256 KB version ROMless RAM 24 KB version (Note 2)		50.0	80.0	
			Flash memory version		50.0	80.0	
			f(X_{CIN})=32kHz Square wave — Mask ROM 128 KB version ROMless RAM 10 KB version(Note 2)		90.0		µA
			Mask ROM 256 KB version ROMless RAM 24 KB version (Note 2)		100.0		
			Flash memory version		7.0		mA
			f(XCIN)=32kHz When a WAIT instruction is executed		4.0		µA
			Topr=25°C when clock is stopped — Mask ROM 128 KB version ROMless RAM 10KB version (Note 2)			1.0	µA
			Mask ROM 256 KB version ROMless RAM 24KB version (Note 2)			2.0	
			Flash memory version			1.0	
			Topr=85°C when clock is stopped			20.0	

Note 1: Port P11 to P15 exist in 144-pin version.
Note 2: ROMless version exists in 144-pin version.

V_{CC} = 5V

Timing requirements (referenced to V_{CC} = 5V, V_{SS} = 0V at Topr = 25°C unless otherwise specified)

Table 28.6 External clock input

Symbol	Parameter	Standard		Unit
		Min.	Max.	
t_c	External clock input cycle time	50		ns
$t_{w(H)}$	External clock input HIGH pulse width	22		ns
$t_{w(L)}$	External clock input LOW pulse width	22		ns
t_r	External clock rise time		5	ns
t_f	External clock fall time		5	ns

Table 28.7 Memory expansion and microprocessor modes

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_{ac1(RD-DB)}$	Data input access time (RD standard, no wait)		(Note)	ns
$t_{ac1(AD-DB)}$	Data input access time (AD standard, CS standard, no wait)		(Note)	ns
$t_{ac2(RD-DB)}$	Data input access time (RD standard, with wait)		(Note)	ns
$t_{ac2(AD-DB)}$	Data input access time (AD standard, CS standard, with wait)		(Note)	ns
$t_{ac3(RD-DB)}$	Data input access time (RD standard, when accessing multiplex bus area)		(Note)	ns
$t_{ac3(AD-DB)}$	Data input access time (AD standard, CS standard, when accessing multiplex bus area)		(Note)	ns
$t_{ac4(RAS-DB)}$	Data input access time (RAS standard, DRAM access)		(Note)	ns
$t_{ac4(CAS-DB)}$	Data input access time (CAS standard, DRAM access)		(Note)	ns
$t_{ac4(CAD-DB)}$	Data input access time (CAD standard, DRAM access)		(Note)	ns
$t_{su(DB-BCLK)}$	Data input setup time	26		ns
$t_{su(RDY-BCLK)}$	$\overline{RDY}$ input setup time	26		ns
$t_{su(HOLD-BCLK)}$	$\overline{HOLD}$ input setup time	30		ns
$t_{h(RD-DB)}$	Data input hold time	0		ns
$t_{h(CAS-DB)}$	Data input hold time	0		ns
$t_{h(BCLK-RDY)}$	$\overline{RDY}$ input hold time	0		ns
$t_{h(BCLK-HOLD)}$	$\overline{HOLD}$ input hold time	0		ns
$t_{d(BCLK-HLDA)}$	$\overline{HLDA}$ output delay time		25	ns

Note: Calculated according to the BCLK frequency as follows:
Note that inserting wait or using lower operation frequency f(BCLK) is needed when calculated value is negative.

$$t_{ac1(RD-DB)} = \frac{10^9}{f(BCLK) \times 2} - 35 \quad [ns]$$

$$t_{ac1(AD-DB)} = \frac{10^9}{f(BCLK)} - 35 \quad [ns]$$

$$t_{ac2(RD-DB)} = \frac{10^9 \times m}{f(BCLK) \times 2} - 35 \quad [ns] \text{ (m=3, 5 and 7 when 1 wait, 2 wait and 3 wait, respectively)}$$

$$t_{ac2(AD-DB)} = \frac{10^9 \times n}{f(BCLK)} - 35 \quad [ns] \text{ (n=2, 3 and 4 when 1 wait, 2 wait and 3 wait, respectively)}$$

$$t_{ac3(RD-DB)} = \frac{10^9 \times m}{f(BCLK) \times 2} - 35 \quad [ns] \text{ (m=3 and 5 when 2 wait and 3 wait, respectively)}$$

$$t_{ac3(AD-DB)} = \frac{10^9 \times n}{f(BCLK) \times 2} - 35 \quad [ns] \text{ (n=5 and 7 when 2 wait and 3 wait, respectively)}$$

$$t_{ac4(RAS-DB)} = \frac{10^9 \times m}{f(BCLK) \times 2} - 35 \quad [ns] \text{ (m=3 and 5 when 1 wait and 2 wait, respectively)}$$

$$t_{ac4(CAS-DB)} = \frac{10^9 \times n}{f(BCLK) \times 2} - 35 \quad [ns] \text{ (n=1 and 3 when 1 wait and 2 wait, respectively)}$$

$$t_{ac4(CAD-DB)} = \frac{10^9 \times l}{f(BCLK)} - 35 \quad [ns] \text{ (l=1 and 2 when 1 wait and 2 wait, respectively)}$$

V_{CC} = 5V

Timing requirements (referenced to V_{CC} = 5V, V_{SS} = 0V at Topr = 25°C unless otherwise specified)

Table 28.8 Timer A input (counter input in event counter mode)

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_{c(TA)}$	TAiIN input cycle time	100		ns
$t_{w(TAH)}$	TAiIN input HIGH pulse width	40		ns
$t_{w(TAL)}$	TAiIN input LOW pulse width	40		ns

Table 28.9 Timer A input (gating input in timer mode)

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_{c(TA)}$	TAiIN input cycle time	400		ns
$t_{w(TAH)}$	TAiIN input HIGH pulse width	200		ns
$t_{w(TAL)}$	TAiIN input LOW pulse width	200		ns

Table 28.10 Timer A input (external trigger input in one-shot timer mode)

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_{c(TA)}$	TAiIN input cycle time	200		ns
$t_{w(TAH)}$	TAiIN input HIGH pulse width	100		ns
$t_{w(TAL)}$	TAiIN input LOW pulse width	100		ns

Table 28.11 Timer A input (external trigger input in pulse width modulation mode)

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_{w(TAH)}$	TAiIN input HIGH pulse width	100		ns
$t_{w(TAL)}$	TAiIN input LOW pulse width	100		ns

Table 28.12 Timer A input (up/down input in event counter mode)

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_{c(UP)}$	TAiOUT input cycle time	2000		ns
$t_{w(UPH)}$	TAiOUT input HIGH pulse width	1000		ns
$t_{w(UPL)}$	TAiOUT input LOW pulse width	1000		ns
$t_{su(UP-TIN)}$	TAiOUT input setup time	400		ns
$t_{h(TIN-UP)}$	TAiOUT input hold time	400		ns

V_{CC} = 5V

Timing requirements (referenced to V_{CC} = 5V, V_{SS} = 0V at Topr = 25°C unless otherwise specified)

Table 28.13 Timer B input (counter input in event counter mode)

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_{c(TB)}$	TBiIN input cycle time (counted on one edge)	100		ns
$t_{w(TBH)}$	TBiIN input HIGH pulse width (counted on one edge)	40		ns
$t_{w(TBL)}$	TBiIN input LOW pulse width (counted on one edge)	40		ns
$t_{c(TB)}$	TBiIN input cycle time (counted on both edges)	200		ns
$t_{w(TBH)}$	TBiIN input HIGH pulse width (counted on both edges)	80		ns
$t_{w(TBL)}$	TBiIN input LOW pulse width (counted on both edges)	80		ns

Table 28.14 Timer B input (pulse period measurement mode)

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_{c(TB)}$	TBiIN input cycle time	400		ns
$t_{w(TBH)}$	TBiIN input HIGH pulse width	200		ns
$t_{w(TBL)}$	TBiIN input LOW pulse width	200		ns

Table 28.15 Timer B input (pulse width measurement mode)

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_{c(TB)}$	TBiIN input cycle time	400		ns
$t_{w(TBH)}$	TBiIN input HIGH pulse width	200		ns
$t_{w(TBL)}$	TBiIN input LOW pulse width	200		ns

Table 28.16 A/D trigger input

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_{c(AD)}$	$\overline{ADTRG}$ input cycle time (trigger able minimum)	1000		ns
$t_{w(ADL)}$	$\overline{ADTRG}$ input LOW pulse width	125		ns

Table 28.17 Serial I/O

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_{c(CK)}$	CLKi input cycle time	200		ns
$t_{w(CKH)}$	CLKi input HIGH pulse width	100		ns
$t_{w(CKL)}$	CLKi input LOW pulse width	100		ns
$t_{d(C-Q)}$	TxDi output delay time		80	ns
$t_{h(C-Q)}$	TxDi hold time	0		ns
$t_{su(D-C)}$	RxDi input setup time	30		ns
$t_{h(C-D)}$	RxDi input hold time	90		ns

Table 28.18 External interrupt $\overline{INTi}$ inputs

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_{w(INH)}$	$\overline{INTi}$ input HIGH pulse width	250		ns
$t_{w(INL)}$	$\overline{INTi}$ input LOW pulse width	250		ns

V_{CC} = 5V

Switching characteristics (referenced to V_{CC} = 5V, V_{SS} = 0V at Topr = 25°C unless otherwise specified)

Table 28.19 Memory expansion mode and microprocessor mode (no wait)

Symbol	Parameter	Measuring condition	Standard		Unit
			Min.	Max.	
$t_{d(BCLK-AD)}$	Address output delay time	Figure 28.1		18	ns
$t_{h(BCLK-AD)}$	Address output hold time (BCLK standard)		-3		ns
$t_{h(RD-AD)}$	Address output hold time (RD standard)		0		ns
$t_{h(WR-AD)}$	Address output hold time (WR standard)		(Note 1)		ns
$t_{d(BCLK-CS)}$	Chip select output delay time			18	ns
$t_{h(BCLK-CS)}$	Chip select output hold time (BCLK standard)		-3		ns
$t_{h(RD-CS)}$	Chip select output hold time (RD standard)		0		ns
$t_{h(WR-CS)}$	Chip select output hold time (WR standard)		(Note 1)		ns
$t_{d(BCLK-ALE)}$	ALE signal output delay time			18	ns
$t_{h(BCLK-ALE)}$	ALE signal output hold time		– 2		ns
$t_{d(BCLK-RD)}$	RD signal output delay time			10	ns
$t_{h(BCLK-RD)}$	RD signal output hold time		-5		ns
$t_{d(BCLK-WR)}$	WR signal output delay time			18	ns
$t_{h(BCLK-WR)}$	WR signal output hold time		-3		ns
$t_{d(DB-WR)}$	Data output delay time (WR standard)		(Note 1)		ns
$t_{h(WR-DB)}$	Data output hold time (WR standard)		(Note 1)		ns
$t_{w(WR)}$	WR signal width		(Note 1)		ns

Note 1: Calculated according to the BCLK frequency as follows:

$$t_{d(DB-WR)} = \frac{10^9}{f_{(BCLK)}} - 20 \quad [ns]$$

$$t_{h(WR-DB)} = \frac{10^9}{f_{(BCLK)} \times 2} - 10 \quad [ns]$$

$$t_{h(WR-AD)} = \frac{10^9}{f_{(BCLK)} \times 2} - 10 \quad [ns]$$

$$t_{h(WR-CS)} = \frac{10^9}{f_{(BCLK)} \times 2} - 10 \quad [ns]$$

$$t_{w(WR)} = \frac{10^9}{f_{(BCLK)} \times 2} - 15 \quad [ns]$$

V_{CC} = 5V

Switching characteristics (referenced to V_{CC} = 5V, V_{SS} = 0V at Topr = 25°C unless otherwise specified)

Table 28.20 Memory expansion mode and microprocessor mode (with wait, accessing external memory)

Symbol	Parameter	Measuring condition	Standard		Unit
			Min.	Max.	
$t_{d(BCLK-AD)}$	Address output delay time	Figure 28.1		18	ns
$t_{h(BCLK-AD)}$	Address output hold time (BCLK standard)		– 3		ns
$t_{h(RD-AD)}$	Address output hold time (RD standard)		0		ns
$t_{h(WR-AD)}$	Address output hold time (WR standard)		(Note 1)		ns
$t_{d(BCLK-CS)}$	Chip select output delay time			18	ns
$t_{h(BCLK-CS)}$	Chip select output hold time (BCLK standard)		– 3		ns
$t_{h(RD-CS)}$	Chip select output hold time (RD standard)		0		ns
$t_{h(WR-CS)}$	Chip select output hold time (WR standard)		(Note 1)		ns
$t_{d(BCLK-ALE)}$	ALE signal output delay time			18	ns
$t_{h(BCLK-ALE)}$	ALE signal output hold time		– 2		ns
$t_{d(BCLK-RD)}$	RD signal output delay time			10	ns
$t_{h(BCLK-RD)}$	RD signal output hold time		– 5		ns
$t_{d(BCLK-WR)}$	WR signal output delay time			18	ns
$t_{h(BCLK-WR)}$	WR signal output hold time		– 3		ns
$t_{d(DB-WR)}$	Data output delay time (WR standard)		(Note 1)		ns
$t_{h(WR-DB)}$	Data output hold time (WR standard)		(Note 1)		ns
$t_{w(WR)}$	WR signal width		(Note 1)		ns

Note 1: Calculated according to the BCLK frequency as follows:

$$t_{d(DB-WR)} = \frac{10^9 \times n}{f_{(BCLK)}} - 20 \quad [ns] \quad (n=1, 2 \text{ and } 3 \text{ when 1 wait, 2 wait and 3 wait, respectively})$$

$$t_{h(WR-DB)} = \frac{10^9}{f_{(BCLK)} \times 2} - 10 \quad [ns]$$

$$t_{h(WR-AD)} = \frac{10^9}{f_{(BCLK)} \times 2} - 10 \quad [ns]$$

$$t_{h(WR-CS)} = \frac{10^9}{f_{(BCLK)} \times 2} - 10 \quad [ns]$$

$$t_{w(WR)} = \frac{10^9 \times n}{f_{(BCLK)} \times 2} - 15 \quad [ns] \quad (n=1, 3 \text{ and } 5 \text{ when 1 wait, 2 wait and 3 wait, respectively})$$

V_{CC} = 5V

Switching characteristics (referenced to V_{CC} = 5V, V_{SS} = 0V at Topr = 25°C unless otherwise specified)

Table 28.21 Memory expansion mode and microprocessor mode (with wait, accessing external memory, multiplex bus area selected)

Symbol	Parameter	Measuring condition	Standard		Unit
			Min.	Max.	
$t_{d(BCLK-AD)}$	Address output delay time	Figure 28.1		18	ns
$t_{h(BCLK-AD)}$	Address output hold time (BCLK standard)		-3		ns
$t_{h(RD-AD)}$	Address output hold time (RD standard)		(Note 1)		ns
$t_{h(WR-AD)}$	Address output hold time (WR standard)		(Note 1)		ns
$t_{d(BCLK-CS)}$	Chip select output delay time			18	ns
$t_{h(BCLK-CS)}$	Chip select output hold time (BCLK standard)		-3		ns
$t_{h(RD-CS)}$	Chip select output hold time (RD standard)		(Note 1)		ns
$t_{h(WR-CS)}$	Chip select output hold time (WR standard)		(Note 1)		ns
$t_{d(BCLK-RD)}$	RD signal output delay time			18	ns
$t_{h(BCLK-RD)}$	RD signal output hold time		-5		ns
$t_{d(BCLK-WR)}$	WR signal output delay time			18	ns
$t_{h(BCLK-WR)}$	WR signal output hold time		-3		ns
$t_{d(DB-WR)}$	Data output delay time (WR standard)		(Note 1)		ns
$t_{h(WR-DB)}$	Data output hold time (WR standard)		(Note 1)		ns
$t_{d(BCLK-ALE)}$	ALE signal output delay time (BCLK standard)			18	ns
$t_{h(BCLK-ALE)}$	ALE signal output hold time (BCLK standard)		– 2		ns
$t_{d(AD-ALE)}$	ALE signal output delay time (address standard)		(Note 1)		ns
$t_{h(ALE-AD)}$	ALE signal output hold time (address standard)		(Note 1)		ns
$t_{dz(RD-AD)}$	Address output flowting start time			8	ns
$t_{h(BCLK-DB)}$	Data output hold time (BCLK standard)		-5		ns

Note 1: Calculated according to the BCLK frequency as follows:

$$t_{h(RD-AD)} = \frac{10^9}{f_{(BCLK)} \times 2} - 10 \quad [ns]$$

$$t_{h(WR-AD)} = \frac{10^9}{f_{(BCLK)} \times 2} - 10 \quad [ns]$$

$$t_{h(RD-CS)} = \frac{10^9}{f_{(BCLK)} \times 2} - 10 \quad [ns]$$

$$t_{h(WR-CS)} = \frac{10^9}{f_{(BCLK)} \times 2} - 10 \quad [ns]$$

$$t_{d(DB-WR)} = \frac{10^9 \times m}{f_{(BCLK)} \times 2} - 25 \quad [ns] \quad (m=3 \text{ and } 5 \text{ when 2 wait and 3 wait, respectively})$$

$$t_{h(WR-DB)} = \frac{10^9}{f_{(BCLK)} \times 2} - 10 \quad [ns]$$

$$t_{d(AD-ALE)} = \frac{10^9}{f_{(BCLK)} \times 2} - 23 \quad [ns]$$

$$t_{h(ALE-AD)} = \frac{10^9}{f_{(BCLK)} \times 2} - 10 \quad [ns]$$

V_{CC} = 5V

Switching characteristics (referenced to V_{CC} = 5V, V_{SS} = 0V at Topr = 25°C unless otherwise specified)

Table 28.22 Memory expansion mode and microprocessor mode (with wait, accessing external memory, DRAM area selected)

Symbol	Parameter	Measuring condition	Standard		Unit
			Min.	Max.	
$t_{d(BCLK-RAD)}$	Row address output delay time	Figure 28.1		18	ns
$t_{h(BCLK-RAD)}$	Row address output hold time (BCLK standard)		-3		ns
$t_{d(BCLK-CAD)}$	String address output delay time			18	ns
$t_{h(BCLK-CAD)}$	String address output hold time (BCLK standard)		-3		ns
$t_{h(RAS-RAD)}$	Row address output hold time after RAS output		(Note 1)		ns
$t_{d(BCLK-RAS)}$	RAS output delay time (BCLK standard)			18	ns
$t_{h(BCLK-RAS)}$	RAS output hold time (BCLK standard)		-3		ns
t_{RP}	RAS "H" hold time		(Note 1)		ns
$t_{d(BCLK-CAS)}$	CAS output delay time (BCLK standard)			18	ns
$t_{h(BCLK-CAS)}$	CAS output hold time (BCLK standard)		-3		ns
$t_{d(BCLK-DW)}$	Data output delay time (BCLK standard)			18	ns
$t_{h(BCLK-DW)}$	Data output hold time (BCLK standard)		-5		ns
$t_{su(DB-CAS)}$	CAS after DB output setup time		(Note 1)		ns
$t_{h(BCLK-DB)}$	DB signal output hold time (BCLK standard)		-7		ns
$t_{su(CAS-RAS)}$	CAS before RAS setup time (refresh)		(Note 1)		ns

Note 1: Calculated according to the BCLK frequency as follows:

$$t_{h(RAS-RAD)} = \frac{10^9}{f_{(BCLK)} \times 2} - 13 \quad [ns]$$

$$t_{RP} = \frac{10^9 \times 3}{f_{(BCLK)} \times 2} - 20 \quad [ns]$$

$$t_{su(DB-CAS)} = \frac{10^9}{f_{(BCLK)}} - 20 \quad [ns]$$

$$t_{su(CAS-RAS)} = \frac{10^9}{f_{(BCLK)} \times 2} - 13 \quad [ns]$$

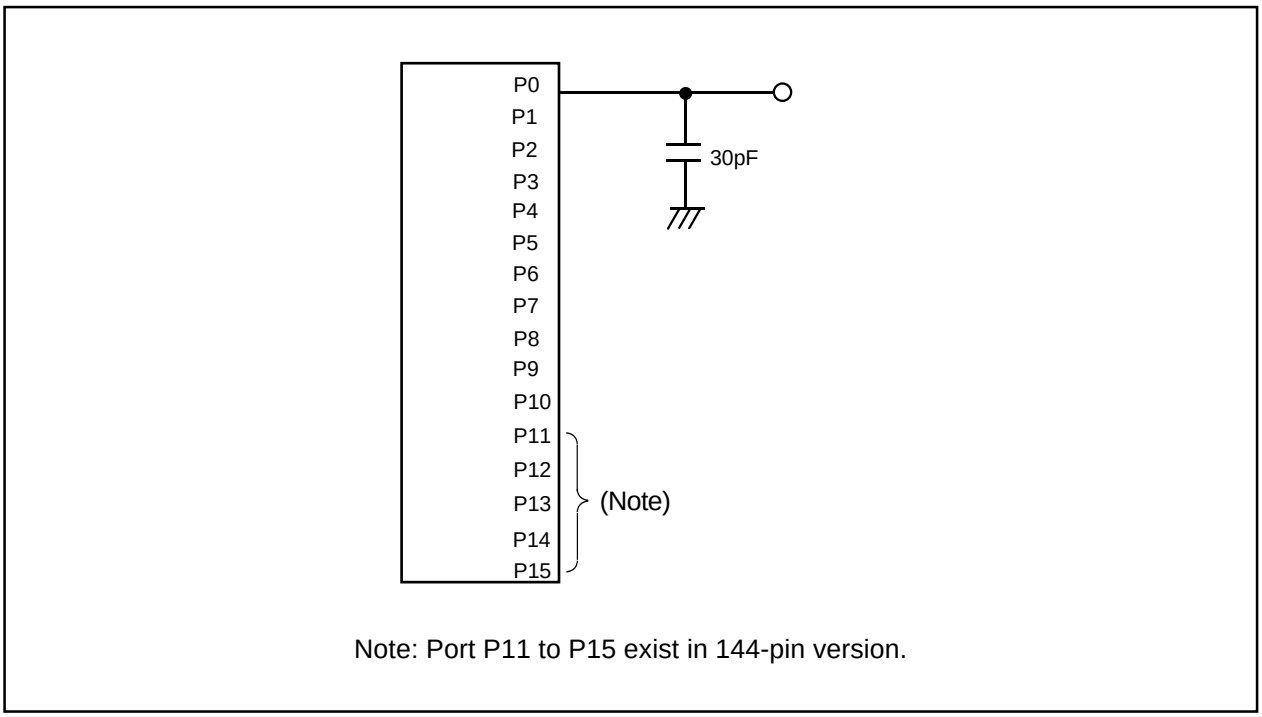

Figure 28.1 Port P0 to P15 measurement circuit

Vcc=5V

Memory expansion Mode and Microprocessor Mode (without wait)

Read Timing

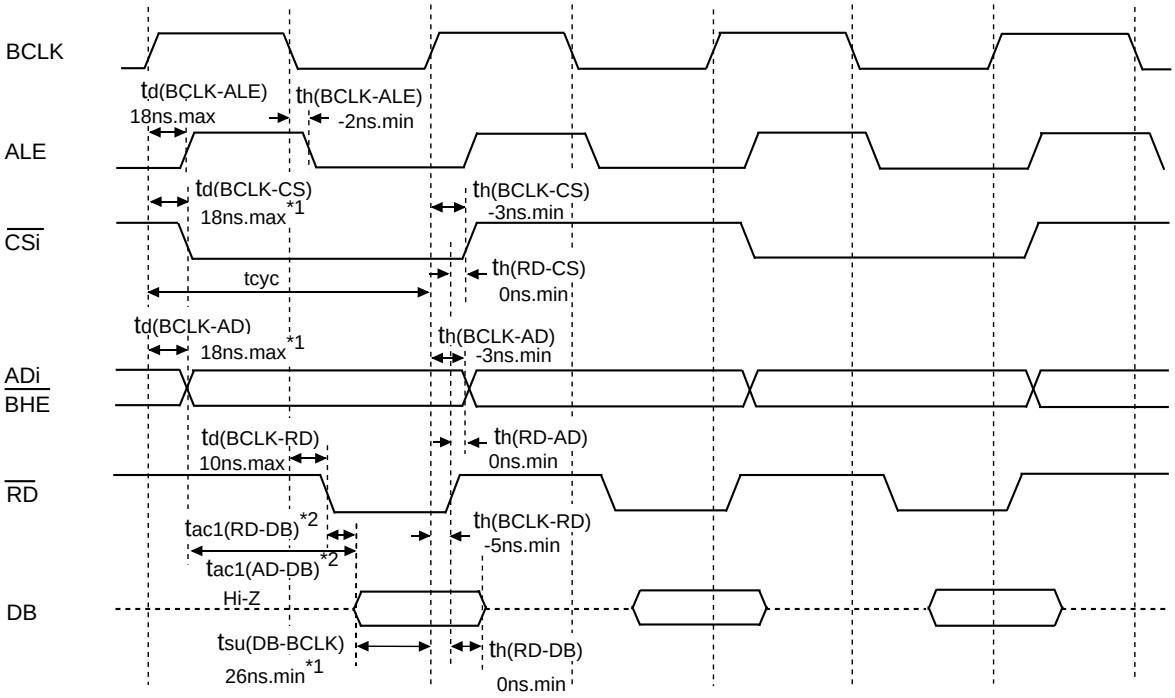

*1:It is a guarantee value with being alone. 35ns.max garantees as $t_{d(BCLK-AD)}+t_{su(DB-BCLK)}$.

*2:It depends on operation frequency.

$t_{ac1(RD-DB)}$=(tcyc/2-35)ns.max

$t_{ac1(AD-DB)}$=(tcyc-35)ns.max

Write Timing (Written by 2 cycles in selecting no wait)

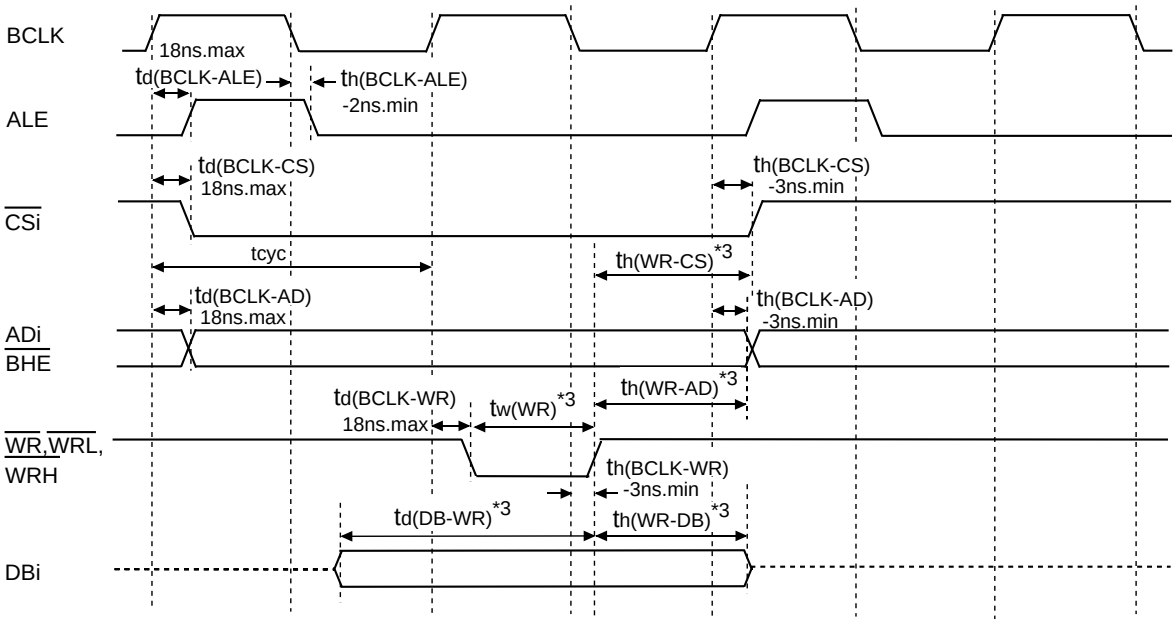

*3:It depends on operation frequency.

$t_{d(DB-WR)}$=(tcyc-20)ns.min

$t_{h(WR-DB)}$=(tcyc/2-10)ns.min

$t_{h(WR-AD)}$=(tcyc/2-10)ns.min

$t_{h(WR-CS)}$=(tcyc/2-10)ns.min

$t_{w(WR)}$=(tcyc/2-15)ns.min

Measuring conditions

- V_{CC}=5V±10%
- Input timing voltage :Determined with V_{IH}=2.5V, V_{IL}=0.8V
- Output timing voltage :Determined with V_{OH}=2.0V, V_{OL}=0.8V

Figure 28.2 Vcc=5V timing diagram (1)

Vcc=5V

Memory expansion Mode and Microprocessor Mode (with 1 wait)

Read Timing

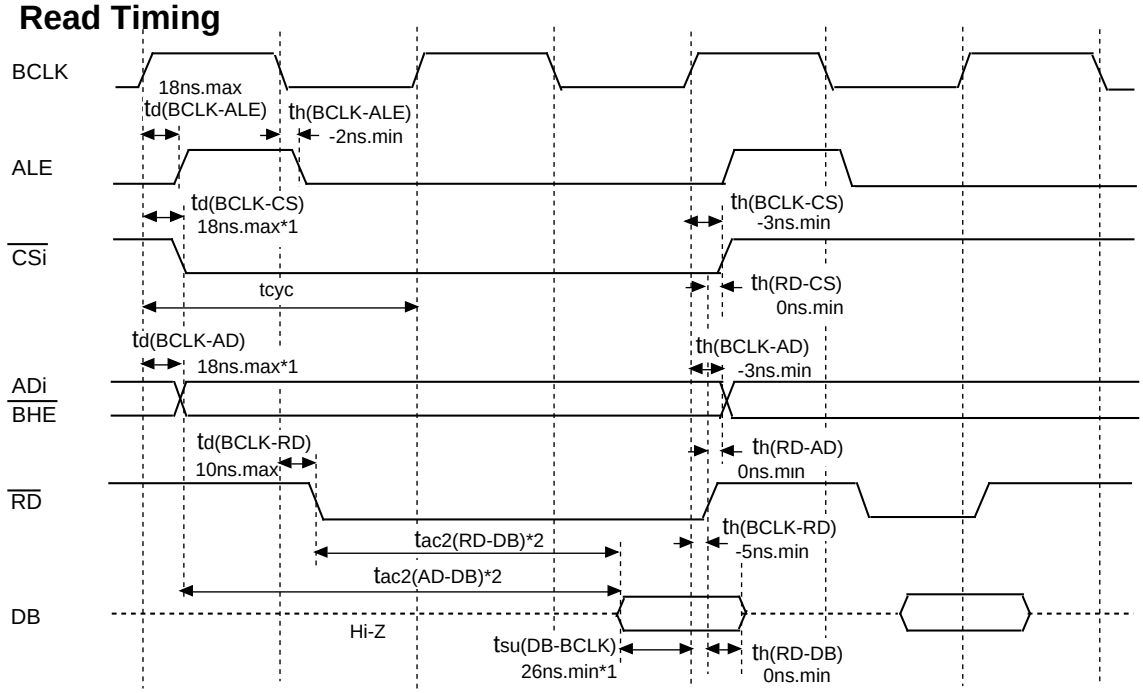

*1:It is a guarantee value with being alone. 35ns.max garantees as $t_{d(BCLK-AD)}+t_{su(DB-BCLK)}$.
*2:It depends on operation frequency.
$t_{ac2(RD-DB)}$=(tcyc/2 x m-35)ns.max (m=3, 5 and 7 when 1 wait, 2 wait and 3 wait, respectively.)
$t_{ac2(AD-DB)}$=(tcyc x n-35)ns.max (n=2, 3 and 4 when 1 wait, 2 wait and 3 wait, respectively.)

Write Timing

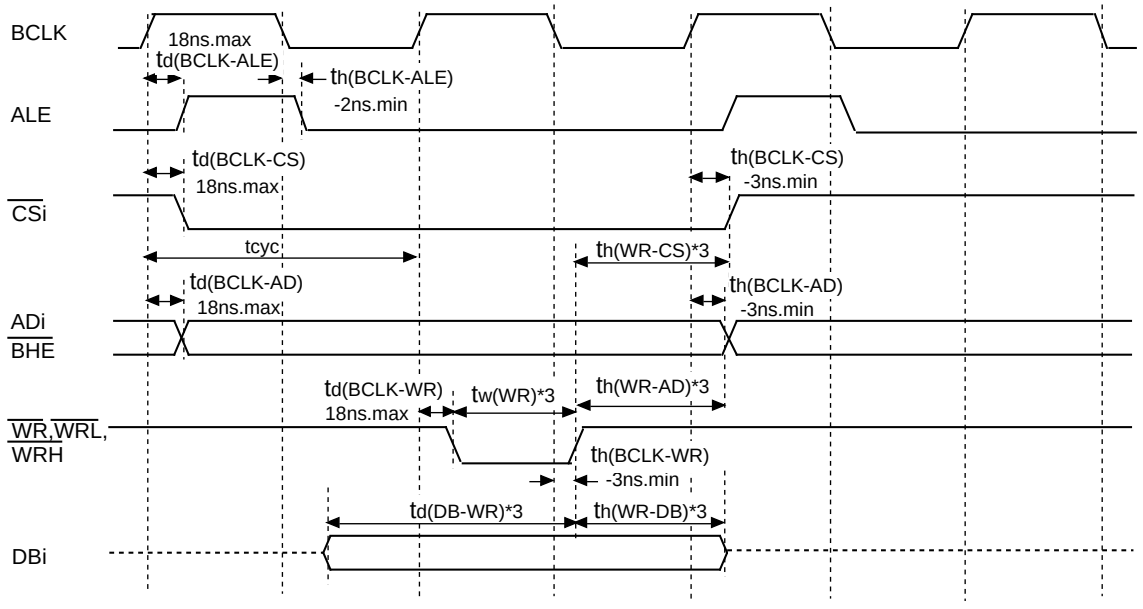

*3:It depends on operation frequency.
$t_{d(DB-WR)}$=(tcyc x n-20)ns.min
(n=1, 2 and 3 when 1 wait, 2 wait and 3 wait, respectively.)
$t_{h(WR-DB)}$=(tcyc/2-10)ns.min
$t_{h(WR-AD)}$=(tcyc/2-10)ns.min
$t_{h(WR-CS)}$=(tcyc/2-10)ns.min
$t_{w(WR)}$=(tcyc/2 x n-15)ns.min
(n=1, 3 and 5 when 1 wait, 2 wait and 3 wait, respectively.)

Measuring conditions
- V_{CC}=5V±10%
- Input timing voltage
  :Determined with V_{IH}=2.5V, V_{IL}=0.8V
- Output timing voltage
  :Determined with V_{OH}=2.0V, V_{OL}=0.8V

Figure 28.3 Vcc=5V timing diagram (2)

Memory expansion Mode and Microprocessor Mode (with 2 wait)

Vcc=5V

Read Timing

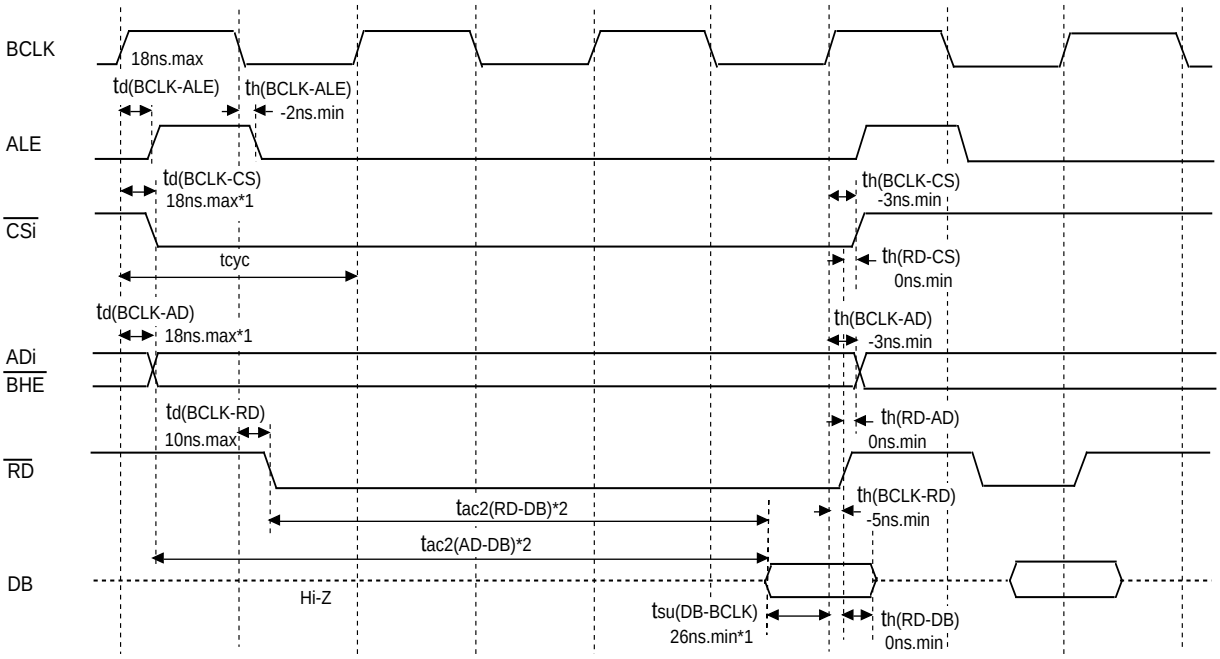

*1:It is a guarantee value with being alone. 35ns.max garantees as $t_{d(BCLK-AD)}+t_{su(DB-BCLK)}$.
*2:It depends on operation frequency.
$t_{ac2(RD-DB)}$=(tcyc/2 x m-35)ns.max (m=3, 5 and 7 when 1 wait, 2 wait and 3 wait, respectively.)
$t_{ac2(AD-DB)}$=(tcyc x n-35)ns.max (n=2, 3 and 4 when 1 wait, 2 wait and 3 wait, respectively.)

Write Timing

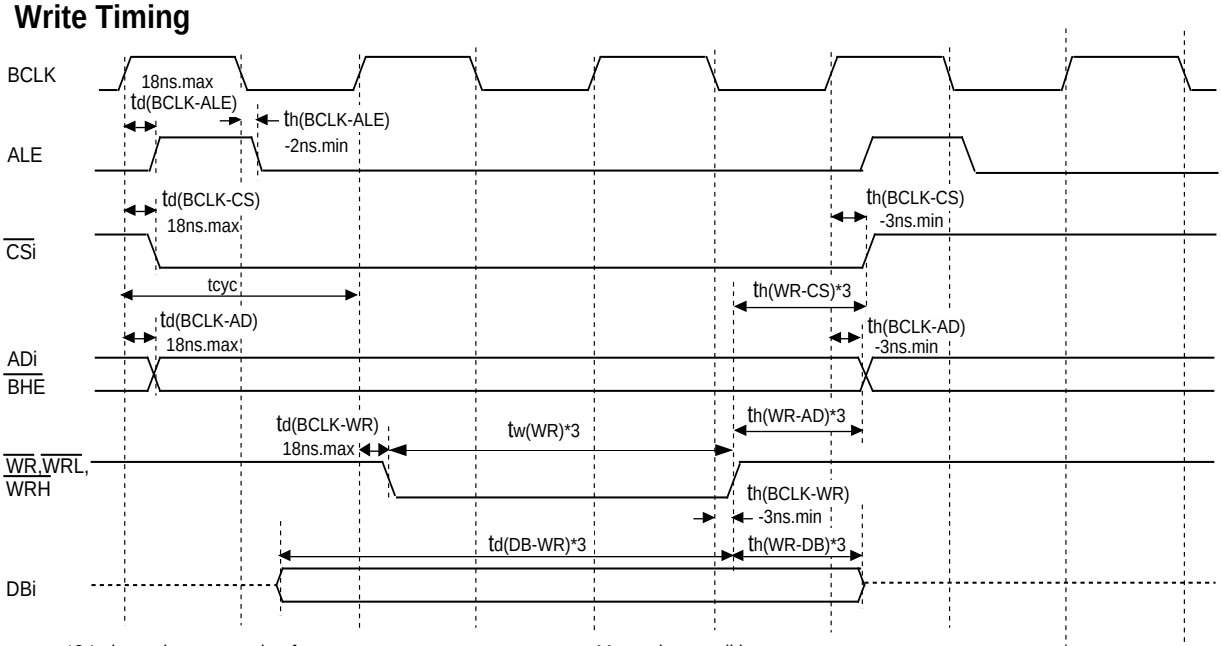

*3:It depends on operation frequency.
$t_{d(DB-WR)}$=(tcyc x n-20)ns.min
(n=1, 2 and 3 when 1 wait, 2 wait and 3 wait, respectively.)
$t_{h(WR-DB)}$=(tcyc/2-10)ns.min
$t_{h(WR-AD)}$=(tcyc/2-10)ns.min
$t_{h(WR-CS)}$=(tcyc/2-10)ns.min
$t_{w(WR)}$=(tcyc/2 x n-15)ns.min
(n=1, 3 and 5 when 1 wait, 2 wait and 3 wait, respectively.)

Measuring conditions
- V_{CC}=5V±10%
- Input timing voltage
  :Determined with V_{IH}=2.5V, V_{IL}=0.8V
- Output timing voltage
  :Determined with V_{OH}=2.0V, V_{OL}=0.8V

Figure 28.4 Vcc=5V timing diagram (3)

Memory expansion Mode and Microprocessor Mode (with 3 wait)

Vcc=5V

Read Timing

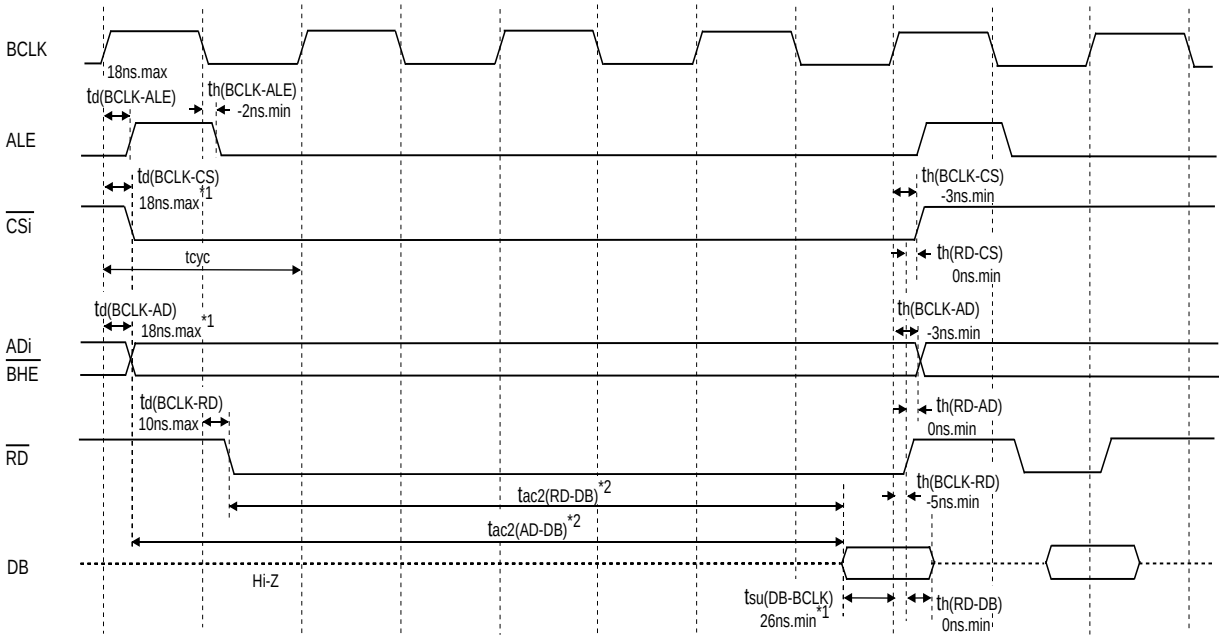

*1:It is a guarantee value with being alone. 35ns.max garantees as td(BCLK-AD)+tsu(DB-BCLK).

*2:It depends on operation frequency.

tac2(RD-DB)=(tcyc/2 x m-35)ns.max (m=3, 5 and 7 when 1 wait, 2 wait and 3 wait, respectively.)

tac2(AD-DB)=(tcyc x n-35)ns.max (n=2, 3 and 4 when 1 wait, 2 wait and 3 wait, respectively.)

Write Timing

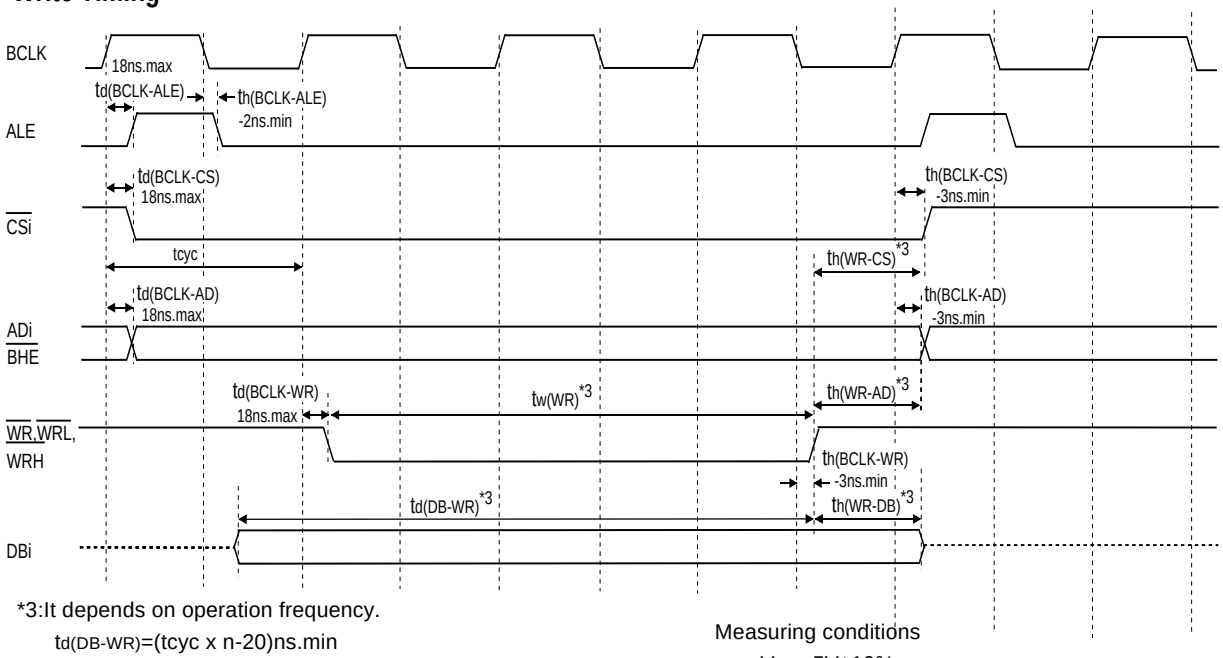

*3:It depends on operation frequency.

td(DB-WR)=(tcyc x n-20)ns.min

(n=1, 2 and 3 when 1 wait, 2 wait and 3 wait, respectively.)

th(WR-DB)=(tcyc/2-10)ns.min

th(WR-AD)=(tcyc/2-10)ns.min

th(WR-CS)=(tcyc/2-10)ns.min

tw(WR)=(tcyc/2 x n-15)ns.min

(n=1, 3 and 5 when 1 wait, 2 wait and 3 wait, respectively.)

Measuring conditions

- VCC=5V±10%
- Input timing voltage
  :Determined with VIH=2.5V, VIL=0.8V
- Output timing voltage
  :Determined with VOH=2.0V, VOL=0.8V

Figure 28.5 VCC=5V timing diagram (4)

Memory expansion Mode and Microprocessor Mode

Vcc=5V

(When accessing external memory area with 2 wait, and select multiplexed bus))

Read Timing

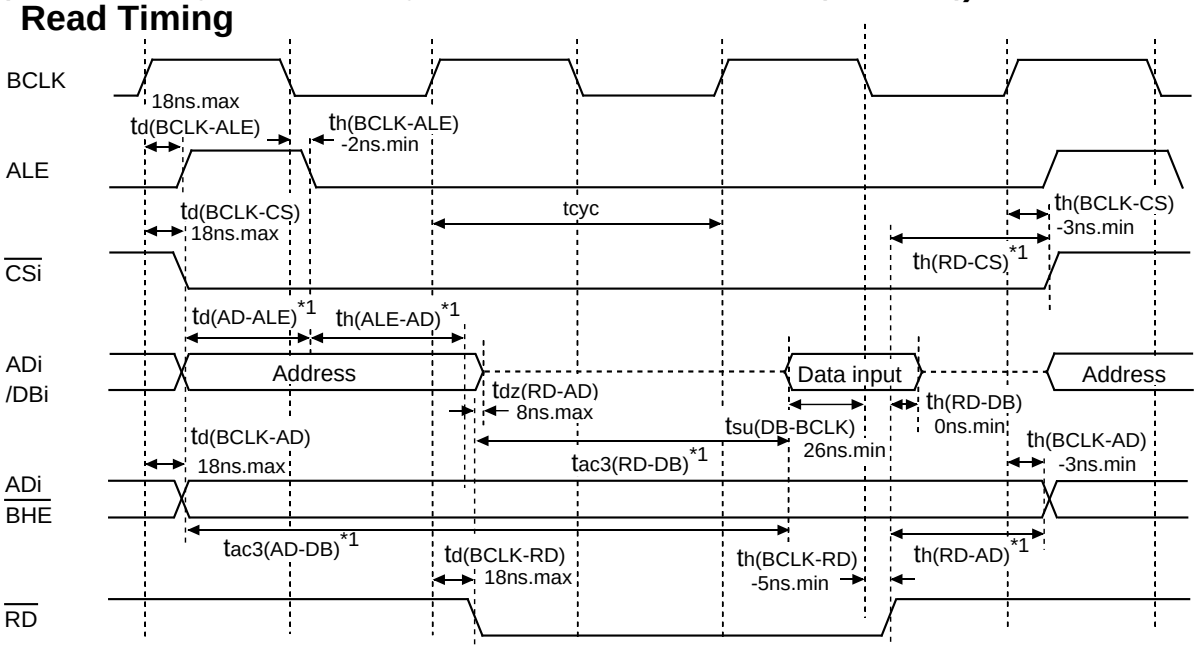

*1:It depends on operation frequency.

$t_{d(AD-ALE)}$=(tcyc/2-23)ns.min

$t_{h(ALE-AD)}$=(tcyc/2-10)ns.min, $t_{h(RD-AD)}$=(tcyc/2-10)ns.min, $t_{h(RD-CS)}$=(tcyc/2-10)ns.min

$t_{ac3(RD-DB)}$=(tcyc/2 x m-35)ns.max (m=3 and 5 when 2 wait and 3 wait, respectively.)

$t_{ac3(AD-DB)}$=(tcyc/2 x n-35)ns.max (n=5 and 7 when 2 wait and 3 wait, respectively.)

Write Timing

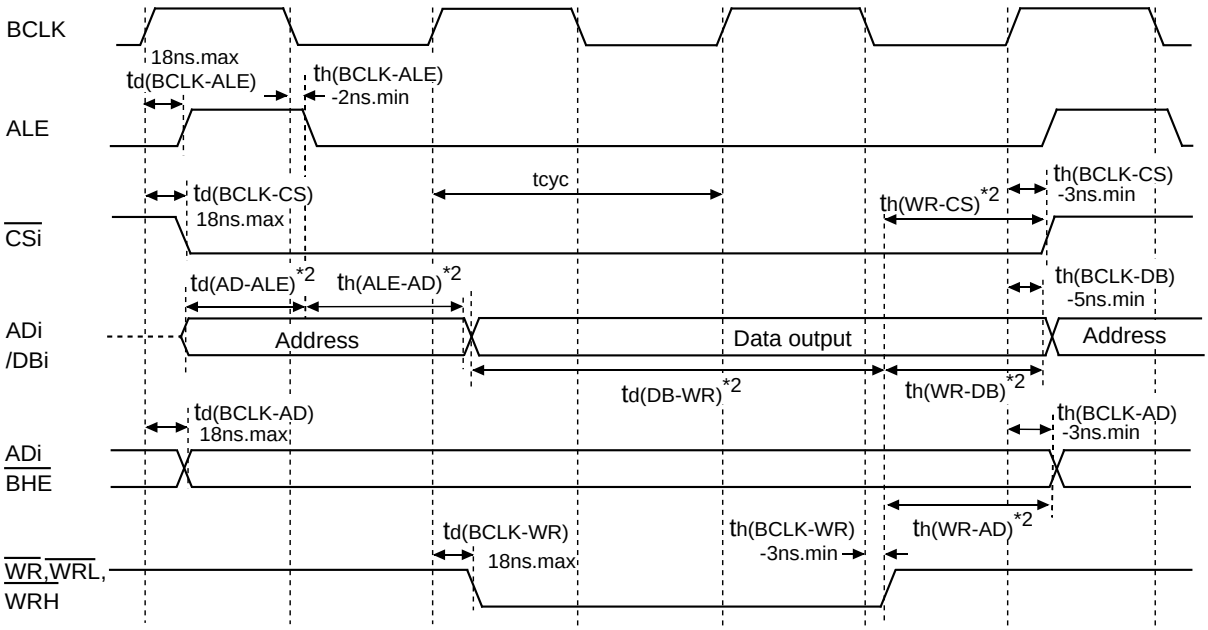

*2:It depends on operation frequency.

$t_{d(AD-ALE)}$=(tcyc/2-23)ns.min

$t_{h(ALE-AD)}$=(tcyc/2-10)ns.min, $t_{h(WR-AD)}$=(tcyc/2-10)ns.min

$t_{h(WR-CS)}$=(tcyc/2-10)ns.min, $t_{h(WR-DB)}$=(tcyc/2-10)ns.min

$t_{d(DB-WR)}$=(tcyc/2 x m-25)ns.min

(m=3 and 5 when 2 wait and 3 wait, respectively.)

Measuring conditions

- V_{CC}=5V±10%
- Input timing voltage
  :Determined with V_{IH}=2.5V, V_{IL}=0.8V
- Output timing voltage
  :Determined with V_{OH}=2.0V, V_{OL}=0.8V

Figure 28.6 Vcc=5V timing diagram (5)

Memory expansion Mode and Microprocessor Mode

Vcc=5V

(When accessing external memory area with 3 wait, and select multiplexed bus))

Read Timing

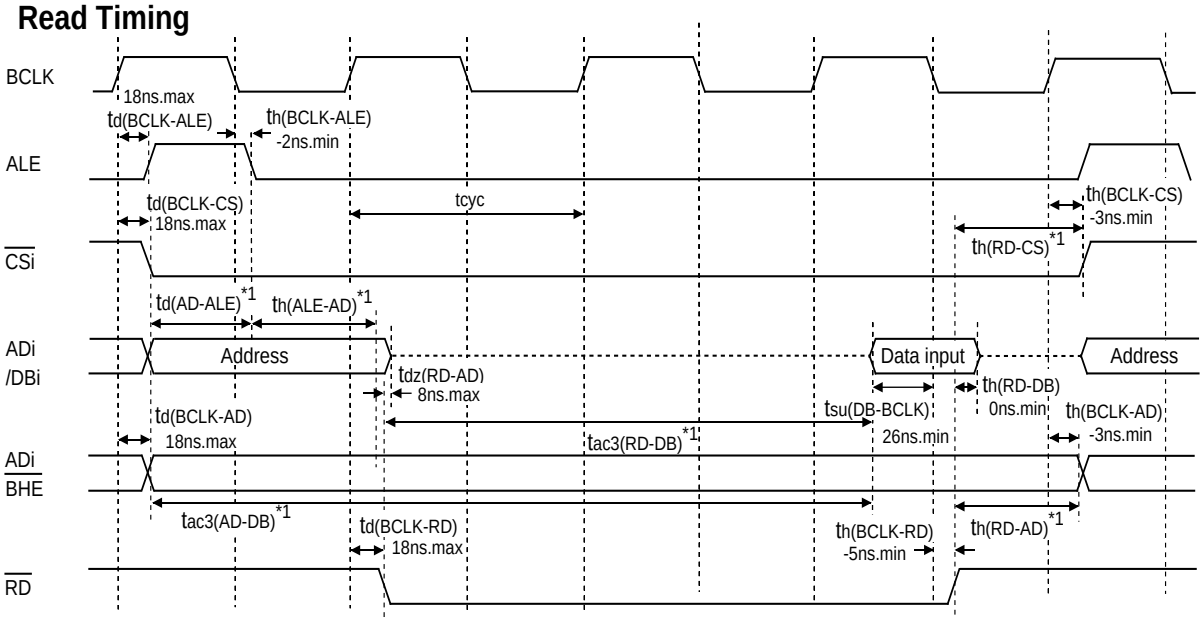

*1:It depends on operation frequency.

$t_{d(AD-ALE)}$=(tcyc/2-23)ns.min

$t_{h(ALE-AD)}$=(tcyc/2-10)ns.min, $t_{h(RD-AD)}$=(tcyc/2-10)ns.min, $t_{h(RD-CS)}$=(tcyc/2-10)ns.min

$t_{ac3(RD-DB)}$=(tcyc/2 x m-35)ns.max (m=3 and 5 when 2 wait and 3 wait, respectively.)

$t_{ac3(AD-DB)}$=(tcyc/2 x n-35)ns.max (n=5 and 7 when 2 wait and 3 wait, respectively.)

Write Timing

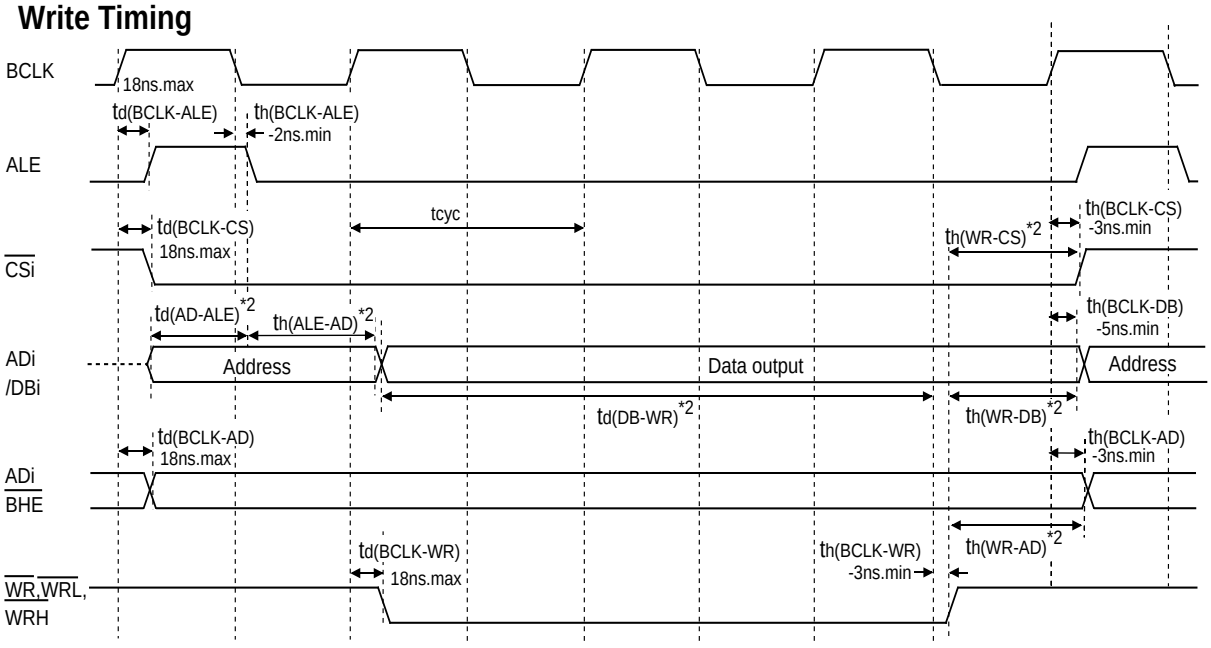

*2:It depends on operation frequency.

$t_{d(AD-ALE)}$=(tcyc/2-23)ns.min

$t_{h(ALE-AD)}$=(tcyc/2-10)ns.min, $t_{h(WR-AD)}$=(tcyc/2-10)ns.min

$t_{h(WR-CS)}$=(tcyc/2-10)ns.min, $t_{h(WR-DB)}$=(tcyc/2-10)ns.min

$t_{d(DB-WR)}$=(tcyc/2 x m-25)ns.min

(m=3 and 5 when 2 wait and 3 wait, respectively.)

Measuring conditions

- V_{CC}=5V±10%
- Input timing voltage
  :Determined with V_{IH}=2.5V, V_{IL}=0.8V
- Output timing voltage
  :Determined with V_{OH}=2.0V, V_{OL}=0.8V

Figure 28.7 Vcc=5V timing diagram (6)

Vcc=5V

Memory expansion Mode and Microprocessor Mode

(When accessing DRAM area with 1 wait)

Read Timing

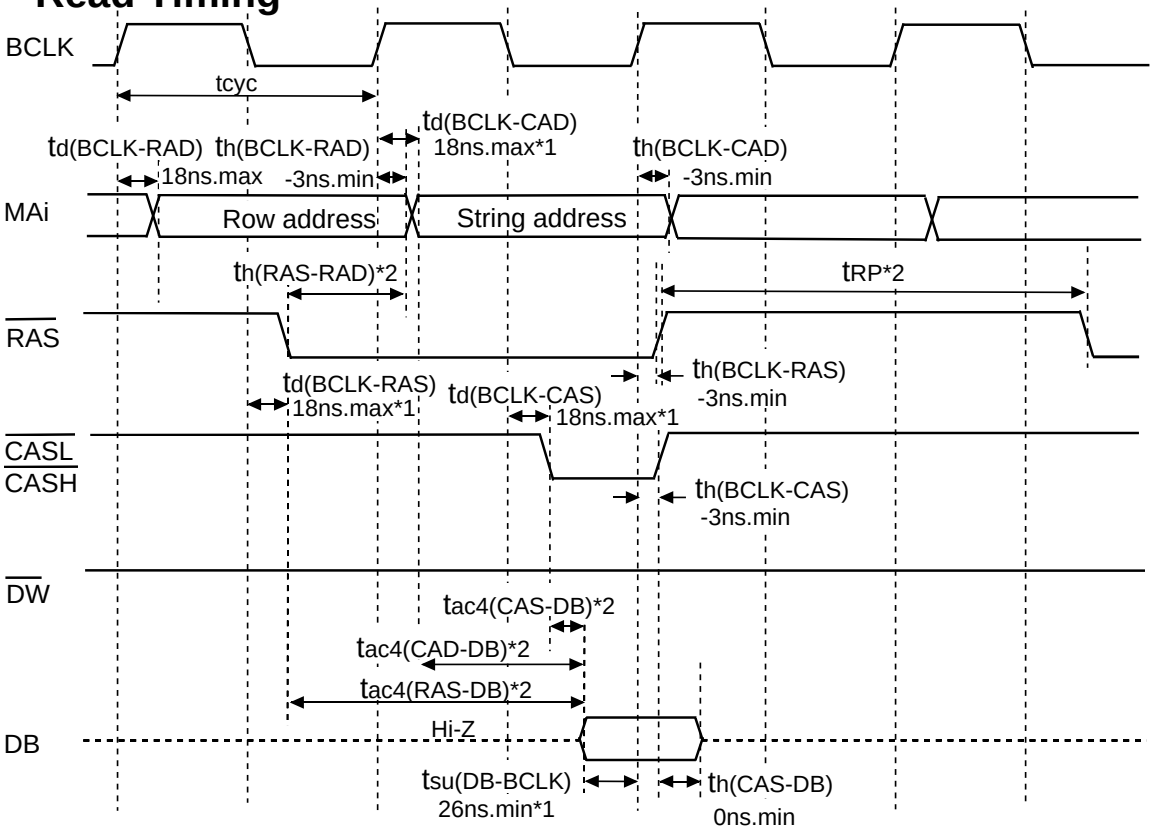

*1:It is a guarantee value with being alone. 35ns.max garantees as follows:

$t_{d(BCLK-RAS)} + t_{su(DB-BCLK)}$

$t_{d(BCLK-CAS)} + t_{su(DB-BCLK)}$

$t_{d(BCLK-CAD)} + t_{su(DB-BCLK)}$

*2:It depends on operation frequency.

$t_{ac4(RAS-DB)}$=(tcyc/2 x m-35)ns.max (m=3 and 5 when 1 wait and 2 wait, respectively.)

$t_{ac4(CAS-DB)}$=(tcyc/2 x n-35)ns.max (n=1 and 3 when 1 wait and 2 wait, respectively.)

$t_{ac4(CAD-DB)}$=(tcyc x l-35)ns.max (l=1 and 2 when 1 wait and 2 wait, respectively.)

$t_{h(RAS-RAD)}$=(tcyc/2-13)ns.min

t_{RP}=(tcyc/2 x 3-20)ns.min

Measuring conditions

- V_{CC}=5V±10%
- Input timing voltage
  :Determined with V_{IH}=2.5V, V_{IL}=0.8V
- Output timing voltage
  :Determined with V_{OH}=2.0V, V_{OL}=0.8V

Figure 28.8 Vcc=5V timing diagram (7)

Vcc=5V

Memory expansion Mode and Microprocessor Mode

(When accessing DRAM area with 1 wait)

Write Timing

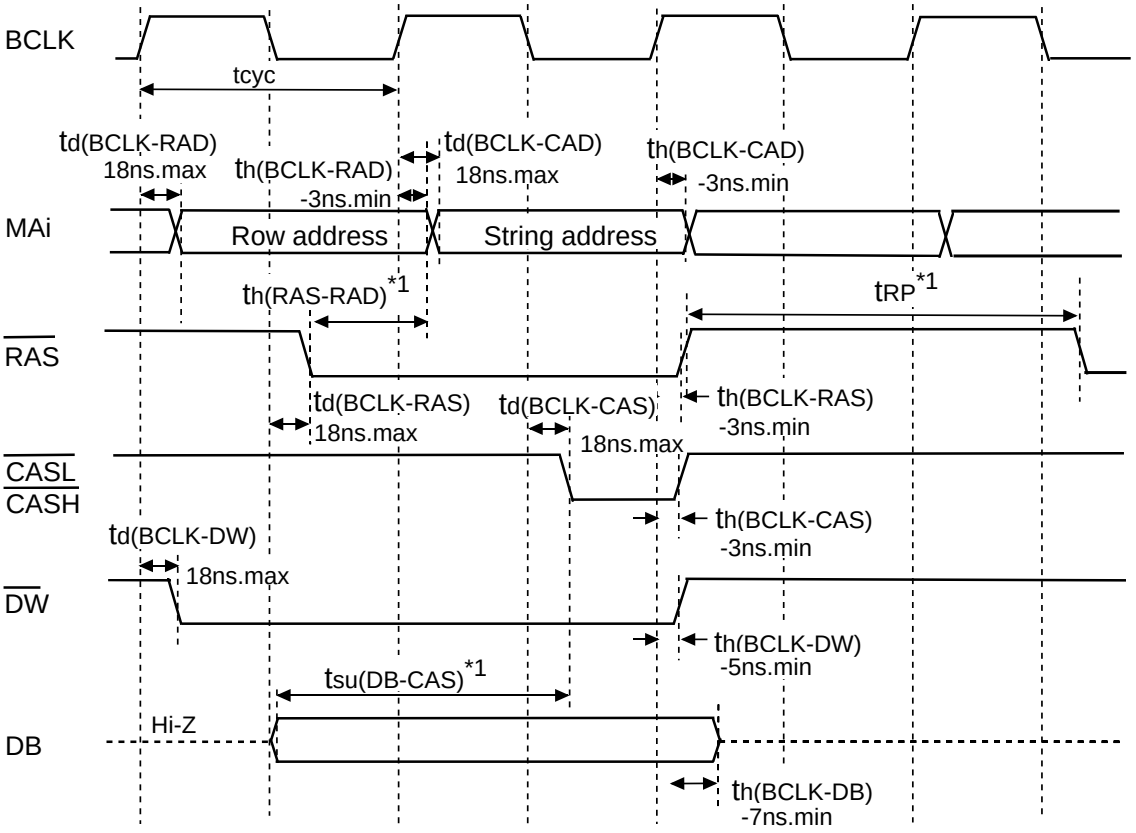

*1:It depends on operation frequency.

$t_{h(RAS-RAD)}$=(tcyc/2-13)ns.min

t_{RP}=(tcyc/2 x 3-20)ns.min

$t_{su(DB-CAS)}$=(tcyc-20)ns.min

Measuring conditions

- V_{CC}=5V±10%
- Input timing voltage
  :Determined with V_{IH}=2.5V, V_{IL}=0.8V
- Output timing voltage
  :Determined with V_{OH}=2.0V, V_{OL}=0.8V

Figure 28.9 Vcc=5V timing diagram (8)

Memory expansion Mode and Microprocessor Mode

Vcc=5V

(When accessing DRAM area with 2 wait)

Read Timing

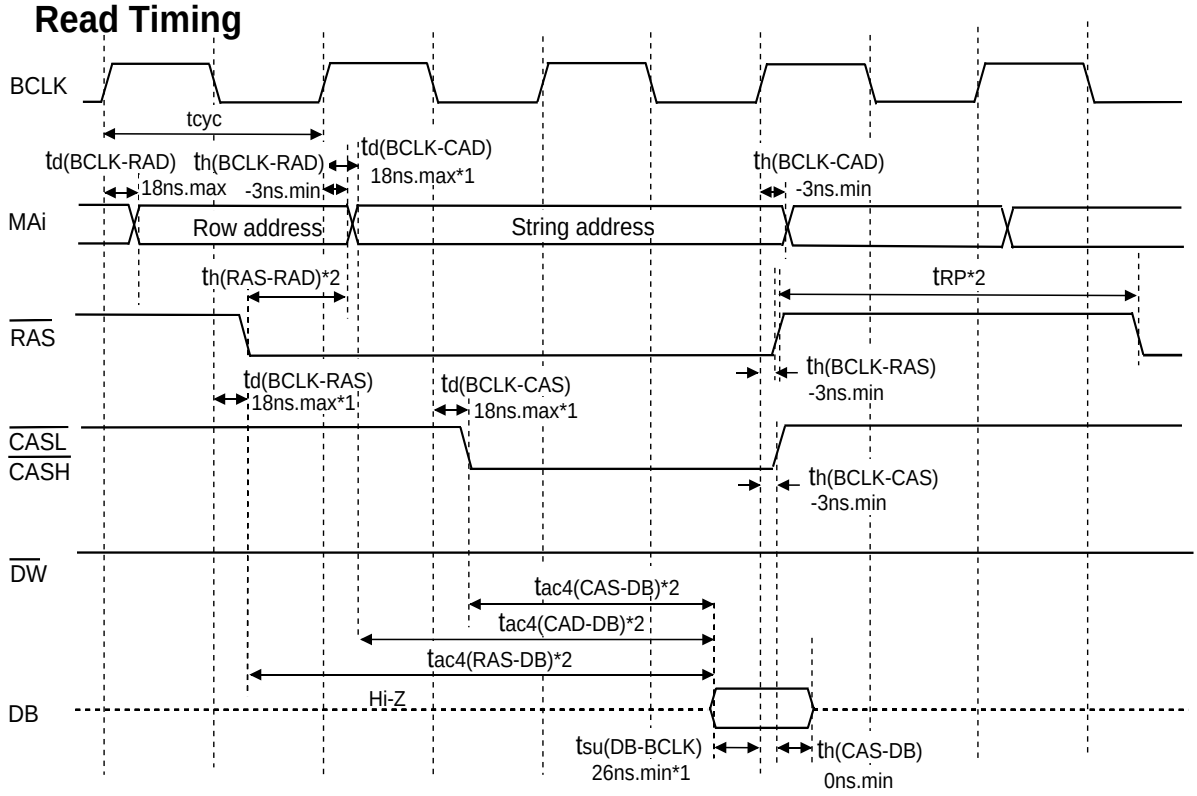

*1:It is a guarantee value with being alone. 35ns.max garantees as follows:

$t_{d(BCLK-RAS)} + t_{su(DB-BCLK)}$

$t_{d(BCLK-CAS)} + t_{su(DB-BCLK)}$

$t_{d(BCLK-CAD)} + t_{su(DB-BCLK)}$

*2:It depends on operation frequency.

$t_{ac4(RAS-DB)}$=(tcyc/2 x m-35)ns.max (m=3 and 5 when 1 wait and 2 wait, respectively.)

$t_{ac4(CAS-DB)}$=(tcyc/2 x n-35)ns.max (n=1 and 3 when 1 wait and 2 wait, respectively.)

$t_{ac4(CAD-DB)}$=(tcyc x l-35)ns.max (l=1 and 2 when 1 wait and 2 wait, respectively.)

$t_{h(RAS-RAD)}$=(tcyc/2-13)ns.min

t_{RP}=(tcyc/2 x 3-20)ns.min

Measuring conditions

- V_{CC}=5V±10%
- Input timing voltage
  :Determined with V_{IH}=2.5V, V_{IL}=0.8V
- Output timing voltage
  :Determined with V_{OH}=2.0V, V_{OL}=0.8V

Figure 28.10 Vcc=5V timing diagram (9)

Memory expansion Mode and Microprocessor Mode

Vcc=5V

(When accessing DRAM area with 2 wait)

Write Timing

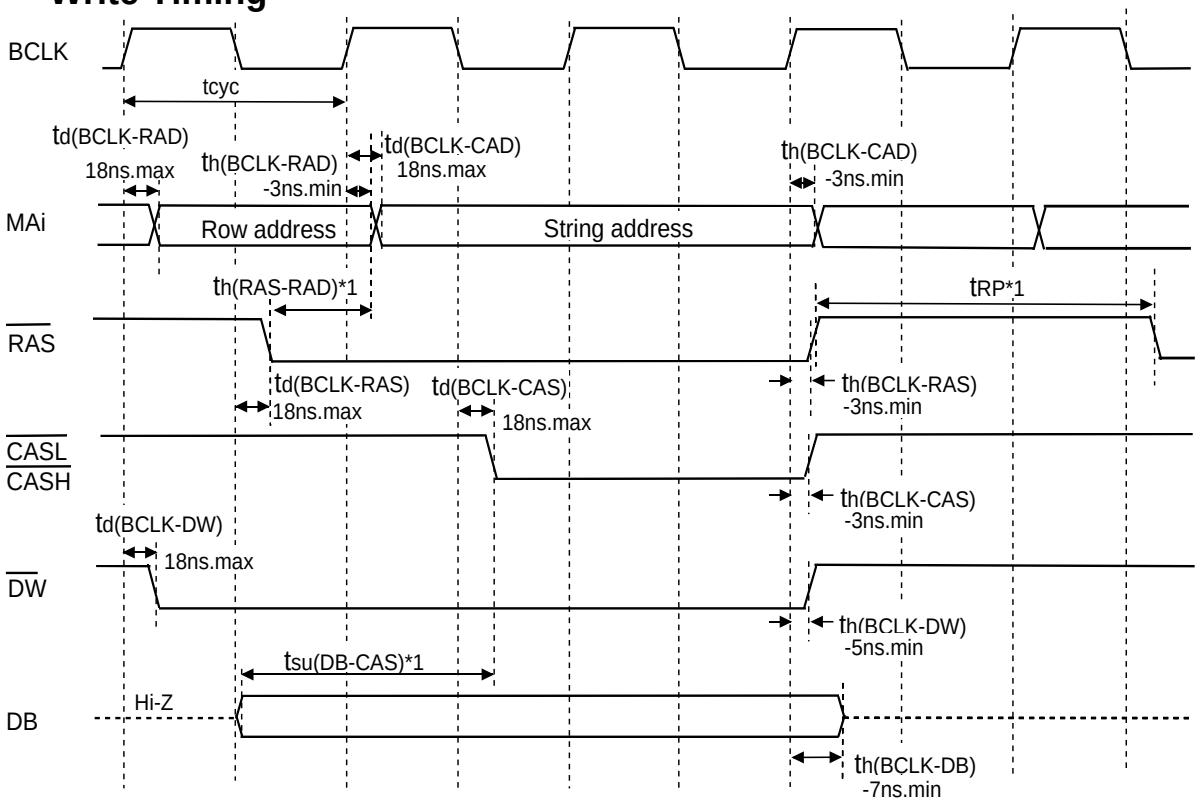

*1:It depends on operation frequency.

$t_{h(RAS-RAD)}$=(tcyc/2-13)ns.min

t_{RP}=(tcyc/2 x 3-20)ns.min

$t_{su(DB-CAS)}$=(tcyc-20)ns.min

Measuring conditions

- V_{CC}=5V±10%
- Input timing voltage
  :Determined with V_{IH}=2.5V, V_{IL}=0.8V
- Output timing voltage
  :Determined with V_{OH}=2.0V, V_{OL}=0.8V

Figure 28.11 V_{CC}=5V timing diagram (10)

Memory expansion Mode and Microprocessor Mode

Vcc=5V

Refresh Timing (CAS before RAS refresh)

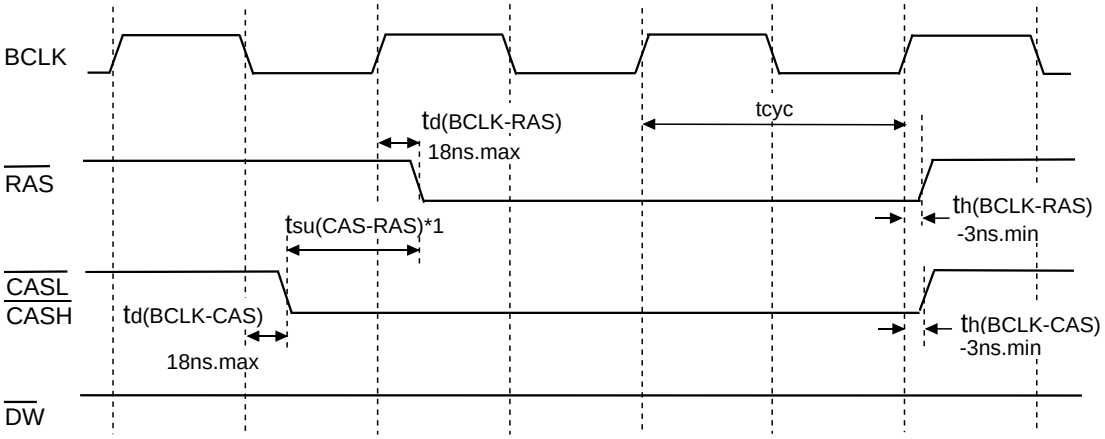

*1:It depends on operation frequency.
$t_{su(CAS-RAS)}$=(tcyc/2-13)ns.min

Refresh Timing (Self-refresh)

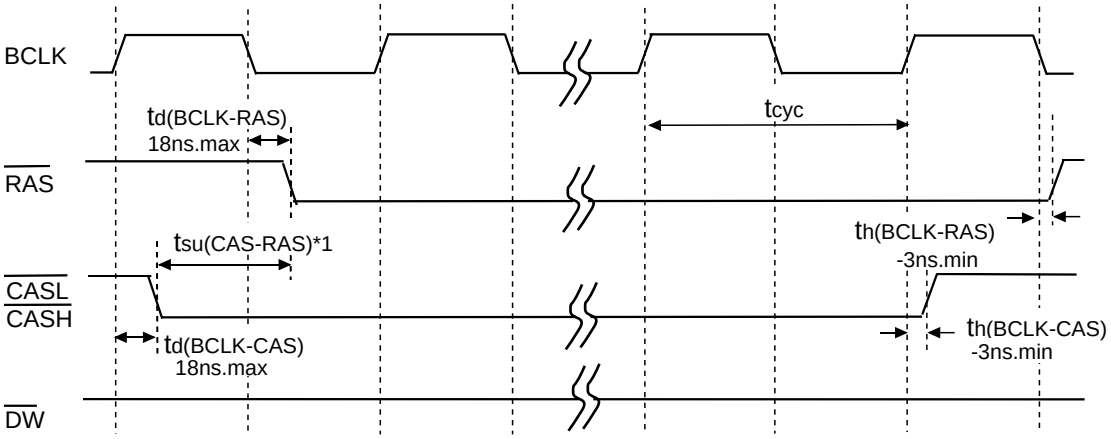

*1:It depends on operation frequency.
$t_{su(CAS-RAS)}$=(tcyc/2-13)ns.min

Measuring conditions

- V_{CC}=5V±10%
- Input timing voltage
  :Determined with V_{IH}=2.5V, V_{IL}=0.8V
- Output timing voltage
  :Determined with V_{OH}=2.0V, V_{OL}=0.8V

Figure 28.12 Vcc=5V timing diagram (11)

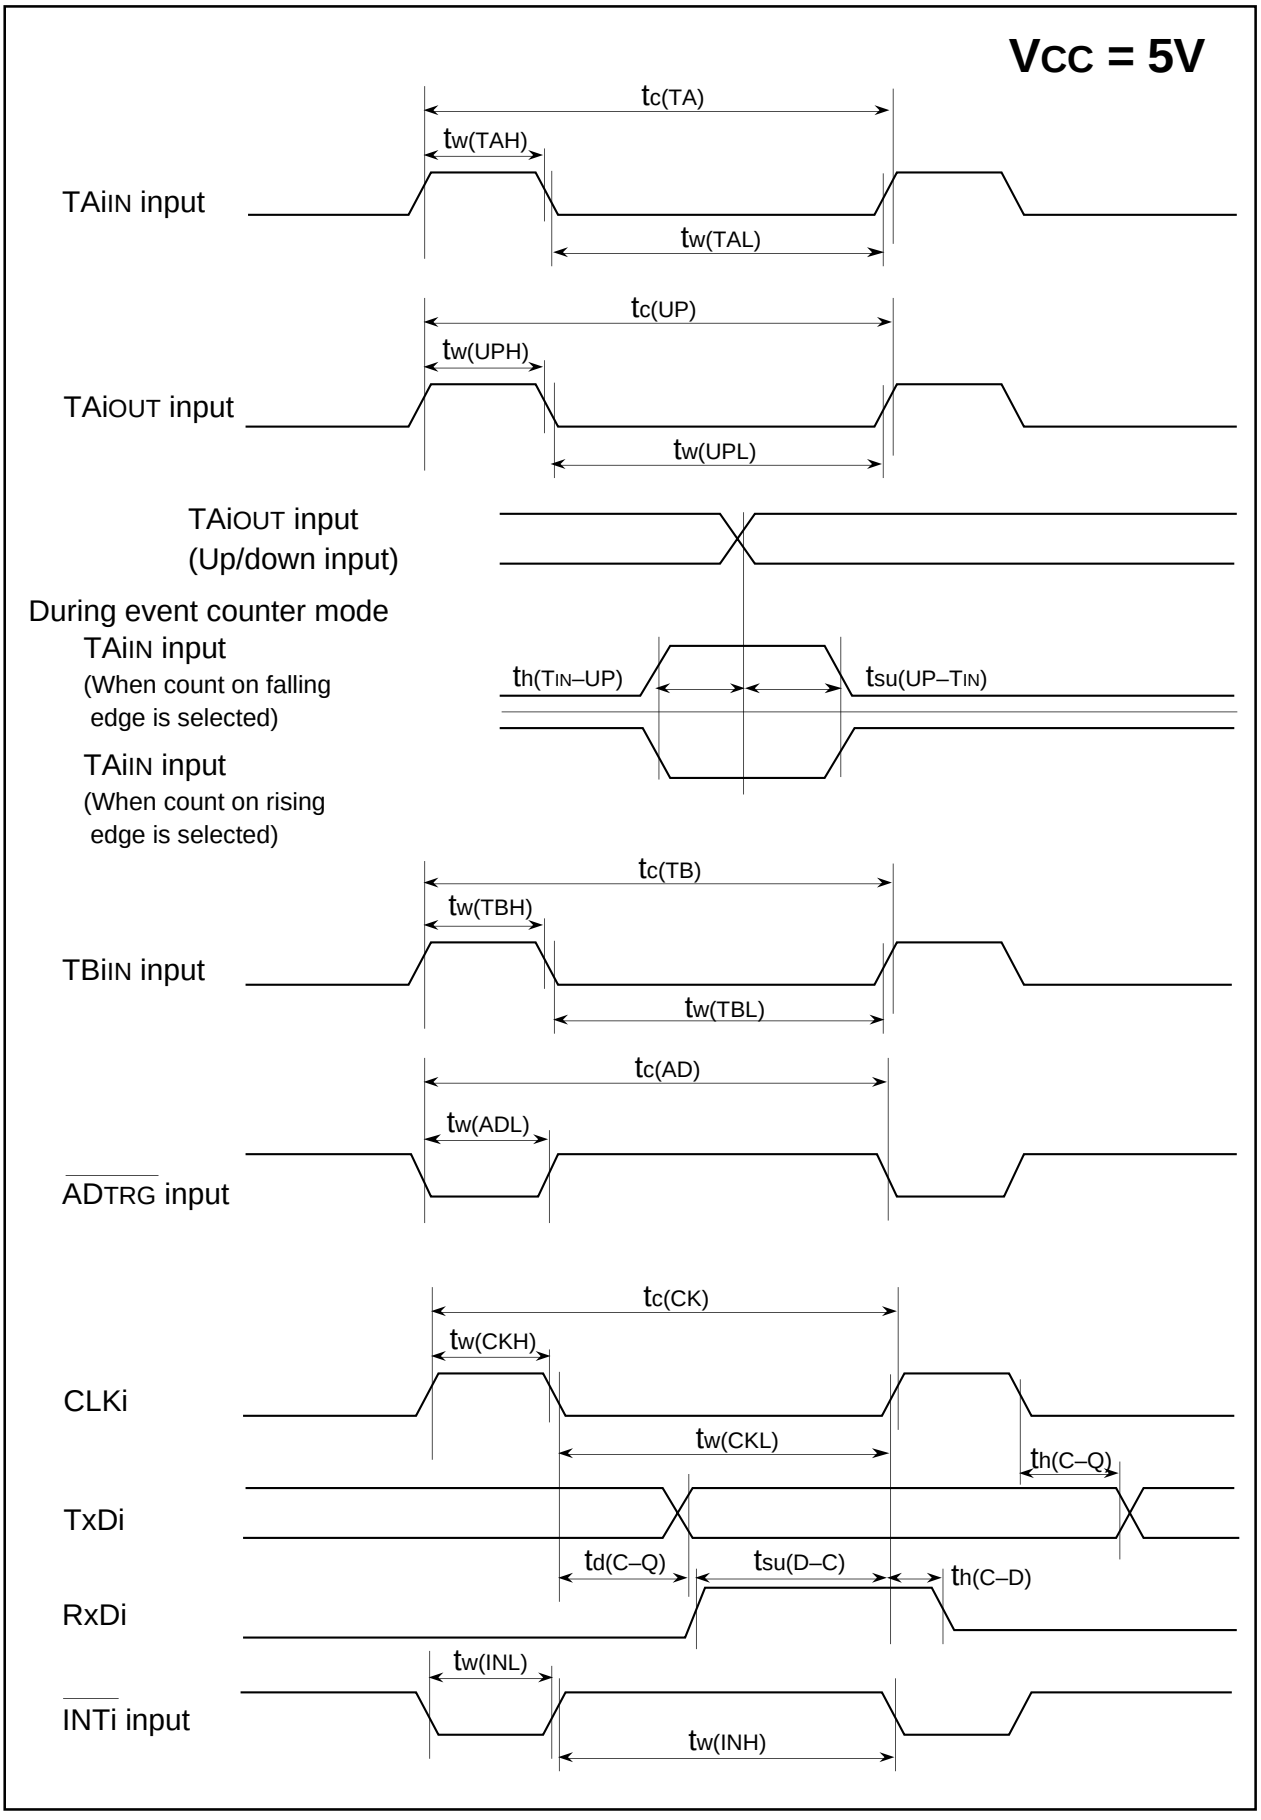

Figure 28.13 Vcc=5V timing diagram (12)

Memory Expansion Mode and Microprocessor Mode

VCC = 5V

(Valid only with wait)

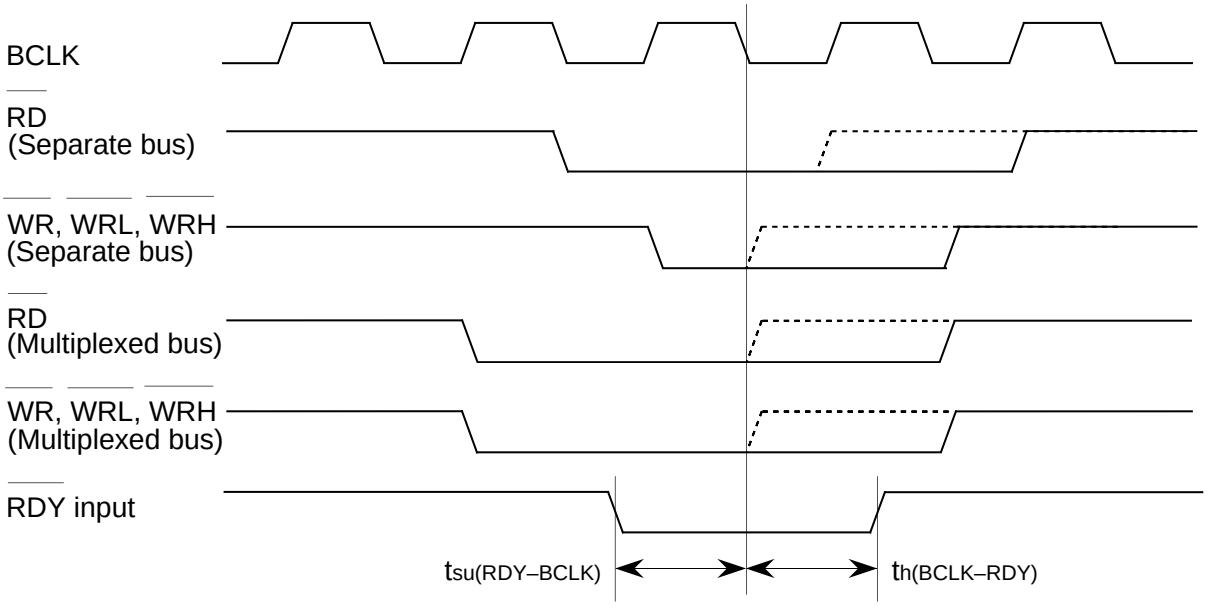

(Valid with or without wait)

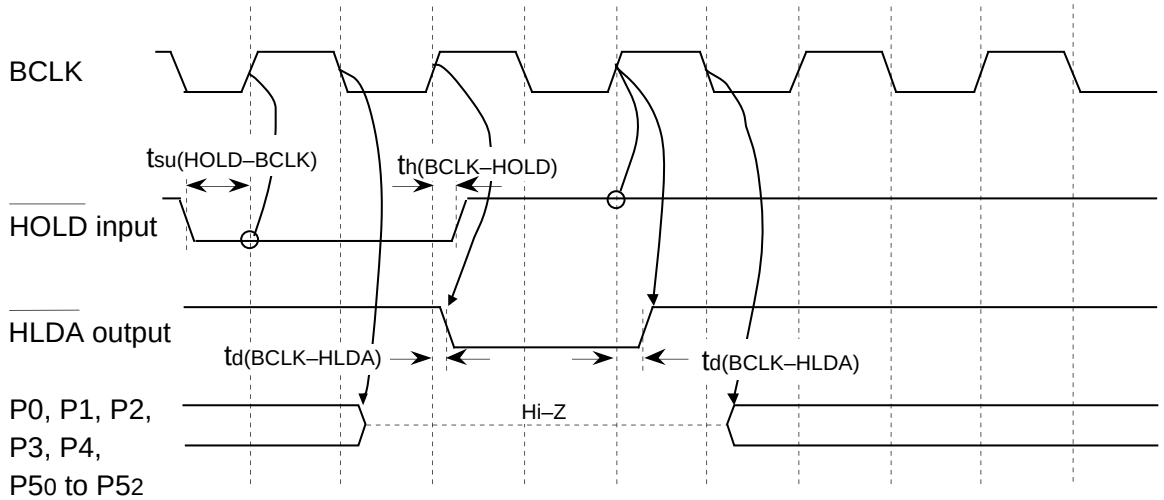

Measuring conditions :

- VCC=5V±10%
- Input timing voltage : Determined with VIL=1.0V, VIH=4.0V
- Output timing voltage : Determined with VOL=2.5V, VOH=2.5V

Figure 28.14 VCC=5V timing diagram (13)

Electrical characteristics (Vcc = 3V)

V_{CC} = 3V

Table 28.23 Electrical characteristics (referenced to V_{CC} = 3V, V_{SS} = 0V at Topr = 25°C, f(X_{IN}) = 10MHz unless otherwise specified)

Symbol	Parameter		Measuring condition	Standard Min	Standard Typ.	Standard Max.	Unit
V_{OH}	HIGH output voltage	$P0_0$-$P0_7$,$P1_0$-$P1_7$,$P2_0$-$P2_7$, $P3_0$-$P3_7$,$P4_0$-$P4_7$,$P5_0$-$P5_7$, $P6_0$-$P6_7$,$P7_2$-$P7_7$,$P8_0$-$P8_4$, $P8_6$,$P8_7$,$P9_0$-$P9_7$,$P10_0$-$P10_7$, $P11_0$-$P11_4$, $P12_0$-$P12_7$,$P13_0$-$P13_7$, $P14_0$-$P14_6$, $P15_0$-$P15_7$ (Note 1)	I_{OH}= - 1mA , V_{CC} = 3.0V	2.5			V
V_{OH}	HIGH output voltage	X_{OUT} HIGHPOWER	I_{OH}= - 0.1 mA , V_{CC} = 3.0V	2.5			V
		X_{OUT} LOWPOWER	I_{OH}= - 50 µA , V_{CC} = 3.0V	2.5			
	HIGH output voltage	X_{COUT} HIGHPOWER	With no load applied , V_{CC} = 3.0V		3.0		V
		X_{COUT} LOWPOWER	With no load applied , V_{CC} = 3.0V		1.6		
V_{OL}	LOW output voltage	$P0_0$-$P0_7$,$P1_0$-$P1_7$,$P2_0$-$P2_7$, $P3_0$-$P3_7$,$P4_0$-$P4_7$,$P5_0$-$P5_7$, $P6_0$-$P6_7$,$P7_0$-$P7_7$,$P8_0$-$P8_4$, $P8_6$,$P8_7$,$P9_0$-$P9_7$,$P10_0$-$P10_7$ $P11_0$-$P11_4$, $P12_0$-$P12_7$,$P13_0$-$P13_7$, $P14_0$-$P14_6$, $P15_0$-$P15_7$ (Note 1)	I_{OL}=1mA , V_{CC} = 3.0V			0.5	V
V_{OL}	LOW output voltage	X_{OUT} HIGHPOWER	I_{OL}=0.1mA , V_{CC} = 3.0V			0.5	V
		X_{OUT} LOWPOWER	I_{OL}=50µA , V_{CC} = 3.0V			0.5	
	LOW output voltage	X_{COUT} HIGHPOWER	With no load applied , V_{CC} = 3.0V		0		V
		X_{COUT} LOWPOWER	With no load applied , V_{CC} = 3.0V		0		
V_{T+}-V_{T-}	Hysteresis	$\overline{HOLD}$, $\overline{RDY}$, $TA0_{IN}$-$TA4_{IN}$, $TB0_{IN}$-$TB2_{IN}$, $\overline{INT0}$-$\overline{INT5}$, $\overline{ADTRG}$, $\overline{CTS0}$-$\overline{CTS4}$,$CLK0$-$CLK4$,$TA2_{OUT}$-$TA4_{OUT}$, $\overline{NMI}$, $KI0$-$KI3$, RxD0-RxD4, $SCL2$-$SCL4$, $SDA2$-$SDA4$	V_{CC} = 3.0V	0.2		1.0	V
V_{T+}-V_{T-}	Hysteresis	$\overline{RESET}$	V_{CC} = 3.0V	0.2		1.8	V
I_{IH}	HIGH input current	$P0_0$-$P0_7$,$P1_0$-$P1_7$,$P2_0$-$P2_7$, $P3_0$-$P3_7$,$P4_0$-$P4_7$,$P5_0$-$P5_7$, $P6_0$-$P6_7$,$P7_0$-$P7_7$,$P8_0$-$P8_7$, $P9_0$-$P9_7$,$P10_0$-$P10_7$, $P11_0$-$P11_4$, $P12_0$-$P12_7$,$P13_0$-$P13_7$, $P14_0$-$P14_6$, $P15_0$-$P15_7$ (Note 1) X_{IN}, RESET, CNVss, BYTE	V_I=3V , V_{CC} = 3.0V			4.0	µA
I_{IL}	LOW input current	$P0_0$-$P0_7$,$P1_0$-$P1_7$,$P2_0$-$P2_7$, $P3_0$-$P3_7$,$P4_0$-$P4_7$,$P5_0$-$P5_7$, $P6_0$-$P6_7$,$P7_0$-$P7_7$,$P8_0$-$P8_7$, $P9_0$-$P9_7$,$P10_0$-$P10_7$, $P11_0$-$P11_4$, $P12_0$-$P12_7$,$P13_0$-$P13_7$, $P14_0$-$P14_6$, $P15_0$-$P15_7$ (Note 1) X_{IN}, RESET, CNVss, BYTE	V_I=0V , V_{CC} = 3.0V			- 4.0	µA
R_{PULLUP}	Pull-up resistance	$P0_0$-$P0_7$,$P1_0$-$P1_7$,$P2_0$-$P2_7$, $P3_0$-$P3_7$,$P4_0$-$P4_7$,$P5_0$-$P5_7$, $P6_0$-$P6_7$,$P7_2$-$P7_7$,$P8_0$-$P8_4$, $P8_6$,$P8_7$,$P9_0$-$P9_7$,$P10_0$-$P10_7$ $P11_0$-$P11_4$, $P12_0$-$P12_7$,$P13_0$-$P13_7$, $P14_0$-$P14_6$, $P15_0$-$P15_7$ (Note 1)	V_I=0V , V_{CC} = 3.0V	66.0	120.0	500.0	kΩ
R_{fXIN}	Feedback resistance	X_{IN}			3.0		MΩ
R_{fXCIN}	Feedback resistance	X_{CIN}			10.0		MΩ
V_{RAM}	RAM retention voltage		When clock is stopped	2.0			V
Icc	Power supply current	In single-chip mode, the output pins are open and other pins are V_{SS}	f(X_{IN})=10MHz Square wave, no division — Mask ROM 128 KB version ROMless RAM 10 KB version (Note 2)		12.0	20.0	mA
			Mask ROM 256 KB version ROMless RAM 24 KB version (Note 2)		14.0	23.0	
			Flash memory version		14.0	23.0	
			f(X_{CIN})=32kHz Square wave — Mask ROM 128 KB version ROMless RAM 10 KB version (Note 2)		45.0		µA
			Mask ROM 256 KB version ROMless RAM 24 KB version (Note 2)		60.0		
			Flash memory version		3.5		mA
			f(XCIN)=32kHz When a WAIT instruction is executed. Oscillation drive capacity is High.		3.0		µA
			f(XCIN)=32kHz When a WAIT instruction is executed. Oscillation drive capacity is Low.		1.5		µA
			Topr=25°C, when clock is stopped — Mask ROM 128 KB version ROMless RAM 10 KB version (Note 2)			1.0	µA
			Mask ROM 256 KB version ROMless RAM 24 KB version (Note 2)			1.0	
			Flash memory version			1.0	
			Topr=85°C, when clock is stopped			20.0	

Note 1: Ports P11 to P15 exist in 144-pin version.
Note 2: ROMless version exists in 144-pin version.

V_{CC} = 3V

Timing requirements (referenced to V_{CC} = 3V, V_{SS} = 0V at Topr = 25°C unless otherwise specified)

Table 28.24 External clock input

Symbol	Parameter	Standard		Unit
		Min.	Max.	
tc	External clock input cycle time	100		ns
tw(H)	External clock input HIGH pulse width	40		ns
tw(L)	External clock input LOW pulse width	40		ns
tr	External clock rise time		18	ns
tf	External clock fall time		18	ns

Table 28.25 Memory expansion and microprocessor modes

Symbol	Parameter	Standard		Unit
		Min.	Max.	
tac1(RD-DB)	Data input access time (RD standard, no wait)		(Note)	ns
tac1(AD-DB)	Data input access time (AD standard, CS standard, no wait)		(Note)	ns
tac2(RD-DB)	Data input access time (RD standard, with wait)		(Note)	ns
tac2(AD-DB)	Data input access time (AD standard, CS standard, with wait)		(Note)	ns
tac3(RD-DB)	Data input access time (RD standard, when accessing multiplex bus area)		(Note)	ns
tac3(AD-DB)	Data input access time (AD standard, CS standard, when accessing multiplex bus area)		(Note)	ns
tac4(RAS-DB)	Data input access time (RAS standard, DRAM access)		(Note)	ns
tac4(CAS-DB)	Data input access time (CAS standard, DRAM access)		(Note)	ns
tac4(CAD-DB)	Data input access time (CAD standard, DRAM access)		(Note)	ns
tsu(DB-BCLK)	Data input setup time	40		ns
tsu(RDY-BCLK)	$\overline{RDY}$ input setup time	60		ns
tsu(HOLD-BCLK)	$\overline{HOLD}$ input setup time	80		ns
th(RD-DB)	Data input hold time	0		ns
th(CAS-DB)	Data input hold time	0		ns
th(BCLK -RDY)	$\overline{RDY}$ input hold time	0		ns
th(BCLK-HOLD)	$\overline{HOLD}$ input hold time	0		ns
td(BCLK-HLDA)	$\overline{HLDA}$ output delay time		100	ns

Note: Calculated according to the BCLK frequency as follows:
Note that inserting wait or using lower operation frequency f(BCLK) is needed when calculated value is negative.

$$t_{ac1(RD-DB)} = \frac{10^9}{f(BCLK) \times 2} - 42 \quad [ns]$$

$$t_{ac1(AD-DB)} = \frac{10^9}{f(BCLK)} - 55 \quad [ns]$$

$$t_{ac2(RD-DB)} = \frac{10^9 \times m}{f(BCLK) \times 2} - 42 \quad [ns] \ (m=3, 5 \text{ and } 7 \text{ when 1 wait, 2 wait and 3 wait, respectively})$$

$$t_{ac2(AD-DB)} = \frac{10^9 \times n}{f(BCLK)} - 55 \quad [ns] \ (n=2, 3 \text{ and } 4 \text{ when 1 wait, 2 wait and 3 wait, respectively})$$

$$t_{ac3(RD-DB)} = \frac{10^9 \times m}{f(BCLK) \times 2} - 55 \quad [ns] \ (m=3 \text{ and } 5 \text{ when 2 wait and 3 wait, respectively})$$

$$t_{ac3(AD-DB)} = \frac{10^9 \times n}{f(BCLK) \times 2} - 55 \quad [ns] \ (n=5 \text{ and } 7 \text{ when 2 wait and 3 wait, respectively})$$

$$t_{ac4(RAS-DB)} = \frac{10^9 \times m}{f(BCLK) \times 2} - 55 \quad [ns] \ (m=3 \text{ and } 5 \text{ when 1 wait and 2 wait, respectively})$$

$$t_{ac4(CAS-DB)} = \frac{10^9 \times n}{f(BCLK) \times 2} - 55 \quad [ns] \ (n=1 \text{ and } 3 \text{ when 1 wait and 2 wait, respectively})$$

$$t_{ac4(CAD-DB)} = \frac{10^9 \times l}{f(BCLK)} - 55 \quad [ns] \ (l=1 \text{ and } 2 \text{ when 1 wait and 2 wait, respectively})$$

V_{CC} = 3V

Timing requirements (referenced to V_{CC} = 3V, V_{SS} = 0V at Topr = 25°C unless otherwise specified)

Table 28.26 Timer A input (counter input in event counter mode)

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_{c(TA)}$	TAi_{IN} input cycle time	150		ns
$t_{w(TAH)}$	TAi_{IN} input HIGH pulse width	60		ns
$t_{w(TAL)}$	TAi_{IN} input LOW pulse width	60		ns

Table 28.27 Timer A input (gating input in timer mode)

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_{c(TA)}$	TAi_{IN} input cycle time	600		ns
$t_{w(TAH)}$	TAi_{IN} input HIGH pulse width	300		ns
$t_{w(TAL)}$	TAi_{IN} input LOW pulse width	300		ns

Table 28.28 Timer A input (external trigger input in one-shot timer mode)

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_{c(TA)}$	TAi_{IN} input cycle time	300		ns
$t_{w(TAH)}$	TAi_{IN} input HIGH pulse width	150		ns
$t_{w(TAL)}$	TAi_{IN} input LOW pulse width	150		ns

Table 28.29 Timer A input (external trigger input in pulse width modulation mode)

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_{w(TAH)}$	TAi_{IN} input HIGH pulse width	150		ns
$t_{w(TAL)}$	TAi_{IN} input LOW pulse width	150		ns

Table 28.30 Timer A input (up/down input in event counter mode)

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_{c(UP)}$	TAi_{OUT} input cycle time	3000		ns
$t_{w(UPH)}$	TAi_{OUT} input HIGH pulse width	1500		ns
$t_{w(UPL)}$	TAi_{OUT} input LOW pulse width	1500		ns
$t_{su(UP-TIN)}$	TAi_{OUT} input setup time	600		ns
$t_{h(TIN-UP)}$	TAi_{OUT} input hold time	600		ns

VCC = 3V

Timing requirements (referenced to VCC = 3V, VSS = 0V at Topr = 25°C unless otherwise specified)

Table 28.31 Timer B input (counter input in event counter mode)

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_{c(TB)}$	TBiIN input cycle time (counted on one edge)	150		ns
$t_{w(TBH)}$	TBiIN input HIGH pulse width (counted on one edge)	60		ns
$t_{w(TBL)}$	TBiIN input LOW pulse width (counted on one edge)	60		ns
$t_{c(TB)}$	TBiIN input cycle time (counted on both edges)	300		ns
$t_{w(TBH)}$	TBiIN input HIGH pulse width (counted on both edges)	160		ns
$t_{w(TBL)}$	TBiIN input LOW pulse width (counted on both edges)	160		ns

Table 28.32 Timer B input (pulse period measurement mode)

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_{c(TB)}$	TBiIN input cycle time	600		ns
$t_{w(TBH)}$	TBiIN input HIGH pulse width	300		ns
$t_{w(TBL)}$	TBiIN input LOW pulse width	300		ns

Table 28.33 Timer B input (pulse width measurement mode)

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_{c(TB)}$	TBiIN input cycle time	600		ns
$t_{w(TBH)}$	TBiIN input HIGH pulse width	300		ns
$t_{w(TBL)}$	TBiIN input LOW pulse width	300		ns

Table 28.34 A/D trigger input

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_{c(AD)}$	$\overline{ADTRG}$ input cycle time (trigger able minimum)	1500		ns
$t_{w(ADL)}$	$\overline{ADTRG}$ input LOW pulse width	200		ns

Table 28.35 Serial I/O

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_{c(CK)}$	CLKi input cycle time	300		ns
$t_{w(CKH)}$	CLKi input HIGH pulse width	150		ns
$t_{w(CKL)}$	CLKi input LOW pulse width	150		ns
$t_{d(C-Q)}$	TxDi output delay time		160	ns
$t_{h(C-Q)}$	TxDi hold time	0		ns
$t_{su(D-C)}$	RxDi input setup time	50		ns
$t_{h(C-D)}$	RxDi input hold time	90		ns

Table 28.36 External interrupt $\overline{INTi}$ inputs

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_{w(INH)}$	$\overline{INTi}$ input HIGH pulse width	380		ns
$t_{w(INL)}$	$\overline{INTi}$ input LOW pulse width	380		ns

V_{CC} = 3V

Switching characteristics (referenced to V_{CC} = 3V, V_{SS} = 0V at Topr = 25°C unless otherwise specified)

Table 28.37 Memory expansion and microprocessor modes (with no wait)

Symbol	Parameter	Measuring condition	Standard		Unit
			Min.	Max.	
$t_{d(BCLK-AD)}$	Address output delay time	Figure 28.1		25	ns
$t_{h(BCLK-AD)}$	Address output hold time (BCLK standard)		0		ns
$t_{h(RD-AD)}$	Address output hold time (RD standard)		0		ns
$t_{h(WR-AD)}$	Address output hold time (WR standard)		(Note 1)		ns
$t_{d(BCLK-CS)}$	Chip select output delay time			25	ns
$t_{h(BCLK-CS)}$	Chip select output hold time (BCLK standard)		0		ns
$t_{h(RD-CS)}$	Chip select output hold time (RD standard)		0		ns
$t_{h(WR-CS)}$	Chip select output hold time (WR standard)		(Note 1)		ns
$t_{d(BCLK-ALE)}$	ALE signal output delay time			25	ns
$t_{h(BCLK-ALE)}$	ALE signal output hold time		– 2		ns
$t_{d(BCLK-RD)}$	RD signal output delay time			10	ns
$t_{h(BCLK-RD)}$	RD signal output hold time		– 3		ns
$t_{d(BCLK-WR)}$	WR signal output delay time			25	ns
$t_{h(BCLK-WR)}$	WR signal output hold time		0		ns
$t_{d(DB-WR)}$	Data output delay time (WR standard)		(Note 1)		ns
$t_{h(WR-DB)}$	Data output hold time (WR standard)		(Note 1)		ns
$t_{w(WR)}$	WR signal width		(Note 1)		ns

Note 1: Calculated according to the BCLK frequency as follows:

$$t_{d(DB-WR)} = \frac{10^9}{f_{(BCLK)}} - 40 \quad [ns]$$

$$t_{h(WR-DB)} = \frac{10^9}{f_{(BCLK)} \times 2} - 20 \quad [ns]$$

$$t_{h(WR-AD)} = \frac{10^9}{f_{(BCLK)} \times 2} - 20 \quad [ns]$$

$$t_{h(WR-CS)} = \frac{10^9}{f_{(BCLK)} \times 2} - 20 \quad [ns]$$

$$t_{w(WR)} = \frac{10^9}{f_{(BCLK)} \times 2} - 20 \quad [ns]$$

V_{CC} = 3V

Switching characteristics (referenced to V_{CC} = 3V, V_{SS} = 0V at Topr = 25°C unless otherwise specified)

Table 28.38 Memory expansion and microprocessor modes (with wait, accessing external memory)

Symbol	Parameter	Measuring condition	Standard		Unit
			Min.	Max.	
$t_{d(BCLK-AD)}$	Address output delay time	Figure 28.1		25	ns
$t_{h(BCLK-AD)}$	Address output hold time (BCLK standard)		0		ns
$t_{h(RD-AD)}$	Address output hold time (RD standard)		0		ns
$t_{h(WR-AD)}$	Address output hold time (WR standard)		(Note 1)		ns
$t_{d(BCLK-CS)}$	Chip select output delay time			25	ns
$t_{h(BCLK-CS)}$	Chip select output hold time (BCLK standard)		0		ns
$t_{h(RD-CS)}$	Chip select output hold time (RD standard)		0		ns
$t_{h(WR-CS)}$	Chip select output hold time (WR standard)		(Note 1)		ns
$t_{d(BCLK-ALE)}$	ALE signal output delay time			25	ns
$t_{h(BCLK-ALE)}$	ALE signal output hold time		– 2		ns
$t_{d(BCLK-RD)}$	RD signal output delay time			10	ns
$t_{h(BCLK-RD)}$	RD signal output hold time		– 3		ns
$t_{d(BCLK-WR)}$	WR signal output delay time			25	ns
$t_{h(BCLK-WR)}$	WR signal output hold time		0		ns
$t_{d(DB-WR)}$	Data output delay time (WR standard)		(Note 1)		ns
$t_{h(WR-DB)}$	Data output hold time (WR standard)		(Note 1)		ns
$t_{w(WR)}$	WR signal width		(Note 1)		ns

Note 1: Calculated according to the BCLK frequency as follows:

$$t_{d(DB-WR)} = \frac{10^9 \times n}{f_{(BCLK)}} - 40 \quad [ns] \quad (n=1, 2 \text{ and } 3 \text{ when 1 wait, 2 wait and 3 wait, respectively})$$

$$t_{h(WR-DB)} = \frac{10^9}{f_{(BCLK)} \times 2} - 20 \quad [ns]$$

$$t_{h(WR-AD)} = \frac{10^9}{f_{(BCLK)} \times 2} - 20 \quad [ns]$$

$$t_{h(WR-CS)} = \frac{10^9}{f_{(BCLK)} \times 2} - 20 \quad [ns]$$

$$t_{w(WR)} = \frac{10^9 \times n}{f_{(BCLK)} \times 2} - 20 \quad [ns] \quad (n=1, 3 \text{ and } 5 \text{ when 1 wait, 2 wait and 3 wait, respectively})$$

V_{CC} = 3V

Switching characteristics (referenced to V_{CC} = 3V, V_{SS} = 0V at Topr = 25°C unless otherwise specified)

Table 28.39 Memory expansion and microprocessor modes (with wait, accessing external memory, multiplex bus area selected)

Symbol	Parameter	Measuring condition	Standard		Unit
			Min.	Max.	
td(BCLK-AD)	Address output delay time	Figure 28.1		25	ns
th(BCLK-AD)	Address output hold time (BCLK standard)		0		ns
th(RD-AD)	Address output hold time (RD standard)		(Note 1)		ns
th(WR-AD)	Address output hold time (WR standard)		(Note 1)		ns
td(BCLK-CS)	Chip select output delay time			25	ns
th(BCLK-CS)	Chip select output hold time (BCLK standard)		0		ns
th(RD-CS)	Chip select output hold time (RD standard)		(Note 1)		ns
th(WR-CS)	Chip select output hold time (WR standard)		(Note 1)		ns
td(BCLK-RD)	RD signal output delay time			25	ns
th(BCLK-RD)	RD signal output hold time		– 3		ns
td(BCLK-WR)	WR signal output delay time			25	ns
th(BCLK-WR)	WR signal output hold time		0		ns
td(DB-WR)	Data output delay time (WR standard)		(Note 1)		ns
th(WR-DB)	Data output hold time (WR standard)		(Note 1)		ns
td(BCLK-ALE)	ALE signal output delay time (BCLK standard)			25	ns
th(BCLK-ALE)	ALE signal output hold time (BCLK standard)		– 2		ns
td(AD-ALE)	ALE signal output delay time (address standard)		(Note 1)		ns
th(ALE-AD)	ALE signal output hold time (address standard)		(Note 1)		ns
tdz(RD-AD)	Address output flowting start time			8	ns
th(BCLK-DB)	DB signal output hold time (BCLK standard)		0		ns

Note 1: Calculated according to the BCLK frequency as follows:

$$th(RD-AD) = \frac{10^9}{f(BCLK) \times 2} - 20 \quad [ns]$$

$$th(WR-AD) = \frac{10^9}{f(BCLK) \times 2} - 20 \quad [ns]$$

$$th(RD-CS) = \frac{10^9}{f(BCLK) \times 2} - 20 \quad [ns]$$

$$th(WR-CS) = \frac{10^9}{f(BCLK) \times 2} - 20 \quad [ns]$$

$$td(DB-WR) = \frac{10^9 \times m}{f(BCLK) \times 2} - 40 \quad [ns] \quad (m=3 \text{ and } 5 \text{ when 2 wait and 3 wait, respectively})$$

$$th(WR-DB) = \frac{10^9}{f(BCLK) \times 2} - 20 \quad [ns]$$

$$td(AD-ALE) = \frac{10^9}{f(BCLK) \times 2} - 27 \quad [ns]$$

$$th(ALE-AD) = \frac{10^9}{f(BCLK) \times 2} - 20 \quad [ns]$$

Vcc = 3V

Switching characteristics (referenced to Vcc = 3V, Vss = 0V at Topr = 25°C unless otherwise specified)

Table 28.40 Memory expansion and microprocessor modes (with wait, accessing external memory, DRAM area selected)

Symbol	Parameter	Measuring condition	Standard		Unit
			Min.	Max.	
$t_{d(BCLK-RAD)}$	Row address output delay time	Figure 28.1		25	ns
$t_{h(BCLK-RAD)}$	Row address output hold time (BCLK standard)		0		ns
$t_{d(BCLK-CAD)}$	String address output delay time			25	ns
$t_{h(BCLK-CAD)}$	String address output hold time (BCLK standard)		0		ns
$t_{h(RAS-RAD)}$	Row address output hold time after RAS output		(Note 1)		ns
$t_{d(BCLK-RAS)}$	RAS output delay time (BCLK standard)			25	ns
$t_{h(BCLK-RAS)}$	RAS output hold time (BCLK standard)		0		ns
t_{RP}	RAS "H" hold time		(Note 1)		ns
$t_{d(BCLK-CAS)}$	CAS output delay time (BCLK standard)			25	ns
$t_{h(BCLK-CAS)}$	CAS output hold time (BCLK standard)		0		ns
$t_{d(BCLK-DW)}$	Data output delay time (BCLK standard)			25	ns
$t_{h(BCLK-DW)}$	Data output hold time (BCLK standard)		– 3		ns
$t_{su(DB-CAS)}$	CAS after DB output setup time		(Note 1)		ns
$t_{h(BCLK-DB)}$	DB signal output hold time (BCLK standard)		– 7		ns
$t_{su(CAS-RAS)}$	CAS before RAS setup time (refresh)		(Note 1)		ns

Note 1: Calculated according to the BCLK frequency as follows:

$$t_{h(RAS-RAD)} = \frac{10^9}{f_{(BCLK)} \times 2} - 25 \quad [ns]$$

$$t_{RP} = \frac{10^9 \times 3}{f_{(BCLK)} \times 2} - 40 \quad [ns]$$

$$t_{su(DB-CAS)} = \frac{10^9}{f_{(BCLK)}} - 40 \quad [ns]$$

$$t_{su(CAS-RAS)} = \frac{10^9}{f_{(BCLK)} \times 2} - 25 \quad [ns]$$

Vcc=3V

Memory expansion Mode and Microprocessor Mode (without wait)

Read Timing

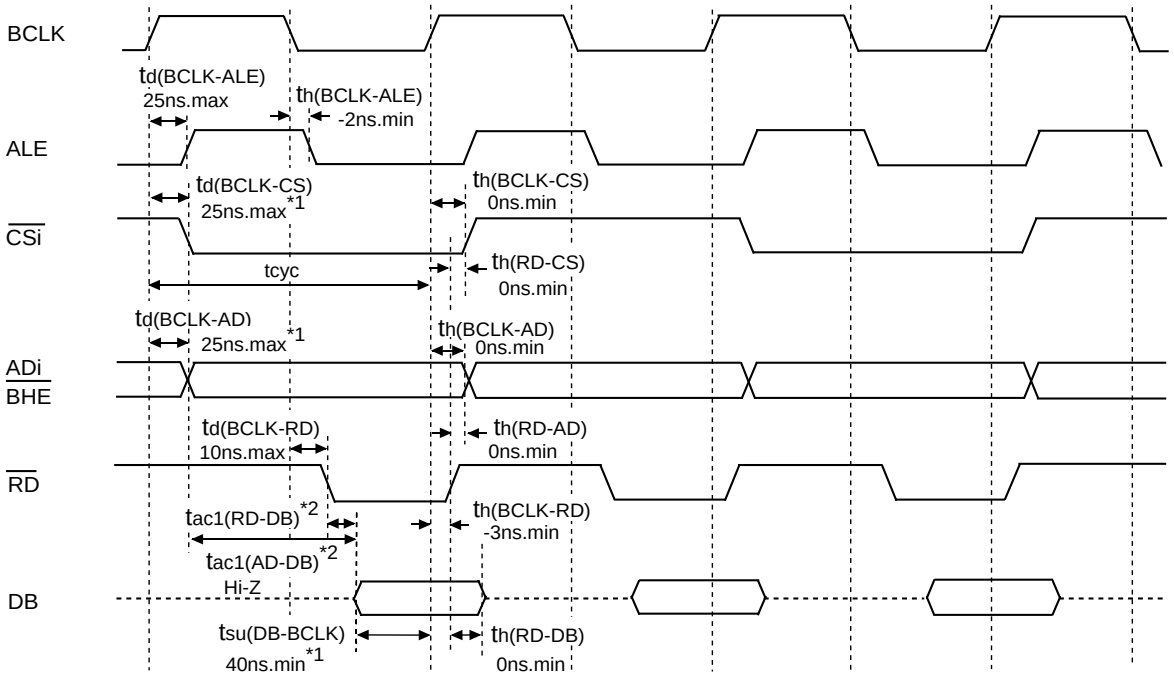

*1:It is a guarantee value with being alone. 55ns.max garantees as $t_{d(BCLK-AD)}+t_{su(DB-BCLK)}$.
*2:It depends on operation frequency.
$t_{ac1(RD-DB)}$=(tcyc/2-42)ns.max
$t_{ac1(AD-DB)}$=(tcyc-55)ns.max

Write Timing (Written by 2 cycles in selecting no wait)

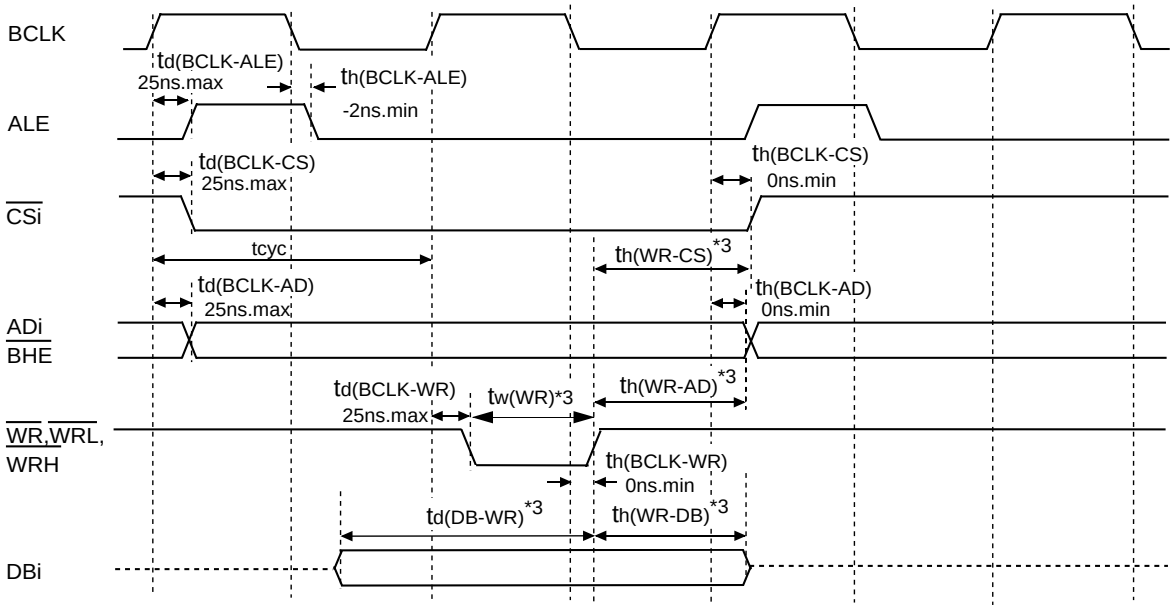

*3:It depends on operation frequency.
$t_{d(DB-WR)}$=(tcyc-40)ns.min
$t_{h(WR-DB)}$=(tcyc/2-20)ns.min
$t_{h(WR-AD)}$=(tcyc/2-20)ns.min
$t_{h(WR-CS)}$=(tcyc/2-20)ns.min
$t_{w(WR)}$=(tcyc/2-20)ns.min

Measuring conditions
- V_{CC}=3V±10%
- Input timing voltage :Determined with V_{IH}=1.5V, V_{IL}=0.5V
- Output timing voltage :Determined with V_{OH}=1.5V, V_{OL}=1.5V

Figure 28.15 V_{CC}=3V timing diagram (1)

Vcc=3V

Memory expansion Mode and Microprocessor Mode (with 1 wait)

Read Timing

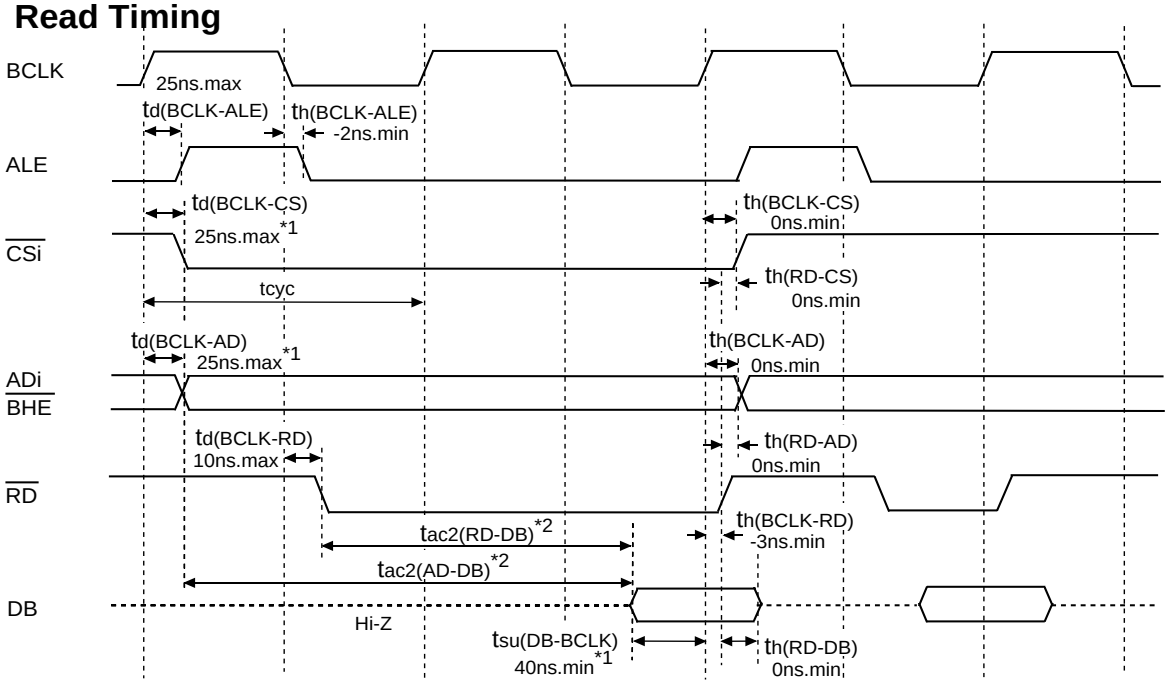

*1:It is a guarantee value with being alone. 55ns.max garantees as $t_{d(BCLK-AD)}+t_{su(DB-BCLK)}$.
*2:It depends on operation frequency.
$t_{ac2(RD-DB)}$=(tcyc/2 x m-42)ns.max (m=3, 5 and 7 when 1 wait, 2 wait and 3 wait, respectively.)
$t_{ac2(AD-DB)}$=(tcyc x n-55)ns.max (n=2, 3 and 4 when 1 wait, 2 wait and 3 wait, respectively.)

Write Timing

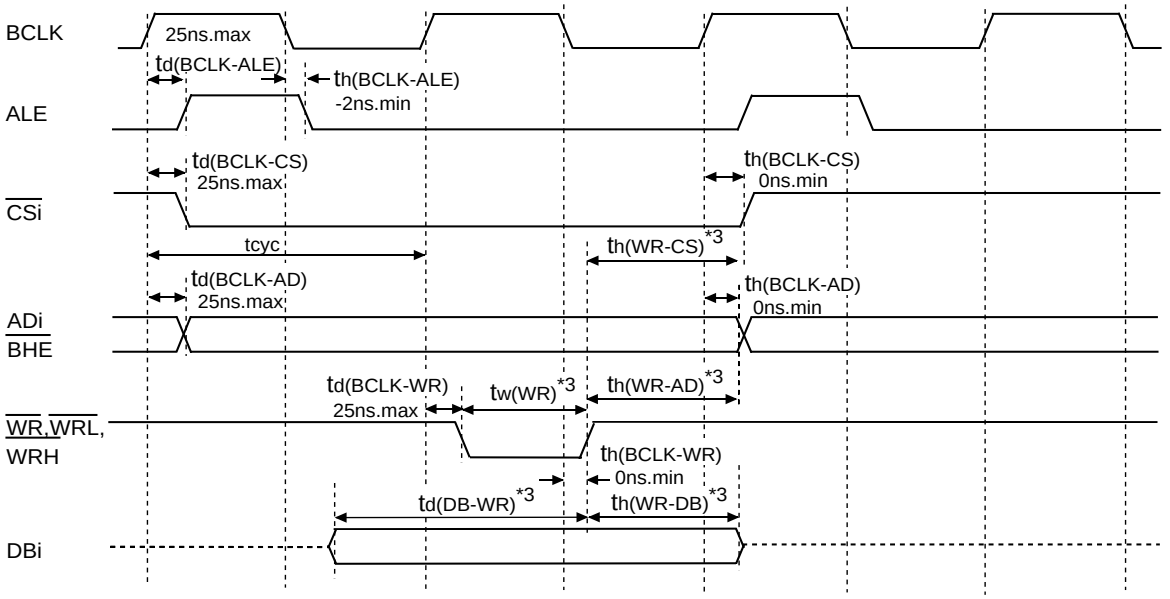

*3:It depends on operation frequency.
$t_{d(DB-WR)}$=(tcyc x n-40)ns.min
(n=1, 2 and 3 when 1 wait, 2 wait and 3 wait, respectively.)
$t_{h(WR-DB)}$=(tcyc/2-20)ns.min
$t_{h(WR-AD)}$=(tcyc/2-20)ns.min
$t_{h(WR-CS)}$=(tcyc/2-20)ns.min
$t_{w(WR)}$=(tcyc/2 x n-20)ns.min
(n=1, 3 and 5 when 1 wait, 2 wait and 3 wait, respectively.)

Measuring conditions
- V_{CC}=3V±10%
- Input timing voltage
  :Determined with V_{IH}=1.5V, V_{IL}=0.5V
- Output timing voltage
  :Determined with V_{OH}=1.5V, V_{OL}=1.5V

Figure 28.16 V_{CC}=3V timing diagram (2)

Vcc=3V

Memory expansion Mode and Microprocessor Mode (with 2 wait)

Read Timing

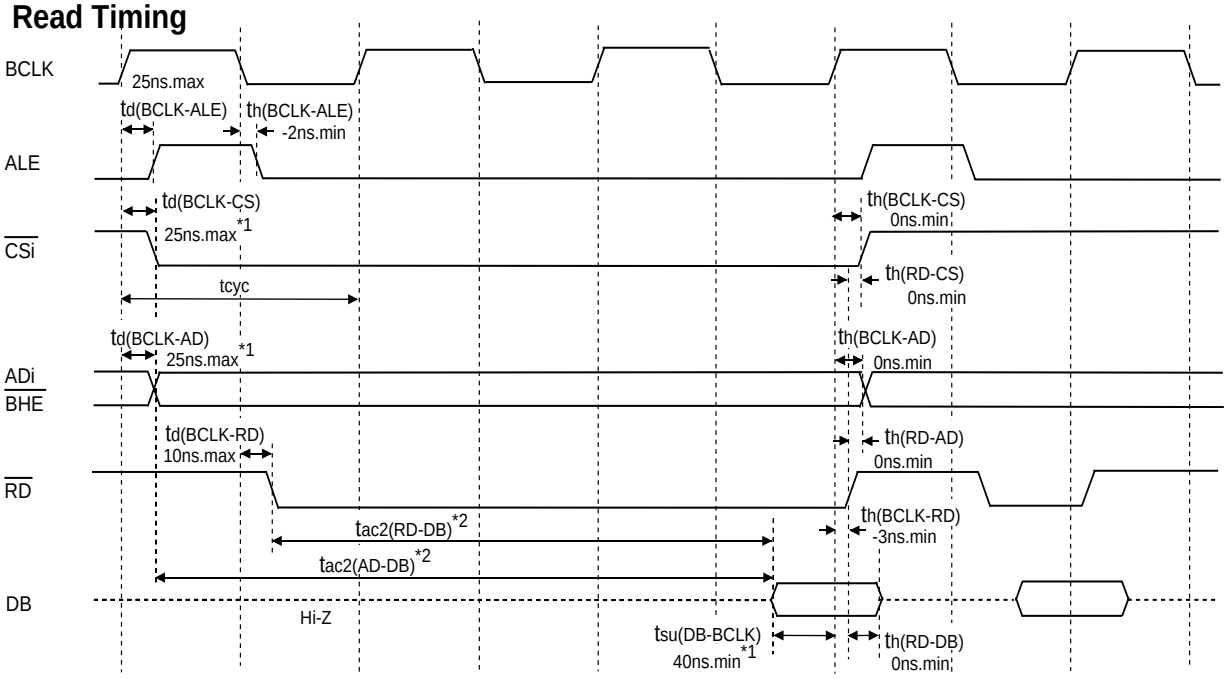

*1:It is a guarantee value with being alone. 55ns.max garantees as $t_{d(BCLK-AD)}+t_{su(DB-BCLK)}$.

*2:It depends on operation frequency.

$t_{ac2(RD-DB)}$=(tcyc/2 x m-42)ns.max (m=3, 5 and 7 when 1 wait, 2 wait and 3 wait, respectively.)

$t_{ac2(AD-DB)}$=(tcyc x n-55)ns.max (n=2, 3 and 4 when 1 wait, 2 wait and 3 wait, respectively.)

Write Timing

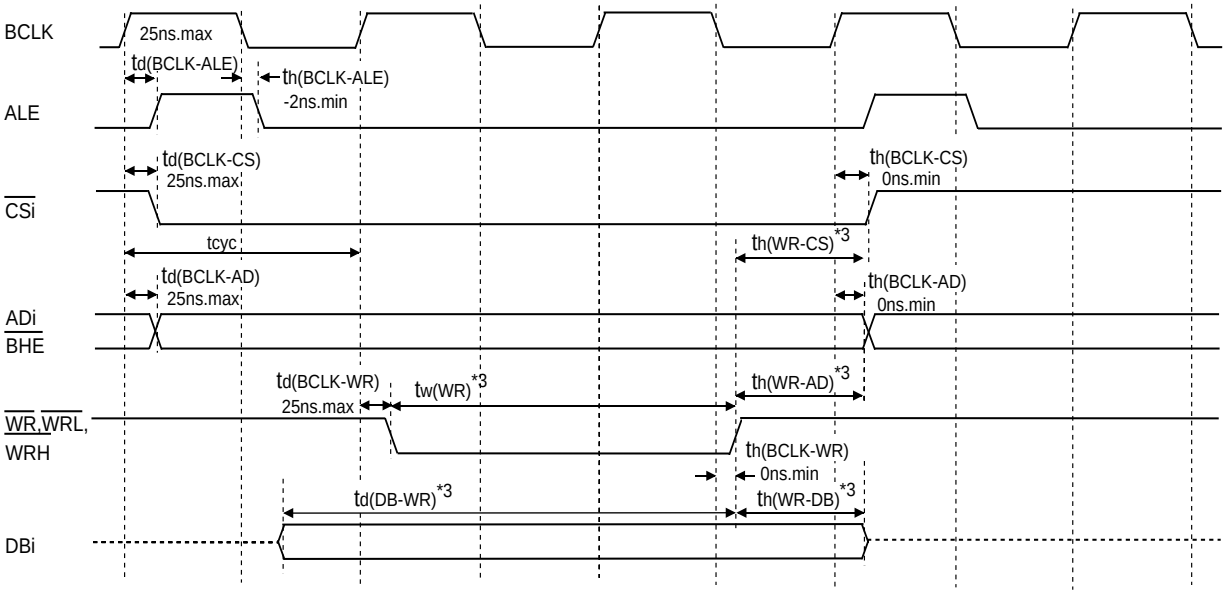

*3:It depends on operation frequency.

$t_{d(DB-WR)}$=(tcyc x n-40)ns.min
(n=1, 2 and 3 when 1 wait, 2 wait and 3 wait, respectively.)

$t_{h(WR-DB)}$=(tcyc/2-20)ns.min

$t_{h(WR-AD)}$=(tcyc/2-20)ns.min

$t_{h(WR-CS)}$=(tcyc/2-20)ns.min

$t_{w(WR)}$=(tcyc/2 x n-20)ns.min
(n=1, 3 and 5 when 1 wait, 2 wait and 3 wait, respectively.)

Measuring conditions

- V_{CC}=3V±10%
- Input timing voltage
  :Determined with V_{IH}=1.5V, V_{IL}=0.5V
- Output timing voltage
  :Determined with V_{OH}=1.5V, V_{OL}=1.5V

Figure 28.17 V_{CC}=3V timing diagram (3)

Memory expansion Mode and Microprocessor Mode (with 3 wait)

Vcc=3V

Read Timing

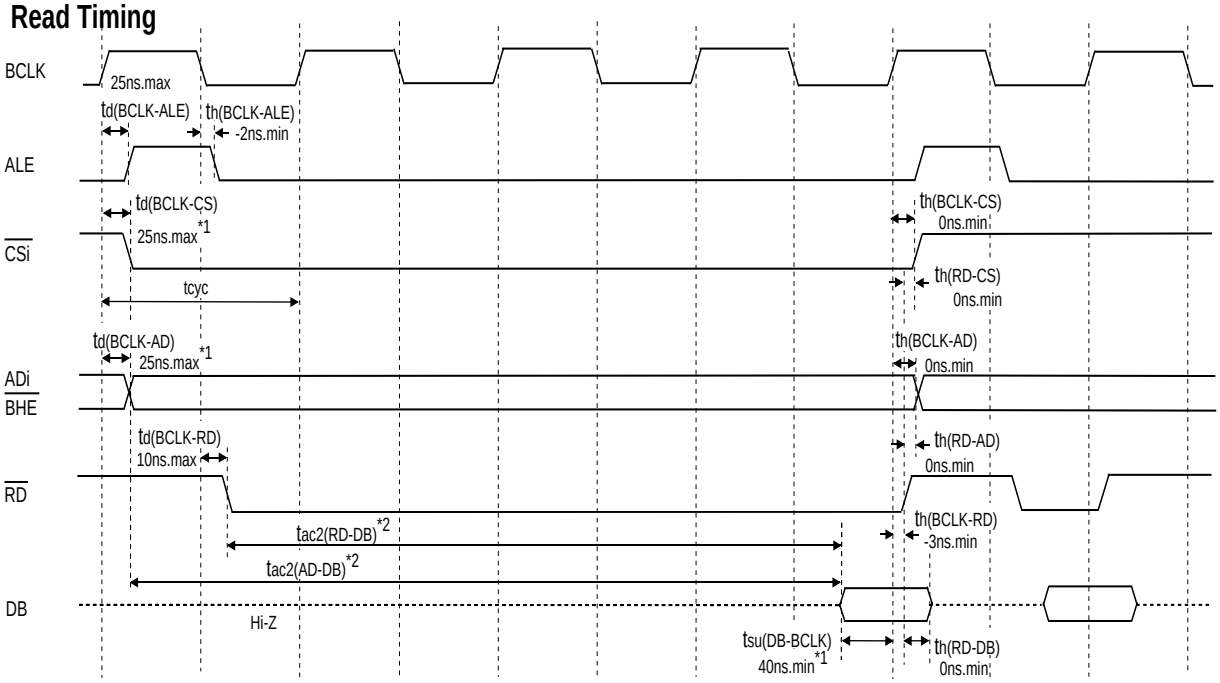

*1:It is a guarantee value with being alone. 55ns.max garantees as td(BCLK-AD)+tsu(DB-BCLK).

*2:It depends on operation frequency.

tac2(RD-DB)=(tcyc/2 x m-42)ns.max (m=3, 5 and 7 when 1 wait, 2 wait and 3 wait, respectively.)

tac2(AD-DB)=(tcyc x n-55)ns.max (n=2, 3 and 4 when 1 wait, 2 wait and 3 wait, respectively.)

Write Timing

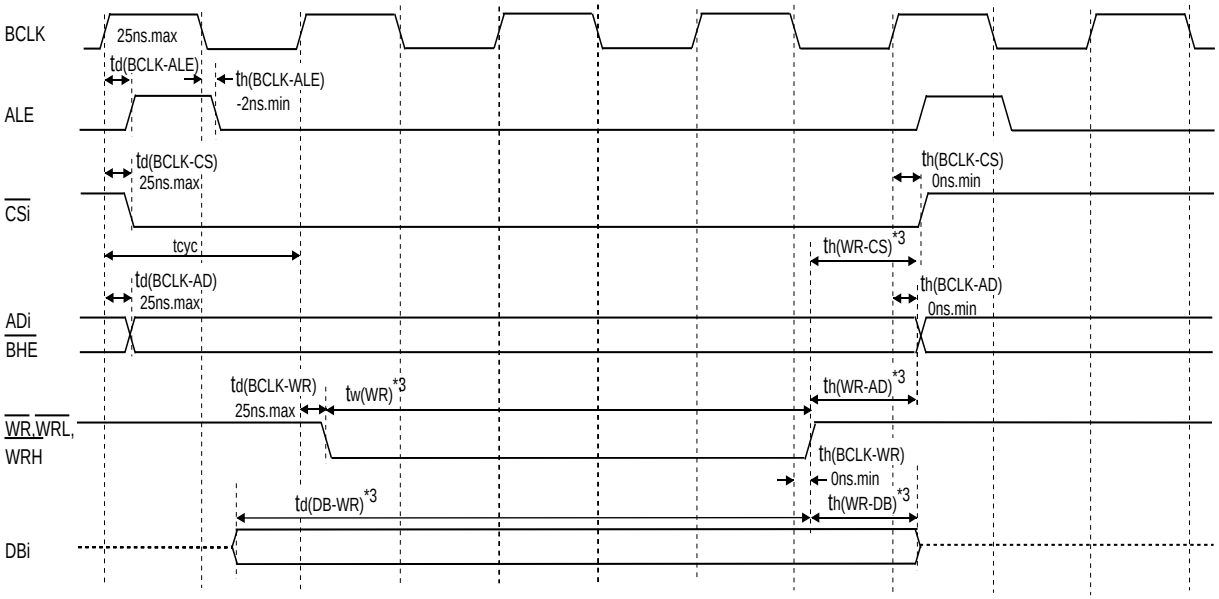

*3:It depends on operation frequency.

td(DB-WR)=(tcyc x n-40)ns.min

(n=1, 2 and 3 when 1 wait, 2 wait and 3 wait, respectively.)

th(WR-DB)=(tcyc/2-20)ns.min

th(WR-AD)=(tcyc/2-20)ns.min

th(WR-CS)=(tcyc/2-20)ns.min

tw(WR)=(tcyc/2 x n-20)ns.min

(n=1, 3 and 5 when 1 wait, 2 wait and 3 wait, respectively.)

Measuring conditions

- Vcc=3V±10%
- Input timing voltage
  :Determined with VIH=1.5V, VIL=0.5V
- Output timing voltage
  :Determined with VOH=1.5V, VOL=1.5V

Figure 28.18 Vcc=3V timing diagram (4)

Memory expansion Mode and Microprocessor Mode

Vcc=3V

(When accessing external memory area with 2 wait, and select multiplexed bus)

Read Timing

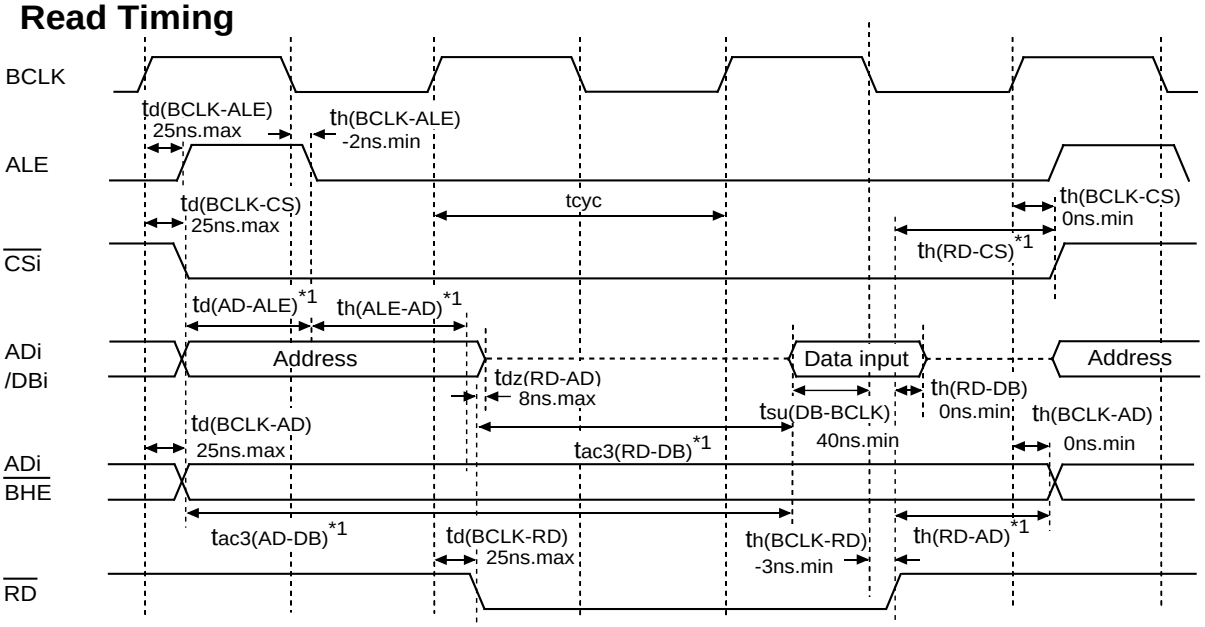

*1:It depends on operation frequency.

$t_{d(AD-ALE)}$=(tcyc/2-27)ns.min

$t_{h(ALE-AD)}$=(tcyc/2-20)ns.min, $t_{h(RD-AD)}$=(tcyc/2-20)ns.min, $t_{h(RD-CS)}$=(tcyc/2-20)ns.min

$t_{ac3(RD-DB)}$=(tcyc/2 x m-55)ns.max (m=3 and 5 when 2 wait and 3 wait, respectively.)

$t_{ac3(AD-DB)}$=(tcyc/2 x n-55)ns.max (n=5 and 7 when 2 wait and 3 wait, respectively.)

Write Timing

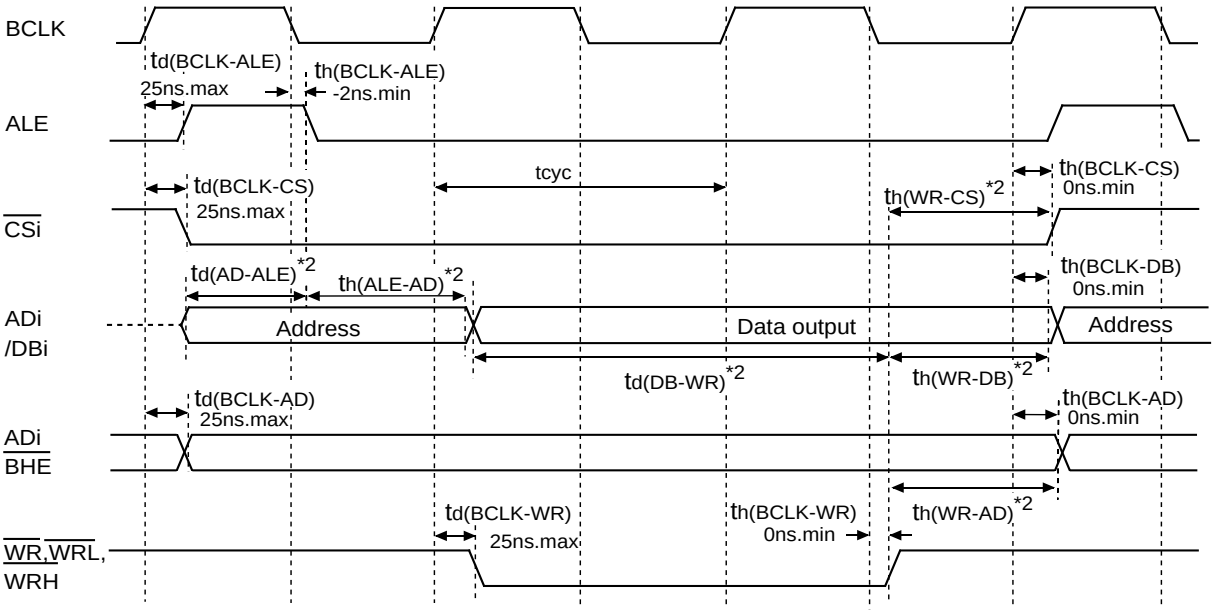

*2:It depends on operation frequency.

$t_{d(AD-ALE)}$=(tcyc/2-27)ns.min

$t_{h(ALE-AD)}$=(tcyc/2-20)ns.min, $t_{h(WR-AD)}$=(tcyc/2-20)ns.min

$t_{h(WR-CS)}$=(tcyc/2-20)ns.min, $t_{h(WR-DB)}$=(tcyc/2-20)ns.min

$t_{d(DB-WR)}$=(tcyc/2 x m-40)ns.min

(m=3 and 5 when 2 wait and 3 wait, respectively.)

Measuring conditions

- V_{CC}=3V±10%
- Input timing voltage
  :Determined with V_{IH}=1.5V, V_{IL}=0.5V
- Output timing voltage
  :Determined with V_{OH}=1.5V, V_{OL}=1.5V

Figure 28.19 V_{CC}=3V timing diagram (5)

Memory expansion Mode and Microprocessor Mode

Vcc=3V

(When accessing external memory area with 3 wait, and select multiplexed bus)

Read Timing

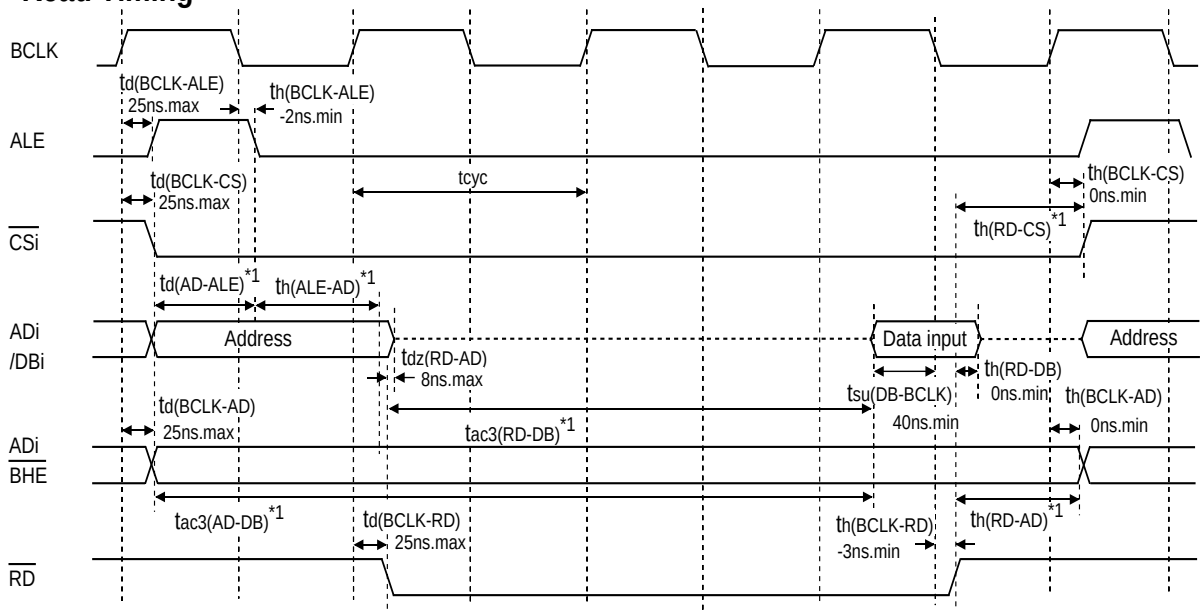

*1:It depends on operation frequency.

$t_{d(AD-ALE)}$=(tcyc/2-27)ns.min

$t_{h(ALE-AD)}$=(tcyc/2-20)ns.min, $t_{h(RD-AD)}$=(tcyc/2-20)ns.min, $t_{h(RD-CS)}$=(tcyc/2-20)ns.min

$t_{ac3(RD-DB)}$=(tcyc/2 x m-55)ns.max (m=3 and 5 when 2 wait and 3 wait, respectively.)

$t_{ac3(AD-DB)}$=(tcyc/2 x n-55)ns.max (n=5 and 7 when 2 wait and 3 wait, respectively.)

Write Timing

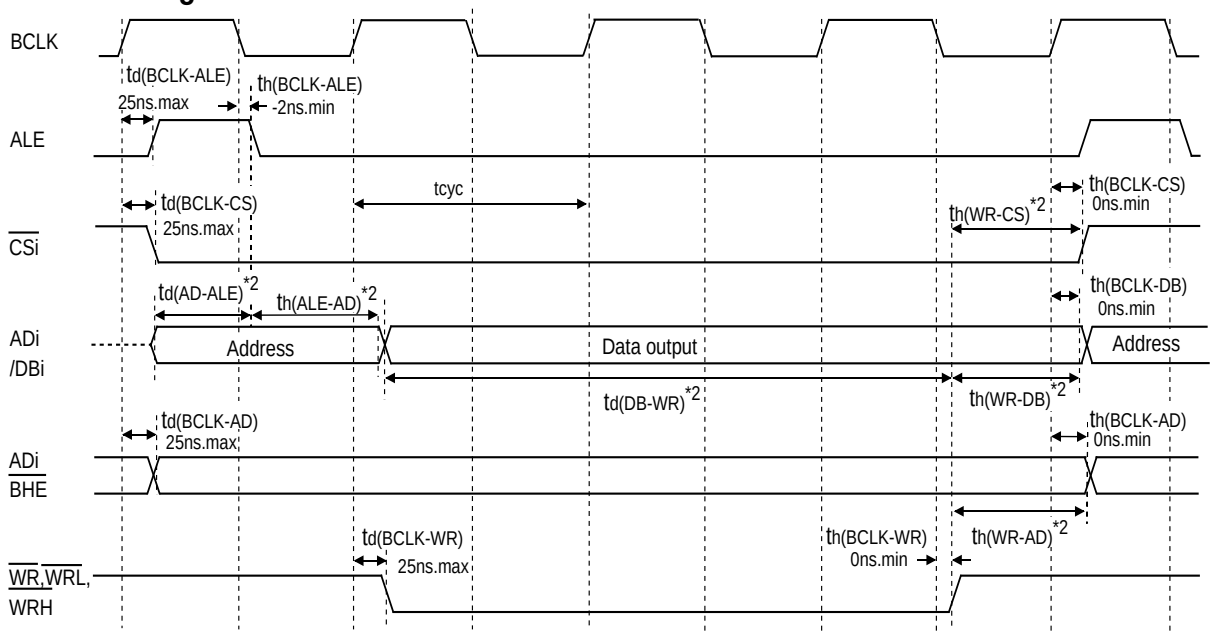

*2:It depends on operation frequency.

$t_{d(AD-ALE)}$=(tcyc/2-27)ns.min

$t_{h(ALE-AD)}$=(tcyc/2-20)ns.min, $t_{h(WR-AD)}$=(tcyc/2-20)ns.min

$t_{h(WR-CS)}$=(tcyc/2-20)ns.min, $t_{h(WR-DB)}$=(tcyc/2-20)ns.min

$t_{d(DB-WR)}$=(tcyc/2 x m-40)ns.min

(m=3 and 5 when 2 wait and 3 wait, respectively.)

Measuring conditions

- V_{CC}=3V±10%
- Input timing voltage
  :Determined with V_{IH}=1.5V, V_{IL}=0.5V
- Output timing voltage
  :Determined with V_{OH}=1.5V, V_{OL}=1.5V

Figure 28.20 V_{CC}=3V timing diagram (6)

Memory expansion Mode and Microprocessor Mode

Vcc=3V

(When accessing DRAM area with 1 wait)

Read Timing

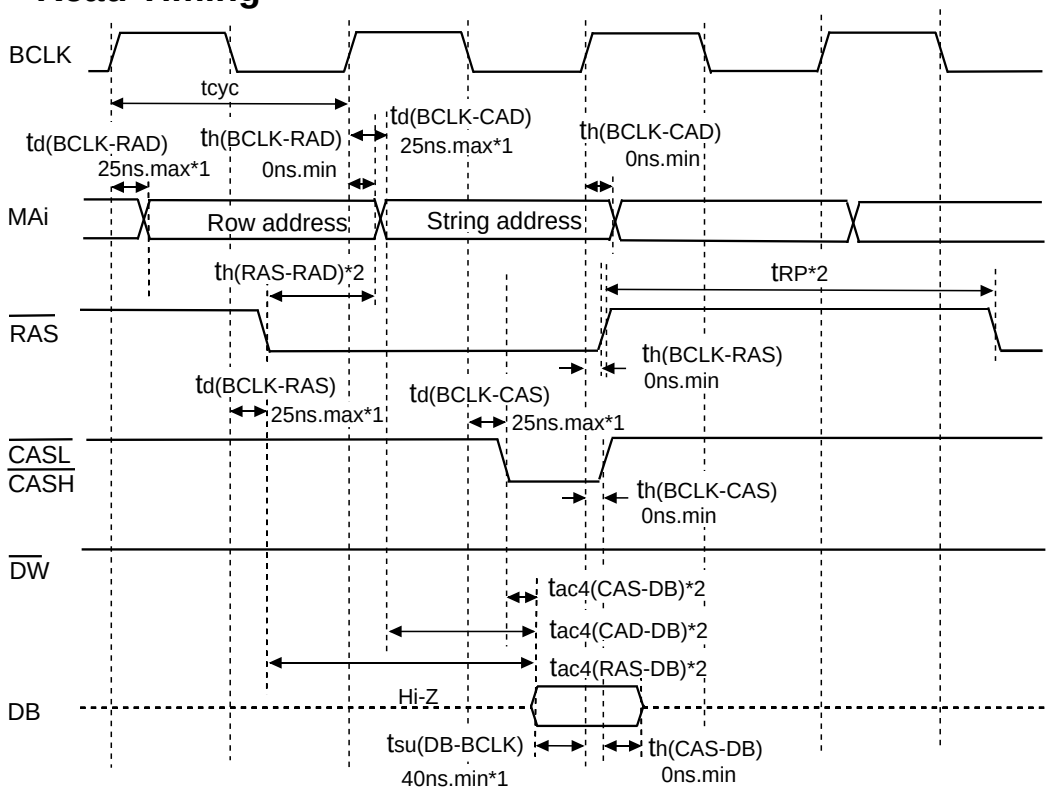

*1:It is a guarantee value with being alone. 55ns.max garantees as follows:

$t_{d(BCLK-RAS)} + t_{su(DB-BCLK)}$

$t_{d(BCLK-CAS)} + t_{su(DB-BCLK)}$

$t_{d(BCLK-CAD)} + t_{su(DB-BCLK)}$

*2:It depends on operation frequency.

$t_{ac4(RAS-DB)}$=(tcyc/2 x m-55)ns.max (m=3 and 5 when 1 wait and 2 wait, respectively.)

$t_{ac4(CAS-DB)}$=(tcyc/2 x n-55)ns.max (n=1 and 3 when 1 wait and 2 wait, respectively.)

$t_{ac4(CAD-DB)}$=(tcyc x l-55)ns.max (l=1 and 2 when 1 wait and 2 wait, respectively.)

$t_{h(RAS-RAD)}$=(tcyc/2-25)ns.min

t_{RP}=(tcyc/2 x 3-40)ns.min

Measuring conditions

- V_{CC}=3V±10%
- Input timing voltage
  :Determined with V_{IH}=1.5V, V_{IL}=0.5V
- Output timing voltage
  :Determined with V_{OH}=1.5V, V_{OL}=1.5V

Figure 28.21 V_{CC}=3V timing diagram (7)

Memory expansion Mode and Microprocessor Mode

Vcc=3V

(When accessing DRAM area with 1 wait)

Write Timing

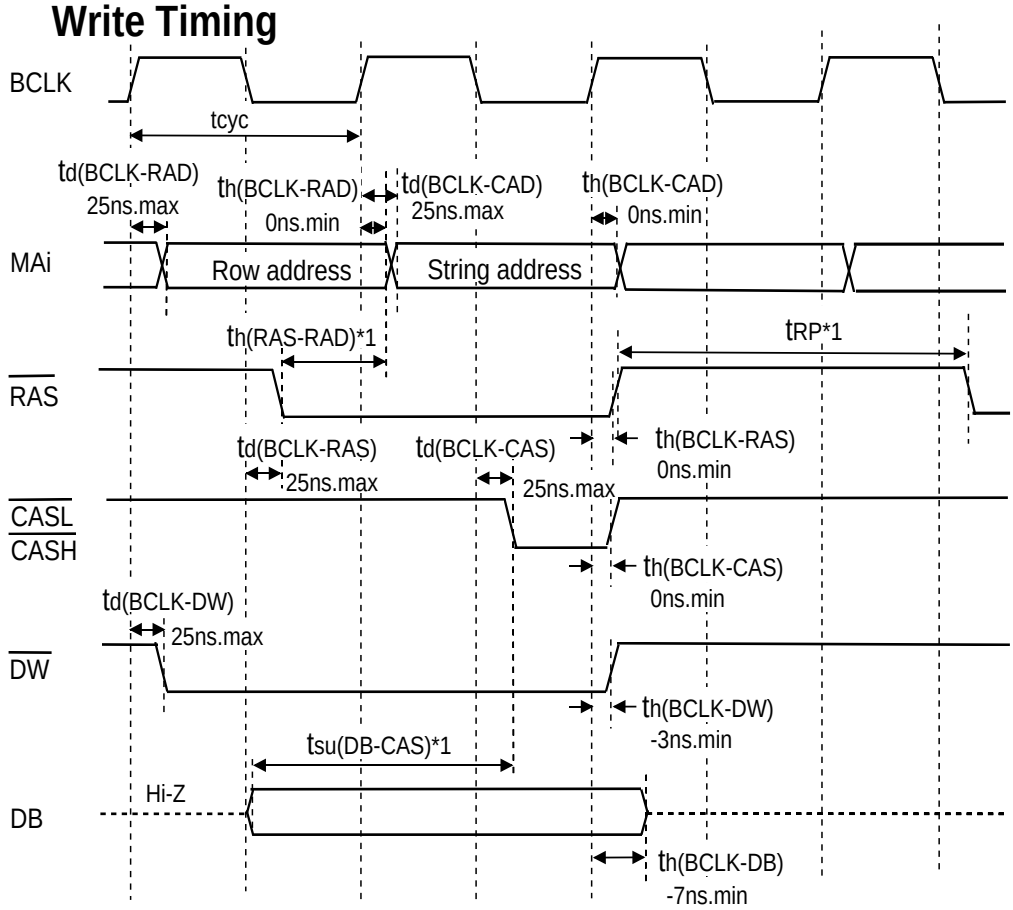

*1:It depends on operation frequency.

$t_{h(RAS-RAD)}$=(tcyc/2-25)ns.min

t_{RP}=(tcyc/2 x 3-40)ns.min

$t_{su(DB-CAS)}$=(tcyc-40)ns.min

Measuring conditions

- V_{CC}=3V±10%
- Input timing voltage
  :Determined with V_{IH}=1.5V, V_{IL}=0.5V
- Output timing voltage
  :Determined with V_{OH}=1.5V, V_{OL}=1.5V

Figure 28.22 V_{CC}=3V timing diagram (8)

Memory expansion Mode and Microprocessor Mode

Vcc=3V

(When accessing DRAM area with 2 wait)

Read Timing

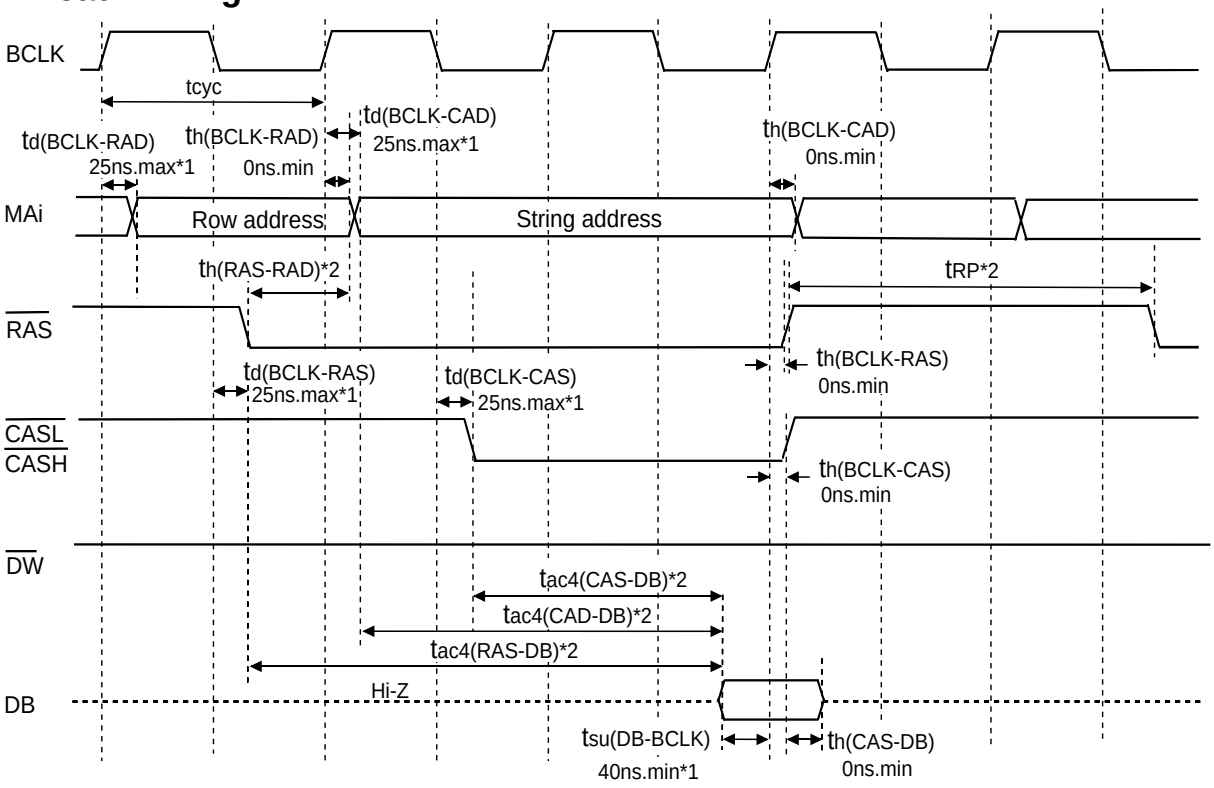

*1:It is a guarantee value with being alone. 55ns.max garantees as follows:

$t_{d(BCLK-RAS)} + t_{su(DB-BCLK)}$

$t_{d(BCLK-CAS)} + t_{su(DB-BCLK)}$

$t_{d(BCLK-CAD)} + t_{su(DB-BCLK)}$

*2:It depends on operation frequency.

$t_{ac4(RAS-DB)}$=(tcyc/2 x m-55)ns.max (m=3 and 5 when 1 wait and 2 wait, respectively.)

$t_{ac4(CAS-DB)}$=(tcyc/2 x n-55)ns.max (n=1 and 3 when 1 wait and 2 wait, respectively.)

$t_{ac4(CAD-DB)}$=(tcyc x l-55)ns.max (l=1 and 2 when 1 wait and 2 wait, respectively.)

$t_{h(RAS-RAD)}$=(tcyc/2-25)ns.min

t_{RP}=(tcyc/2 x 3-40)ns.min

Measuring conditions

- V_{CC}=3V±10%
- Input timing voltage
  :Determined with V_{IH}=1.5V, V_{IL}=0.5V
- Output timing voltage
  :Determined with V_{OH}=1.5V, V_{OL}=1.5V

Figure 28.23 V_{CC}=3V timing diagram (9)

Memory expansion Mode and Microprocessor Mode

Vcc=3V

(When accessing DRAM area with 2 wait)

Write Timing

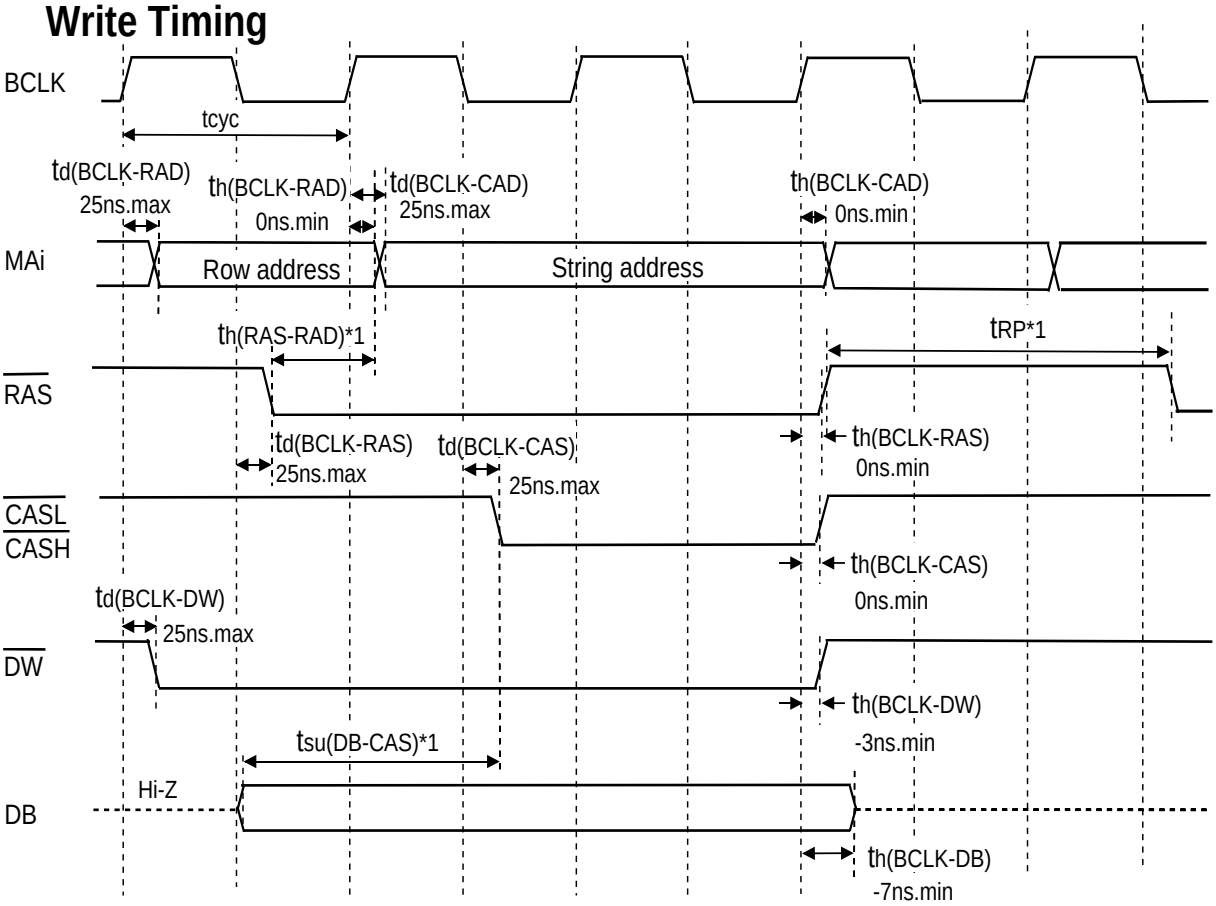

*1:It depends on operation frequency.

$t_{h(RAS-RAD)}$=(tcyc/2-25)ns.min

t_{RP}=(tcyc/2 x 3-40)ns.min

$t_{su(DB-CAS)}$=(tcyc-40)ns.min

Measuring conditions

- V_{CC}=3V±10%
- Input timing voltage
  :Determined with V_{IH}=1.5V, V_{IL}=0.5V
- Output timing voltage
  :Determined with V_{OH}=1.5V, V_{OL}=1.5V

Figure 28.24 V_{CC}=3V timing diagram (10)

Memory expansion Mode and Microprocessor Mode

Vcc=3V

Refresh Timing (CAS before RAS refresh)

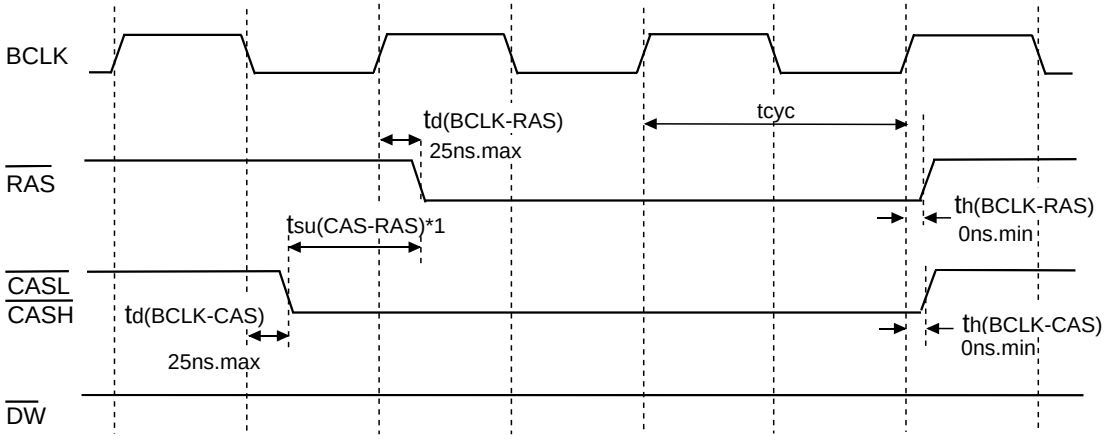

*1:It depends on operation frequency.
$t_{su(CAS-RAS)}$=(tcyc/2-25)ns.min

Refresh Timing (Self-refresh)

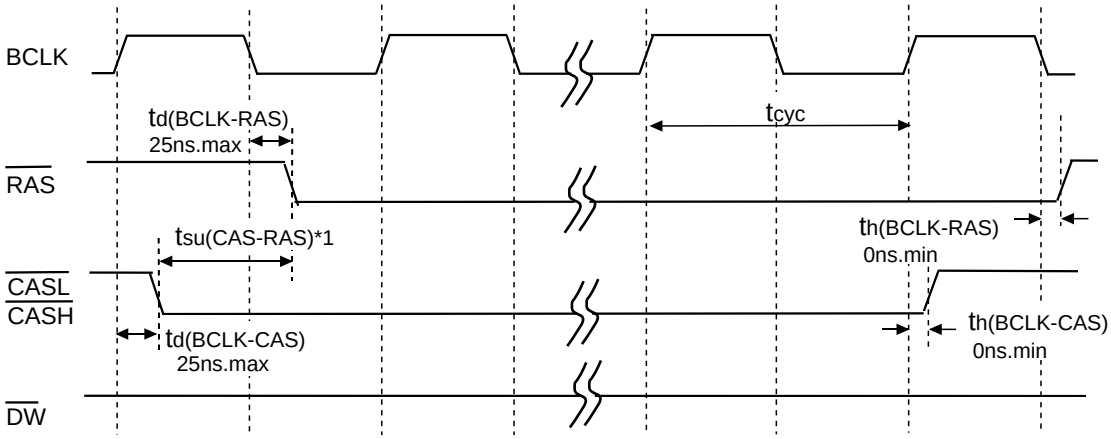

*1:It depends on operation frequency.
$t_{su(CAS-RAS)}$=(tcyc/2-25)ns.min

Measuring conditions

- V_{CC}=3V±10%
- Input timing voltage
  :Determined with V_{IH}=1.5V, V_{IL}=0.5V
- Output timing voltage
  :Determined with V_{OH}=1.5V, V_{OL}=1.5V

Figure 28.25 V_{CC}=3V timing diagram (11)

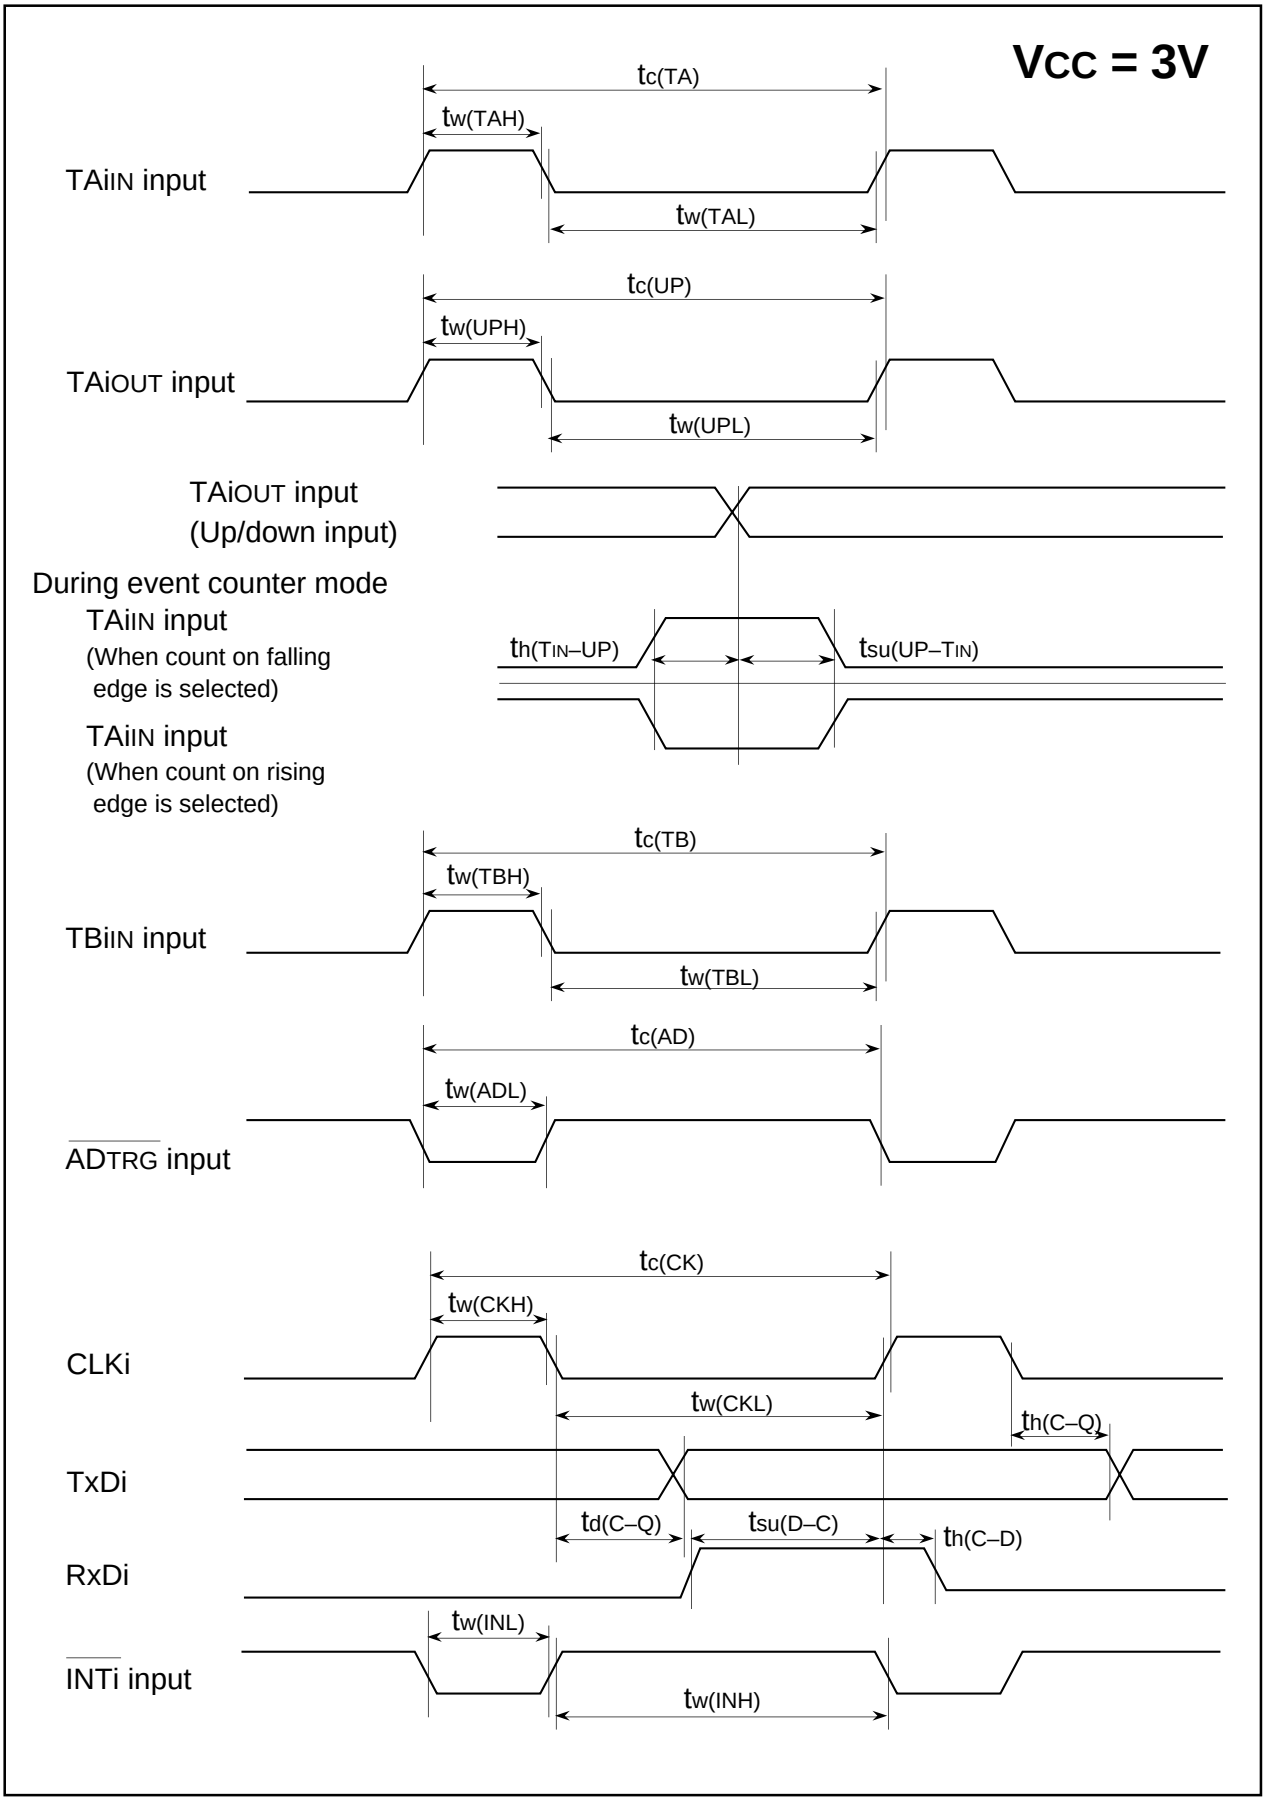

Figure 28.26 Vcc=3V timing diagram (12)

Memory Expansion Mode and Microprocessor Mode **Vcc = 3V**

(Valid only with wait)

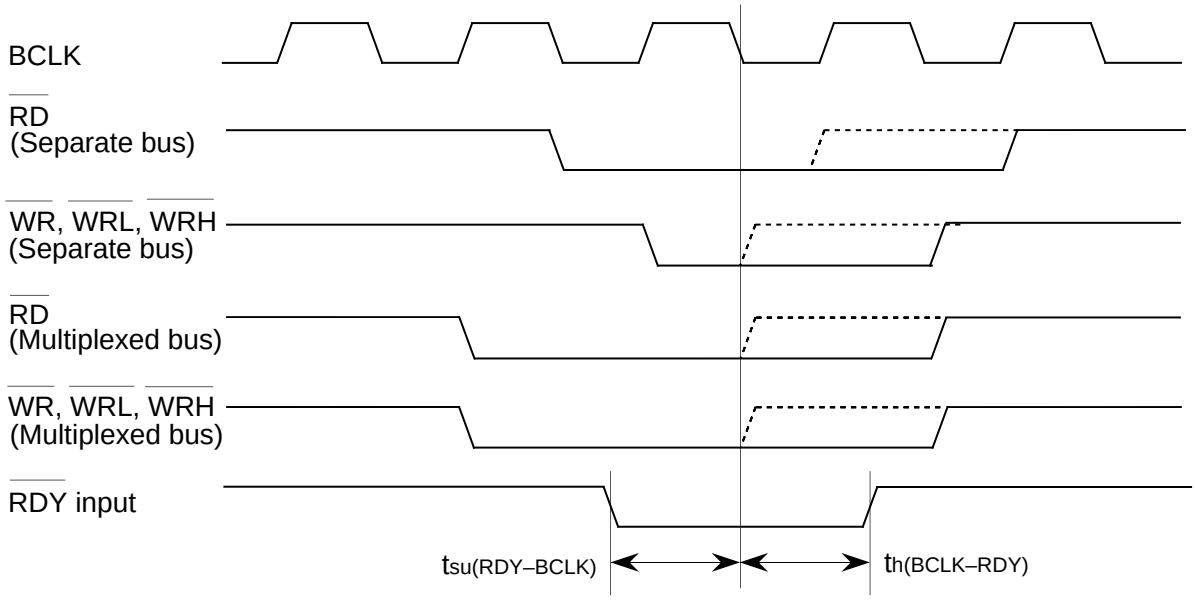

(Valid with or without wait)

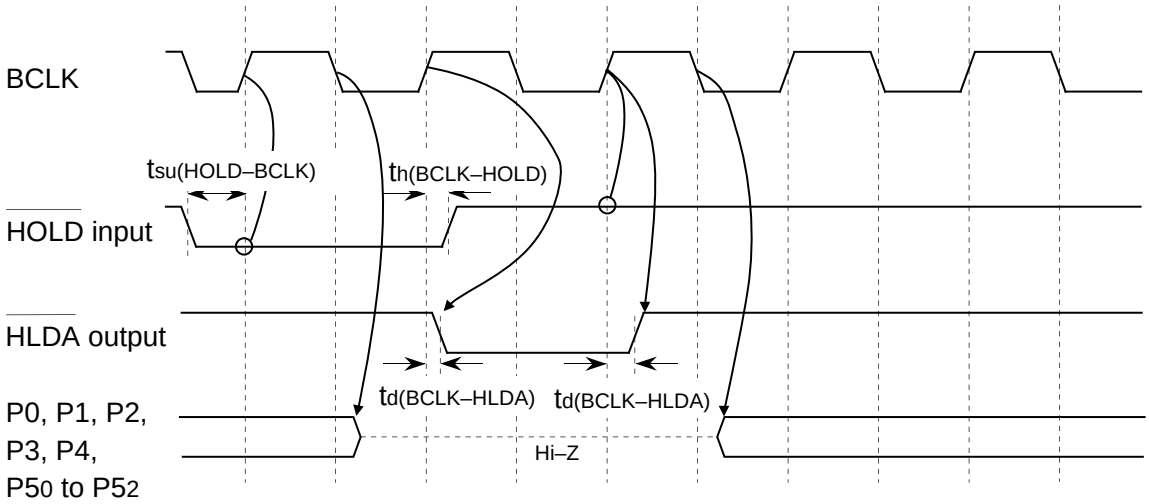

Measuring conditions :

- VCC=3V±10%
- Input timing voltage : Determined with VIH=2.4V, VIL=0.6V
- Output timing voltage : Determined with VOH=1.5V, VOL=1.5V

Figure 28.27 Vcc=3V timing diagram (13)

29. Flash Memory Version

Outline Performance

Table 29.1 shows the outline performance of the M16C/80 (flash memory version).

Table 29.1 Outline Performance of the M16C/80 (flash memory version)

Item		Performance
Power supply voltage		5V version: f(XIN)=20MHz, without wait, 4.2V to 5.5V f(XIN)=10MHz, without wait, 2.7V to 5.5V
Program/erase voltage		5V version: 4.2V to 5.5 V f(BCLK)=12.5MHz, with one wait f(BCLK)=6.25MHz, without wait
Flash memory operation mode		Three modes (parallel I/O, standard serial I/O, CPU rewrite)
Erase block division	User ROM area	See Figure 29.3
	Boot ROM area	One division (8 Kbytes) (Note 1)
Program method		In units of pages (in units of 256 bytes)
Erase method		Collective erase/block erase
Program/erase control method		Program/erase control by software command
Protect method		Protected for each block by lock bit
Number of commands		8 commands
Program/erase count		100 times
Data holding		10 years
ROM code protect		Parallel I/O and standard serial modes are supported.

Note: The boot ROM area contains a standard serial I/O mode control program which is stored in it when shipped from the factory. This area can be erased and programmed in only parallel I/O mode.

The following shows Renesas plans to develop a line of M16C/80 products (flash memory version).

(1) ROM capacity

(2) Package 100P6S-A ... Plastic molded QFP
100P6Q-A ... Plastic molded QFP
144P6Q-A ... Plastic molded QFP

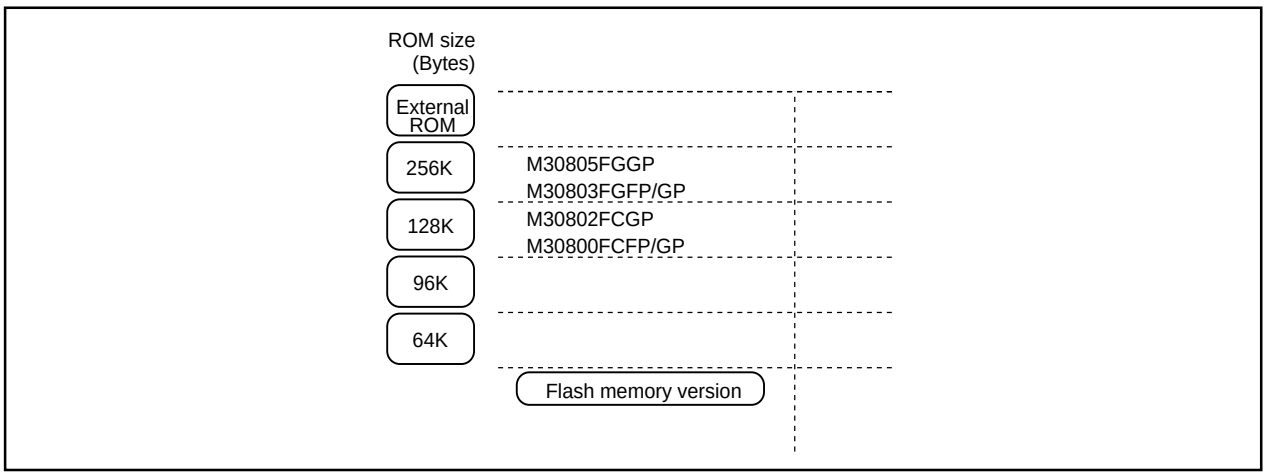

Figure 29.1 ROM Expansion

The following lists the M16C/80 products to be supported in the future.

Table 29.2 Product List

Type No	ROM capacity	RAM capacity	Package type	Remarks
M30800FCFP	128 Kbytes	10 Kbytes	100P6S-A	
M30800FCGP			100P6Q-A	
M30803FGFP	256 Kbytes	20 Kbytes	100P6S-A	
M30803FGGP			100P6Q-A	
M30802FCGP	128 Kbytes	10 Kbytes	144P6Q-A	
M30805FGGP	256 Kbytes	20 Kbytes		

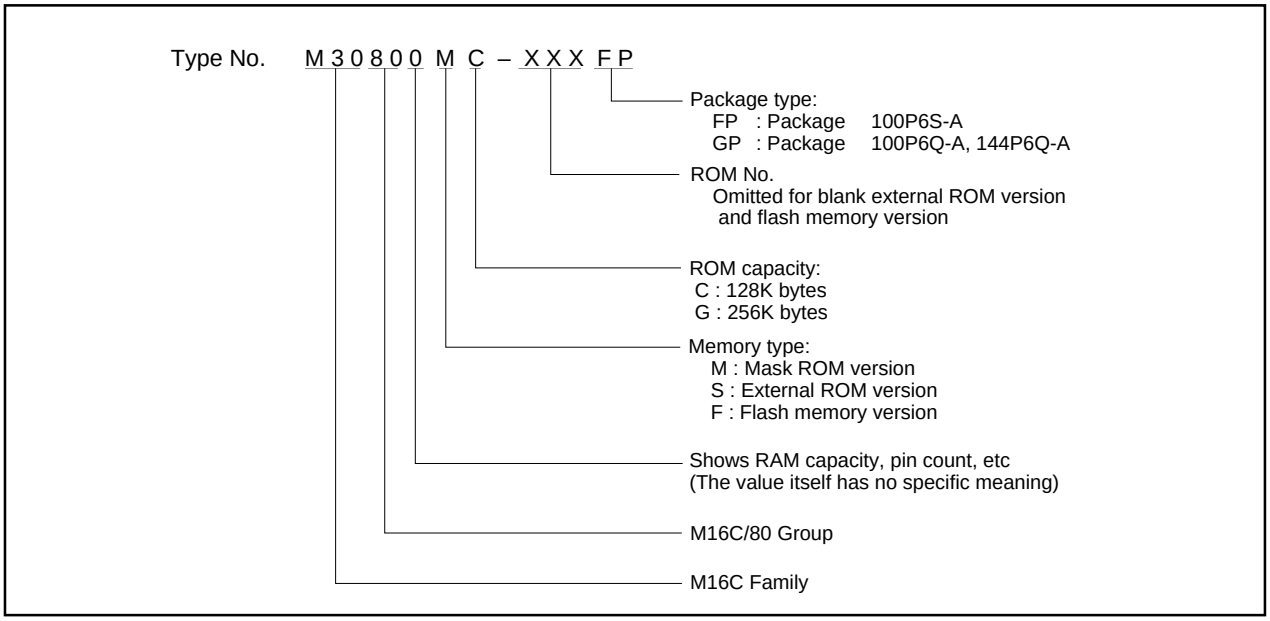

Figure 29.2 Type No., memory size, and package

Flash Memory

The M16C/80 (flash memory version) contains the flash memory that can be rewritten with a single voltage of 5 V. For this flash memory, three flash memory modes are available in which to read, program, and erase: parallel I/O and standard serial I/O modes in which the flash memory can be manipulated using a programmer and a CPU rewrite mode in which the flash memory can be manipulated by the Central Processing Unit (CPU). Each mode is detailed in the pages to follow.

The flash memory is divided into several blocks as shown in Figure 29.3, so that memory can be erased one block at a time. Each block has a lock bit to enable or disable execution of an erase or program operation, allowing for data in each block to be protected.

In addition to the ordinary user ROM area to store a microcomputer operation control program, the flash memory has a boot ROM area that is used to store a program to control rewriting in CPU rewrite and standard serial I/O modes. This boot ROM area has had a standard serial I/O mode control program stored in it when shipped from the factory. However, the user can write a rewrite control program in this area that suits the user's application system. This boot ROM area can be rewritten in only parallel I/O mode.

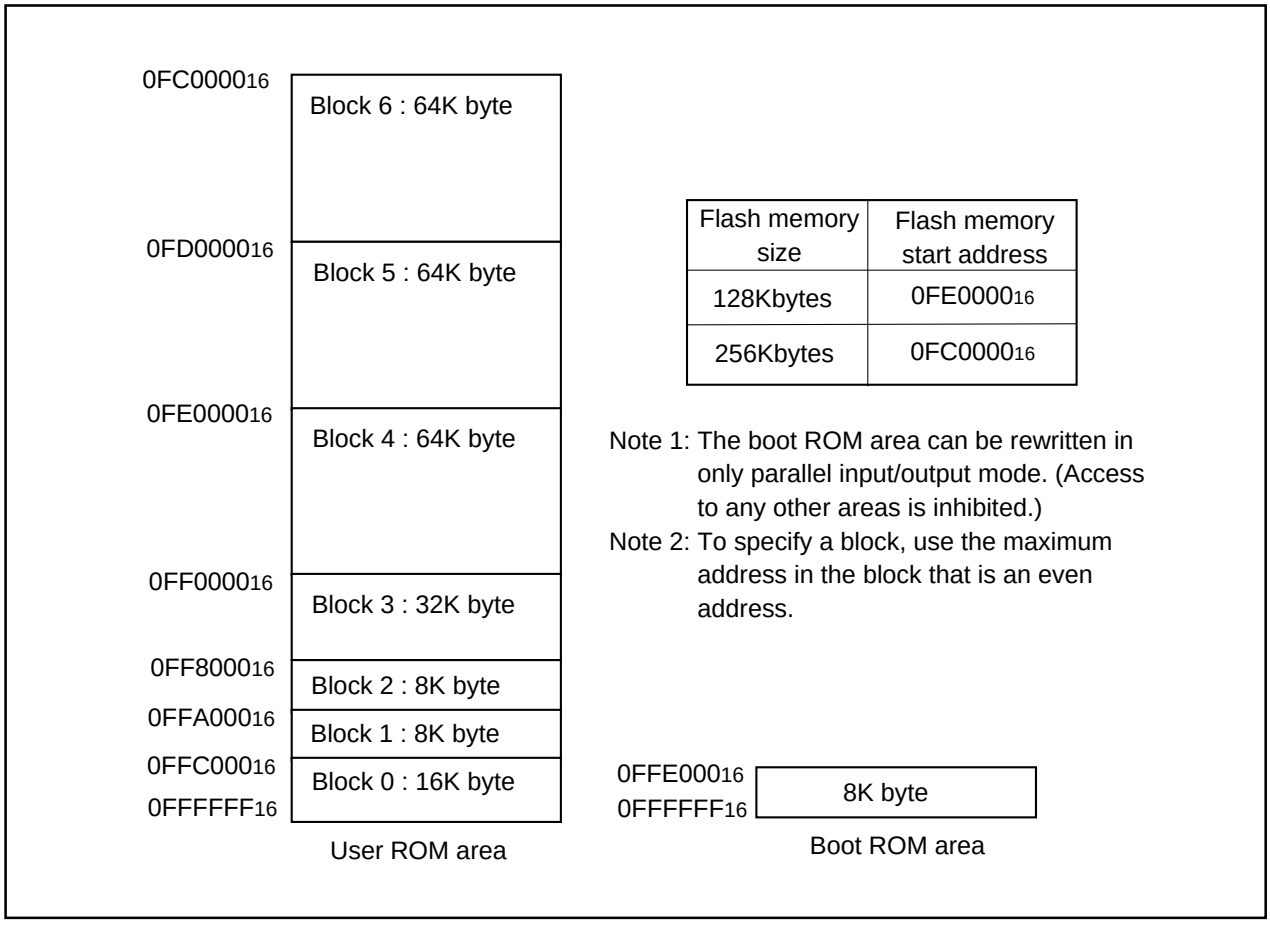

Figure 29.3 Block diagram of flash memory version

30. CPU Rewrite Mode

In CPU rewrite mode, the on-chip flash memory can be operated on (read, program, or erase) under control of the Central Processing Unit (CPU).

In CPU rewrite mode, only the user ROM area shown in Figure 29.3 can be rewritten; the boot ROM area cannot be rewritten. Make sure the program and block erase commands are issued for only the user ROM area and each block area.

The control program for CPU rewrite mode can be stored in either user ROM or boot ROM area. In the CPU rewrite mode, because the flash memory cannot be read from the CPU, the rewrite control program must be transferred to any area other than the internal flash memory before it can be executed.

Microcomputer Mode and Boot Mode

The control program for CPU rewrite mode must be written into the user ROM or boot ROM area in parallel I/O mode beforehand. (If the control program is written into the boot ROM area, the standard serial I/O mode becomes unusable.)

See Figure 29.3 for details about the boot ROM area.

Normal microcomputer mode is entered when the microcomputer is reset with pulling CNV_{SS} pin low. In this case, the CPU starts operating using the control program in the user ROM area.

When the microcomputer is reset by pulling the $P5_5$ pin low, the CNV_{SS} pin high, and the $P5_0$ pin high, the CPU starts operating using the control program in the boot ROM area. This mode is called the “boot” mode. The control program in the boot ROM area can also be used to rewrite the user ROM area.

Block Address

Block addresses refer to the maximum even address of each block. These addresses are used in the block erase command, lock bit program command, and read lock status command.

Outline Performance (CPU Rewrite Mode)

In the CPU rewrite mode, the CPU erases, programs and reads the internal flash memory as instructed by software commands. Operations must be executed from a memory other than the internal flash memory, such as the internal RAM.
When the CPU rewrite mode select bit (bit 1 at address 0377_{16}) is set to “1”, transition to CPU rewrite mode occurs and software commands can be accepted.
In the CPU rewrite mode, write to and read from software commands and data into even-numbered address (“0” for byte address A0) in 16-bit units. Always write 8-bit software commands into even-numbered address. Commands are ignored with odd-numbered addresses.
Use software commands to control program and erase operations. Whether a program or erase operation has terminated normally or in error can be verified by reading the status register.
Read data from an even address in the user ROM area when reading the status register.

Figure 30.1 shows the flash memory control register 0 and the flash memory control register 1.
Bit 0 of the flash memory control register 0 is the RY/$\overline{BY}$ status flag used exclusively to read the operating status of the flash memory. During programming and erase operations, it is “0”. Otherwise, it is “1”.
Bit 1 of the flash memory control register 0 is the CPU rewrite mode select bit. The CPU rewrite mode is entered by setting this bit to “1”, so that software commands become acceptable. In CPU rewrite mode, the CPU becomes unable to access the internal flash memory directly. Therefore, write bit 1 in an area other than the internal flash memory. To set this bit to “1”, it is necessary to write “0” and then write “1” in succession when NMI pin is "H" level. The bit can be set to “0” by only writing a “0” .
Bit 2 of the flash memory control register 0 is a lock bit disable bit. By setting this bit to “1”, it is possible to disable erase and write protect (block lock) effectuated by the lock bit data. The lock bit disable select bit only disables the lock bit function; it does not change the lock data bit value. However, if an erase operation is performed when this bit =“1”, the lock bit data that is “0” (locked) is set to “1” (unlocked) after erasure. To set this bit to “1”, it is necessary to write “0” and then write “1” in succession. This bit can be manipulated only when the CPU rewrite mode select bit = “1”.
Bit 3 of the flash memory control register 0 is the flash memory reset bit used to reset the control circuit of the internal flash memory. This bit is used when exiting CPU rewrite mode and when flash memory access has failed. When the CPU rewrite mode select bit is “1”, writing “1” for this bit resets the control circuit. To release the reset, it is necessary to set this bit to “0”.
Bit 5 of the flash memory control register 0 is a user ROM area select bit which is effective in only boot mode. If this bit is set to “1” in boot mode, the area to be accessed is switched from the boot ROM area to the user ROM area. When the CPU rewrite mode needs to be used in boot mode, set this bit to “1”. Note that if the microcomputer is booted from the user ROM area, it is always the user ROM area that can be accessed and this bit has no effect. When in boot mode, the function of this bit is effective regardless of whether the CPU rewrite mode is on or off. Use the control program except in the internal flash memory to rewrite this bit.

Bit 3 of the flash memory control register 1 turns power supply to the internal flash memory on/off. When this bit is set to “1”, power is not supplied to the internal flash memory, thus power consumption can be reduced. However, in this state, the internal flash memory cannot be accessed. To set this bit to “1”, it is necessary to write “0” and then write “1” in succession. Use this bit mainly in the low speed mode (when XCIN is the block count source of BCLK).
When the CPU is shifted to the stop or wait modes, power to the internal flash memory is automatically shut off. It is reconnected automatically when CPU operation is restored. Therefore, it is not particularly necessary to set flash memory control register 1.

Figure 30.2 shows a flowchart for setting/releasing the CPU rewrite mode. Figure 30.3 shows a flowchart for shifting to the low speed mode. Always perform operation as indicated in these flowcharts.

Flash memory control register 0

b7	b6	b5	b4	b3	b2	b1	b0
X	X		0				

Symbol	Address	When reset
FMR0	0377_{16}	$XX000001_2$

Bit symbol	Bit name	Function	R	W
FMR00	RY/$\overline{BY}$ status flag	0: Busy (being written or erased) 1: Ready	○	×
FMR01	CPU rewrite mode select bit (Note 1)	0: Normal mode (Software commands invalid) 1: CPU rewrite mode (Software commands acceptable)	○	○
FMR02	Lock bit disable bit (Note 2)	0: Block lock by lock bit data is enabled 1: Block lock by lock bit data is disabled	○	○
FMR03	Flash memory reset bit (Note 3)	0: Normal operation 1: Reset	○	○
Reserved bit		Must always be set to “0”	○	○
FMR05	User ROM area select bit (Note 4) (Effective in only boot mode)	0: Boot ROM area is accessed 1: User ROM area is accessed	○	○
Nothing is assigned. When write, set "0". When read, values are indeterminate.			—	—

Note 1: For this bit to be set to “1”, the user needs to write a “0” and then a “1” to it in succession. When it is not this procedure, it is not enacted in “1”. This is necessary to ensure that no interrupt or DMA transfer will be executed during the interval. Use the control program except in the internal flash memory for write to this bit. Also write to this bit when NMI pin is "H" level.

Note 2: For this bit to be set to “1”, the user needs to write a “0” and then a “1” to it in succession when the CPU rewrite mode select bit = “1”. When it is not this procedure, it is not enacted in “1”. This is necessary to ensure that no interrupt or DMA transfer will be executed during the interval.

Note 3: Effective only when the CPU rewrite mode select bit = 1. Set this bit to 0 subsequently after setting it to 1 (reset).

Note 4: Use the control program except in the internal flash memory for write to this bit.

Flash memory control register 1

b7	b6	b5	b4	b3	b2	b1	b0
0	0	0	0		0	0	0

Symbol	Address	When reset
FMR1	0376_{16}	$XXXX0XXX_2$

Bit symbol	Bit name	Function	R	W
Reserved bit		Must always be set to “0”	—	○
FMR13	Flash memory power supply-OFF bit (Note)	0: Flash memory power supply is connected 1: Flash memory power supply-off	○	○
Reserved bit		Must always be set to “0”	—	○

Note : For this bit to be set to “1”, the user needs to write a “0” and then a “1” to it in succession. When it is not this procedure, it is not enacted in “1”. This is necessary to ensure that no interrupt or DMA transfer will be executed during the interval. Use the control program except in the internal flash memory for write to this bit.
During parallel I/O mode,programming,erase or read of flash memory is not controlled by this bit,only by external pins.

Figure 30.1 Flash memory control registers

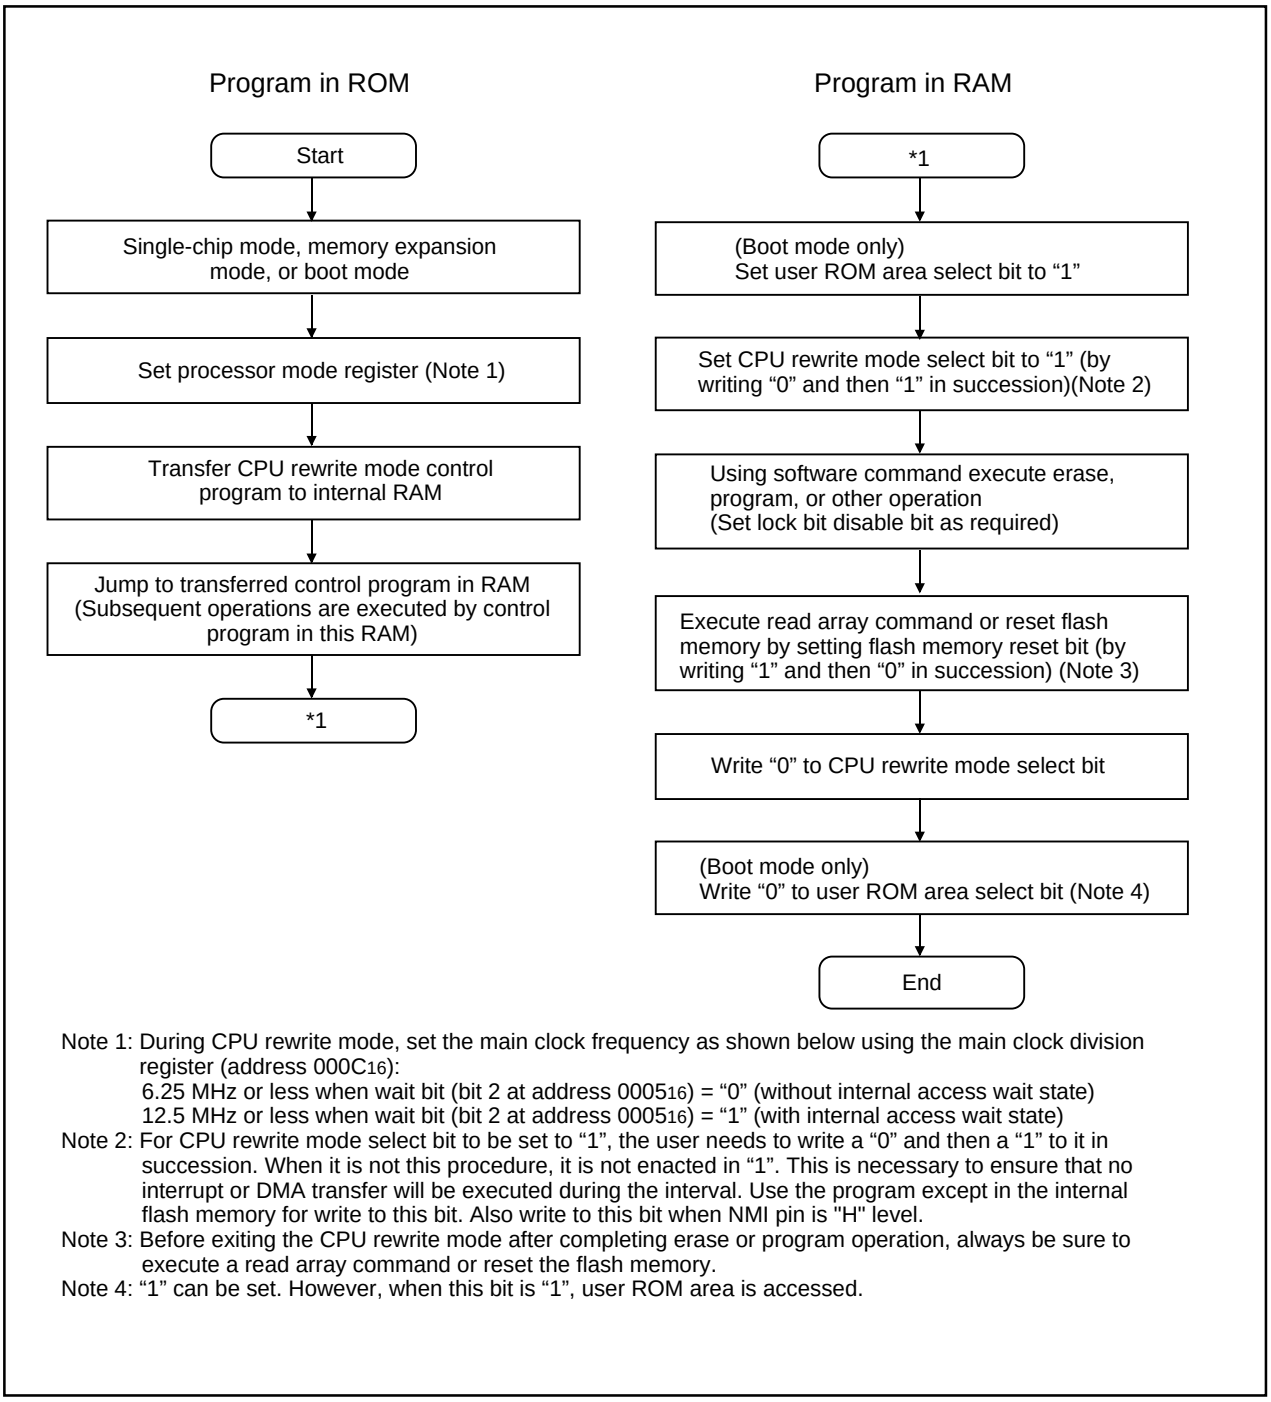

Note 1: During CPU rewrite mode, set the main clock frequency as shown below using the main clock division register (address $000C_{16}$):
6.25 MHz or less when wait bit (bit 2 at address 0005_{16}) = “0” (without internal access wait state)
12.5 MHz or less when wait bit (bit 2 at address 0005_{16}) = “1” (with internal access wait state)
Note 2: For CPU rewrite mode select bit to be set to “1”, the user needs to write a “0” and then a “1” to it in succession. When it is not this procedure, it is not enacted in “1”. This is necessary to ensure that no interrupt or DMA transfer will be executed during the interval. Use the program except in the internal flash memory for write to this bit. Also write to this bit when NMI pin is "H" level.
Note 3: Before exiting the CPU rewrite mode after completing erase or program operation, always be sure to execute a read array command or reset the flash memory.
Note 4: “1” can be set. However, when this bit is “1”, user ROM area is accessed.

Figure 30.2 CPU rewrite mode set/reset flowchart

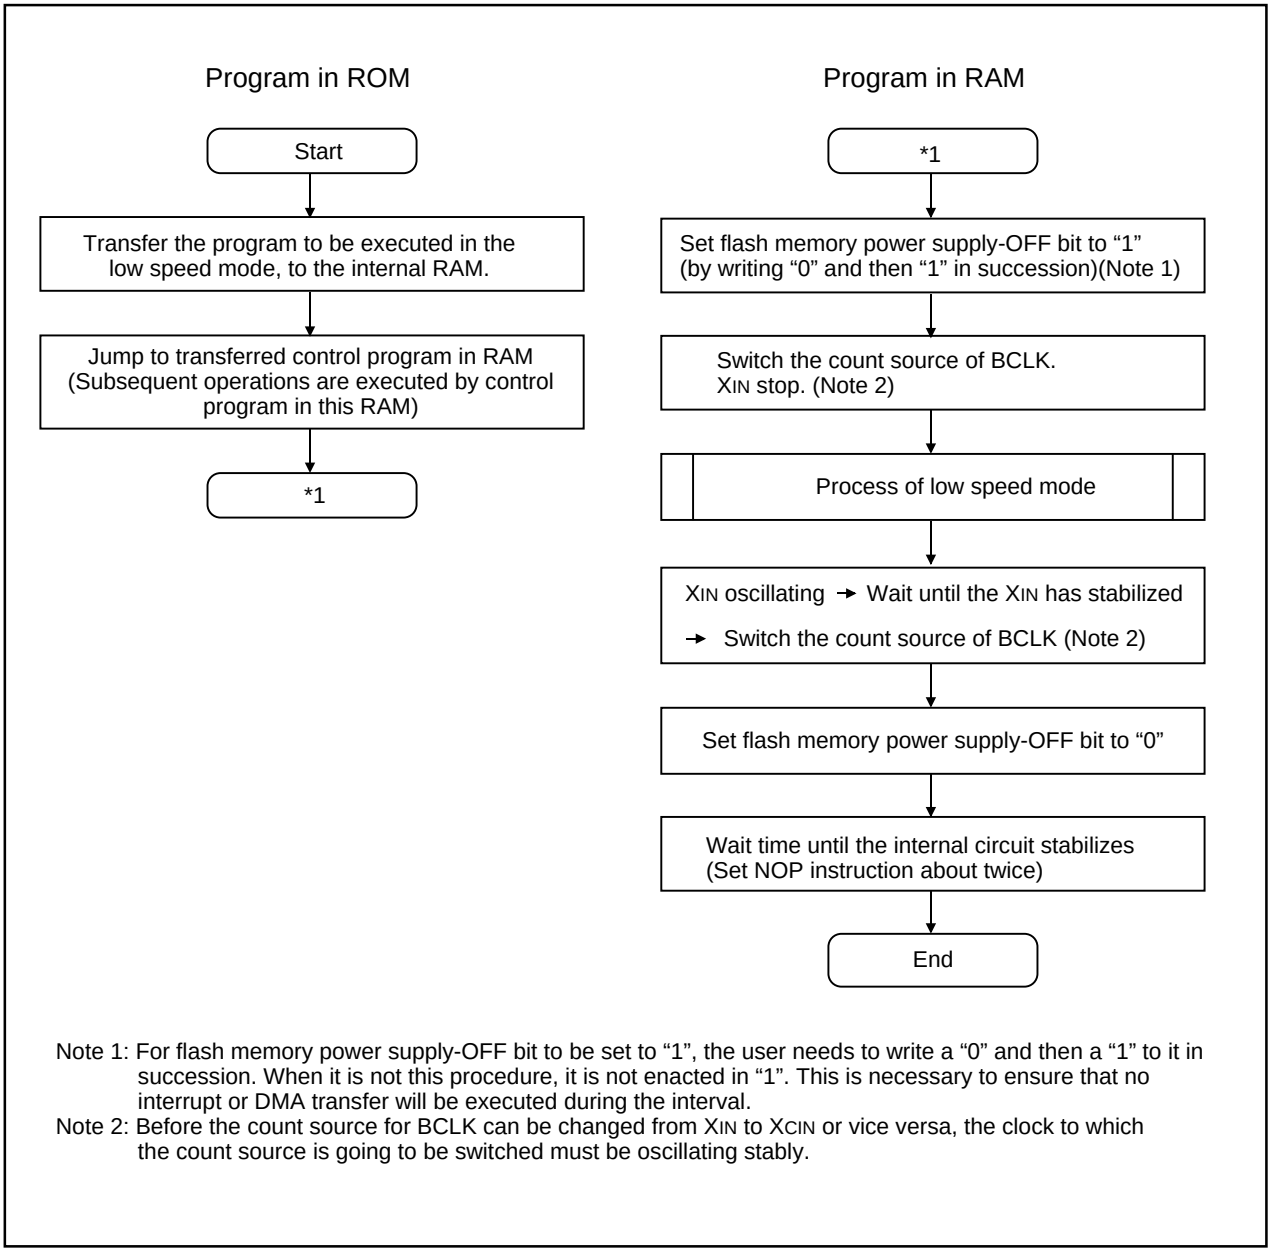

Note 1: For flash memory power supply-OFF bit to be set to “1”, the user needs to write a “0” and then a “1” to it in succession. When it is not this procedure, it is not enacted in “1”. This is necessary to ensure that no interrupt or DMA transfer will be executed during the interval.
Note 2: Before the count source for BCLK can be changed from XIN to XCIN or vice versa, the clock to which the count source is going to be switched must be oscillating stably.

Figure 30.3 Shifting to the low speed mode flowchart

Precautions on CPU Rewrite Mode

Described below are the precautions to be observed when rewriting the flash memory in CPU rewrite mode.

(1) Operation speed

During CPU rewrite mode, set the BCLK as shown below using the main clock division register (address $000C_{16}$):

6.25 MHz or less when wait bit (bit 2 at address 0005_{16}) = 0 (without internal access wait state)

12.5 MHz or less when wait bit (bit 2 at address 0005_{16}) = 1 (with internal access wait state)

(2) Instructions inhibited against use

The instructions listed below cannot be used during CPU rewrite mode because they refer to the internal data of the flash memory:

UND instruction, INTO instruction, JMPS instruction, JSRS instruction, and BRK instruction

(3) Interrupts inhibited against use

The address match interrupt cannot be used during CPU rewrite mode because they refer to the internal data of the flash memory. If interrupts have their vector in the variable vector table, they can be used by transferring the vector into the RAM area. The $\overline{\text{NMI}}$ and watchdog timer interrupts each can be used to change the CPU rewrite mode select bit forcibly to normal mode (FMR01="0") upon occurrence of the interrupt. Since the rewrite operation is halted when the $\overline{\text{NMI}}$ and watchdog timer interrupts occur, set the CPU rewite mode select bit to "1" and the erase/program operation needs to be performed over again.

(4) Reset

Reset input is always accepted.

(5) Access disable

Write CPU rewrite mode select bit, flash memory power supply-OFF bit and user ROM area select bit in an area other than the internal flash memory.

(6) How to access

For CPU rewrite mode select bit, lock bit disable bit, and flash memory power supply-OFF bit to be set to “1”, the user needs to write a “0” and then a “1” to it in succession. When it is not this procedure, it is not enacted in “1”. This is necessary to ensure that no interrupt or DMA transfer will be executed during the interval.

Write to the CPU rewrite mode select bit when NMI pin is "H" level.

(7)Writing in the user ROM area

If power is lost while rewriting blocks that contain the flash rewrite program with the CPU rewrite mode, those blocks may not be correctly rewritten and it is possible that the flash memory can no longer be rewritten after that. Therefore, it is recommended to use the standard serial I/O mode or parallel I/O mode to rewrite these blocks.

(8)Using the lock bit

To use the CPU rewrite mode, use a boot program that can set and cancel the lock command.

Software Commands

Table 30.1 lists the software commands available with the M16C/62A (flash memory version).

After setting the CPU rewrite mode select bit to 1, write a software command to specify an erase or program operation. Note that when entering a software command, the upper byte (D_8 to D_{15}) is ignored.

The content of each software command is explained below.

Table 30.1 List of software commands (CPU rewrite mode)

Command	First bus cycle			Second bus cycle			Third bus cycle		
	Mode	Address	Data (D_0 to D_7)	Mode	Address	Data (D_0 to D_7)	Mode	Address	Data (D_0 to D_7)
Read array	Write	X (Note 6)	FF_{16}						
Read status register	Write	X	70_{16}	Read	X (Note 6)	SRD (Note 2)			
Clear status register	Write	X	50_{16}						
Page program (Note 3)	Write	X	41_{16}	Write	WA0 (Note 3)	WD0 (Note 3)	Write	WA1	WD1
Block erase	Write	X	20_{16}	Write	BA (Note 4)	$D0_{16}$			
Erase all unlock block	Write	X	$A7_{16}$	Write	X	$D0_{16}$			
Lock bit program	Write	X	77_{16}	Write	BA	$D0_{16}$			
Read lock bit status	Write	X	71_{16}	Read	BA	D_6 (Note 5)			

Note 1: When a software command is input, the high-order byte of data (D_8 to D_{15}) is ignored.
Note 2: SRD = Status Register Data
Note 3: WA = Write Address, WD = Write Data
WA and WD must be set sequentially from 00_{16} to FE_{16} (byte address; however, an even address). The page size is 256 bytes.
Note 4: BA = Block Address (Enter the maximum address of each block that is an even address.)
Note 5: D_6 corresponds to the block lock status. Block not locked when D_6 = 1, block locked when D_6 = 0.
Note 6: X denotes a given address in the user ROM area (that is an even address).

Read Array Command (FF_{16})

The read array mode is entered by writing the command code "FF_{16}" in the first bus cycle. When an even address to be read is input in one of the bus cycles that follow, the content of the specified address is read out at the data bus (D_0–D_{15}), 16 bits at a time.

The read array mode is retained intact until another command is written.

Read Status Register Command (70_{16})

When the command code "70_{16}" is written in the first bus cycle, the content of the status register is read out at the data bus (D_0–D_7) by a read in the second bus cycle. (Set an address to even address in the user ROM area).

The status register is explained in the next section.

Clear Status Register Command (50_{16})

This command is used to clear the bits SR3 to 5 of the status register after they have been set. These bits indicate that operation has ended in an error. To use this command, write the command code "50_{16}" in the first bus cycle.

Page Program Command (41$_{16}$)

Page program allows for high-speed programming in units of 256 bytes. Page program operation starts when the command code "41$_{16}$" is written in the first bus cycle. In the second bus cycle through the 129th bus cycle, the write data is sequentially written 16 bits at a time. At this time, the addresses A$_0$-A$_7$ need to be incremented by 2 from "00$_{16}$" to "FE$_{16}$." When the system finishes loading the data, it starts an auto write operation (data program and verify operation).

Whether the auto write operation is completed can be confirmed by reading the status register or the flash memory control register 0. At the same time the auto write operation starts, the read status register mode is automatically entered, so the content of the status register can be read out. The status register bit 7 (SR7) is set to 0 at the same time the auto write operation starts and is returned to 1 upon completion of the auto write operation. In this case, the read status register mode remains active until the Read Array command (FF$_{16}$) or Read Lock Bit Status command (71$_{16}$) is written or the flash memory is reset using its reset bit.

The RY/$\overline{BY}$ status flag of the flash memory control register 0 is 0 during auto write operation and 1 when the auto write operation is completed as is the status register bit 7.

After the auto write operation is completed, the status register can be read out to know the result of the auto write operation. For details, refer to the section where the status register is detailed.

Figure 30.4 shows an example of a page program flowchart.

Each block of the flash memory can be write protected by using a lock bit. For details, refer to the section where the data protect function is detailed.

Additional writes to the already programmed pages are prohibited.

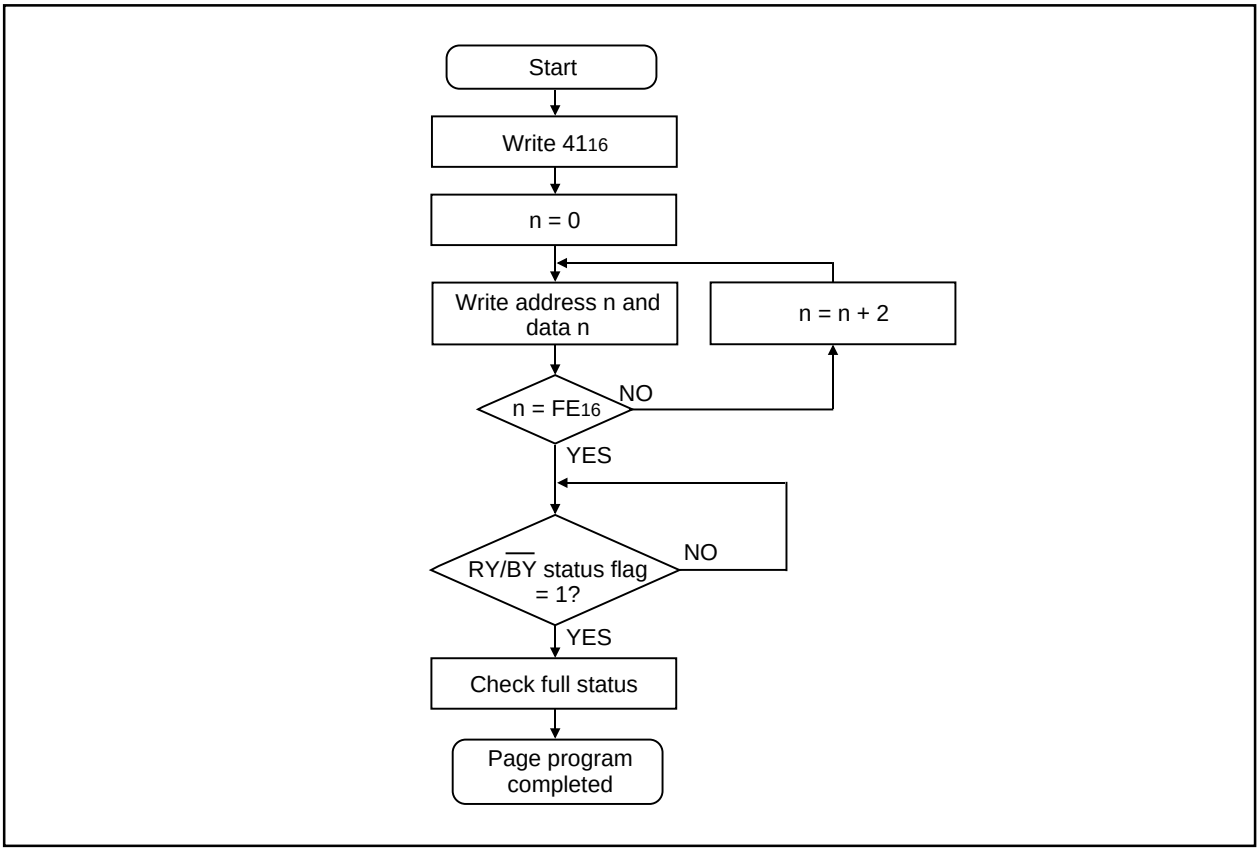

Figure 30.4 Page program flowchart

Block Erase Command (20_{16}/$D0_{16}$)

By writing the command code "20_{16}" in the first bus cycle and the confirmation command code "$D0_{16}$" in the second bus cycle that follows to the block address of a flash memory block, the system initiates an auto erase (erase and erase verify) operation.

Whether the auto erase operation is completed can be confirmed by reading the status register or the flash memory control register 0. At the same time the auto erase operation starts, the read status register mode is automatically entered, so the content of the status register can be read out. The status register bit 7 (SR7) is set to 0 at the same time the auto erase operation starts and is returned to 1 upon completion of the auto erase operation. In this case, the read status register mode remains active until the Read Array command (FF_{16}) or Read Lock Bit Status command (71_{16}) is written or the flash memory is reset using its reset bit.

The RY/$\overline{BY}$ status flag of the flash memory control register 0 is 0 during auto erase operation and 1 when the auto erase operation is completed as is the status register bit 7.

After the auto erase operation is completed, the status register can be read out to know the result of the auto erase operation. For details, refer to the section where the status register is detailed.

Figure 30.5 shows an example of a block erase flowchart.

Each block of the flash memory can be protected against erasure by using a lock bit. For details, refer to the section where the data protect function is detailed.

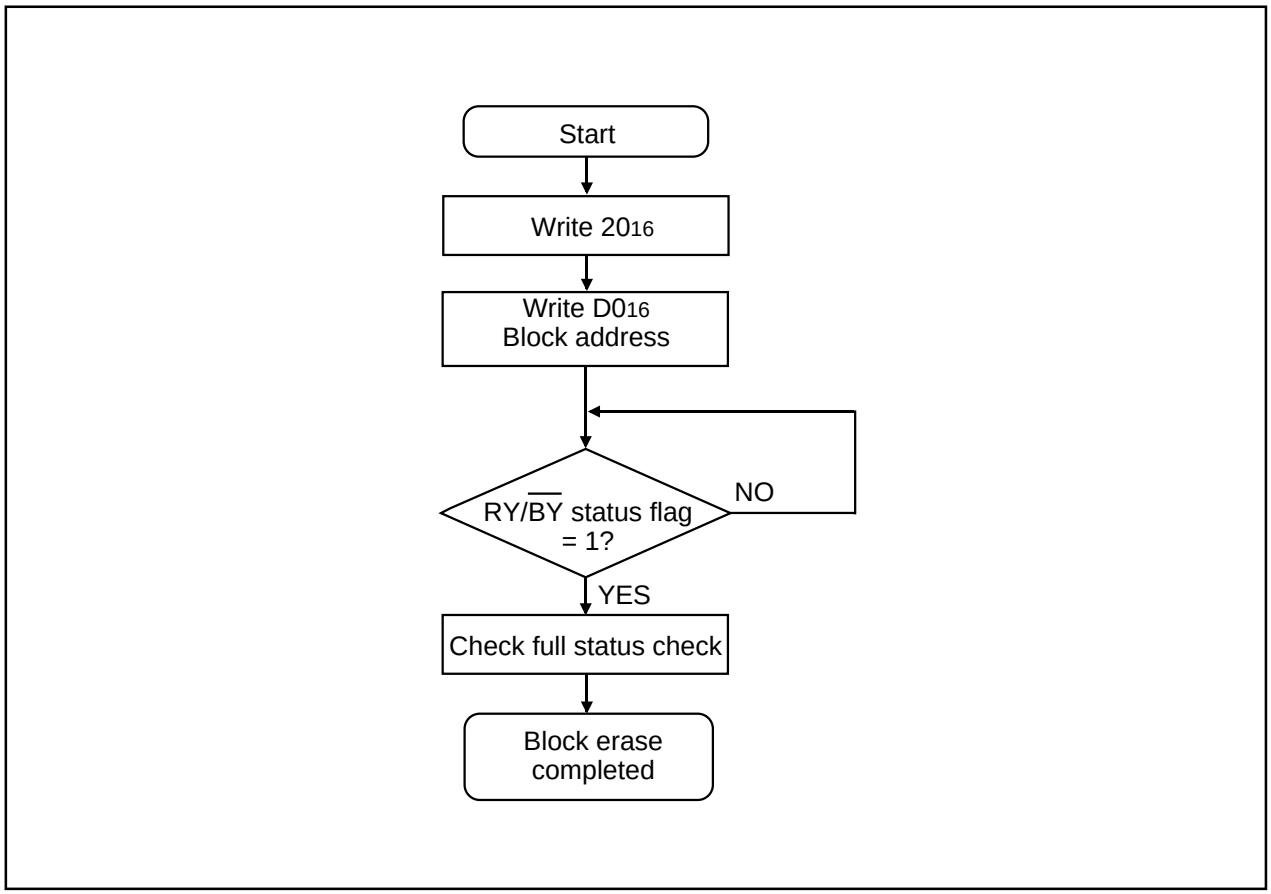

Figure 30.5 Block erase flowchart

Erase All Unlock Blocks Command ($A7_{16}/D0_{16}$)

By writing the command code "$A7_{16}$" in the first bus cycle and the confirmation command code "$D0_{16}$" in the second bus cycle that follows, the system starts erasing blocks successively.

Whether the erase all unlock blocks command is terminated can be confirmed by reading the status register or the flash memory control register 0, in the same way as for block erase. Also, the status register can be read out to know the result of the auto erase operation.

When the lock bit disable bit of the flash memory control register 0 = 1, all blocks are erased no matter how the lock bit is set. On the other hand, when the lock bit disable bit = 0, the function of the lock bit is effective and only nonlocked blocks (where lock bit data = 1) are erased.

Lock Bit Program Command ($77_{16}/D0_{16}$)

By writing the command code "77_{16}" in the first bus cycle and the confirmation command code "$D0_{16}$" in the second bus cycle that follows to the block address of a flash memory block, the system sets the lock bit for the specified block to 0 (locked).

Figure 30.6 shows an example of a lock bit program flowchart. The status of the lock bit (lock bit data) can be read out by a read lock bit status command.

Whether the lock bit program command is terminated can be confirmed by reading the status register or the flash memory control register 0, in the same way as for page program.

For details about the function of the lock bit and how to reset the lock bit, refer to the section where the data protect function is detailed.

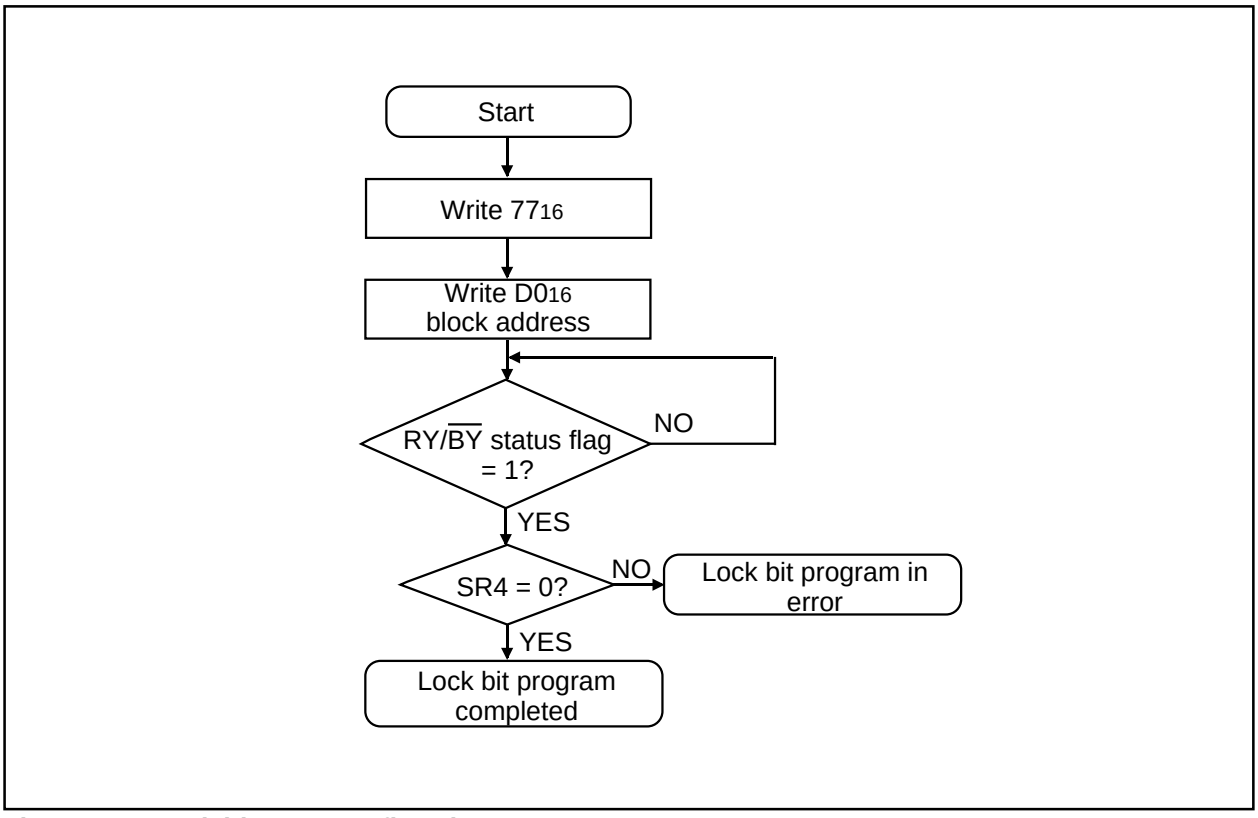

Figure 30.6 Lock bit program flowchart

Read Lock Bit Status Command (7116)

By writing the command code "7116" in the first bus cycle and then the block address of a flash memory block in the second bus cycle that follows, the system reads out the status of the lock bit of the specified block on to the data (D6).

Figure 30.7 shows an example of a read lock bit program flowchart.

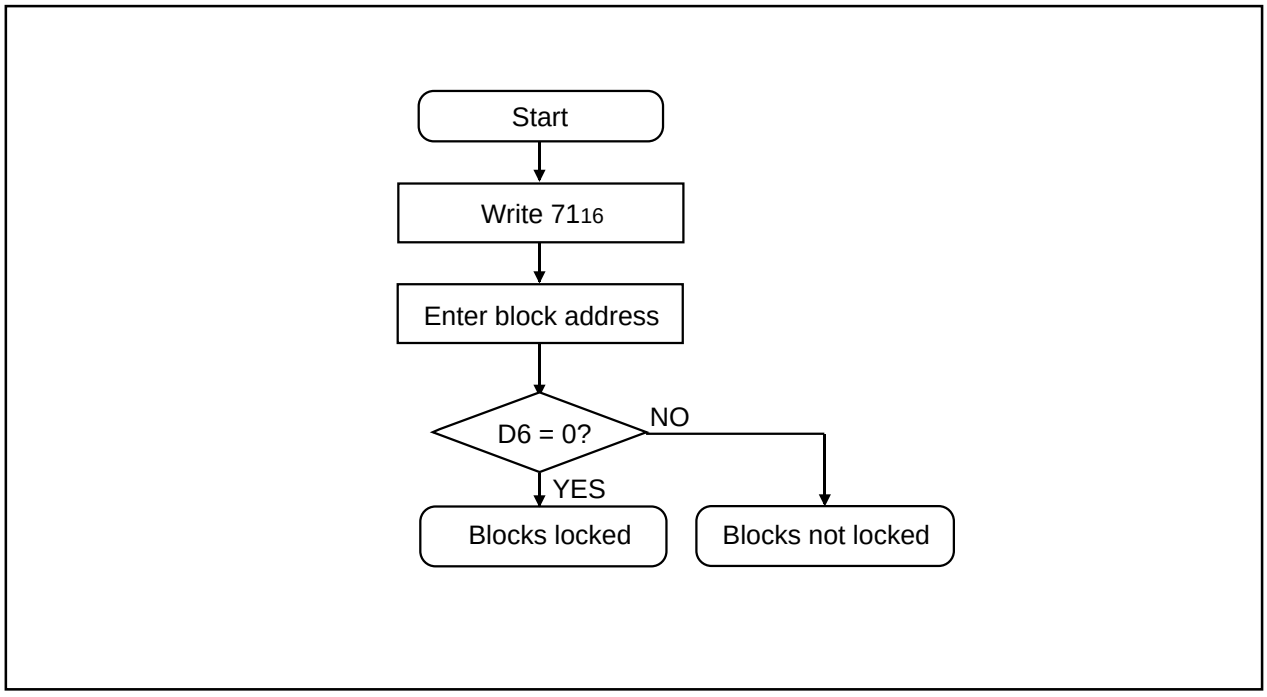

Figure 30.7 Read lock bit status flowchart

Data Protect Function (Block Lock)

Each block in Figure 29.3 has a nonvolatile lock bit to specify that the block be protected (locked) against erase/write. The lock bit program command is used to set the lock bit to 0 (locked). The lock bit of each block can be read out using the read lock bit status command.

Whether block lock is enabled or disabled is determined by the status of the lock bit and how the flash memory control register 0's lock bit disable bit is set.

(1) When the lock bit disable bit = 0, a specified block can be locked or unlocked by the lock bit status (lock bit data). Blocks whose lock bit data = 0 are locked, so they are disabled against erase/write. On the other hand, the blocks whose lock bit data = 1 are not locked, so they are enabled for erase/write.

(2) When the lock bit disable bit = 1, all blocks are nonlocked regardless of the lock bit data, so they are enabled for erase/write. In this case, the lock bit data that is 0 (locked) is set to 1 (nonlocked) after erasure, so that the lock bit-actuated lock is removed.

Status Register

The status register indicates the operating status of the flash memory and whether an erase or program operation has terminated normally or in an error. The content of this register can be read out by only writing the read status register command (70_{16}). Table 30.2 details the status register.

The status register is cleared by writing the Clear Status Register command (50_{16}).

After a reset, the status register is set to "80_{16}."

Each bit in this register is explained below.

Write state machine (WSM) status (SR7)

After power-on, the write state machine (WSM) status is set to 1.

The write state machine (WSM) status indicates the operating status of the device, as for output on the RY/$\overline{BY}$ pin. This status bit is set to 0 during auto write or auto erase operation and is set to 1 upon completion of these operations.

Erase status (SR5)

The erase status informs the operating status of auto erase operation to the CPU. When an erase error occurs, it is set to 1.

The erase status is reset to 0 when cleared.

Program status (SR4)

The program status informs the operating status of auto write operation to the CPU. When a write error occurs, it is set to 1.

The program status is reset to 0 when cleared.

When an erase command is in error (which occurs if the command entered after the block erase command (20_{16}) is not the confirmation command ($D0_{16}$), both the program status and erase status (SR5) are set to 1.

When the program status or erase status = 1, the following commands entered by command write are not accepted.

Also, in one of the following cases, both SR4 and SR5 are set to 1 (command sequence error):

(1) When the valid command is not entered correctly

(2) When the data entered in the second bus cycle of lock bit program (77_{16}/$D0_{16}$), block erase (20_{16}/$D0_{16}$), or erase all unlock blocks ($A7_{16}$/$D0_{16}$) is not the $D0_{16}$ or FF_{16}. However, if FF_{16} is entered, read array is assumed and the command that has been set up in the first bus cycle is canceled.

Block status after program (SR3)

If excessive data is written (phenomenon whereby the memory cell becomes depressed which results in data not being read correctly), “1” is set for the program status after-program at the end of the page write operation. In other words, when writing ends successfully, “80_{16}” is output; when writing fails, “90_{16}” is output; and when excessive data is written, “88_{16}” is output.

Table 30.2 Definition of each bit in status register

Each bit of SRD	Status name	Definition	
		"1"	"0"
SR7 (bit7)	Write state machine (WSM) status	Ready	Busy
SR6 (bit6)	Reserved	-	-
SR5 (bit5)	Erase status	Terminated in error	Terminated normally
SR4 (bit4)	Program status	Terminated in error	Terminated normally
SR3 (bit3)	Block status after program	Terminated in error	Terminated normally
SR2 (bit2)	Reserved	-	-
SR1 (bit1)	Reserved	-	-
SR0 (bit0)	Reserved	-	-

Full Status Check

By performing full status check, it is possible to know the execution results of erase and program operations. Figure 30.8 shows a full status check flowchart and the action to be taken when each error occurs.

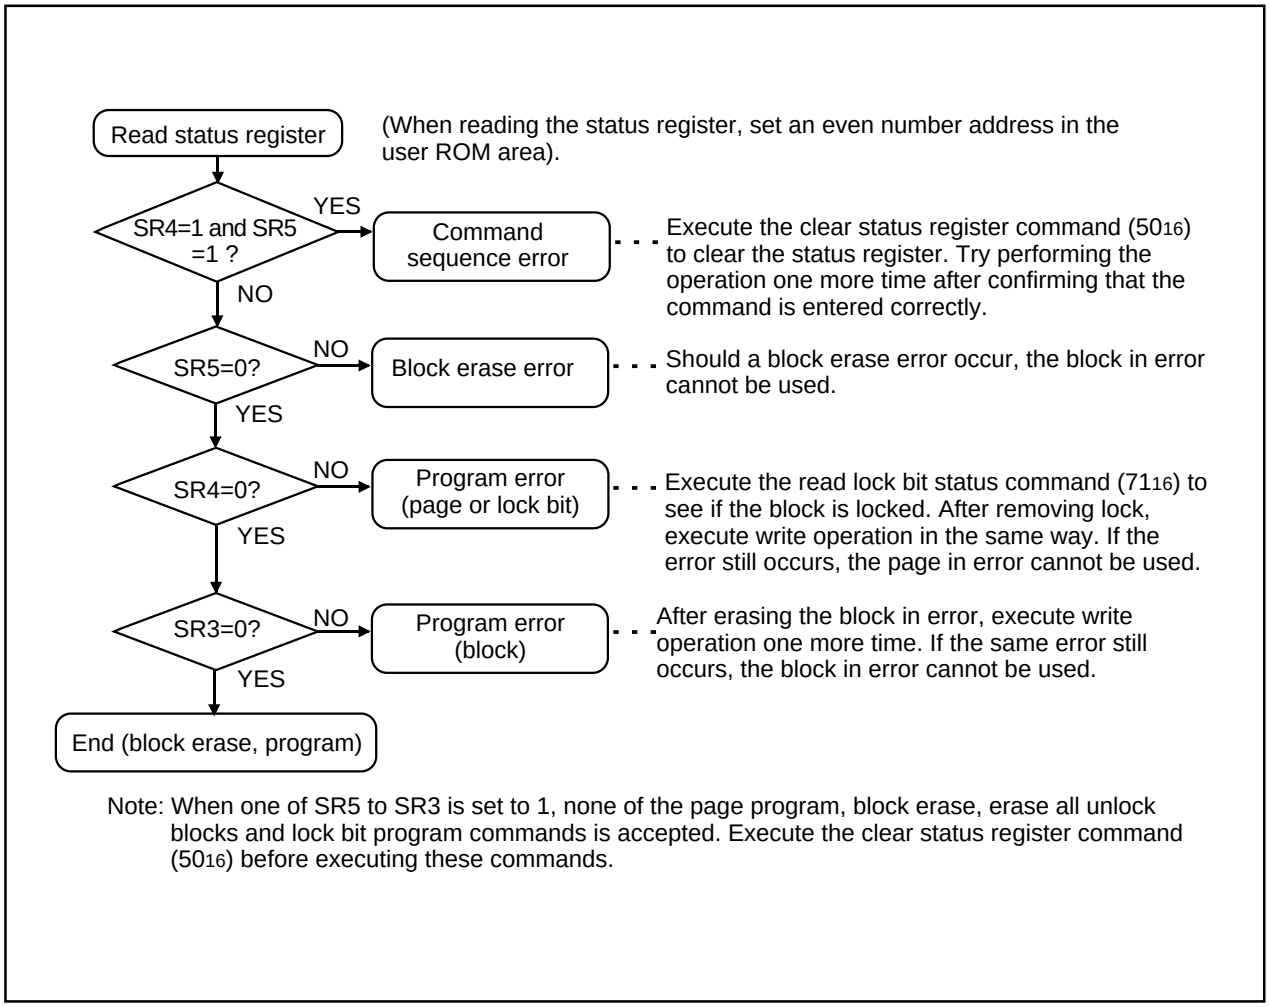

Note: When one of SR5 to SR3 is set to 1, none of the page program, block erase, erase all unlock blocks and lock bit program commands is accepted. Execute the clear status register command (50_{16}) before executing these commands.

Figure 30.8 Full status check flowchart and remedial procedure for errors

Functions To Prevent the Flash Memory from Rewriting

To prevent the contents of the flash memory version from being read out or rewritten easily, the device incorporates a ROM code protect function for use in parallel I/O mode and an ID code verify function for use in standard serial I/O mode.

ROM code protect function

The ROM code protect function reading out or modifying the contents of the flash memory version by using the ROM code protect control address (0FFFFFF16) during parallel I/O mode. Figure 30.9 shows the ROM code protect control address (0FFFFFF16). (This address exists in the user ROM area.)

If one of the pair of ROM code protect bits is set to 0, ROM code protect is turned on, so that the contents of the flash memory version are protected against readout and modification.

If both of the two ROM code protect reset bits are set to “00,” ROM code protect is turned off, so that the contents of the flash memory version can be read out or modified. Once ROM code protect is turned on, the contents of the ROM code protect reset bits cannot be modified in parallel I/O mode. Use the serial I/O or some other mode to rewrite the contents of the ROM code protect reset bits.

ROM Code Protect Control Address(5)



Symbol: ROMCP
Address: FFFFFF16
Factory Setting: FF16(4)

Bit Symbol	Bit Name	Function	RW
——— (b5 - b0)	Reserved Bit	Set to "1"	RW
ROMCP1	ROM Code Protect Level 1 Set Bit(1, 2, 3, 4)	b7 b6 0 0 : ROM code protection active 0 1 : ROM code protection active 1 0 : ROM code protection active 1 1 : ROM code protection inactive	RW

NOTES:
1. When the ROM code protection is active by the ROMCP1 bit setting, the flash memory is protected against reading or rewriting in parallel I/O mode.
2. Set the bit 5 to bit 0 to "1111112" when the ROMCP1 bit is set to a value other than "112". If the bit 5 to bit 0 are set to values other than "1111112", the ROM code protection may not become active by setting the ROMCP1 bit to a value other than "112".
3. To make the ROM code protection inactive, erase a block including the ROMCP address in standard serial I/O mode or CPU rewrite mode.
4. The ROMCP address is set to "FF16" when a block, including the ROMCP address, is erased.
5. When a value of the ROMCP address is "0016" or "FF16", the ROM code protect function is disabled.

Figure 30.9 ROM code protect control address

ID Code Verify Function

Use this function in standard serial I/O mode. When the contents of the flash memory are not blank, the ID code sent from the peripheral unit is compared with the ID code written in the flash memory to see if they match. If the ID codes do not match, the commands sent from the peripheral unit are not accepted. The ID code consists of 8-bit data, the areas of which, beginning with the first byte, are $0FFFFDF_{16}$, $0FFFFE3_{16}$, $0FFFFEB_{16}$, $0FFFFEF_{16}$, $0FFFFF3_{16}$, $0FFFFF7_{16}$, and $0FFFFFB_{16}$. Write a program which has had the ID code preset at these addresses to the flash memory.

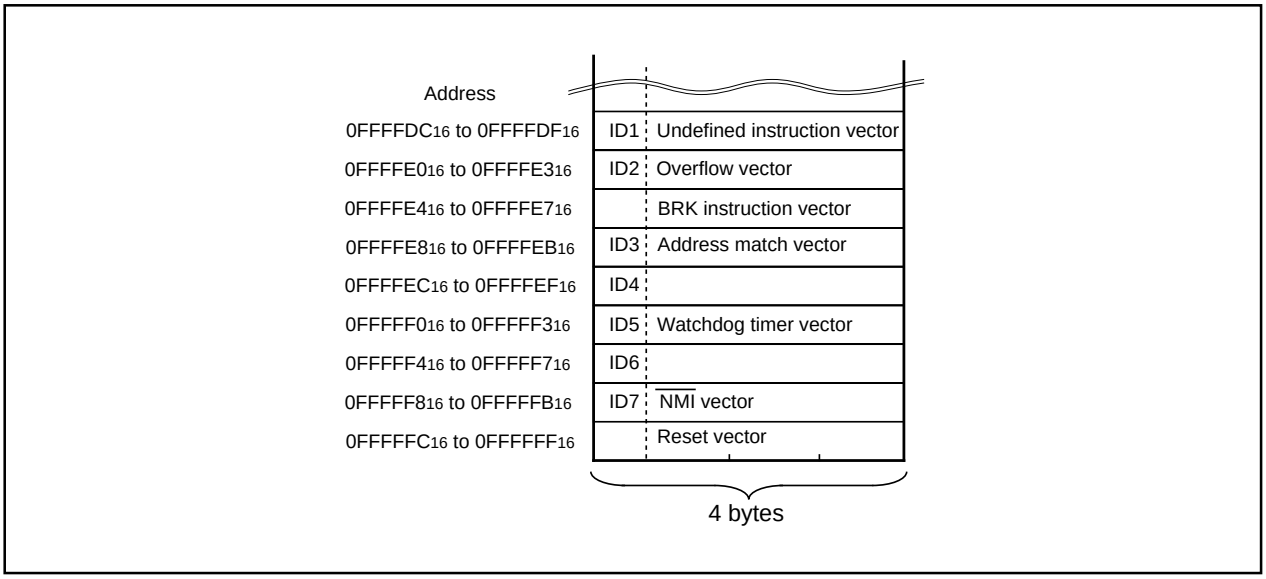

Figure 30.10 ID code store addresses

31. Parallel I/O Mode

Use an exclusive programer supporting M16C/80 (flash memory version).
Refer to the instruction manual of each programer maker for the details of use.

User ROM and Boot ROM Areas

In parallel I/O mode, the user ROM and boot ROM areas shown in Figure 29.3 can be rewritten. Both areas of flash memory can be operated on in the same way.

Program and block erase operations can be performed in the user ROM area. The user ROM area and its blocks are shown in Figure 29.3.

The boot ROM area is 8 Kbytes in size. In parallel I/O mode, it is located at addresses $0FFE000_{16}$ through $0FFFFFF_{16}$. Make sure program and block erase operations are always performed within this address range. (Access to any location outside this address range is prohibited.)

In the boot ROM area, an erase block operation is applied to only one 8 Kbyte block. The boot ROM area has had a standard serial I/O mode control program stored in it when shipped from the factory.

Therefore, using the device in standard serial input/output mode, you do not need to write to the boot ROM area.

Pin functions (Flash memory standard serial I/O mode)

Pin	Name	I/O	Description
VCC,VSS	Power input		Apply 4.2V to 5.5V to Vcc pin and 0 V to Vss pin.
CNVSS	CNVSS	I	Connect to Vcc pin.
$\overline{\text{RESET}}$	Reset input	I	Reset input pin. While reset is "L" level, a 20 cycle or longer clock must be input to XIN pin.
XIN	Clock input	I	Connect a ceramic resonator or crystal oscillator between XIN and XOUT pins. To input an externally generated clock, input it to XIN pin and open XOUT pin.
XOUT	Clock output	O	
BYTE	BYTE	I	Connect this pin to Vcc or Vss.
AVCC, AVSS	Analog power supply input	I	Connect AVSS to Vss and AVcc to Vcc, respectively.
VREF	Reference voltage input	I	Enter the reference voltage for A/D converter from this pin.
P00 to P07	Input port P0	I	Input "H" or "L" level signal or open.
P10 to P17	Input port P1	I	Input "H" or "L" level signal or open.
P20 to P27	Input port P2	I	Input "H" or "L" level signal or open.
P30 to P37	Input port P3	I	Input "H" or "L" level signal or open.
P40 to P47	Input port P4	I	Input "H" or "L" level signal or open.
P51 to P54, P56, P57	Input port P5	I	Input "H" or "L" level signal or open.
P50	$\overline{\text{CE}}$ input	I	Input "H" level signal.
P55	$\overline{\text{EPM}}$ input	I	Input "L" level signal.
P60 to P63	Input port P6	I	Input "H" or "L" level signal or open.
P64	BUSY output	O	Standard serial mode 1: BUSY signal output pin Standard serial mode 2: Monitors the program operation check
P65	SCLK input	I	Standard serial mode 1: Serial clock input pin Standard serial mode 2: Input "L" level signal.
P66	RxD input	I	Serial data input pin
P67	TxD output	O	Serial data output pin
P70 to P77	Input port P7	I	Input "H" or "L" level signal or open.
P80 to P84, P86, P87	Input port P8	I	Input "H" or "L" level signal or open.
P85	$\overline{\text{NMI}}$ input	I	Connect this pin to Vcc.
P90 to P97	Input port P9	I	Input "H" or "L" level signal or open.
P100 to P107	Input port P10	I	Input "H" or "L" level signal or open.
P110 to P114	Input port P11	I	Input "H" or "L" level signal or open. (Note)
P120 to P127	Input port P12	I	Input "H" or "L" level signal or open. (Note)
P130 to P137	Input port P13	I	Input "H" or "L" level signal or open. (Note)
P140 to P146	Input port P14	I	Input "H" or "L" level signal or open. (Note)
P150 to P157	Input port P15	I	Input "H" or "L" level signal or open. (Note)

Note: Port P11 to P15 exist in 144-pin version.

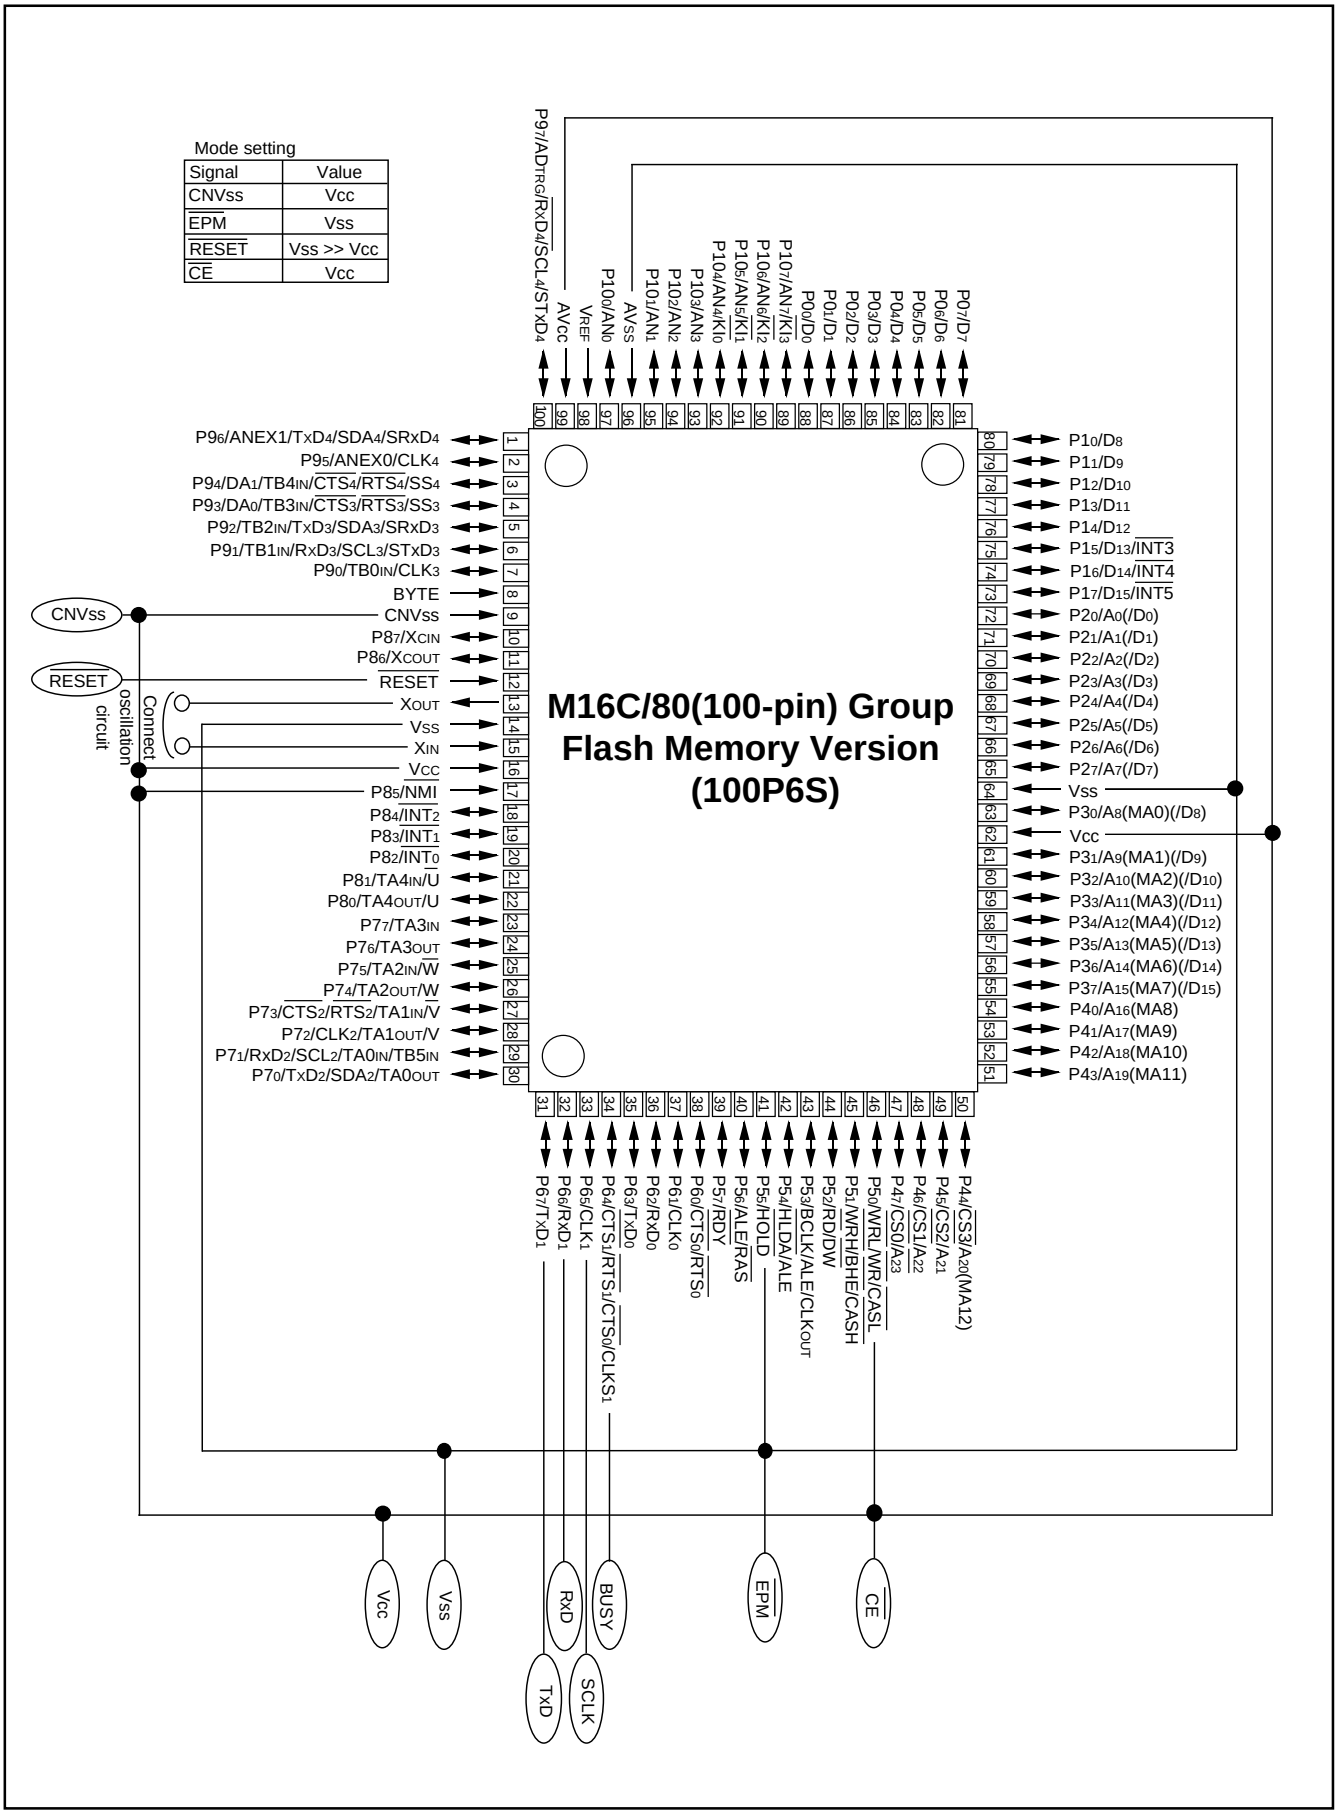

Figure 31.1 Pin connections for standard serial I/O mode (1)

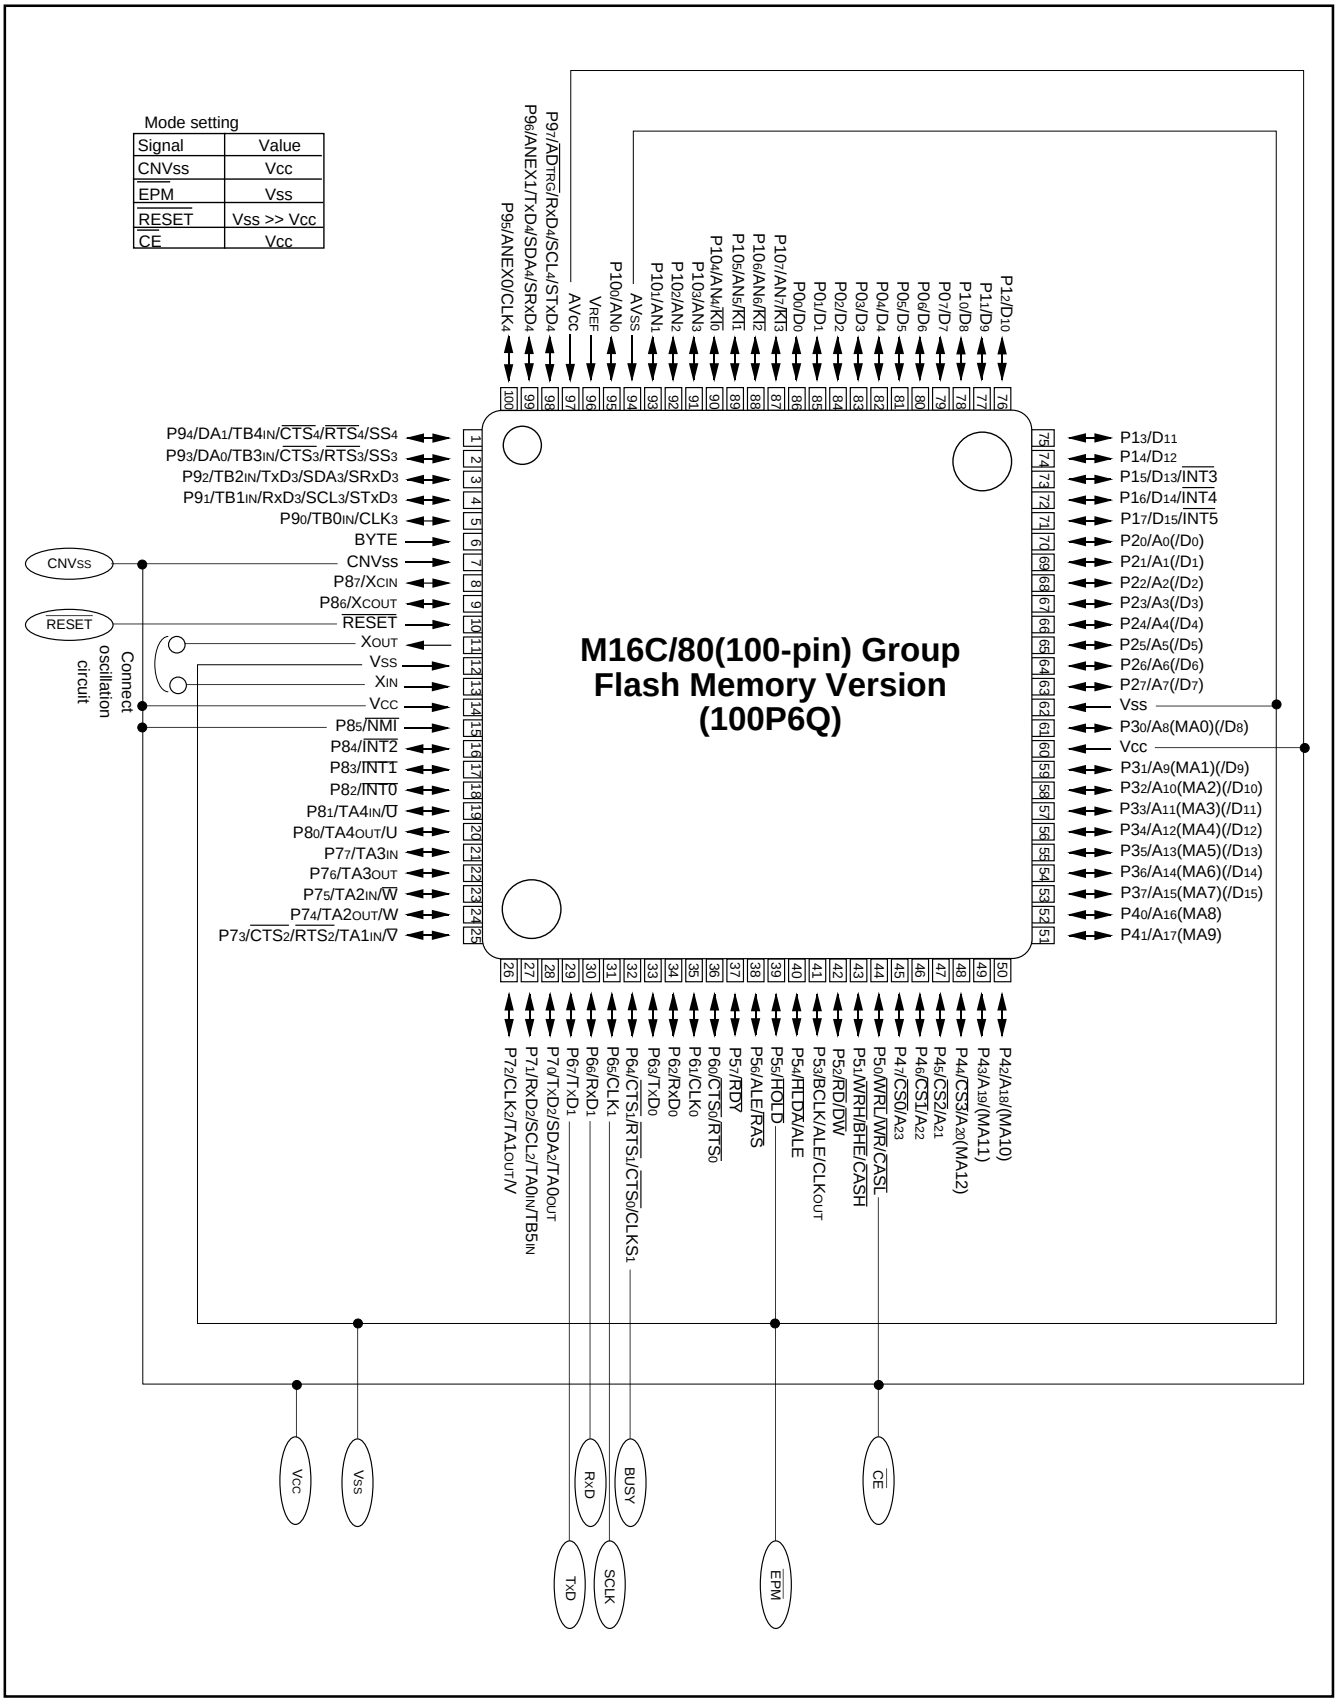

Figure 31.2 Pin connections for standard serial I/O mode (2)

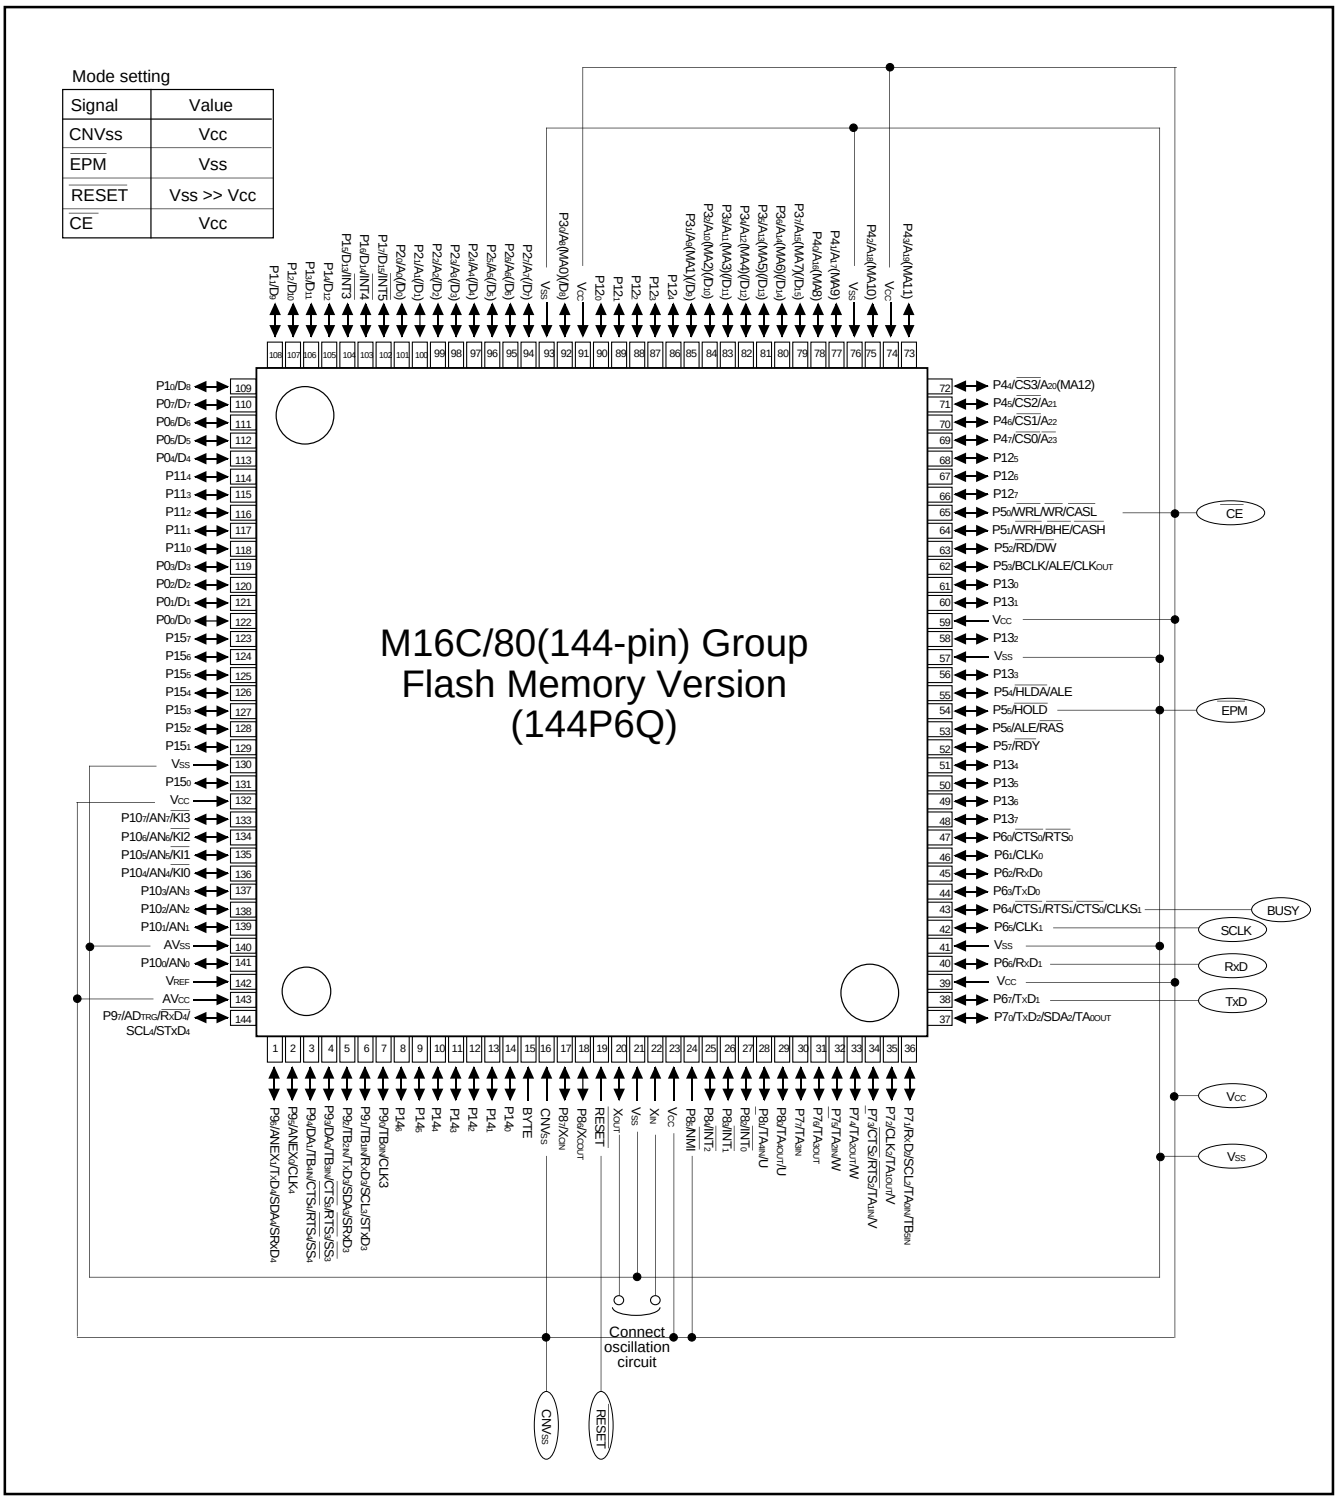

Figure 31.3 Pin connections for standard serial I/O mode (3)

32. Standard serial I/O mode

The standard serial I/O mode inputs and outputs the software commands, addresses and data needed to operate (read, program, erase, etc.) the internal flash memory. This I/O is serial. There are actually two standard serial I/O modes: mode 1, which is clock synchronized, and mode 2, which is asynchronized. Both modes require a purpose-specific peripheral unit.

The standard serial I/O mode is different from the parallel I/O mode in that the CPU controls flash memory rewrite (uses the CPU's rewrite mode), rewrite data input and so forth. It is started when the reset is released, which is done when the $P5_0$ ($\overline{CE}$) pin is "H" level, the $P5_5$ ($\overline{EPM}$) pin "L" level and the CNVss pin "H" level. (In the ordinary command mode, set CNVss pin to "L" level.)
This control program is written in the boot ROM area when the product is shipped from the factory. Accordingly, make note of the fact that the standard serial I/O mode cannot be used if the boot ROM area is rewritten in the parallel I/O mode. Figures 31.1 and 31.3 show the pin connections for the standard serial I/O mode. Serial data I/O uses UART1 and transfers the data serially in 8-bit units. Standard serial I/O switches between mode 1 (clock synchronized) and mode 2 (clock asynchronized) according to the level of CLK_1 pin when the reset is released.

To use standard serial I/O mode 1 (clock synchronized), set the CLK_1 pin to "H" level and release the reset. The operation uses the four UART1 pins CLK_1, RxD_1, TxD_1 and RTS_1 (BUSY). The CLK_1 pin is the transfer clock input pin through which an external transfer clock is input. The TxD_1 pin is for CMOS output. The RTS_1 (BUSY) pin outputs an "L" level when ready for reception and an "H" level when reception starts.

To use standard serial I/O mode 2 (clock asynchronized), set the CLK_1 pin to "L" level and release the reset. The operation uses the two UART1 pins RxD_1 and TxD_1.

In the standard serial I/O mode, only the user ROM area indicated in Figure 32.17can be rewritten. The boot ROM cannot.
In the standard serial I/O mode, a 7-byte ID code is used. When there is data in the flash memory, commands sent from the peripheral unit (programmer) are not accepted unless the ID code matches.

32.1 Overview of standard serial I/O mode 1 (clock synchronized)

In standard serial I/O mode 1, software commands, addresses and data are input and output between the MCU and peripheral units (serial programer, etc.) using 4-wire clock-synchronized serial I/O (UART1).
Standard serial I/O mode 1 is engaged by releasing the reset with the $P6_5$ (CLK_1) pin "H" level.
In reception, software commands, addresses and program data are synchronized with the rise of the transfer clock that is input to the CLK_1 pin, and are then input to the MCU via the RxD_1 pin. In transmission, the read data and status are synchronized with the fall of the transfer clock, and output from the TxD_1 pin.
The TxD_1 pin is for CMOS output. Transfer is in 8-bit units with LSB first.
When busy, such as during transmission, reception, erasing or program execution, the RTS_1 (BUSY) pin is "H" level. Accordingly, always start the next transfer after the RST_1 (BUSY) pin is "L" level.
Also, data and status registers in memory can be read after inputting software commands. Status, such as the operating state of the flash memory or whether a program or erase operation ended successfully or not, can be checked by reading the status register. Here following are explained software commands, status registers, etc.

Software Commands

Table 31.1 lists software commands. In the standard serial I/O mode 1, erase operations, programs and reading are controlled by transferring software commands via the RxD1 pin. Software commands are explained here below.

Table 32.1 Software commands (Standard serial I/O mode 1)

	Control command	1st byte transfer	2nd byte	3rd byte	4th byte	5th byte	6th byte		When ID is not verified
1	Page read	FF_{16}	Address (middle)	Address (high)	Data output	Data output	Data output	Data output to 259th byte	Not acceptable
2	Page program	41_{16}	Address (middle)	Address (high)	Data input	Data input	Data input	Data input to 259th byte	Not acceptable
3	Block erase	20_{16}	Address (middle)	Address (high)	$D0_{16}$				Not acceptable
4	Erase all unlocked blocks	$A7_{16}$	$D0_{16}$						Not acceptable
5	Read status register	70_{16}	SRD output	SRD1 output					Acceptable
6	Clear status register	50_{16}							Not acceptable
7	Read lock bit status	71_{16}	Address (middle)	Address (high)	Lock bit data output				Not acceptable
8	Lock bit program	77_{16}	Address (middle)	Address (high)	$D0_{16}$				Not acceptable
9	Lock bit enable	$7A_{16}$							Not acceptable
10	Lock bit disable	75_{16}							Not acceptable
11	Code processing function	$F5_{16}$	Address (low)	Address (middle)	Address (high)	ID size	ID1	To ID7	Acceptable
12	Download function	FA_{16}	Size (low)	Size (high)	Check-sum	Data input	To required number of times		Not acceptable
13	Version data output function	FB_{16}	Version data output	Version data output	Version data output	Version data output	Version data output	Version data output to 9th byte	Acceptable
14	Boot ROM area output function	FC_{16}	Address (middle)	Address (high)	Data output	Data output	Data output	Data output to 259th byte	Not acceptable
15	Read check data	FD_{16}	Check data (low)	Check data (high)					Not acceptable

Note 1: Shading indicates transfer from flash memory microcomputer to peripheral unit. All other data is transferred from the peripheral unit to the flash memory microcomputer.

Note 2: SRD refers to status register data. SRD1 refers to status register data1 .

Note 3: All commands can be accepted when the flash memory is totally blank.

Page Read Command

This command reads the specified page (256 bytes) in the flash memory sequentially one byte at a time. Execute the page read command as explained here following.

(1) Transfer the "FF_{16}" command code with the 1st byte.

(2) Transfer addresses A_8 to A_{15} and A_{16} to A_{23} with the 2nd and 3rd bytes respectively.

(3) From the 4th byte onward, data (D_0–D_7) for the page (256 bytes) specified with addresses A_8 to A_{23} will be output sequentially from the smallest address first in sync with the rise of the clock.

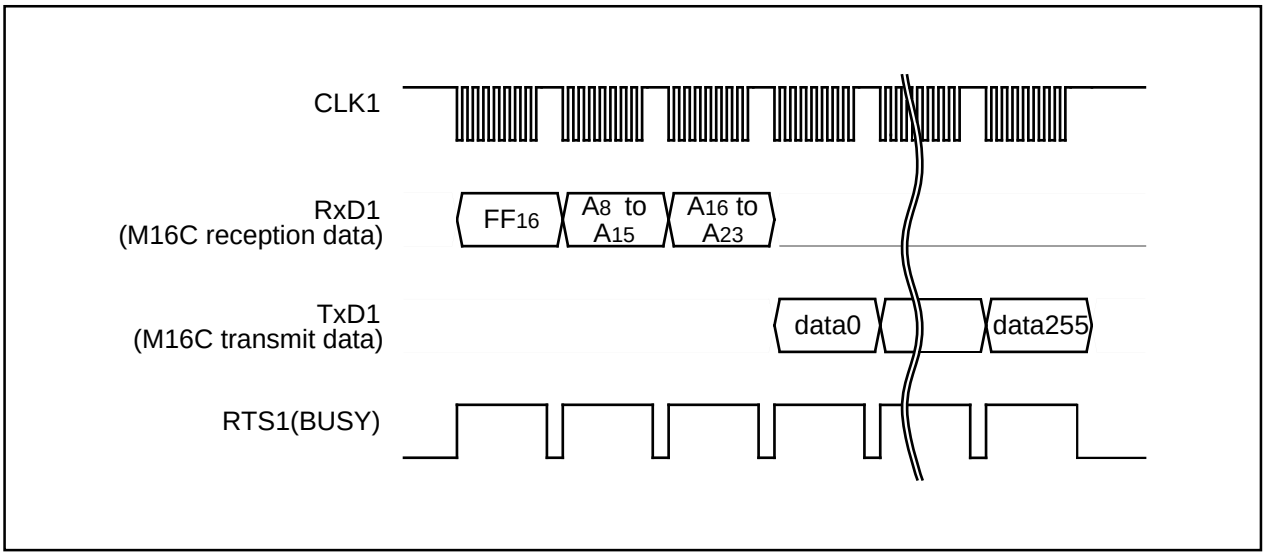

Figure 32.1 Timing for page read

Read Status Register Command

This command reads status information. When the "70_{16}" command code is sent with the 1st byte, the contents of the status register (SRD) specified with the 2nd byte and the contents of status register 1 (SRD1) specified with the 3rd byte are read.

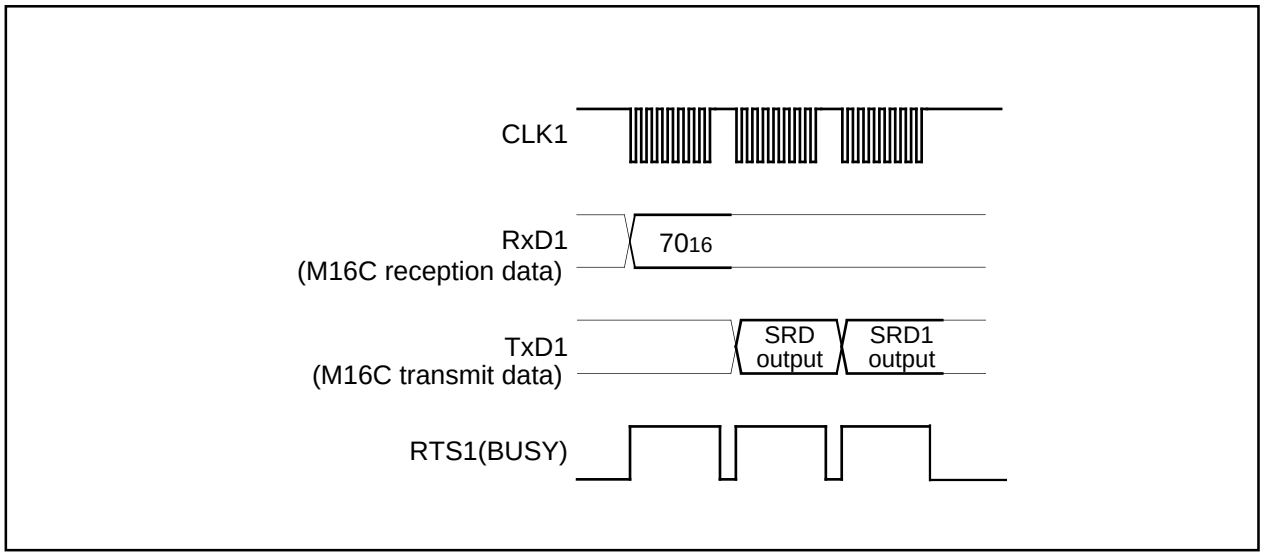

Figure 32.2 Timing for reading the status register

Clear Status Register Command

This command clears the bits (SR3–SR5) which are set when the status register operation ends in error. When the "50_{16}" command code is sent with the 1st byte, the aforementioned bits are cleared. When the clear status register operation ends, the RTS_1 (BUSY) signal changes from the "H" to the "L" level.

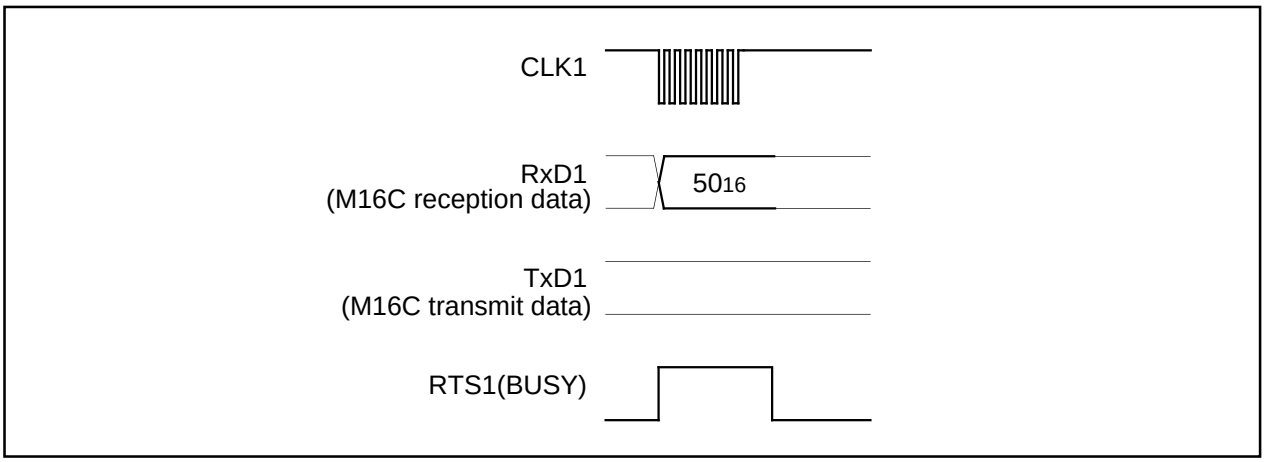

Figure 32.3 Timing for clearing the status register

Page Program Command

This command writes the specified page (256 bytes) in the flash memory sequentially one byte at a time. Execute the page program command as explained here following.

(1) Transfer the "41_{16}" command code with the 1st byte.
(2) Transfer addresses A_8 to A_{15} and A_{16} to A_{23} with the 2nd and 3rd bytes respectively.
(3) From the 4th byte onward, as write data (D_0–D_7) for the page (256 bytes) specified with addresses A_8 to A_{23} is input sequentially from the smallest address first, that page is automatically written.

When reception setup for the next 256 bytes ends, the RTS_1 (BUSY) signal changes from the "H" to the "L" level. The result of the page program can be known by reading the status register. For more information, see the section on the status register.

Each block can be write-protected with the lock bit. For more information, see the section on the data protection function. Additional writing is not allowed with already programmed pages.

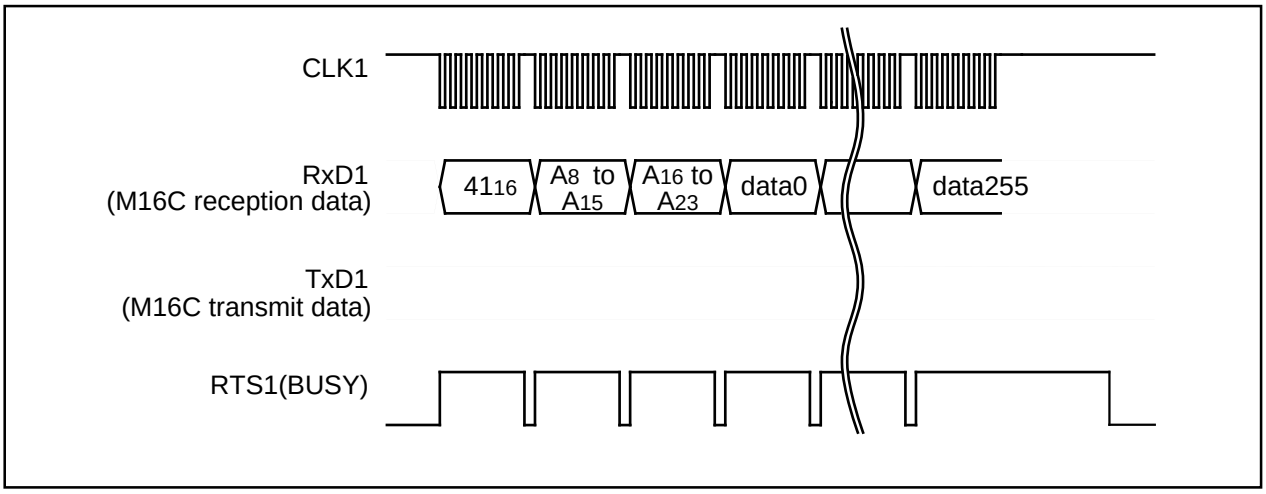

Figure 32.4 Timing for the page program

Block Erase Command

This command erases the data in the specified block. Execute the block erase command as explained here following.

(1) Transfer the "20_{16}" command code with the 1st byte.

(2) Transfer addresses A_8 to A_{15} and A_{16} to A_{23} with the 2nd and 3rd bytes respectively.

(3) Transfer the verify command code "$D0_{16}$" with the 4th byte. With the verify command code, the erase operation will start for the specified block in the flash memory. Write the highest address of the specified block for addresses A_{16} to A_{23}.

When block erasing ends, the RTS_1 (BUSY) signal changes from the "H" to the "L" level. After block erase ends, the result of the block erase operation can be known by reading the status register. For more information, see the section on the status register.

Each block can be erase-protected with the lock bit. For more information, see the section on the data protection function.

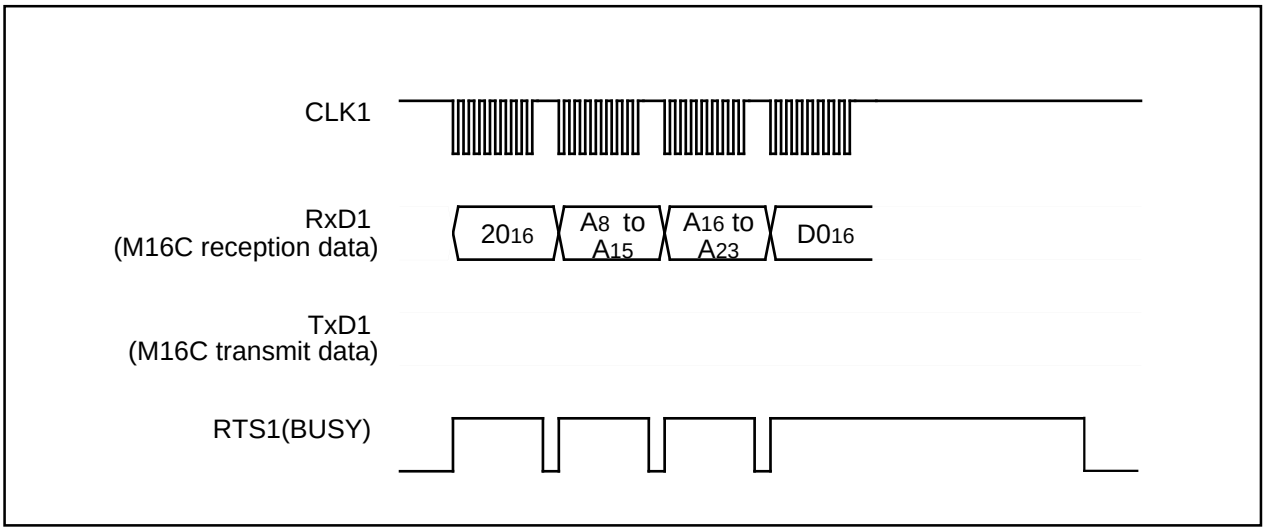

Figure 32.5 Timing for block erasing

Erase All Unlocked Blocks Command

This command erases the content of all blocks. Execute the erase all unlocked blocks command as explained here following.

(1) Transfer the "A7$_{16}$" command code with the 1st byte.

(2) Transfer the verify command code "D0$_{16}$" with the 2nd byte. With the verify command code, the erase operation will start and continue for all blocks in the flash memory.

When block erasing ends, the RTS$_1$ (BUSY) signal changes from the "H" to the "L" level. The result of the erase operation can be known by reading the status register. Each block can be erase-protected with the lock bit. For more information, see the section on the data protection function.

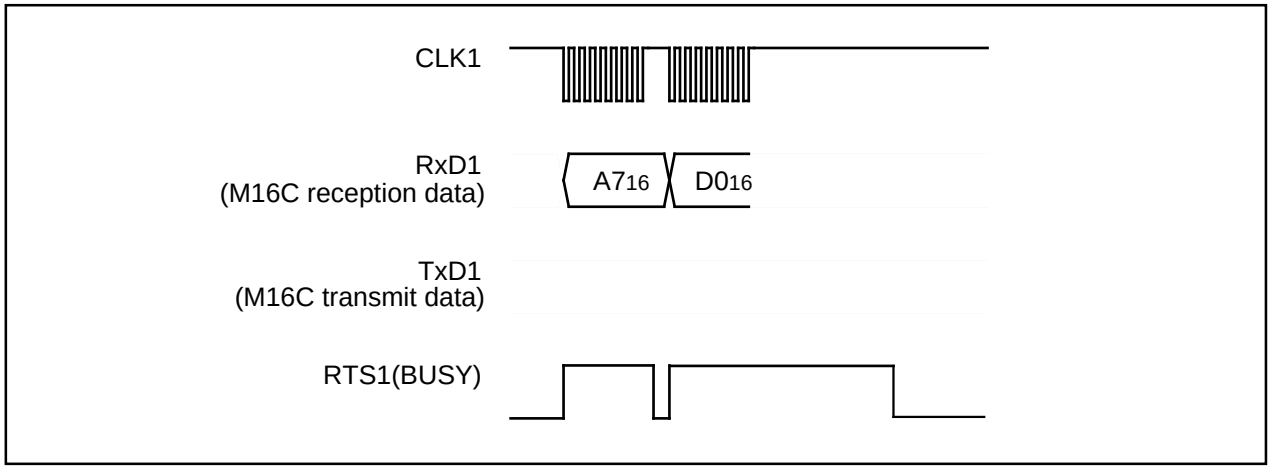

Figure 32.6 Timing for erasing all unlocked blocks

Lock Bit Program Command

This command writes "0" (lock) for the lock bit of the specified block. Execute the lock bit program command as explained here following.

(1) Transfer the "77$_{16}$" command code with the 1st byte.

(2) Transfer addresses A$_8$ to A$_{15}$ and A$_{16}$ to A$_{23}$ with the 2nd and 3rd bytes respectively.

(3) Transfer the verify command code "D0$_{16}$" with the 4th byte. With the verify command code, "0" is written for the lock bit of the specified block. Write the highest address of the specified block for addresses A$_8$ to A$_{23}$.

When writing ends, the RTS$_1$ (BUSY) signal changes from the "H" to the "L" level. Lock bit status can be read with the read lock bit status command. For information on the lock bit function, reset procedure and so on, see the section on the data protection function.

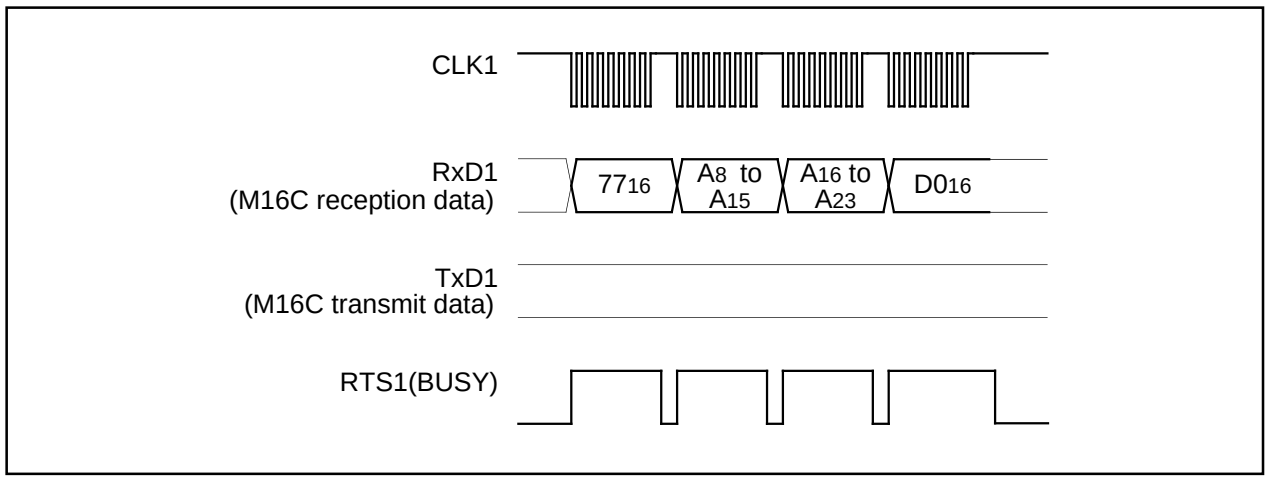

Figure 32.7 Timing for the lock bit program

Read Lock Bit Status Command

This command reads the lock bit status of the specified block. Execute the read lock bit status command as explained here following.

(1) Transfer the "71_{16}" command code with the 1st byte.

(2) Transfer addresses A_8 to A_{15} and A_{16} to A_{23} with the 2nd and 3rd bytes respectively.

(3) The lock bit data of the specified block is output with the 4th byte. The 6th bit (D6) of output data is the lock bit data. Write the highest address of the specified block for addresses A_8 to A_{23}.

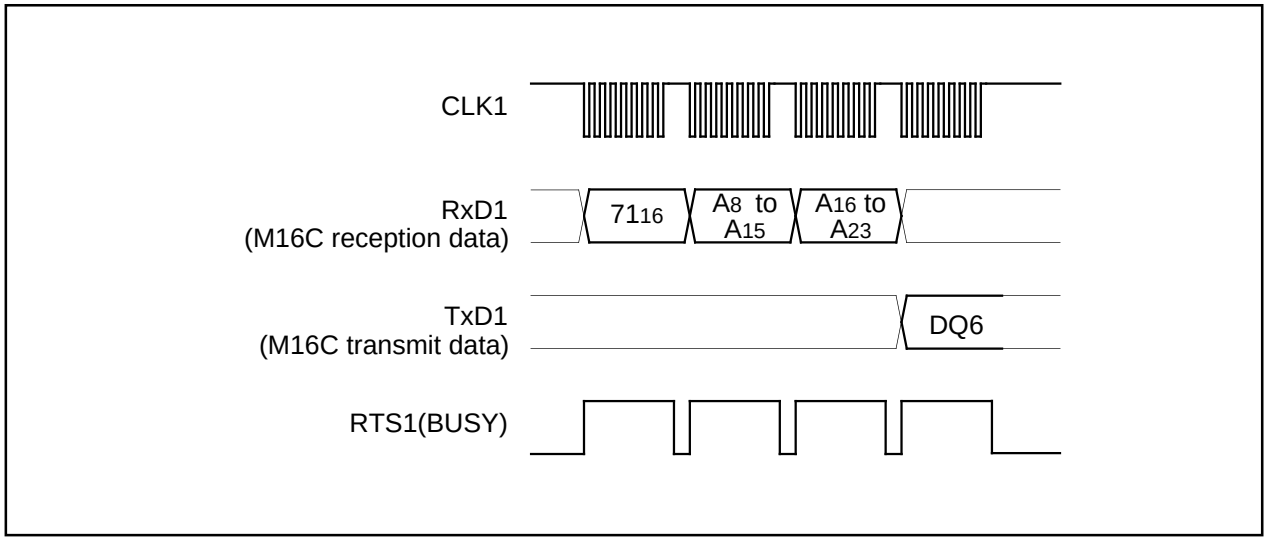

Figure 32.8 Timing for reading lock bit status

Lock Bit Enable Command

This command enables the lock bit in blocks whose bit was disabled with the lock bit disable command. The command code "$7A_{16}$" is sent with the 1st byte of the serial transmission. This command only enables the lock bit function; it does not set the lock bit itself.

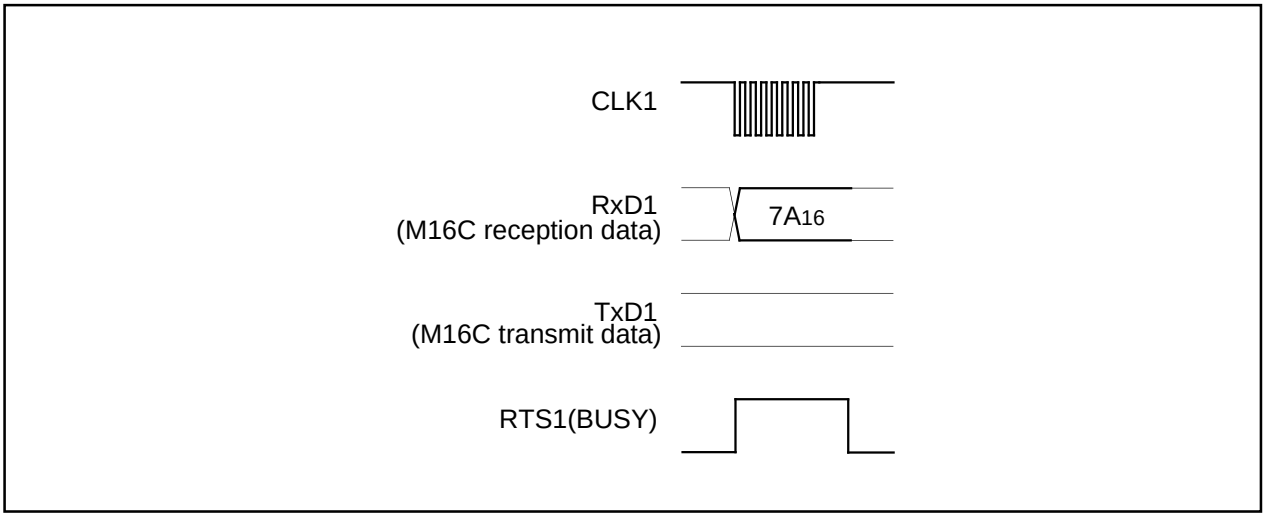

Figure 32.9 Timing for enabling the lock bit

Lock Bit Disable Command

This command disables the lock bit. The command code "75$_{16}$" is sent with the 1st byte of the serial transmission. This command only disables the lock bit function; it does not set the lock bit itself. However, if an erase command is executed after executing the lock bit disable command, "0" (locked) lock bit data is set to "1" (unlocked) after the erase operation ends. In any case, after the reset is cancelled, the lock bit is enabled.

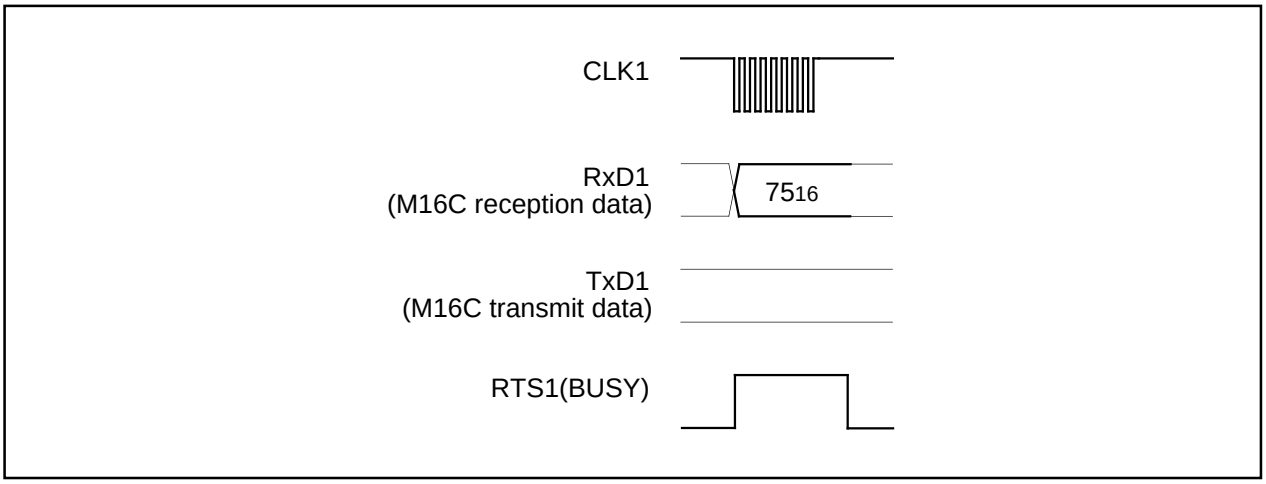

Figure 32.10 Timing for disabling the lock bit

Download Command

This command downloads a program to the RAM for execution. Execute the download command as explained here following.

(1) Transfer the "FA$_{16}$" command code with the 1st byte.
(2) Transfer the program size with the 2nd and 3rd bytes.
(3) Transfer the check sum with the 4th byte. The check sum is added to all data sent with the 5th byte onward.
(4) The program to execute is sent with the 5th byte onward.

When all data has been transmitted, if the check sum matches, the downloaded program is executed. The size of the program will vary according to the internal RAM.

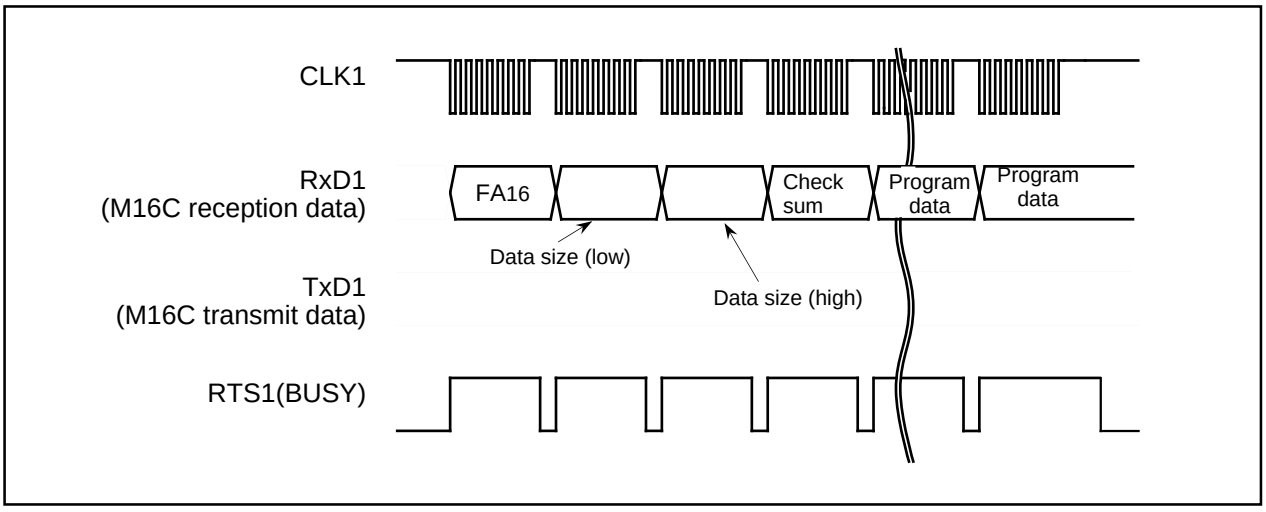

Figure 32.11 Timing for download

Version Information Output Command

This command outputs the version information of the control program stored in the boot area. Execute the version information output command as explained here following.

(1) Transfer the "FB16" command code with the 1st byte.

(2) The version information will be output from the 2nd byte onward. This data is composed of 8 ASCII code characters.

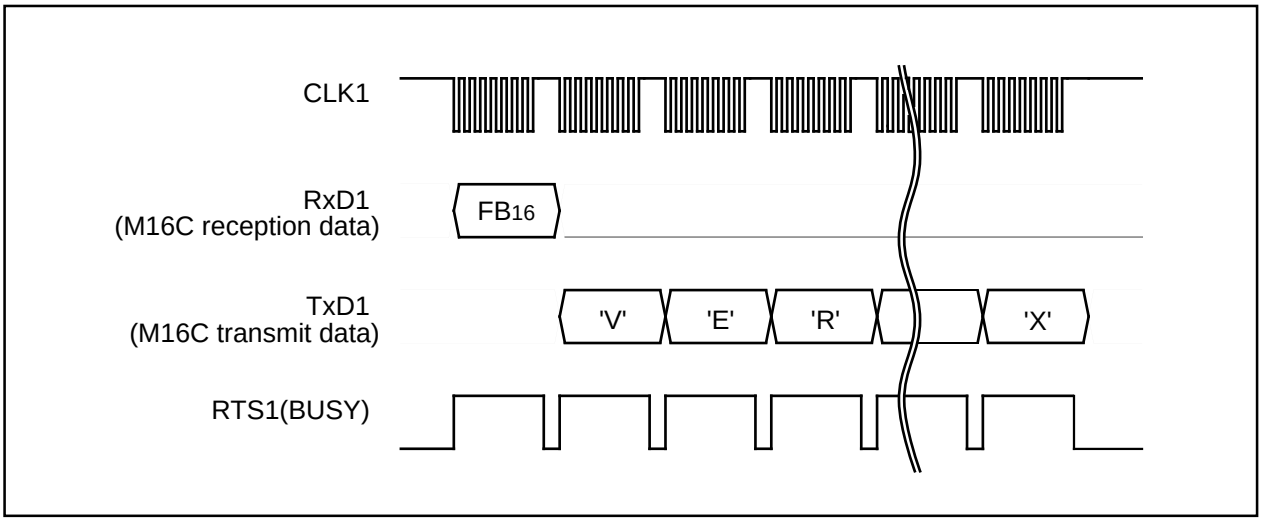

Figure 32.12 Timing for version information output

Boot ROM Area Output Command

This command outputs the control program stored in the boot ROM area in one page blocks (256 bytes). Execute the boot ROM area output command as explained here following.

(1) Transfer the "FC16" command code with the 1st byte.

(2) Transfer addresses A8 to A15 and A16 to A23 with the 2nd and 3rd bytes respectively.

(3) From the 4th byte onward, data (D0–D7) for the page (256 bytes) specified with addresses A8 to A23 will be output sequentially from the smallest address first, in sync with the rise of the clock.

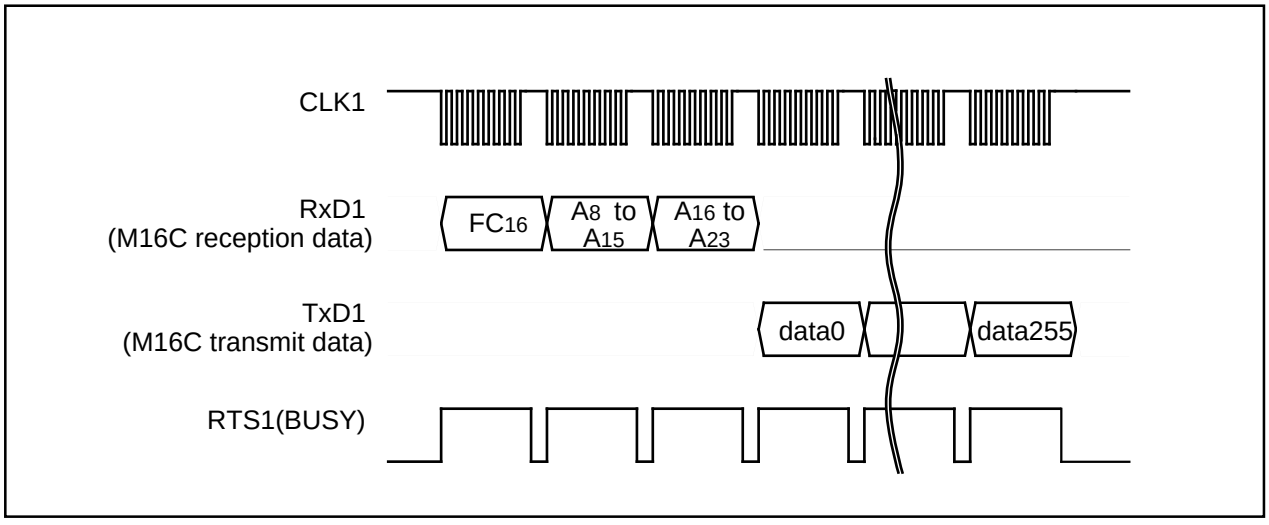

Figure 32.13 Timing for boot ROM area output

ID Check

This command checks the ID code. Execute the boot ID check command as explained here following.

(1) Transfer the “F5$_{16}$” command code with the 1st byte.

(2) Transfer addresses A$_0$ to A$_7$, A$_8$ to A$_{15}$ and A$_{16}$ to A$_{23}$ of the 1st byte of the ID code with the 2nd, 3rd and 4th bytes respectively.

(3) Transfer the number of data sets of the ID code with the 5th byte.

(4) The ID code is sent with the 6th byte onward, starting with the 1st byte of the code.

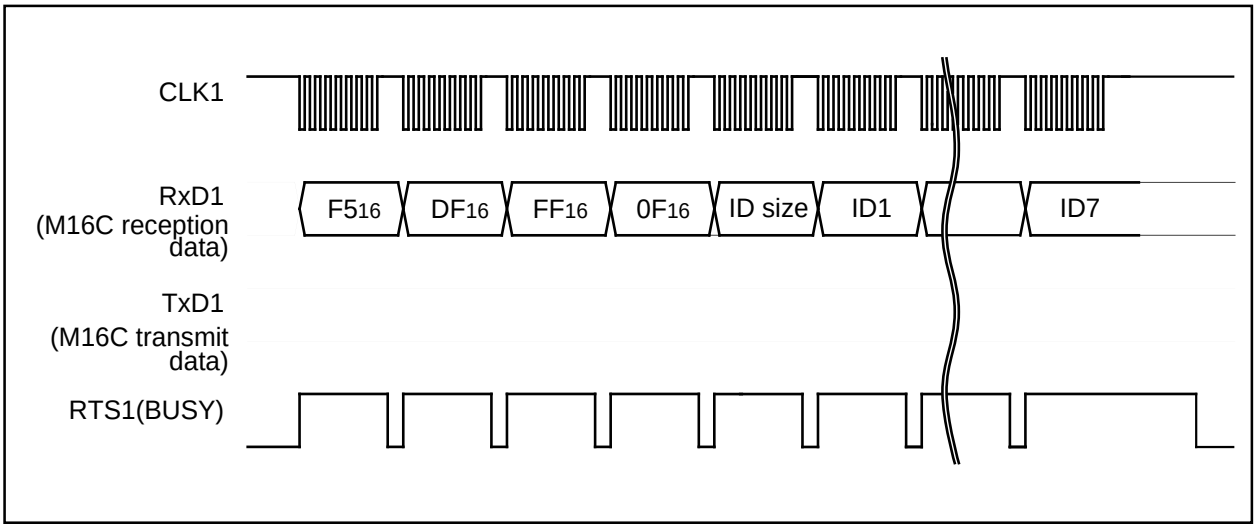

Figure 32.14 Timing for the ID check

ID Code

When the flash memory is not blank, the ID code sent from the peripheral units and the ID code written in the flash memory are compared to see if they match. If the codes do not match, the command sent from the peripheral units is not accepted. An ID code contains 8 bits of data. Area is, from the 1st byte, addresses 0FFFFDF$_{16}$, 0FFFFE3$_{16}$, 0FFFFEB$_{16}$, 0FFFFEF$_{16}$, 0FFFFF3$_{16}$, 0FFFFF7$_{16}$ and 0FFFFFB$_{16}$. Write a program into the flash memory, which already has the ID code set for these addresses.

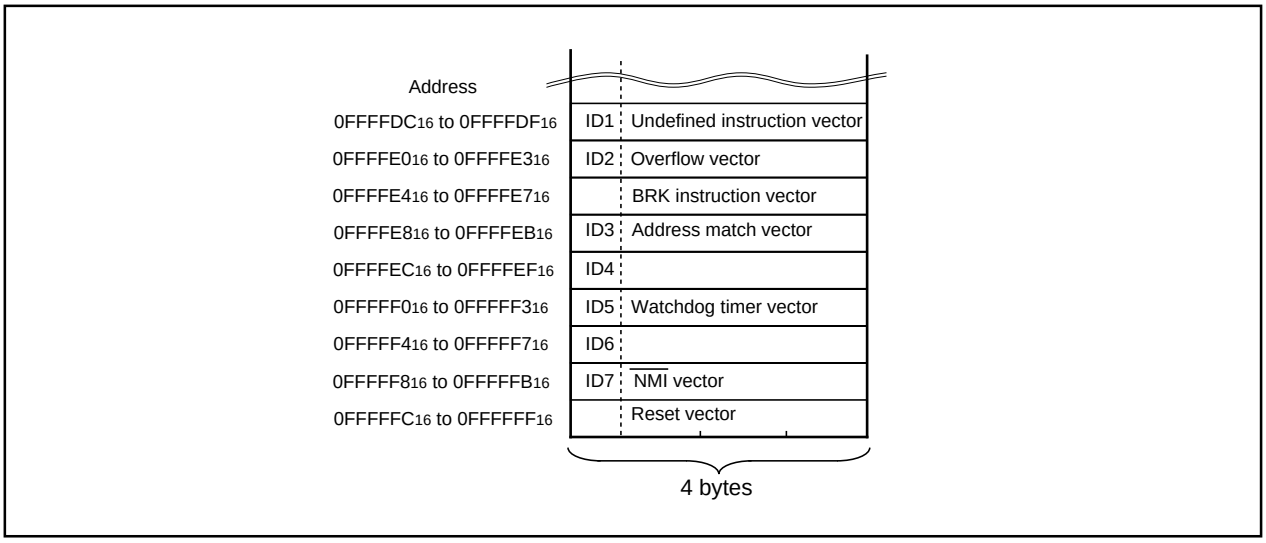

Figure 32.15 ID code storage addresses

Read Check Data

This command reads the check data that confirms that the write data, which was sent with the page program command, was successfully received.

(1) Transfer the "FD16" command code with the 1st byte.

(2) The check data (low) is received with the 2nd byte and the check data (high) with the 3rd.

To use this read check data command, first execute the command and then initialize the check data. Next, execute the page program command the required number of times. After that, when the read check command is executed again, the check data for all of the read data that was sent with the page program command during this time is read. The check data is the result of CRC operation of write data.

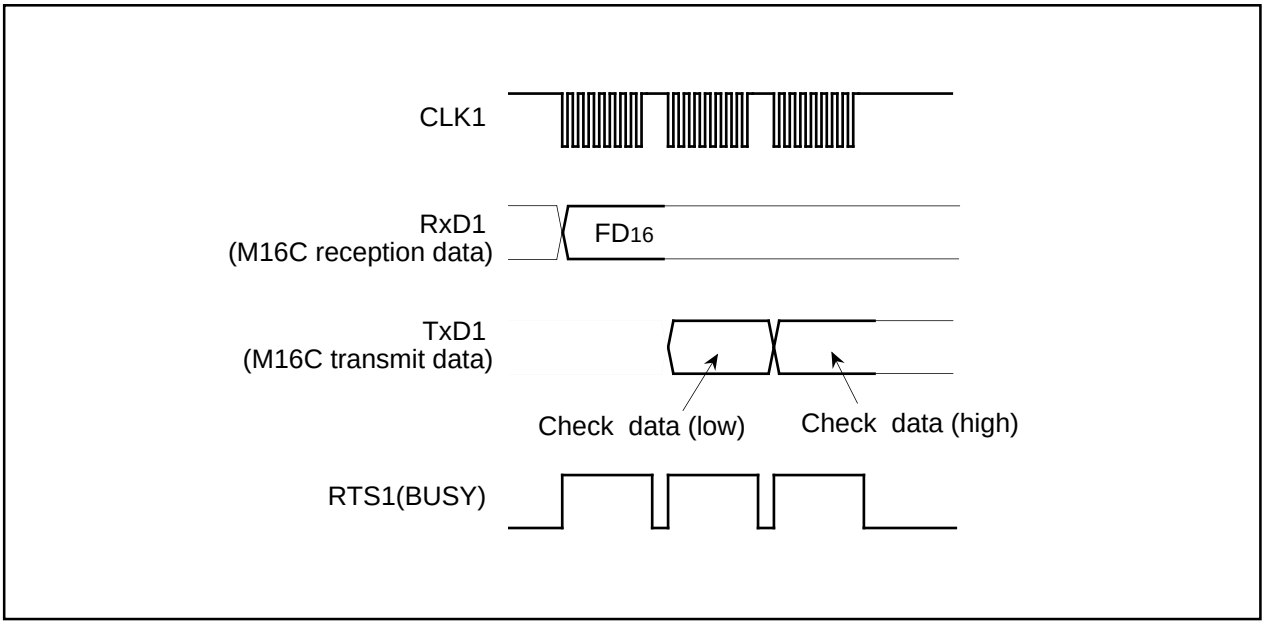

Figure 32.16 Timing for the read check data

Data Protection (Block Lock)

Each of the blocks in Figure 32.17 have a nonvolatile lock bit that specifies protection (block lock) against erasing/writing. A block is locked (writing “0” for the lock bit) with the lock bit program command. Also, the lock bit of any block can be read with the read lock bit status command.

Block lock disable/enable is determined by the status of the lock bit itself and execution status of the lock bit disable and lock enable bit commands.

(1) After the reset has been cancelled and the lock bit enable command executed, the specified block can be locked/unlocked using the lock bit (lock bit data). Blocks with a “0” lock bit data are locked and cannot be erased or written in. On the other hand, blocks with a “1” lock bit data are unlocked and can be erased or written in.

(2) After the lock bit enable command has been executed, all blocks are unlocked regardless of lock bit data status and can be erased or written in. In this case, lock bit data that was “0” before the block was erased is set to “1” (unlocked) after erasing, therefore the block is actually unlocked with the lock bit.

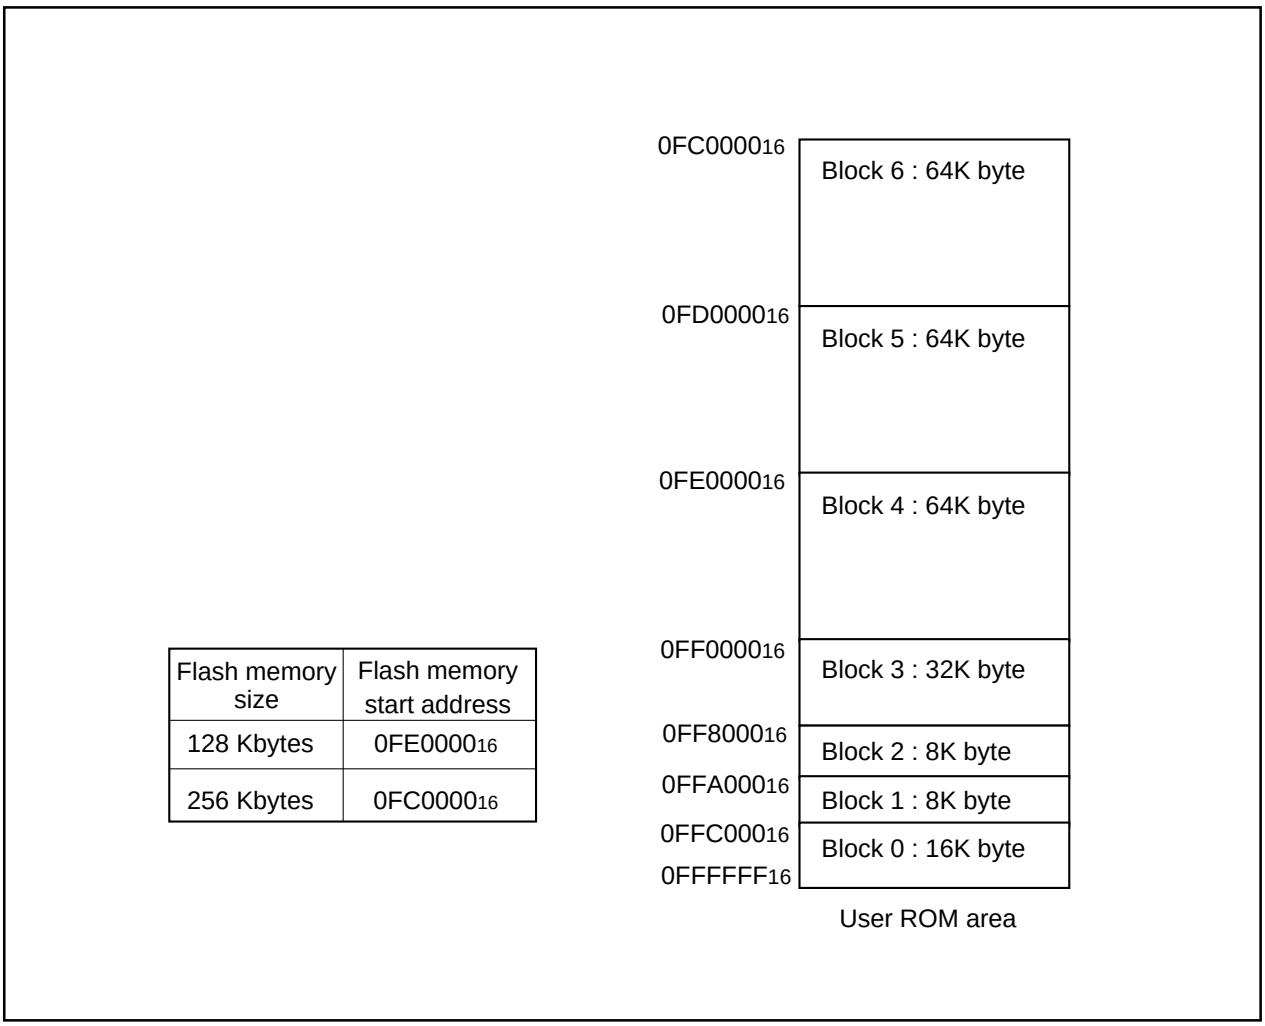

Flash memory size	Flash memory start address
128 Kbytes	0FE000016
256 Kbytes	0FC000016

Figure 32.17 Blocks in the user area

Status Register (SRD)

The status register indicates operating status of the flash memory and status such as whether an erase operation or a program ended successfully or in error. It can be read by writing the read status register command (70_{16}). Also, the status register is cleared by writing the clear status register command (50_{16}). Table 32.2 gives the definition of each status register bit. After clearing the reset, the status register outputs "80_{16}".

Table 32.2 Status register (SRD)

SRD0 bits	Status name	Definition	
		"1"	"0"
SR7 (bit7)	Write state machine (WSM) status	Ready	Busy
SR6 (bit6)	Reserved	-	-
SR5 (bit5)	Erase status	Terminated in error	Terminated normally
SR4 (bit4)	Program status	Terminated in error	Terminated normally
SR3 (bit3)	Block status after program	Terminated in error	Terminated normally
SR2 (bit2)	Reserved	-	-
SR1 (bit1)	Reserved	-	-
SR0 (bit0)	Reserved	-	-

Write State Machine (WSM) Status (SR7)

The write state machine (WSM) status indicates the operating status of the flash memory. When power is turned on, "1" (ready) is set for it. The bit is set to "0" (busy) during an auto write or auto erase operation, but it is set back to "1" when the operation ends.

Erase Status (SR5)

The erase status reports the operating status of the auto erase operation. If an erase error occurs, it is set to "1". When the erase status is cleared, it is set to "0".

Program Status (SR4)

The program status reports the operating status of the auto write operation. If a write error occurs, it is set to "1". When the program status is cleared, it is set to "0".

Program Status After Program (SR3)

If excessive data is written (phenomenon whereby the memory cell becomes depressed which results in data not being read correctly), "1" is set for the program status after-program at the end of the page write operation. In other words, when writing ends successfully, "80_{16}" is output; when writing fails, "90_{16}" is output; and when excessive data is written, "88_{16}" is output.

If "1" is written for any of the SR5, SR4 or SR3 bits, the page program, block erase, erase all unlocked blocks and lock bit program commands are not accepted. Before executing these commands, execute the clear status register command (50_{16}) and clear the status register.

Status Register 1 (SRD1)

Status register 1 indicates the status of serial communications, results from ID checks and results from check sum comparisons. It can be read after the SRD by writing the read status register command (70_{16}). Also, status register 1 is cleared by writing the clear status register command (50_{16}).

Table 31.3 gives the definition of each status register 1 bit. "00_{16}" is output when power is turned ON and the flag status is maintained even after the reset.

Table 32.3 Status register 1 (SRD1)

SRD1 bits	Status name	Definition	
		"1"	"0"
SR15 (bit7)	Boot update completed bit	Update completed	Not update
SR14 (bit6)	Reserved	-	-
SR13 (bit5)	Reserved	-	-
SR12 (bit4)	Checksum match bit	Match	Mismatch
SR11 (bit3) SR10 (bit2)	ID check completed bits	00 Not verified 01 Verification mismatch 10 Reserved 11 Verified	
SR9 (bit1)	Data receive time out	Time out	Normal operation
SR8 (bit0)	Reserved	-	-

Boot Update Completed Bit (SR15)

This flag indicates whether the control program was downloaded to the RAM or not, using the download function.

Check Sum Consistency Bit (SR12)

This flag indicates whether the check sum matches or not when a program, is downloaded for execution using the download function.

ID Check Completed Bits (SR11 and SR10)

These flags indicate the result of ID checks. Some commands cannot be accepted without an ID check.

Data Reception Time Out (SR9)

This flag indicates when a time out error is generated during data reception. If this flag is attached during data reception, the received data is discarded and the microcomputer returns to the command wait state.

Full Status Check

Results from executed erase and program operations can be known by running a full status check. Figure 32.18 shows a flowchart of the full status check and explains how to remedy errors which occur.

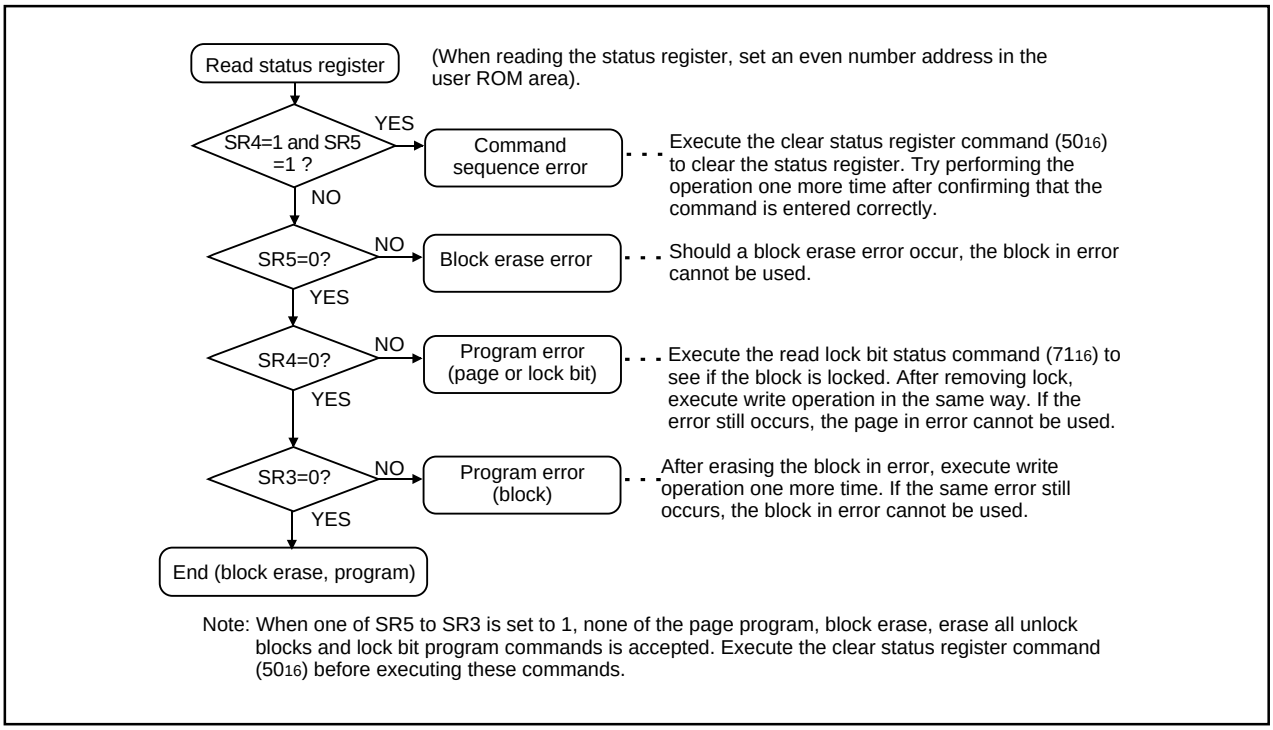

Figure 32.18 Full status check flowchart and remedial procedure for errors

Example Circuit Application for The Standard Serial I/O Mode 1

The below figure shows a circuit application for the standard serial I/O mode 1. Control pins will vary according to peripheral unit (programmer), therefore see the peripheral unit (programmer) manual for more information.

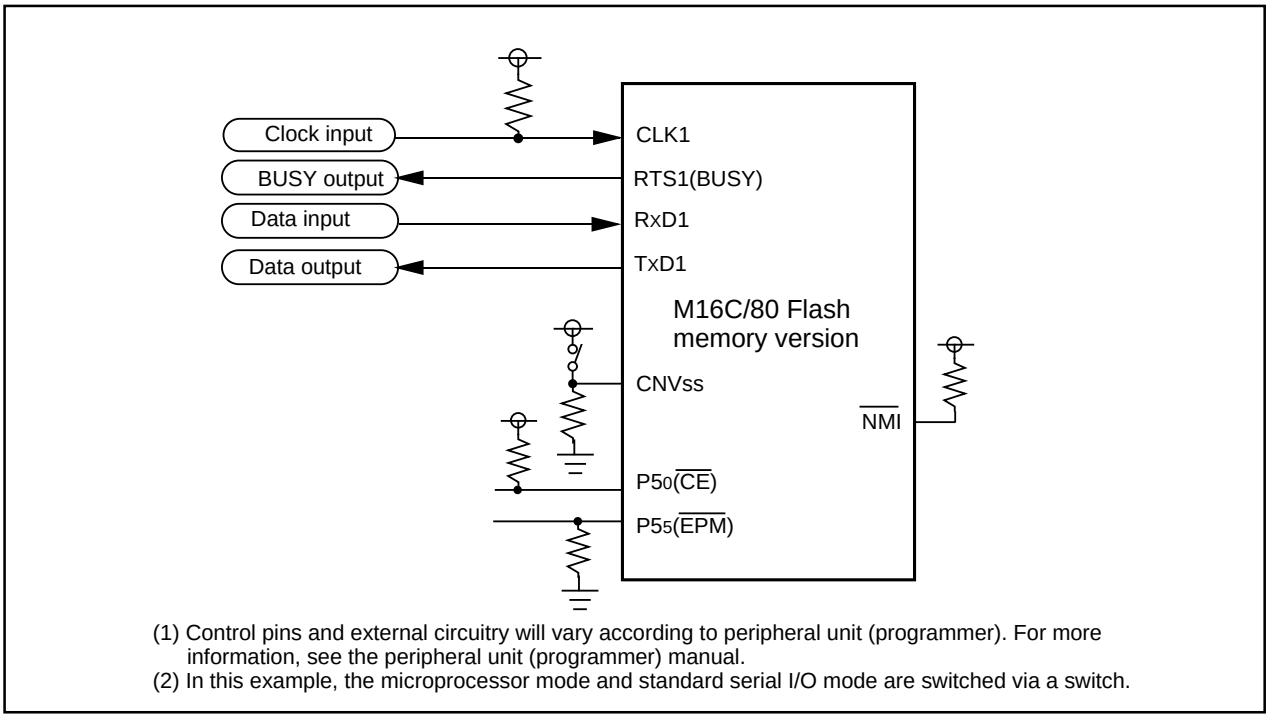

Figure 32.19 Example circuit application for the standard serial I/O mode 1

32.2 Overview of standard serial I/O mode 2 (clock asynchronized)

In standard serial I/O mode 2, software commands, addresses and data are input and output between the MCU and peripheral units (serial programer, etc.) using 2-wire clock-asynchronized serial I/O (UART1). Standard serial I/O mode 2 is engaged by releasing the reset with the $P6_5$ (CLK_1) pin "L" level.

The TxD_1 pin is for CMOS output. Data transfer is in 8-bit units with LSB first, 1 stop bit and parity OFF.

After the reset is released, connections can be established at 9,600 bps when initial communications (Figure 32.20) are made with a peripheral unit. However, this requires a main clock with a minimum 2 MHz input oscillation frequency. Baud rate can also be changed from 9,600 bps to 19,200, 38,400, 57,600 or 115,200 bps by executing software commands. However, communication errors may occur because of the oscillation frequency of the main clock. If errors occur, change the main clock's oscillation frequency and the baud rate.

After executing commands from a peripheral unit that requires time to erase and write data, as with erase and program commands, allow a sufficient time interval or execute the read status command and check how processing ended, before executing the next command.

Data and status registers in memory can be read after transmitting software commands. Status, such as the operating state of the flash memory or whether a program or erase operation ended successfully or not, can be checked by reading the status register. Here following are explained initial communications with peripheral units, how frequency is identified and software commands.

Initial communications with peripheral units

After the reset is released, the bit rate generator is adjusted to 9,600 bps to match the oscillation frequency of the main clock, by sending the code as prescribed by the protocol for initial communications with peripheral units (Figure 32.20).

(1) Transmit "00_{16}" from a peripheral unit 16 times. (The MCU with internal flash memory sets the bit rate generator so that "00_{16}" can be successfully received.)

(2) The MCU with internal flash memory outputs the "$B0_{16}$" check code and initial communications end successfully *1. Initial communications must be transmitted at a speed of 9,600 bps and a transfer interval of a minimum 15 ms. Also, the baud rate at the end of initial communications is 9,600 bps.

*1. If the peripheral unit cannot receive "$B0_{16}$" successfully, change the oscillation frequency of the main clock.

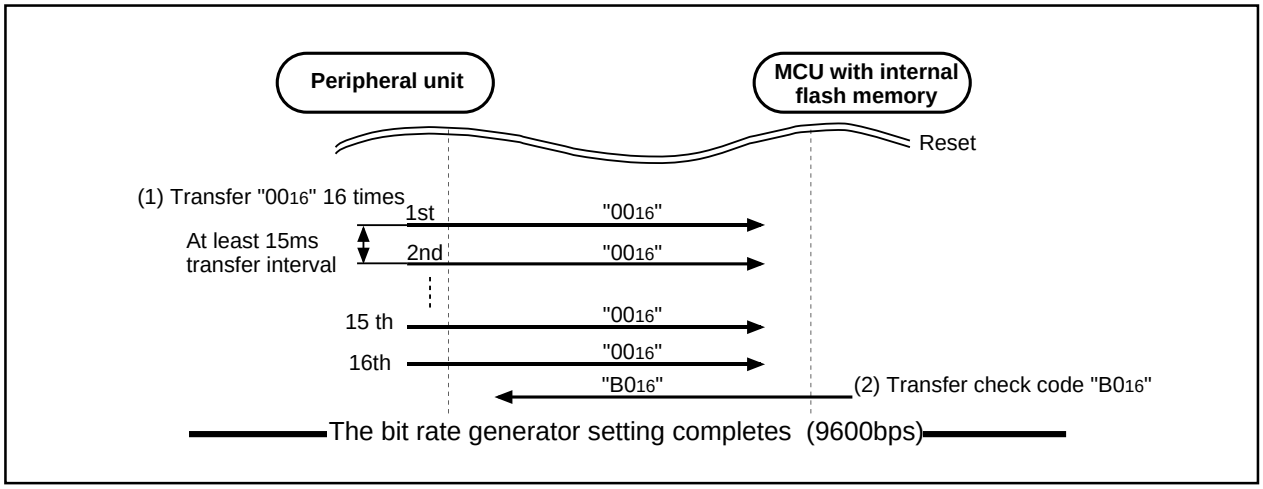

Figure 32.20 Peripheral unit and initial communication

How frequency is identified

When "00$_{16}$" data is received 16 times from a peripheral unit at a baud rate of 9,600 bps, the value of the bit rate generator is set to match the operating frequency (2 - 20 MHz). The highest speed is taken from the first 8 transmissions and the lowest from the last 8. These values are then used to calculate the bit rate generator value for a baud rate of 9,600 bps.

Baud rate cannot be attained with some operating frequencies. Table 32.4 gives the operation frequency and the baud rate that can be attained for.

Table 32.4 Operation frequency and the baud rate

Operation frequency (MHz)	Baud rate 9,600bps	Baud rate 19,200bps	Baud rate 38,400bps	Baud rate 57,600bps	Baud rate 115,200bps
20MHz	√	√	√	√	√
16MHz	√	√	√	√	–
12MHz	√	√	√	√	–
11MHz	√	√	√	√	–
10MHz	√	√	√	√	–
8MHz	√	√	√	√	–
7.3728MHz	√	√	√	√	–
6MHz	√	√	√	–	–
5MHz	√	√	√	–	–
4.5MHz	√	√	√	√	–
4.194304MHz	√	√	√	–	–
4MHz	√	√	–	–	–
3.58MHz	√	√	√	√	–
3MHz	√	√	√	–	–
2MHz	√	–	–	–	–

√ : Communications possible
– : Communications not possible

Software Commands

Table 32.5 lists software commands. In the standard serial I/O mode 2, erase operations, programs and reading are controlled by transferring software commands via the RxD1 pin. Standard serial I/O mode 2 adds five transmission speed commands - 9,600, 19,200, 38,400, 57,600 and 115,200 bps - to the software commands of standard serial I/O mode 1. Software commands are explained here below.

Table 32.5 Software commands (Standard serial I/O mode 2)

	Control command	1st byte transfer	2nd byte	3rd byte	4th byte	5th byte	6th byte		When ID is not verified
1	Page read	FF_{16}	Address (middle)	Address (high)	Data output	Data output	Data output	Data output to 259th byte	Not acceptable
2	Page program	41_{16}	Address (middle)	Address (high)	Data input	Data input	Data input	Data input to 259th byte	Not acceptable
3	Block erase	20_{16}	Address (middle)	Address (high)	$D0_{16}$				Not acceptable
4	Erase all unlocked blocks	$A7_{16}$	$D0_{16}$						Not acceptable
5	Read status register	70_{16}	SRD output	SRD1 output					Acceptable
6	Clear status register	50_{16}							Not acceptable
7	Read lock bit status	71_{16}	Address (middle)	Address (high)	Lock bit data output				Not acceptable
8	Lock bit program	77_{16}	Address (middle)	Address (high)	$D0_{16}$				Not acceptable
9	Lock bit enable	$7A_{16}$							Not acceptable
10	Lock bit disable	75_{16}							Not acceptable
11	Code processing function	$F5_{16}$	Address (low)	Address (middle)	Address (high)	ID size	ID1	To ID7	Acceptable
12	Download function	FA_{16}	Size (low)	Size (high)	Check-sum	Data input	To required number of times		Not acceptable
13	Version data output function	FB_{16}	Version data output	Version data output	Version data output	Version data output	Version data output	Version data output to 9th byte	Acceptable
14	Boot ROM area output function	FC_{16}	Address (middle)	Address (high)	Data output	Data output	Data output	Data output to 259th byte	Not acceptable
15	Read check data	FD_{16}	Check data (low)	Check data (high)					Not acceptable
16	Baud rate 9600	$B0_{16}$	$B0_{16}$						Acceptable
17	Baud rate 19200	$B1_{16}$	$B1_{16}$						Acceptable
18	Baud rate 38400	$B2_{16}$	$B2_{16}$						Acceptable
19	Baud rate 57600	$B3_{16}$	$B3_{16}$						Acceptable
20	Baud rate 115200	$B4_{16}$	$B4_{16}$						Acceptable

Note 1: Shading indicates transfer from flash memory microcomputer to peripheral unit. All other data is transferred from the peripheral unit to the flash memory microcomputer.

Note 2: SRD refers to status register data. SRD1 refers to status register data 1.

Note 3: All commands can be accepted when the flash memory is totally blank.

Page Read Command

This command reads the specified page (256 bytes) in the flash memory sequentially one byte at a time. Execute the page read command as explained here following.

(1) Transfer the "FF16" command code with the 1st byte.

(2) Transfer addresses A8 to A15 and A16 to A23 with the 2nd and 3rd bytes respectively.

(3) From the 4th byte onward, data (D0–D7) for the page (256 bytes) specified with addresses A8 to A23 will be output sequentially from the smallest address first in sync with the rise of the clock.

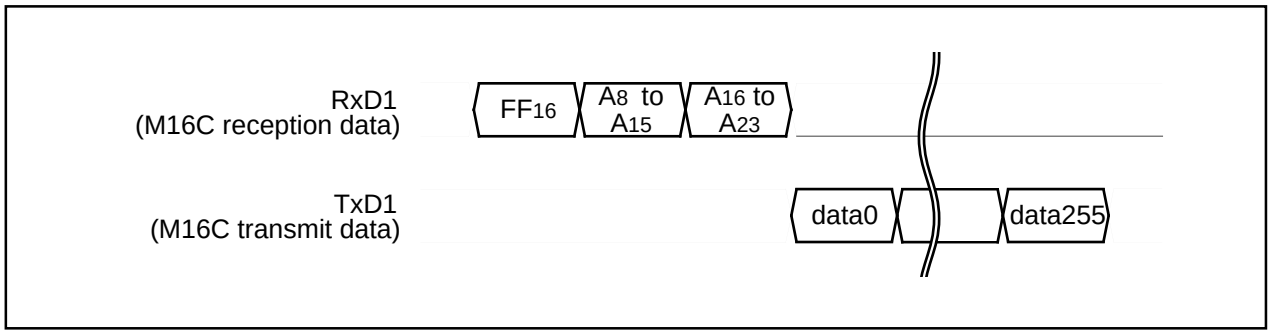

Figure 32.21 Timing for page read

Read Status Register Command

This command reads status information. When the "7016" command code is sent with the 1st byte, the contents of the status register (SRD) specified with the 2nd byte and the contents of status register 1 (SRD1) specified with the 3rd byte are read.

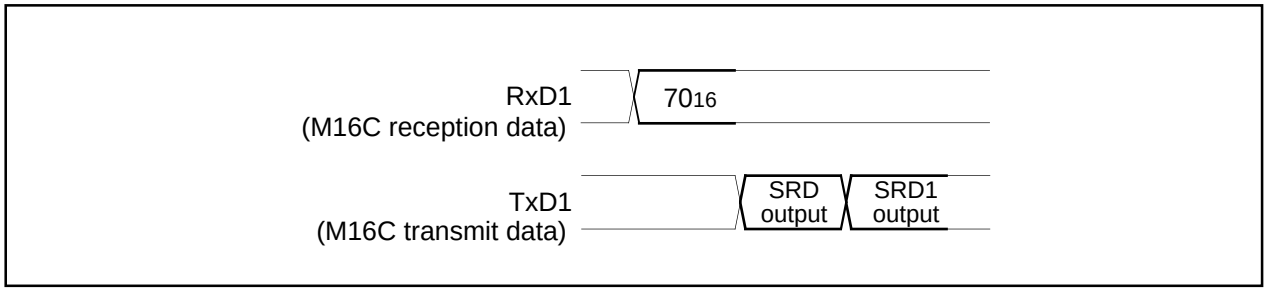

Figure 32.22 Timing for reading the status register

Clear Status Register Command

This command clears the bits (SR3–SR5) which are set when the status register operation ends in error. When the "5016" command code is sent with the 1st byte, the aforementioned bits are cleared.

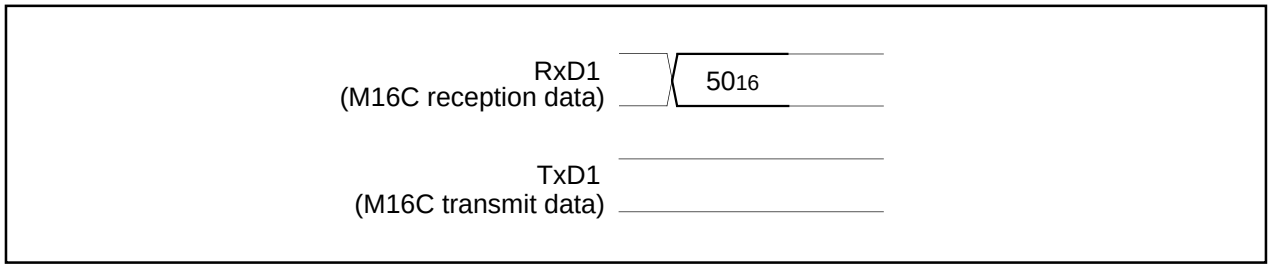

Figure 32.23 Timing for clearing the status register

Page Program Command

This command writes the specified page (256 bytes) in the flash memory sequentially one byte at a time. Execute the page program command as explained here following.

(1) Transfer the "41$_{16}$" command code with the 1st byte.

(2) Transfer addresses A$_8$ to A$_{15}$ and A$_{16}$ to A$_{23}$ with the 2nd and 3rd bytes respectively.

(3) From the 4th byte onward, as write data (D$_0$–D$_7$) for the page (256 bytes) specified with addresses A$_8$ to A$_{23}$ is input sequentially from the smallest address first, that page is automatically written.

The result of the page program can be known by reading the status register. For more information, see the section on the status register.

Each block can be write-protected with the lock bit. For more information, see the section on the data protection function. Additional writing is not allowed with already programmed pages.

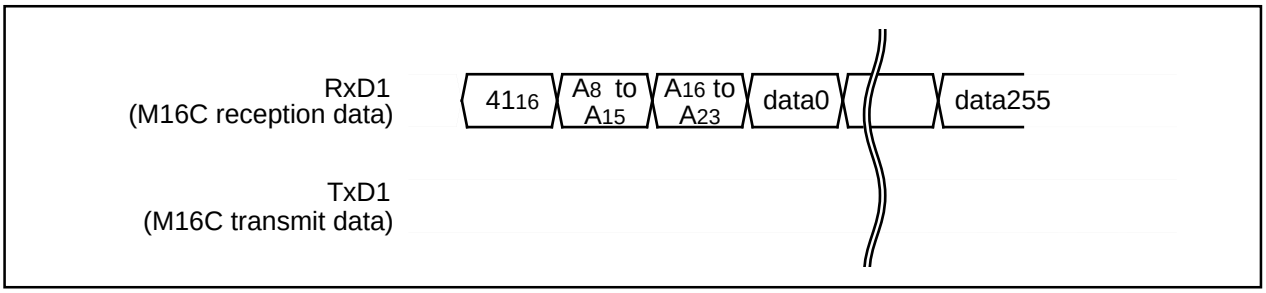

Figure 32.24 Timing for the page program

Block Erase Command

This command erases the data in the specified block. Execute the block erase command as explained here following.

(1) Transfer the "20$_{16}$" command code with the 1st byte.

(2) Transfer addresses A$_8$ to A$_{15}$ and A$_{16}$ to A$_{23}$ with the 2nd and 3rd bytes respectively.

(3) Transfer the verify command code "D0$_{16}$" with the 4th byte. With the verify command code, the erase operation will start for the specified block in the flash memory. Write the highest address of the specified block for addresses A$_{16}$ to A$_{23}$.

After block erase ends, the result of the block erase operation can be known by reading the status register. For more information, see the section on the status register.

Each block can be erase-protected with the lock bit. For more information, see the section on the data protection function.

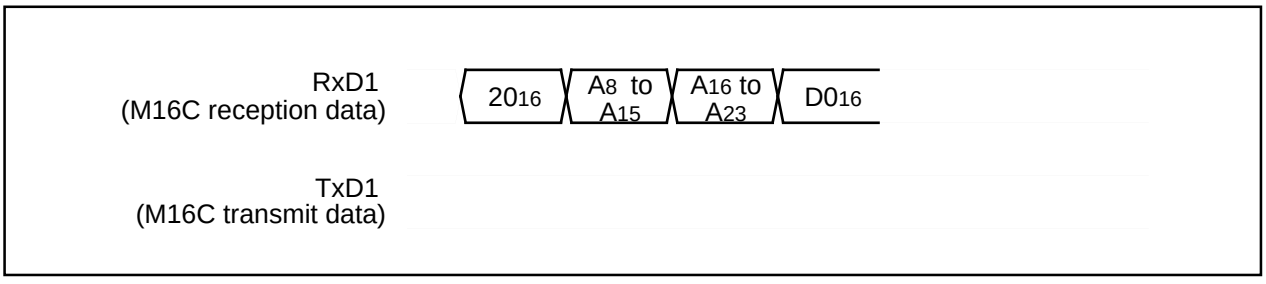

Figure 32.25 Timing for block erasing

Erase All Unlocked Blocks Command

This command erases the content of all blocks. Execute the erase all unlocked blocks command as explained here following.

(1) Transfer the "A7$_{16}$" command code with the 1st byte.

(2) Transfer the verify command code "D0$_{16}$" with the 2nd byte. With the verify command code, the erase operation will start and continue for all blocks in the flash memory.

The result of the erase operation can be known by reading the status register. Each block can be erase-protected with the lock bit. For more information, see the section on the data protection function.

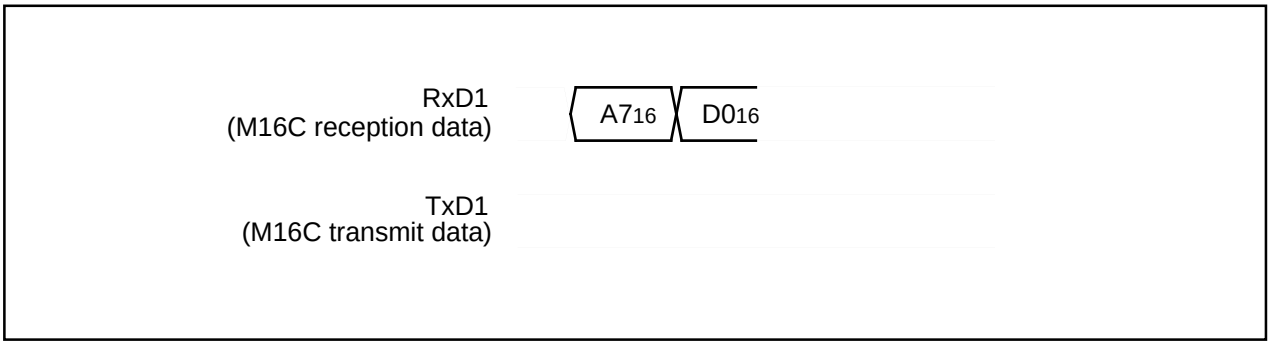

Figure 32.26 Timing for erasing all unlocked blocks

Lock Bit Program Command

This command writes "0" (lock) for the lock bit of the specified block. Execute the lock bit program command as explained here following.

(1) Transfer the "77$_{16}$" command code with the 1st byte.

(2) Transfer addresses A$_8$ to A$_{15}$ and A$_{16}$ to A$_{23}$ with the 2nd and 3rd bytes respectively.

(3) Transfer the verify command code "D0$_{16}$" with the 4th byte. With the verify command code, "0" is written for the lock bit of the specified block. Write the highest address of the specified block for addresses A$_8$ to A$_{23}$.

Lock bit status can be read with the read lock bit status command. For information on the lock bit function, reset procedure and so on, see the section on the data protection function.

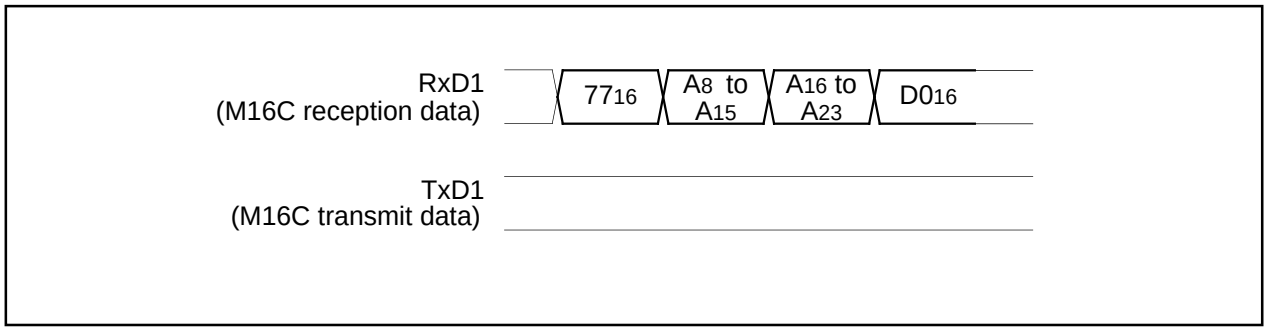

Figure 32.27 Timing for the lock bit program

Read Lock Bit Status Command

This command reads the lock bit status of the specified block. Execute the read lock bit status command as explained here following.

(1) Transfer the "71_{16}" command code with the 1st byte.

(2) Transfer addresses A_8 to A_{15} and A_{16} to A_{23} with the 2nd and 3rd bytes respectively.

(3) The lock bit data of the specified block is output with the 4th byte. Write the highest address of the specified block for addresses A_8 to A_{23}.

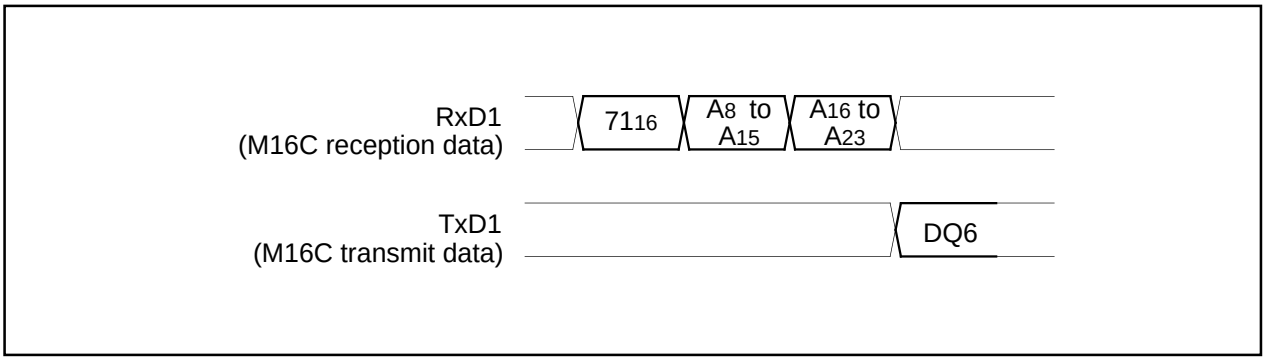

Figure 32.28 Timing for reading lock bit status

Lock Bit Enable Command

This command enables the lock bit in blocks whose bit was disabled with the lock bit disable command. The command code "$7A_{16}$" is sent with the 1st byte of the serial transmission. This command only enables the lock bit function; it does not set the lock bit itself.

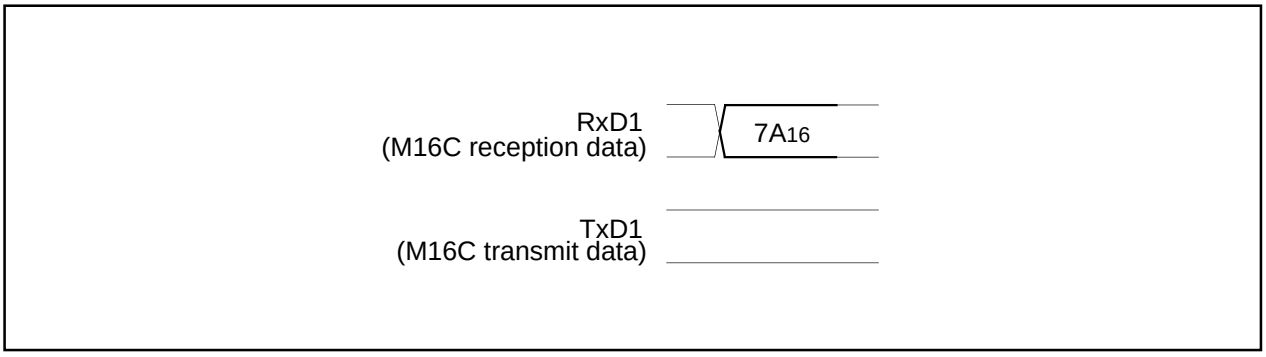

Figure 32.29 Timing for enabling the lock bit

Lock Bit Disable Command

This command disables the lock bit. The command code "75_{16}" is sent with the 1st byte of the serial transmission. This command only disables the lock bit function; it does not set the lock bit itself. However, if an erase command is executed after executing the lock bit disable command, "0" (locked) lock bit data is set to "1" (unlocked) after the erase operation ends. In any case, after the reset is cancelled, the lock bit is enabled.

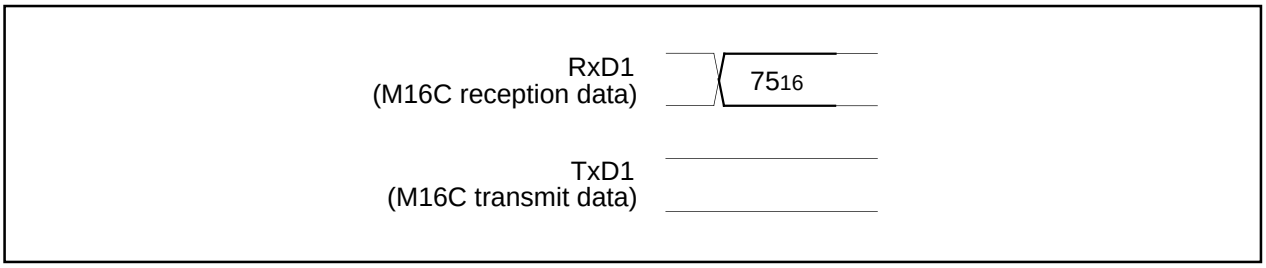

Figure 32.30 Timing for disabling the lock bit

Download Command

This command downloads a program to the RAM for execution. Execute the download command as explained here following.

(1) Transfer the "FA_{16}" command code with the 1st byte.
(2) Transfer the program size with the 2nd and 3rd bytes.
(3) Transfer the check sum with the 4th byte. The check sum is added to all data sent with the 5th byte onward.
(4) The program to execute is sent with the 5th byte onward.

When all data has been transmitted, if the check sum matches, the downloaded program is executed. The size of the program will vary according to the internal RAM.

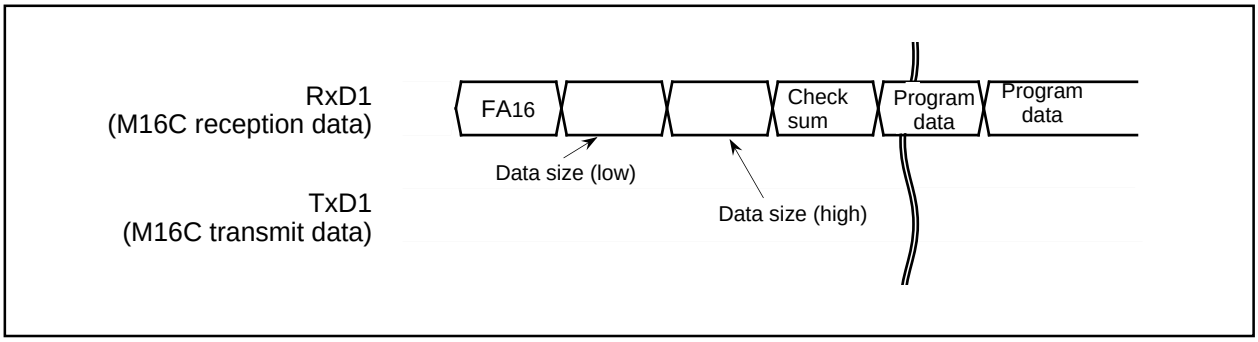

Figure 32.31 Timing for download

Version Information Output Command

This command outputs the version information of the control program stored in the boot area. Execute the version information output command as explained here following.

(1) Transfer the "FB16" command code with the 1st byte.

(2) The version information will be output from the 2nd byte onward. This data is composed of 8 ASCII code characters.

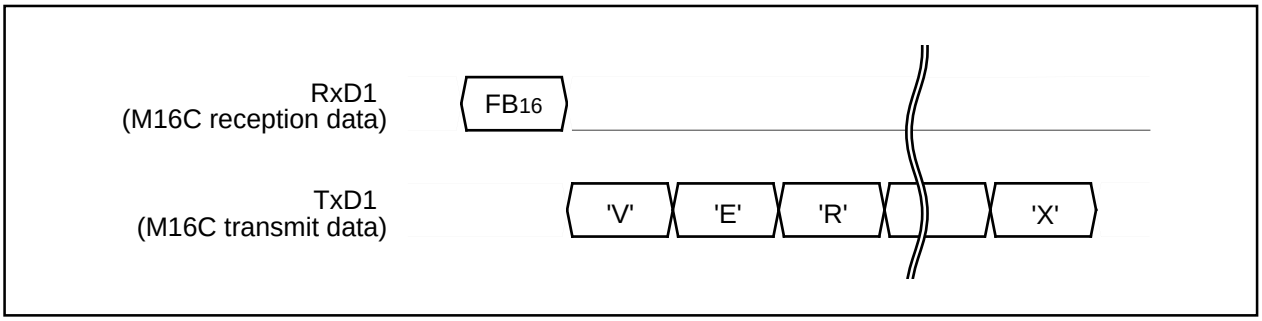

Figure 32.34 Timing for version information output

Boot ROM Area Output Command

This command outputs the control program stored in the boot ROM area in one page blocks (256 bytes). Execute the boot ROM area output command as explained here following.

(1) Transfer the "FC16" command code with the 1st byte.

(2) Transfer addresses A8 to A15 and A16 to A23 with the 2nd and 3rd bytes respectively.

(3) From the 4th byte onward, data (D0–D7) for the page (256 bytes) specified with addresses A8 to A23 will be output sequentially from the smallest address first, in sync with the rise of the clock.

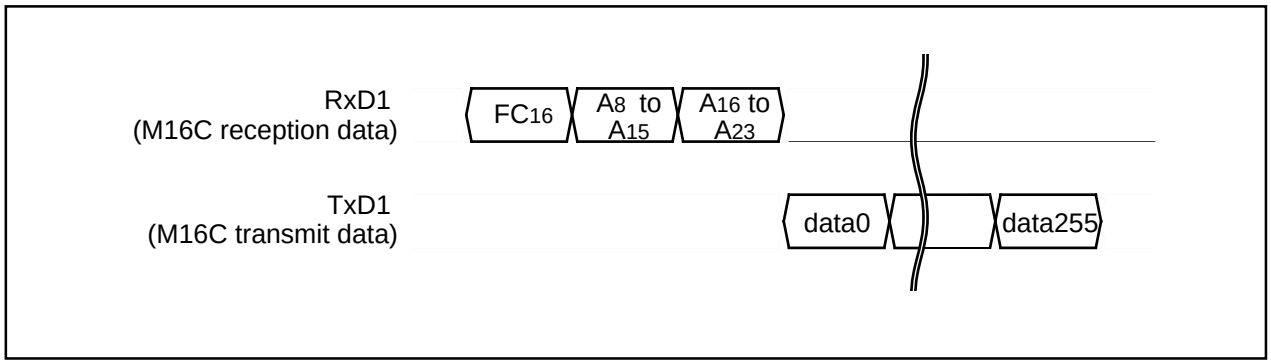

Figure 32.33 Timing for boot ROM area output

ID Check

This command checks the ID code. Execute the boot ID check command as explained here following.

(1) Transfer the “F5$_{16}$” command code with the 1st byte.

(2) Transfer addresses A$_0$ to A$_7$, A$_8$ to A$_{15}$ and A$_{16}$ to A$_{23}$ of the 1st byte of the ID code with the 2nd, 3rd and 4th bytes respectively.

(3) Transfer the number of data sets of the ID code with the 5th byte.

(4) The ID code is sent with the 6th byte onward, starting with the 1st byte of the code.

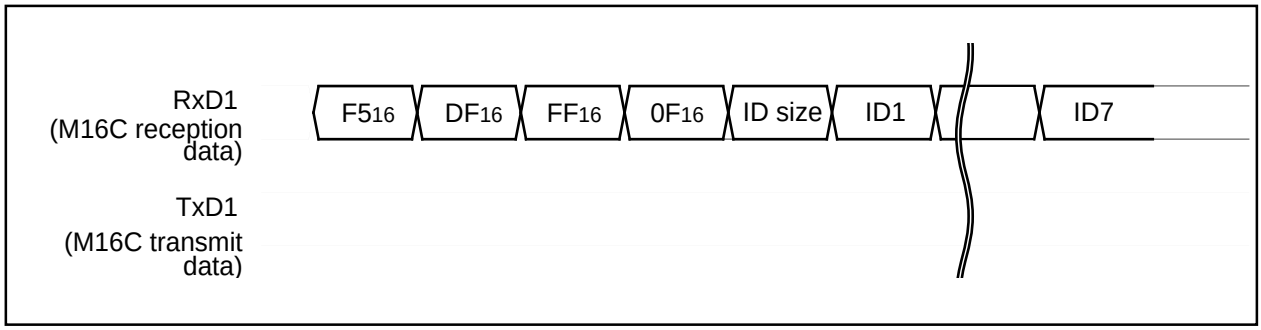

Figure 32.34 Timing for the ID check

ID Code

When the flash memory is not blank, the ID code sent from the peripheral units and the ID code written in the flash memory are compared to see if they match. If the codes do not match, the command sent from the peripheral units is not accepted. An ID code contains 8 bits of data. Area is, from the 1st byte, addresses 0FFFFDF$_{16}$, 0FFFFE3$_{16}$, 0FFFFEB$_{16}$, 0FFFFEF$_{16}$, 0FFFFF3$_{16}$, 0FFFFF7$_{16}$ and 0FFFFFB$_{16}$. Write a program into the flash memory, which already has the ID code set for these addresses.

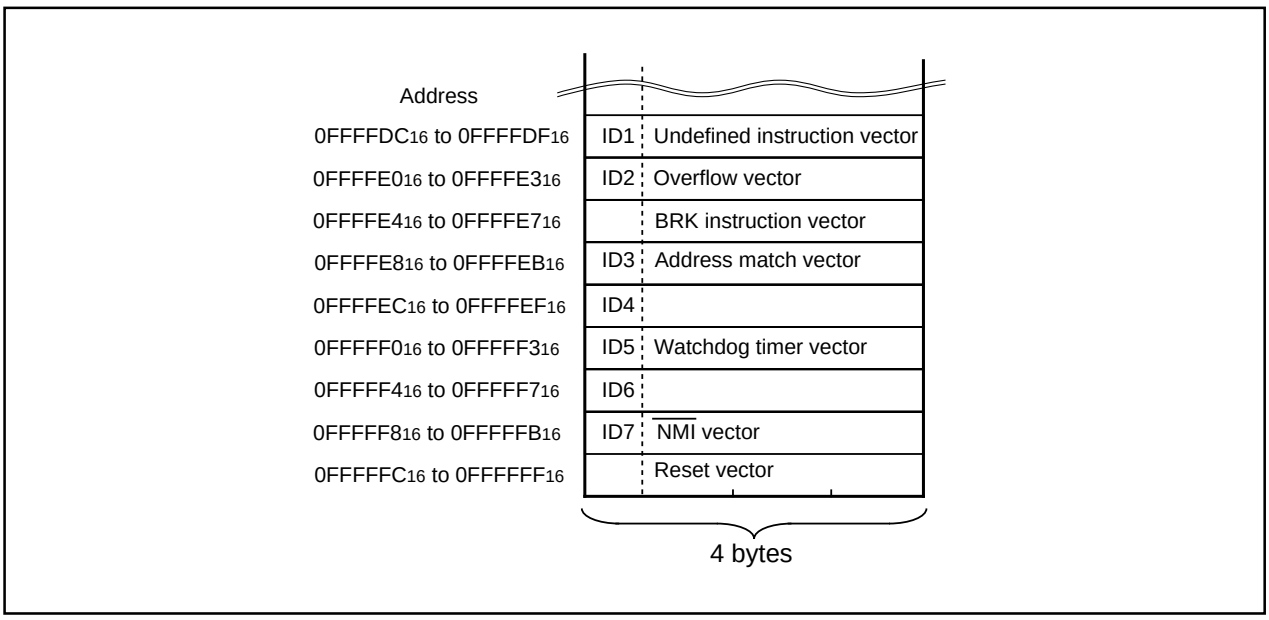

Figure 32.35 ID code storage addresses

Read Check Data

This command reads the check data that confirms that the write data, which was sent with the page program command, was successfully received.

(1) Transfer the "FD16" command code with the 1st byte.

(2) The check data (low) is received with the 2nd byte and the check data (high) with the 3rd.

To use this read check data command, first execute the command and then initialize the check data. Next, execute the page program command the required number of times. After that, when the read check command is executed again, the check data for all of the read data that was sent with the page program command during this time is read. The check data is the result of CRC operation of write data.

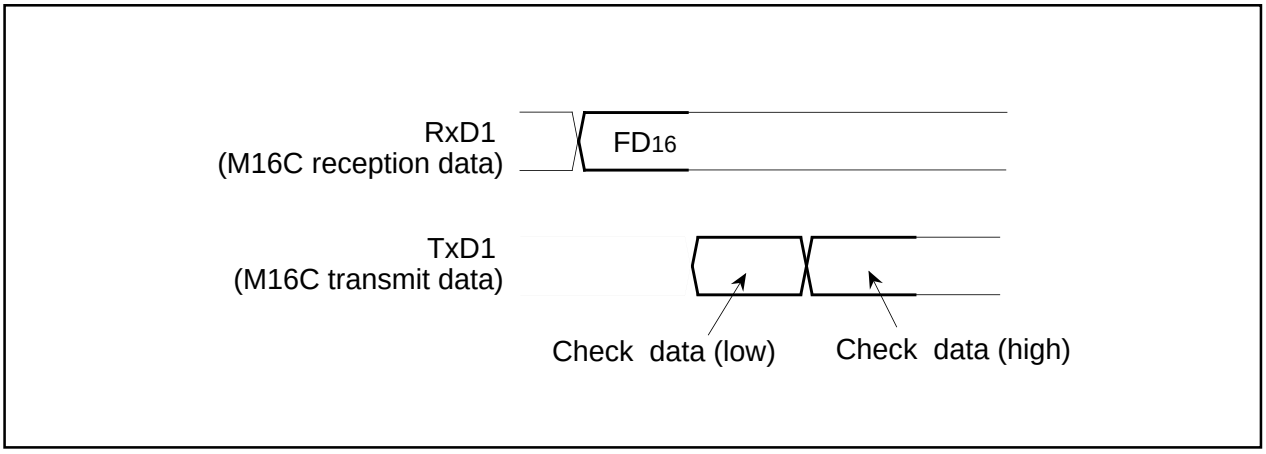

Figure 32.36 Timing for the read check data

Baud Rate 9600

This command changes baud rate to 9,600 bps. Execute it as follows.

(1) Transfer the "B016" command code with the 1st byte.

(2) After the "B016" check code is output with the 2nd byte, change the baud rate to 9,600 bps.

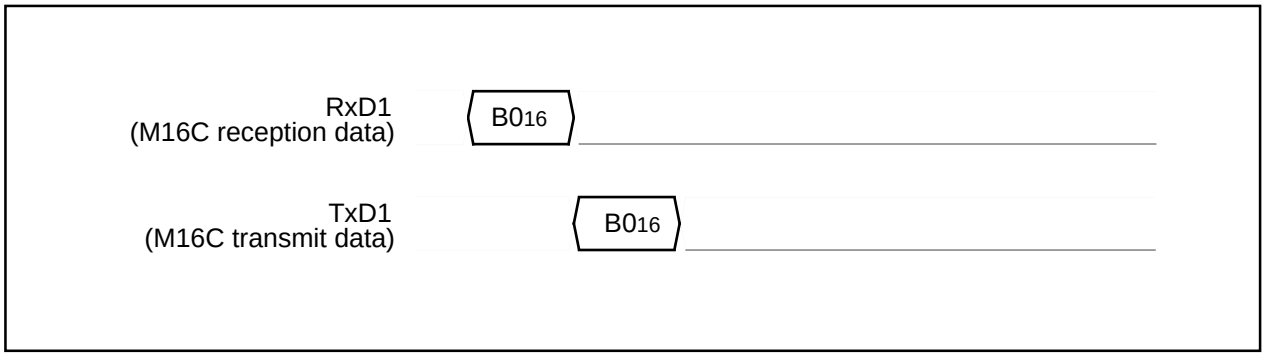

Figure 32.37 Timing of baud rate 9600

Baud Rate 19200

This command changes baud rate to 19,200 bps. Execute it as follows.

(1) Transfer the "B1$_{16}$" command code with the 1st byte.

(2) After the "B1$_{16}$" check code is output with the 2nd byte, change the baud rate to 19,200 bps.

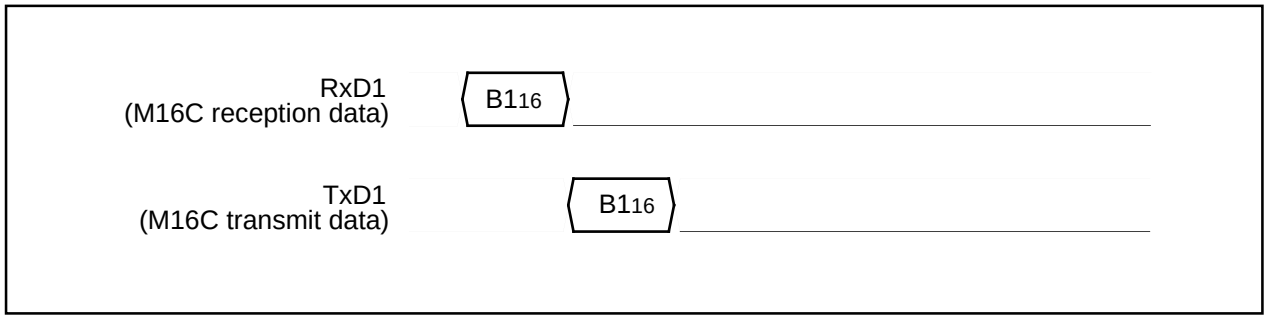

Figure 32.38 Timing of baud rate 19200

Baud Rate 38400

This command changes baud rate to 38,400 bps. Execute it as follows.

(1) Transfer the "B2$_{16}$" command code with the 1st byte.

(2) After the "B2$_{16}$" check code is output with the 2nd byte, change the baud rate to 38,400 bps.

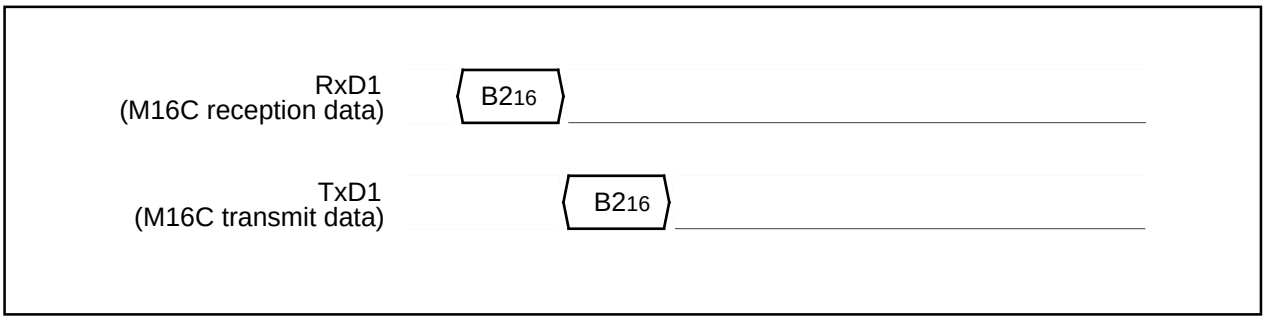

Figure 32.39 Timing of baud rate 38400

Baud Rate 57600

This command changes baud rate to 57,600 bps. Execute it as follows.

(1) Transfer the "B3$_{16}$" command code with the 1st byte.

(2) After the "B3$_{16}$" check code is output with the 2nd byte, change the baud rate to 57,600 bps.

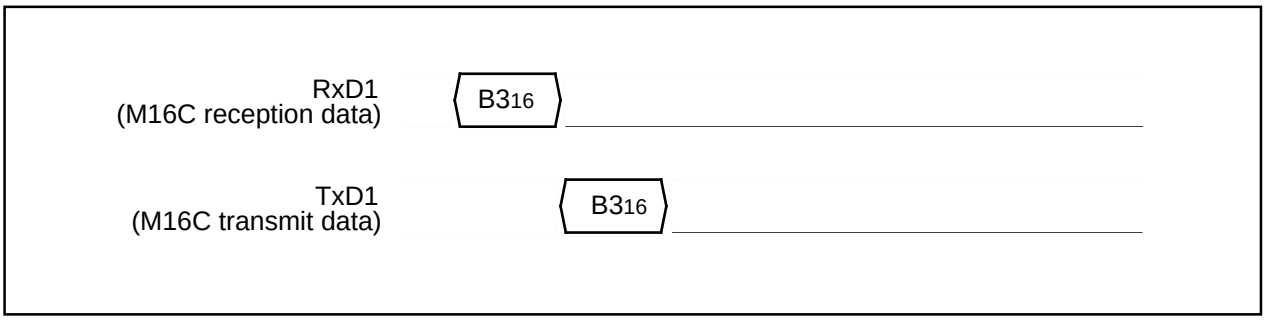

Figure 32.40 Timing of baud rate 57600

Baud Rate 115200

This command changes baud rate to 115,200 bps. Execute it as follows.

(1) Transfer the "B4$_{16}$" command code with the 1st byte.

(2) After the "B4$_{16}$" check code is output with the 2nd byte, change the baud rate to 19,200 bps.

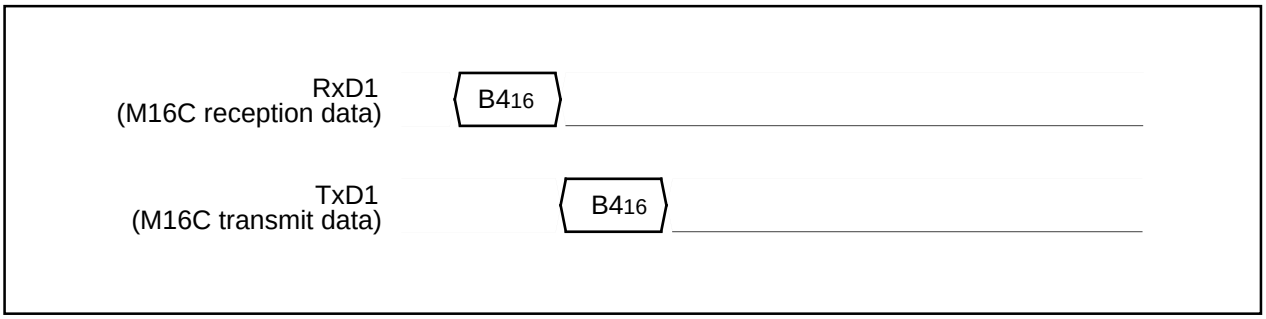

Figure 32.41 Timing of baud rate 115200

Example Circuit Application for The Standard Serial I/O Mode 2

The below figure shows a circuit application for the standard serial I/O mode 2.

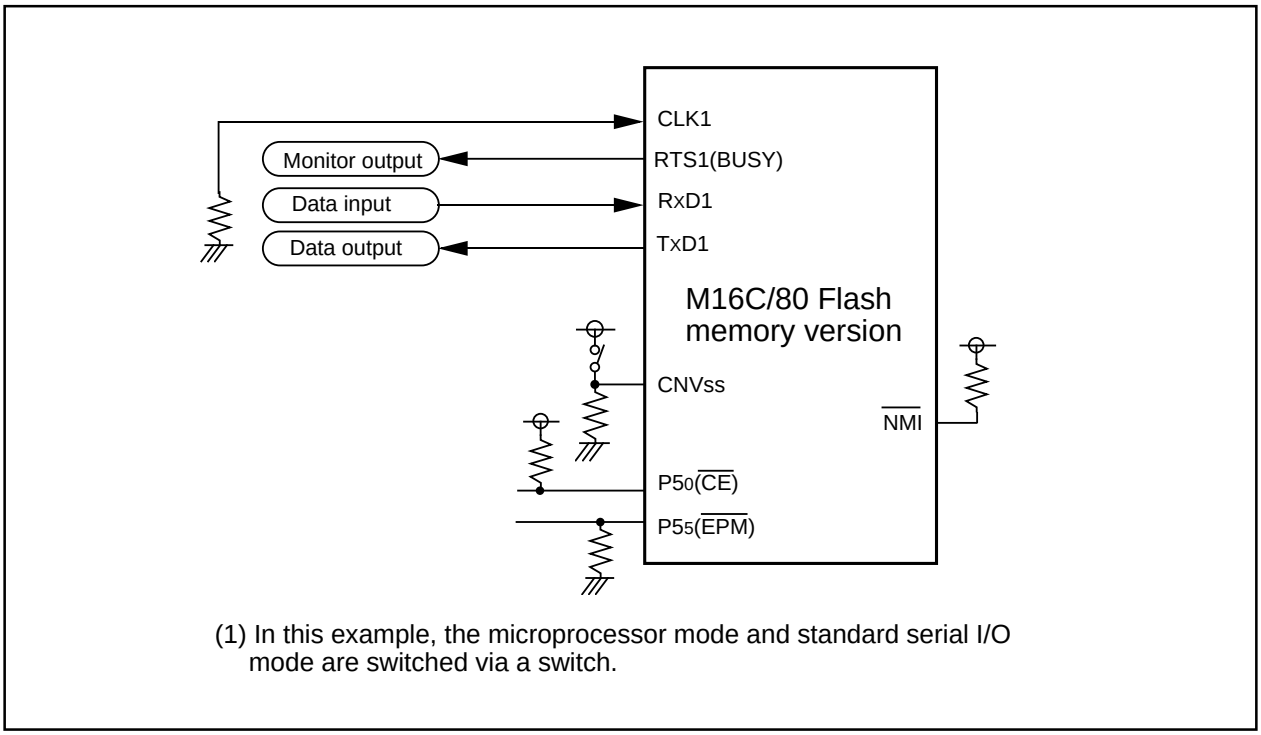

(1) In this example, the microprocessor mode and standard serial I/O mode are switched via a switch.

Figure 32.42 Example circuit application for the standard serial I/O mode 2

33. Appendix External ROM version with built-in boot loader

External ROM version of M16C/80 is available with built-in boot loader (firmware). By using the boot loader, users can download their rewrite program of Flash memory to the internal RAM. When using the following Flash memory*, reprogramming of the external Flash memory can be done without downloading the rewrite program.
For more detail, please refer to the "Volume Boot Loader" in the application note of M16C/80 external ROM version.

*: M5M29GB/T160BVP, M5M29GB/T320BVP and the equivalent of these.

The following shows Renesas plans to develop a line of M16C/80 products with built-in boot loader.

(1) ROM capacity
(2) Package 100P6S-A ... Plastic molded QFP
100P6Q-A ... Plastic molded QFP
144P6Q-A ... Plastic molded QFP

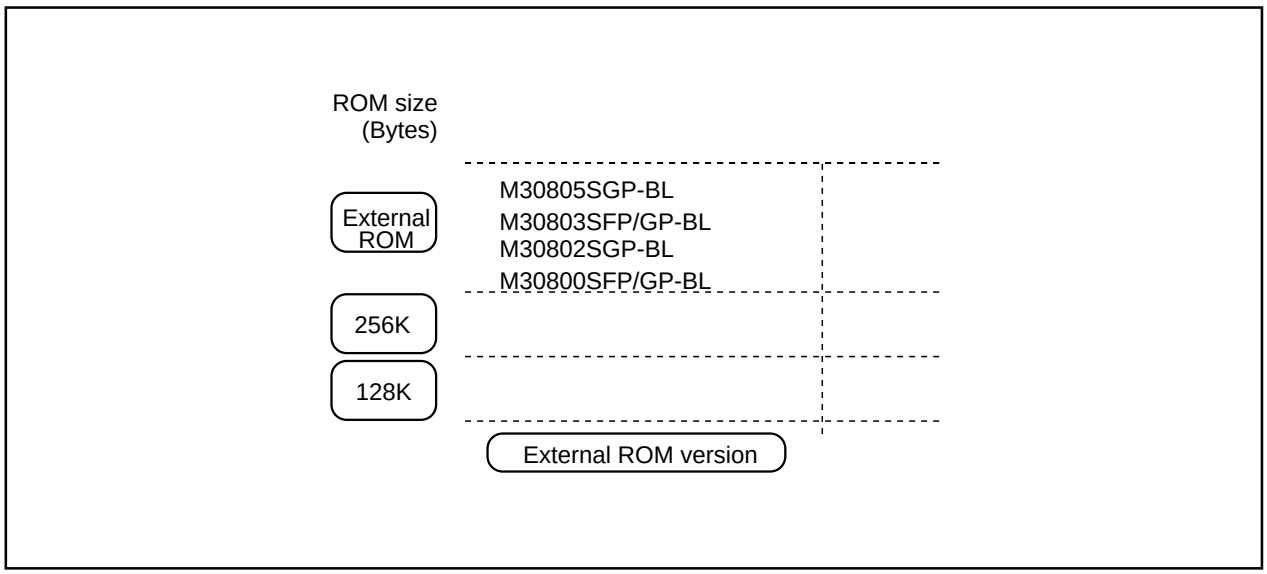

Figure 33.1 ROM Expansion

The following lists the M16C/80 products to be supported in the future.

Table 33.1 Product List

Type No	ROM capacity	RAM capacity	Package type	Remarks
M30800SFP-BL	———	10 Kbytes	100P6S-A	External ROM version with built-in boot loader
M30800SGP-BL			100P6Q-A	
M30802SGP-BL			144P6Q-A	
M30803SFP-BL	———	24 Kbytes	100P6S-A	
M30803SGP-BL			100P6Q-A	
M30805SGP-BL			144P6Q-A	

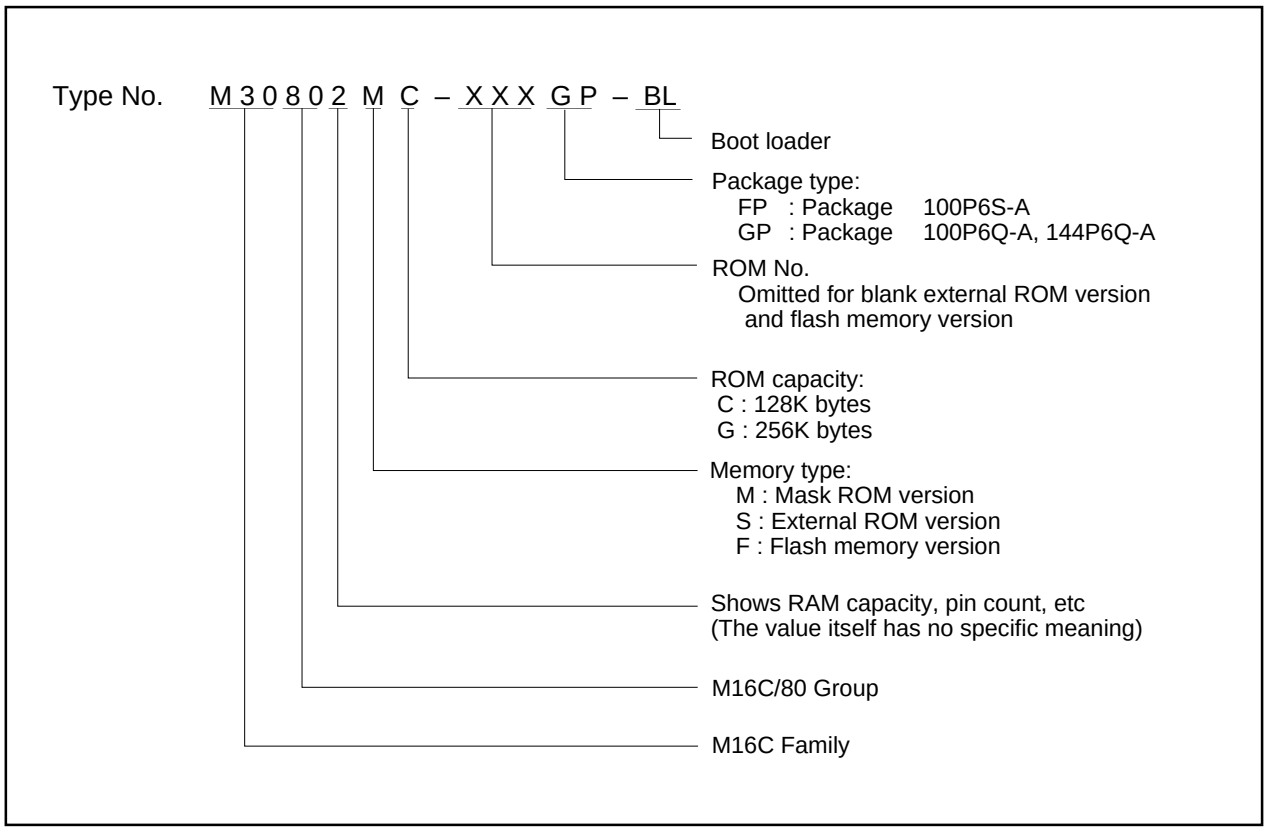

Figure 33.2 Type No., memory size, and package

Package Dimension

100P6S-A Recommended

Plastic 100pin 14×20mm body QFP

EIAJ Package Code	JEDEC Code	Weight(g)	Lead Material
QFP100-P-1420-0.65	–	1.58	Alloy 42

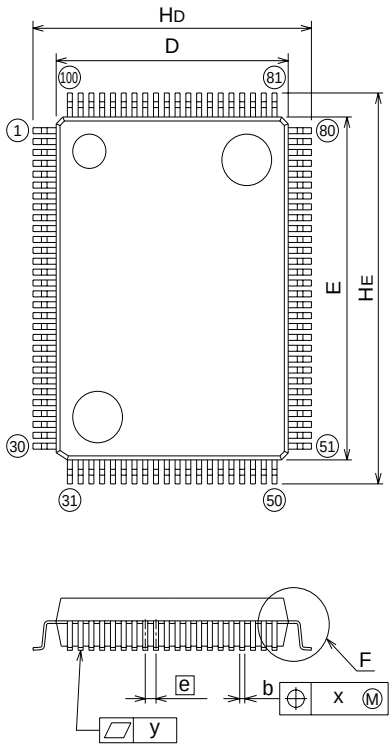

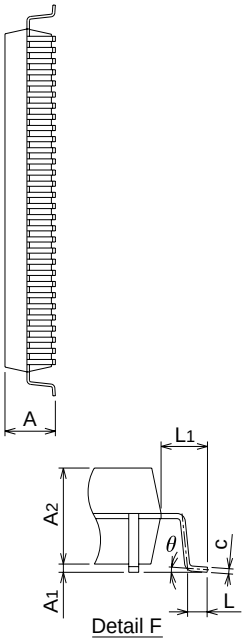



Recommended Mount Pad

Symbol	Dimension in Millimeters		
	Min	Nom	Max
A	–	–	3.05
A1	0	0.1	0.2
A2	–	2.8	–
b	0.25	0.3	0.4
c	0.13	0.15	0.2
D	13.8	14.0	14.2
E	19.8	20.0	20.2
e	–	0.65	–
HD	16.5	16.8	17.1
HE	22.5	22.8	23.1
L	0.4	0.6	0.8
L1	–	1.4	–
x	–	–	0.13
y	–	–	0.1
θ	0°	–	10°
b2	–	0.35	–
l2	1.3	–	–
MD	–	14.6	–
ME	–	20.6	–

100P6Q-A Recommended

Plastic 100pin 14×14mm body LQFP

EIAJ Package Code	JEDEC Code	Weight(g)	Lead Material
LQFP100-P-1414-0.50	–	0.63	Cu Alloy

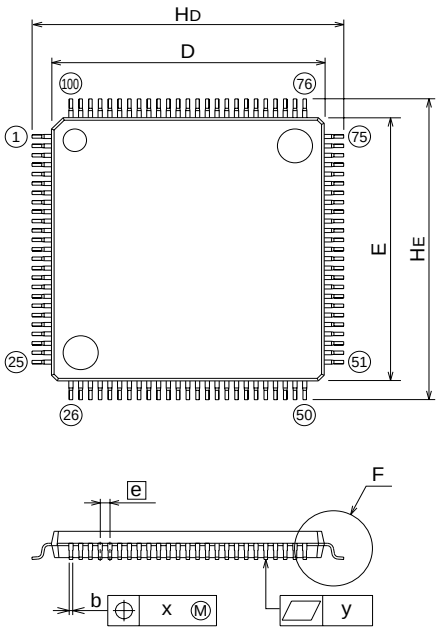

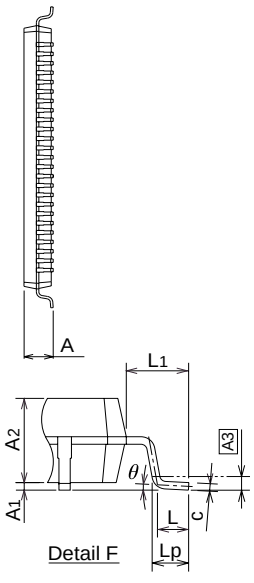



Recommended Mount Pad

Symbol	Dimension in Millimeters		
	Min	Nom	Max
A	–	–	1.7
A1	0	0.1	0.2
A2	–	1.4	–
b	0.13	0.18	0.28
c	0.105	0.125	0.175
D	13.9	14.0	14.1
E	13.9	14.0	14.1
e	–	0.5	–
HD	15.8	16.0	16.2
HE	15.8	16.0	16.2
L	0.3	0.5	0.7
L1	–	1.0	–
Lp	0.45	0.6	0.75
A3	–	0.25	–
x	–	–	0.08
y	–	–	0.1
θ	0°	–	10°
b2	–	0.225	–
l2	0.9	–	–
MD	–	14.4	–
ME	–	14.4	–

144P6Q-A

Recommended

Plastic 144pin 20×20mm body LQFP

EIAJ Package Code	JEDEC Code	Weight(g)	Lead Material
LQFP144-P-2020-0.50	–	1.23	Cu Alloy

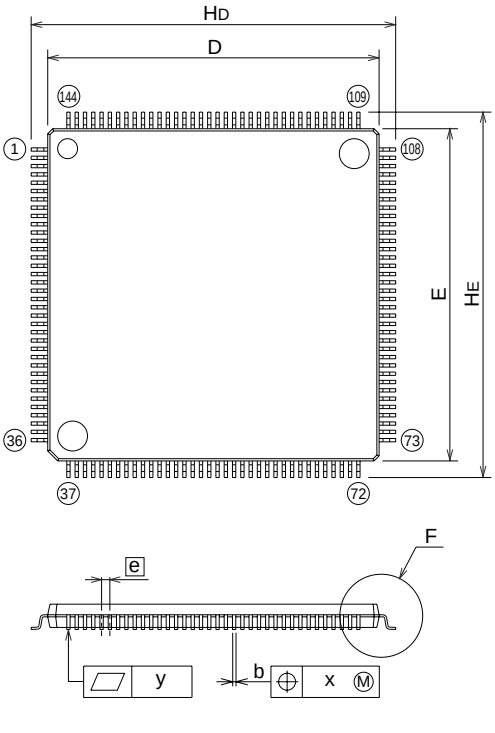

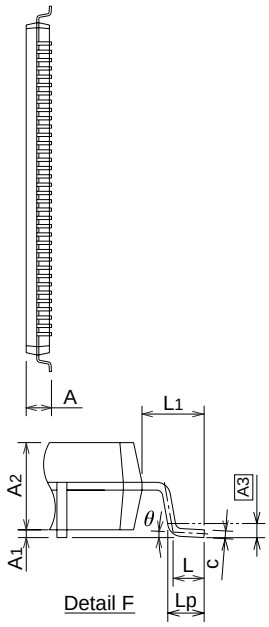



Recommended Mount Pad

Symbol	Dimension in Millimeters		
	Min	Nom	Max
A	–	–	1.7
A1	0.05	0.125	0.2
A2	–	1.4	–
b	0.17	0.22	0.27
c	0.105	0.125	0.175
D	19.9	20.0	20.1
E	19.9	20.0	20.1
e	–	0.5	–
HD	21.8	22.0	22.2
HE	21.8	22.0	22.2
L	0.35	0.5	0.65
L1	–	1.0	–
Lp	0.45	0.6	0.75
A3	–	0.25	–
x	–	–	0.08
y	–	–	0.1
θ	0°	–	8°
b2	–	0.225	–
l2	0.95	–	–
MD	–	20.4	–
ME	–	20.4	–

Register Index

A

AD0 to AD7 **169**
ADCON0 **168**, **170**, **171**, **172**, **173**, **174**
ADCON1 **168**, **170**, **171**, **172**, **173**, **174**
ADCON2 **169**
ADIC **63**
AIER **73**

B

BCN2IC to BCN4IC **63**

C

CM0 **46**, **79**
CM1 **46**
CPSRF **96**, **107**
CRCD **178**
CRCIN **178**

D

DA0 to DA1 **177**
DACON **177**
DCT0 to DCT3 **84**
DM0IC to DM3IC **63**
DM0SL to DM3SL **82**
DMA0 to DMA3 **85**
DMD0 to DMD1 **83**
DRA0 to DRA3 **85**
DRAMCONT **183**
DRC0 to DRC3 **84**
DS **31**
DSA0 to DSA3 **85**
DTT **113**

F

FMR0 to FMR1 **276**

I

ICTB2 **113**
IDB0 to IDB1 **113**
IFSR **71**
INT0IC to INT5IC **63**
INVC0 to INVC1 **112**

K

KUPIC **63**

M

MCD **47**

O

ONSF **96**

P

P0 to P10 **197**
P11 **198**
P12 to P13 **197**
P14 **198**
P15 **197**
PCR **206**
PD0 to PD10 **195**
PD11 **196**
PD12 to P13 **195**
PD14 **196**
PD15 **195**
PM0 **27**
PM1 **28**
PRCR **55**
PS0 to PS1 **200**
PS2 to PS3 **201**
PSC **203**
PSL0 PSL2 **202**
PSL3 **203**
PUR0 to PUR2 **204**
PUR3 to PUR4 **205**

R

REFCNT **185**
RLVL **49**, **64**
RMAD0 to RMAD3 **73**
ROMCP **288**

S

S0RIC to S4RIC **63**
S0TIC to S4TIC **63**

T

TA0,TA3 **95**
TA0IC to TA4IC **63**
TA0MR to TA4MR **94**, **97**, **98**, **103**, **104**
TA1,TA2,TA4 **95**, **114**
TA11,TA21,TA41 **114**
TA1MR,TA2MR,TA4MR **115**
TA2MR to TA4MR **100**
TABSR **95**, **107**, **114**
TB0,TB1,TB3,TB4,TB5 **107**
TB0IC to TB5IC **63**
TB0MR to TB5MR **106**, **108**, **109**, **110**
TB2 **107**, **114**
TB2MR **115**
TBSR **107**
TRGSR **96**, **114**

U

U0BRG to U4BRG **129**
U0C0 to U2C0 **131**
U0C1 to U4C1 **133**
U0MR to U4MR **130**, **139**, **146**
U0RB to U4RB **129**
U0TB to U4TB **129**
U2SMR to U4SMR **134**, **156**
U2SMR2 to U4SMR2 **135**, **156**
U2SMR3 **136**
U3C0 to U4C0 **132**
U3SMR3 to U4SMR3 **136**, **163**
UCON **134**
UDF **95**

W

WCR **40**
WDC **79**
WDTS **79**

X

X0R to X15R **181**
XYC **180**

Y

Y0R to Y15R **181**

Version	Contents for change	Revision date
REV.B	• Page 1 line 5 1 M byte --> 16 M bytes • Page 1 line 15 10 MHz with software one wait --> 10 MHz : under planning • Page 1 line 16 35 mW (f(XIN)=20MHz, without software wait, Vcc=5V; M30800MC-XXXFP target value) --> 45 mA (M30800MC-XXXFP) • Page 1 X-Y converter ---- 1 circuit Addition • Page 4 line 28 35 mA --> 45 mA • Page 6 figure 1.1.4 • Page 18 figure 1.5.4 and corresponding pages (106) Peripheral subfunction select register --> Function select register C (107) Port function select register 0 --> Function select register A0 (108) Port function select register 1 --> Function select register A1 (109) Peripheral function select register 0 --> Function select register B0 (110) Peripheral function select register 1 --> Function select register B1 (111) Port function select register 2 --> Function select register A2 (112) Port function select register 3 --> Function select register A3 (113) Peripheral function select register 2 --> Function select register B2 • Page 21 figure 1.6.3 Register name change same as figure 1.5.4 • Page 24 figure 1.8.1 Processor mode register 0 Note 6 --> Note 7, Note 6 Addition Processor mode register 1 Note 3 • Page 31 line 4 Addition: The ALE signal is occurred regardless of internal area and external area. • Page 31 table 1.10.4, Page 33 table 1.10.5 R/$\overline{W}$ --> $\overline{RD}$/$\overline{WR}$ • Page 42 table 1.11.4 System clock control register 0 Note 2 • Page 51 line 7, table 1.15.1 port function select register 3 (address $03B5_{16}$) --> port function select register 3 (address $03B5_{16}$) and D/A control register (address $039C_{16}$) • Page 60 line 3 the interrupt occurs. --> the interrupt can be set to occur on input signal level and input signal edge. • Page 65 line 10 Set register --> When writing to DCT2, DCT3, DRC2, DRC3, DMA2 and DMA3, set register • Page 67 table 1.20.2 Addition: Note 5 • Page 86 line 1 successively when --> successively two times when • Page 93 line 16 Count source input --> Count source input (Set the corresponding function select register A to I/O port.) • Page 114 table 1.25.6, page 122 table 1.26.1 UARTi transmit/receive mode register Addition: Note 2 UARTi transmit/receive mode register Addition: Note 3 • Page 115 table 1.25.7 UARTi transmit/receive mode register 0 Delate: Note 3 • Page 120 line 13 Addition: -Set the corresponding function select register A to I/O port • Page 123 table 1.26.3 • Page 130 table 1.27.3 • Page 139 figure 1.29.2 • Page 142 line 2 0623_{16} --> 0326_{16} • Page 144 table 1.29.5 • Page 156 table 1.31.2 D/A control register (Note) Addition: Note • Page 164 figure 1.34.2 16-bit bus mode A9 --> $\overline{A9}$ • Page 165 line 5 f_{32} --> BCLK(frequency x 32)	'98. 10.19

Version	Contents for change	Revision date
REV.B	• Page 165 figure 1.34.3 operation clock --> BCLK • Page 169 they function as output regardless of the contents of the direction registers. When pins are to be used as the outputs for the D/A converter, do not set the direction registers to output mode. --> set the corresponding function select registers A, B and C. When pins are to be used as the outputs for the D/A converter, set the function select register of each pin to I/O port, and set the direction registers to input mode. Table 1.35.1 lists each port and peripheral function.	'98.10.19
REV.C	All page M30800MC-XXXFP --> M16C/80 (100-pin version) group Page 2 Figure 1 changed, GP package is added Page 3 Figure 3 Note 1 and Note 2 is added Page 5 Figure 4, Table 2 New type no. is added Page 6 Figure 5 GP is added Page 10 Line 2 18 registers --> 28 registers Page 11 (7) Set USP and ISP to an even number so that execution efficiency is increased. --> added Page 17 Figure 11 (54) UART4 special mode register 3 --> added Page 18 Figure 12 UART3 special mode register 3 --> added UART2 special mode register 3 --> added Function select register B3 --> added Page 20 Figure 14 UART4 special mode register 3 --> added UART3 special mode register 3 --> added UART2 special mode register 3 --> added Page 21 Figure 15 Function select register B3 --> added Page 24 Figure 23 PM1 Note 4 -->added Page 31 Figure 26 Page 45 Table 14, Page 46 Table 15 Note --> added Page 50 Figure 32-4 Changed Page 51 Line 6 port function select register 3 --> function select register A3 Page 52 Line 17 FFFFE4$_{16}$ to FFFFE7$_{16}$ are all --> FFFFE7$_{16}$ is Page 53 Table 17 BRK instruction If the vector is --> If the contents of FFFFE7$_{16}$ is Page 53 Table 18 Instruction fetch and DBC --> delated Page 58 Figure 36 IPL --> RLVL Page 61 Figure 38 004D$_{16}$ --> 0093$_{16}$ Page 67 Figure 44-1Note 3 and 6 --> added Page 68 Figure 45 memory --> memory (forward direction) Page 70 Figure 46-2DMAi memory address reload register Note: vector register (SVP) --> save PC register (SVP) Page 84 Figure 56 Note 4 addresses 0342$_{16}$ and 0343$_{16}$ --> address 0343$_{16}$ Page 93 Table 30 Count source: TBj overflow --> added Page 96 Figure 69 Three-phase PWM control register 0 Note 4:both bit 0 and 1 --> bit 1	'98.3.2

Version	Contents for change	Revision date
REV.C	Three-phase PWM control register 1 Page 100 Line 1 In three-phase --> In "L" active output polarity in three-phase Page 100 Line 26,31 the state of set by port direction register --> the high-impedance state Page 101 Figure 73 Right: INV14 --> added Page 103 Figure 74 Page 108 Table 32 UART4 LSB first/MSB first selection : Note 1 --> Note 2 Page 118 Figure 83 UART transmit/receive control register 2 Page 119 Figure UART 3,4 special mode register 3 --> added Page 126 Line 3 CLK and CLKS select bit (bits 4 and 5 at address 0370_{16}) --> port function select register (bits of related to-$P6_4$ and $P6_5$) Page 145 Page 176 Table 124 P91: STxD3 output --> added P97: STxD4 output --> added Page 178 Figure 125-2 Function select register A3 Page 179 Figure 125-3 Function select register B0 Page 180 Figure 125-4 Function select register B3 Page 187 A/D Converter (5) Page 188 DMAC	'98.3.2
	Page1 Supply voltage 4.0V-5.5V, Mask ROM version is added. Page 5 Table 1.1.1 DMAC 2 channels --> 4 channels Page 8 P0 description is changed Page 9 P6 description is changed P7, 8, 9, 10 equivalent to P0 --> P6 Page 10 Figure 1.2.1 M30800FC, M30803FG are added. Page 18 Figure 1.4.3 (15) DRAM control register 0XXX0000 --> ?XXX???? Page 19 Figure 1.4.4 Delate Note, (143)-(147) 00 --> ?? Page 20 Figure 1.5.1 Add Note Page 25 Figure 1.6.1 Processor mode register 1 When reset 00_{16} --> $C0_{16}$ Page 30 Line 15 ... output to A_9 to A_{20} --> A_8 to A_{20} Page 32 Figure 1.7.2 Page 35 (8) BCLK output Page 38 Figure 1.7.6 Page 39 Figure 1.7.7 Page 40 Figure 1.8.1 and 1.8.2 Note Page 42 Page 43 Figure 1.8.4 Page 44 Figure 1.8.5 Note 2, Line 6 Pin outputs "L" is delated. Page 45 Page 47 Line 15 ... as BCLK --> as BCLK from the interrupt routine Table 1.8.3 Page 48 Status Transition of BCLK Page 51 Figure 1.8.7 Page 52 Line 6, Figure 1.8.6 Delate D/A control register Page 56 Line 14	'98.4.12

Version	Contents for change	Revision date
REV.C	Page 58 Table 1.9.3 Software interrupt number 40,41, Add fault error, Add Note 2 Page 59 Interrupt control register Line 4 delate Page 64 Interrupt sequence (1) Page 66 Saving registers Last line added Page 67 Interrupt Priority *1 delated, Last line added Page 72 (2) Setting the stack pointer Last line added Page 74 Watchdog timer Line 2 A watchdog timer interrupt is generated when --> Whether a watchdog timer interrupt is generated or reset is selected when Last part :Watchdog timer function select bit is initialized only at reset. After reset, watchdog timer interrupt is selected. added Page 75 Figure 75 System clock control register 0 added Page 97 Figure 1.13.9 Count value Page 181 Figure 1.25.4 Page 182 Figure 1.25.5 Page 131 Figure 1.16.12 Both register Note2 added Page 135 Table 1.17.3 RxDi bit 1 and 6 at address $03C7_{16}$ --> bit 1 and 7 ... Page 132 Table 1.18.3 RxDi bit 1 and 6 at address $03C7_{16}$ --> bit 1 and 7 ... Page 147 Figure 1.19.1 Upper figure changed, note added Page 153 Bit 4 overflow --> underflow Page 154 Figure 1.20.3 overflow --> underflow Page 159 Clock phase setting UARTi transmission-reception control register 0 ..., whereas UARTi special mode register 3 ... --> Bit 6 of UARTi transmission-reception control register 0 ..., whereas bit 1 of UARTi special mode register 3 ... Line 15 ... output is high impedance. --> ... output is indeterminate. Page 171 Line 3 Set the function select register A to I/O port and the direction register to input mode. added Page 171 Figure 1.22.2 Note delate Page 176 Figure 1.24.3 added Page 178 Figure 1.25.1 When reset --> indeterminate, Note 4 is added. Page 200 Table 1.26.2 and 1.26.3 and Figure 1.26.14 CNVss is added Page 204- Electric characteristics added	
Rev.C1	Page 214 Table 1.28.22 $t_{h(BCLK-DW)}$ add Page 220 Figure 1.28.6 $t_{h(BCLK-CAS)}$ --> $t_{h(BCLK-DW)}$ Page 223 Figure 1.28.9 WR, WRL, WRH(sepalate bus) wave change	99.5.12
Rev.C2	Page 24 Line 3 A software reset has almost the same ... --> A software reset has the same ...	99.5.20
	Page 161 Note 2: When f(X_{IN}) is over 10 MHz, the f_{AD} frequency must be under 10 MHz by dividing. --> addition	99.6.4
	Page 18 Figure 1.4.3 (60) Timer B3,4,5 count start flag value change Page 19 Figure 1.4.4 Flash memory control register 0 and 1 added Page 22 Figure 1.5.3 Flash memory control register 0 and 1 added	99.7.6

Version	Contents for change	Revision date
	Page 43 Figure 1.8.4 CM0 Note 5 delate Page 81 Figure 1.11.5 DMAi memory address reload register Address DRA2, DRA3 000000_{16} --> $XXXXXX_{16}$ Page 181, 182 Figures 1.25.4-1.25.5 D0-D15 waveform changed Page 185 (6) Pull up control register changed Page 208 Table 1.28.3 V_{T+}-V_{T-} $TB0_{IN}$-$TB2_{IN}$ --> $TB0_{IN}$-$TB5_{IN}$, $TA2_{OUT}$-$TA4_{OUT}$ --> $TA0_{OUT}$-$TA4_{OUT}$ Page 211 Table 1.28.19 Page 212 Table 1.28.20 Page 213 Table 1.28.21 Page 214 Table 1.28.22 Page 216 Figure 1.28.2 Page 217 Figure 1.28.3 Page 218 Figure 1.28.4 Page 219 Figure 1.28.5 Page 220 Figure 1.28.6 Page 221 Figure 1.28.7 Page 223 Figure 1.28.9	
Rev.C3	Flash memory ROM version added	99.9.24
	Page 2,3 Figure 1.1.1, 1.1.2 Japanese font change to English font	99.12.8
Rev.D	Page 1 • DMAC...4 channels (trigger: 24 sources) --> 31 sources • Supply voltage 4.2 to 5.5V (f(XIN)=20MHz) Flash memory version--> addition • Interrupt...4 software --> 5 software Page 1,5 Table 1.1.1 Feature • Memory capacity ROM 128 Kbytes --> (See ROM expansion figure.) RAM 10K --> 10/20 Kbytes Page 5 Table 1.1.1 Interrupt...4 software --> 5 software Page 2, 3 Figure 1.1.1, 1.1.2 Note 1 addition Page 6 Figure 1.1.4, Table 1.1.2 M30803MG-XXXFP/GP addition Page 7 Figure1.1.5 ROM capacity G:256 Kbytes addition Page 8 P00 to P07 However, it is possible to select pull-up resistance presence to the usable port as I/O port by setting. --> addition CNVss Connect it to the Vss pin when operating in single-chip or memory expansion mode. Connect it to the Vcc pin when in microprocessor mode. --> Connect it to the Vss pin when operating in single-chip or memory expansion mode after reset. Connect it to the Vcc pin when in microprocessor mode after reset. BYTE When operating in single-chip mode,connect this pin to VSS. --> When not using the external bus,connect this pin to VSS. Page 9 P50 to P57 In single chip mode, --> delate Page 10 Figure 1.2.1 M30803FG --> M30803MG/FG Page 13 Figure 1.4.3 (2) processor mode register $C0_{16}$ --> 00_{16} Page 20 to 23 Figure 1.5.1 to 1.5.4 Note addition Page 23 Figure 1.5.4 Note 2 addition	14/3/'00

Version	Contents for change	Revision date
	Page 25 Figure 1.6.1, 1.6.2 Figure 1.6.1 is divided to Figure 1.6.1and 1.6.2 Page 30 Table 1.7.4 Page 34 Figure 1.7.3 Note addition Page 36 Line 3 the chip select control register --> the wait control registe Page 38, 39 Figure 1.7.6, 1.7.7 Note change Page 42 Line 7 addition When the main clock is stoped (bit 5 at address 0006_{16} =1) or the mode is shifted to stop mode (bit 0 at address 0007_{16} =1), the main clock division register (address $000C_{16}$) is set to the divided-8 mode. Page 42 (3)BCLK When shifting to stop mode, --> When main clock is stoped or shifting to stop mode, Page 43 Figure 1.8.4 CM0 Note 6 change, Note 7, 8 addition, CM1 Note 4 addition Page 44 Figure 1.8.5 Note 2 change Page 48 Line 5 When shifting to stop mode and reset, --> When shifting to stop mode, reset or stopping main clock, (12) Low power dissipation mode addition When the main clock is stoped, the main clock division register (address $000C_{16}$) is set to the division by 8 mode. Page 51 Figure 1.8.7. Clock transition Note 3, 4 addition Page 52 Line 9 addition Page 54 Software Interrupts (2) Overflow interrupt, "CMPX" addition Page 55 (2) Peripheral I/O interrupts • Bus collision detection/start, stop condition (UART2, UART3, UART4) interrupts --> change Page 57 • Variable vector tables addition Set an even address to the start address of vector table setting in INTB so that operating efficiency is increased. Page 58 Table 1.9.3 Bus collision detection/start, stop condition interrupts --> Bus collision detection, start/stop condition detection interrupts Page 58 Table 1.9.3, page 68 Figure 1.9.8 Software interrupt number 40, 41 fault errir --> addition Page 71 Address match interrupt Line 7 addition Page 72 (3) The $\overline{\text{NMI}}$ interrupt • Do not reset the CPU with the input to the $\overline{\text{NMI}}$ pin being in the “L” state. --> • Signal of "L" level width more than 1 clock of CPU operation clock (BCLK) is necessary for $\overline{\text{NMI}}$ pin. Page 72 (4) External interrupt Page 74 Figure 1.10.1 Page 76 Line 2 "DMAC is a function that to transmit 1 data of a source address (8 bits /16 bits) to a destination address when transmission request occurs. " addition. Page 76 Line 12 addition When writing to DSA2 and DSA3, set register bank select flag (B flag) to "1" and use LDC instruction to set SB and FB registers. Page 76 Figure 1.11.1 Page 77 Table 1.11.1 Transfer memory space (16 Mbyte space) --> addition	

Version	Contents for change	Revision date
	Page 78 Figure 1.11.2 Note :6 OR instruction --> OR instruction etc. Page 80 Figure 1.11.4 DRCi • Transfer counter --> • Transfer count register Page 81 Figure 1.11.5 DMAi, DSAi, DRAi Transfer count specification "(16 Mbytes area)" addition DRAi memory address counter --> memory address register Page 85 Line 9 addition (1) Internal factors, (2) External factors change Page 87 Fugure 1.12.1 "Timer B2 overflow" addition Page 88 Fugure 1.12.2 Timer A --> Timer B2 overflow (to timer A count source) Page 93 Table 1.13.2 Cout source • TB2 overflows, TAj overflows --> •TB2 overflows or underflows , TAj overflows or underflows Page 95 Figure 1.13.7 When using two-phase signal processing Note 3 --> addition Page 102 Figure 1.14.3 TBSR When reset 00_{16} --> $000XXXXX_{16}$ b4-b0 When read, the value is "0" --> indeterminate Page 104 Table 1.14.2 Cout source • TBj overflows --> •TBj overflows or underflows Page 124 Figure 1.16.5 UiTB Note 1 delate Page 126-127 Figure 1.16.7 to 1.16.8 CRD change Page 130 Figure 1.16.11 SDHI Enabled <--> Disabled Page 144 (a) Separate $\overline{CTS}/\overline{RTS}$ pins function (UART0) Page 146 Table 1.19.1 Addition in "Other things" Page 147 Figure 1.19.1 è„Figure A "L" level returns from TxD due to the occurrence of a parity error. --> A "L" level returns from SIM card... Page 149 Figure 1.19.4 Note addition Page 150 Table 1.20.1 Note 1: LSB first --> MSB first, Note 3 Change Page 156 Figure 1.20.4 4 to 5 cycles --> 3 to 6 cycles Page 163, 165-169 Figure 1.21.2-Figure 1.21.8 ADCON1 Note 2-6 addition Page 170 Line 14,23 addition Page 171 Line 5 addition Page 172 Figure 1.22.3 Note :3 D/A control register --> D/A register Page 176 Figure 1.24.3 Page 178 Figure 1.25.1 Note 1 position change Page 178 Line 10 DRAM controler --> addition Page 179 Figure 1.25.2 Note 1 --> change Page 184 (1) Direction registers, (2) Port registers --> change Page 185 (4) Function select register B --> change Page 189 Figure 1.26.4 Port Pi direction register Note 2 addition Page 190 Figure 1.26.5 Port Pi register Note 1 and 2 addition Page 191 Table 1.26.1 Note addition Page 192 Figure 1.26.6 Function select register A1 Note 1 addition Page 194 Figure 1.26.8 Function select register B1 Note 2 addition Page 195 Figure 1.26.9 Function select register B3 Note 1 --> addition, PSL3_3-PSL3_6 change Page 196 Figure 1.26.13 Port control register Note 2 addition Page 197 Figure 1.26.4 Port Pi direction register Note 2 addition Page 200 Precaution on A/D converter (6) --> addition Page 203 Stop Mode and Wait Mode (2) all clock stop bits --> all clock stop control bits Page 203 Noise addition Page 203 Precaution on interrupt (1) line 7 --> addition	

Version	Contents for change	Revision date
	Page 204 Making power consumption electricity small --> addition Page 207 Table 1.28.3 $V_{T+} - V_{T-}$ SCL_2-SCL_4, SDA_2-SDA_4 Addition Page 208 Table 1.28.5 Note Change Page 215 Table 1.28.22 t_{RP} expression change Page 217-220 Figure 1.28.2-1.28.5 $t_{w(WR)}$ addition, $t_{h(BCLK-DB)}$ delate Page 219, 220, 222, 223, 225 Figure 1.28.4, 1.28.5, 1.28.7, 1.28.8, 1.28.10 addition Page 225, 226 Figure 1.28.10, 1.28.11 $t_{h(BCLK-DB)}$ -5 ns.min --> -7 ns.min Page 227 Figure 1.28.12 Refresh timing (self refresh) RAS timing Page 230 3V of electric characteristics addition Page 246 Table 1.29.1 Data hold --> addition Page 247 Figure 1.29.2 Package type 144P6Q --> 144P6Q-A Page 248 Flash memory line 5 change Page 250 Function outline Line 24 (Parallel ... function) --> delate Page 269 Standard serial I/O mode Line 26 externl device --> external device (programmer) Page 285 Figure1.31.21 programer --> peripheral unit (programmer)	
Rev.D3	Page 43 Figure1.8.4 Note of the system clock control register 0-->addition Page 44 Line 4 Note-->addition Page 45 Table1.8.2 Note-->addition Page 71 Line 9 "Address match interrupt is not generated with a start instruction of interrupt routine."-->Delete Page 73 (6) Precaution of Address mach interrupt-->addition Page 79 Figure1.11.2 Note-->change Page 87 Precaution for DMAC-->addition Page 131 Figure1.16.11 Bit 7-->Must set to "1" in selecting IIC mode. Page 152 Figure1.20.1 Bit 7-->Must set to "1" in selecting IIC mode. Page 182 Addition Page 205 (3) Address match interrupt in Interrupt precautions-->addition Page 206 (2) DMAC-->addition Page 207 Precautions for using CLK_{OUT} pin-->addition Page 210 Table1.28.3 Icc when clock stop Topr=25C^{o}-->change Page 212 Table1.28.6 External clock input HIGH and LOW pulse waidth 22-->20 External clock rise and fall time 10-->5 Page 215, 216 Table1.28.19, 20 $t_{h(BCLK-DB)}$-->delete, $t_{w(WR)}$-->addition Page 218 Table1.28.22 $t_{h(BCLK-DB)}$ -5ns --> -7ns Page 233 Table1.28.23 Icc when clock stop Topr=25C^{o}-->change Page 235 Table1.28.27 $t_{h(CAS-DB)}$-->addition Page 238, 239 Table1.28.39, 40 $t_{w(WR)}$ -->addition, $t_{h(BCLK-RD)}$ 0ns-->-3ns Page 240 Table1.28.41 $t_{d(AD-ALE)}=10^9/(f_{(BCLK)}X2)-20$ -->$10^9/(f_{(BCLK)}X2)-27$ Page 241 Table1.28.42 $t_{h(BCLK-CAS)}$ 0ns-->-3ns Page 242 Figure1.28.15 $t_{ac1(RD-DB)}$ min-->max, $t_{ac1(AD-DB)}$ min-->max Page 243 Figure1.28.16 $t_{ac2(RD-DB)}$ min-->max, $t_{ac2(AD-DB)}$ min-->max Page 244, 255 Figure1.28.17 2 wait, Figure1.28.18 3 wait-->addition Page 246 Figure1.28.19 $t_{ac3(AD-DB)}$-->addition, $t_{su(DB-RD)}$-->$t_{su(DB-BCLK)}$, $t_{h(BCLK-RD)}$ 0ns -->-3ns, $t_{d(AD-ALE)}$=(tcyc/2-20)ns--> ... -27)ns Page 247 Figure1.28.20 Addition Page 248, 249 Figure1.28.21, 1.28.22 -->addition	19/6/'00

Version	Contents for change	Revision date
	Page 250 Figure1.28.23 $t_{h(BCLK-DB)}$-->$t_{h(CAS-DB)}$ Page 251 Figure 1.28.24 $t_{d(DB-CAS)}$-->$t_{su(DB-CAS)}$, $t_{h(BCLK-CAS)}$-->$t_{h(BCLK-DB)}$ Page 252 Figure1.28.25 $t_{d(CAS-RAS)}$-->$t_{su(CAS-RAS)}$ Page 255 Table1.29.1 Power supply (under planning)-->delete, Program/erase voltage f(X_{IN})-->f(BCLK), 2.7V-5.5V-->delete	
Rev.E	144-pin version description addition Pages 1, 6 •Supply voltage --> external ROM version addition Page 7 (3) Package 144P6Q --> 144P6Q-A Page 21 Figure 1.4.4 (111) Function select register C 00_{16} --> 0XXXXXX0 (119) Function select register B3 ?0000??? --> 00000X0X Similarly, page 202 Figures 1.26.11 When reset ?0000??? --> 00000X0X Figures 1.26.12 When reset 00_{16} --> 0XXXXXX0 Page 28 Figure 1.6.2 ROMless version addition Page 29 Figure 1.6.3 External area 0 to 3 addition Page 34 Addition Page 37 Figure 1.7.4 Input $\overline{RDY}$ signal at i + 1 cycles for i wait --> $\overline{RDY}$ signal received timing for i wait: i +1 Page 46 Figure 1.8.4 System clock control register 0 CM0 --> contents of the Function changed, Notes 10, 11 addition Page 48 On the second line from the bottom, 'Although stop mode ... must be set to "1".' -->addition Page 49 Table 1.8.4 CS0 to CS3 --> $\overline{CS0}$ to $\overline{CS3}$, $\underline{\overline{BHE}}$ $\overline{WR}$, $\underline{\overline{BHE}}$, $\overline{WRL}$, $\overline{WRH}$, $\underline{\overline{W}}$, $\overline{CASL}$ --> $\overline{WR}$, $\overline{WRL}$, $\overline{WRH}$, $\underline{\overline{DW}}$, $\overline{CASL}$ Page 52 Table 1.8.6 CM0i: Clock control register 0 (address 0006_{16}) bit i, MCDi: Main clock division register (address $000C_{16}$) bit i --> addition Page 60 • Vector table dedicated for emulator Interrupt vector address (address 00002_{016} to 00002_{316})-->... (address 00002_{016} to 00002_{216}) Page 69 Interrupt priority 'the interrupt that a request came to most in the first place is accepted at first, and then,' --> delete Page 75 (6) Explanation of No.1 and No. 2 are partly revised. Page 76, 77 From "• To return from an interrupt..." to the end of page 77 --> addition Page 78 "In the stop...released." on the third line from the bottom --> addition Page 79 Figure 1.10.2 Notes 10, 11 --> addition Page 87 Figure 1.11.6 is partly revised. Page 88 Table for "Coefficient j, k" is partly revised. Page 89 Figure 1.11.7 is partly revised. Page 90 Explanation of (3) is partly revised. Page 94 Figure 1.13.3 Timer Ai register -->Notes 2 to 4 addition, •Pulse width modulation mode (8-bit PWM) --> Values that can be set is changed, Up/down flag --> Note addition Page 97 Figure 1.13.6 --> change Page 98 Table 1.13.3 --> Note 2 addition, •Normal processing operation --> •Normal processing operation (Timer A2 and timer A3), •Multiply-by-4 processing operation --> •Multiply-by-4 processing operation (Timer A3 and timer A4) Page 99 Figure 1.13.7 Timer Ai mode register (When using two-phase pulse signal process-	09/02/'01

Version	Contents for change	Revision date
	ing) --> "Note 2 Timer A2 is fixed to ... multiply-by-4 processing operation." is added, note 3 change Page 109 Figure 1.14.6 Note 1 It is indeterminate when reset --> addition Page 112 Figure 1.15.2 Dead time timer-->Note 1 addition, Timer B2 interrupt occurrence frequency set counter-->Note 3 addition Page 113 Notes 2, 3 --> addition Page 114 three-phase waveform mode --> three phase PWM output mode Page 128 Figure 1.16.5 UARTi bit rate generator --> Note 2 addition Page 128 Figure 1.16.5 UARTi transmit buffer register, UARTi bit rate generator-->Note 1 addition Page 129 Figure 1.16.6 UARTi transmit/receive mode register-->Note 2 addition in CKDIR of UART mode Page 133 Figure 1.16.10 UART transmit/receive control register 2-->Note delete Page 136 Note 2, Page 143 Note 3 ... the UARTi receive interrupt request bit is not set to "1" --> ... the UARTi receive interrupt request bit will not change Page 145 Figure 1.18.1 UARTi transmit/receive mode register (i=0,1) --> Note 1 addition, UARTi transmit/receive mode register (i=2 to 4) --> Note 2 addition Page 157 On the 12th line, ... allocated to bit 3 in UART2 transmission buffer register 1 (address 033F16) ... --> ... allocated to bit 11 in UART2 transmission buffer register (address 033E16) ... Page 161 < Master Mode (TxDi and RxDi are selected, DINC = 0) > ..., and the STxDi, SRxDi and CLKi pins ...--> ..., and the TxDi, RxDi and CLKi pins ... Page 165 Table 1.21.1 Absolute precision --> change Page 170 Table 1.21.3 Reading of result of A/D converter --> (at any time) addition Page 173 Table 1.21.6 Input pin --> change to AN0 to AN7, With emphasis on the pin --> addition Page 182 On the second line from the bottom, ..., and dummy cycle for refresh ... --> ..., and processing necessary for dummy cycle to refresh DRAM ... Page 183 Figure 1.25.2 is partly revised. Page 189 On the 18th and 27th lines, page 194 Port Pi direction register Note 2, page 196 Port Pi register Note 1 ... for setting of bus control such as address bus and data bus is ... --> of pins A0 to A22, $\overline{A23}$, D0 to D15, MA0 to MA12, $\overline{CS0}$ to $\overline{CS3}$, $\overline{WRL}$/$\overline{WR}$/$\overline{CASL}$, $\overline{WRH}$/$\overline{BHE}$/$\overline{CASH}$, $\overline{RD}$/$\overline{DW}$, BCLK/ALE/CLKOUT, $\overline{HLDA}$/ALE, $\overline{HOLD}$, ALE/$\overline{RAS}$, and $\overline{RDY}$ are ... Page 203 Figure 1.26.13 is partly revised. Page 207, 208 Timer A (event counter mode) --> (3) addition, Timer A (one-shot timer mode) --> (2) changes to (3), (2) and (4) addition Page 209 Timer B (pulse period/pulse width measurement mode) --> (3) addition Page 212 to 214 (2) $\overline{NMI}$ interrupt •The $\overline{NMI}$ pin also serves as P85, ... •Signal of "L" level ... --> addition (3) Address match interrupt From "• To return from an interrupt..." to "; Interrupt completed" on page 77 --> addition (4) External interrupt, (5) Rewrite the interrupt control register --> addition Page 215 Explanation of (3) is partly revised. Page 215 $\overline{HOLD}$ signal --> addition Page 216 DRAM controller --> addition	

Version	Contents for change	Revision date
	Page 217 Setting the registers, Notes on the microprocessor mode ... single-chip mode -->addition Page 217 Explanation of note on Flash memroy version is added. Page 219 Note 2 80mA --> –80mA Page 220 Table 1.28.3 Ta --> Topr, Note2 --> addition Pages 220, 243 Tables 1.28.3, 1.28.23 Icc Power supply current ROMless version --> addition, Ta --> Topr, Note 2 --> addition Page 227 Calculation for td(AD-ALE) is partly revised. Page 234, 235 Figures 1.28.6 and 1.28.7 Timing for td(AD-ALE) is partly revised. Page 243 Table 1.28.23 Topr=25°C, when clock is stopped: 2.0µA --> 1.0µA, Notes 1, 2 --> addition Page 250 Table 1.28.41 th(BCLK-RD) Min. 0 ns --> –3 ns Pages 251, 258 to 262 Table 1.28.42, figures 1.28.21 to 1.28.25 th(BCLK-CAS): –3 ns --> 0 ns Pages 251, 259, 261 Table 1.28,42, figures 1.28.22, 1.28.24 th(BCLK-DW): 0 ns --> –3 ns Page 266 Table 1.29.2 M30805FGGP RAM capacity 24 Kbytes --> 20 Kbytes Page 270 Figure 1.30.1 Flash memory control register 0 Note 1 Also write to this bit ... "H" level. --> addition Page 273 (3) Disabling erase or ... serial I/O mode --> delete, (7), (8) --> addition Page 285 Note --> addition Page 288 --> addition Pages 291, 307 Tables 1.31.1, 1.31.5 Note 2 ... status register 1 data --> ... status register data 1 Page 319 144P6Q-A version --> addition	
Rev.E1	Page 32 Table 1.7.3 --> change	16/03/'01
Rev.E2	Page 28 Figure 1.6.1 Note 8 --> addition Page 88 Table for "Coefficient j, k" is partly revised.	10/05/'01
Rev.E3	Page 7 Figure 1.1.5 and Table 1.1.2, product names --> added Page 8 Figure 1.1.6, Boot loader (BL) -->addition Page 85 Figure 1.11.5, DMAi SFR address register, Note 2, destination fixed address --> source fixed address, source fixed address --> destination fixed address Page 218 Precaution of boot loader --> addition Page 319 Appendix boot loader --> addition	20/08/'01
Rev.1.0	Page 4 Figure 1.3 XOUT --> revised Page 18 Figure 4.1 and 4.2 --> revised Page 20 Figure 4.3, Timer B3 mode register value 00?x0000 --> 00??0000 Three-phase output buffer register 0, 1 value 00_{16} --> $3F_{16}$ Page 21 Figure 4.4, Timer B0 mode register value 00?x0000 --> 00??0000 UART transmit/receive control register 2 value x0000000 --> x0xx0000 Flash memory control register1 value ?????0?? --> ????0??? Page 22 (address$006A_{16}$) DM1IC --> DM2IC revised Page 24 (address0370_{16}) UCON2 --> UCON revised Page 26 "Carry out a software reset after oscillation of main clock is fully stable"--> added, (1), (2) --> revised Page 27 Figure 6.1 10:Inhibited --> 10:Must not be set	02/08/'05

Version	Contents for change	Revision date
Rev.1.0	Page 46, 79 Note 9 'Do not set CM04 and CM07 simultaneously.' --> deleted Note 9 'In addition,do not rewrite CM04 and CM05 simultaneously' --> added Page 48 'The priority level of the interrupt which is not used to cancel stop mode,must have been changed to 0.' , 'If only a hardware reset or an NMI interrupt is used to cancel stop mode,change the priority level of all interrupt to 0,then shift to stop mode.' --> added Page 50 'The priority level of the interrupt which is not used to cancel wait mode,must have been changed to 0.', 'If only a hardware reset or an NMI interrupt is used to cancel stop mode,change the priority level of all interrupt to 0,then shift to wait mode.' --> added Page 54 Figure 8.7 The arrow of CM07="1" and CM05="1" deleted. Page 70 Interrupt request accepted. To CLK --> Interrupt request priority detection results output(to clock generation circuit) Page 74 'Signal of "L" level width...for NMI pin.' --> 'Signals input to the NMI ...from the operation clock of CPU.' Page 75 (5) Rewrite the interrupt control register 'When attempting to clear the interrupt...Instructions :MOV' --> added Page 78 'Therefore,we recom-mend using the watchdog timer to improve reliability of a system.' --> added Page 90 '2 instructions' --> '26 cycles', Program example revised, (4) --> added Page 91 (5) Recommended procedure for starting DMA transfer--> added Page 92 'Count source for each timer becomes an operation clock for timer operation as counting and reloading,etc.' --> added, Figure 12.1 One-shot mode --> One-shot timer mode Page 95 Figure 13.1 Up/Down flag Note2 --> added Figure13.3 Timer Ai register (FFFF --> FFFE revised) Page 99 'TAiIN pin function', 'TAiOUT pin function' specification revised Two-phase pulse input (Set the corresponding function select registers A to I/O port,and port direction register to "0") Page 103, 104 Selected by event/trigger select register --> Selected by event/trigger select bit Page 106 Figure 14.2, 11: Inhibited --> 11: Must not be set Page 109 TBiIN Pin function Programable I/O port or --> added, Figure 14.5 11: Inhibited --> 11: Must not be set Page 110 Interrupt request generation timing, Figure 14.6 'When an overflow occurs.(Simultaneously,the timer Bi overflow flag... the timer Bi mode register.)' --> 'Timer overflow.When an overflow occurs... the timer start flag is set to "1". Page 112 Figure 15.1 Note 5 Rewrite the INV00 to INV02 and INV06 bits when the timers A1,A2,A4 and B stop. -->added Page 113 Figure 15.2 Note 1--> added Note 4 --> added Three-phase output buffer register 0, 1 00_{16} --> $3F_{16}$ Page 114 Figure 15.3, Timer Ai register value Note 2 --> added Page 130 to 132 Inhibited --> Must not be set Page 134 Figure 16.10 UART transmit/receive control register 2 x0000000 --> x0xx0000	02/08/'05

Version	Contents for change	Revision date
Rev.1.0	Page 136 Figure 16.12 Special mode register 3 'SDAi digital delay time set bit' --> revised 001: 1 to 2 cycles of 1/f(XIN) 010: 1 to 2 cycles of 1/f(XIN) 011: 1 to 2 cycles of 1/f(XIN) 100: 1 to 2 cycles of 1/f(XIN) 101: 1 to 2 cycles of 1/f(XIN) 110: 1 to 2 cycles of 1/f(XIN) 111: 1 to 2 cycles of 1/f(XIN) Page 150 Figure18.5 /P --> P revised Page 152 Typical transmit/receive timing in UART mode (compliant with the SIM interface) Diagram revised Page 153 (a) Function for outputting a parity error signal With the error signal output enable bit ... TxDi pin when a parity error is detected. --> During reception,with the error signal output enable bit ... TxDi pin when a parity error is detected. In step with this function, ... of a parity error signal. --> deleted Therefore parity error signals ... interrupt program. --> added And during transmission, ... of the transfer clock. --> added Page 160 the baud rate generator --> the UARTi bit rate generator baud rate generator stops counting. -->the count stops Page 160 UART2 Special Mode Register 2 (Address 0336$_{16}$) --> UARTi Special Mode Register 2(i=2 to 4) (Address 0336$_{16}$,0326$_{16}$,02F6$_{16}$), SCL2 --> SCLi, SDA2 --> SDAi, UART2 --> UARTi revised Page 161 UART2 Special Mode Register 3(Address 0335$_{16}$) --> UARTi Special Mode Register 3(i=2 to 4)(Address 0335$_{16}$,0325$_{16}$,02F5$_{16}$) SDA2 --> SDSi revised Page 163 Figure 20.6 Special mode register 3 'SDAi digital delay time set bit' --> revised 001: 1 to 2 cycles of 1/f(XIN) 010: 1 to 2 cycles of 1/f(XIN) 011: 1 to 2 cycles of 1/f(XIN) 100: 1 to 2 cycles of 1/f(XIN) 101: 1 to 2 cycles of 1/f(XIN) 110: 1 to 2 cycles of 1/f(XIN) 111: 1 to 2 cycles of 1/f(XIN) Page 176 Set the function select register A... --> Set the function select register A3... Page 193 Figure 26.2, P74, P75, P80 move to (inside dotted-line included) Page 208 Timer --> added Page 209 (5) If an exernal triger input is used to start counting, the next external triger input must be avoided within 300ns before the timer A reaches "0000h". --> added Page 210 Timer B (pulse period/pulse width measurement mode) (4) --> added	02/08/'05

Version	Contents for change	Revision date
Rev.1.0	Page 210 Stop Mode and Wait Mode (4),(5) --> added (4) Follow the procedure below to enter stop mode. • Initial Setting Set each interrupt priority level after setting the minimum interrupt priority level required to exit stop mode and wait mode, controlled by the RLVL2 to RLVL0 bits in the RLVL register, to "7". • Before Execution of WAIT Instruction [1] Set the interrupt priority level of the interrupt being used to exit stop mode [2] Set the interrupt priority levels of the interrupts not being used to exit stop mode [3] Set the IPL in the FLG register. Then set the minimum interrupt priority level required to exit stop mode and wait mode to the same level as the IPL. (Interrupt priority level of the interrupt used to exit stop mode > mimimum interrupt priority level to exit stop mode ≥ interrupt priority level of the interrupts not used to exit stop mode) [4] Set the I flag to "1" [5] Set the CM10 bit in the CM1 register to "1" (all clocks stop) after setting the PRC0 bit in the PRCR register to "1" (write enabled) • After Exiting Stop Mode Set the interrupt priority level required to exit stop mode to "7" immediately after exiting stop mode. (5) When microcomputer enters stop mode again after exiting from stop mode using the NMI interrupt, use the following procedure to set the CM10 bit to "1". [1] Exit stop mode using the /NMI interrupt [2] Generate a dummy interrupt [3] Set the CM10 bit to "1" example: INT #63 ; Dummy interrupt BSET CM1 ; All clocks stopped (in stop mode) ; /*for dummy interrupt* / DUMMY: REIT	02/08/'05

Version	Contents for change	Revision date
Rev.1.0	Page 210 (2) --> (2)Wait and (3)Stop divided (2) When entering wait mode, the instruction queue reads ahead to instructions following the WAIT instruction, and the program stops. The next instruction may be executed before entering wait mode, depending on the combination of instructions and their execution timing. Therefore, write at least 4 NOP instructions following the WAIT instruction. (3) When entering stop mode, the instruction queue reads ahead to instructions to set the CM10 bit to "1", and the program stops. The next instruction may be executed, before entering stop mode or executing the interrupt routine to exit stop mode, depending on the combination of instructions and their execution timing. Therefore, write a jmp.b instruction and at least 4 NOP instructions following the instruction to enter stop mode as shown below. bset 0,prcr ; Removing protection bset 0,cm1 ; Stopping all clocks(Entering stop mode) jmp.b LABEL_001 ; Executing jmp.b instruction(Jump to the next instruction soon LABEL_001: ; with adding no instruction between jmp.b and LABEL.) nop ; nop(1) nop ; nop(2) nop ; nop(3) nop ; nop(4) mov.b #0,prcr ; Setting protection • • • Page 211 (4) (6) --> Description revised Page 211 A/D Converter (6) --> added Page 214 (2)The NMI interrupt 'Signal of "L" level width...for NMI pin.' --> 'Signals input to the NMI ...from the operation clock of CPU.' Page 217 (5) Rewrite the interrupt control register 'When attempting to clear the interrupt...Instructions :MOV' --> added Page 217 DMAC '2 instructions' --> '26 cycles', Program example revised Page 218 (4), (5) --> added Page 219 $\overline{\text{HOLD}}$ signal When P40 to P47 and P50 to P52 are set to... will not become high-impedance ports. --> added Memory expansion mode added Page 221 Notes on the microprocessor mode and transition after shifting from the microprocessor mode to the memory expansion mode / sigle-chip mode --> deleted	02/08/'05

Version	Contents for change	Revision date
Rev.1.0	Page 221 Notes on CNVSS pin reset at "H" level --> added Page 222 Microprocesser mode or Memory expansion mode --> added Page 222 Microprocessor(Usage Precaution) --> added If the software reset is executed when the CNVss pin is connected to Vcc to start up in microprocessor mode, write at least three NOP instructions following the writing instruction to the PM0 Register. example: mov.b #02H,PRCR bset 3,PM0 ; or "mov.b #8BH,PM0" (instruction to execute software reset) nop ; write at least three NOP instructions nop nop nop Page 227 Table 28.3 , Table 28.4 --> added Page 249 (Note 4) contained in the title of Table 28.23 --> deleted Page 274 Read data from an even address in the user ROM area when reading the status register. --> added Page 278 main clock frequency --> BCLK Page 279 Table 30.1 Read status register command's second bus cycle 'X' --> 'X(Note 6) Note 6 (that is an even address) --> added Page 286 Figure 30.8 (When reading the status register,set an even number address in the user ROM area). --> added Page 287 Figure 30.9 ROM code protect level 2 set bit --> deleted, Notes 3 to 5 --> added Page 289 In this mode, the M16C/80 (flash memory version) operates in a manner similar to the flash memory M5M29FB/T800 from Mitsubishi. Since there are some differences with regard to the functions not available with the microcomputer and matters related to memory capacity, the M16C/80 cannot be programed by a pro gramer for the flash memory. --> deleted Page 7,271,323 Mitsubishi-->Renesas revised Page 289 Mitsubishi -->deleted Page 294 from Mitsubisi --> from the factory revised Page 323 Mitsubisi --> the following revised All Pages Words standardized: A/D converter, D/A converter and XY converter All Pages Figure number and Table number change	02/08/'05

RENESAS 16-BIT SINGLE-CHIP MICROCOMPUTER
HARDWARE MANUAL
M16C/80 Group

Publication Data : Rev.B Oct. 19, 1998
Rev.1.00 Aug. 02, 2005

Published by : Sales Strategic Planning Div.
Renesas Technology Corp.

© 2005. Renesas Technology Corp., All rights reserved. Printed in Japan.

M16C/80 Group
Hardware Manual



Renesas Technology Corp.
2-6-2, Ote-machi, Chiyoda-ku, Tokyo, 100-0004, Japan