
NEW!

Square Air Core Inductors – 1111SQ

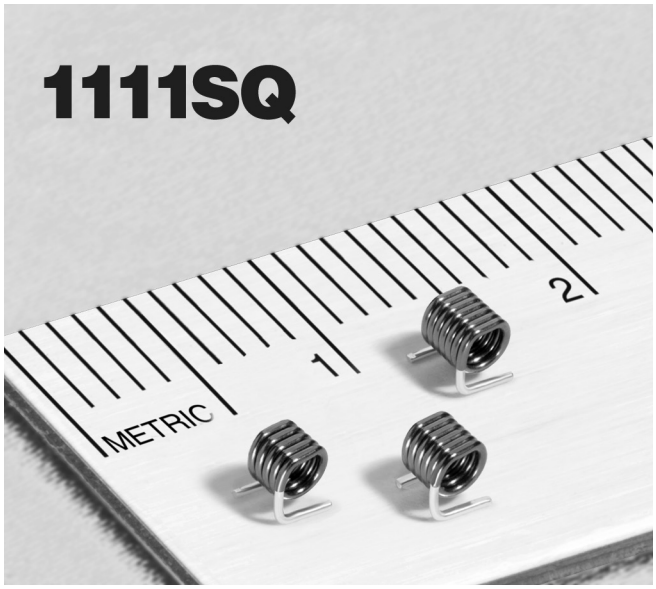

- Excellent Q factors – 210 at 400 MHz!
- Inductance values from 27 to 47 nH
- Flat top and bottom for reliable pick and place and mechanical stability

Terminations RoHS compliant tin-silver over copper
Environment RoHS compliant, halogen free
Weight 34 – 50 mg
Ambient temperature –40°C to +125°C with Irms current, +125°C to +145°C with derated current
Storage temperature Component: –40°C to +145°C. Tape and reel packaging: –40°C to +80°C
Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles
Temperature Coefficient of Inductance (TCL) +5 to +70 ppm/°C
Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)
Failures in Time (FIT) / Mean Time Between Failures (MTBF) One per billion hours / one billion hours, calculated per Telcordia SR-332
Packaging 600/7″ reel; 2500/13″ reel; Plastic tape: 12 mm wide, 0.35 mm thick, 8 mm pocket spacing, 3.05 mm pocket depth
PCB washing Tested with pure water or alcohol only. For other solvents, see Doc787_PCB_Washing.pdf

Part number[1]	Inductance[2] (nH)	Percent tolerance	Q[3] typ	Test frequency (MHz)	SRF min[4] (GHz)	DCR (mOhm) typ	DCR (mOhm) max	Irms[5] (A)
1111SQ-27N_E_	27	**5,2**	200	400	2.60	7.0	8.1	5.5
1111SQ-30N_E_	30	**5,2**	200	400	2.40	7.2	8.3	5.5
1111SQ-33N_E_	33	**5,2**	200	400	2.30	8.3	9.5	4.8
1111SQ-36N_E_	36	**5,2**	200	400	2.30	8.5	9.8	4.8
1111SQ-39N_E_	39	**5,2**	200	400	2.20	8.7	10.0	4.8
1111SQ-43N_E_	43	**5,2**	200	400	2.20	9.4	10.8	4.4
1111SQ-47N_E_	47	**5,2**	200	400	2.20	9.8	11.3	4.4

1. When ordering, specify **tolerance**, **termination** and **packaging** codes:

1111SQ-47NJEC

Tolerance: **G** = 2% **J** = 5%
(Table shows stock tolerances in bold.)

Termination: **E** = RoHS compliant tin-silver (96.5/3.5) over copper.
Special order, added cost:
T = RoHS tin-silver-copper (95.5/4/0.5) over copper or **S** = non-RoHS tin-lead (63/37) over copper.

Packaging: **C** = 7″ machine-ready reel. EIA-481 embossed plastic tape (600 parts per full reel).
B = Less than full reel. In tape, but not machine ready.
To have a leader and trailer added ($25 charge), use code letter C instead.
D = 13″ machine-ready reel. EIA-481 embossed plastic tape (2500 parts per full reel). Factory order only, not stocked.

2. Inductance measured at specified test frequency, 0.1 Vrms, 0 A using an Agilent/HP 4286A LCR meter or equivalent with a Coilcraft CCF1191C test fixture.
3. Q measured at specified test frequency, using an Agilent/HP 4291A impedance analyzer or equivalent.
4. SRF measured using an Agilent/HP 8753 network analyzer or equivalent with a Coilcraft CCF1143 test fixture.
5. Current that causes a 20°C temperature rise from 25°C ambient.
6. Electrical specifications at 25°C.

Refer to Doc 362 “Soldering Surface Mount Components” before soldering.

Coilcraft®
www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 990-1 Revised 3/25/13


© Coilcraft Inc. 2013
This product may not be used in medical or high risk applications without prior Coilcraft approval.
Specification subject to change without notice.
Please check web site for latest information.

NEW!

RoHS COMPLIANT

Halogen Free

Square Air Core Inductors – 1111SQ

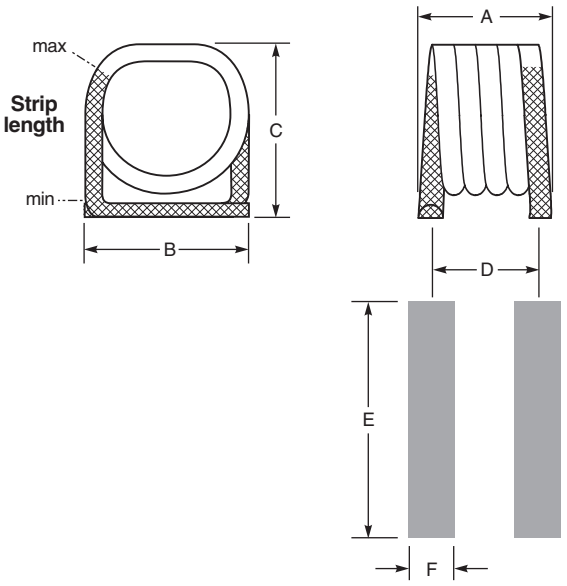


Recommended Land Pattern


Part number	A	B	C	D	E	F
1111SQ-27N	0.105±0.010 2,67 ±0,254	0.105 ±0.015 2,67 ±0,127	0.110 ±0.005 2,79 ±0,127	0.090 2,29	0.120 3,05	0.040 1,02
1111SQ-30N	0.105 ±0.010 2,67 ±0,254	0.105 ±0.015 2,67 ±0,127	0.110 ±0.005 2,79 ±0,127	0.090 2,29	0.120 3,05	0.040 1,02
1111SQ-33N	0.115 ±0.010 2,92 ±0,254	0.105 ±0.015 2,67 ±0,127	0.110 ±0.005 2,79 ±0,127	0.100 2,54	0.120 3,05	0.040 1,02
1111SQ-36N	0.115 ±0.010 2,92 ±0,254	0.105 ±0.015 2,67 ±0,127	0.110 ±0.005 2,79 ±0,127	0.100 2,54	0.120 3,05	0.040 1,02
1111SQ-39N	0.115 ±0.010 2,92 ±0,254	0.105 ±0.015 2,67 ±0,127	0.110 ±0.005 2,79 ±0,127	0.100 2,54	0.120 3,05	0.040 1,02
1111SQ-43N	0.130 ±0.010 3,30 ±0,254	0.105 ±0.015 2,67 ±0,127	0.110 ±0.005 2,79 ±0,127	0.110 2,79	0.120 3,05	0.040 1,02
1111SQ-47N	0.130 ±0.010 3,30 ±0,254	0.105 ±0.015 2,67 ±0,127	0.110 ±0.005 2,79 ±0,127	0.110 2,79	0.120 3,05	0.040 1,02

All dimensions are in $\frac{\text{inches}}{\text{mm}}$.


Typical Q vs Frequency

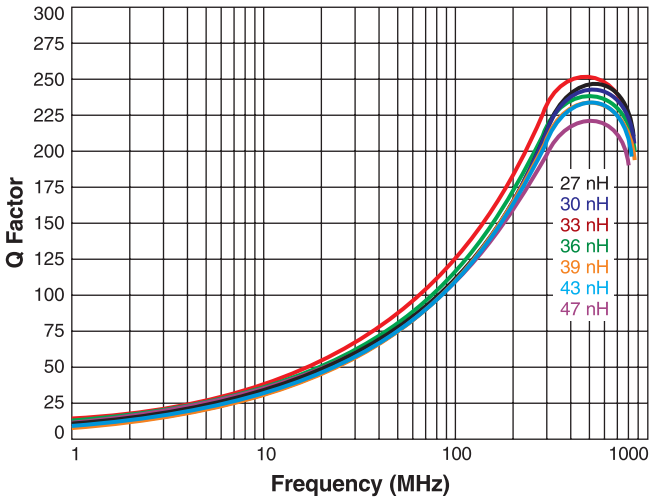

Typical L vs Frequency

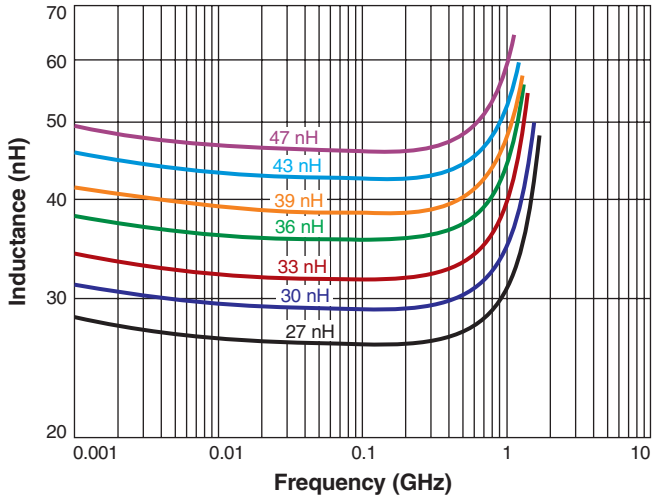

Irms Derating

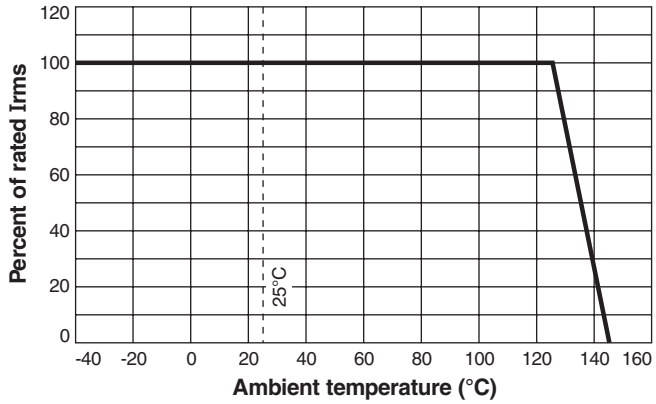

Coilcraft®
www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 720-2 Revised 03/25/13

© Coilcraft Inc. 2013
This product may not be used in medical or high risk applications without prior Coilcraft approval.
Specification subject to change without notice.
Please check web site for latest information.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Coilcraft:

1111SQ-36NJED 1111SQ-43NJED 1111SQ-47NGEB 1111SQ-39NJEB 1111SQ-36NJEB 1111SQ-43NJEB 1111SQ-39NJED 1111SQ-33NJED 1111SQ-47NGED 1111SQ-36NGED 1111SQ-39NGEB 1111SQ-39NGED 1111SQ-36NGEB 1111SQ-33NJEB 1111SQ-27NJEB 1111SQ-30NGEB 1111SQ-30NGED 1111SQ-47NJEB 1111SQ-47NJED 1111SQ-27NGEB 1111SQ-30NJEB 1111SQ-27NJED 1111SQ-33NGEB 1111SQ-43NGED 1111SQ-43NGEB 1111SQ-30NJED 1111SQ-27NGED 1111SQ-33NGED