
| REV. | AUTH. | DATE | | |
|---|---|---|---|---|
| A | R.L. | 9/20/02 | INITIAL RELEASE | APPROVED |
| B | R.L. | 8/28/03 | REVISED NOTES. | APPROVED |

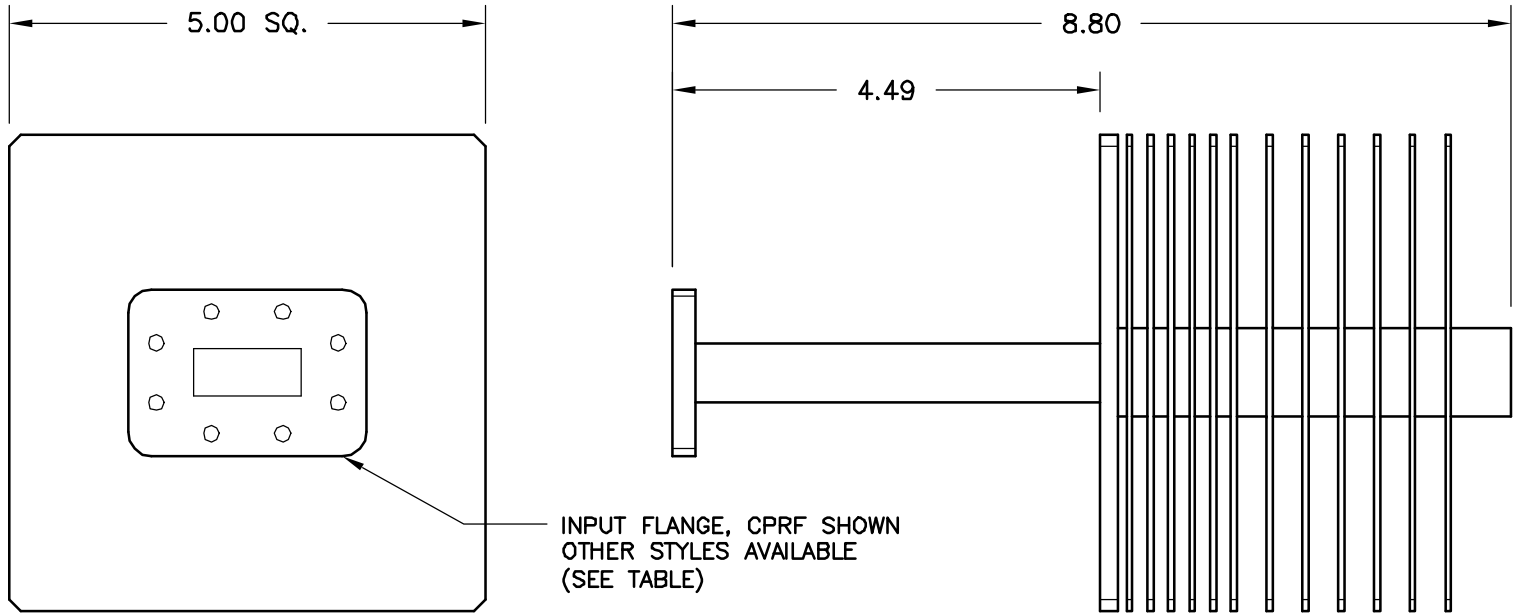


PERFORMANCE SPECIFICATIONS

| | |
|---|---|
| MODEL CODE: | 112-760-FLANGE TYPE* |
| WG SIZE: | WR112 ALUM. |
| FREQ. RANGE: | 7.05 – 10.0 GHz |
| POWER: | 3000W AVG. |
| MAX. VSWR: | 1.15 MAX. |
| FLANGE TYPE: | SEE CHART BELOW |

| *ATM MODEL# DESIGNATION FOR COMMON FLANGES |
|---|
| 1 = CPRG |
| 2 = CPRF |
| 6 = UG COVER |
| 7 = UG CHOKE |
| 8 = SPECIAL |

| | | | |
|---|---|---|---|
| MATERIAL: 6061/T6 ALUM. | TREATMENT: IRIDITE | DRAWN: R. LYNCH | DATE: 9/20/02 |
| FINISH: HI-TEMP BLACK | MOD NO.: 112-760-X | CHECKED | DATE |
| | | APPROVED | DATE |
| | | CAGE CODE: 0RBN4 | DO NOT SCALE DWG |

# OUTLINE, WR112 VERY HIGH POWER TERMINATION

ADVANCED TECHNICAL MATERIALS, INC.
49 RIDER AVE., PATCHOGUE N.Y. 11772
TEL: (631) 289-0363 FAX: (631) 289-0358
http://www.atmmicrowave.com

PROPRIETARY NOTICE:
THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT THE PRIOR WRITTEN CONSENT OF ATM, INC.

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS ±1/64 DECIMALS ±.01 ±.005 ANGLES ±1/2°

SHEET. 1/1

SCALE 1 : 2

DWG. NO. 5198

REV. B