
ADELS contact

## Screw-Screwless Connectors

# 900 Q/10 DS

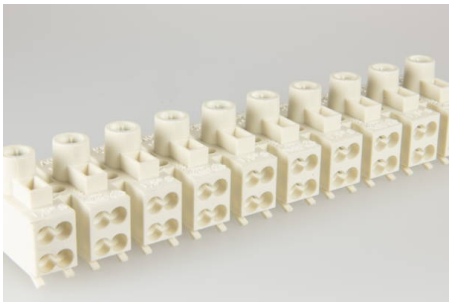

Terminal Block, 10 pole, Fixing: Screw, Wire Protector (DS): yes, Clamping Units per Pole: 4, Voltage Rating: 450 V, Current Rating: 17.5 A, Cross-Section Rating External: 2.5 mm², Cross-Section Rating Internal: 1.5 mm²

## Order Info

| | |
|---|---|
| **Reference Number (ref. no.)** | 114110 |
| **Applications** | Lighting, Electrical Appliances |
| **PU** | 300 |

## Type

| | |
|---|---|
| **Type** | Terminal Block |
| **Number of poles** | 10 pole |
| **Clamping Units per Pole** | 4 |
| **Colour** | white |
| **Cross-Section** | 1.5 / 2.5 mm² |
| **Connection Type** | Screw-screwless |
| **Wire Protector (DS)** | yes |

## Technical Data

| | |
|---|---|
| **Voltage Rating** | 450 V |
| **Current Rating** | 17.5 A |
| **Insulating Material** | PA 6.6 |
| **Contact Material** | Brass |
| **Flammability Rating** | V-2 |
| **max. Ambient Temperature Operation** | 85 °C |
| **Assembly Contact Screw** | 0.8x4.0 / ↻ 0.5 Nm |
| **Internal Core Cross-Section max.** | 1.5 mm² |
| **Internal Stripping Length** | 7.0-7.5 mm |
| **External Stripping Length** | 8.0-8.5 mm |
| **Fixing** | Screw |
| **Internal Core Cross-Section min.** | 0.5 mm² |
| **Type of Conductor Solid External** | yes |
| **Type of Conductor Flexible External** | yes |
| **Type of Conductor Solid Internal** | yes |
| **Type of Conductor Stranded Internal** | yes |
| **Cross-Section Rating External** | 2.5 mm² |

| | |
|---|---|
| **Cross-Section Rating Internal** | 1.5 mm² |
| **Approbation EN60998** | 900Q_EN60998_20080806_20091013_VDE_ENEC_40025015_web.p |
| **Approbation UL** | 900-07(RZ)_900-Q(RZ)_20140819_UL_E63492_1-20_Description_we |
| **Approbation CSA** | Schraub_Steck_Schraubenlos_SI_Klemmen_20160429_CSA_700765 |

## Accessories

| | |
|---|---|
| **ZEL 110** | 196420 |